



NCC RADIO TEST REPORT

Equipment : AC1300 + AV600 全家庭 Hybrid Mesh Wi-Fi 系統
Brand Name : tp-link
Model Name : Deco P7
Applicant : 聯洲國際有限公司
 新北市板橋區中山路一段 156 號 13 樓
Manufacturer : 普聯技術有限公司
 深圳市南山區深南路科技園工業廠房 24 棟南段 1,3,4,5
 層, 28 棟 1-4 層
Standard : LP0002 Section 3.10.1 (2018-01-10)

The product was received on Nov. 21, 2018, and testing was started from Jan. 25, 2019 and completed on Mar. 04, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	8
2 Test Configuration of EUT	9
2.1 Test Channel Mode	9
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test	10
2.4 Accessories	10
2.5 Support Equipment.....	11
2.6 Test Setup Diagram	12
3 Transmitter Test Result	14
3.1 AC Power-line Conducted Emissions	14
3.2 Emissions in Restricted Frequency Bands.....	16
4 Test Equipment and Calibration Data	21
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emissions in Restricted Frequency Bands	
Appendix C. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0

Page Number : 3 of 21
Issued Date : Mar. 12, 2019
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	3.10.1.4	Antenna Requirement	PASS	-
3.1	2.3	AC Power-line Conducted Emissions	PASS	-
3.2	3.10.1.5	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Cliff Chang

Report Producer: Wendy Pan

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4G	BT-LE(1Mbps)	1	1

Note:

- ♦ 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the channel separation
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Port	Brand	P/N	Antenna Type	Connector	Gain (dBi)			
						WLAN 2.4G	WLAN 5G B1	WLAN 5G B4	Bluetooth
1	1	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
2	2	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
3	1	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
4	2	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
5	1	TP-LINK	Bluetooth-M5	Omni-Directional Antenna	N/A	-	-	-	1.40

Note: The above information was declared by manufacturer.

For 2.4GHz IEEE 802.11b/g/n/ac mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For 5GHz IEEE 802.11n/a/ac mode (2TX/2RX):

Ant. 3 and Ant. 4 could transmit/receive simultaneously.

For bluetooth mode (1TX/1RX):

Only Ant. 5 could transmit/receive.

1.1.3 Table for EUT support function

Operating Mode	WLAN	Bluetooth 4.0	PLC
AP Router	2.4GHz/ 5GHz Band 1+4	V	X
Extender	2.4GHz/ 5GHz Band 1+4	X	V
Description			
The EUT has two operating modes for detail as below:			
1. At the AP router mode, it can support WLAN 2.4GHz + 5GHz and Bluetooth 4.0 simultaneous action.			
2. At the Extender mode, only WLAN 2.4GHz + 5GHz simultaneous operation is supported.			

Note: The above information was declared by manufacturer.



1.1.4 Table for Slight Change

This product is an extension of original one reported under Sporton project number: TR672842AD

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1.Adding a model name: Deco P7. for the detail differences as below: a. Adding an adapter and the model name is T120120-2B5 with support PLC function at extender mode only. b.Removing BT2.0.	1.AC power-line conducted emissions 2.Emissions in Restricted Frequency Bands (Intentional and Unintentional <1GHz and Unintentional>1GHz)
2.Updating test standard to "NCC LP0002 (Jan. 10, 2018) Section 3.10.1" from "LP0002 Section 3.10.1 (2016-08-23)".	Do not affect the test results.

1.1.5 EUT Operational Condition

EUT Power Type	From Power Adapter
Test Software Version	QRCT



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ NCC LP0002 (2018-01-10)
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-318-0055
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated (Intentional and Unintentional <1GHz and Unintentional >1GHz)	03CH01-CB	KJ Chang	22°C / 54%	Jan. 25, 2019 ~ Mar. 04, 2019
AC Conduction	CO02-CB	Max Lin	23~25°C / 51~58%	Jan. 28, 2019 ~ Jan. 29, 2019

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Unintentional - Normal Link
1	EUT - (AP Router Mode) + WLAN: 2.4GHz + 5GHz + BT
2	EUT - (Extender Mode) + WLAN: 2.4GHz + 5GHz
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Unintentional - CRX
1	EUT CRX with BT
2	EUT CRX with WLAN 2.4GHz
3	EUT CRX with WLAN 5GHz
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode < 1GHz	Intentional - CTX
1	EUT CTX with BT
2	EUT CTX with WLAN 2.4GHz
3	EUT CTX with WLAN 5GHz
For operating mode 3 is the worst case and it was record in this test report.	

Operating Mode unintentional 1GHz~5th	According to the Emissions in Restricted Frequency Bands emission below 1GHz test for Unintentional - CRX, the Mode 3 generated the worst test result. And the measurement for Emissions in Restricted Frequency Bands emission above 1GHz test for unintentional 1GHz~5th will follow this same test configuration.
	Unintentional - CRX
1	EUT CRX with WLAN 5GHz

Note: The EUT only uses in Z axis.

2.3 EUT Operation during Test

For CTX/CRX Mode:

The EUT was programmed to be in continuously transmitting/receiving mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	TP-Link	T120120-2B5	Input: 100-240Vac ~ 50/60Hz, 0.4A Output: 5Vdc, 1.2A, 12Vdc, 1.2A



2.5 Support Equipment

For Test Site No: CO02-CB

For Unintentional - Normal Link test

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	WAN NB	DELL	E6430	N/A
B	2.4G NB	DELL	E6430	N/A
C	5G NB	DELL	E6430	N/A
D	LAN NB	DELL	E6430	N/A
E	AC1300 + AV600 全家庭 Hybrid Mesh Wi-Fi 系統 (Device)	tp-link	Deco P7	TE7P7
F	Router	TP-LINK	Archer C55	N/A
G	Device NB	DELL	E6430	N/A

For Test Site No: 03CH01-CB (below 1GHz)

For Intentional and Unintentional test


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

For Test Site No: 03CH01-CB (above 1GHz)


For Unintentional test

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

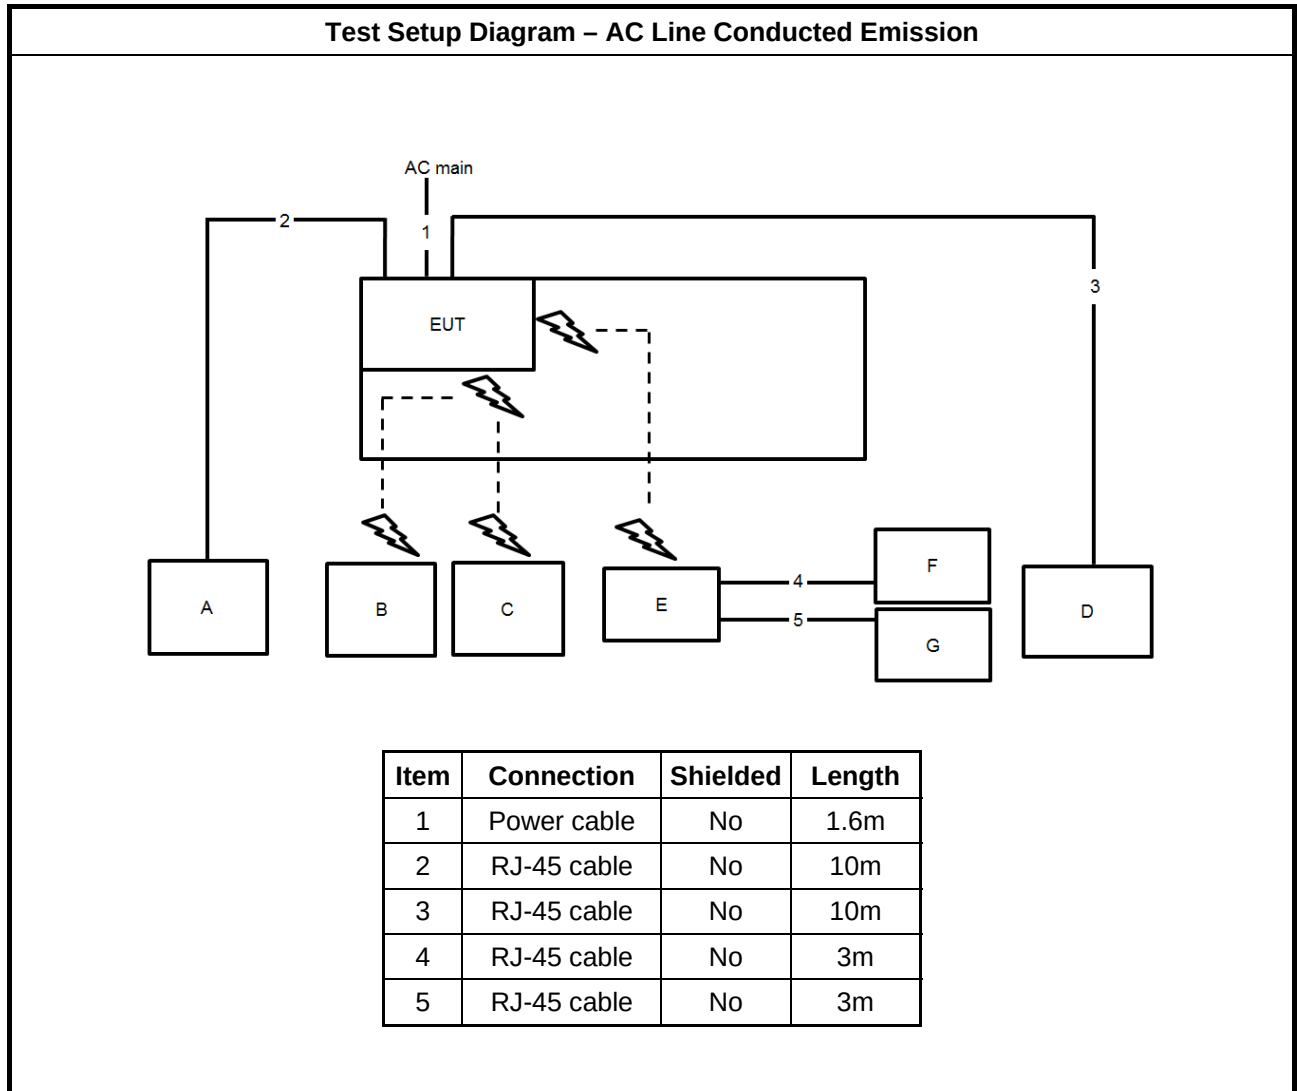

Test Setup Diagram - Radiated <1G Unintentional and Intentional test and Radiated >1G Unintentional test

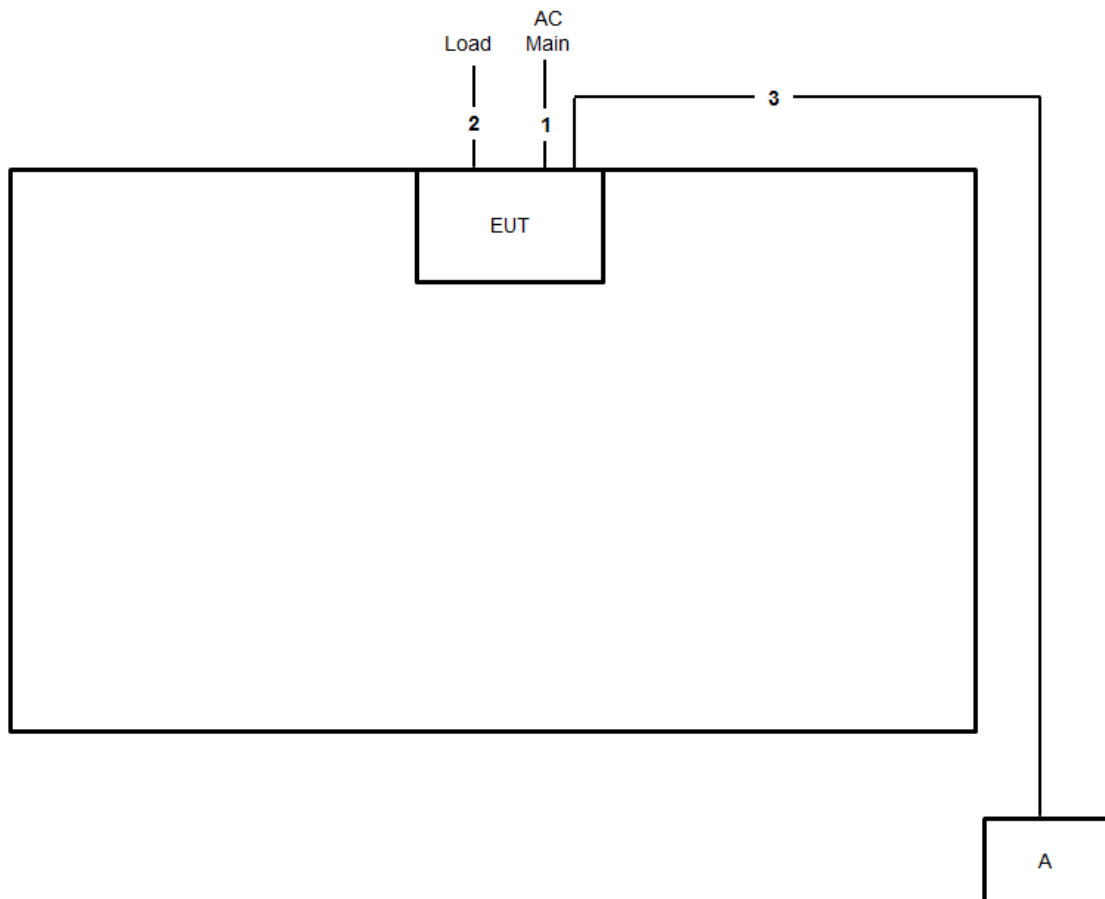

Item	Connection	Shielded	Length
1	Power cable	No	1.6m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

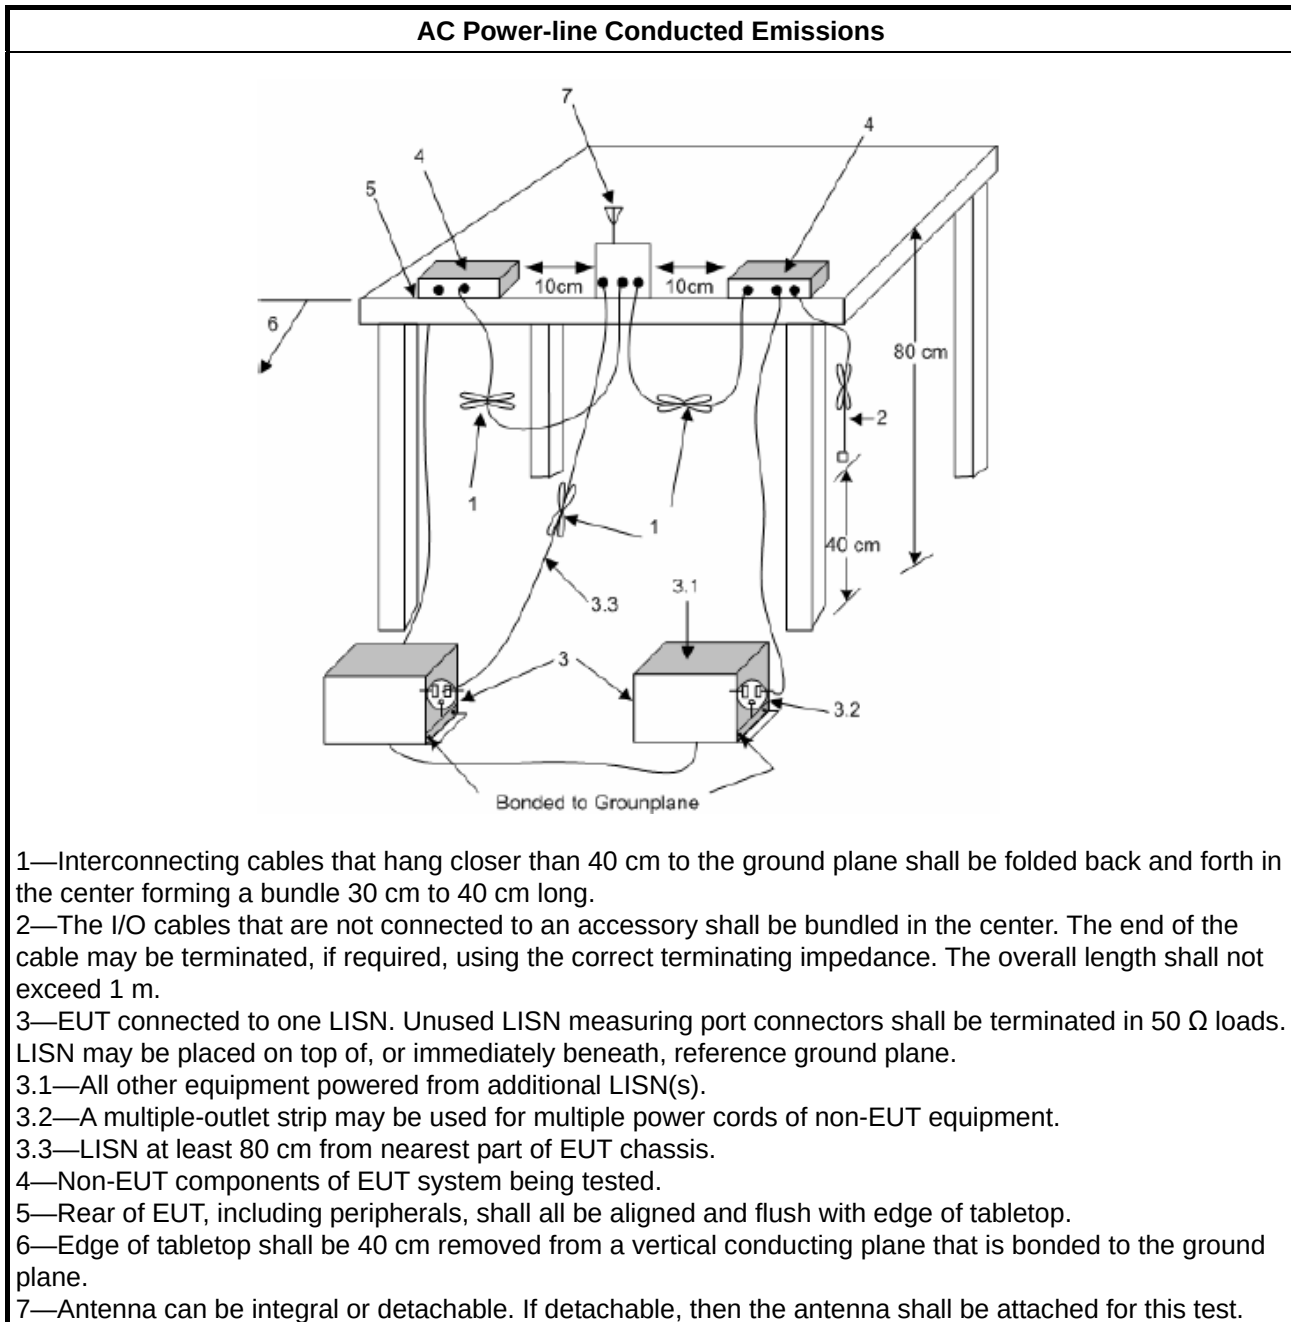

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emissions in Restricted Frequency Bands

3.2.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.





3.2.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.2.4 Test Setup

For Unintentional and Intentional

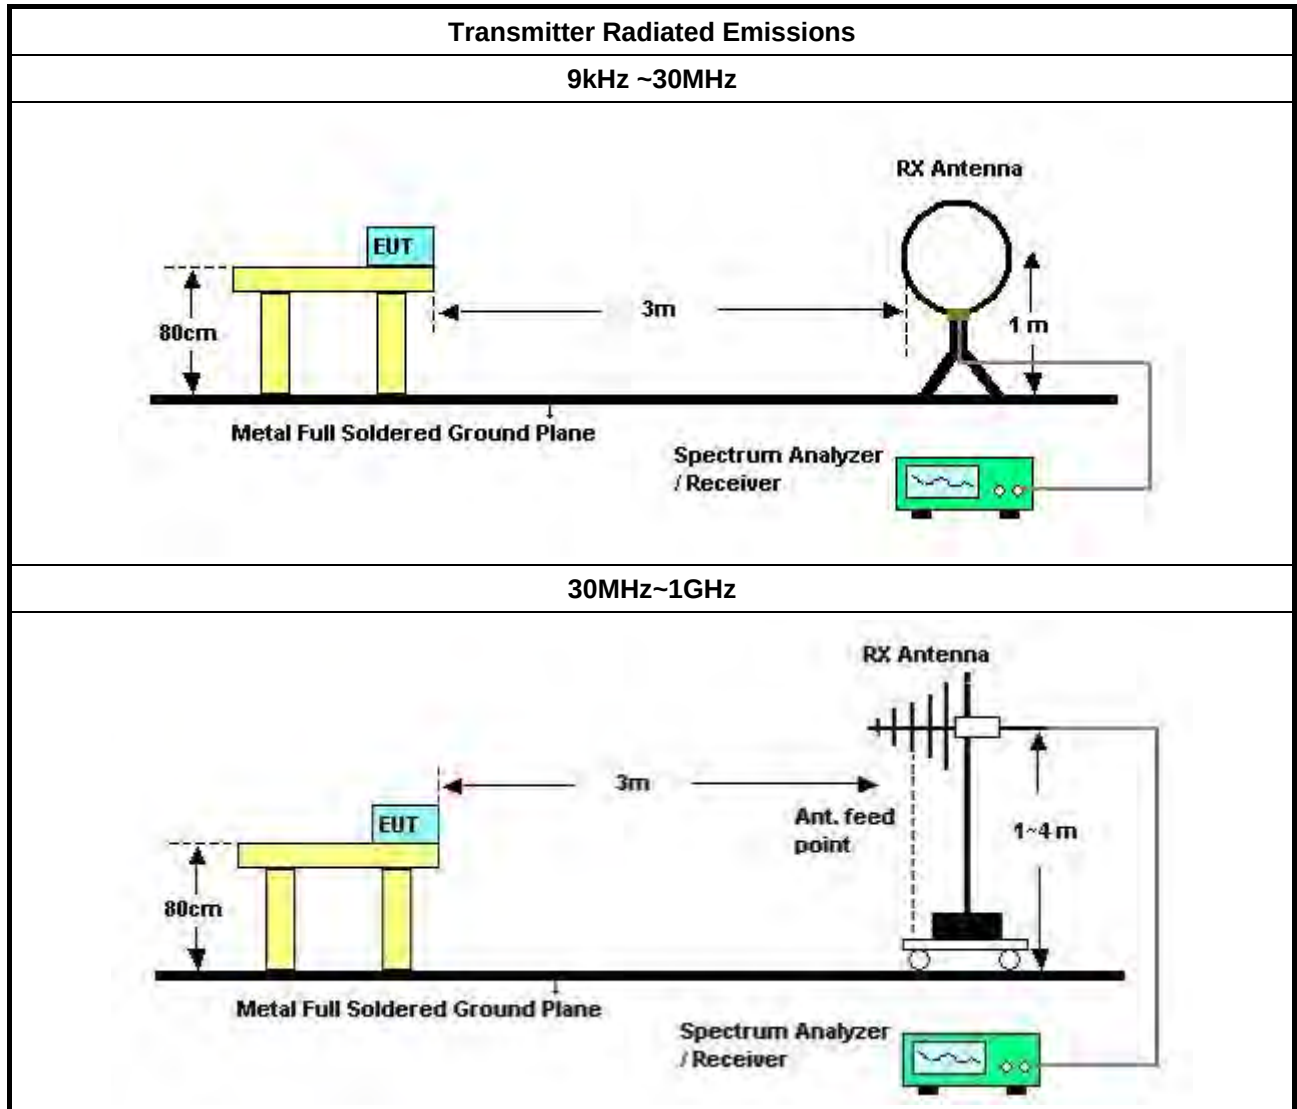

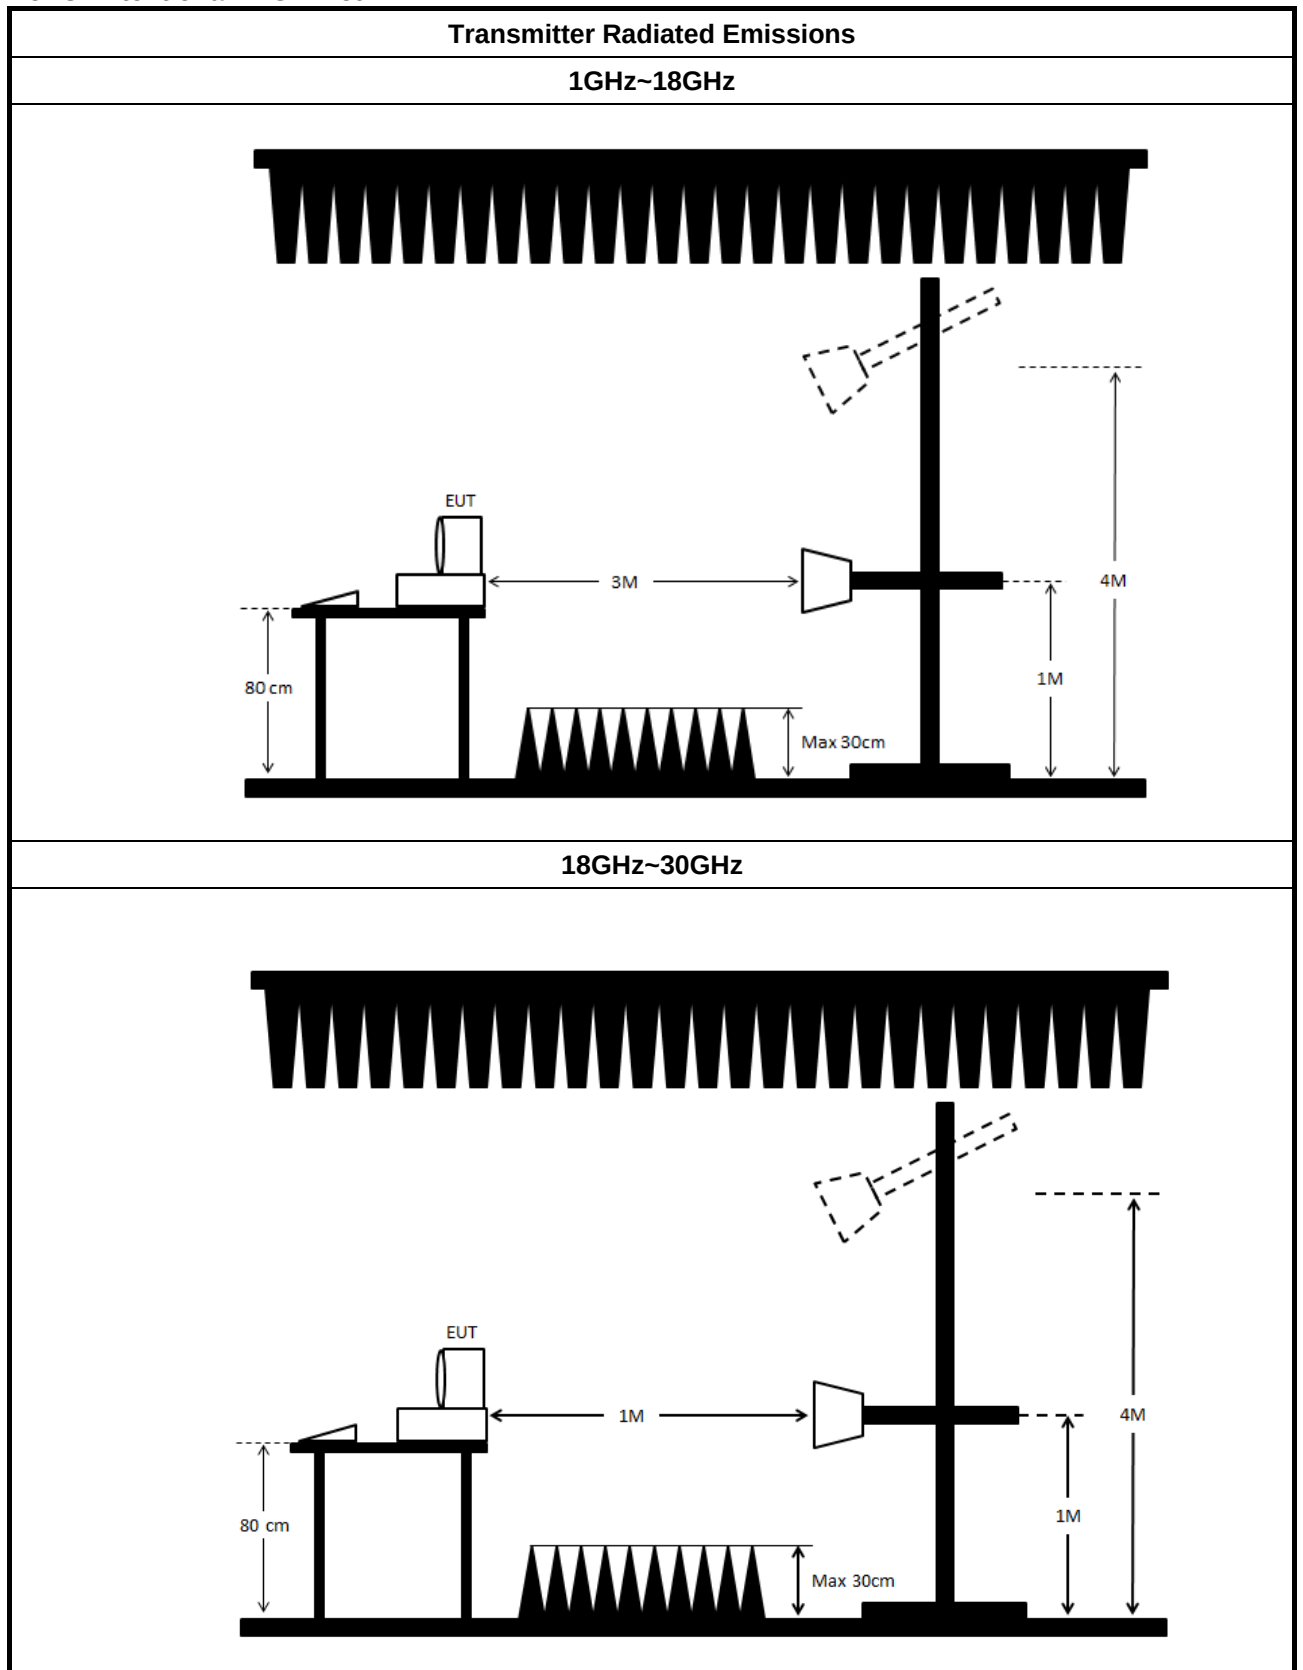For Unintentional - 1GHz~5th




3.2.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.2.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix B



4 Test Equipment and Calibration Data


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2018	Nov. 20, 2019	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 05, 2018	Nov. 04, 2019	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 16, 2019	Jan. 15, 2020	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 06, 2018	Nov. 05, 2019	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP-40	100019	9kHz ~ 40GHz	Apr. 25, 2018	Apr. 24, 2019	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.


Test Mode	Mode 2	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Line

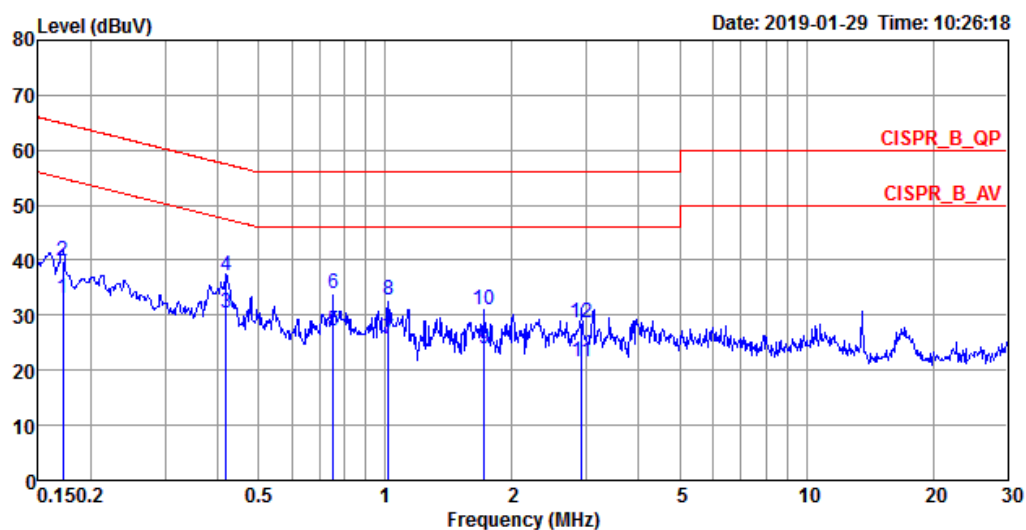


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1712	33.02	-21.88	54.90	22.85	10.15	0.02	Average	LINE
2	0.1712	39.83	-25.07	64.90	29.66	10.15	0.02	QP	LINE
3	0.4193	30.37	-17.09	47.46	20.19	10.16	0.02	Average	LINE
4	0.4193	37.11	-20.35	57.46	26.93	10.16	0.02	QP	LINE
5	0.7509	27.02	-18.98	46.00	16.83	10.17	0.02	Average	LINE
6	0.7509	33.93	-22.07	56.00	23.74	10.17	0.02	QP	LINE
7	1.0157	25.72	-20.28	46.00	15.53	10.17	0.02	Average	LINE
8	1.0157	32.64	-23.36	56.00	22.45	10.17	0.02	QP	LINE
9	1.7162	23.90	-22.10	46.00	13.67	10.19	0.04	Average	LINE
10	1.7162	30.97	-25.03	56.00	20.74	10.19	0.04	QP	LINE
11	2.9307	21.58	-24.42	46.00	11.31	10.21	0.06	Average	LINE
12	2.9307	28.58	-27.42	56.00	18.31	10.21	0.06	QP	LINE


Neutral

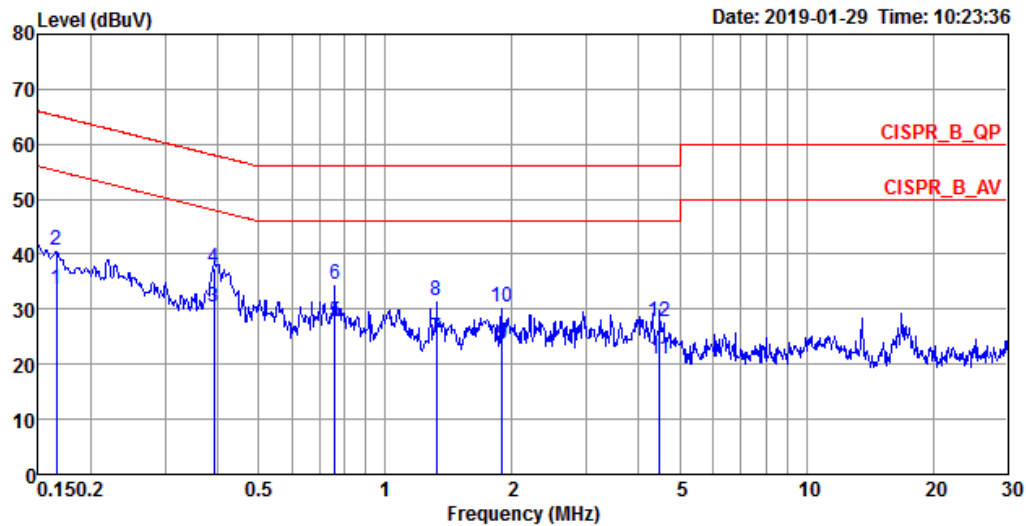

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1659	33.56	-21.60	55.16	23.41	10.13	0.02	Average	NEUTRAL
2	0.1659	40.60	-24.56	65.16	30.45	10.13	0.02	QP	NEUTRAL
3	0.3914	30.53	-17.50	48.03	20.37	10.14	0.02	Average	NEUTRAL
4	0.3914	37.54	-20.49	58.03	27.38	10.14	0.02	QP	NEUTRAL
5	0.7589	27.69	-18.31	46.00	17.53	10.14	0.02	Average	NEUTRAL
6	0.7589	34.42	-21.58	56.00	24.26	10.14	0.02	QP	NEUTRAL
7	1.3238	24.76	-21.24	46.00	14.58	10.15	0.03	Average	NEUTRAL
8	1.3238	31.63	-24.37	56.00	21.45	10.15	0.03	QP	NEUTRAL
9	1.8979	23.49	-22.51	46.00	13.28	10.16	0.05	Average	NEUTRAL
10	1.8979	30.27	-25.73	56.00	20.06	10.16	0.05	QP	NEUTRAL
11	4.4777	20.96	-25.04	46.00	10.70	10.19	0.07	Average	NEUTRAL
12	4.4777	27.83	-28.17	56.00	17.57	10.19	0.07	QP	NEUTRAL

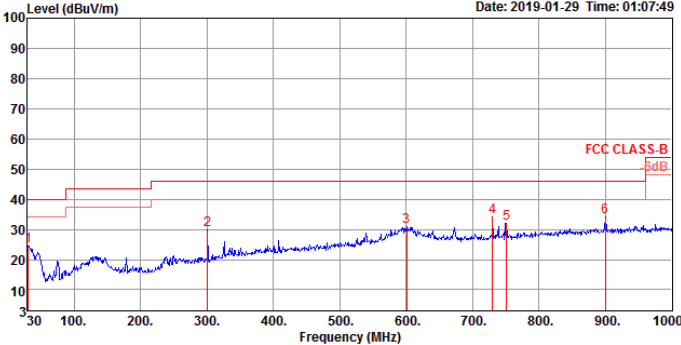

RSE below 1GHz Result																																																																																																										
Operating Mode	3				Polarization				Horizontal																																																																																																	
Operating Function	Unintentional - CRX																																																																																																									
Level (dBuV/m) Date: 2019-01-29 Time: 01:07:49  <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>24.64</td><td>40.00</td><td>-15.36</td><td>30.30</td><td>0.69</td><td>25.11</td><td>31.46</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>300.63</td><td>29.71</td><td>46.00</td><td>-16.29</td><td>39.69</td><td>2.22</td><td>19.80</td><td>32.00</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>600.36</td><td>30.78</td><td>46.00</td><td>-15.22</td><td>34.99</td><td>3.31</td><td>24.90</td><td>32.42</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>730.34</td><td>34.20</td><td>46.00</td><td>-11.80</td><td>37.19</td><td>3.57</td><td>25.96</td><td>32.52</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>750.71</td><td>32.06</td><td>46.00</td><td>-13.94</td><td>34.75</td><td>3.64</td><td>26.20</td><td>32.53</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>900.09</td><td>34.01</td><td>46.00</td><td>-11.99</td><td>34.69</td><td>4.09</td><td>27.70</td><td>32.47</td><td>100</td><td>360 Peak</td><td>HORIZONTAL</td></tr></table>													Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	30.97	24.64	40.00	-15.36	30.30	0.69	25.11	31.46	100	360 Peak	HORIZONTAL	2	300.63	29.71	46.00	-16.29	39.69	2.22	19.80	32.00	100	360 Peak	HORIZONTAL	3	600.36	30.78	46.00	-15.22	34.99	3.31	24.90	32.42	100	360 Peak	HORIZONTAL	4	730.34	34.20	46.00	-11.80	37.19	3.57	25.96	32.52	100	360 Peak	HORIZONTAL	5	750.71	32.06	46.00	-13.94	34.75	3.64	26.20	32.53	100	360 Peak	HORIZONTAL	6	900.09	34.01	46.00	-11.99	34.69	4.09	27.70	32.47	100	360 Peak	HORIZONTAL
Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																																	
1	30.97	24.64	40.00	-15.36	30.30	0.69	25.11	31.46	100	360 Peak	HORIZONTAL																																																																																															
2	300.63	29.71	46.00	-16.29	39.69	2.22	19.80	32.00	100	360 Peak	HORIZONTAL																																																																																															
3	600.36	30.78	46.00	-15.22	34.99	3.31	24.90	32.42	100	360 Peak	HORIZONTAL																																																																																															
4	730.34	34.20	46.00	-11.80	37.19	3.57	25.96	32.52	100	360 Peak	HORIZONTAL																																																																																															
5	750.71	32.06	46.00	-13.94	34.75	3.64	26.20	32.53	100	360 Peak	HORIZONTAL																																																																																															
6	900.09	34.01	46.00	-11.99	34.69	4.09	27.70	32.47	100	360 Peak	HORIZONTAL																																																																																															
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																																																																										

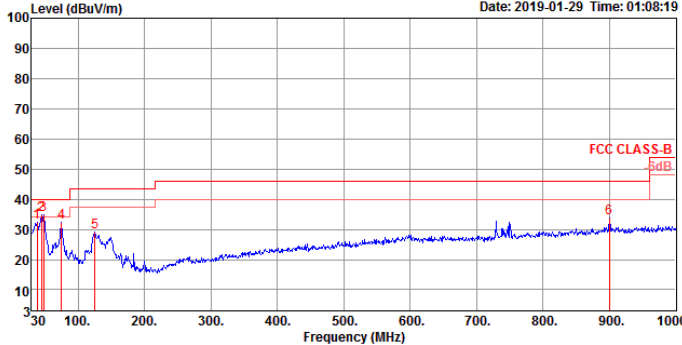
RSE below 1GHz Result																																																																																																										
Operating Mode	3				Power Phase				Vertical																																																																																																	
Operating Function	Unintentional - CRX																																																																																																									
Level (dBuV/m) Date: 2019-01-29 Time: 01:08:19  <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>38.73</td><td>32.26</td><td>40.00</td><td>-7.74</td><td>42.58</td><td>0.81</td><td>20.51</td><td>31.64</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>44.55</td><td>34.69</td><td>40.00</td><td>-5.31</td><td>48.25</td><td>0.89</td><td>17.25</td><td>31.70</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>48.43</td><td>34.84</td><td>40.00</td><td>-5.16</td><td>50.20</td><td>0.92</td><td>15.46</td><td>31.74</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>74.62</td><td>32.42</td><td>40.00</td><td>-7.58</td><td>50.22</td><td>1.12</td><td>12.93</td><td>31.85</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>125.06</td><td>29.20</td><td>43.50</td><td>-14.30</td><td>41.05</td><td>1.44</td><td>18.60</td><td>31.89</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>900.09</td><td>33.86</td><td>46.00</td><td>-12.14</td><td>34.54</td><td>4.09</td><td>27.70</td><td>32.47</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></table>													Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	38.73	32.26	40.00	-7.74	42.58	0.81	20.51	31.64	100	0 Peak	VERTICAL	2	44.55	34.69	40.00	-5.31	48.25	0.89	17.25	31.70	100	0 Peak	VERTICAL	3	48.43	34.84	40.00	-5.16	50.20	0.92	15.46	31.74	100	0 Peak	VERTICAL	4	74.62	32.42	40.00	-7.58	50.22	1.12	12.93	31.85	100	0 Peak	VERTICAL	5	125.06	29.20	43.50	-14.30	41.05	1.44	18.60	31.89	100	0 Peak	VERTICAL	6	900.09	33.86	46.00	-12.14	34.54	4.09	27.70	32.47	100	0 Peak	VERTICAL
Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																																	
1	38.73	32.26	40.00	-7.74	42.58	0.81	20.51	31.64	100	0 Peak	VERTICAL																																																																																															
2	44.55	34.69	40.00	-5.31	48.25	0.89	17.25	31.70	100	0 Peak	VERTICAL																																																																																															
3	48.43	34.84	40.00	-5.16	50.20	0.92	15.46	31.74	100	0 Peak	VERTICAL																																																																																															
4	74.62	32.42	40.00	-7.58	50.22	1.12	12.93	31.85	100	0 Peak	VERTICAL																																																																																															
5	125.06	29.20	43.50	-14.30	41.05	1.44	18.60	31.89	100	0 Peak	VERTICAL																																																																																															
6	900.09	33.86	46.00	-12.14	34.54	4.09	27.70	32.47	100	0 Peak	VERTICAL																																																																																															
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																																																																										




RSE below 1GHz Result																																																																																																												
Operating Mode	3				Polarization				Horizontal																																																																																																			
Operating Function	Intentional - CTX																																																																																																											
Level (dBuV/m) Date: 2019-01-25 Time: 20:24:19 FCC CLASS-B 5dB Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.94</td><td>24.90</td><td>40.00</td><td>-15.10</td><td>31.17</td><td>0.71</td><td>24.51</td><td>31.49</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>138.64</td><td>29.92</td><td>43.50</td><td>-13.58</td><td>42.43</td><td>1.51</td><td>17.87</td><td>31.89</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>651.77</td><td>30.92</td><td>46.00</td><td>-15.08</td><td>34.61</td><td>3.26</td><td>25.50</td><td>32.45</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>659.53</td><td>31.19</td><td>46.00</td><td>-14.81</td><td>34.84</td><td>3.29</td><td>25.52</td><td>32.46</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>671.17</td><td>33.06</td><td>46.00</td><td>-12.94</td><td>36.65</td><td>3.34</td><td>25.54</td><td>32.47</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>900.09</td><td>32.07</td><td>46.00</td><td>-13.93</td><td>32.75</td><td>4.09</td><td>27.70</td><td>32.47</td><td>400</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table>														Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	31.94	24.90	40.00	-15.10	31.17	0.71	24.51	31.49	400	0 Peak	HORIZONTAL	2	138.64	29.92	43.50	-13.58	42.43	1.51	17.87	31.89	400	0 Peak	HORIZONTAL	3	651.77	30.92	46.00	-15.08	34.61	3.26	25.50	32.45	400	0 Peak	HORIZONTAL	4	659.53	31.19	46.00	-14.81	34.84	3.29	25.52	32.46	400	0 Peak	HORIZONTAL	5	671.17	33.06	46.00	-12.94	36.65	3.34	25.54	32.47	400	0 Peak	HORIZONTAL	6	900.09	32.07	46.00	-13.93	32.75	4.09	27.70	32.47	400	0 Peak	HORIZONTAL
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																																		
1	31.94	24.90	40.00	-15.10	31.17	0.71	24.51	31.49	400	0 Peak	HORIZONTAL																																																																																																	
2	138.64	29.92	43.50	-13.58	42.43	1.51	17.87	31.89	400	0 Peak	HORIZONTAL																																																																																																	
3	651.77	30.92	46.00	-15.08	34.61	3.26	25.50	32.45	400	0 Peak	HORIZONTAL																																																																																																	
4	659.53	31.19	46.00	-14.81	34.84	3.29	25.52	32.46	400	0 Peak	HORIZONTAL																																																																																																	
5	671.17	33.06	46.00	-12.94	36.65	3.34	25.54	32.47	400	0 Peak	HORIZONTAL																																																																																																	
6	900.09	32.07	46.00	-13.93	32.75	4.09	27.70	32.47	400	0 Peak	HORIZONTAL																																																																																																	
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																																																																												

RSE below 1GHz Result																																																																																																												
Operating Mode	3				Power Phase				Vertical																																																																																																			
Operating Function	Intentional - CTX																																																																																																											
Level (dBuV/m) Date: 2019-01-25 Time: 20:39:22 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.94</td><td>31.39</td><td>40.00</td><td>-8.61</td><td>37.66</td><td>0.71</td><td>24.51</td><td>31.49</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>74.62</td><td>28.24</td><td>40.00</td><td>-11.76</td><td>46.04</td><td>1.12</td><td>12.93</td><td>31.85</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>120.21</td><td>28.95</td><td>43.50</td><td>-14.55</td><td>40.73</td><td>1.42</td><td>18.69</td><td>31.89</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>123.12</td><td>28.98</td><td>43.50</td><td>-14.52</td><td>40.81</td><td>1.43</td><td>18.63</td><td>31.89</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>128.94</td><td>28.70</td><td>43.50</td><td>-14.80</td><td>40.61</td><td>1.46</td><td>18.52</td><td>31.89</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>900.09</td><td>34.05</td><td>46.00</td><td>-11.95</td><td>34.73</td><td>4.09</td><td>27.70</td><td>32.47</td><td>100</td><td>360 Peak</td><td>VERTICAL</td></tr></table>														Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	31.94	31.39	40.00	-8.61	37.66	0.71	24.51	31.49	100	360 Peak	VERTICAL	2	74.62	28.24	40.00	-11.76	46.04	1.12	12.93	31.85	100	360 Peak	VERTICAL	3	120.21	28.95	43.50	-14.55	40.73	1.42	18.69	31.89	100	360 Peak	VERTICAL	4	123.12	28.98	43.50	-14.52	40.81	1.43	18.63	31.89	100	360 Peak	VERTICAL	5	128.94	28.70	43.50	-14.80	40.61	1.46	18.52	31.89	100	360 Peak	VERTICAL	6	900.09	34.05	46.00	-11.95	34.73	4.09	27.70	32.47	100	360 Peak	VERTICAL
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																																		
1	31.94	31.39	40.00	-8.61	37.66	0.71	24.51	31.49	100	360 Peak	VERTICAL																																																																																																	
2	74.62	28.24	40.00	-11.76	46.04	1.12	12.93	31.85	100	360 Peak	VERTICAL																																																																																																	
3	120.21	28.95	43.50	-14.55	40.73	1.42	18.69	31.89	100	360 Peak	VERTICAL																																																																																																	
4	123.12	28.98	43.50	-14.52	40.81	1.43	18.63	31.89	100	360 Peak	VERTICAL																																																																																																	
5	128.94	28.70	43.50	-14.80	40.61	1.46	18.52	31.89	100	360 Peak	VERTICAL																																																																																																	
6	900.09	34.05	46.00	-11.95	34.73	4.09	27.70	32.47	100	360 Peak	VERTICAL																																																																																																	
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																																																																												

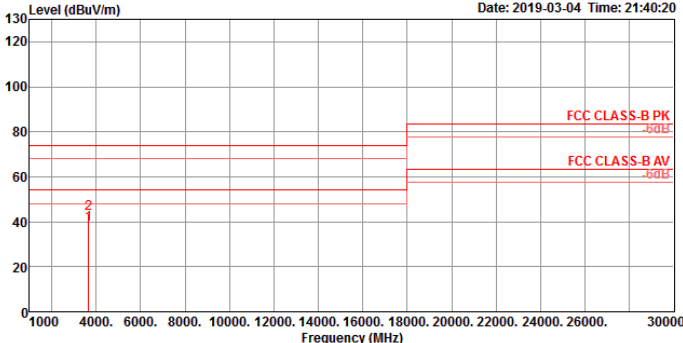

Unintentional 1GHz~5th Harmonic Result																																																									
Operating Mode	1				Polarization				Horizontal																																																
Operating Function	Unintentional - CRX																																																								
Level (dBuV/m) Date: 2019-03-04 Time: 21:40:20  <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3666.65</td><td>38.70</td><td>54.00</td><td>-15.30</td><td>41.74</td><td>4.44</td><td>29.14</td><td>36.62</td><td>260</td><td>173 Average</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>3666.65</td><td>43.59</td><td>74.00</td><td>-30.41</td><td>46.63</td><td>4.44</td><td>29.14</td><td>36.62</td><td>260</td><td>173 Peak</td><td>HORIZONTAL</td></tr></table>												Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	3666.65	38.70	54.00	-15.30	41.74	4.44	29.14	36.62	260	173 Average	HORIZONTAL	2	3666.65	43.59	74.00	-30.41	46.63	4.44	29.14	36.62	260	173 Peak	HORIZONTAL
Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																
1	3666.65	38.70	54.00	-15.30	41.74	4.44	29.14	36.62	260	173 Average	HORIZONTAL																																														
2	3666.65	43.59	74.00	-30.41	46.63	4.44	29.14	36.62	260	173 Peak	HORIZONTAL																																														
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																									

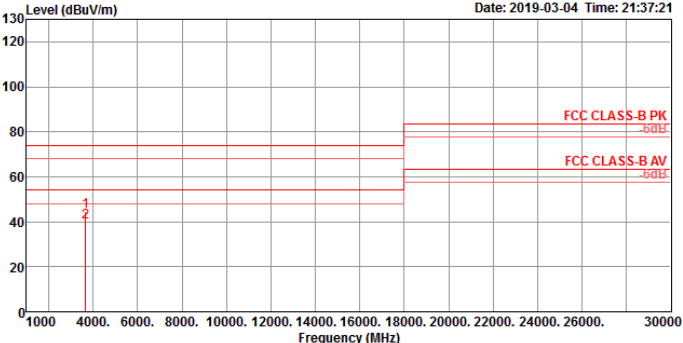Unintentional 1GHz~5th Harmonic Result																																																									
Operating Mode	1				Power Phase				Vertical																																																
Operating Function	Unintentional - CRX																																																								
Level (dBuV/m) Date: 2019-03-04 Time: 21:37:21  <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3666.60</td><td>44.67</td><td>74.00</td><td>-29.33</td><td>47.71</td><td>4.44</td><td>29.14</td><td>36.62</td><td>105</td><td>159 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>3666.65</td><td>39.95</td><td>54.00</td><td>-14.05</td><td>42.99</td><td>4.44</td><td>29.14</td><td>36.62</td><td>105</td><td>159 Average</td><td>VERTICAL</td></tr></table>												Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	3666.60	44.67	74.00	-29.33	47.71	4.44	29.14	36.62	105	159 Peak	VERTICAL	2	3666.65	39.95	54.00	-14.05	42.99	4.44	29.14	36.62	105	159 Average	VERTICAL
Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																
1	3666.60	44.67	74.00	-29.33	47.71	4.44	29.14	36.62	105	159 Peak	VERTICAL																																														
2	3666.65	39.95	54.00	-14.05	42.99	4.44	29.14	36.62	105	159 Average	VERTICAL																																														
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																									