



TEST REPORT

Report Reference No.....	TZ0070260605TRF01
Prepared by (+signature)	Nancy Li
Supervised by (+signature)	Allen Lai
Approved by (+signature)	Max Zhang (Authorized Officer)
Date of issue.....	2026-08-11
Testing Laboratory Name.....	Shenzhen Tongzhou Testing Co., Ltd.
Address.....	1st Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street, Longhua, Shenzhen, China
Applicant's name.....	Dongguan Hele Electronics Co.,Ltd
Address.....	Room 101, Block 1, No. 38, Daojiao Daohou Road, Daojiao Town, Dongguan City, Guangdong Province, China
Manufacturer's name	Dongguan Hele Electronics Co.,Ltd
Address.....	Room 101, Block 1, No. 38, Daojiao Daohou Road, Daojiao Town, Dongguan City, Guangdong Province, China
Test specification.....	
Standard	MIC Notice No.88 Appendix No.43 Article 2, paragraph 1, item 19
TRF Originator.....	SZTZ
Master TRF.....	Dated 2024-08
Shenzhen Tongzhou Testing Co.,Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.	
Test item description	Bluetooth Headset
Trade Mark	/
Model/Type reference.....	BH26H6NEO
Ratings.....	DC 3.8V by battery or DC 5V via USB Type-C
Result.....	PASS





**** Report Revise Record ****

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2026-08-11	Valid	Initial release





Contents

1. TEST STANDARDS AND DESCRIPTION	4
1.1. Test Standards	4
1.2. Test description	4
2. SUMMARY	5
2.1. General Remarks.....	5
2.2. Product Description.....	5
2.3. Wireless Function Tested in this report	5
2.4. EUT operation mode	6
2.5. Test Voltage.....	6
2.6. EUT configuration.....	7
2.7. Modifications	7
3. TEST ENVIRONMENT.....	8
3.1. Address of the test laboratory	8
3.2. Statement of the measurement uncertainty	8
3.3. Equipments Used during the Test.....	9
4. TEST CONDITIONS AND RESULTS	10
4.1. Antenna Power	10
4.2. Frequency Error	12
4.3. Interference Prevention Function.....	14
4.4. Occupied Bandwidth (99%).....	15
4.5. Spurious emission intensity	18
Limit of secondary radiated emissions.....	32
4.6. Transmission Antenna Gain (EIRP antenna power) Measurement	40
4.7. Transmission Radiation Angle Width (3db Beamwidth) Measurement.....	42
4.8. Dwell Time	43
5. TEST SETUP PHOTOS OF THE EUT	45
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	46





1. Test Standards and description

1.1. Test Standards

The tests were performed according to following standards:

Regulation: Item I of Article 49-20 and the relevant Articles of the ordinance of Regulatory Radio Equipment.

Test Method: (1)the test method suppressed on is equal to Appendix No.43 of MIC Nofication No 88

1.2. Test description

Test Item	Test Method	Result
Antenna Power	Appendix No.43 of MIC Nofication No 88 section 6	Pass
Frequency Error	Appendix No.43 of MIC Nofication No 88 section 3	Pass
Interference prevention function	Appendix No.43 of MIC Nofication No 88 section 12	Pass
99% Occupied bandwidth	Appendix No.43 of MIC Nofication No 88 section 4	Pass
Spurious Emissions Intensity	Appendix No.43 of MIC Nofication No 88 section 5	Pass
Limit of secondary radiated emissions	Appendix No.43 of MIC Nofication No 88 section 7	Pass
Dwell Time	Appendix No.43 of MIC Nofication No 88 section 13	Pass
Transmission Antenna Gain (EIRP antenna power)	Appendix No.43 of MIC Nofication No 88 section 10	Pass
Transmission Radiation Angle Width (3db Beamwidth)	Appendix No.43 of MIC Nofication No 88 section 11	N/A

N/A: means not applicable





2. Summary

2.1. General Remarks

Date of receipt of test sample : 2026-06-24
Testing commenced on : 2026-06-24
Testing concluded on : 2026-08-10

2.2. Product Description

Name of EUT	: Bluetooth Headset
Trade Mark	: /
Model/Type reference	: BH26H6NEO
Test Model	: BH26H6NEO
Hardware Version	: V6.0
Software Version	: V6.0
Power supply	: DC 3.8V by battery or DC 5V via USB Type-C

2.3. Wireless Function Tested in this report

Bluetooth	
Modulation	: BR ☒ GFSK:1Mbps; EDR ☒ π /4-DQPSK:2Mbps ☒ 8DPSK:3Mbps
Operation frequency	: 2402MHz~2480MHz
Channel number	: 79
Channel separation	: 1MHz
Antenna type	: PCB antenna
Antenna gain	: 0.9 dBi

Operation Frequency List:

Channel No.	Frequency (GHz)	Channel No.	Frequency (GHz)	Channel No.	Frequency (GHz)
00	2.402	28	2.430	56	2.458
01	2.403	29	2.431	57	2.459
02	2.404	30	2.432	58	2.460
03	2.405	31	2.433	59	2.461
04	2.406	32	2.434	60	2.462
05	2.407	33	2.435	61	2.463
06	2.408	34	2.436	62	2.464
07	2.409	35	2.437	63	2.465
08	2.410	36	2.438	64	2.466
09	2.411	37	2.439	65	2.467
10	2.412	38	2.440	66	2.468
11	2.413	39	2.441	67	2.469
12	2.414	40	2.442	68	2.470
13	2.415	41	2.443	69	2.471





14	2.416	42	2.444	70	2.472
15	2.417	43	2.445	71	2.473
16	2.418	44	2.446	72	2.474
17	2.419	45	2.447	73	2.475
18	2.420	46	2.448	74	2.476
19	2.421	47	2.449	75	2.477
20	2.422	48	2.450	76	2.478
21	2.423	49	2.451	77	2.479
22	2.424	50	2.452	78	2.480
23	2.425	51	2.453		
24	2.426	52	2.454		
25	2.427	53	2.455		
26	2.428	54	2.456		
27	2.429	55	2.457		

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides software(FCC_assist_1.0.2.2 at power level 5) to control the EUT for staying in continuous transmitting and receiving mode for testing.

2.5. Test Voltage

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 3.8V	DC 4.2V	DC 3.4V
Output To RF Module	DC 3.3V	DC 3.3V	DC 3.3V
Voltage Variation (%)	--	0%	0%

Note:

Voltage Variation (%)

$$= (\text{Output high or Low Voltage} - \text{Output Normal Voltage}) / \text{Output Normal Voltage} * 100$$

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.





2.6. EUT configuration


(1) The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

(2) Protective Structure

- ☐ The exterior cover was sealed by Special screws, it can not be easily open.
- ☐ The enclosure was sealed with strong adhesive glue, it can not be easily open.
- ☐ All high-frequency section and modulation section was packaged in one IC, and shield by metal shield, it can not be easily open.
- ☐ The top and the bottom is connected with strong Buckles, it can not be easily open.
- ☒ Others: The RF/modulation IC has 32 terminals with a 0.5 mm terminal pitch, which meets the requirements of 10 or more terminals and 1.5 mm or less terminal pitch specified for the structure of difficulty to open the casing.

Terminal pitch: 0.5mm; Number of the terminals: 32

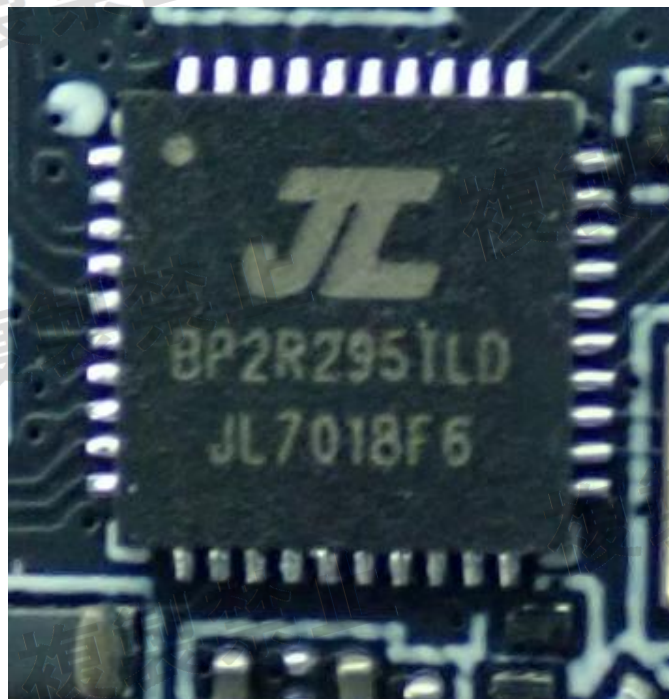

2.7. Modifications

No modifications were implemented to meet testing criteria.





3. Test Environment

3.1. Address of the test laboratory

Shenzhen Tongzhou Testing Co.,Ltd

1st Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street, Longhua, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2014) and CISPR Publication 22.

3.2. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Tongzhou Testing Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Tongzhou Testing Co.,Ltd is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	$U_c = \pm 25 \text{ Hz}$	(1)
Transmitter power conducted	$U_c = \pm 0.57 \text{ dB}$	(1)
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	(1)
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$	(1)
Uncertainty of Spurious Emissions, Conducted (30MHz-1GHz)	$U_c = \pm 2.7 \text{ dB}$	(1)
Uncertainty of Spurious Emissions, Conducted (1GHz-26GHz)	$U_c = \pm 3.2 \text{ dB}$	(1)
Uncertainty of Dwell Time	$U_c = \pm 2\%$	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.





3.3. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Latest Cal.	Next Cal.
1	MXA Signal Analyzer	Keysight	N9020A	MY52091623	2025-12-31	2026-12-30
2	EMI Test Receiver	R&S	ESCI	100849/003	2025-12-31	2026-12-30
3	DC power supply	Chroma	RXN-305D	62012PD02811	2025-12-31	2026-12-30
4	Power Meter	Agilent	NRVD	835843/014	2025-12-31	2026-12-30
5	Wideband Radio Communication Tester	R&S	CMW500	101855	2025-12-31	2026-12-30
6	Oscilloscope	Tektronix	TDS2024C	C044925	2025-12-31	2026-12-30
7	Horn Antenna	schwarzbeck	BBHA 9120D	01989	2025-10-18	2028-10-17
8	Controller	MF	MF7802	N/A	N/A	N/A
9	Horn Antenna	ETS	3117	00218874	2025-10-18	2028-10-17
10	Signal Generator	Keysight	N5182A	MY4620709	2025-12-31	2026-12-30

Full Name of calibration company: Guangzhou Lisai Metrology & Test co., Ltd.

Calibration by the calibration agencies listed in the table correspond to paragraph 4 (ii) (c) of Article 24-2 in the Radio Law.

☐ (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act

☐ (b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act

☒ (c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act

☐ (d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above






4. Test conditions and Results

4.1. Antenna Power

TEST CONFIGURATION



TEST PROCEDURE

1. EUT have transmitted continuous maximum power..
2. Frequency hopping system or combined systems of direct spread and frequency hopping
 - i. Connect the high frequency Power Meter or Spectrum Analyzer to the output of the attenuator and measure the total power (without bandwidth limitation)
 - ii. Divide the total power by the spread bandwidth to find the “average” power per MHz.
The average power per MHz is equal to the power meter value dBm + cable loss dB.
 - iii. Set the antenna power as follows:
 - Continuous waves: value in ii.

LIMIT

Item	Limits
Antenna Power Density	$\leq 3\text{mW/MHz}$ (FH form 2400~2483.5MHz)
	$\leq 10\text{mW/MHz}$ (OFDM,DS from 2400~2483.5MHz)
	$\leq 10\text{mW}$ (Other from 2400~2483.5MHz)
Antenna Power Error	$\leq 20\%$ (Base on manufacturer declare antenna power density)





TEST RESULTS

Antenna Power								
Test Condition	Test Mode	Antenna	Channel	Total Hop Power [mW]	Spread BW [MHz]	Result (mW/MHz)	Limit (mW/MHz)	Verdict
NTNV	DH5	Ant1	Hop	106.0928	71.778	1.4781	≤3	PASS
	2DH5	Ant1	Hop	109.31915	71.847	1.5216	≤3	PASS
	3DH5	Ant1	Hop	66.7875	72.016	0.9274	≤3	PASS

Tolerance								
Test Condition	Test Mode	Antenna	Channel	Power (mW/MHz)	Rated Power (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	DH5	Ant1	Hop	1.4781	3	-50.73	≤20	PASS
	2DH5	Ant1	Hop	1.5216	3	-49.28	≤20	PASS
	3DH5	Ant1	Hop	0.9274	3	-69.09	≤20	PASS

EIRP							
Test Condition	Test Mode	Antenna	Freq (MHz)	Result (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm)	Verdict
NTNV	DH5	Ant1	Hop	1.70	1.70	≤6.91	PASS
	2DH5	Ant1	Hop	1.82	1.82	≤6.91	PASS
	3DH5	Ant1	Hop	-0.33	-0.33	≤6.91	PASS

Remark:


- 1, The item was tested at 25℃ and 55% humidity condition;
- 2, Result = the power meter value + cable loss





4.2. Frequency Error

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: non-modulation

Spectrum Condition:

Frequency: test frequency

Span:1MHz

Rbw:10KHz

Vbw:10KHz

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

Tolerance of frequency shall be ± 50 ppm.

TEST RESULTS

Test Condition	Test Mode	Antenna	Frequency [MHz]	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
NTNV	CW	Ant1	2402	2402.005	2.08160	± 50	PASS
			2441	2441.005	2.04834	± 50	PASS
			2480	2480.006	2.41936	± 50	PASS


Note: 1. The test results including the cable lose.

2. The item was tested at 25 °C and 55% humidity condition;

3.All condition has been testd,list the worst case in this item

Test plot as follows:



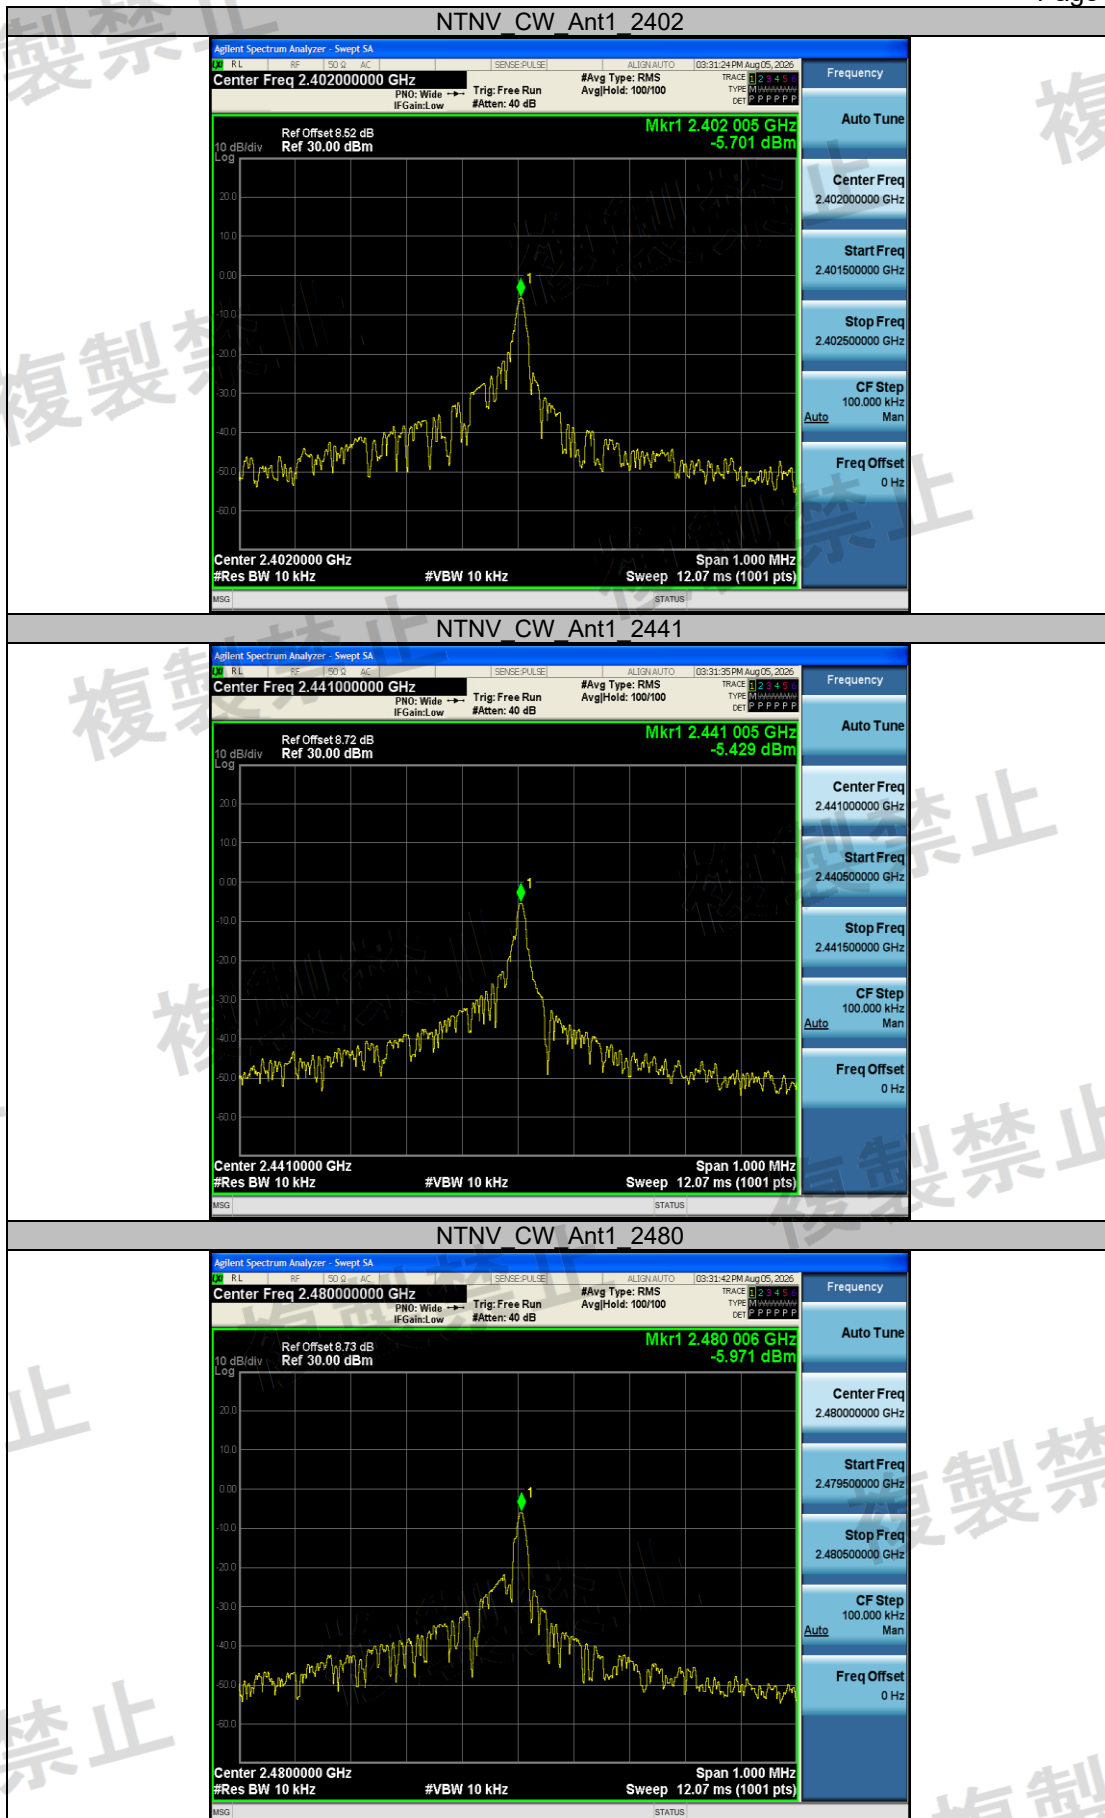



4.3. Interference Prevention Function

The device consists of the Antenna and transmitter module. Component transmitter module also can use the protocol function to protect interference come from outside.

TEST EQUIPMENT

CMW500

TEST SOFTWARE

N/A

TEST PROCEDURE

1. Open the Bluetooth Signaling application on the CMW500.
2. Scan for EUT, and read the MAC address.

TEST RESULTS

The unit does meet the requirements.


MAC Address:65:F5:EA:4F:2F:9E





4.4. Occupied Bandwidth (99%)

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: Center frequency in the band to be used

Span:200MHz

RBW:1MHz

VBW:1MHz

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

Permissible value for occupied bandwidth using the FH system, a hybrid system combining DS and FH systems, or a hybrid system combining FH and OFDM systems shall be 83.5 MHz or less, while necessary bandwidth (minimum occupied bandwidth sufficient to ensure information transmission of required quality at a required transmission rate for the system used under specified conditions for a given emission type) using a system other than any of the above shall be 26 MHz or less.

TEST RESULTS


Test Condition	Test Mode	Antenna	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	DH5	Ant1	Hop	78.884	≤83.5	PASS
	2DH5	Ant1	Hop	79.005	≤83.5	PASS
	3DH5	Ant1	Hop	78.959	≤83.5	PASS


Note: 1. The test results including the cable lose.
2. The item was tested at 25 °C and 55% humidity condition;
3.All condition has been testd,list the worst case in this item

TestCondition	TestMode	Antenna	Channel	Spread BW [MHz]
NTNV	DH5	Ant1	Hop	71.765
	2DH5	Ant1	Hop	71.700
	3DH5	Ant1	Hop	71.814


Test plot as follows:



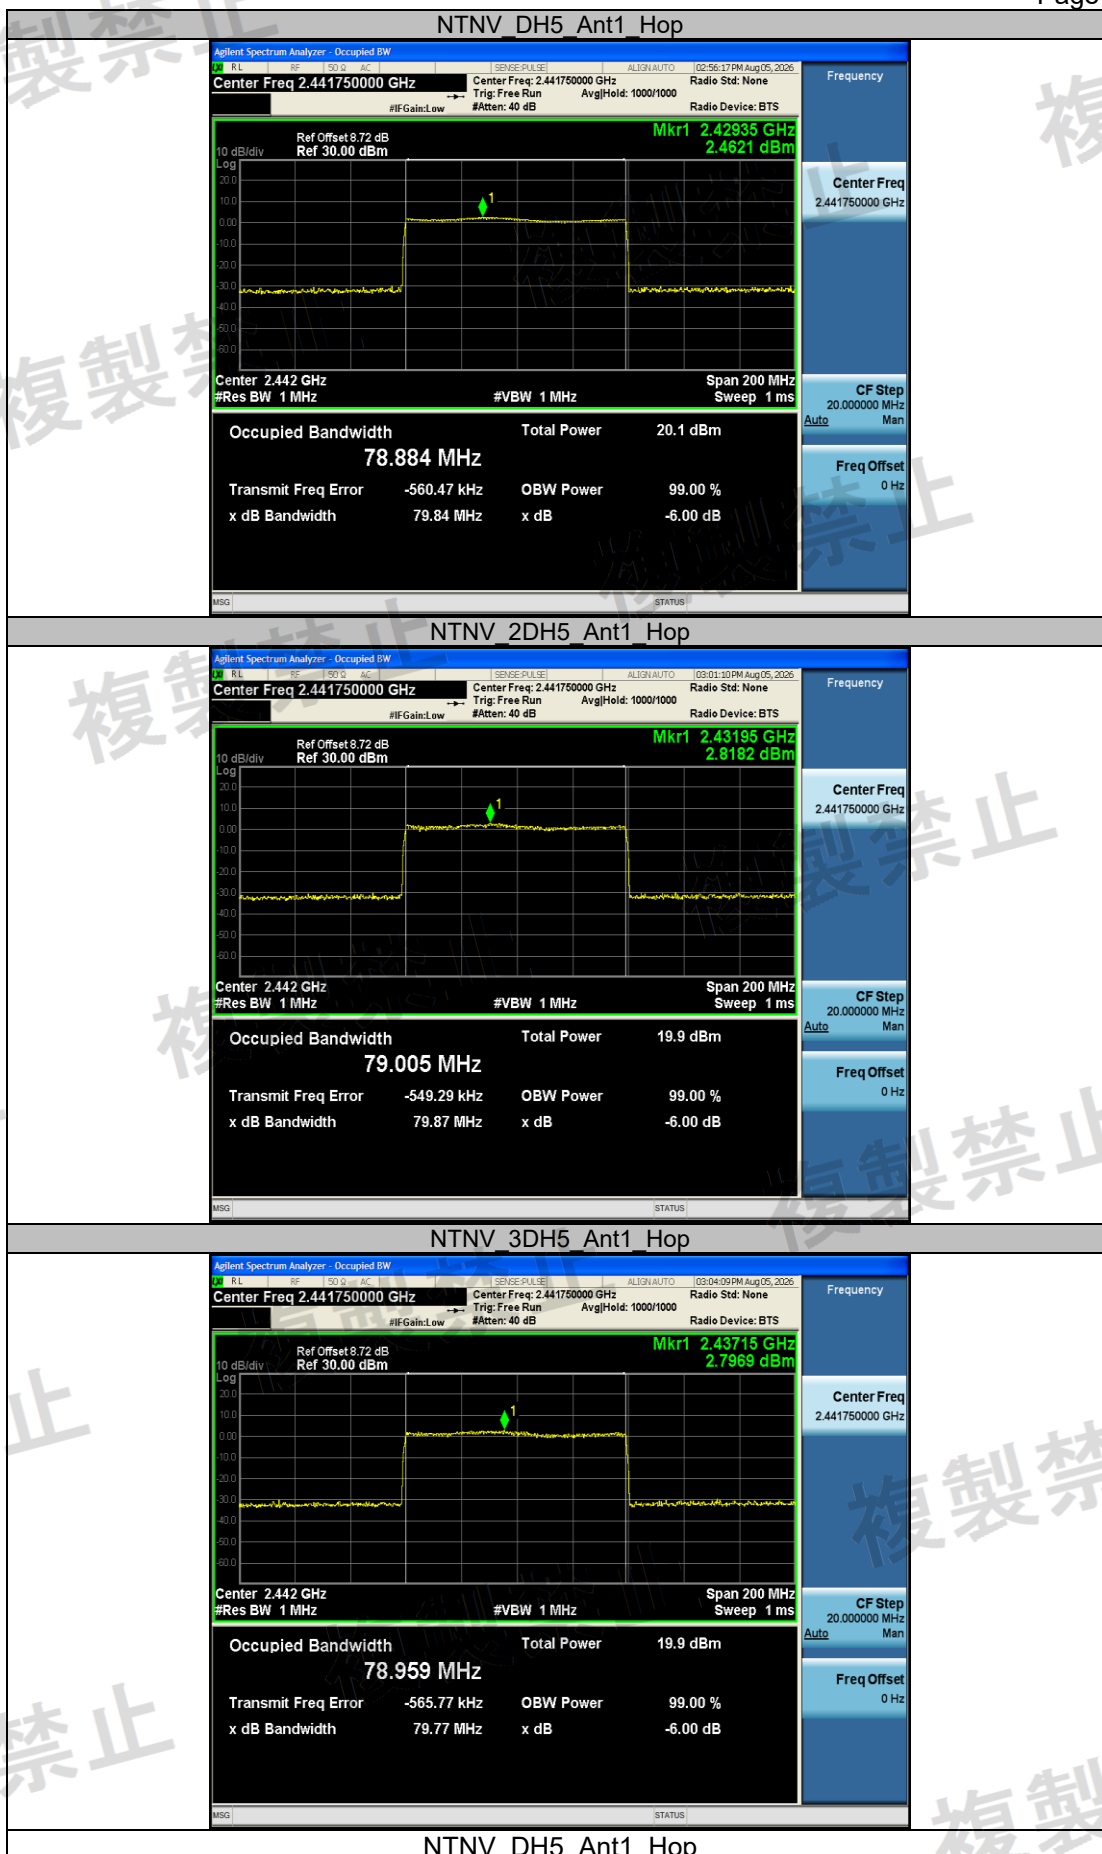


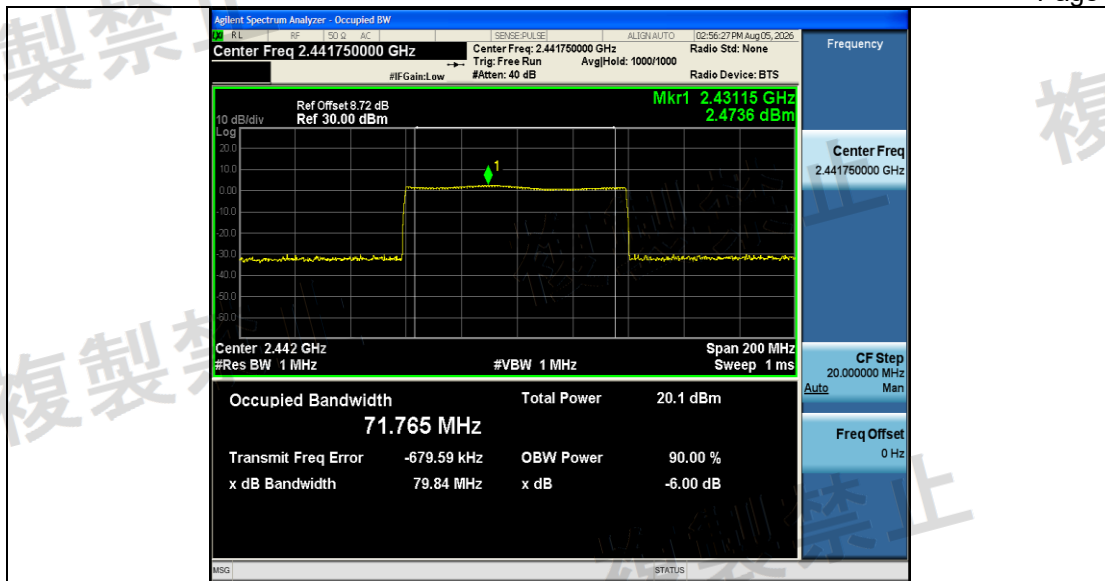

NTNV_2DH5_Ant1_Hop

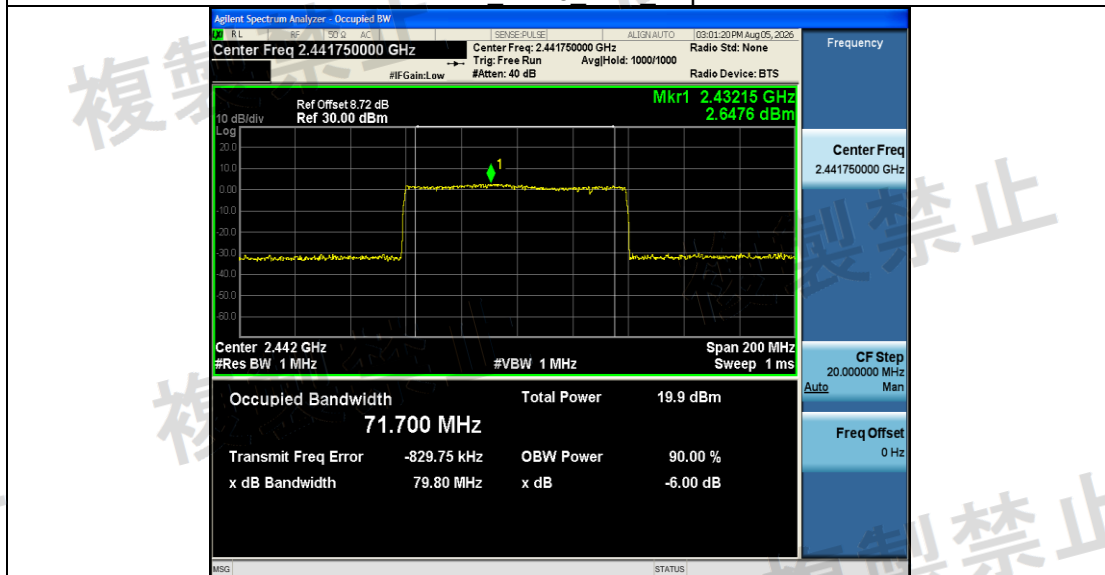


NTNV_3DH5_Ant1_Hop

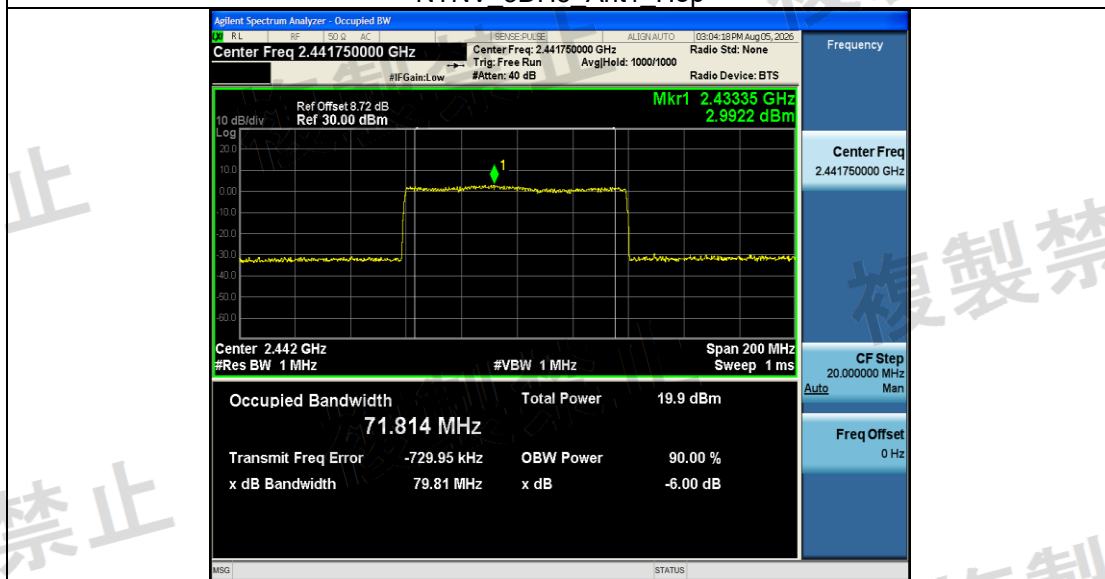



4.5. Spurious emission intensity

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-13GHz

RBW: 1MHz (30MHz-1GHz), 1MHz(1GHz-13GHz)

VBW: 1MHz (30MHz-1GHz), 1MHz(1GHz-13GHz)

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- a. $2,387 \text{ MHz} \leq f \leq 2,400 \text{ MHz}$ and $2,483.5 \text{ MHz} < f \leq 2,496.5 \text{ MHz}$ 25 $\mu\text{W/MHz}$ (-16dBm/MHz) or less
b. $2,387 \text{ MHz} > f$ and $2,496.5 \text{ MHz} < f$ 2.5 $\mu\text{W/MHz}$ (-26dBm/MHz) or less

TEST RESULTS

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [$\mu\text{W/MHz}$]	Limit [$\mu\text{W/MHz}$]	Verdict
NTNV	DH5	Ant1	2402	30~2387	2210.81	-44.58	≤ -26	0.03483	≤ 2.5	PASS
				2387~2400	2400.00	-38.06	≤ -16	0.15631	≤ 25	PASS
				2483.5~2496.5	2490.17	-40.36	≤ -16	0.09204	≤ 25	PASS
				2496.5~13000	9608.78	-34.75	≤ -26	0.33497	≤ 2.5	PASS
			2441	30~2387	2249.70	-43.06	≤ -26	0.04943	≤ 2.5	PASS
				2387~2400	2388.72	-40.26	≤ -16	0.09419	≤ 25	PASS
				2483.5~2496.5	2486.77	-40.16	≤ -16	0.09638	≤ 25	PASS
				2496.5~13000	9764.76	-35.30	≤ -26	0.29512	≤ 2.5	PASS
			2480	30~2387	2288.89	-41.34	≤ -26	0.07345	≤ 2.5	PASS
				2387~2400	2393.77	-41.53	≤ -16	0.07031	≤ 25	PASS
				2483.5~2496.5	2491.62	-40.95	≤ -16	0.08035	≤ 25	PASS
				2496.5~13000	9920.75	-36.43	≤ -26	0.22751	≤ 2.5	PASS
	2DH5	Ant1	2402	30~2387	2210.81	-44.96	≤ -26	0.03192	≤ 2.5	PASS
				2387~2400	2399.99	-34.27	≤ -16	0.37411	≤ 25	PASS






複製禁止				2483.5~2496.5	2483.70	-40.73	≤-16	0.08453	≤25	PASS
				2496.5~13000	9608.78	-34.51	≤-26	0.35400	≤2.5	PASS
			2441	30~2387	2249.70	-42.73	≤-26	0.05333	≤2.5	PASS
				2387~2400	2399.17	-40.46	≤-16	0.08995	≤25	PASS
				2483.5~2496.5	2493.13	-40.61	≤-16	0.08690	≤25	PASS
				2496.5~13000	9764.76	-35.70	≤-26	0.26915	≤2.5	PASS
			2480	30~2387	2211.11	-45.83	≤-26	0.02612	≤2.5	PASS
				2387~2400	2399.95	-31.62	≤-16	0.68865	≤25	PASS
				2483.5~2496.5	2490.54	-40.49	≤-16	0.08933	≤25	PASS
				2496.5~13000	9608.78	-34.82	≤-26	0.32961	≤2.5	PASS
	3DH5	Ant1	2402	30~2387	2210.52	-44.23	≤-26	0.03776	≤2.5	PASS
				2387~2400	2400.00	-32.07	≤-16	0.62087	≤25	PASS
				2483.5~2496.5	2485.81	-40.62	≤-16	0.08670	≤25	PASS
				2496.5~13000	9608.78	-34.51	≤-26	0.35400	≤2.5	PASS
			2441	30~2387	2249.70	-42.35	≤-26	0.05821	≤2.5	PASS
				2387~2400	2399.25	-40.82	≤-16	0.08279	≤25	PASS
				2483.5~2496.5	2486.19	-41.04	≤-16	0.07870	≤25	PASS
				2496.5~13000	9764.76	-36.01	≤-26	0.25061	≤2.5	PASS
			2480	30~2387	2288.60	-41.55	≤-26	0.06998	≤2.5	PASS
				2387~2400	2393.16	-40.07	≤-16	0.09840	≤25	PASS
				2483.5~2496.5	2495.88	-40.49	≤-16	0.08933	≤25	PASS
				2496.5~13000	9920.75	-36.03	≤-26	0.24946	≤2.5	PASS




Note: 1. The product was tested at 25 °C and 55% humidity condition;




2. All condition has been tested, list the worst case in this item


3. SA set to from 2.4965GHz to 13GHz, plot shows from 2.497GHz to 13GHz as of SA's default format




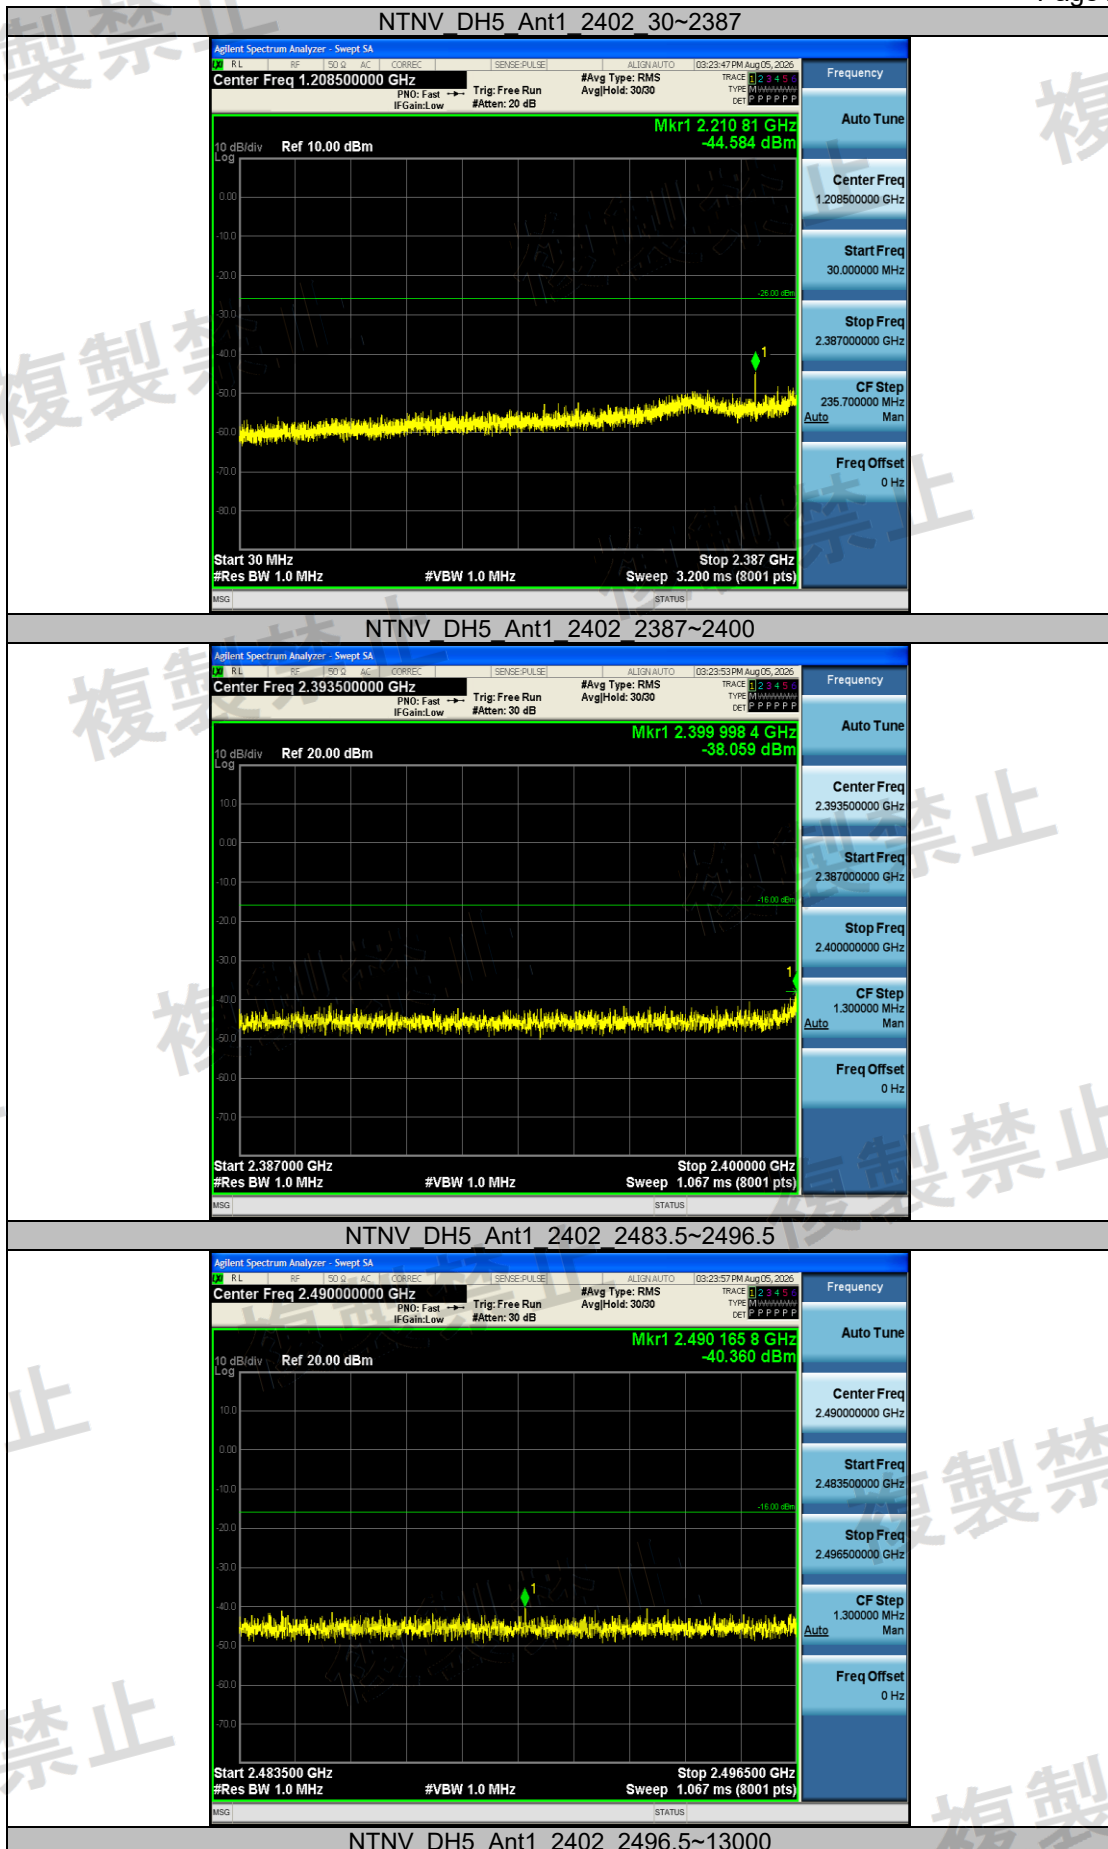


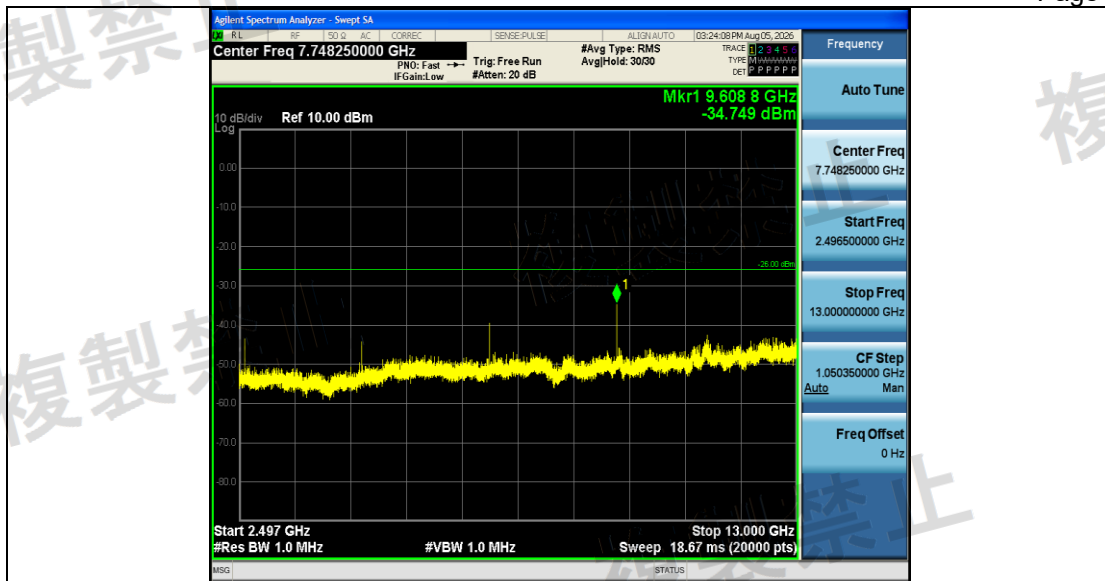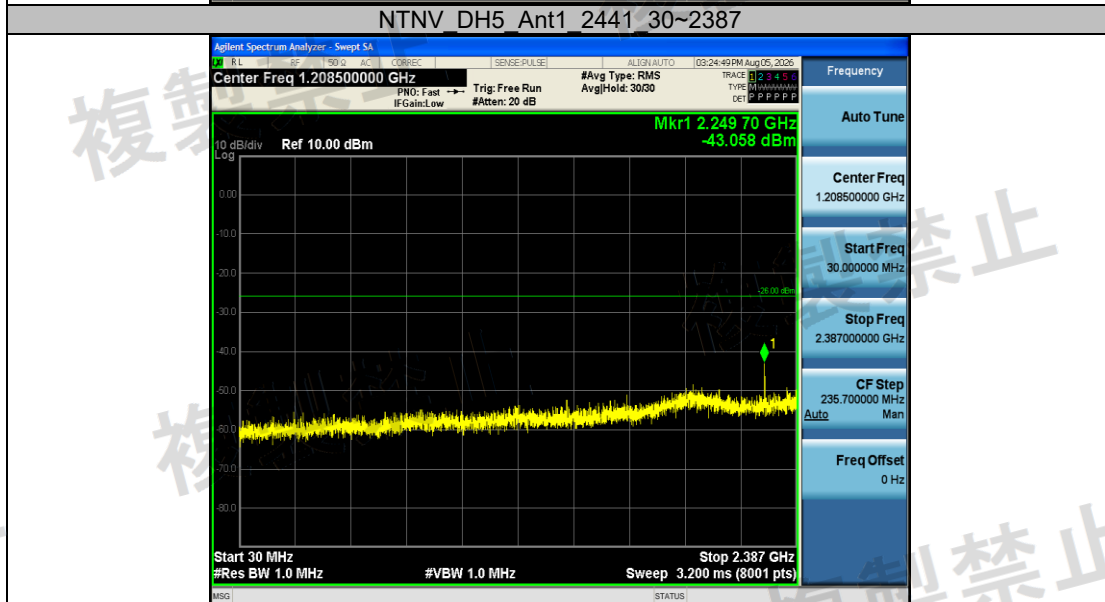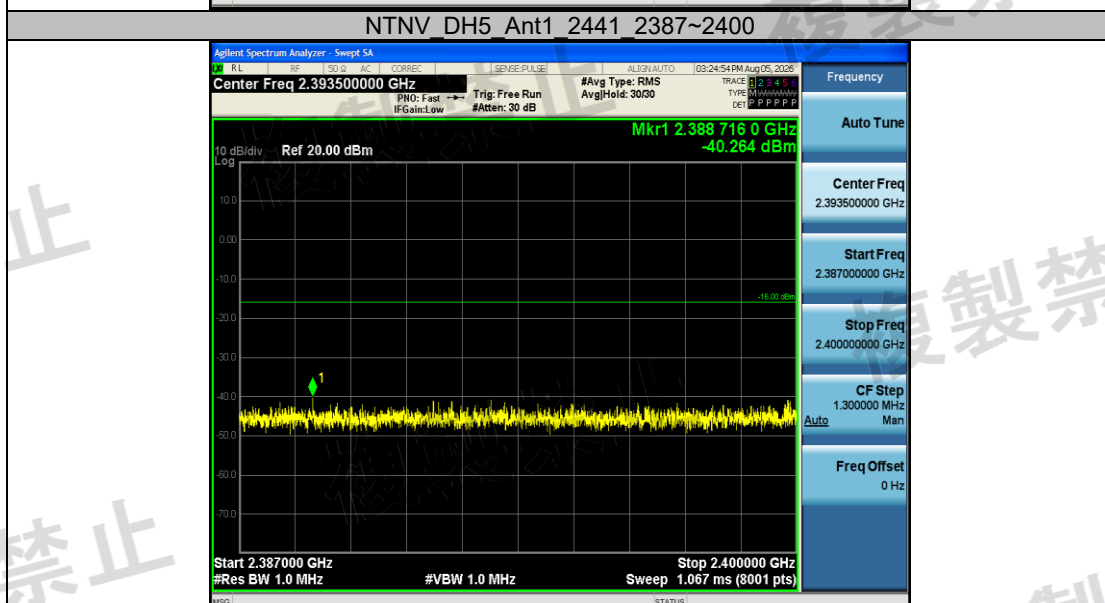


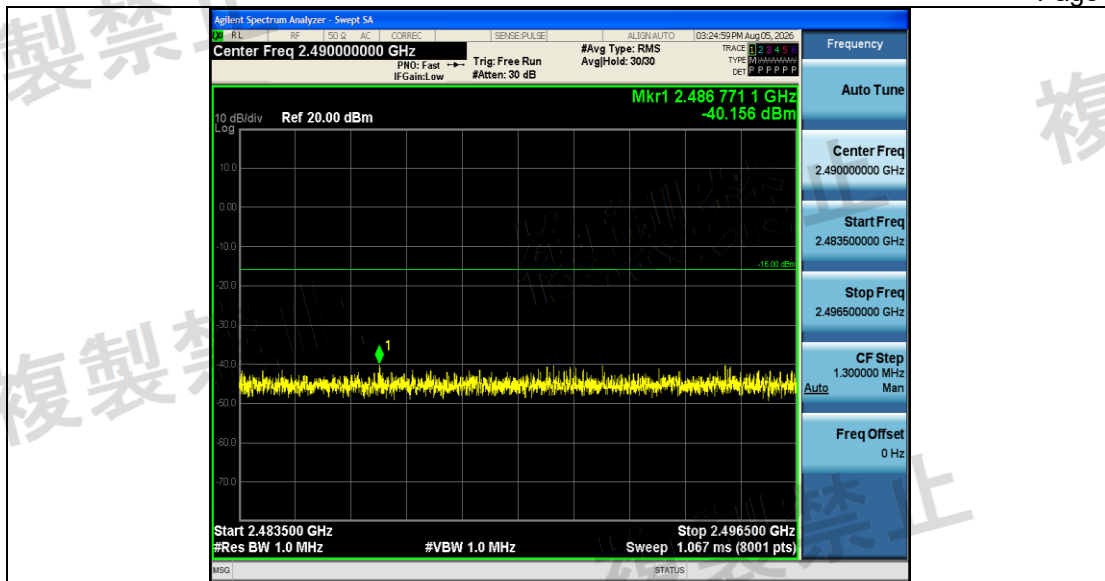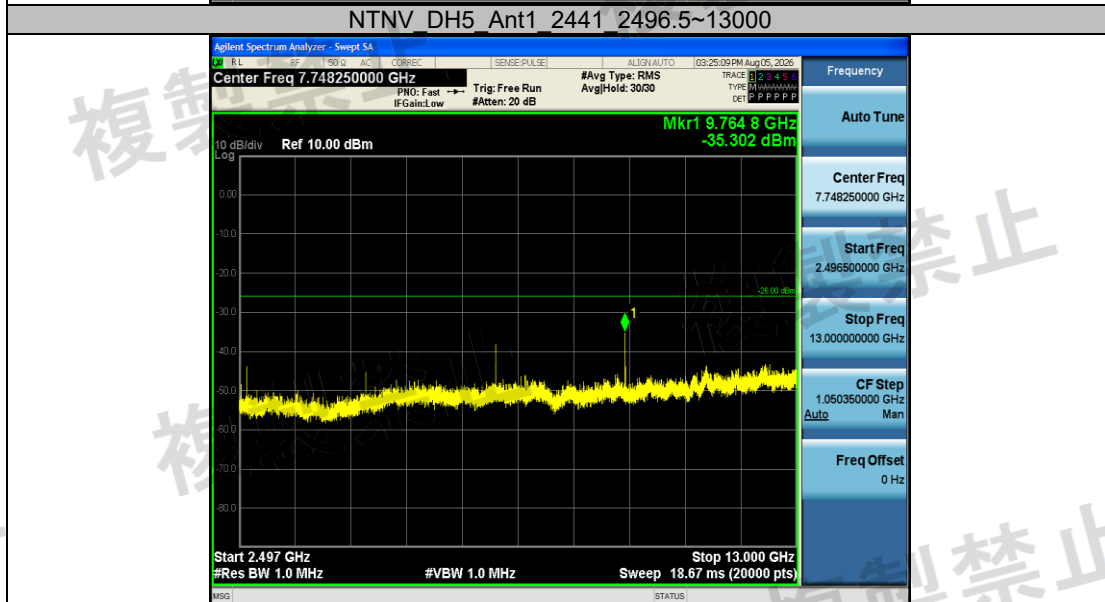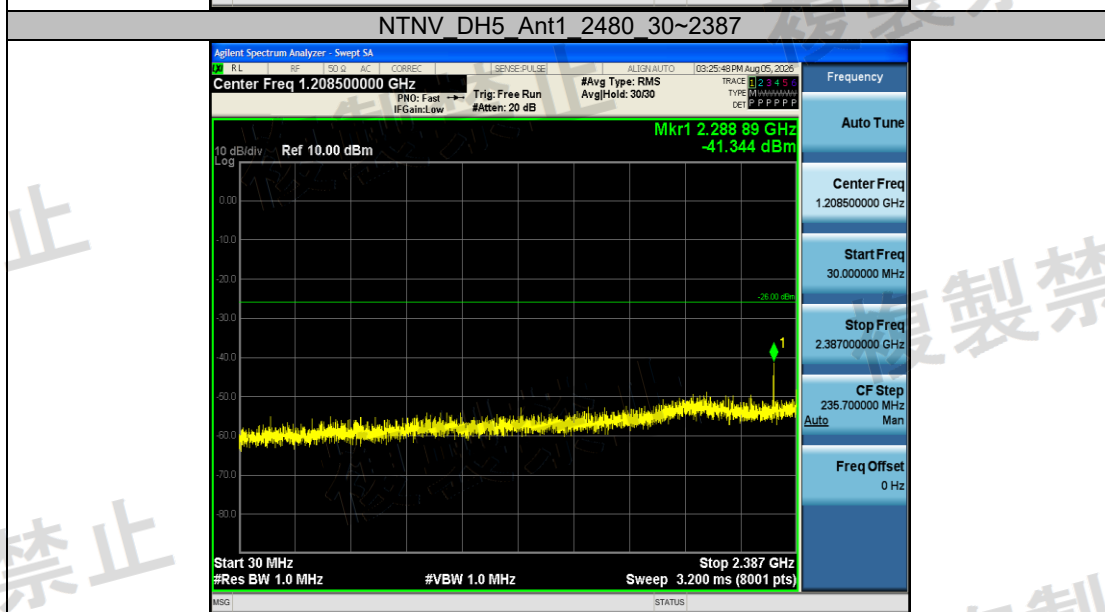


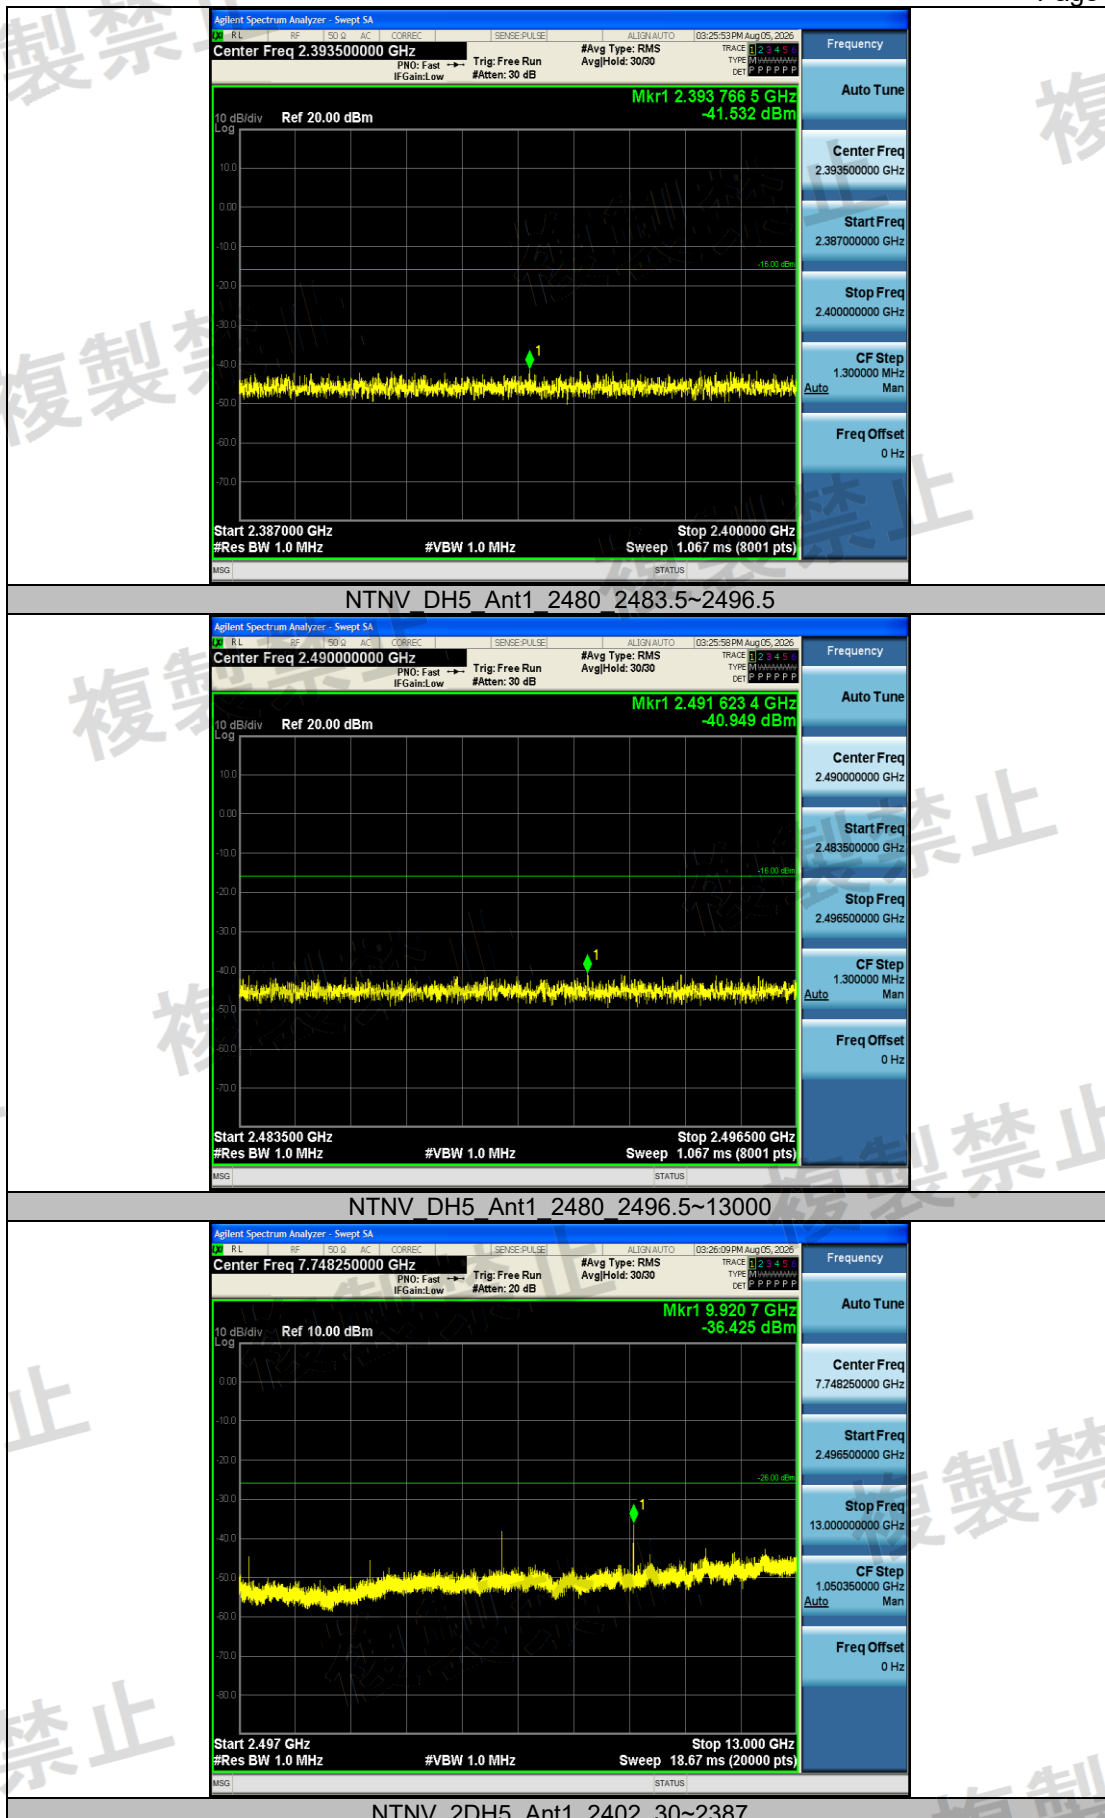


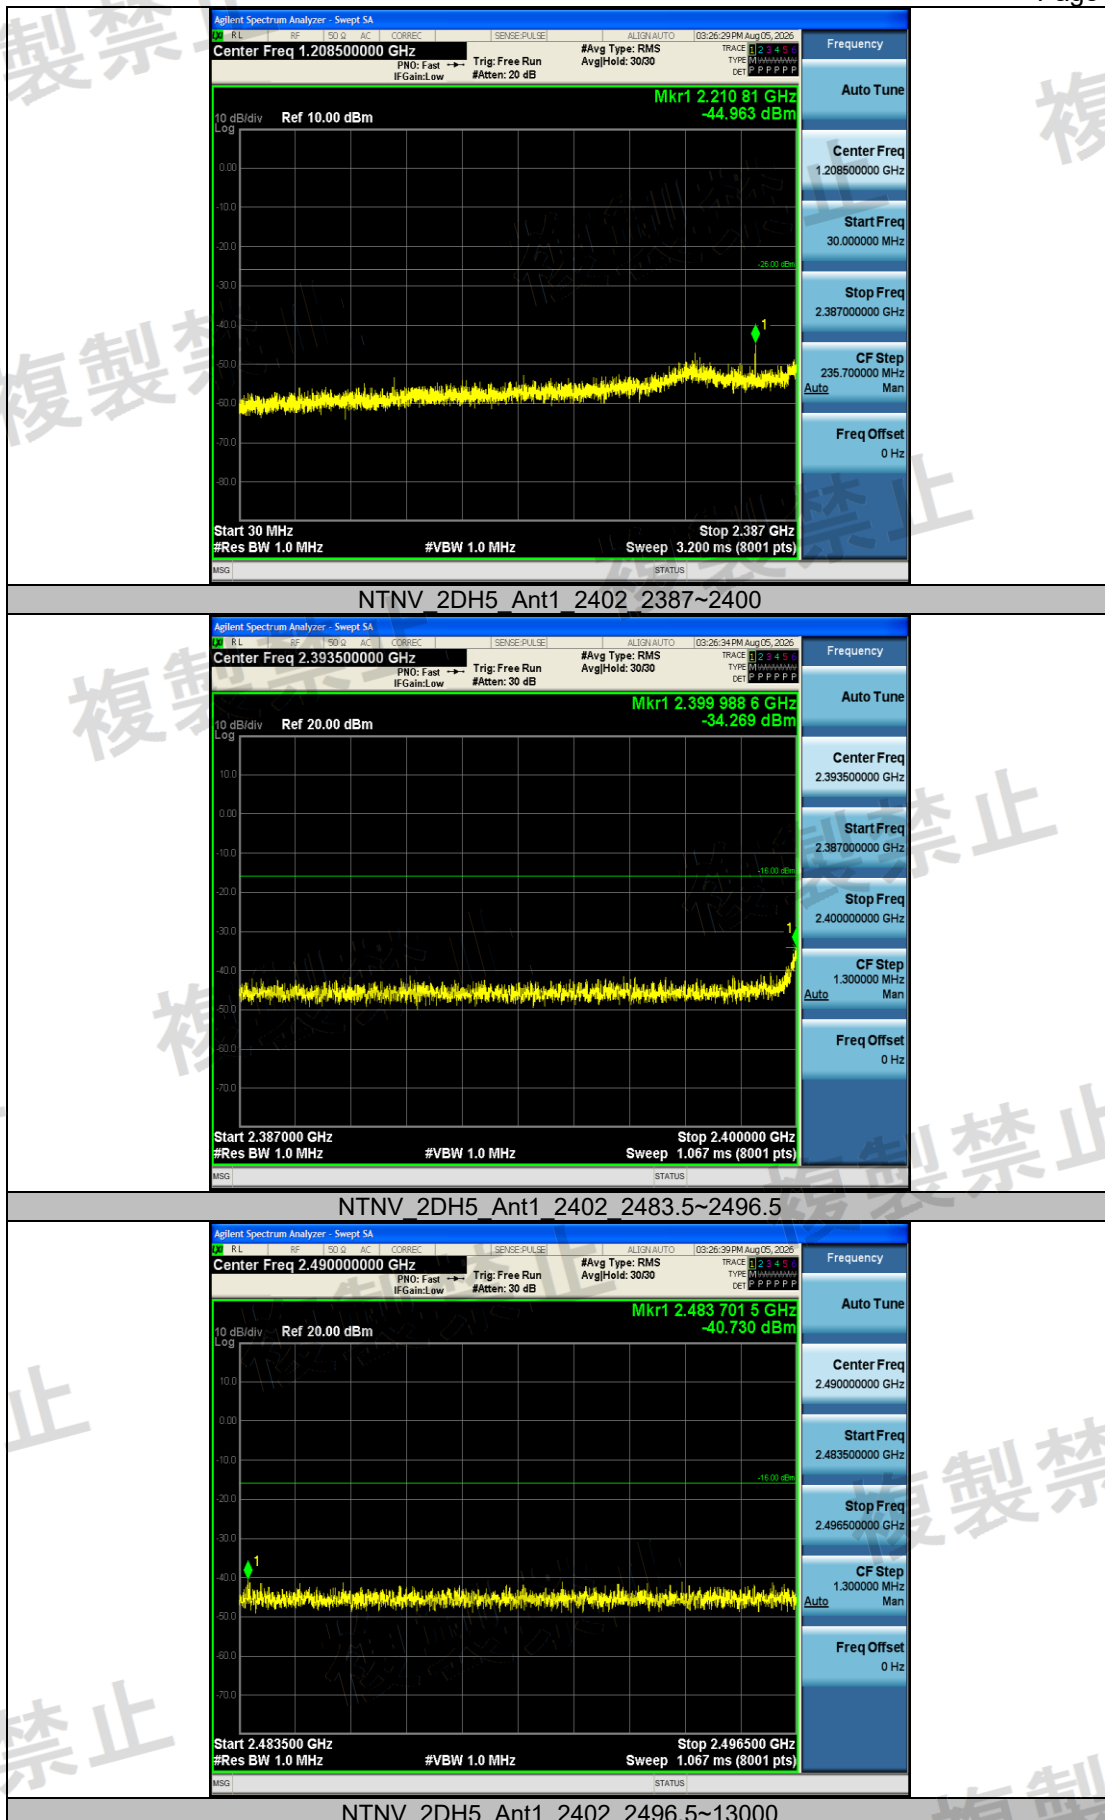

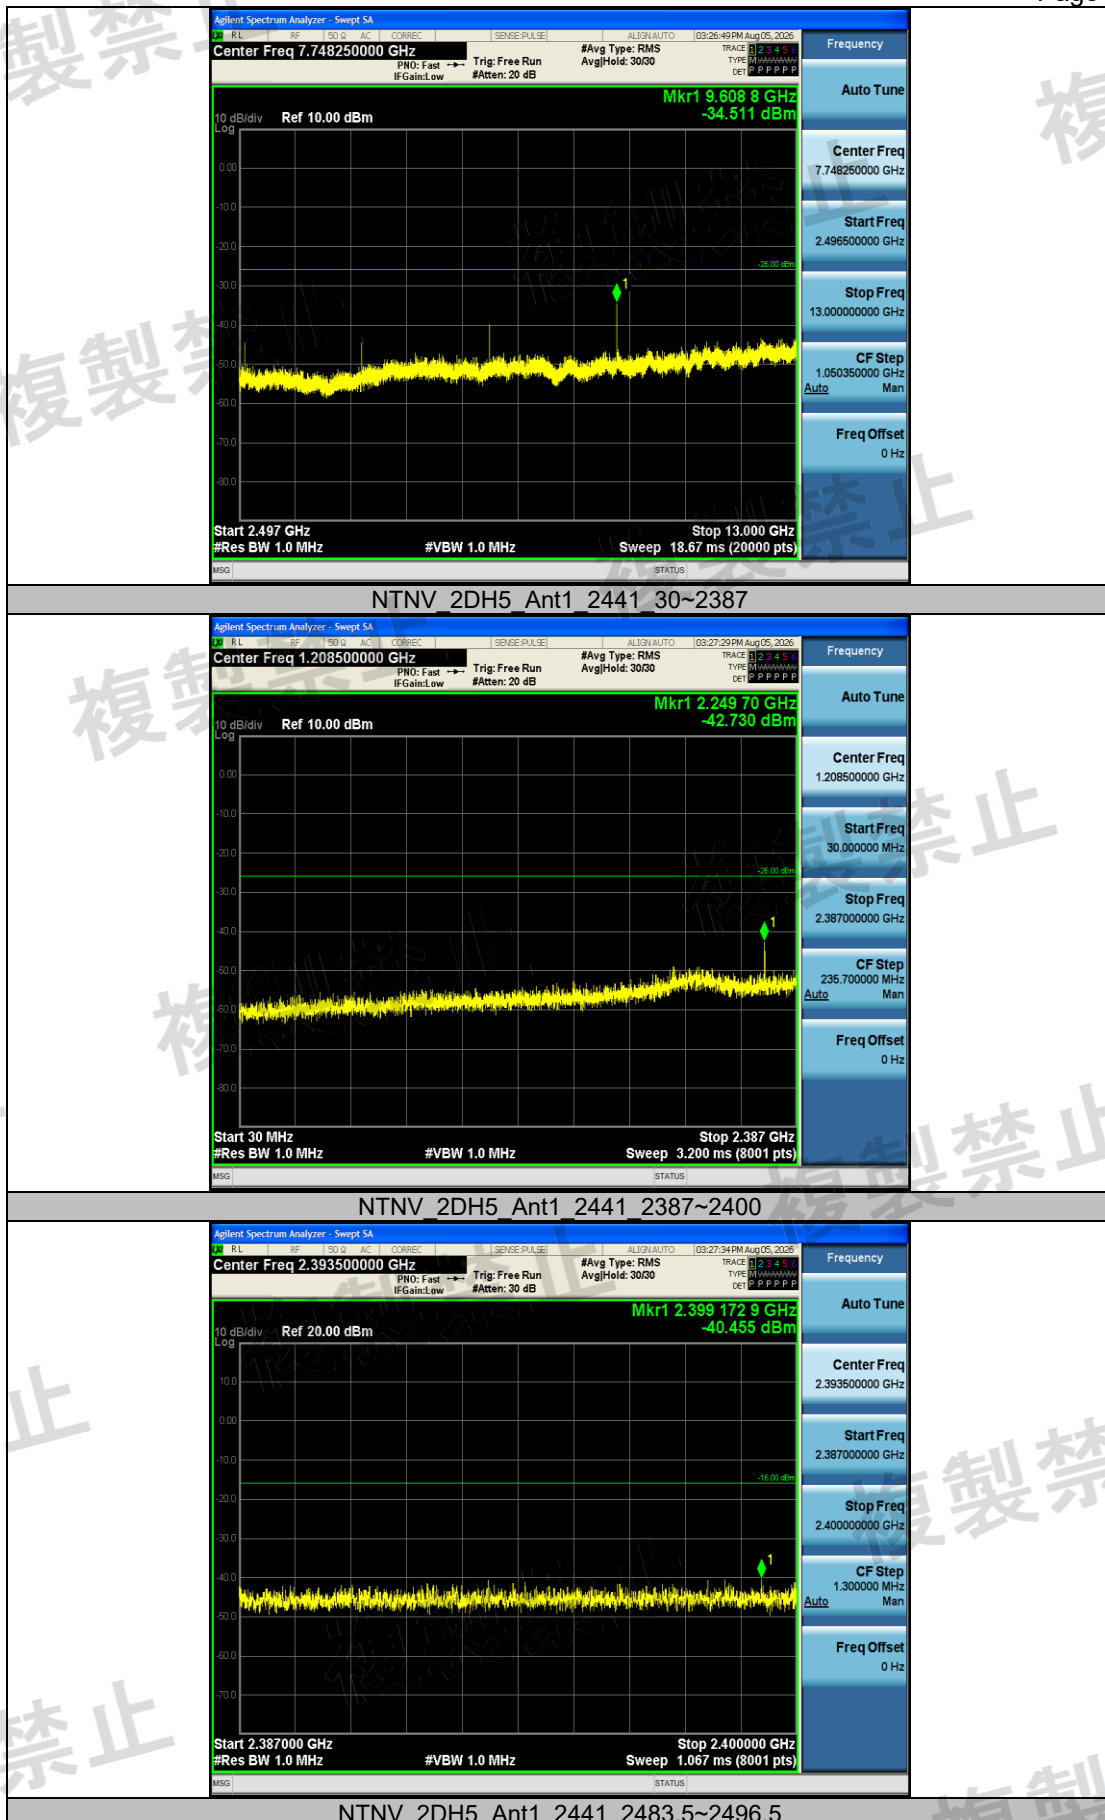


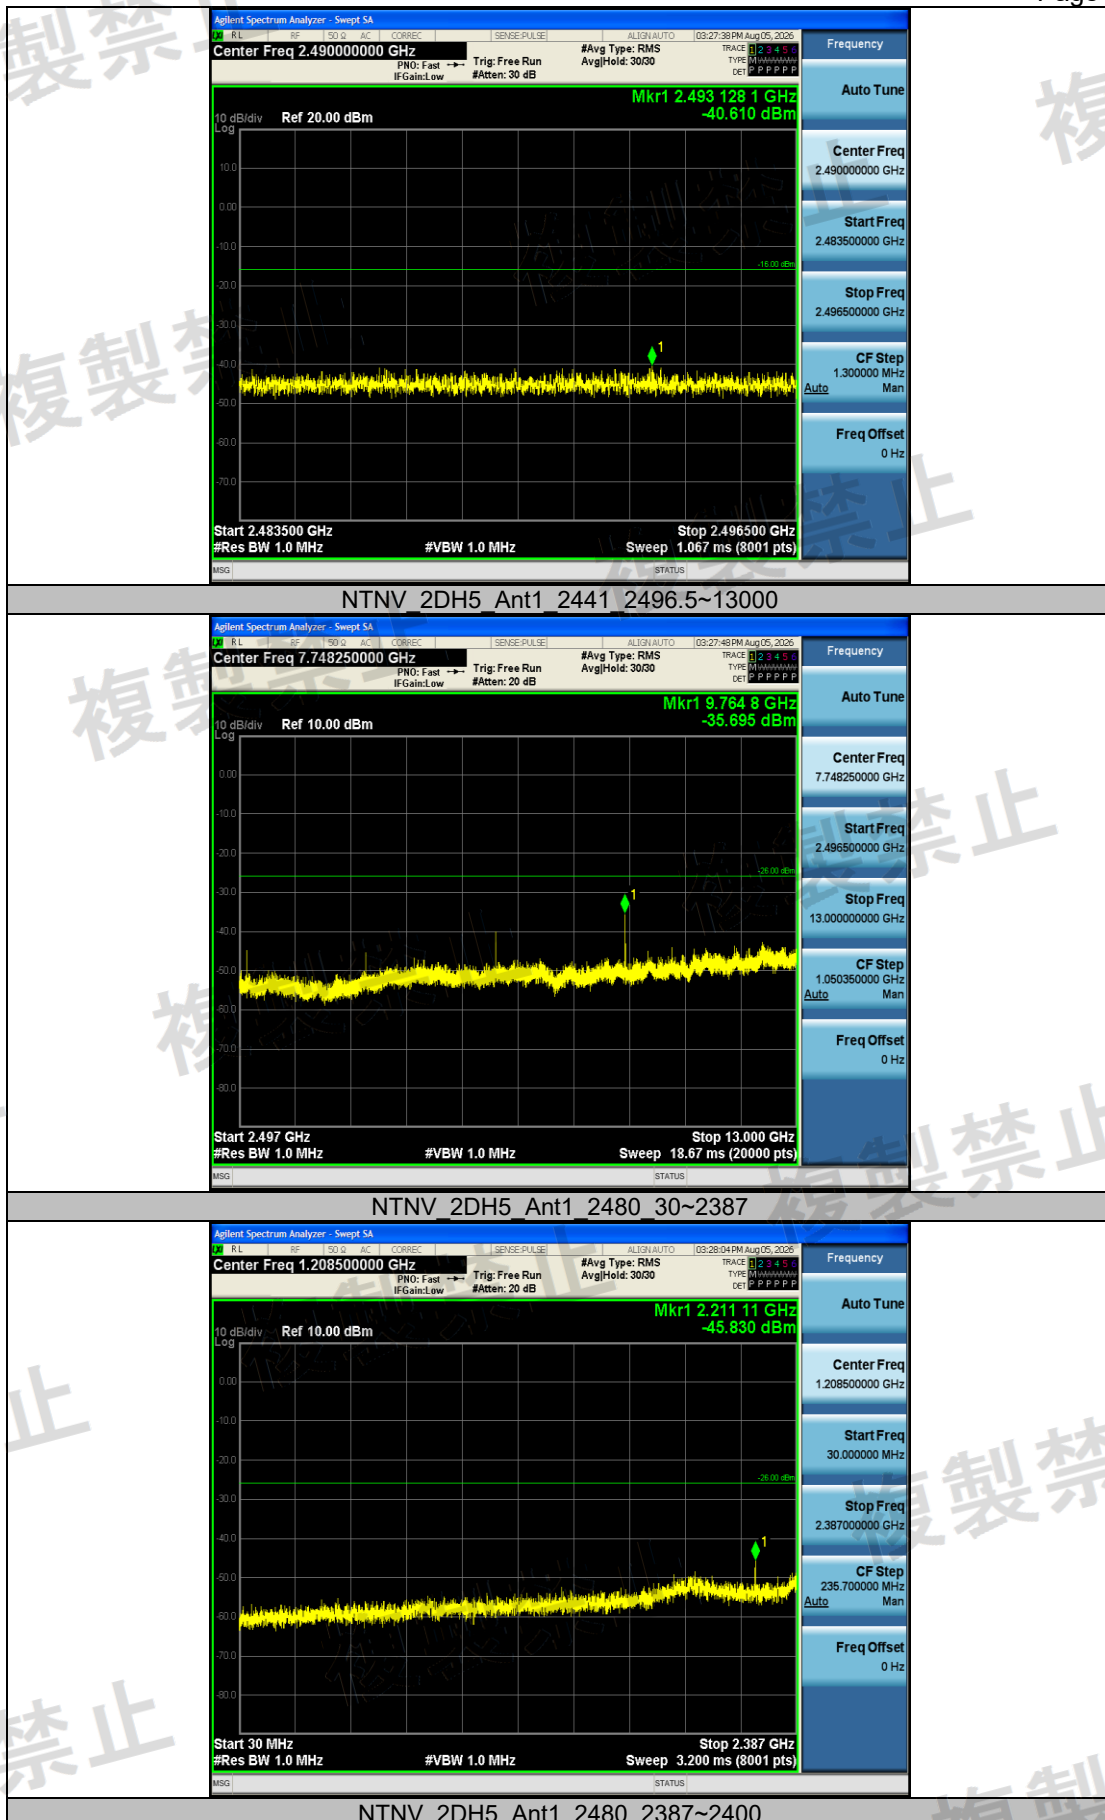

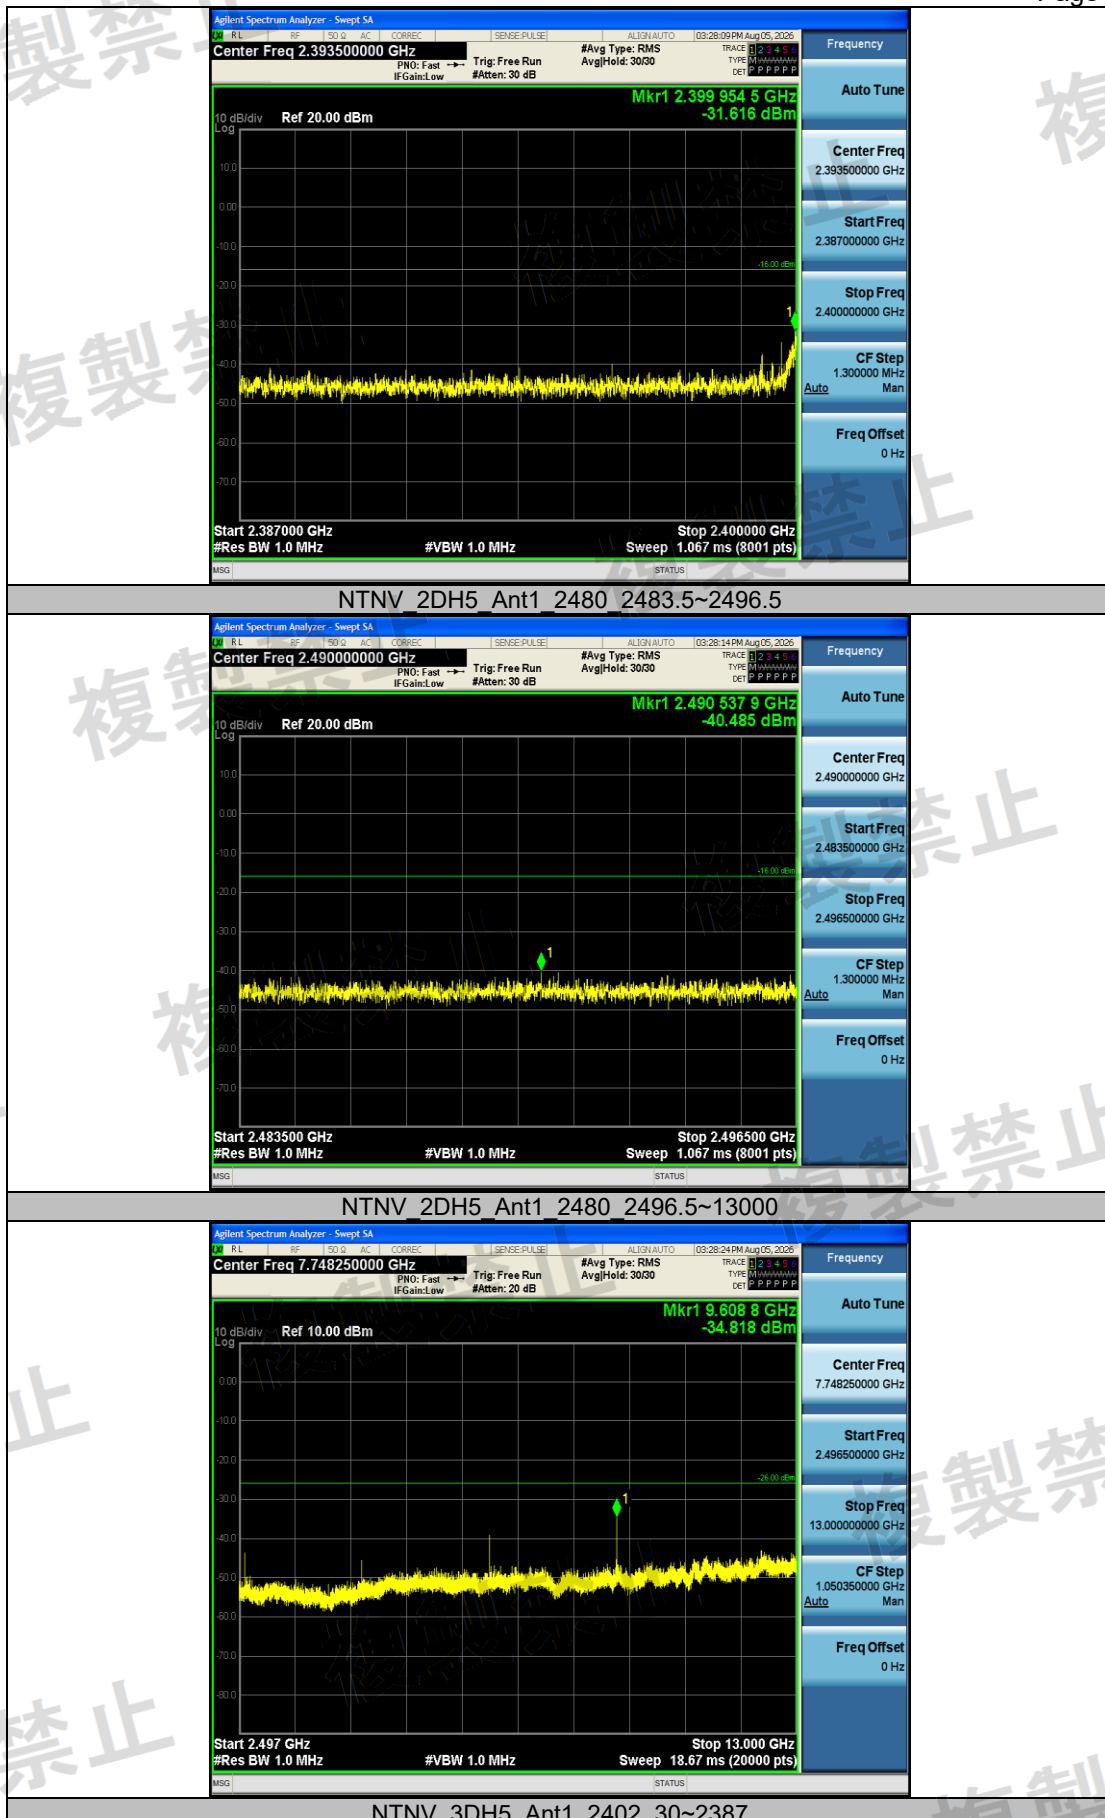


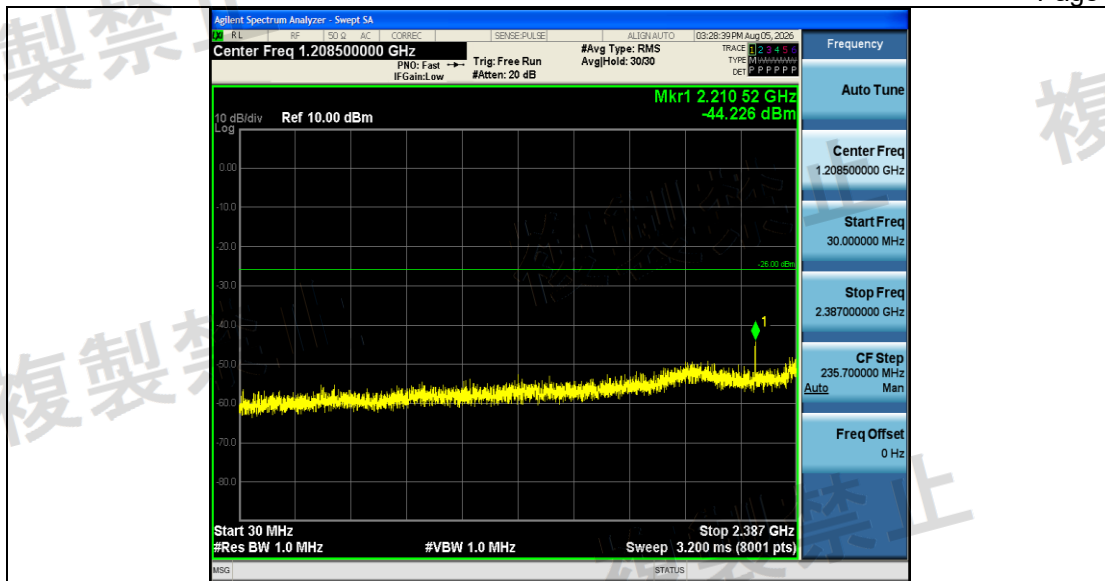

NTNV 3DH5 Ant1 2402 2387~2400

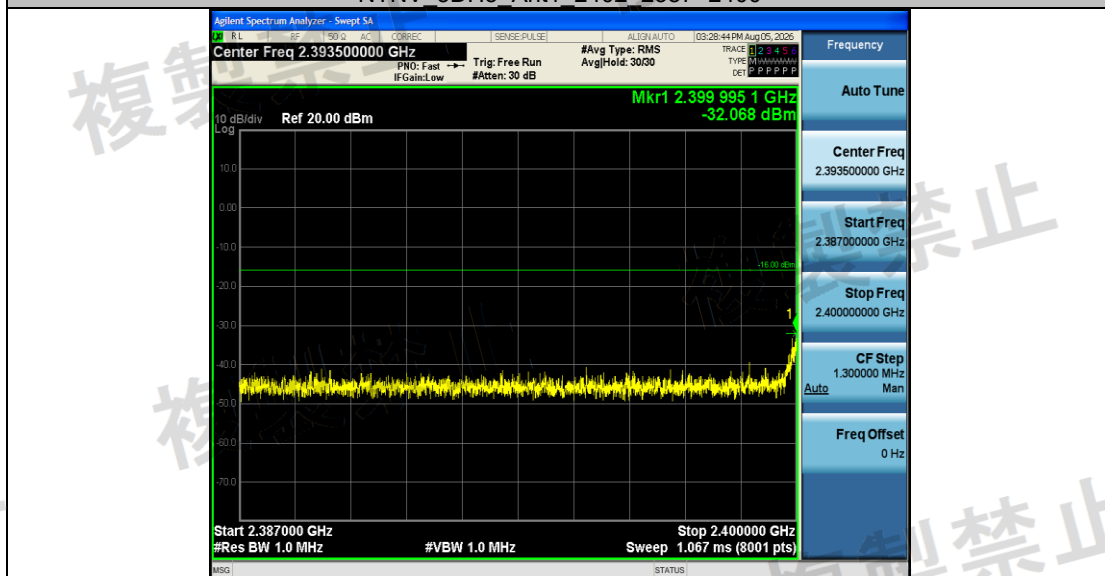



NTNV 3DH5 Ant1 2402 2483.5~2496.5

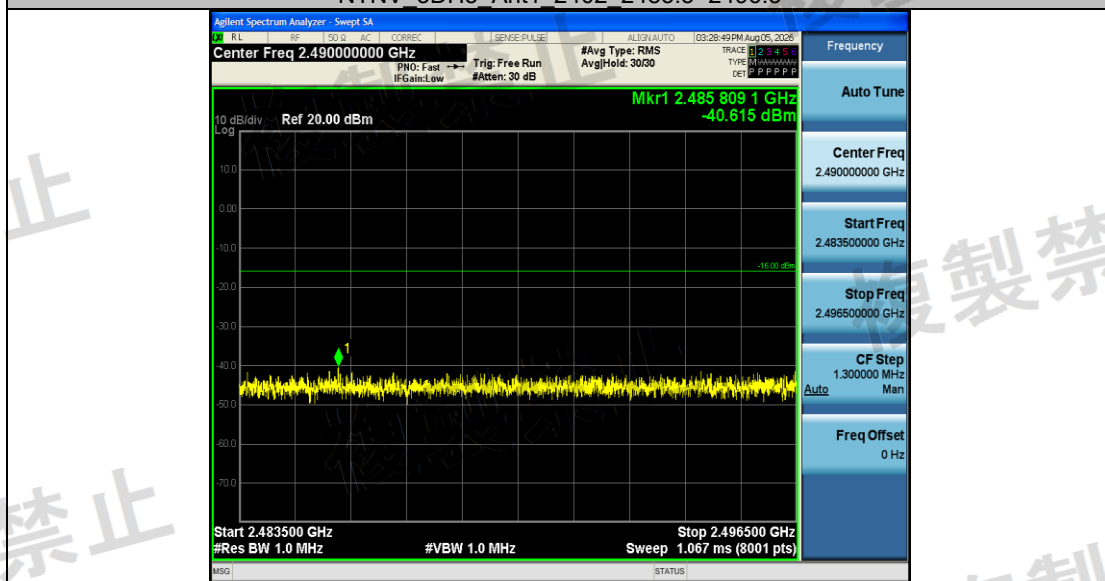


NTNV 3DH5 Ant1 2402 2496.5~13000



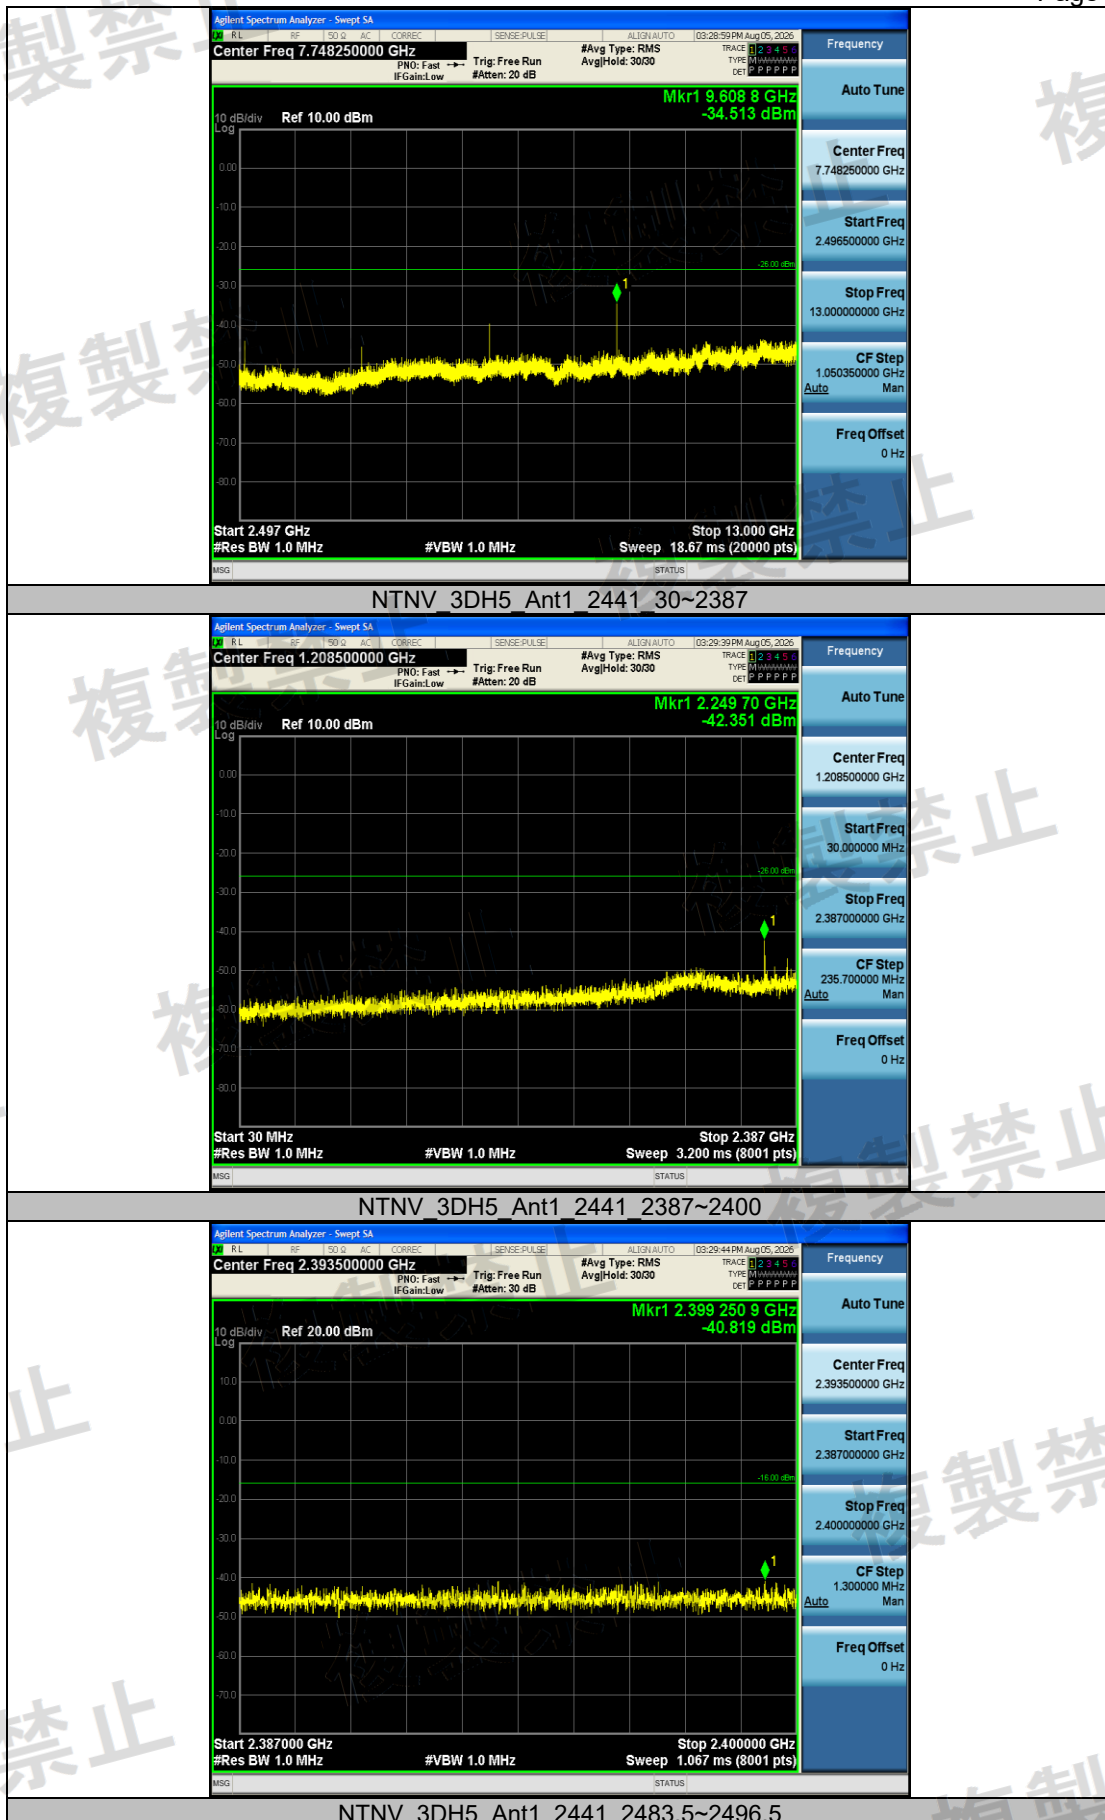

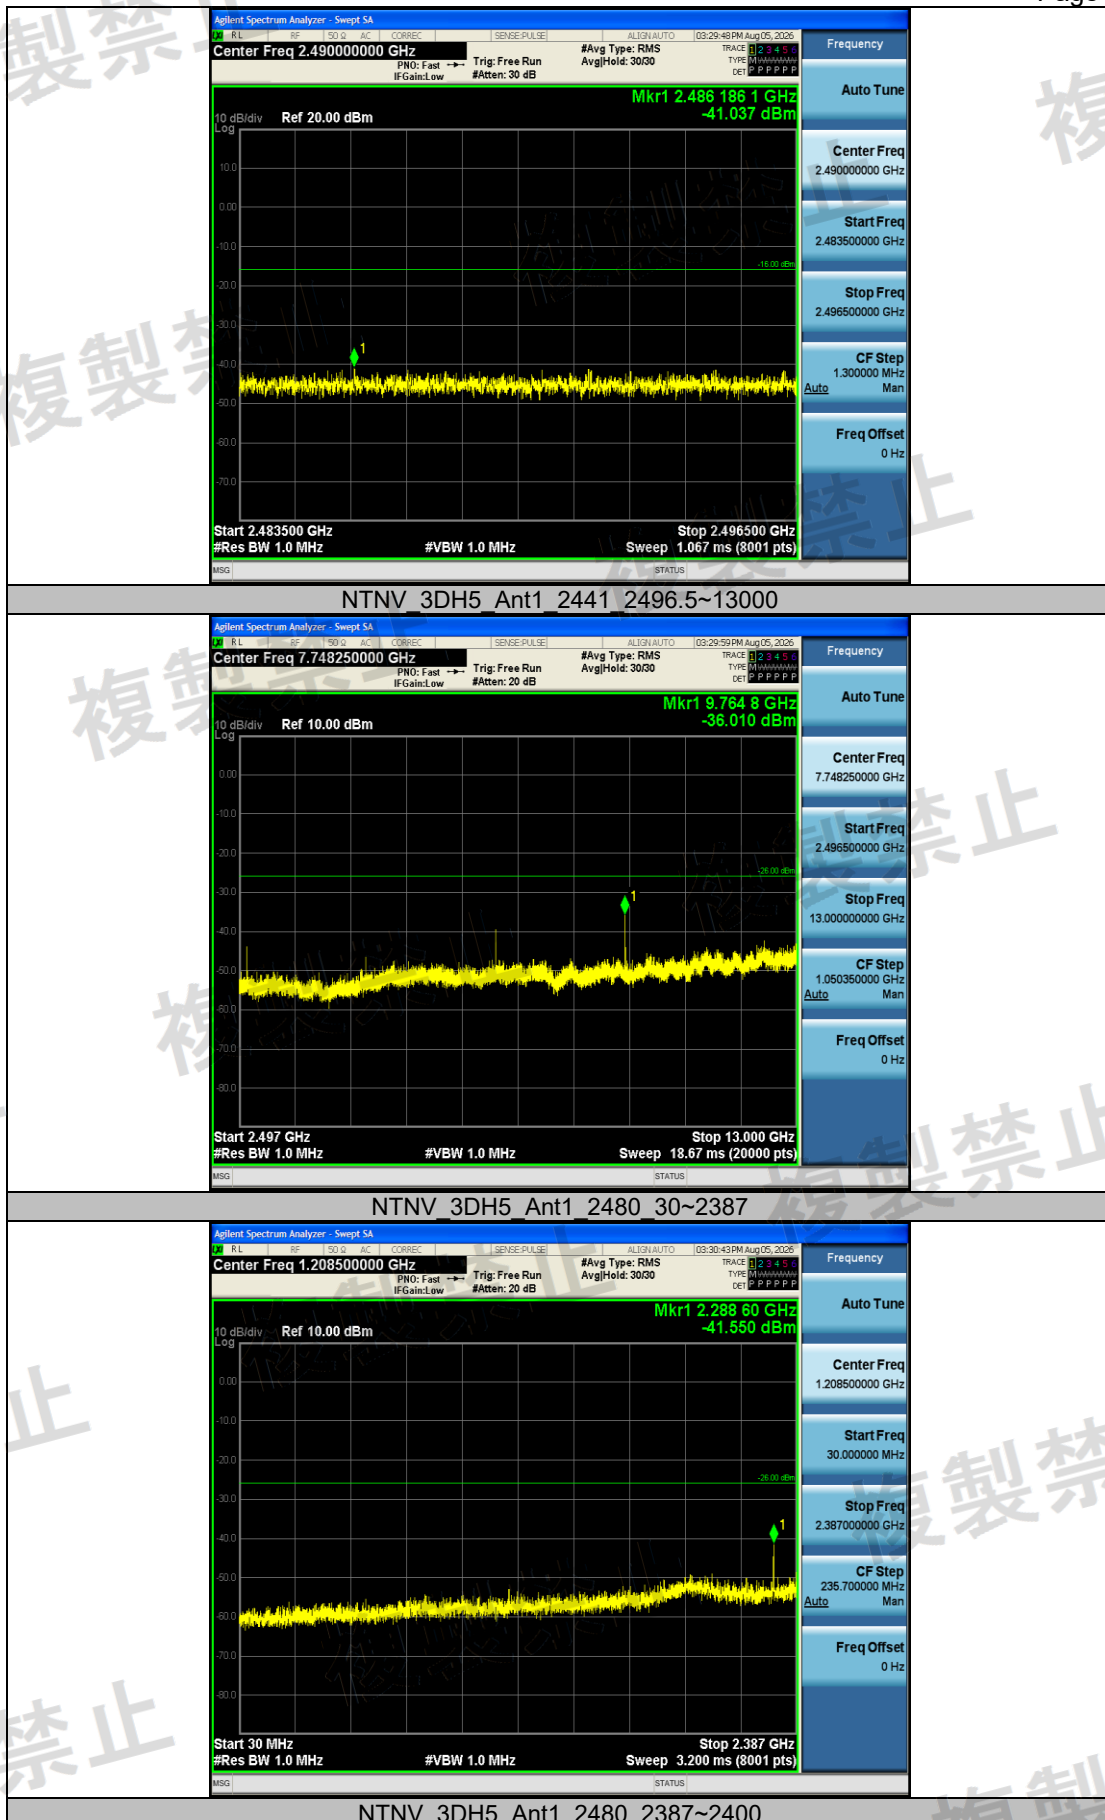


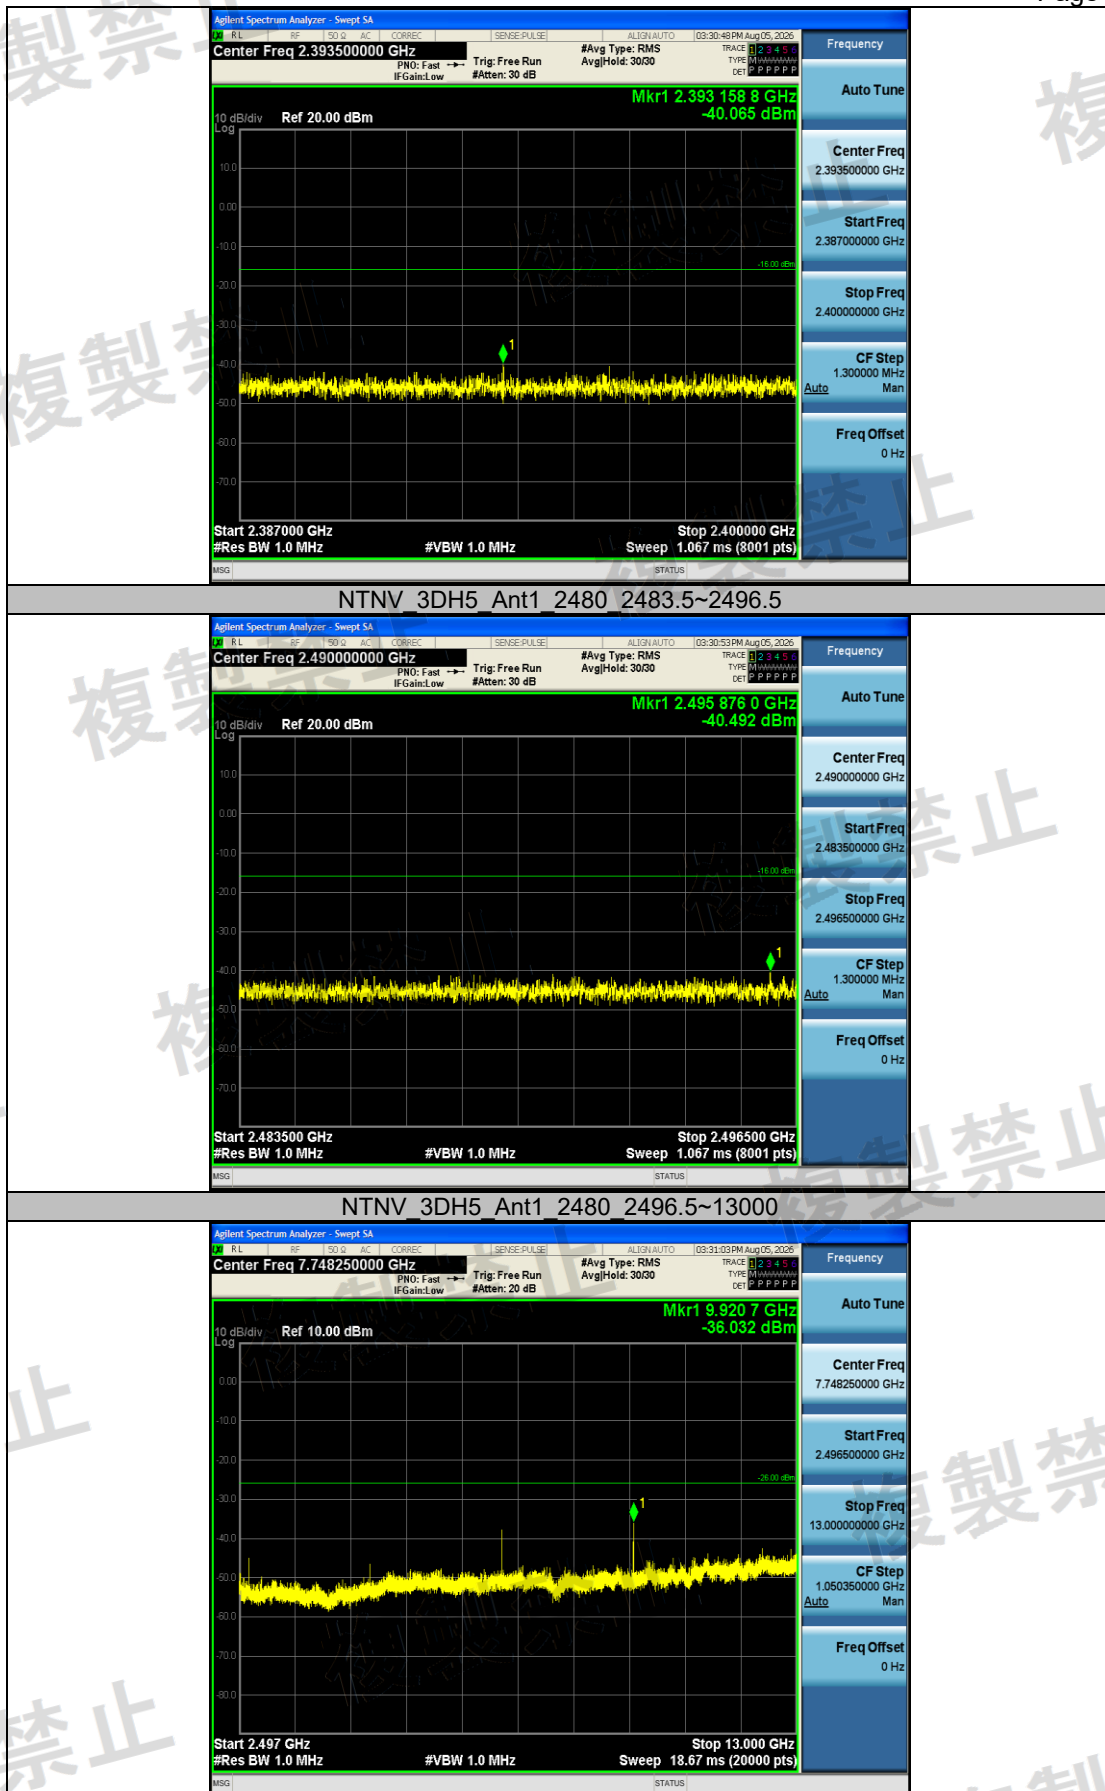



Limit of secondary radiated emissions

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-13GHz

RBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

VBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

TEST RESULTS

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	DH5	Ant1	2402	30~1000	968.84	-72.32	≤-54	0.05861	≤4	PASS
				1000~13000	12339.97	-63.16	≤-47	0.48306	≤20	PASS
			2441	30~1000	798.48	-73.46	≤-54	0.04508	≤4	PASS
				1000~13000	12720.39	-62.90	≤-47	0.51286	≤20	PASS
			2480	30~1000	937.19	-73.01	≤-54	0.05000	≤4	PASS
				1000~13000	2560.08	-58.79	≤-47	1.32130	≤20	PASS
	2DH5	Ant1	2402	30~1000	978.90	-72.88	≤-54	0.05152	≤4	PASS
				1000~13000	11848.54	-63.48	≤-47	0.44875	≤20	PASS
			2441	30~1000	910.15	-72.94	≤-54	0.05082	≤4	PASS
				1000~13000	12648.38	-63.00	≤-47	0.50119	≤20	PASS
			2480	30~1000	944.59	-73.00	≤-54	0.05012	≤4	PASS
				1000~13000	12414.97	-63.59	≤-47	0.43752	≤20	PASS
	3DH5	Ant1	2402	30~1000	924.83	-72.77	≤-54	0.05284	≤4	PASS
				1000~13000	12702.99	-63.69	≤-47	0.42756	≤20	PASS
			2441	30~1000	842.74	-73.12	≤-54	0.04875	≤4	PASS









			1000~1300 0	12473. 17	-63.92	≤-47	0.4055 1	≤20	PASS
		2480	30~1000	955.74	-71.95	≤-54	0.0638 3	≤4	PASS
			1000~1300 0	12386. 77	-63.35	≤-47	0.4623 8	≤20	PASS


Note: 1. The product was tested at 25 °C and 55% humidity condition;
2. All condition has been testd, list the worst case in this item


Test plot as follows:






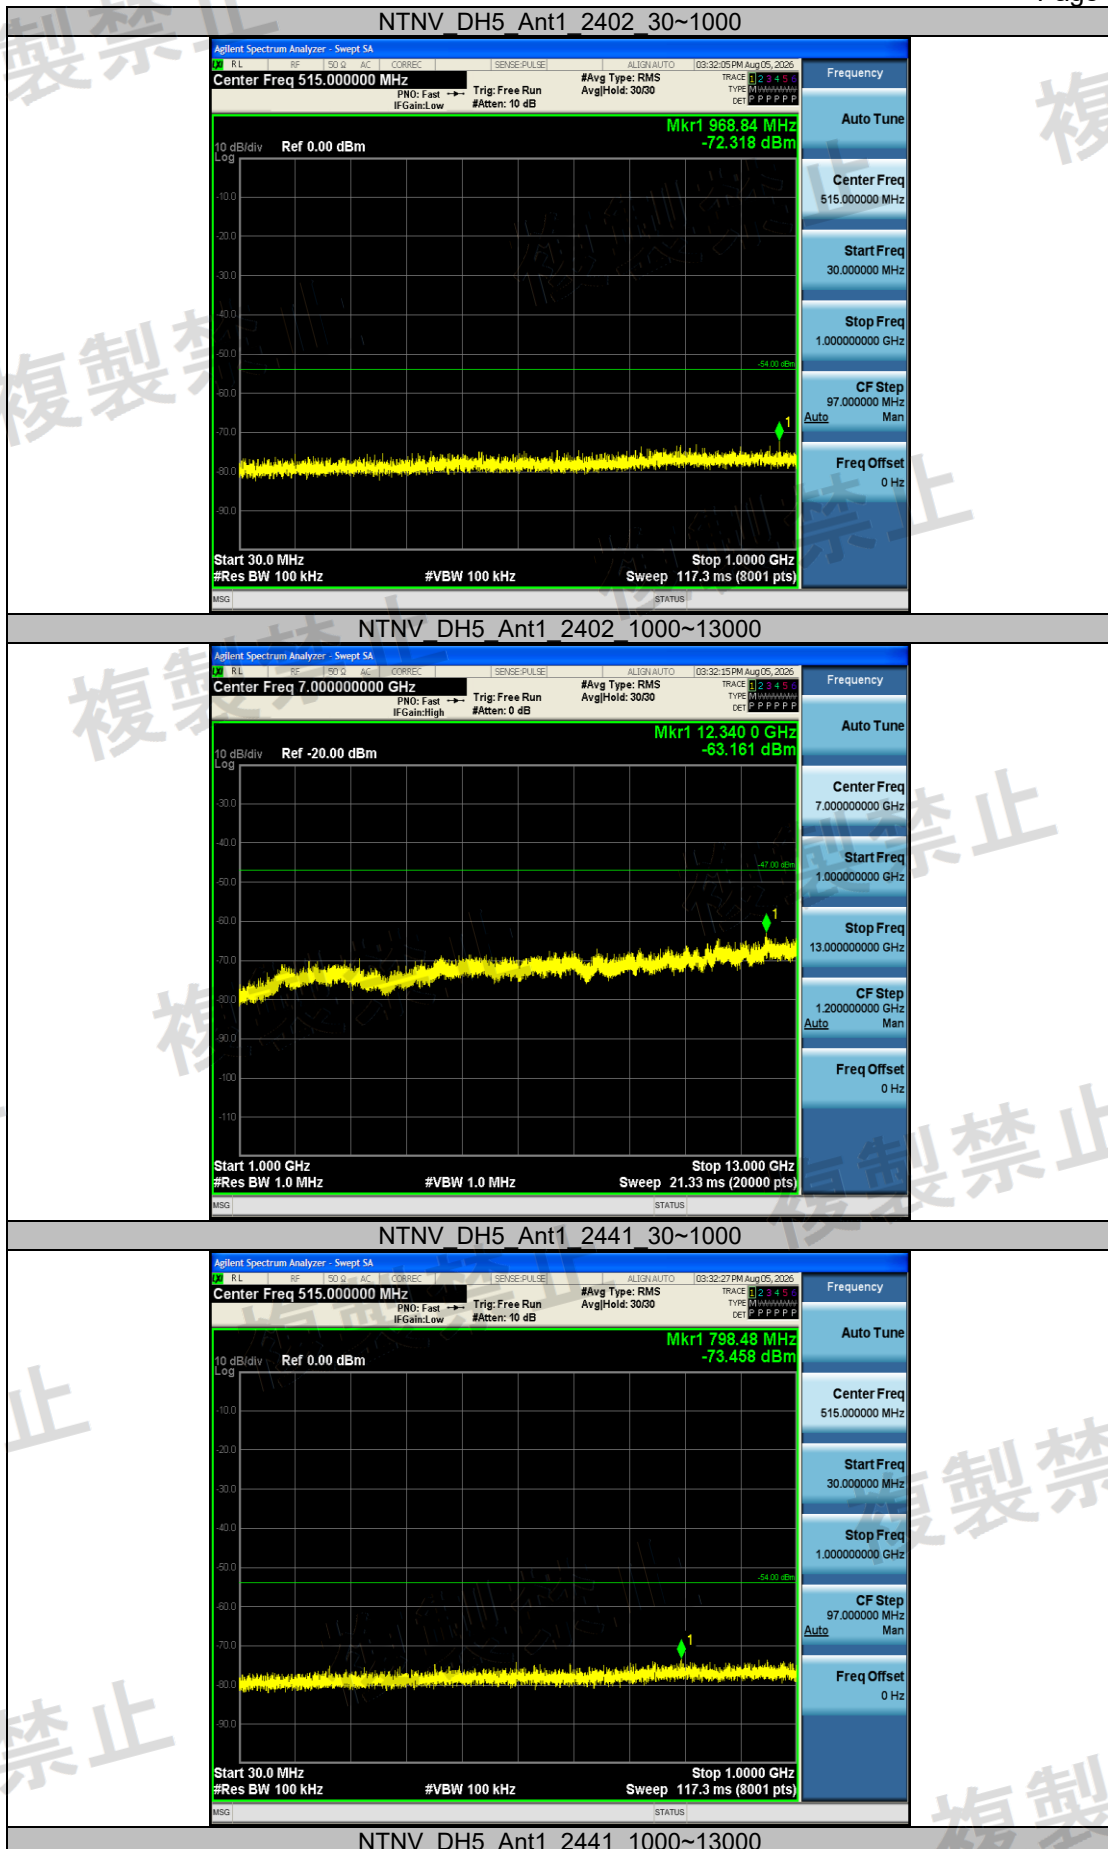


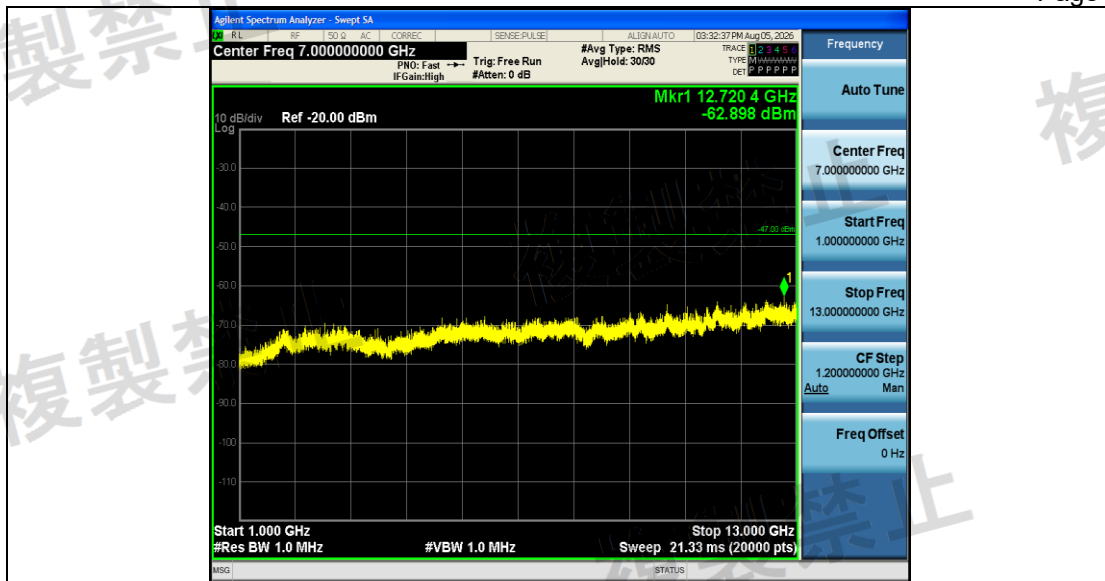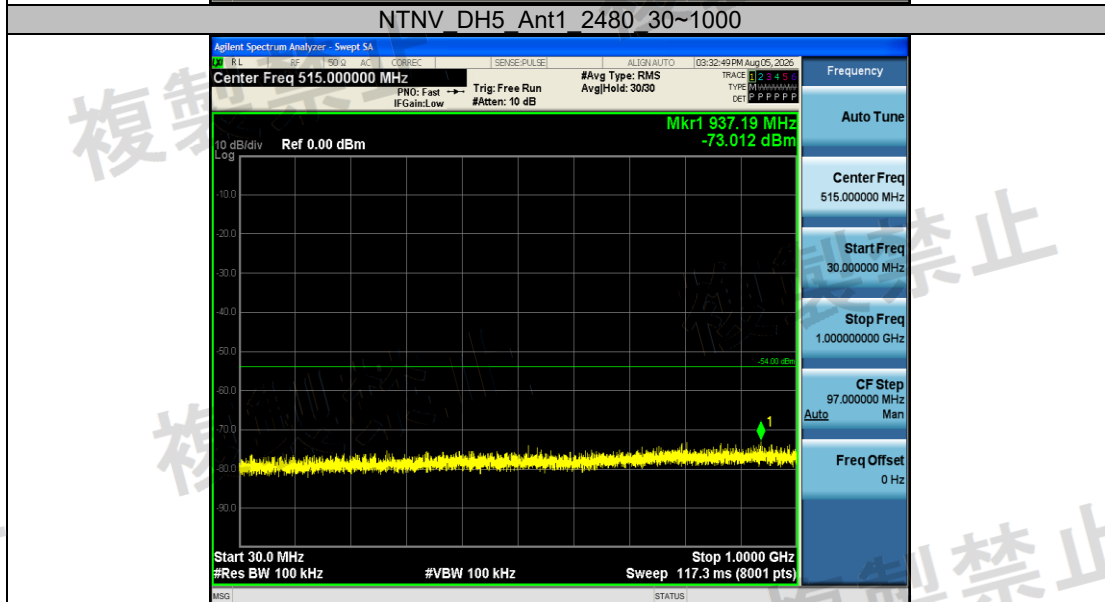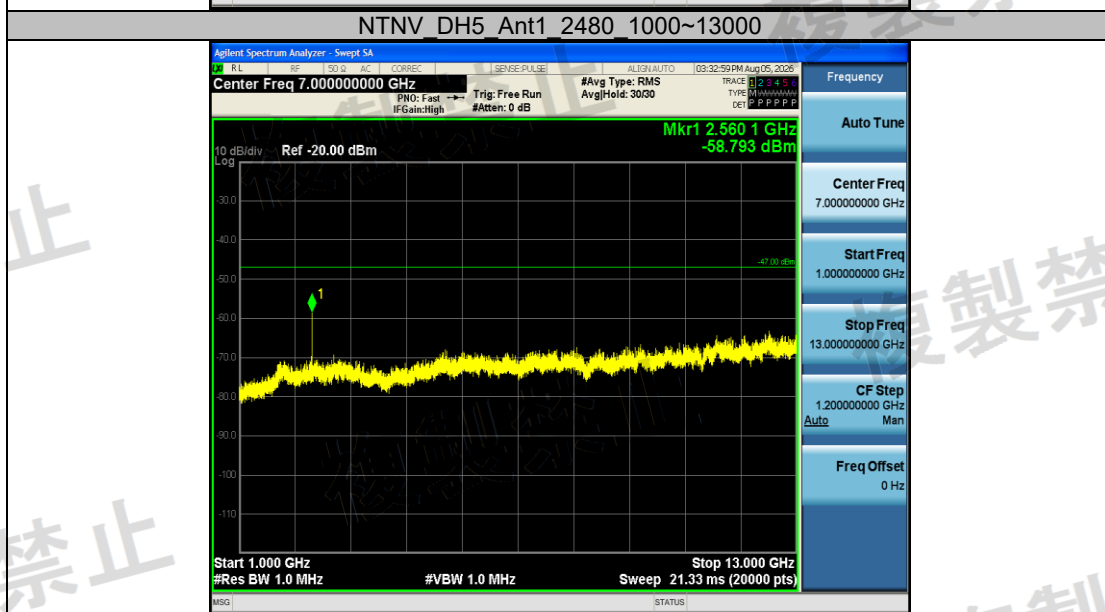

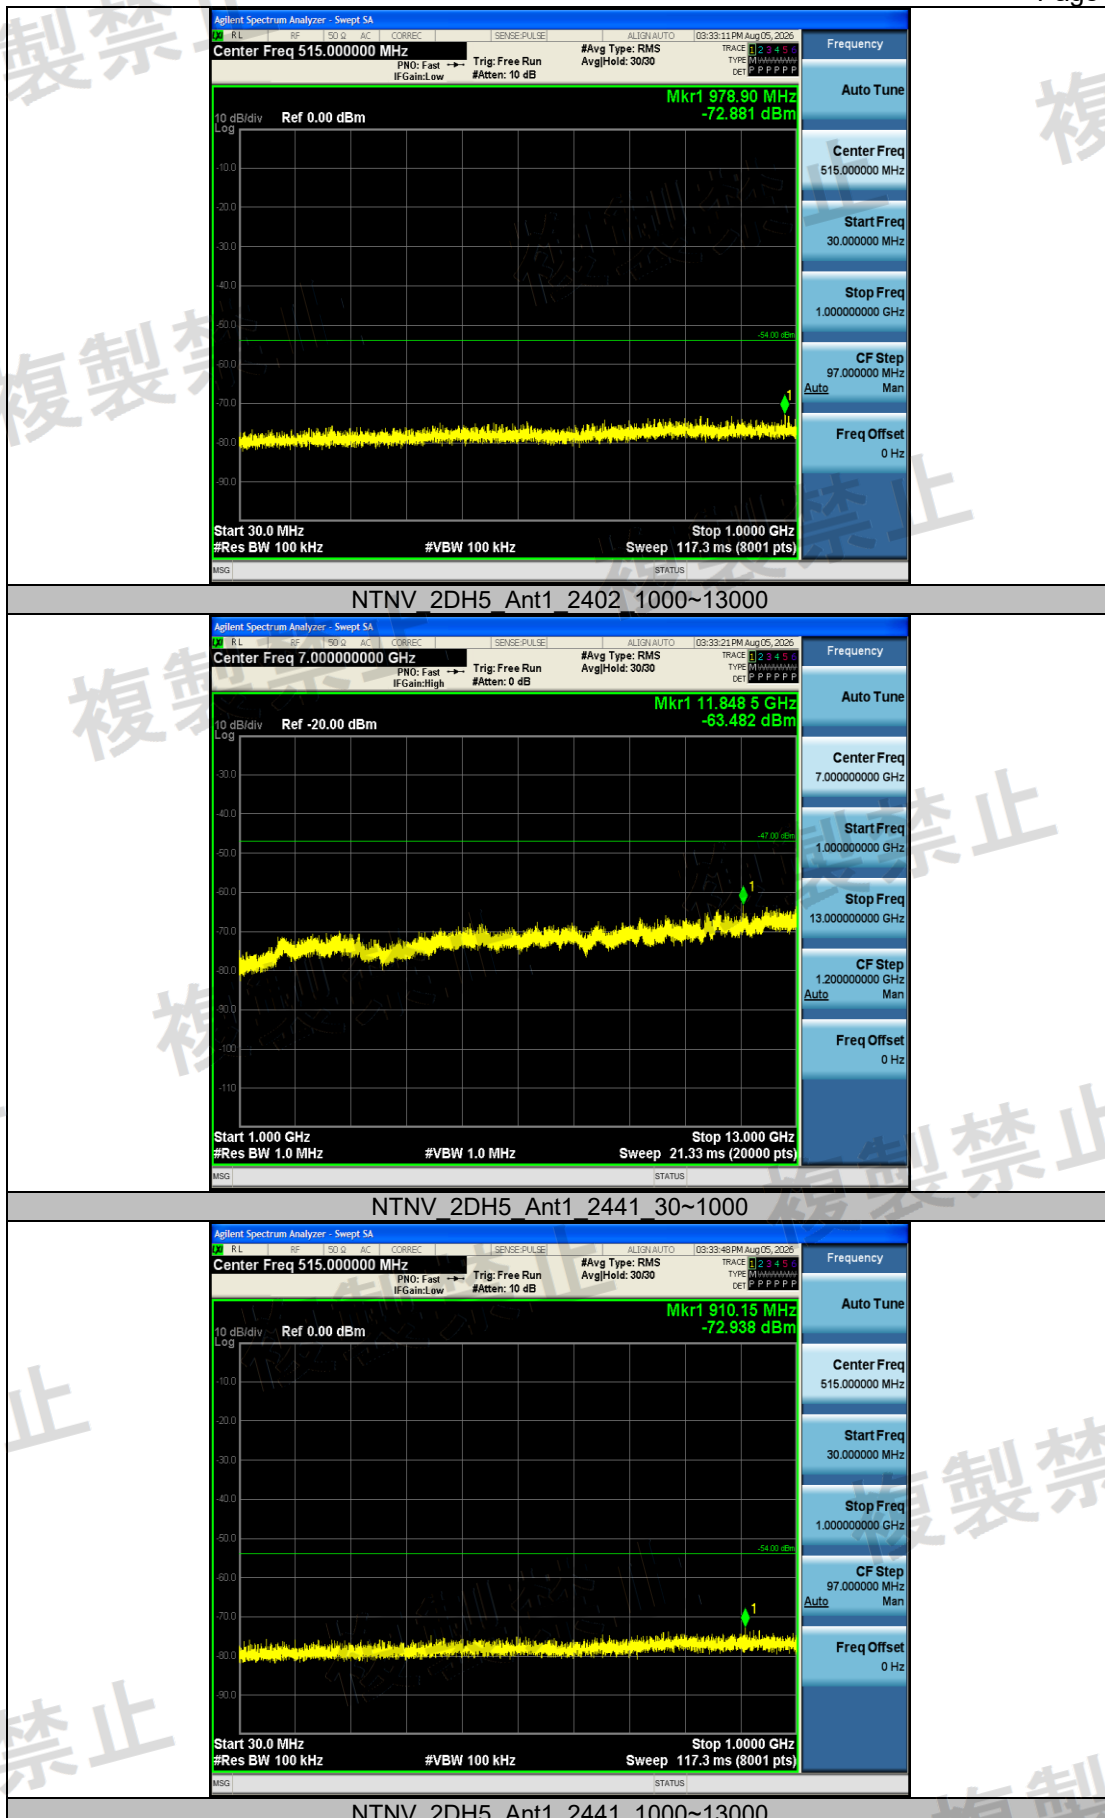

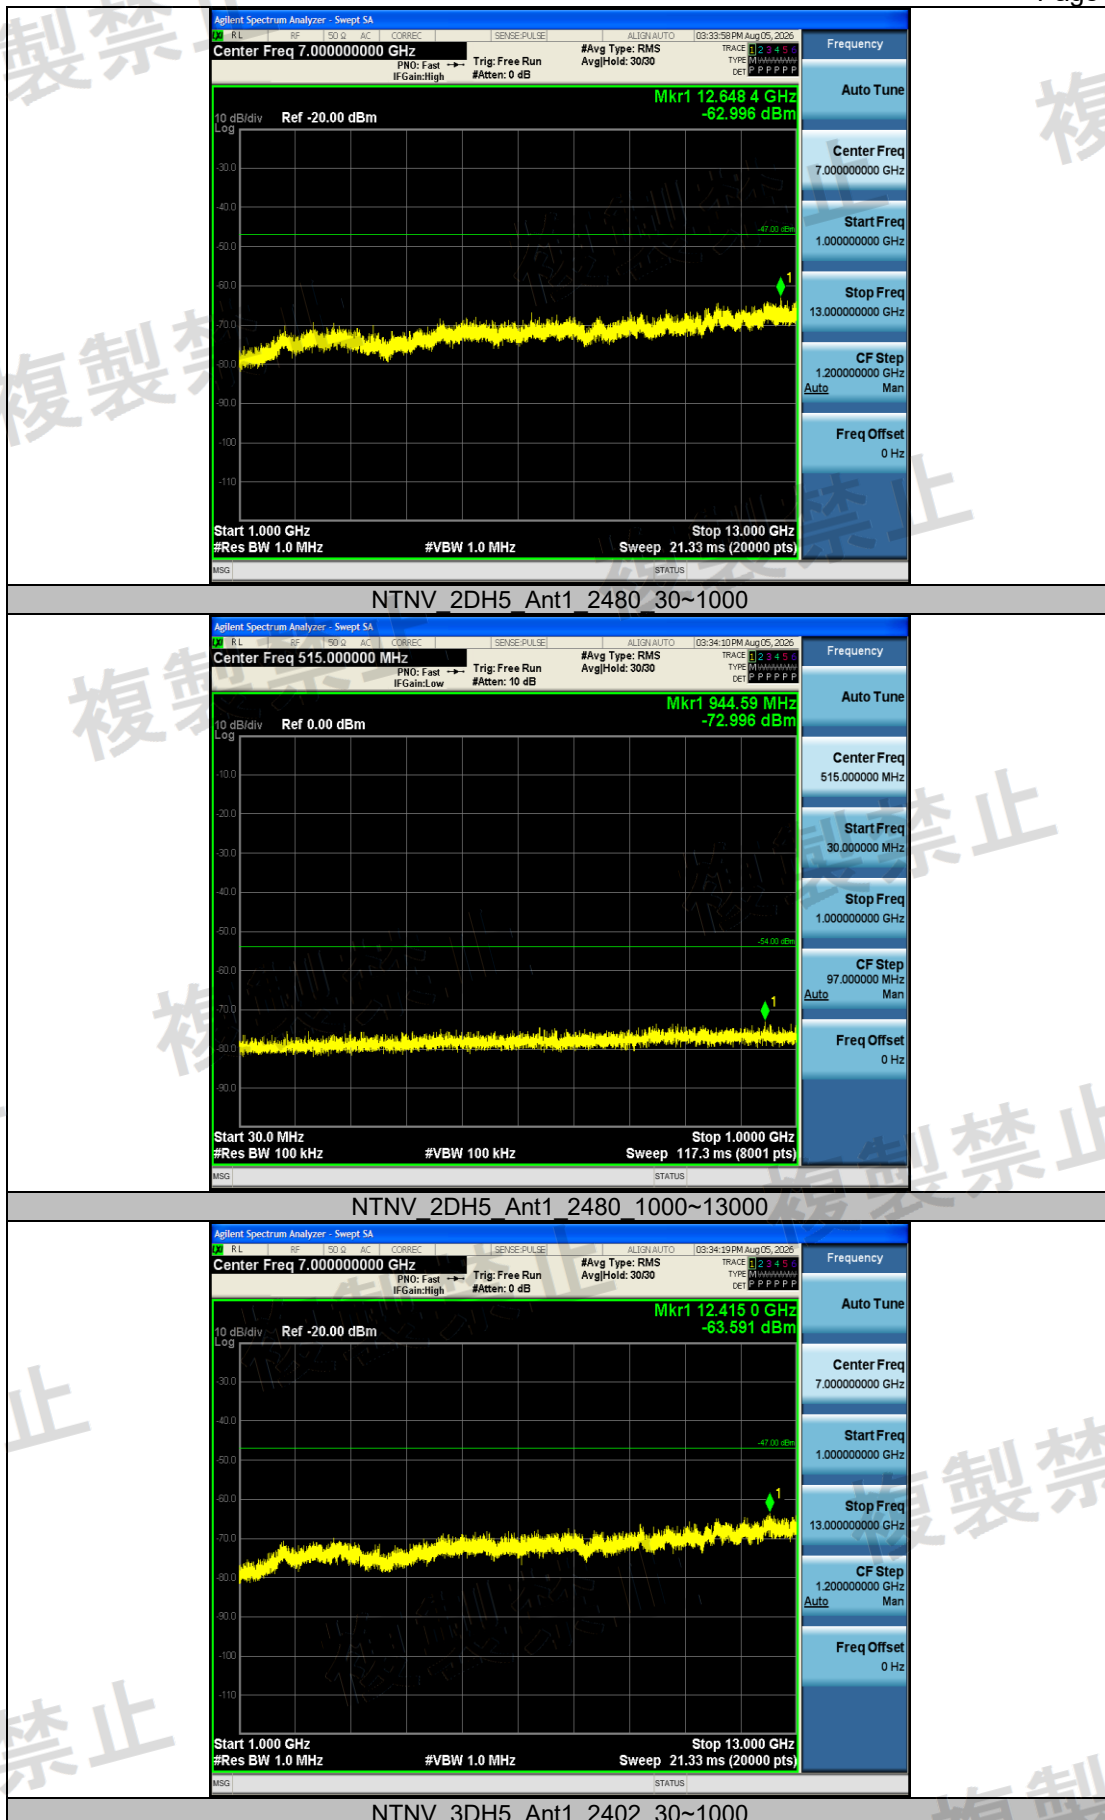

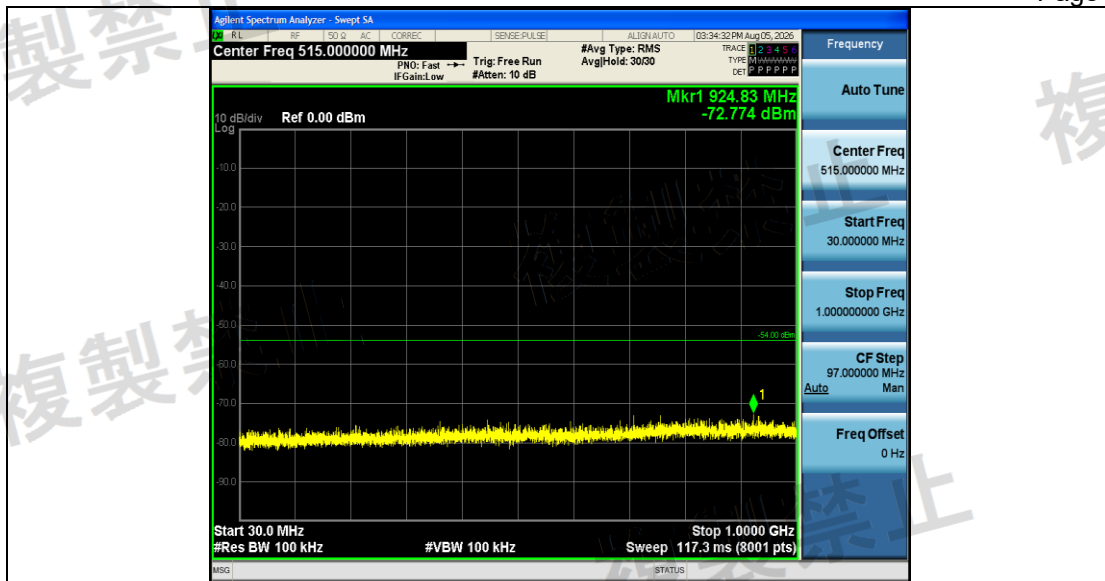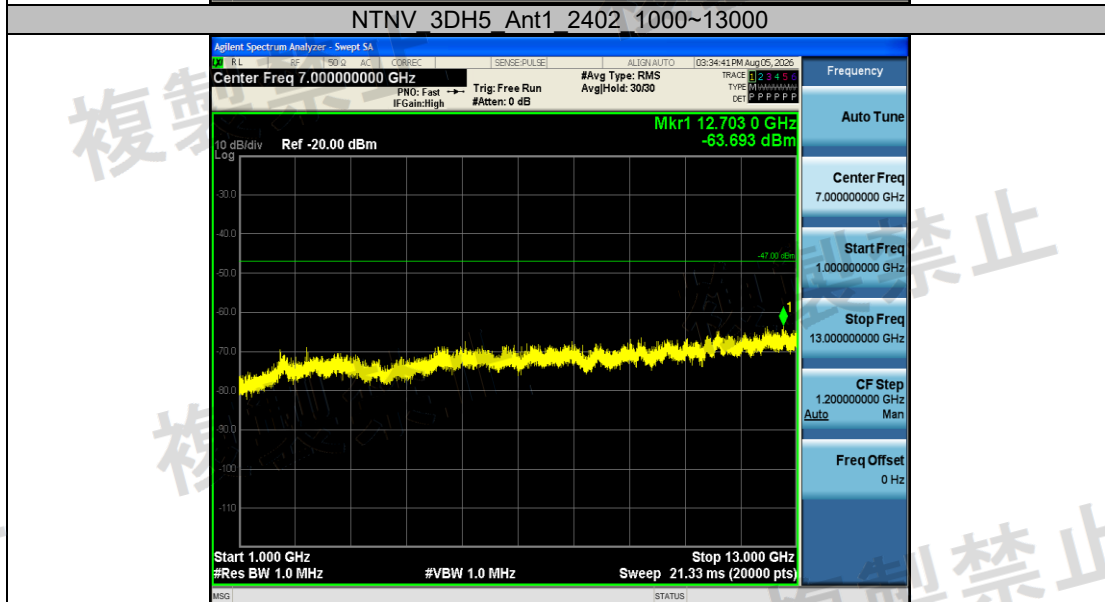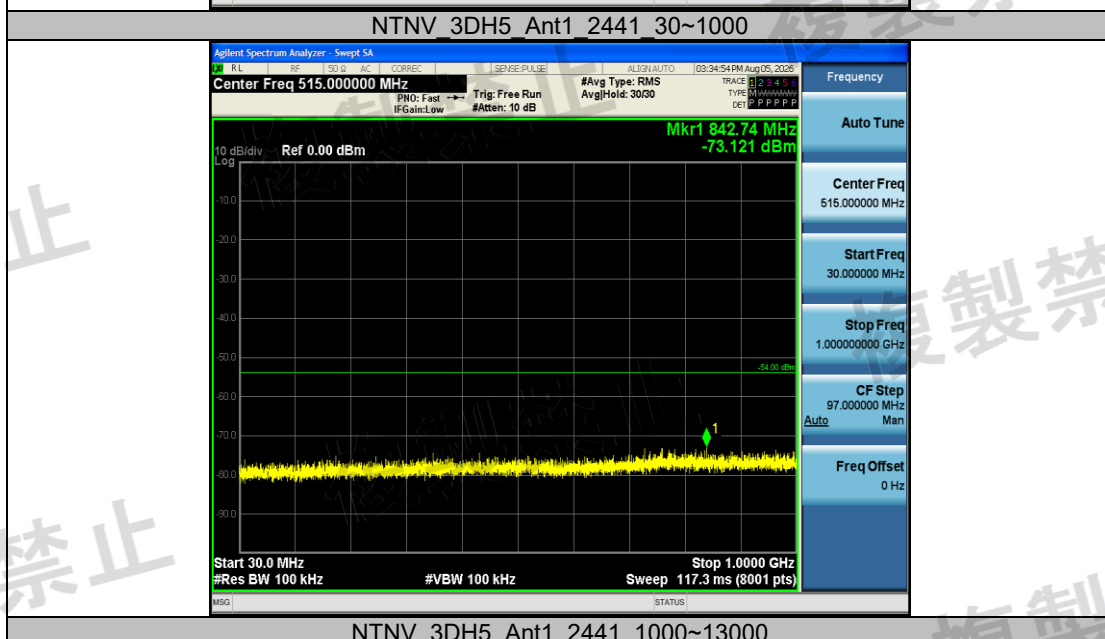

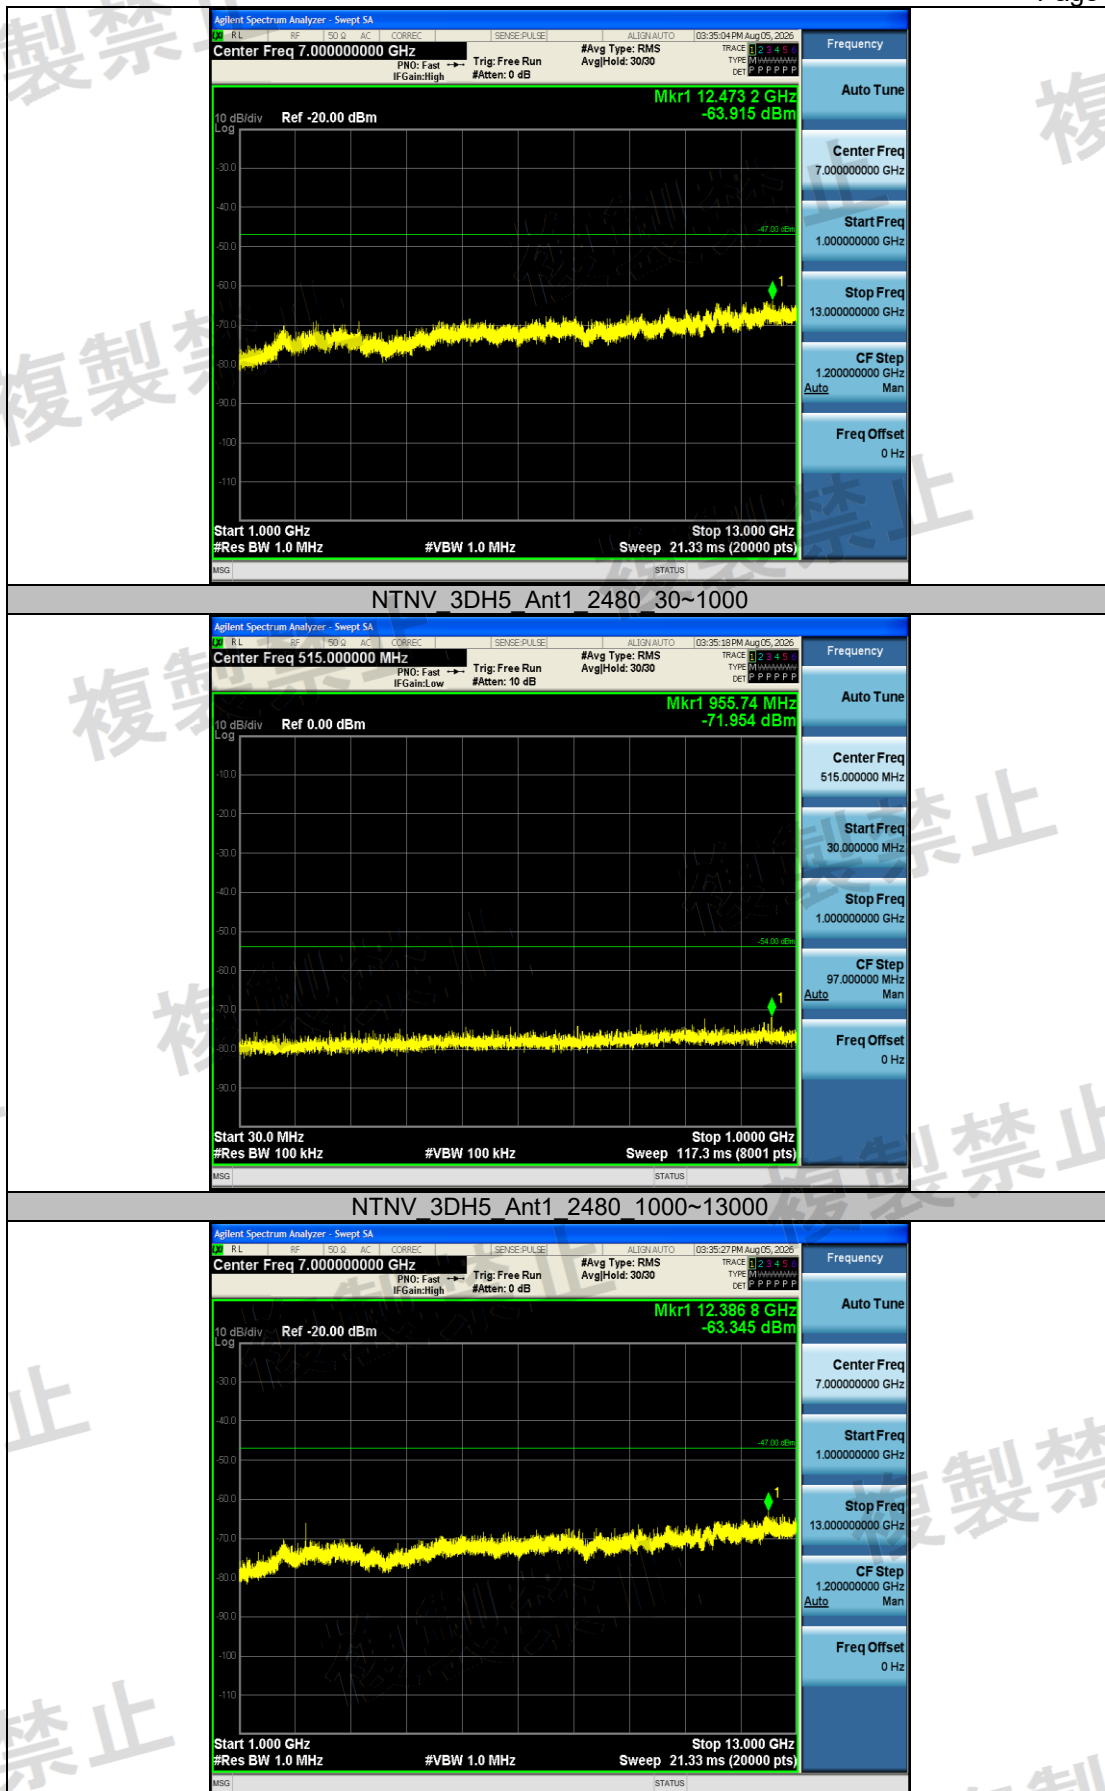





4.6. Transmission Antenna Gain (EIRP antenna power) Measurement

TEST CONFIGURATION

For EUT radiation measurement

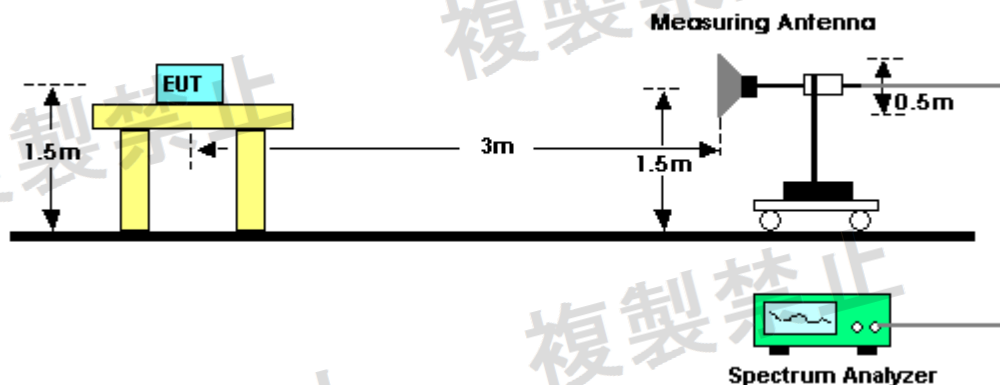

For standard antenna measurement

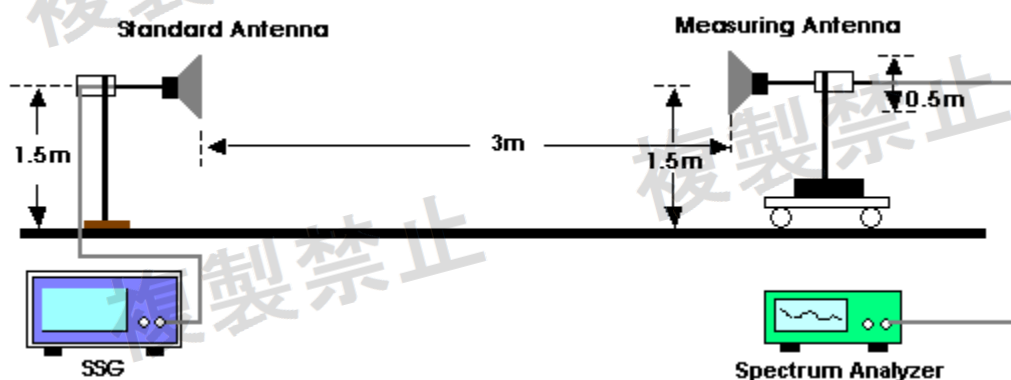

TEST PROCEDURE

1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of the measuring antenna. The output level at the spectrum analyzer is read as "E".
3. Remove the EUT from the turn table and put the replacing antenna facing to measuring antenna at same height. Set the standard signal generator (SSG) at same frequency and transmit on then receive the signal
4. Swing the replacing antenna give a maximum receiving level.
5. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of replacing antenna height and swing it to find the maximum receiving level.
6. Set SSG output power at P_t to give the equivalent output level of "E" or calculate P_t with SSG output which gives the nearest of "E" and difference ($\pm 1\text{dB}$). Record the P_t .
7. Calculate EIRP by the formula below $\text{EIRP} = G_t - L + P_t$.
Gt: gain of replacing antenna (dBi)
L: feeder loss between SSG and replacing antenna





Pt: Output power of the SSG

8. If the antenna for the EUT has circular polarization, sum of V-field and H-field will be result if measuring antenna is linear polarization.

LIMIT

Modulation system	Frequency band used	Antenna power (max.)	EIRP (max.)	
			Omnidirectional case	Directional case
DS, OFDM	2,400 - 2,483.5 MHz	10 mW/MHz	12.14 dBm/MHz	22.14 dBm/MHz
	2,400 - 2,483.5 MHz	3 mW/MHz	6.91 dBm/MHz	16.91 dBm/MHz
FH, DS-FH FH-OFDM	Excluding 2,427 - 2,470.75 MHz	10 mW/MHz	12.14 dBm/MHz	22.14 dBm/MHz
Other than the above	2,400 - 2,483.5 MHz	10 mW	12.14 dBm	22.14 dBm

Note: it is not applicable when Antenna gain do not exceed 2.14 dBi.

TEST RESULTS

N/A

AS:


☒ Antenna gain do not exceed than 2.14 dBi





4.7. Transmission Radiation Angle Width (3db Beamwidth) Measurement

TEST CONFIGURATION

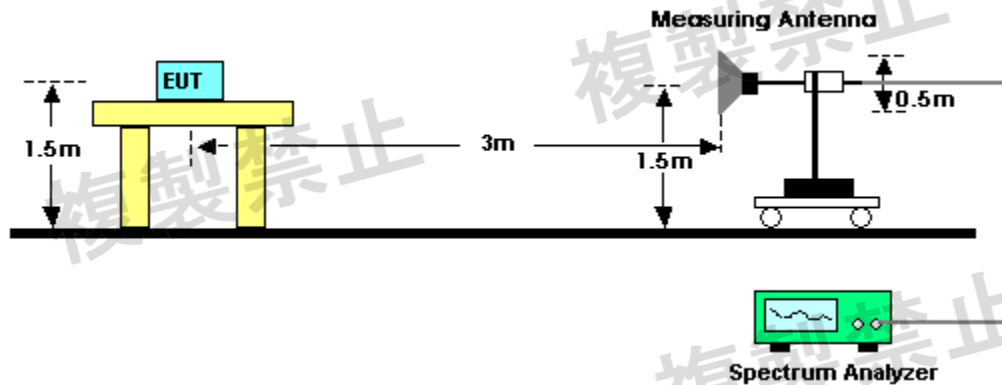

TEST PROCEDURE

1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Set spectrum analyzer with condition in section 4.8 and tune reference level to observe receiving signal position.
3. Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
4. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E".
5. Calculate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.
6. Calculate 3dB antenna beam width by the formula below $360/A$ (If $A < 1$; then $A = 1$).
 $A = \{ \text{EIRP Power [mW]} / 16.36 \text{ for DS, OFDM} \} = \{ \text{EIRP Power [dBm]} / 12.14 \text{ for DS, OFDM} \}$ or
 $A = \{ \text{EIRP Power [mW]} / 4.9 \text{ for FH} \} = \{ \text{EIRP Power [dBm]} / 6.91 \text{ for FH} \}$

LIMIT

Item	Upper Limits
3dB antenna beam width	$360/A$ (If $A < 1$; then $A = 1$) $A = \{ \text{EIRP [mW]} / 16.36 \text{ for DS, OFDM} \}$ or $A = \{ \text{EIRP [mW]} / 4.9 \text{ for FH} \}$
Note: it is not applicable when Antenna gain do not exceed 2.14 dBi or EIRP do not exceed the omnidirectional EIRP upper limit..	

TEST RESULTS

N/A

AS:


- ☒ Antenna gain do not exceed than 2.14 dBi
☐ EIRP do not exceed the omnidirectional EIRP upper limit





4.8. Dwell Time

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer as follows:
Center frequency: Measurement hopping frequency
Sweep frequency width: 0 Hz
Resolution bandwidth: About 1 MHz
Video bandwidth: Approximately the same as the resolution bandwidth
Sweep time: Hopping period
Trigger condition: Video trigger
Sweep mode: Single sweep
Detection mode: Positive peak
3. Set the EUT for DH5 packet transmitting.
4. Measure the maximum time duration of one single pulse.
5. Dwell time = [Spreading factor/79] x duty-cycle x 0.4 seconds (to be determined for each mode, DH5)
Duty-cycle = [on time/total time] x 100%


LIMIT

Item	Upper Limits
Dwell Time	≤ 0.4 sec

TEST RESULTS


Test Condition	Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	Period [ms]	Result [s]	Limit [s]	Verdict
NTNV	DH5	Ant1	2441	2.88	3.75	0.28	<0.4	PASS
	2DH5	Ant1	2441	2.89	3.75	0.28	<0.4	PASS
	3DH5	Ant1	2441	2.89	3.75	0.28	<0.4	PASS



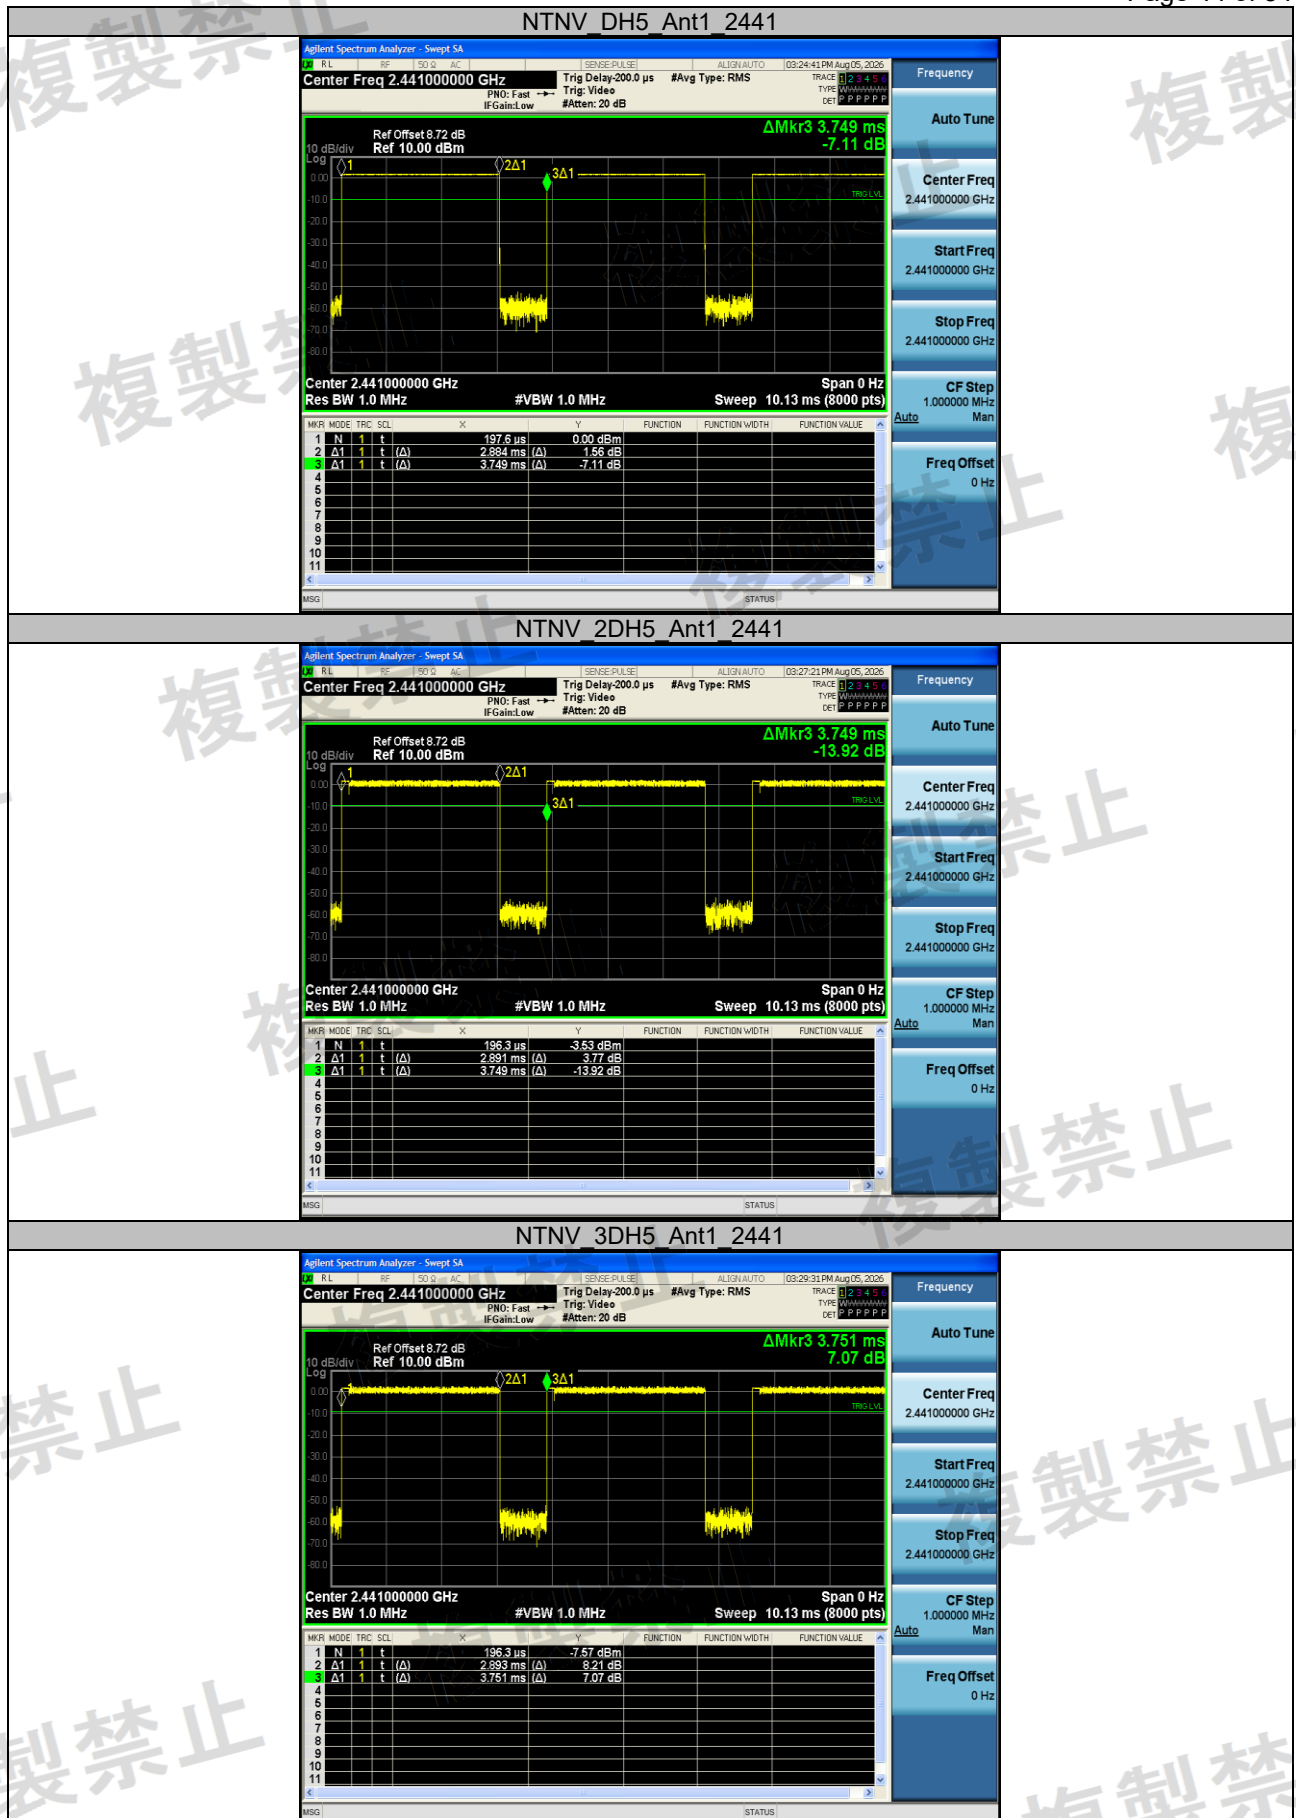



5. Test Setup Photos of the EUT

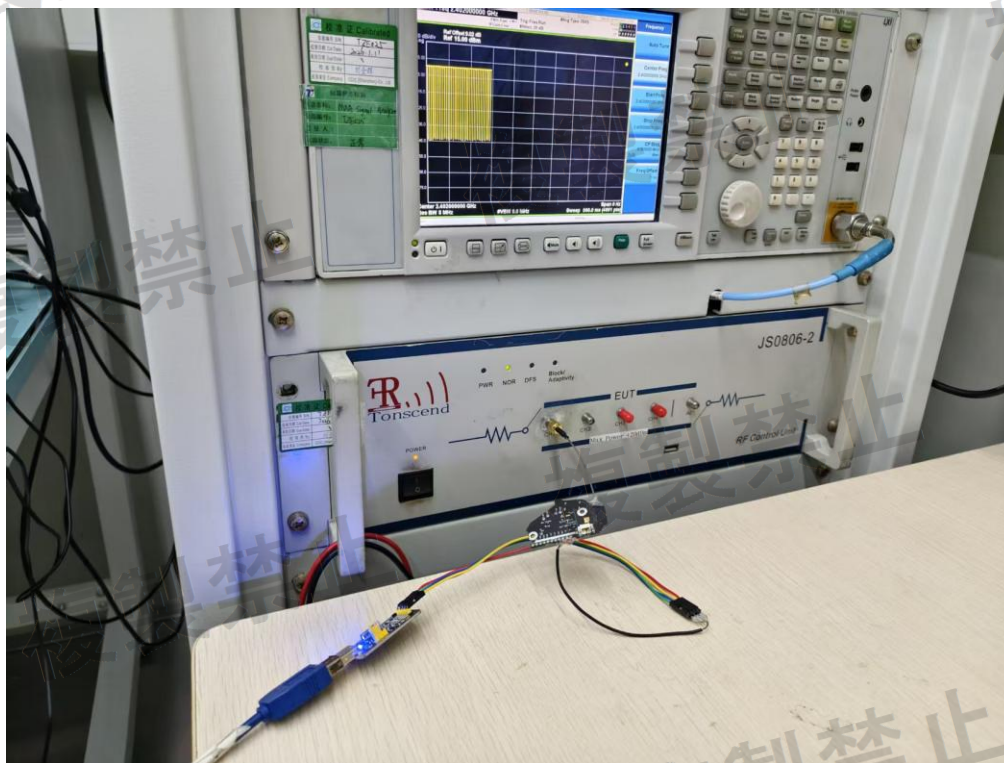



6. External and Internal Photos of the EUT

External Photos



External Photo 1



External Photo 2





External Photo 3



External Photo 4





External Photo 5



External Photo 6





External Photo 7



External Photo 8





Internal Photos



Internal Photo 1




Internal Photo 2





Internal Photo 3

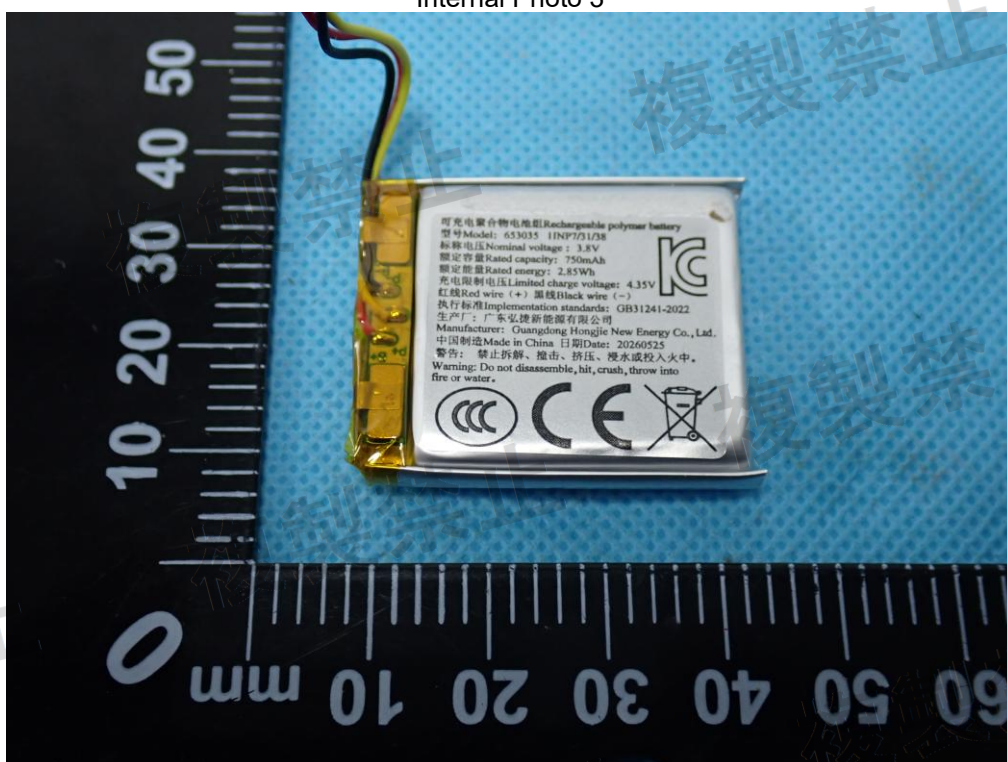


Internal Photo 4





Internal Photo 5

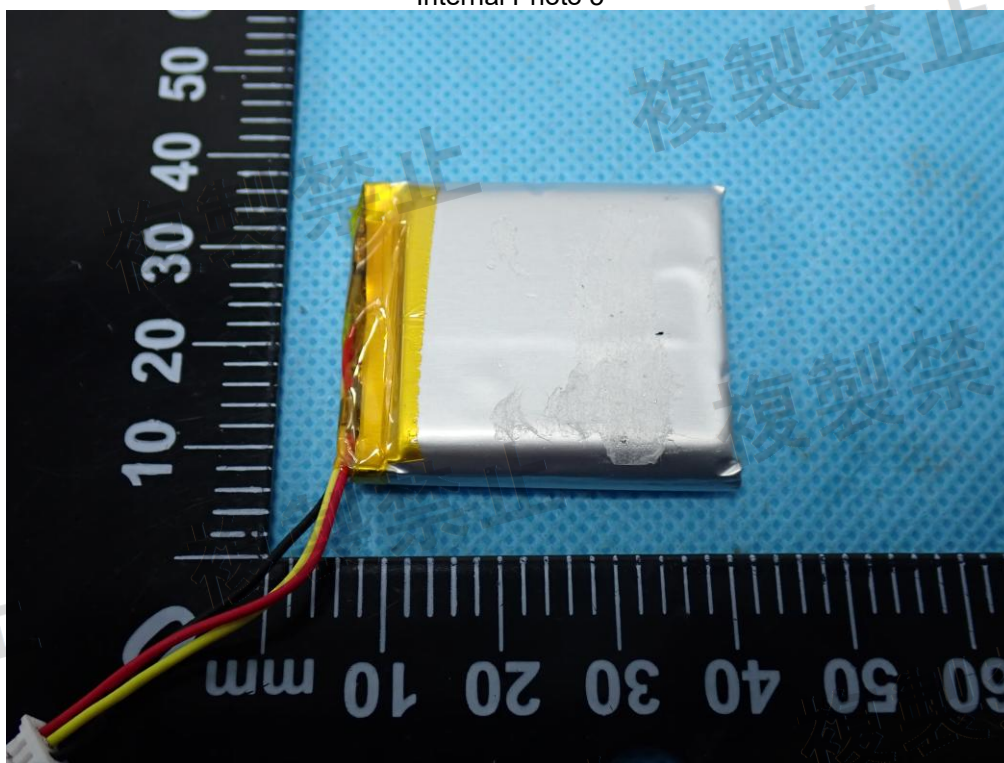


Internal Photo 6






複製禁止

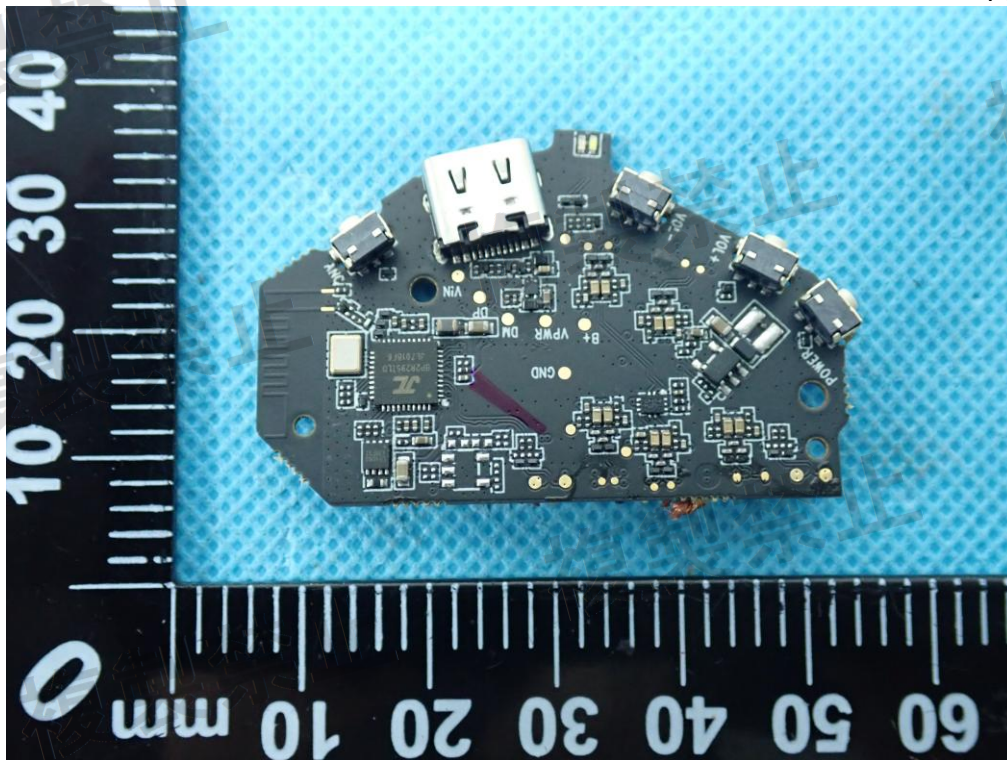


Internal Photo 7

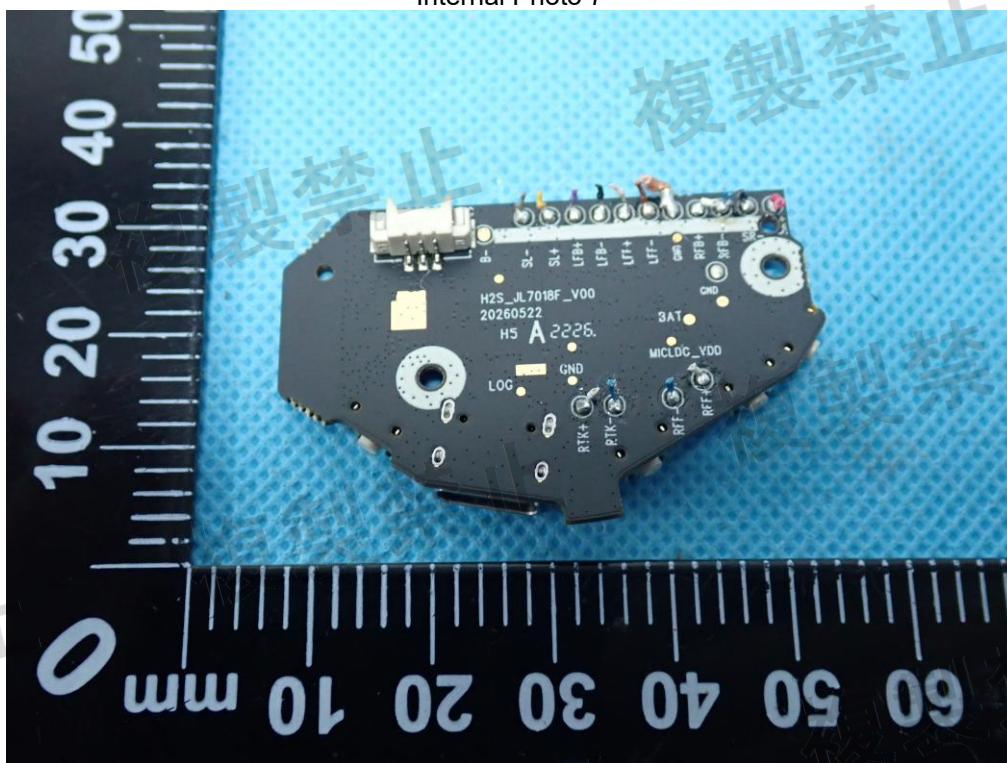

Internal Photo 8



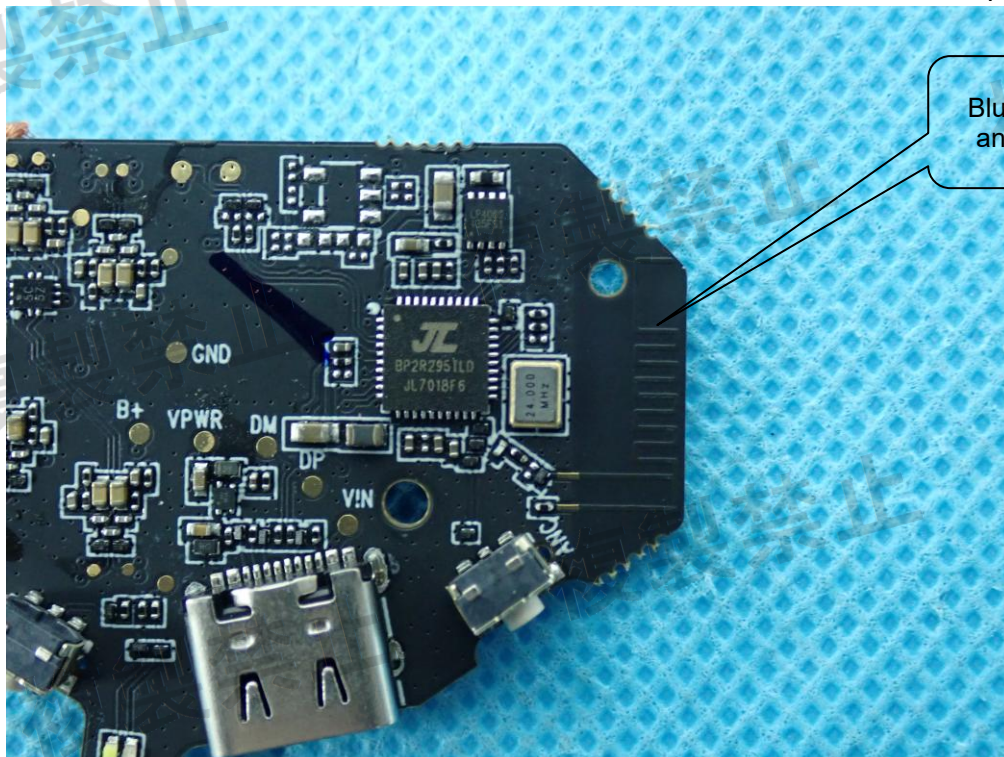

Internal Photo 9



Internal Photo 10

.....End of Report.....

