


POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

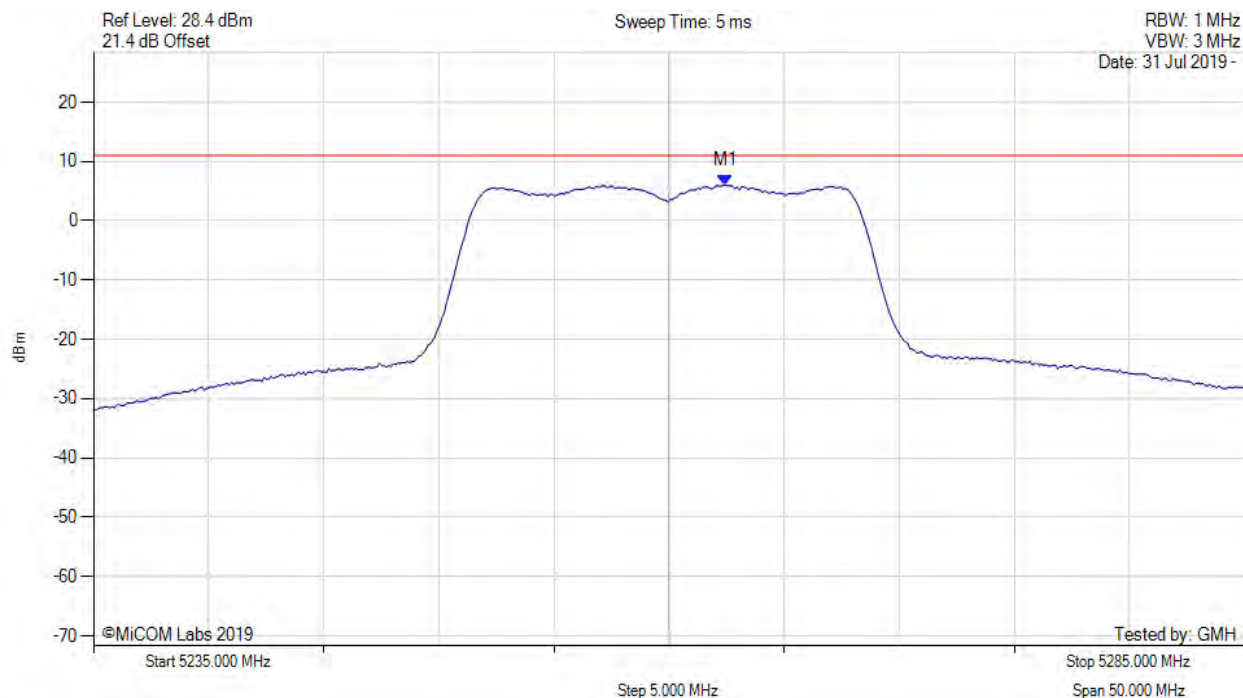


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.500 MHz : 5.981 dBm M1 + DCCF : 5262.500 MHz : 6.069 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 11.0 dBm Margin: -4.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

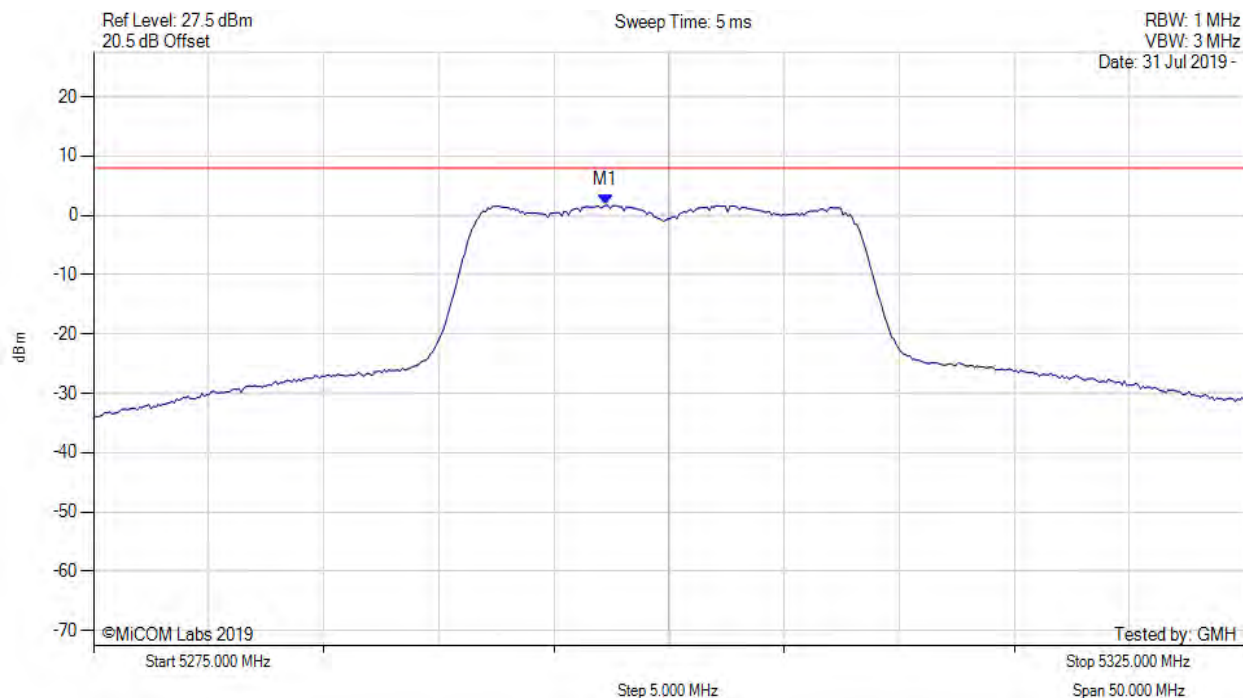


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.244 MHz : 1.679 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

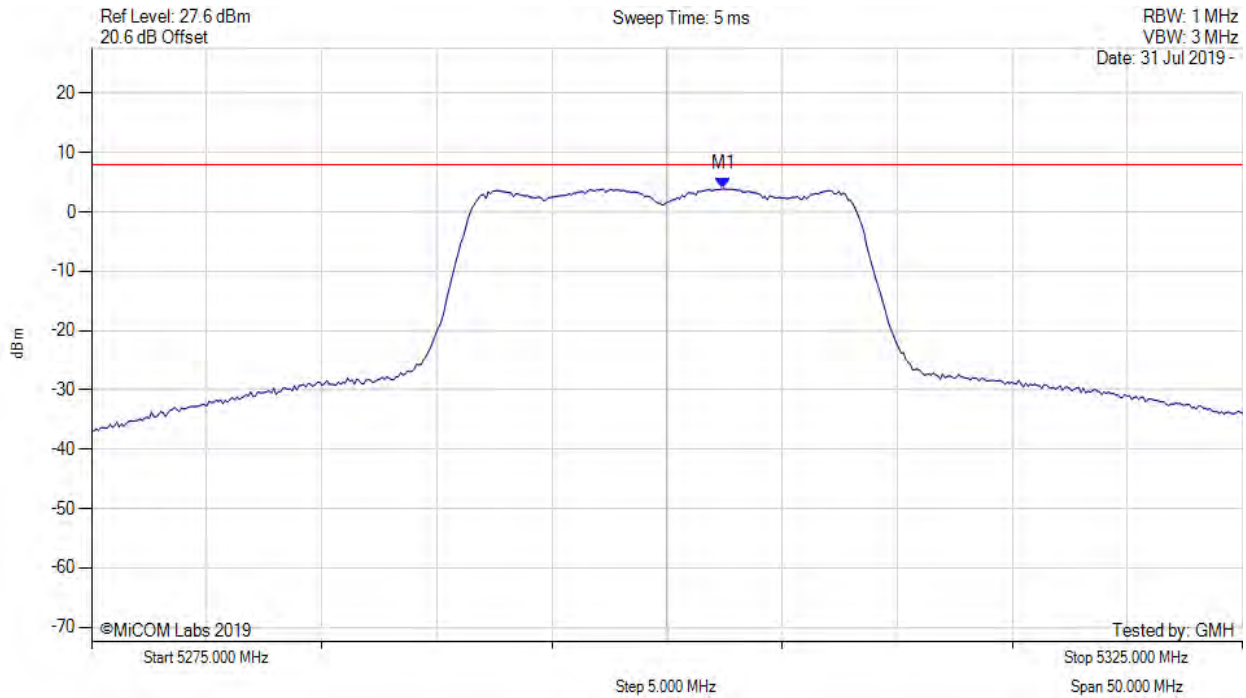


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5302.455 MHz : 3.903 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

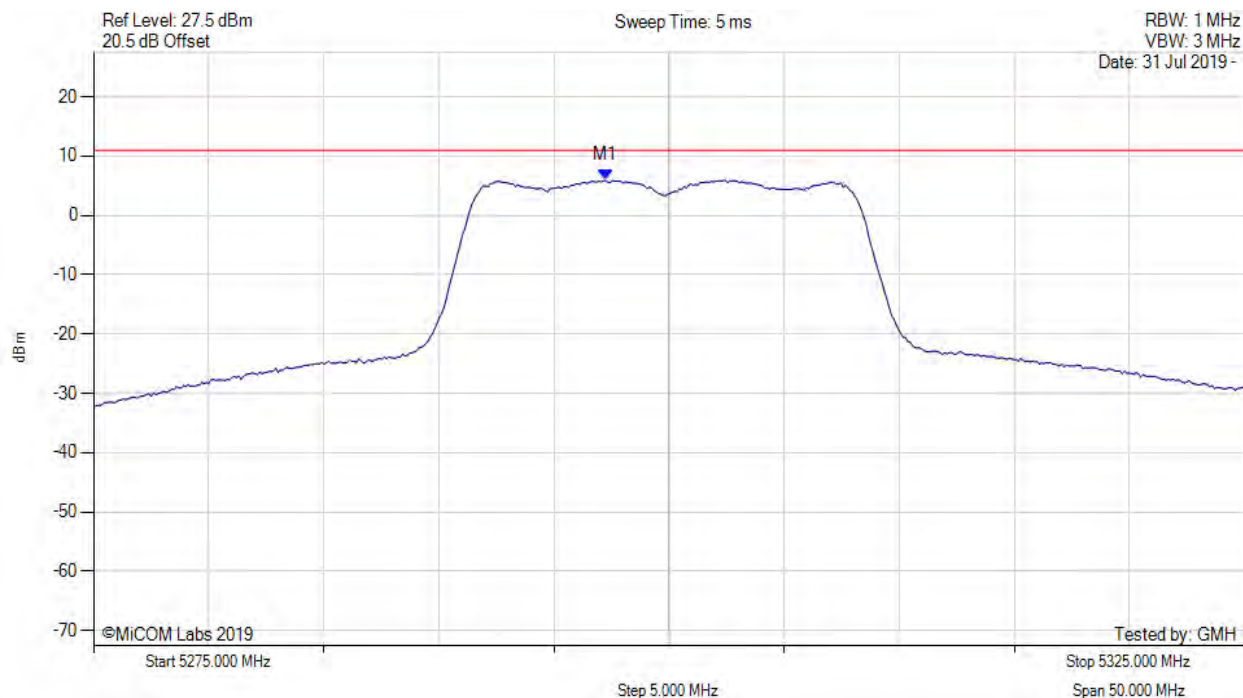


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.200 MHz : 5.924 dBm M1 + DCCF : 5297.200 MHz : 6.012 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 11.0 dBm Margin: -5.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

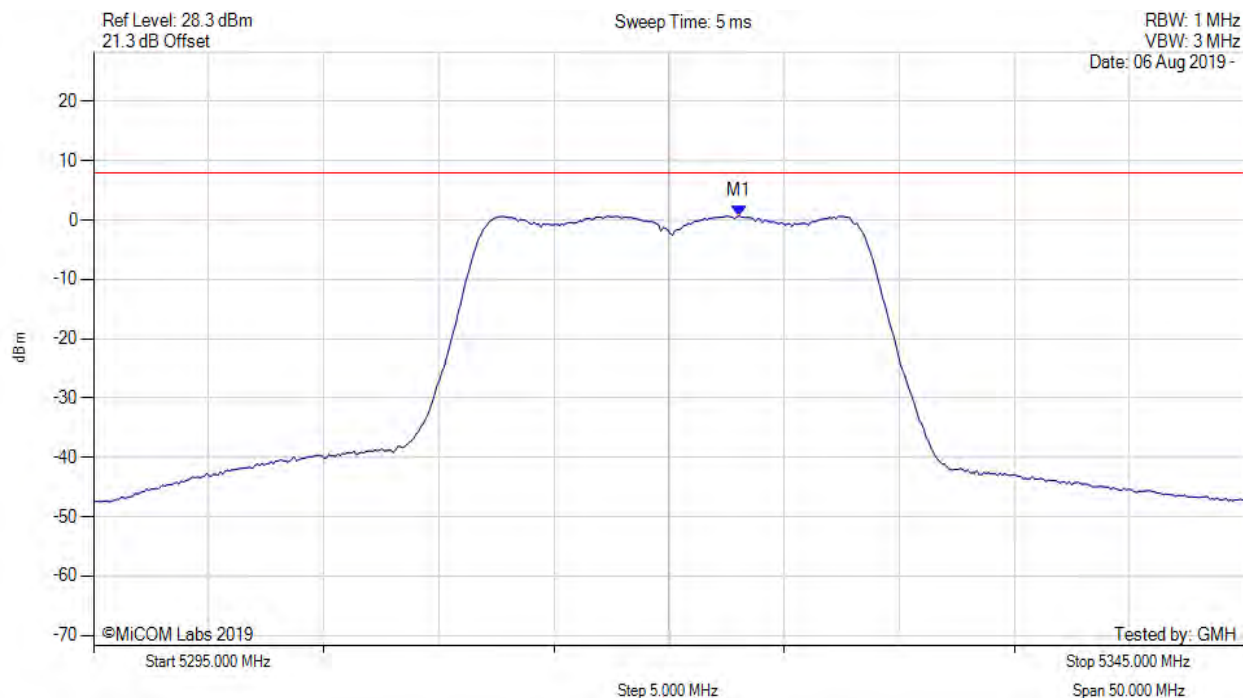


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.056 MHz : 0.709 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

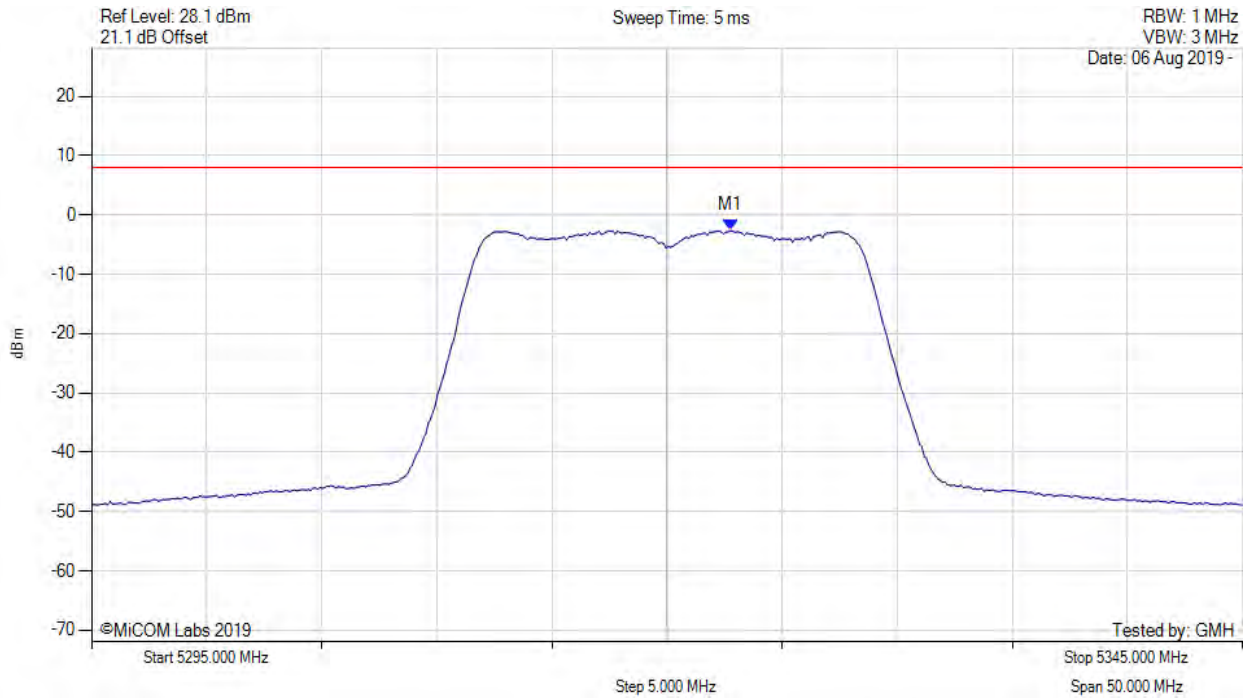


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.756 MHz : -2.624 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

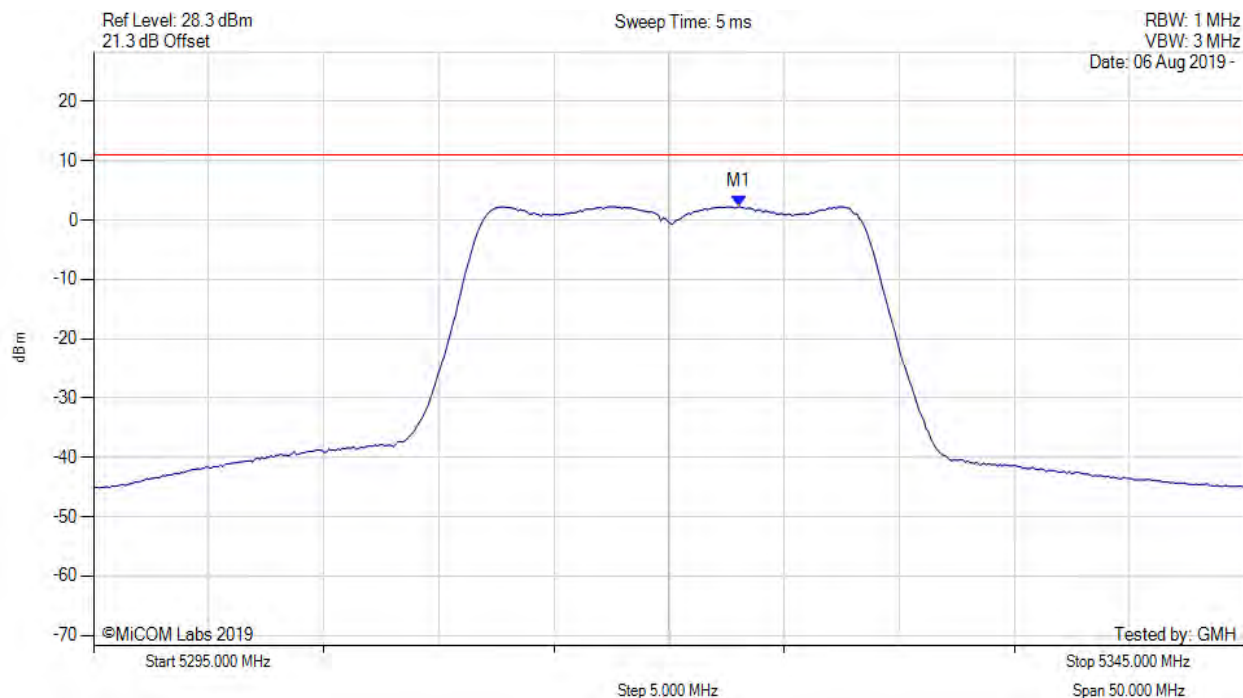


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.100 MHz : 2.306 dBm M1 + DCCF : 5323.100 MHz : 2.394 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 11.0 dBm Margin: -8.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

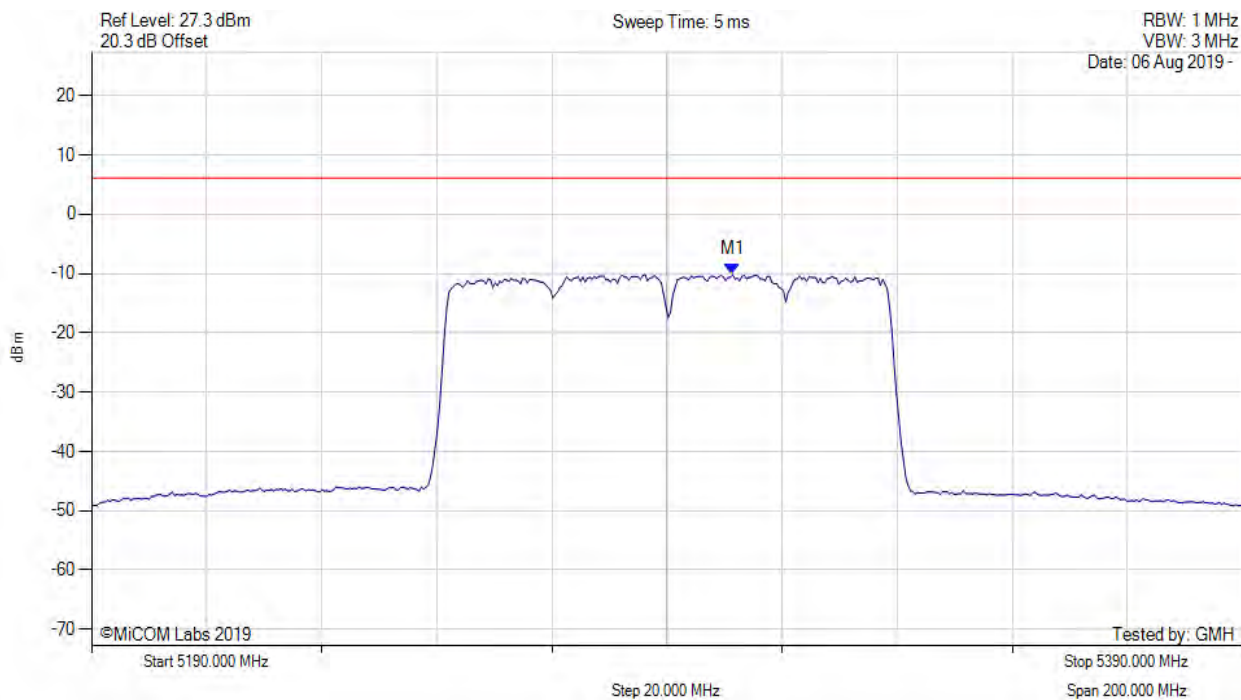


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.423 MHz : -10.181 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

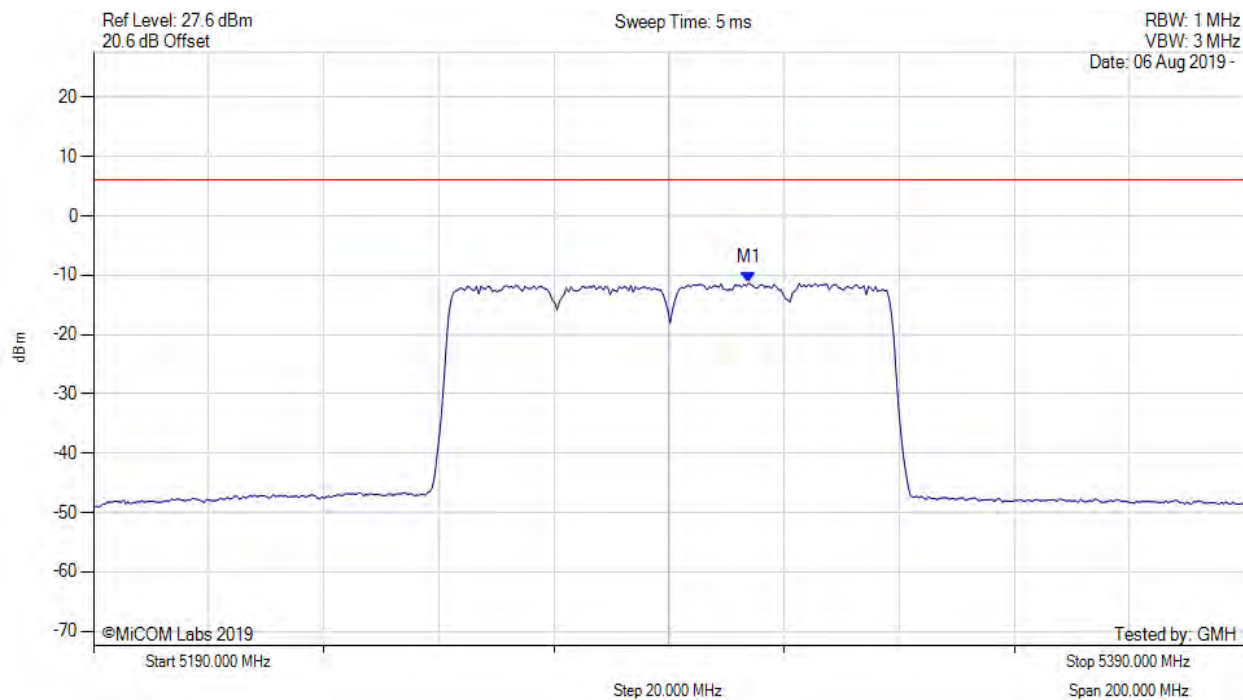


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.828 MHz : -11.284 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

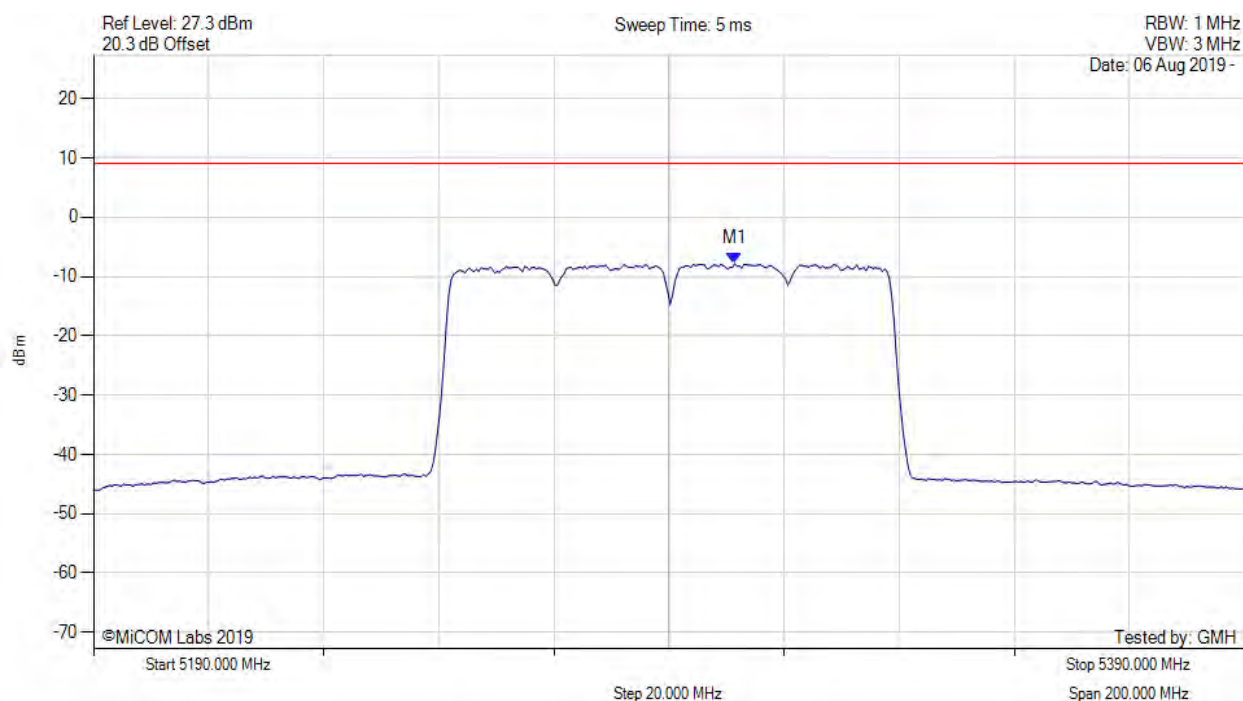


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.400 MHz : -7.830 dBm M1 + DCCF : 5301.400 MHz : -7.275 dBm Duty Cycle Correction Factor : +0.56 dB	Limit: ≤ 9.1 dBm Margin: -16.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

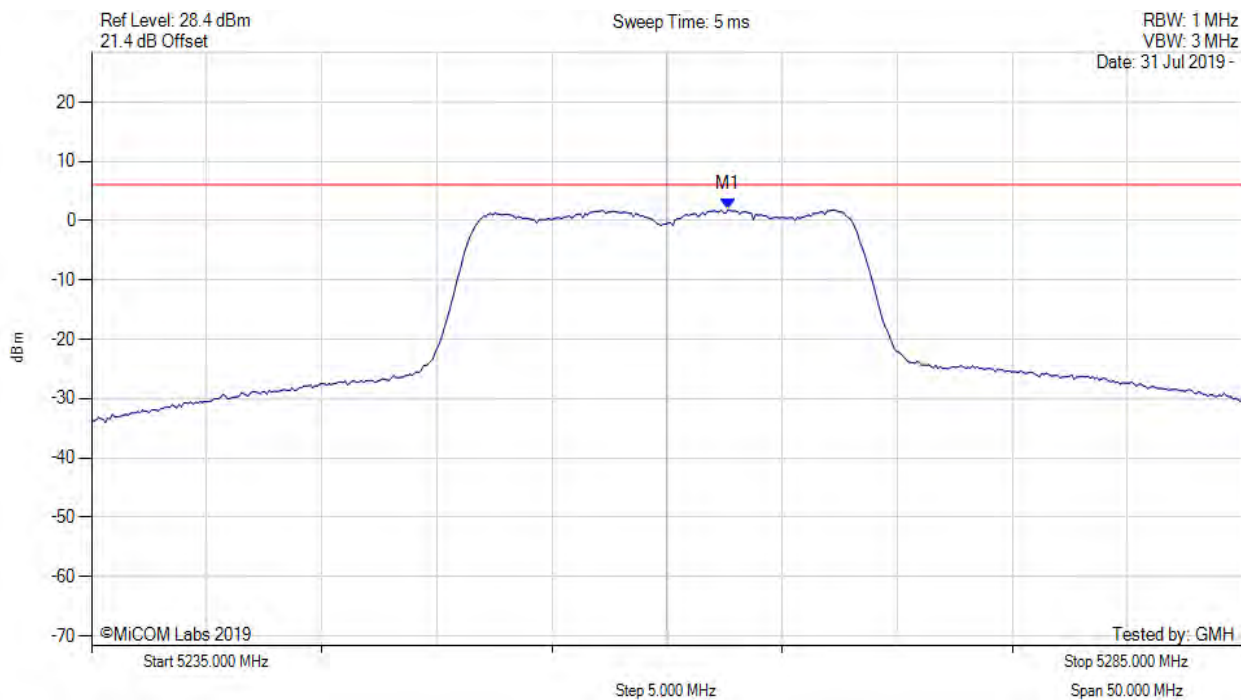


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.655 MHz : 1.875 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

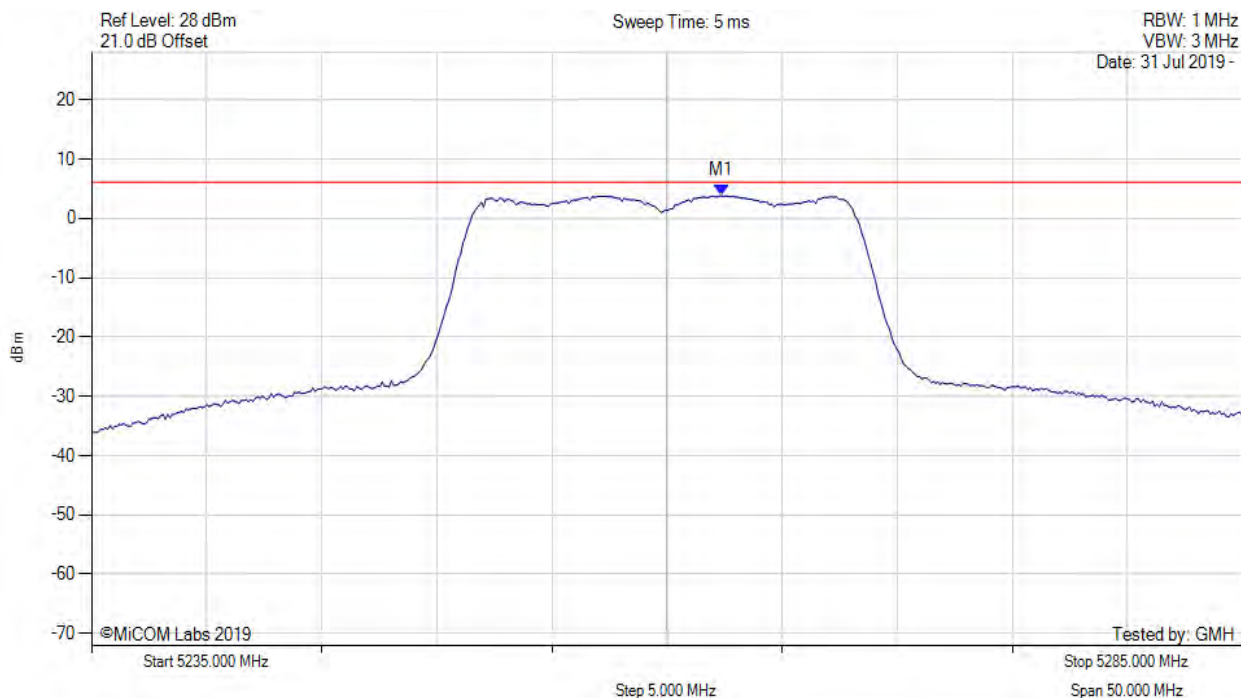


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.355 MHz : 3.812 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

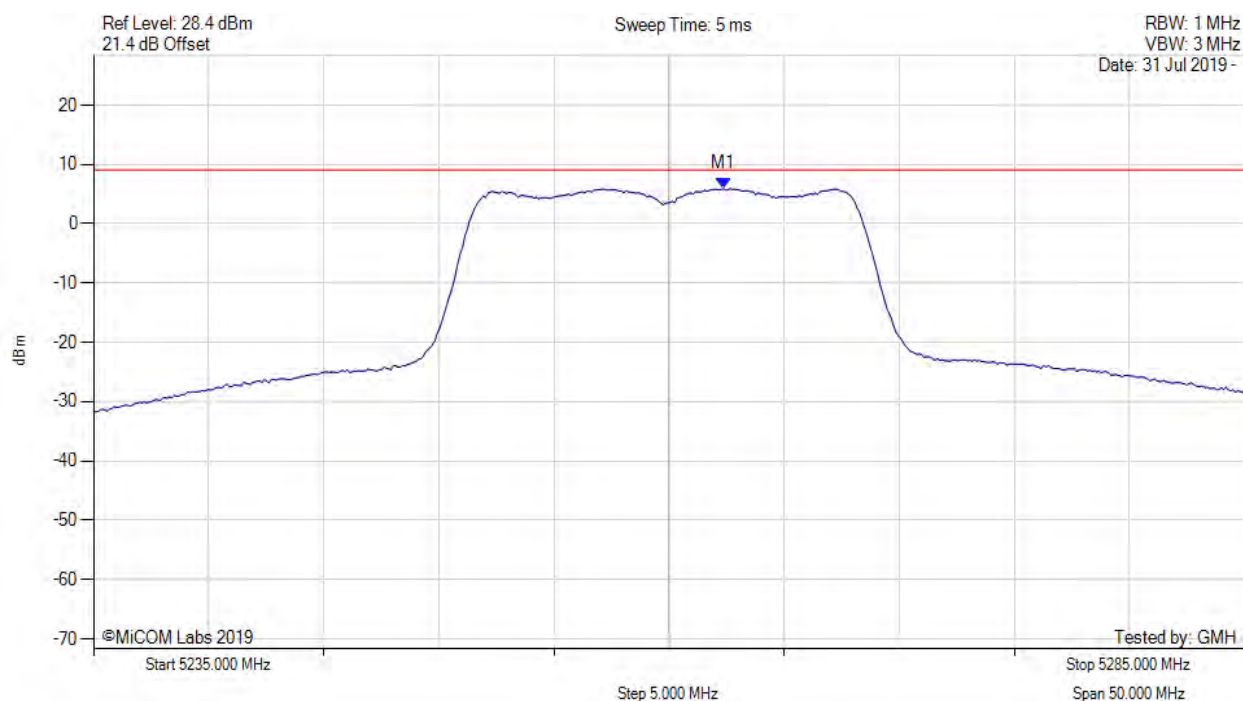


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.400 MHz : 5.930 dBm M1 + DCCF : 5262.400 MHz : 6.018 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -3.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

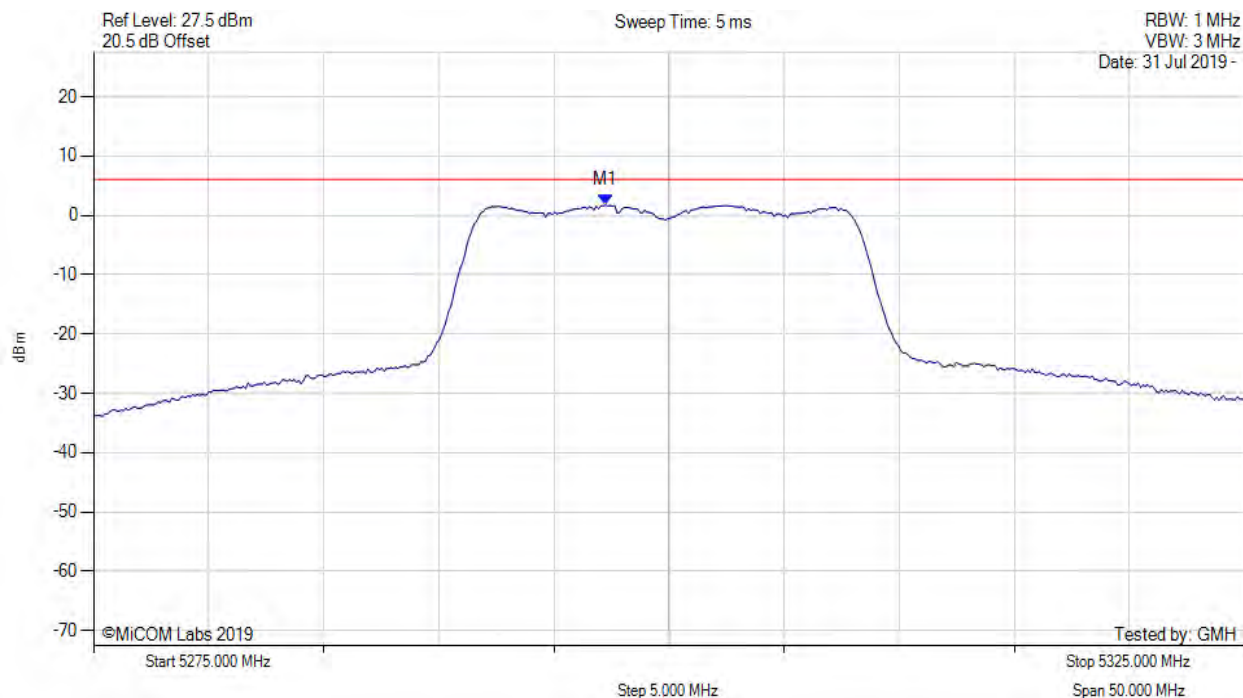


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.244 MHz : 1.744 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

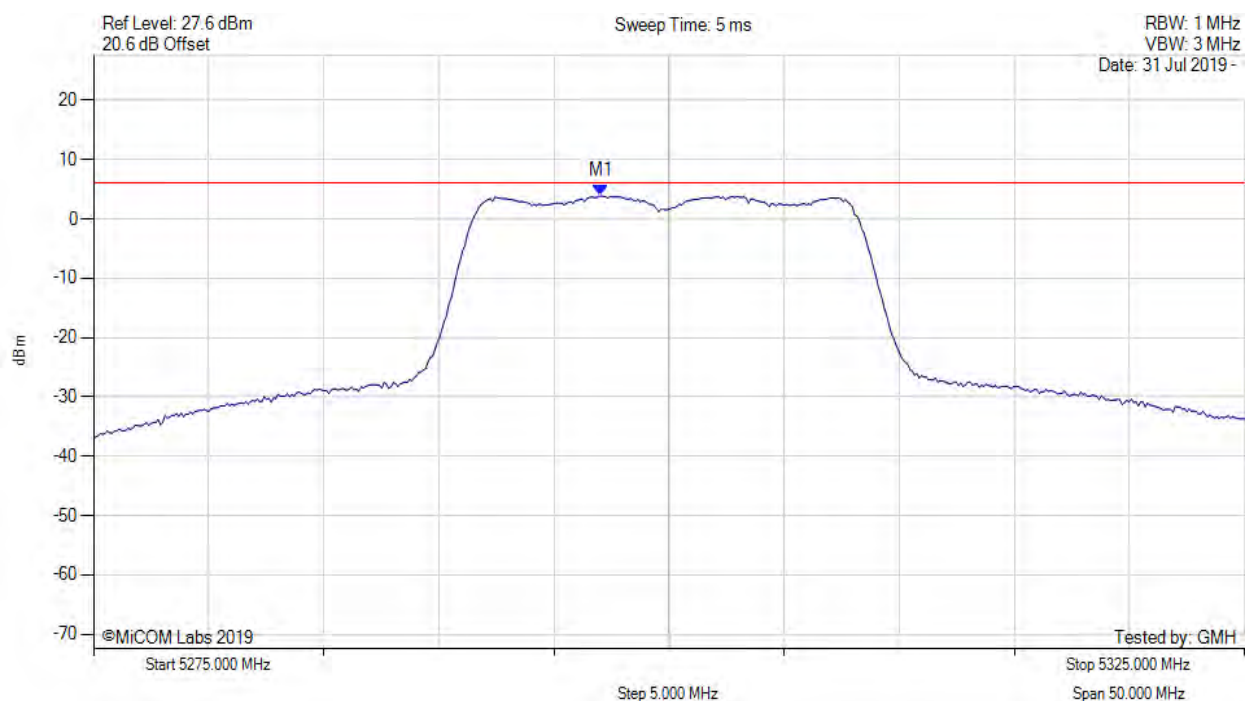


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.044 MHz : 3.890 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

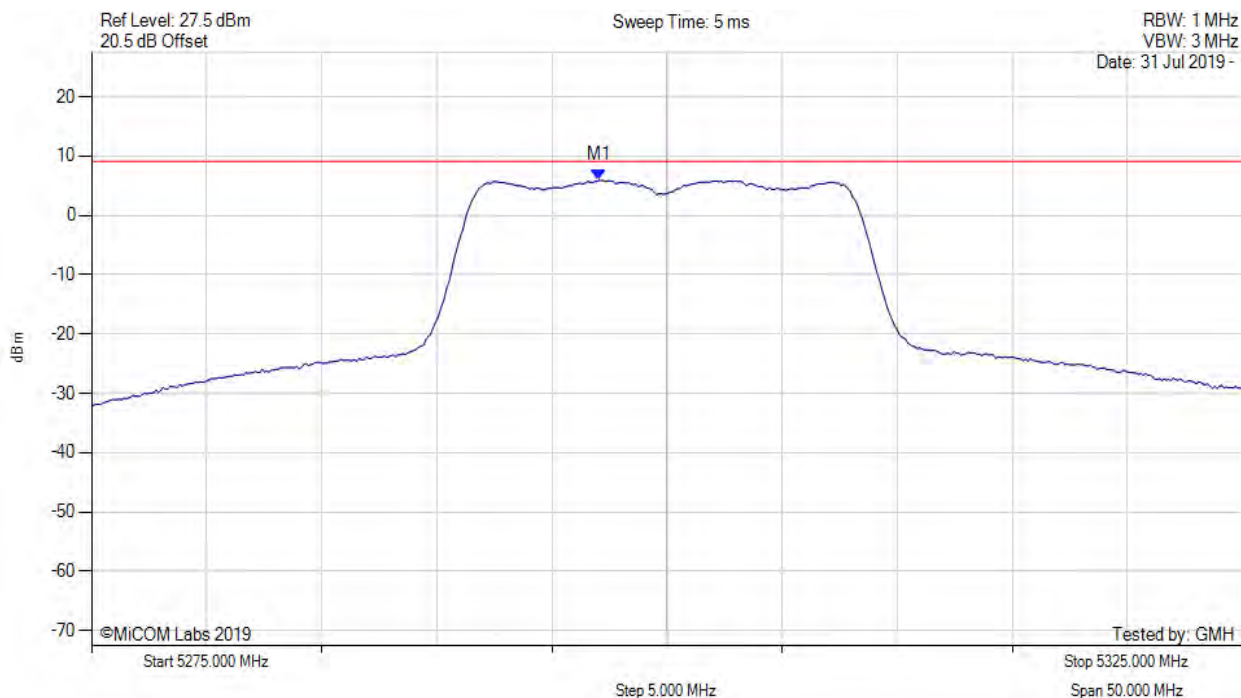


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.000 MHz : 5.914 dBm M1 + DCCF : 5297.000 MHz : 6.002 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -3.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

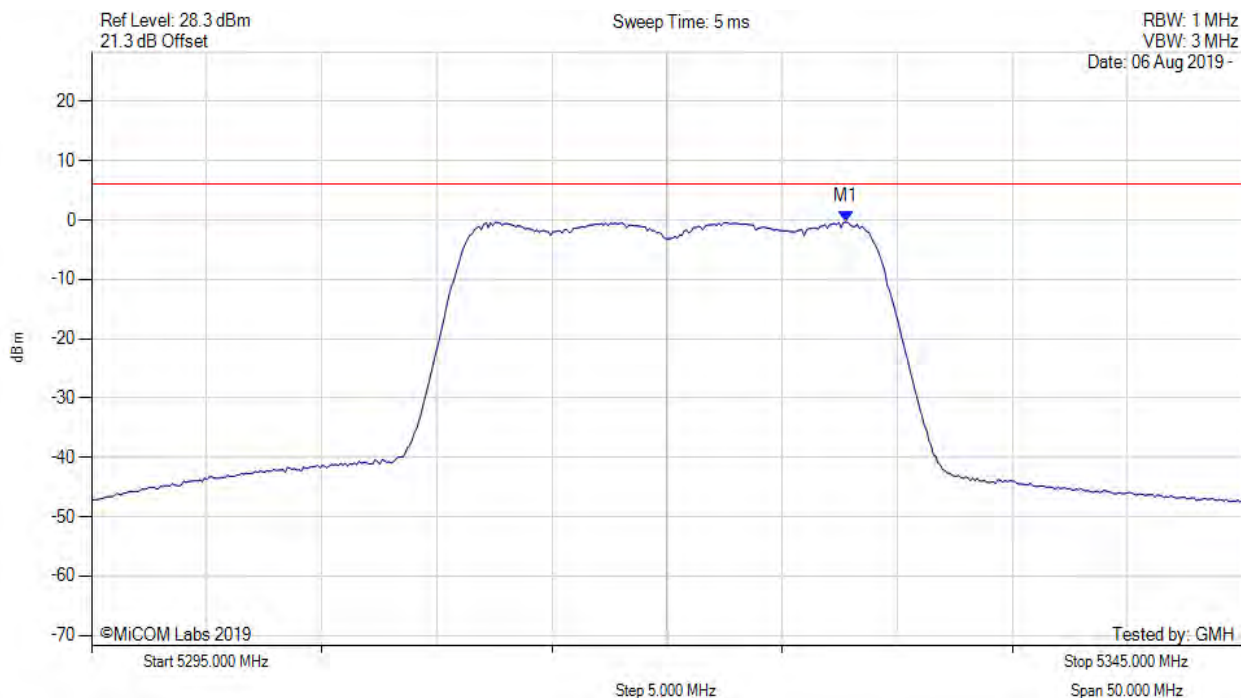


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5327.766 MHz : -0.320 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

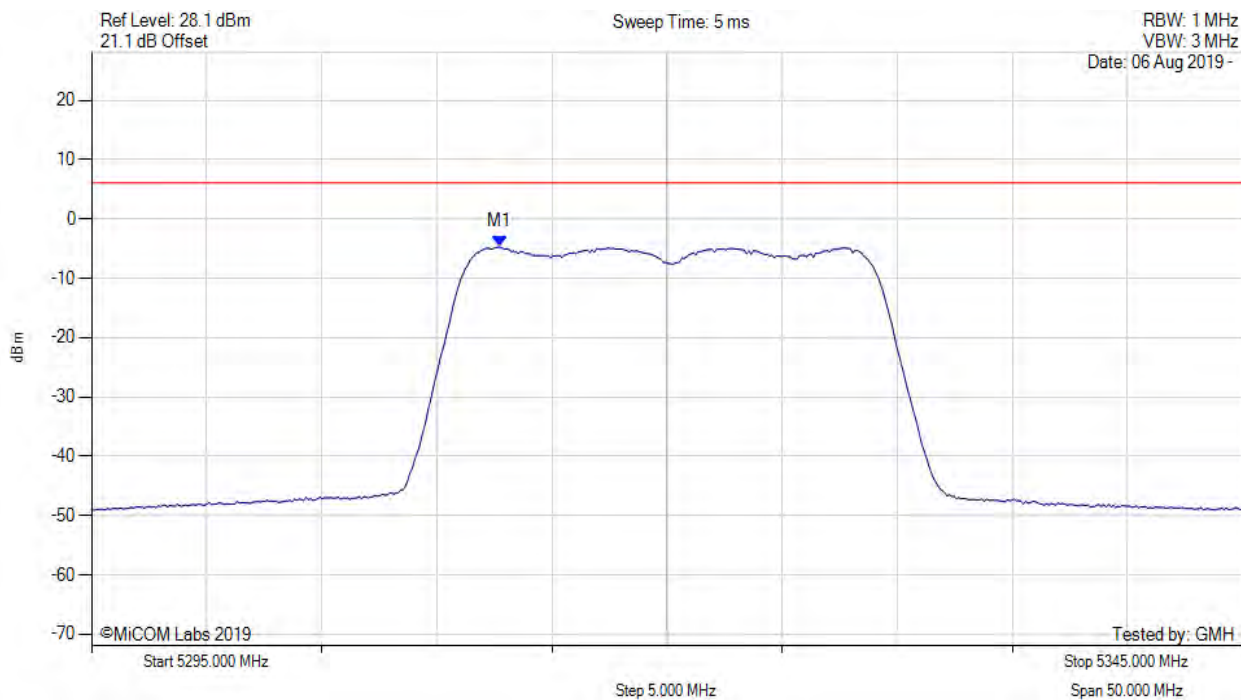


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5312.735 MHz : -4.724 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

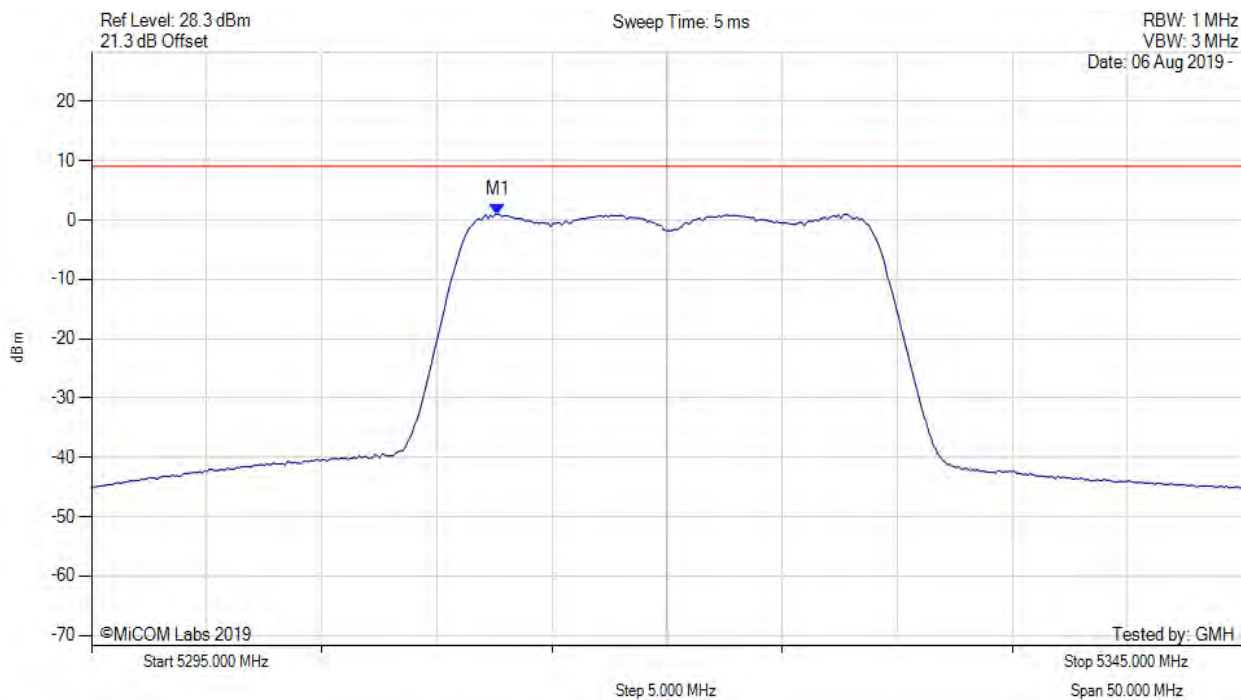


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5312.600 MHz : 1.008 dBm M1 + DCCF : 5312.600 MHz : 1.096 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -8.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

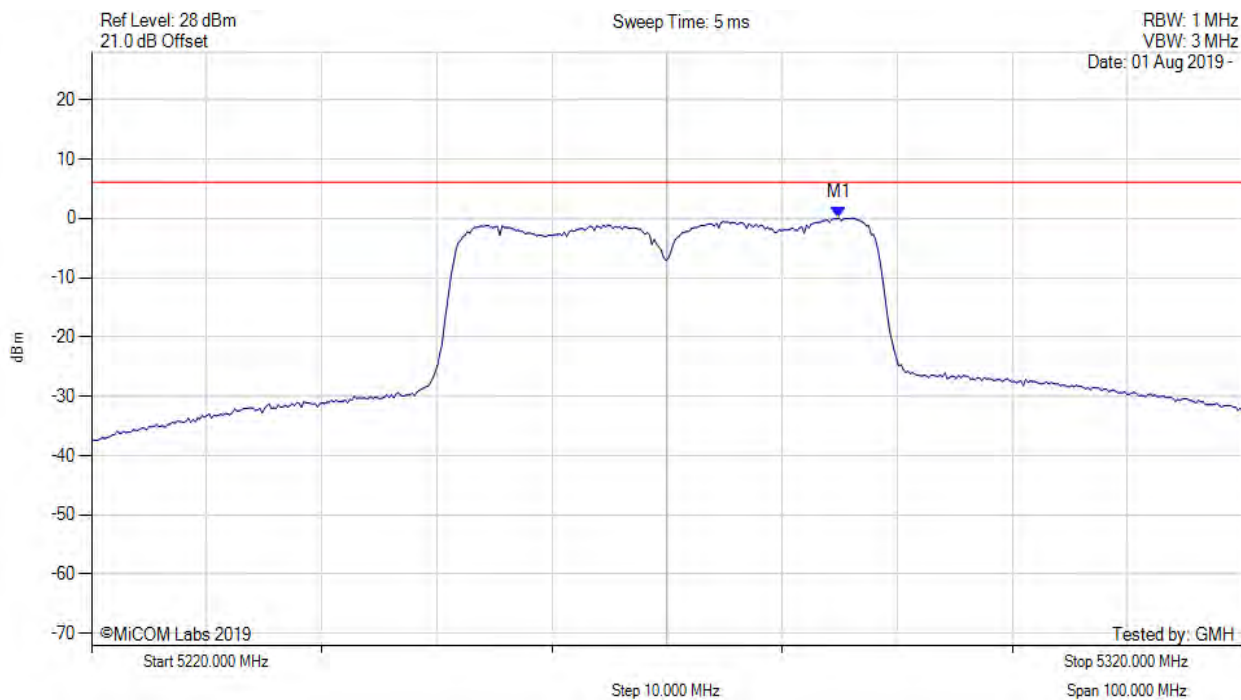


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5284.930 MHz : 0.114 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

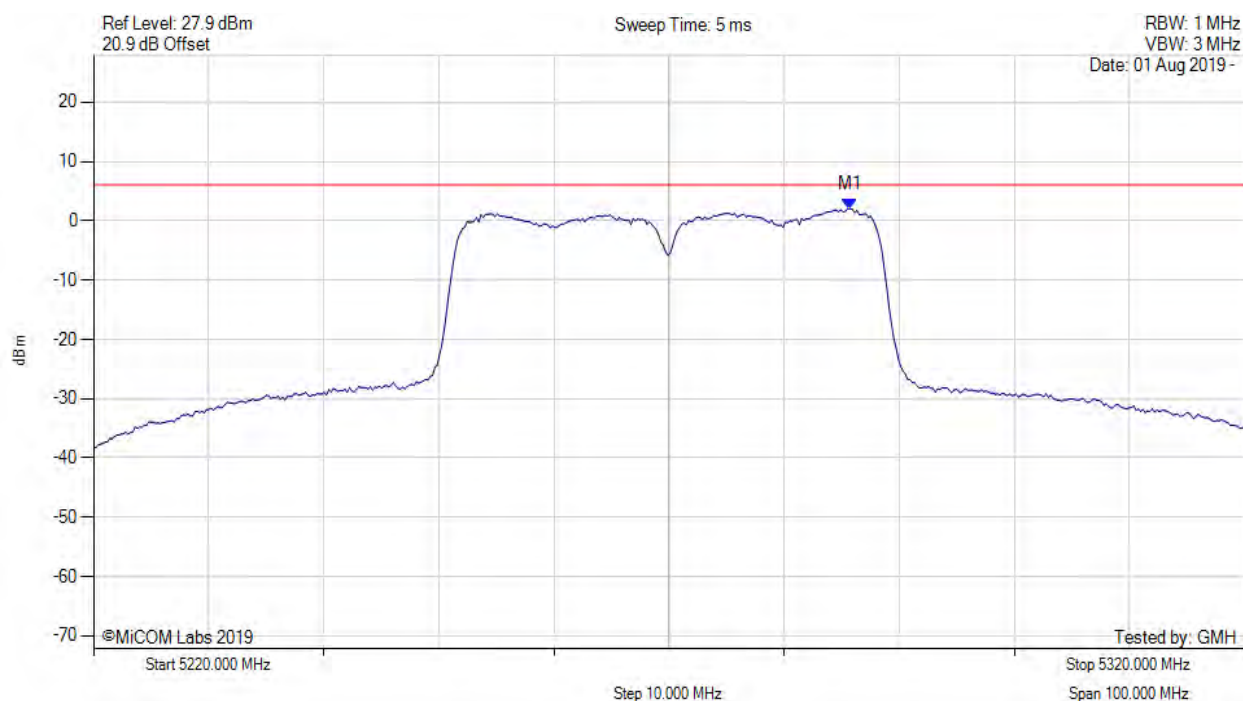


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5285.731 MHz : 2.023 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

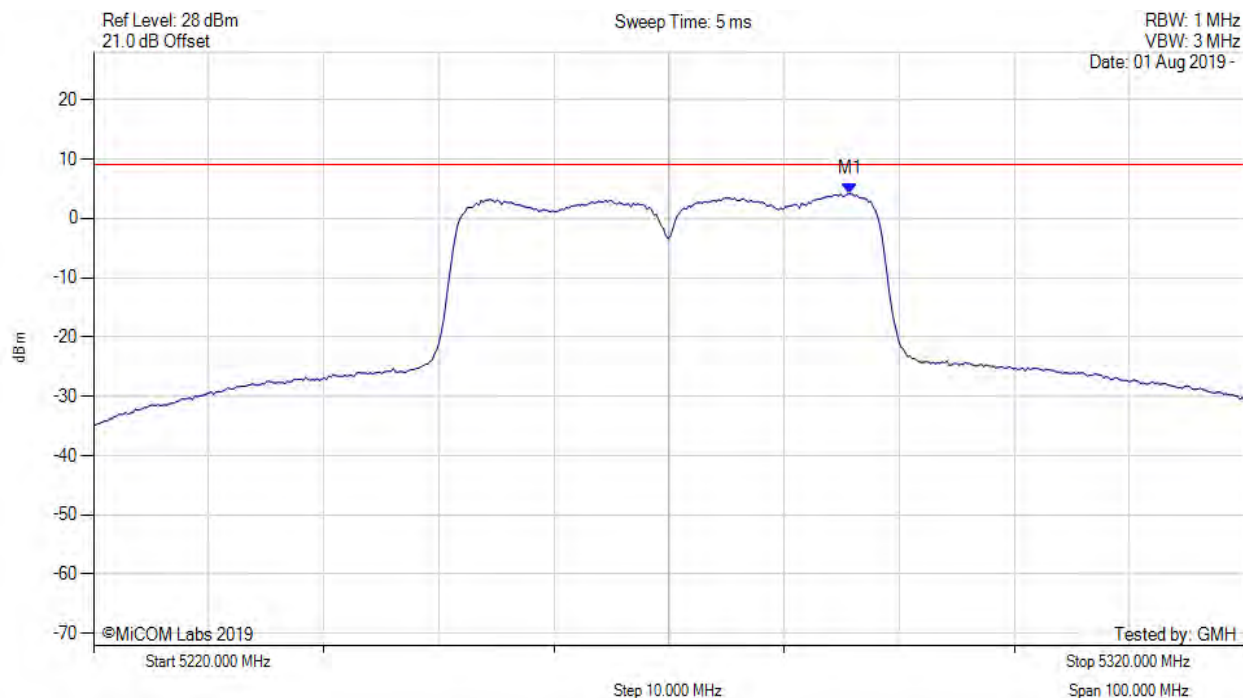


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5285.700 MHz : 4.134 dBm M1 + DCCF : 5285.700 MHz : 4.222 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -4.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

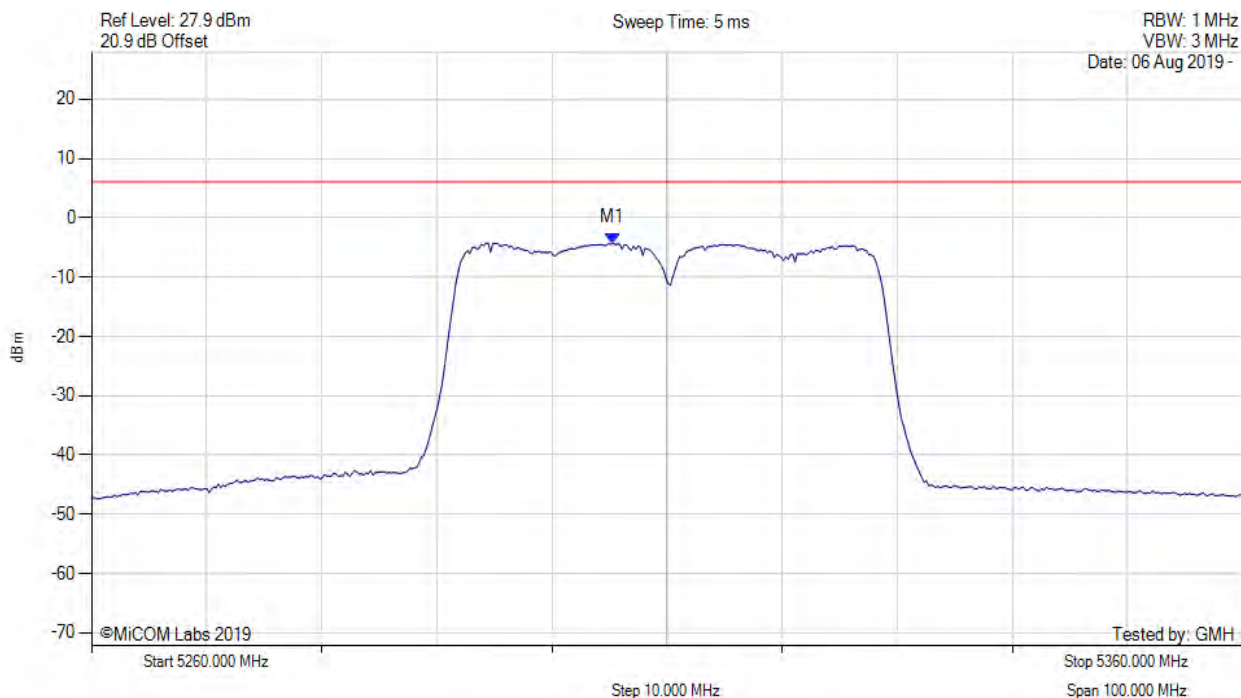


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.291 MHz : -4.252 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

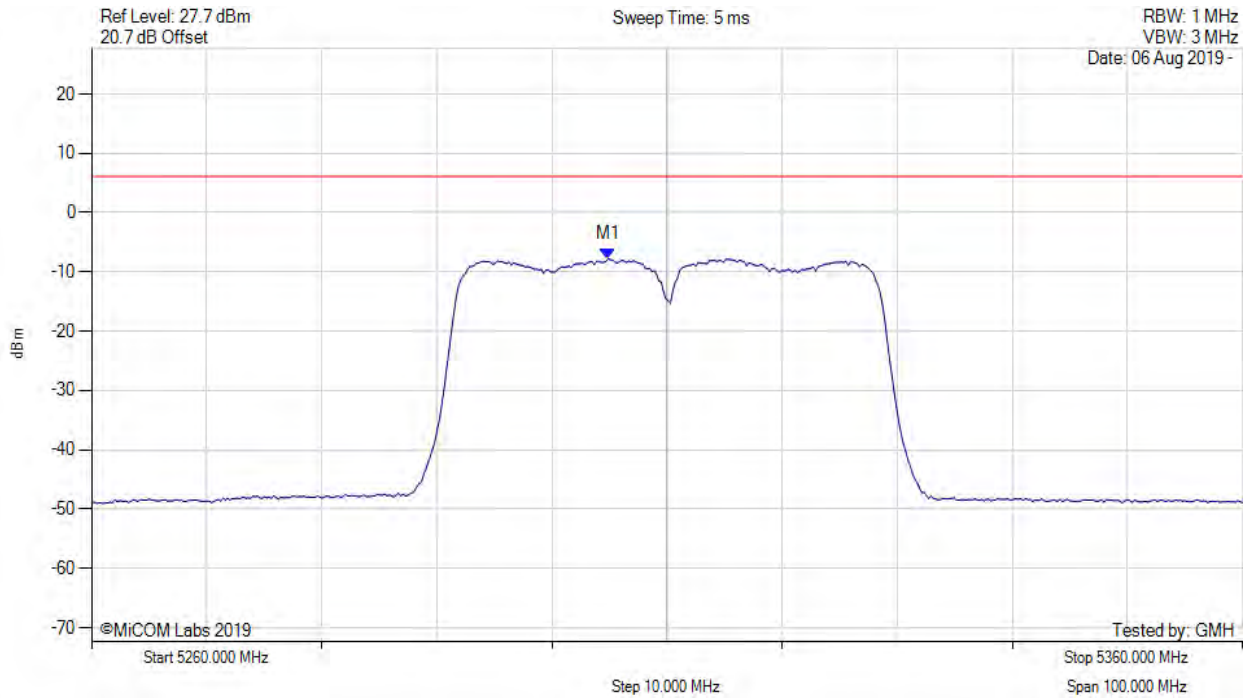


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5304.890 MHz : -7.772 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

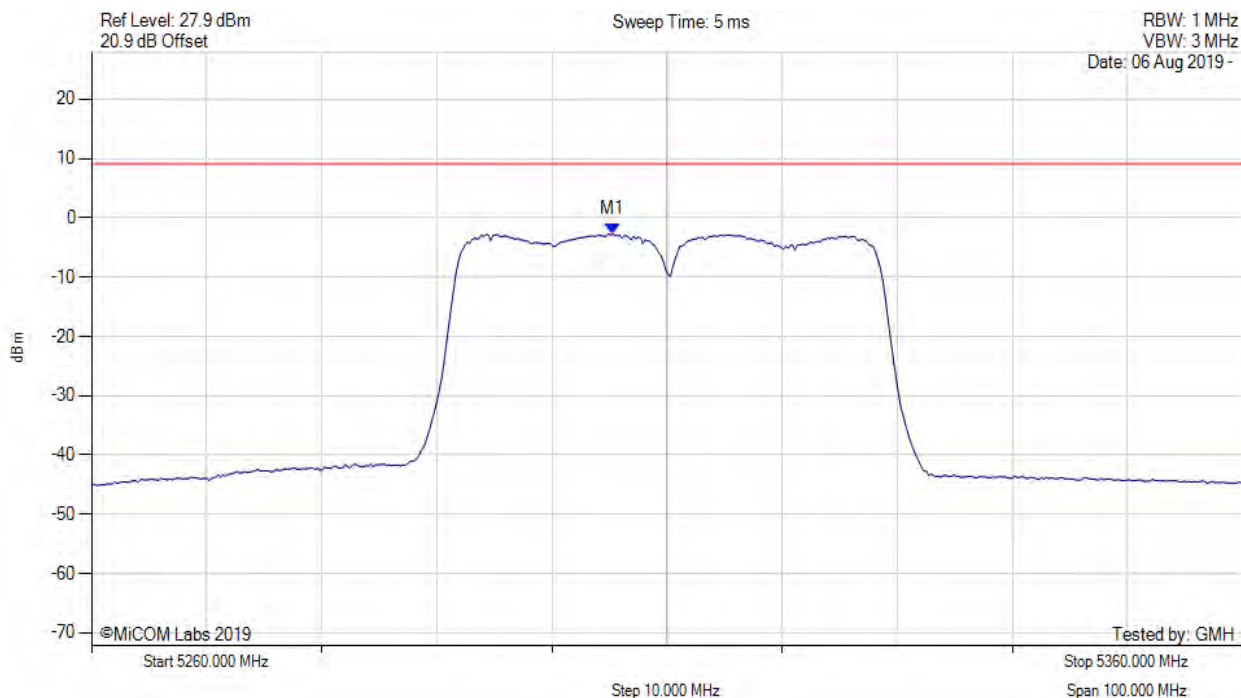


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.300 MHz : -2.720 dBm M1 + DCCF : 5305.300 MHz : -2.632 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -11.7 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

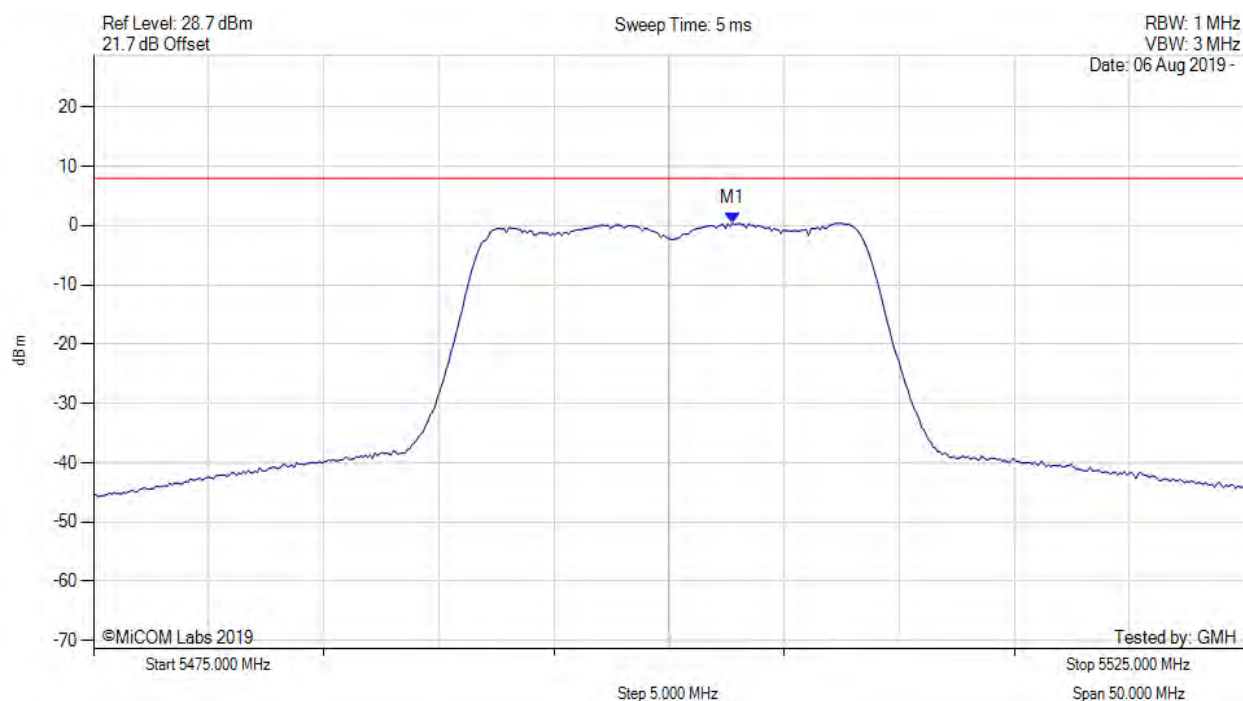


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.756 MHz : 0.395 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

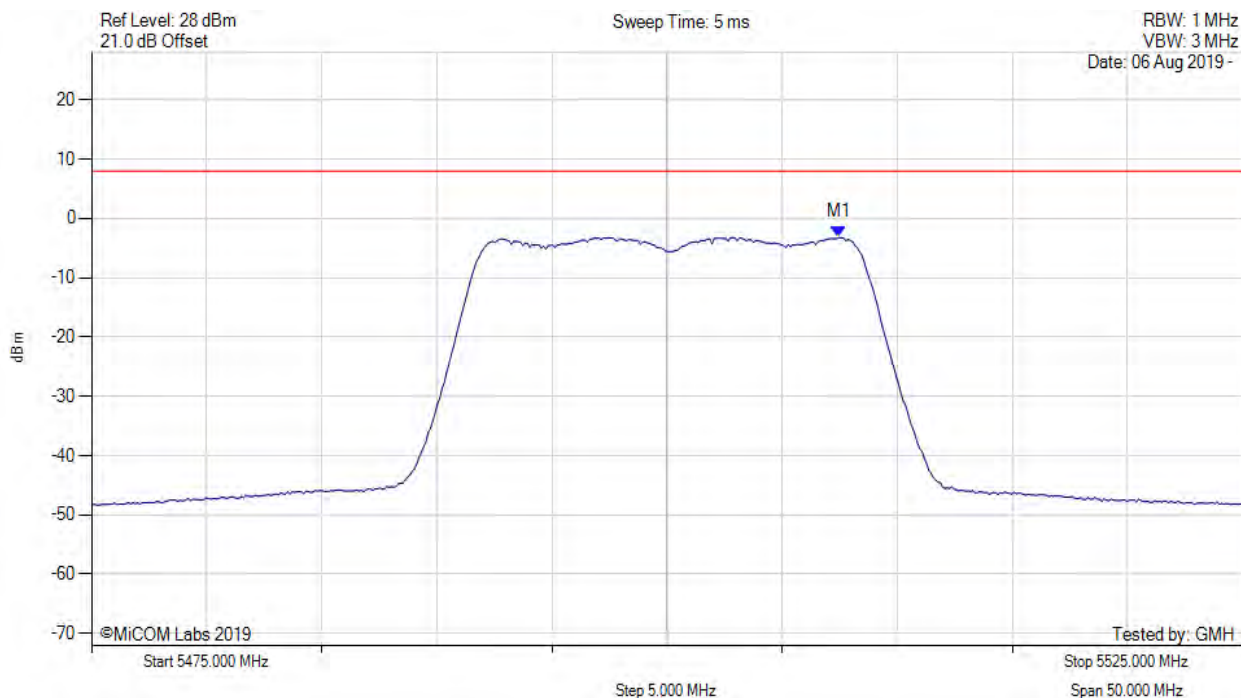


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5507.465 MHz : -3.211 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

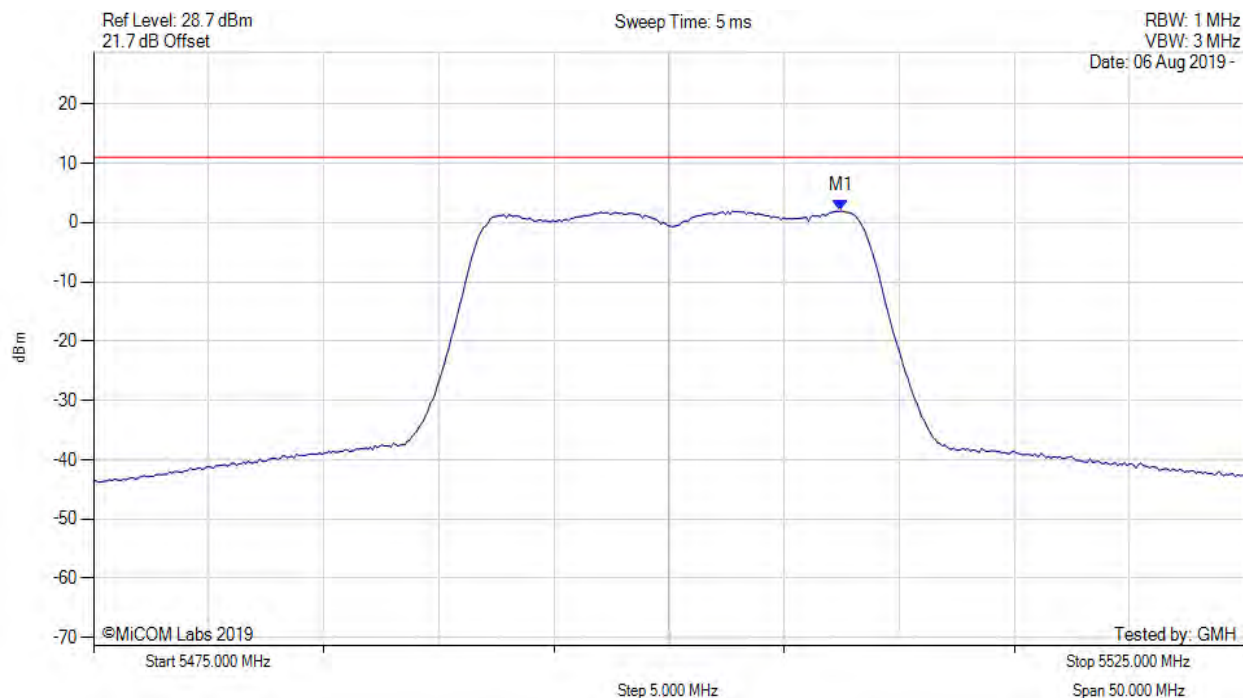


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5507.500 MHz : 1.965 dBm M1 + DCCF : 5507.500 MHz : 2.053 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 11.0 dBm Margin: -9.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

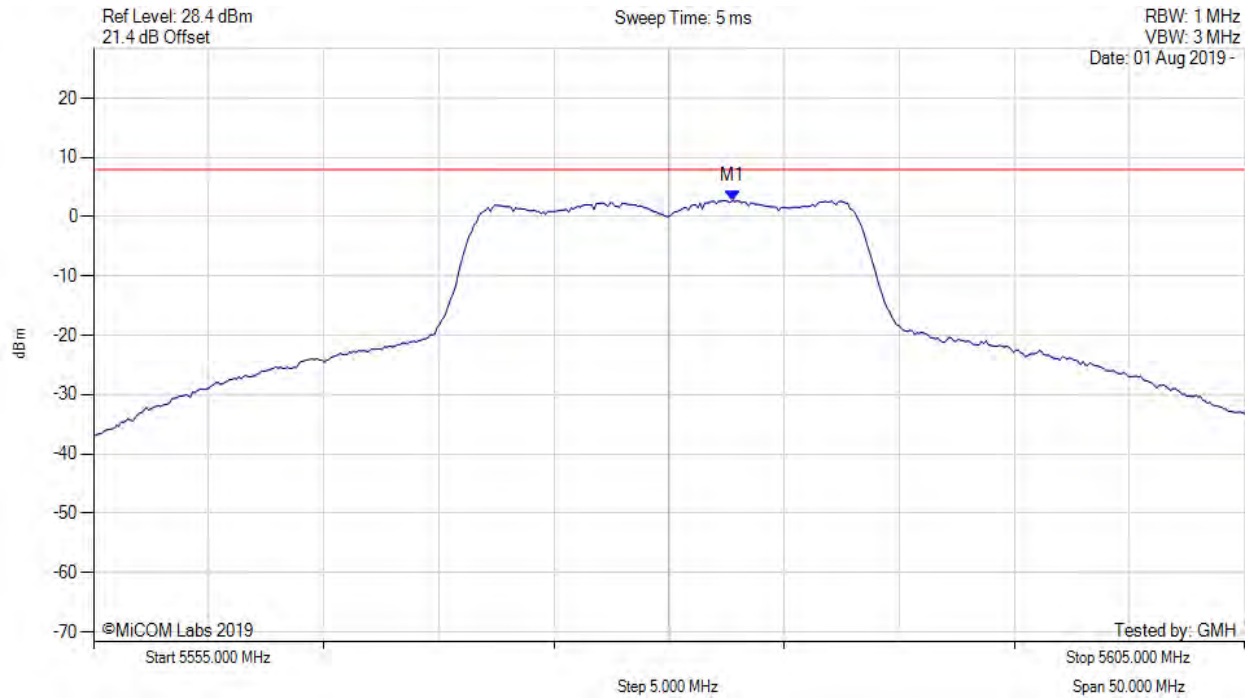


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5582.756 MHz : 2.716 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

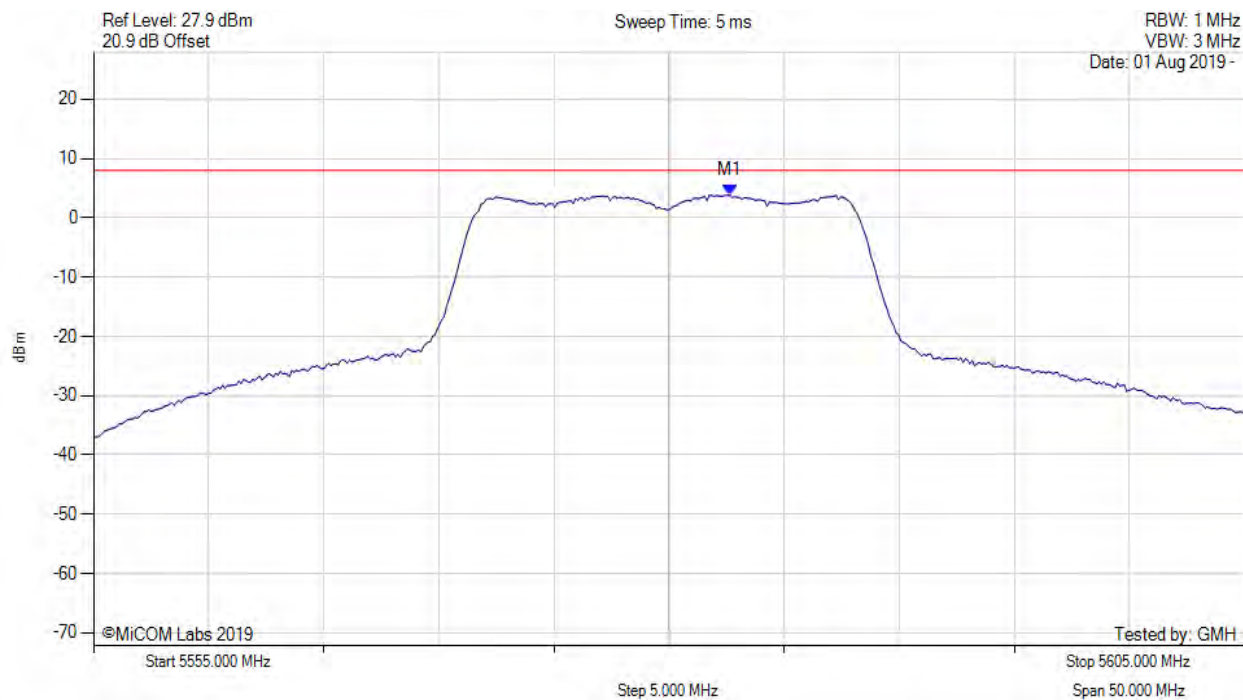

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5582.655 MHz : 3.826 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)