

16.3 使用設備及測試連接圖

For TX

儀器設備名稱	廠商名稱	型號	序號	上次校正日期	下次校正日期
Preamplifier	EMCI	012645B	980267	2017/2/29	2018/2/28
Preamplifier	EMCI	EMC02325	980217	2016/12/30	2017/12/29
Preamplifier	EMCI	EMC2654045	980030	2017/12/29	2018/12/28
Preamplifier	EMCI	EMC2654045	980030	2017/2/15	2018/2/14
Test Cable	EMCI	EMC104-SM-SM-8000	8m	2017/1/5	2018/1/4
Test Cable	EMCI	EMC104-SM-SM-800	150207	2018/1/4	2019/1/3
Test Cable	EMCI	EMC104-SM-SM-800	150207	2017/1/5	2018/1/4
Test Cable	EMCI	EEMC104-SM-SM-3000	151205	2018/1/4	2019/1/3
Test Cable	EMCI	EEMC104-SM-SM-3000	151205	2017/1/5	2018/1/4
Test Cable	EMCI	EEMC104-SM-SM-3000	151205	2018/1/4	2019/1/3
MXE EMI Receiver	Agilent	N9038A	MY55420127	2017/1/10	2018/1/9
MXE EMI Receiver	Agilent	N9038A	MY55420127	2018/1/9	2019/1/8
Signal Analyzer	Agilent	N9010A	MY52220990	2017/2/23	2018/2/22
Loop Ant	EMCO	6502	42960	2017/11/24	2018/11/23
Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2017/2/29	2018/2/28
Horn Ant	Schwarzbeck	BBHA 9170	187	2017/12/7	2018/12/6
Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	2017/1/17	2018/1/16
5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	2017/1/17	2018/1/16


For RX

儀器設備名稱	廠商名稱	型號	序號	上次校正日期	下次校正日期
Preamplifier	EMCI	012645B	980267	2018/4/15	2019/4/14
Preamplifier	EMCI	EMC02325	980217	2018/4/15	2019/4/14
Preamplifier	EMCI	EMC2654045	980030	2018/4/15	2019/4/14
Test Cable	EMCI	EMC104-SM-SM-8000	8m	2018/4/15	2019/4/14
Test Cable	EMCI	EMC104-SM-SM-800	150207	2018/4/15	2019/4/14
Test Cable	EMCI	EEMC104-SM-SM-3000	151205	2018/4/15	2019/4/14
MXE EMI Receiver	Agilent	N9038A	MY55420127	2019/1/24	2020/1/23
Signal Analyzer	Agilent	N9010A	MY52220990	2018/5/23	2019/5/22
Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2018/5/3	2019/5/2
Horn Ant	Schwarzbeck	BBHA 9170	187	2018/8/17	2019/8/16
Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	2018/3/23	2019/3/22
5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	2018/3/23	2019/3/22


附記："N/A" 表示無序號，該測試設備為本實驗室自行設計製造。

測試系統配置說明


A 30MHz 以下使用環型天線

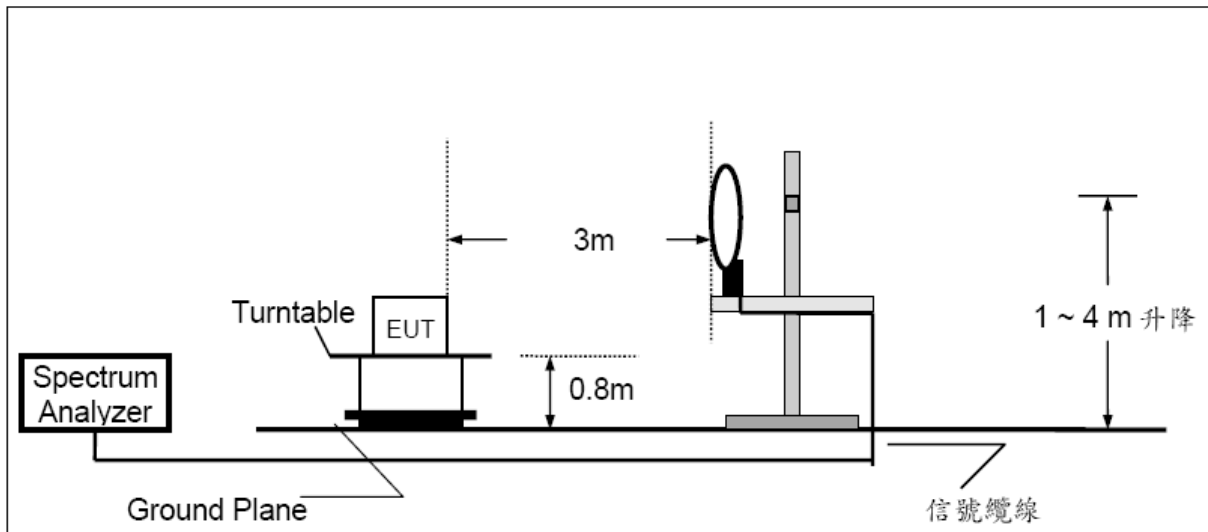

B 30-1000MHz 以上使用寬頻天線

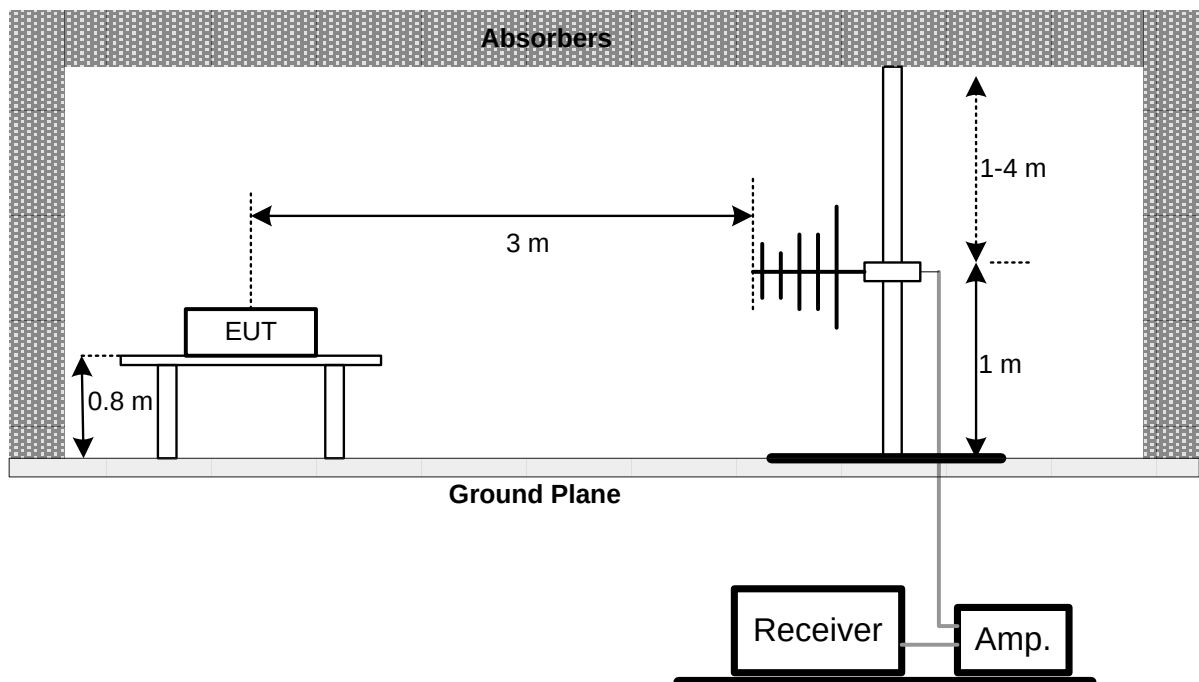


C 1000MHz 以上使用號角天線

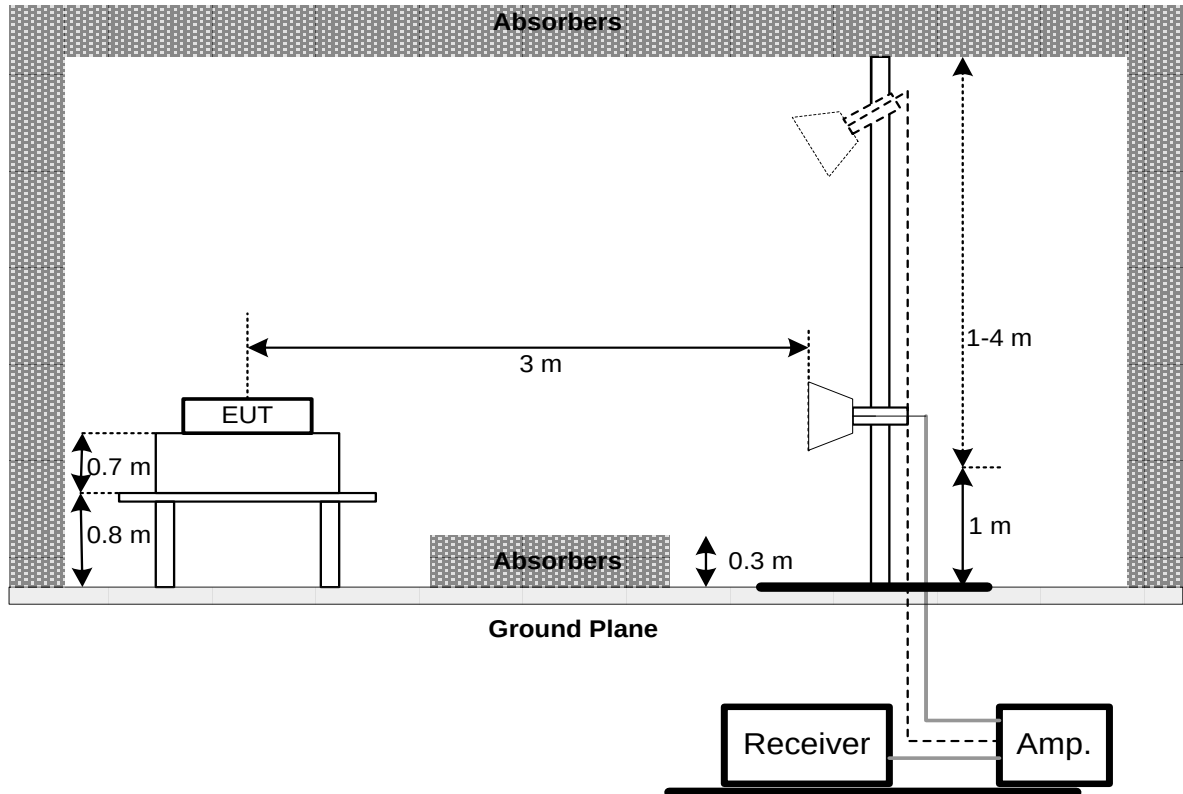

16.4 量測記錄


16.4.1 其它不必要之雜訊

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: TX_PoE
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

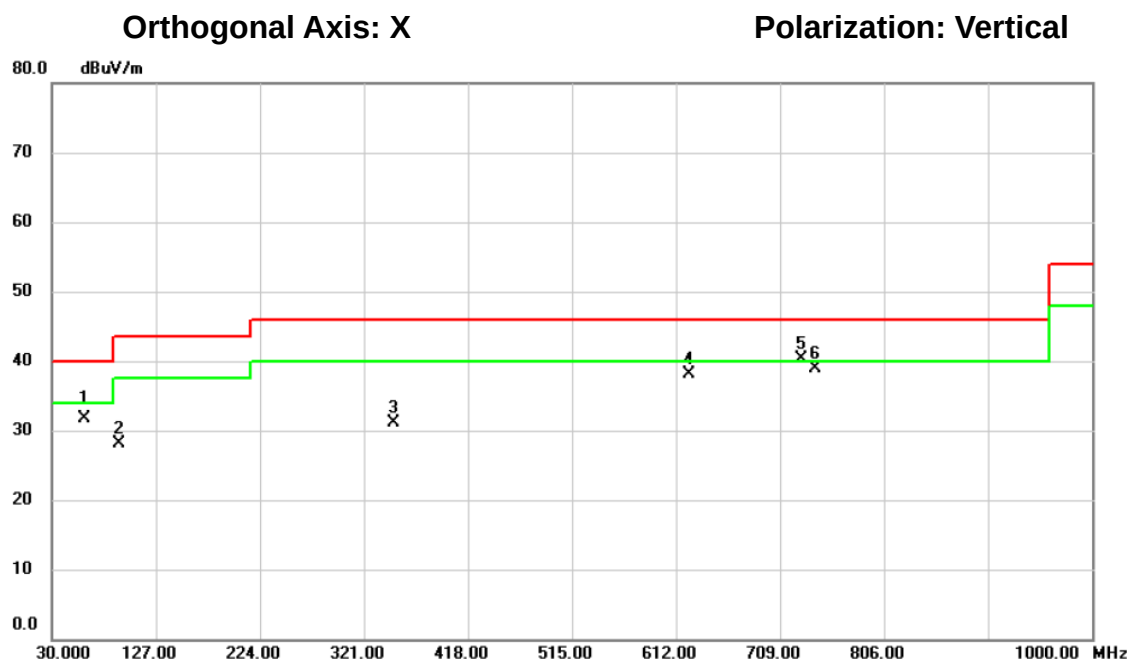

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		60.0700	39.60	-7.86	31.74	40.00	-8.26	QP	
2		92.0800	41.37	-13.17	28.20	43.50	-15.30	peak	
3		349.1300	36.76	-5.56	31.20	46.00	-14.80	peak	
4		624.6100	37.95	0.11	38.06	46.00	-7.94	peak	
5	*	729.3700	38.23	2.06	40.29	46.00	-5.71	peak	
6		741.9800	36.60	2.32	38.92	46.00	-7.08	peak	


測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: TX_PoE
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

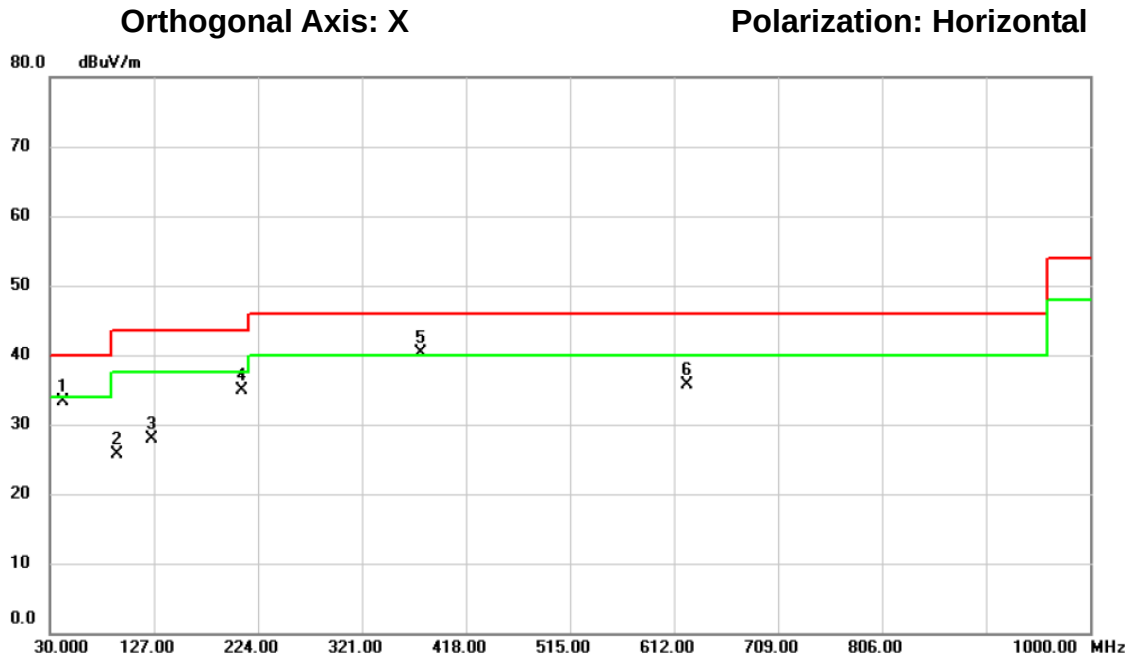

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		42.6100	41.03	-7.69	33.34	40.00	-6.66	peak	
2		92.0800	38.89	-13.17	25.72	43.50	-17.78	peak	
3		125.0600	37.30	-9.31	27.99	43.50	-15.51	peak	
4		208.4800	45.14	-10.17	34.97	43.50	-8.53	peak	
5	*	375.3200	45.13	-4.75	40.38	46.00	-5.62	peak	
6		624.6100	35.60	0.11	35.71	46.00	-10.29	peak	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C


測試模式: TX_PoE
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 107/01/09
環境濕度: 70%

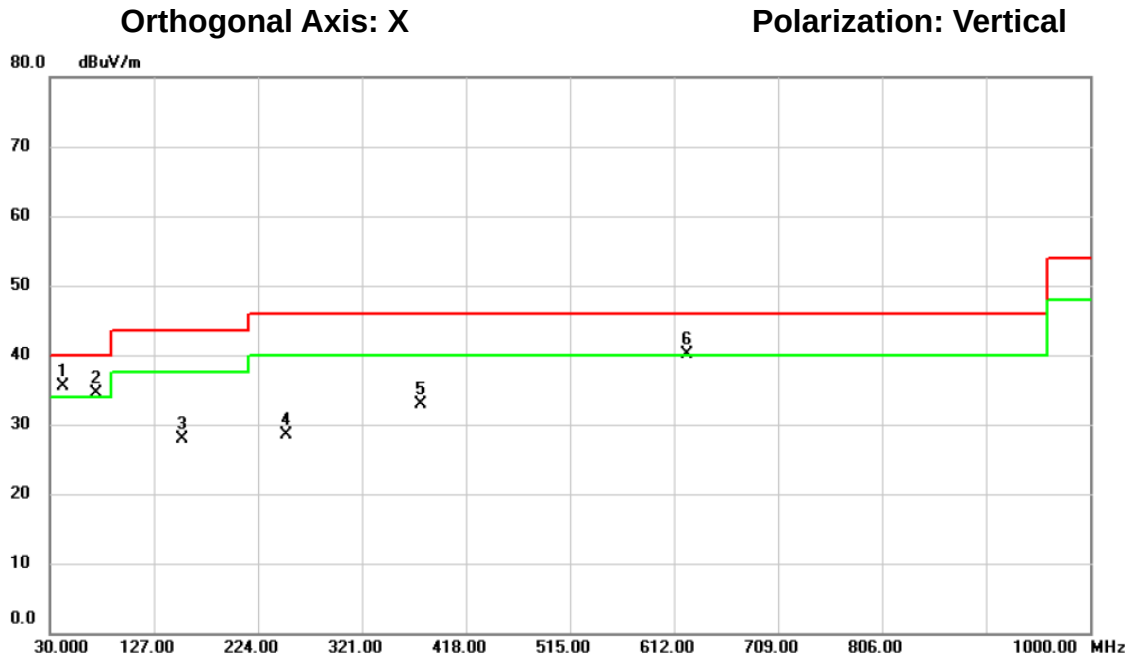

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	42.6100	43.10	-7.69	35.41	40.00	-4.59	peak	
2	!	73.6500	44.78	-10.28	34.50	40.00	-5.50	peak	
3		153.1900	35.41	-7.47	27.94	43.50	-15.56	peak	
4		250.1900	36.89	-8.42	28.47	46.00	-17.53	peak	
5		375.3200	37.61	-4.75	32.86	46.00	-13.14	peak	
6	!	624.6100	40.05	0.11	40.16	46.00	-5.84	peak	

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C


測試模式: TX_PoE
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

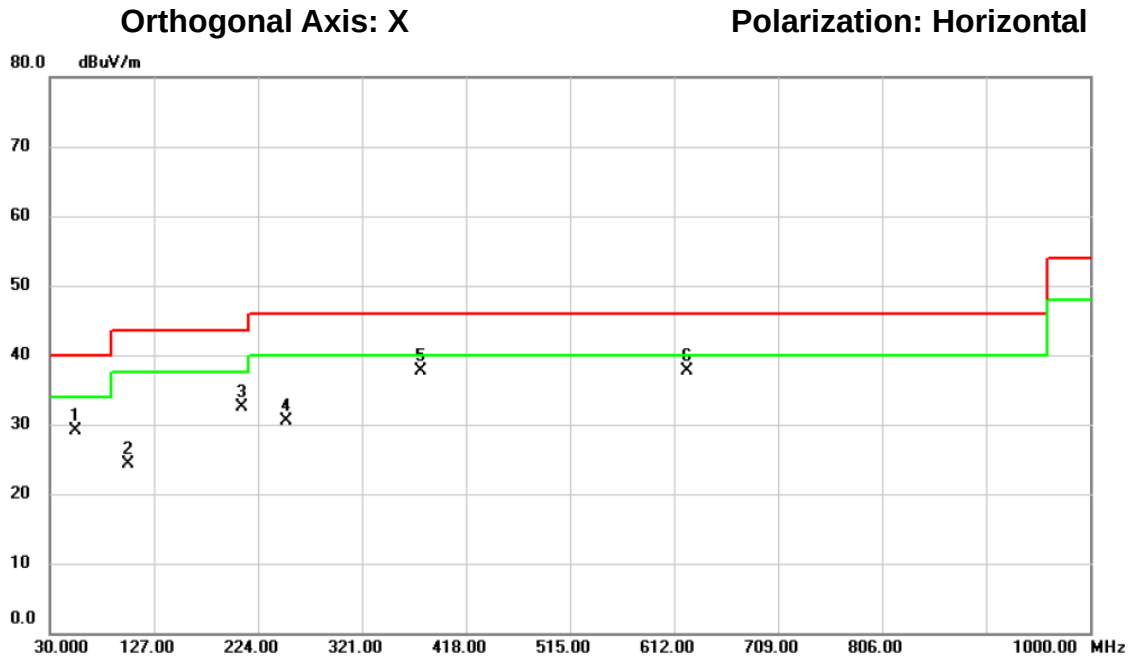

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		53.2800	36.62	-7.47	29.15	40.00	-10.85	peak	
2		102.7500	36.20	-11.81	24.39	43.50	-19.11	peak	
3		208.4800	42.74	-10.17	32.57	43.50	-10.93	peak	
4		250.1900	38.85	-8.42	30.43	46.00	-15.57	peak	
5		375.3200	42.44	-4.75	37.69	46.00	-8.31	peak	
6	*	624.6100	37.60	0.11	37.71	46.00	-8.29	peak	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C


測試模式: TX_PoE
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 107/01/09
環境濕度: 70%

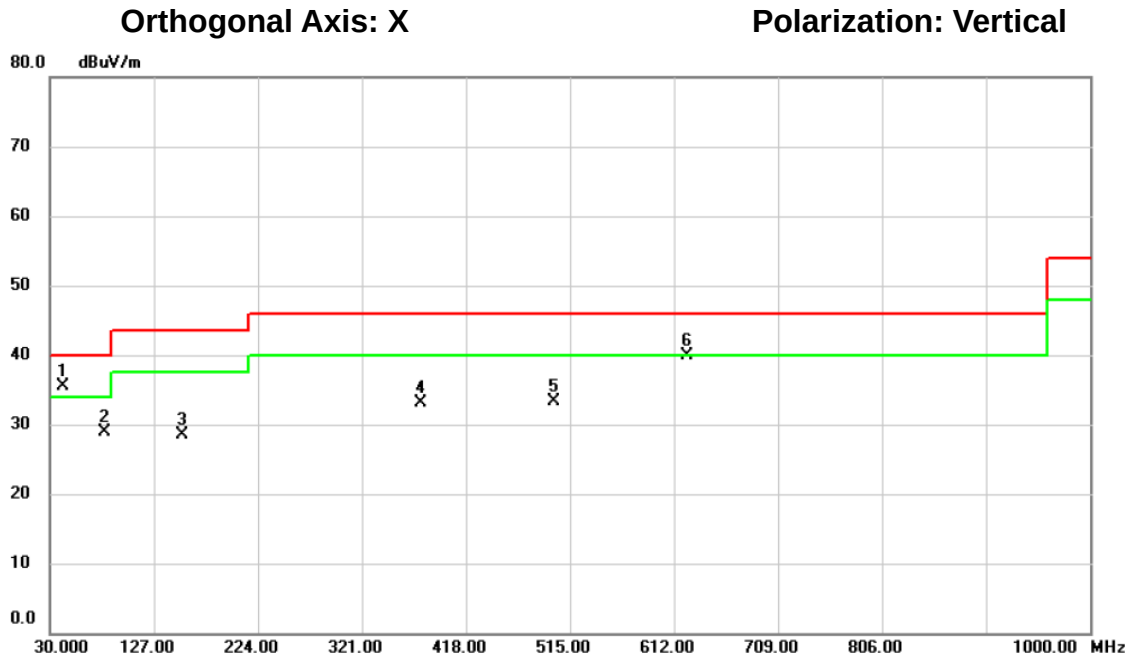

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	42.6100	43.21	-7.69	35.52	40.00	-4.48	peak	
2		80.4400	40.63	-11.73	28.90	40.00	-11.10	peak	
3		153.1900	36.04	-7.47	28.57	43.50	-14.93	peak	
4		375.3200	37.95	-4.75	33.20	46.00	-12.80	peak	
5		500.4500	35.02	-1.68	33.34	46.00	-12.66	peak	
6		624.6100	39.79	0.11	39.90	46.00	-6.10	peak	


測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C

測試模式: TX_PoE
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 107/01/09
環境濕度: 70%

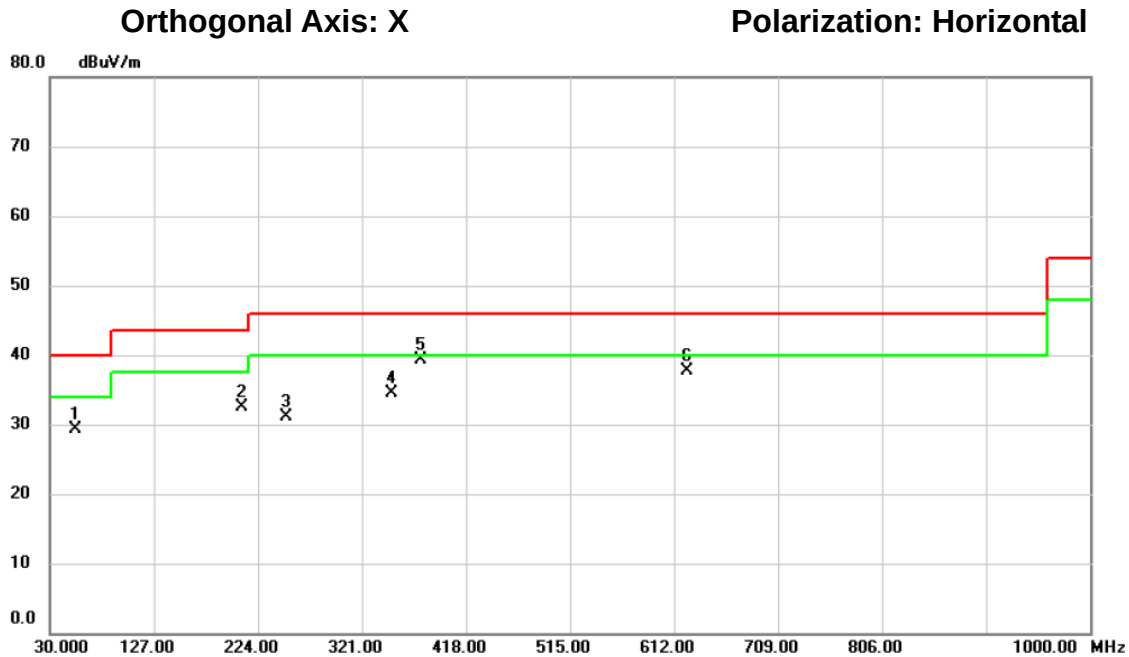


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		53.2800	36.84	-7.47	29.37	40.00	-10.63	peak	
2		208.4800	42.75	-10.17	32.58	43.50	-10.92	peak	
3		250.1900	39.58	-8.42	31.16	46.00	-14.84	peak	
4		349.1300	40.13	-5.56	34.57	46.00	-11.43	peak	
5	*	375.3200	44.07	-4.75	39.32	46.00	-6.68	peak	
6		624.6100	37.53	0.11	37.64	46.00	-8.36	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: TX_PoE
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

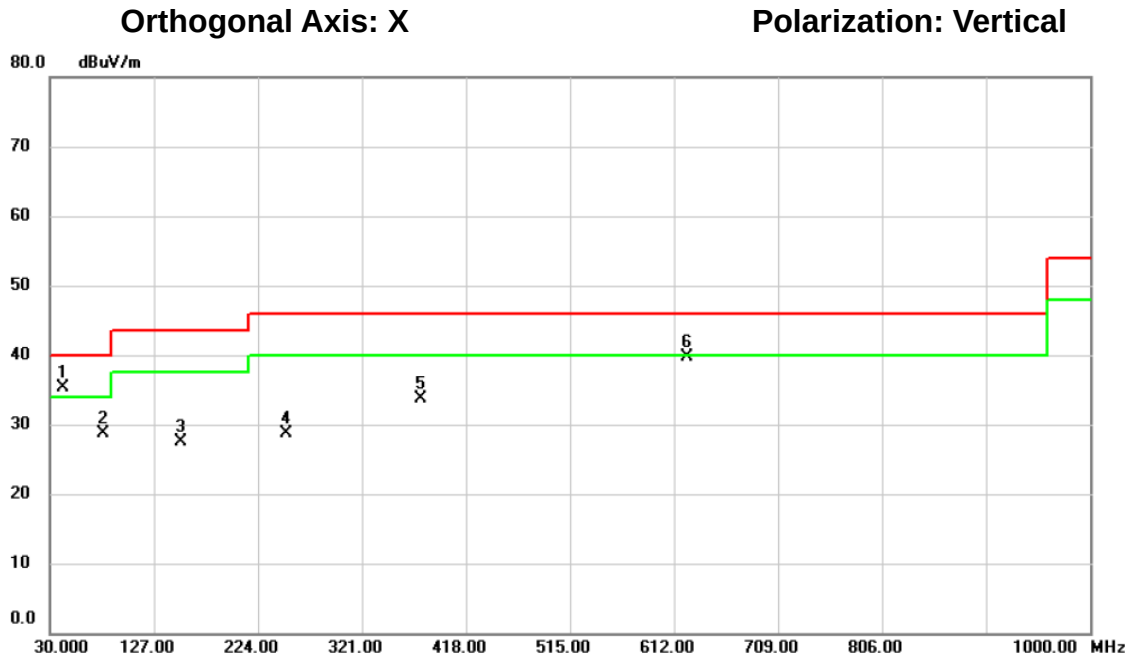

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	42.6100	43.03	-7.69	35.34	40.00	-4.66	peak	
2		79.4700	40.29	-11.54	28.75	40.00	-11.25	peak	
3		152.2200	34.91	-7.49	27.42	43.50	-16.08	peak	
4		250.1900	37.17	-8.42	28.75	46.00	-17.25	peak	
5		375.3200	38.50	-4.75	33.75	46.00	-12.25	peak	
6		624.6100	39.65	0.11	39.76	46.00	-6.24	peak	


測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: TX_PoE
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

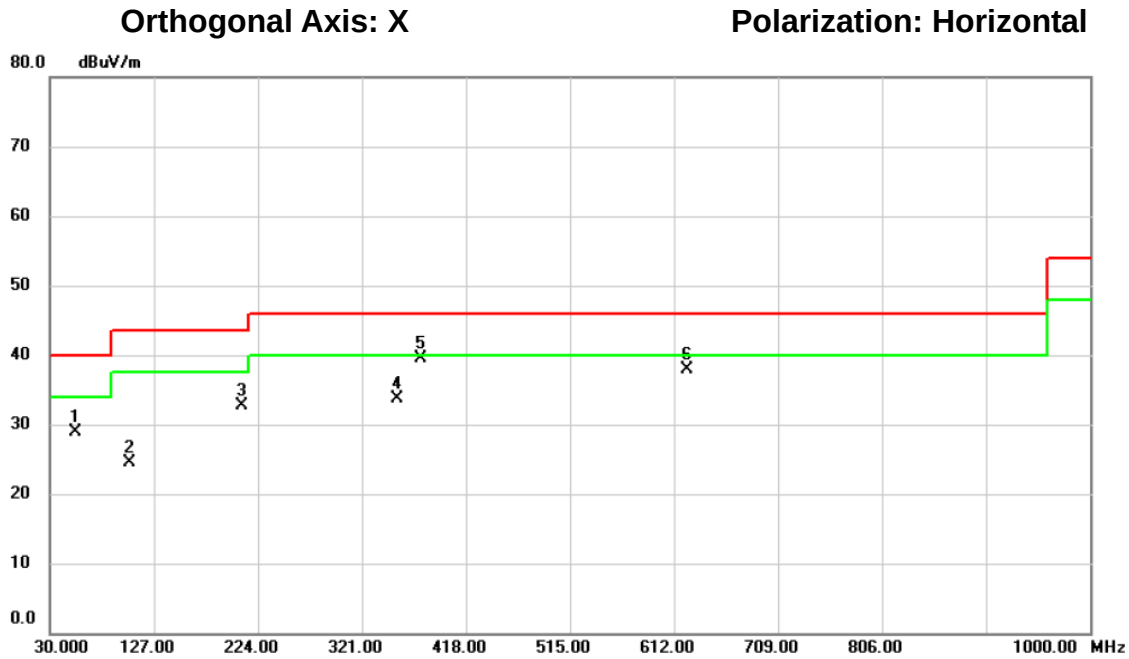

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		53.2800	36.36	-7.47	28.89	40.00	-11.11	peak	
2		104.6900	35.97	-11.51	24.46	43.50	-19.04	peak	
3		208.4800	42.85	-10.17	32.68	43.50	-10.82	peak	
4		353.9800	39.20	-5.42	33.78	46.00	-12.22	peak	
5	*	375.3200	44.30	-4.75	39.55	46.00	-6.45	peak	
6		624.6100	37.71	0.11	37.82	46.00	-8.18	peak	


測試頻道: IEEE 802.11ac (VHT80) / 5210 測試模式: TX_Adapter
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C

視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

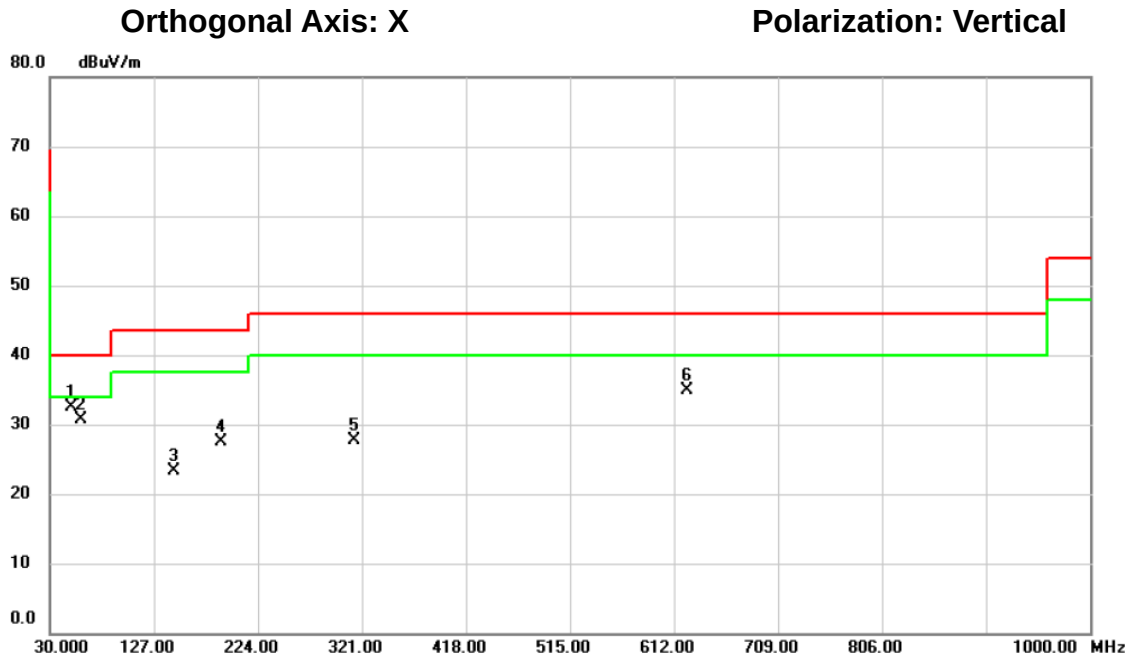

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	49.4000	40.87	-8.33	32.54	40.00	-7.46	peak	
2		59.1000	39.32	-8.57	30.75	40.00	-9.25	peak	
3		145.4300	32.33	-9.05	23.28	43.50	-20.22	peak	
4		189.0800	37.82	-10.27	27.55	43.50	-15.95	peak	
5		314.2100	34.85	-7.13	27.72	46.00	-18.28	peak	
6		624.6100	35.15	-0.23	34.92	46.00	-11.08	peak	


測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: TX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

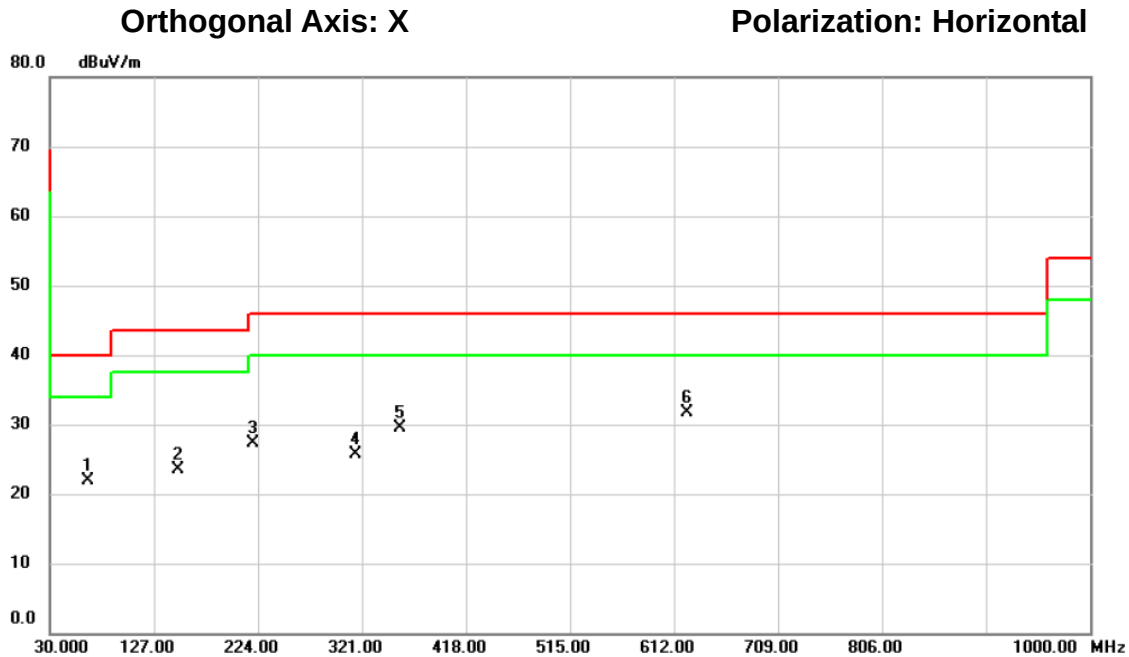

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		65.8900	31.38	-9.52	21.86	40.00	-18.14	peak	
2		149.3100	32.53	-8.97	23.56	43.50	-19.94	peak	
3		219.1500	38.14	-10.83	27.31	46.00	-18.69	peak	
4		315.1800	32.75	-7.11	25.64	46.00	-20.36	peak	
5		355.9200	35.68	-6.09	29.59	46.00	-16.41	peak	
6	*	624.6100	31.92	-0.23	31.69	46.00	-14.31	peak	

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C


測試模式: TX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

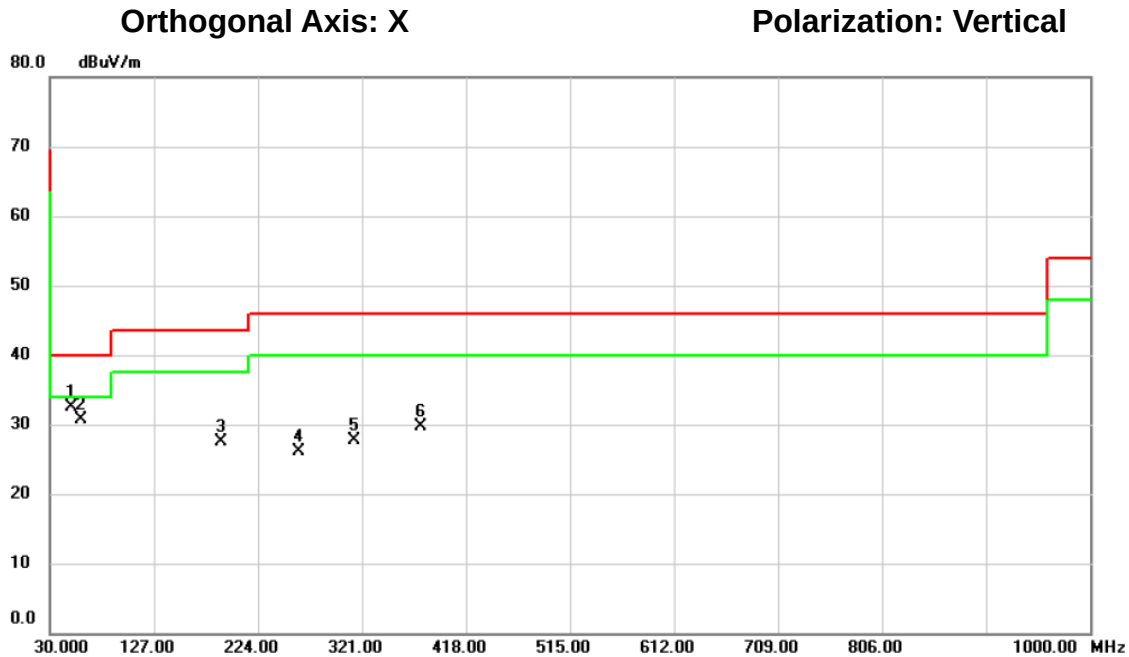

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	49.4000	40.87	-8.33	32.54	40.00	-7.46	peak	
2		59.1000	39.32	-8.57	30.75	40.00	-9.25	peak	
3		189.0800	37.82	-10.27	27.55	43.50	-15.95	peak	
4		261.8300	34.87	-8.71	26.16	46.00	-19.84	peak	
5		314.2100	34.85	-7.13	27.72	46.00	-18.28	peak	
6		375.3200	35.33	-5.58	29.75	46.00	-16.25	peak	

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C


測試模式: TX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

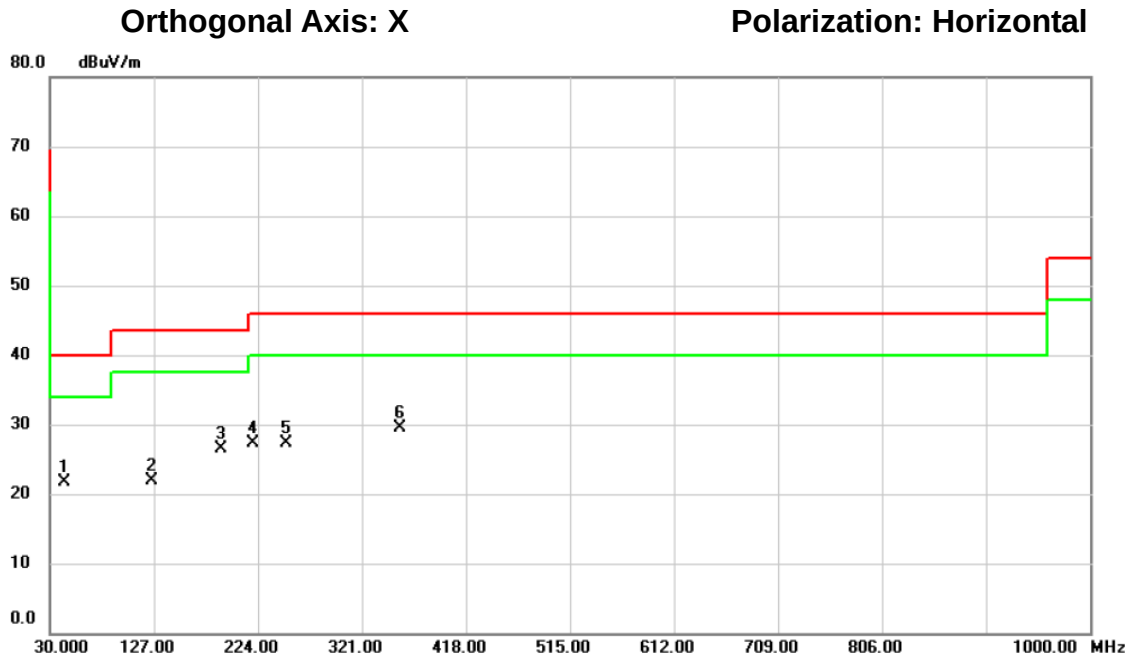

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		43.5800	30.21	-8.56	21.65	40.00	-18.35	peak	
2		125.0600	31.68	-9.87	21.81	43.50	-21.69	peak	
3		189.0800	36.79	-10.27	26.52	43.50	-16.98	peak	
4		219.1500	38.14	-10.83	27.31	46.00	-18.69	peak	
5		250.1900	36.28	-9.07	27.21	46.00	-18.79	peak	
6	*	355.9200	35.68	-6.09	29.59	46.00	-16.41	peak	

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C


測試模式: TX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

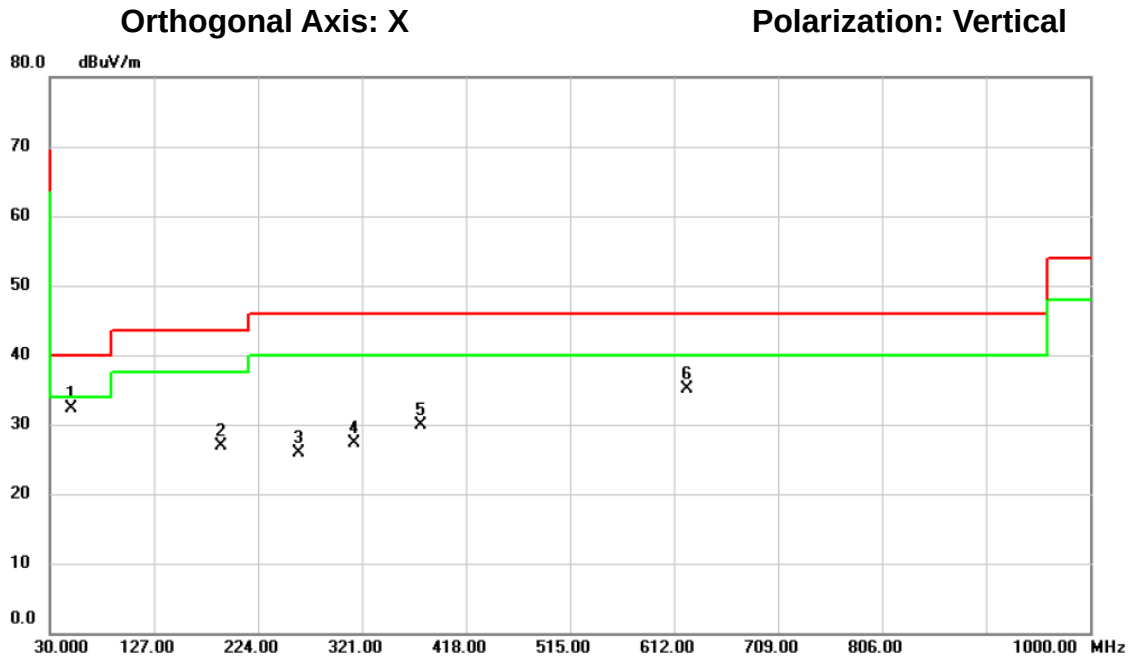

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.4000	40.57	-8.33	32.24	40.00	-7.76	peak	
2		189.0800	37.22	-10.27	26.95	43.50	-16.55	peak	
3		261.8300	34.67	-8.71	25.96	46.00	-20.04	peak	
4		314.2100	34.35	-7.13	27.22	46.00	-18.78	peak	
5		375.3200	35.53	-5.58	29.95	46.00	-16.05	peak	
6		624.6100	35.35	-0.23	35.12	46.00	-10.88	peak	


測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C

測試模式: TX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 107/01/09
 環境濕度: 70%

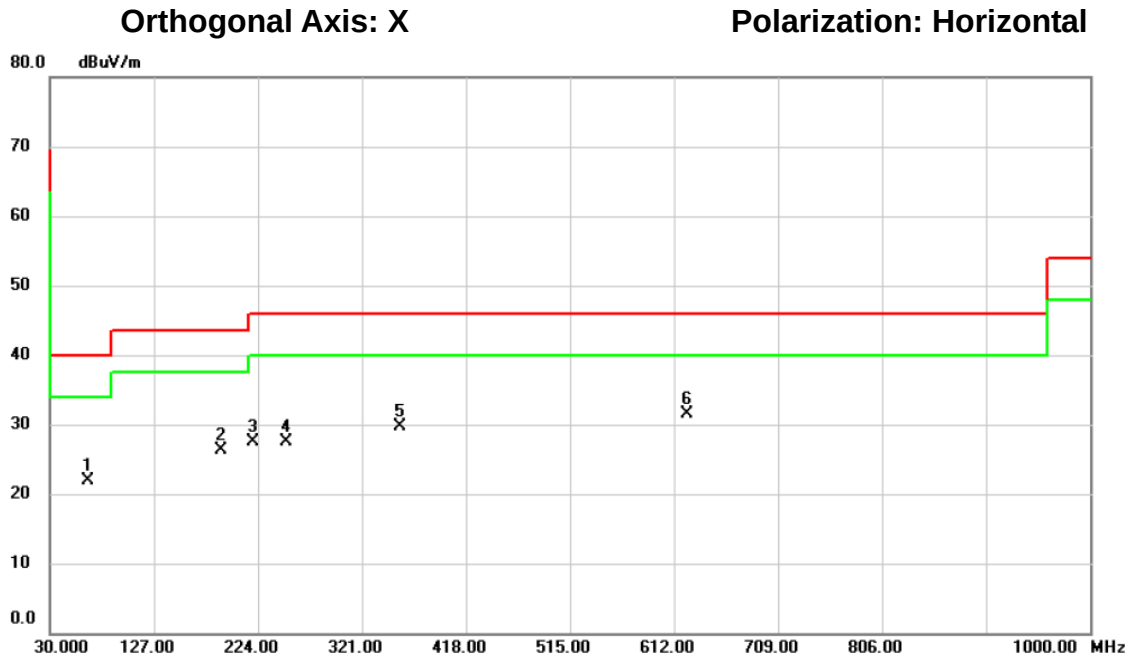


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		65.8900	31.38	-9.52	21.86	40.00	-18.14	peak	
2		189.0800	36.59	-10.27	26.32	43.50	-17.18	peak	
3		219.1500	38.26	-10.83	27.43	46.00	-18.57	peak	
4		250.1900	36.59	-9.07	27.52	46.00	-18.48	peak	
5		355.9200	35.88	-6.09	29.79	46.00	-16.21	peak	
6	*	624.6100	31.72	-0.23	31.49	46.00	-14.51	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: TX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

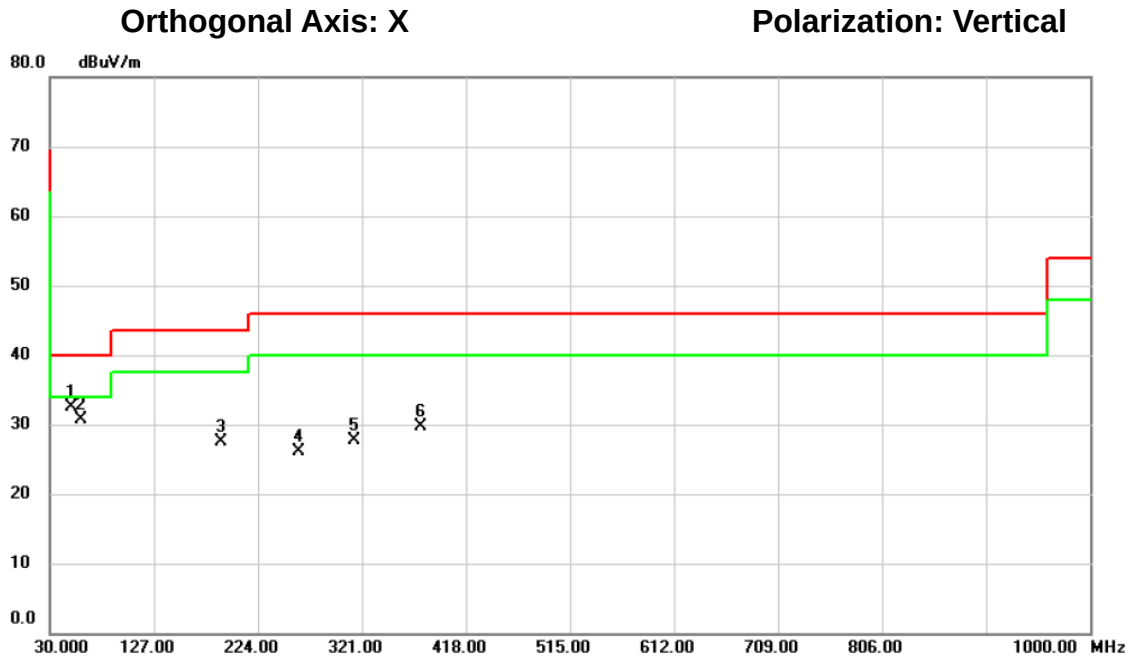

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.4000	40.87	-8.33	32.54	40.00	-7.46	peak	
2		59.1000	39.32	-8.57	30.75	40.00	-9.25	peak	
3		189.0800	37.82	-10.27	27.55	43.50	-15.95	peak	
4		261.8300	34.87	-8.71	26.16	46.00	-19.84	peak	
5		314.2100	34.85	-7.13	27.72	46.00	-18.28	peak	
6		375.3200	35.33	-5.58	29.75	46.00	-16.25	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: TX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 107/01/09
 環境溫度: 23°C 環境濕度: 70%

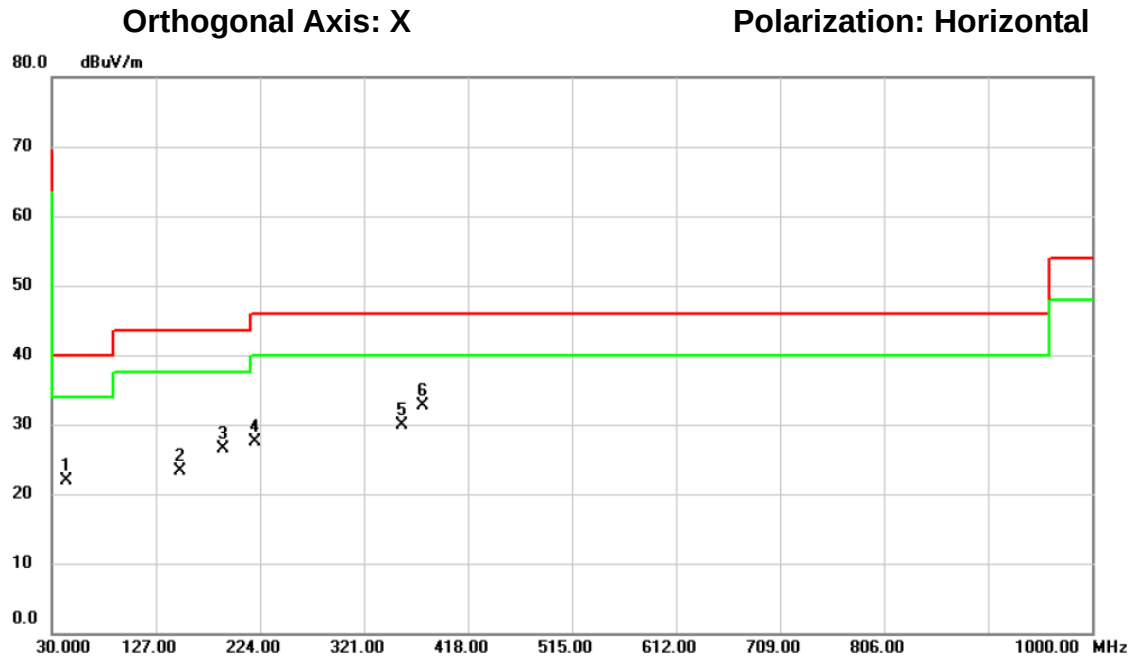


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		43.5800	30.51	-8.56	21.95	40.00	-18.05	peak	
2		149.3100	32.33	-8.97	23.36	43.50	-20.14	peak	
3		189.0800	36.79	-10.27	26.52	43.50	-16.98	peak	
4		219.1500	38.34	-10.83	27.51	46.00	-18.49	peak	
5		355.9200	35.94	-6.09	29.85	46.00	-16.15	peak	
6	*	375.3200	38.36	-5.58	32.78	46.00	-13.22	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

Orthogonal Axis: X

Polarization: Vertical

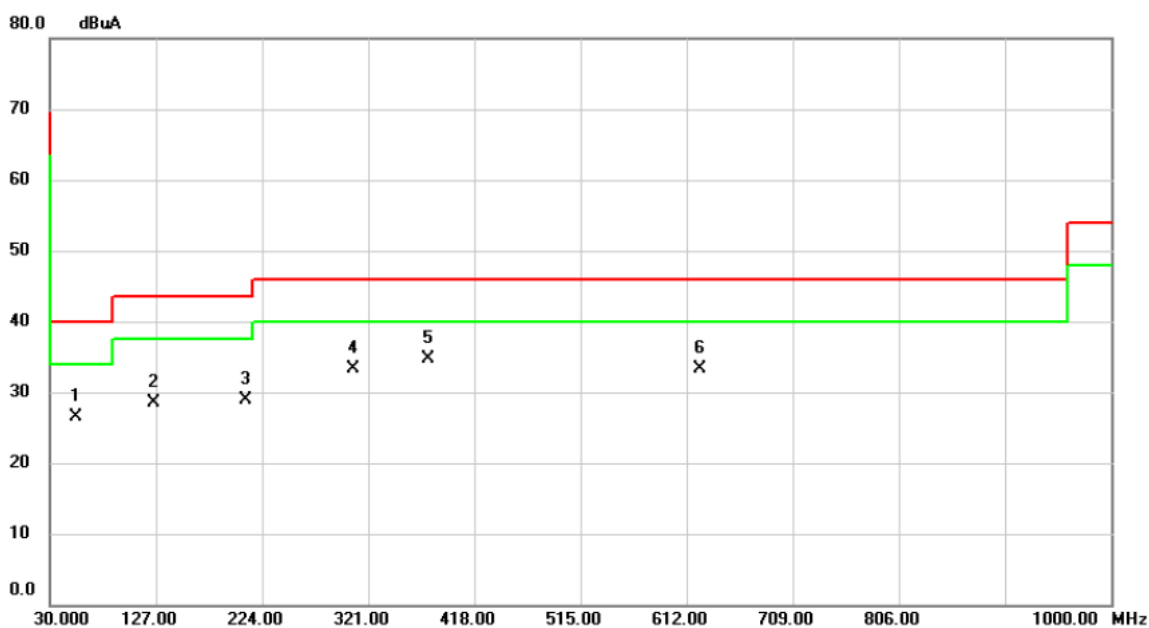


No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		53.2800	34.68	-8.27	26.41	40.00	-13.59	QP	
2		125.0600	38.80	-10.31	28.49	43.50	-15.01	QP	
3		208.4800	39.65	-10.72	28.93	43.50	-14.57	QP	
4		307.4200	40.67	-7.32	33.35	46.00	-12.65	QP	
5	*	375.3200	40.39	-5.63	34.76	46.00	-11.24	QP	
6		624.6100	33.47	-0.11	33.36	46.00	-12.64	QP	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

Orthogonal Axis: X


Polarization: Horizontal

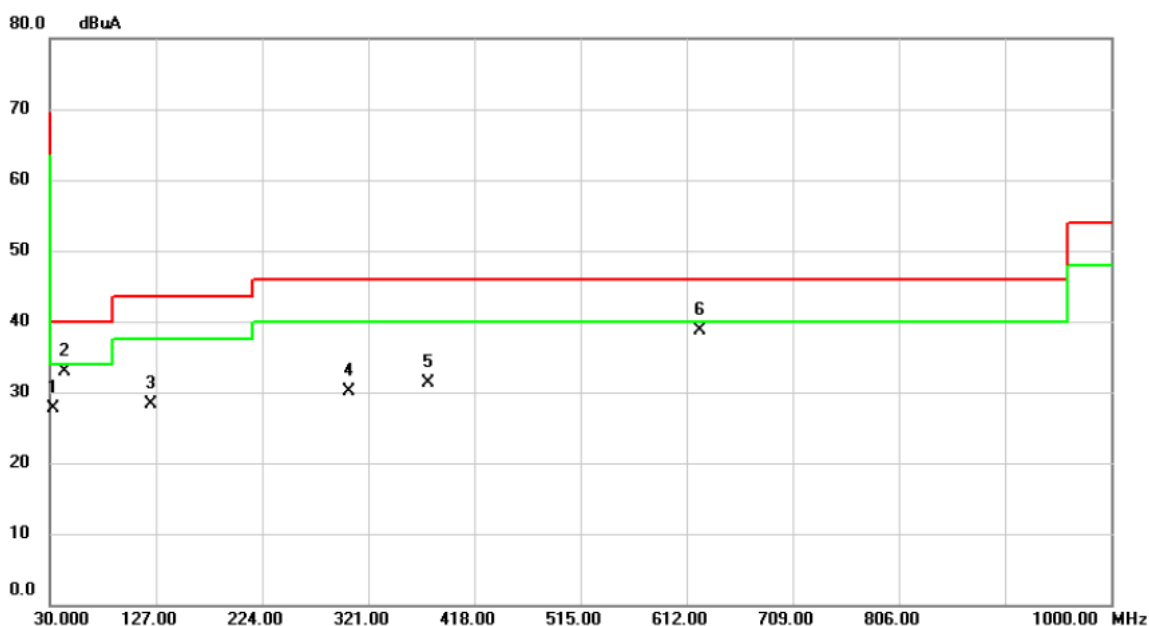

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		32.9100	36.70	-9.04	27.66	40.00	-12.34	QP	
2	*	43.5800	41.20	-8.32	32.88	40.00	-7.12	QP	
3		122.1500	38.77	-10.55	28.22	43.50	-15.28	QP	
4		303.5400	37.49	-7.42	30.07	46.00	-15.93	QP	
5		375.3200	37.00	-5.63	31.37	46.00	-14.63	QP	
6		624.6100	38.88	-0.11	38.77	46.00	-7.23	QP	

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 100 kHz
 量測天線: Log-Bicon Antenna
 檢測器: Quasi-Peak/Peak
 環境溫度: 23°C


測試模式: RX_Adapter
 視頻頻寬: 100 kHz
 測試距離: 3 米
 測試日期: 108/03/08
 環境濕度: 70%

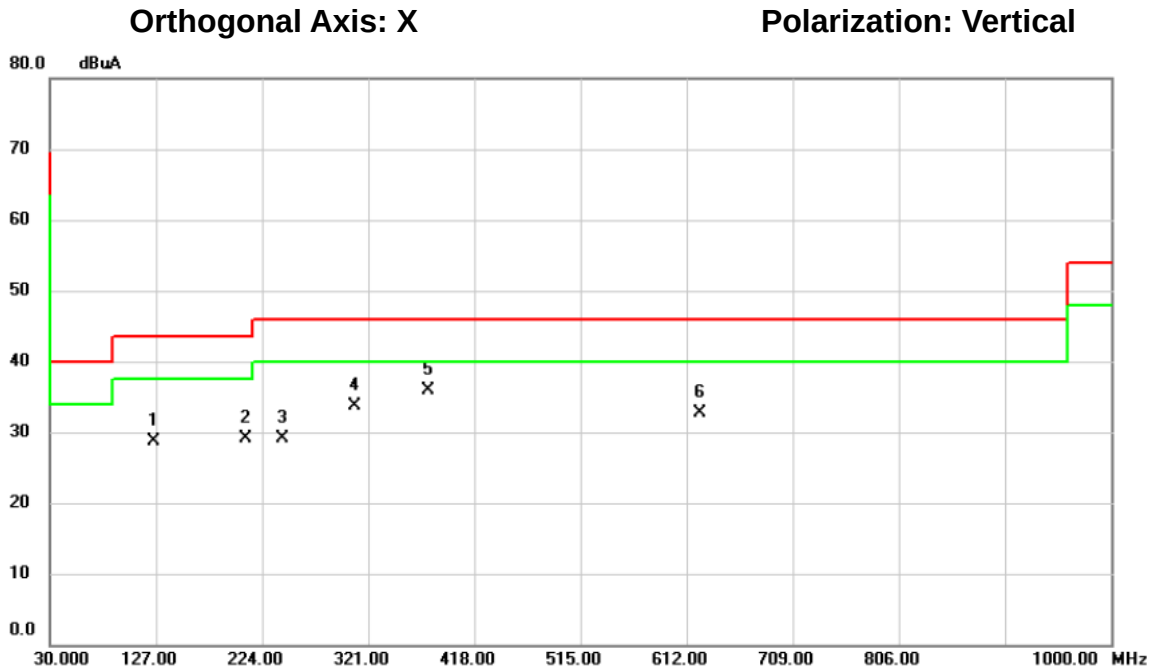

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		125.0600	38.97	-10.31	28.66	43.50	-14.84	QP	
2		208.4800	39.79	-10.72	29.07	43.50	-14.43	QP	
3		242.4300	38.33	-9.13	29.20	46.00	-16.80	QP	
4		308.3900	40.93	-7.28	33.65	46.00	-12.35	QP	
5	*	375.3200	41.44	-5.63	35.81	46.00	-10.19	QP	
6		624.6100	32.83	-0.11	32.72	46.00	-13.28	QP	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C


測試模式: RX_Adapter
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 108/03/08
環境濕度: 70%

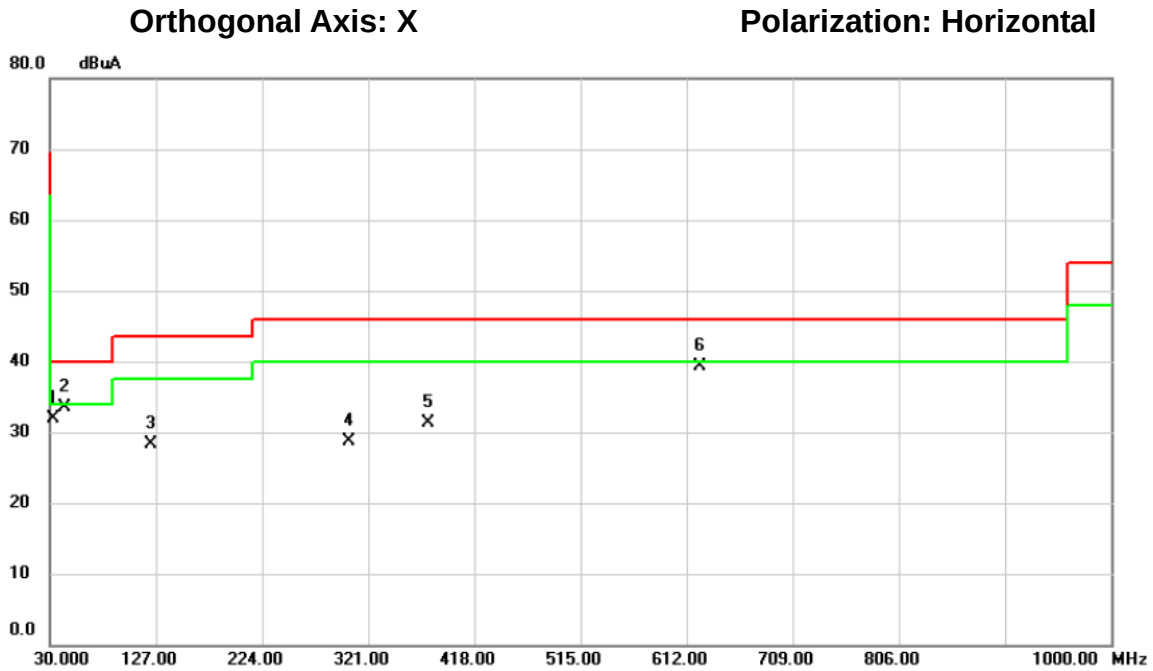

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		32.9100	40.88	-9.04	31.84	40.00	-8.16	QP	
2	*	43.5800	41.85	-8.32	33.53	40.00	-6.47	QP	
3		122.1500	38.91	-10.55	28.36	43.50	-15.14	QP	
4		303.5400	36.17	-7.42	28.75	46.00	-17.25	QP	
5		375.3200	36.85	-5.63	31.22	46.00	-14.78	QP	
6		624.6100	39.38	-0.11	39.27	46.00	-6.73	QP	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C


測試模式: RX_Adapter
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 108/03/08
環境濕度: 70%

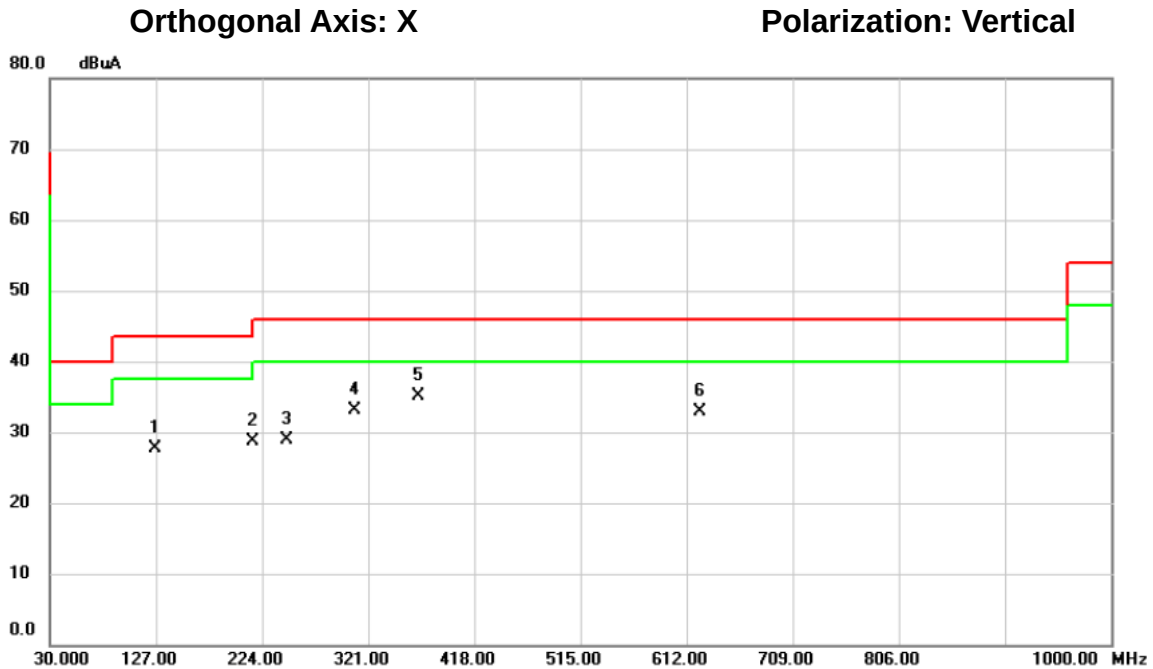

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		126.0300	37.88	-10.23	27.65	43.50	-15.85	QP	
2		215.2700	39.30	-10.63	28.67	43.50	-14.83	QP	
3		246.3100	37.98	-9.11	28.87	46.00	-17.13	QP	
4		308.3900	40.48	-7.28	33.20	46.00	-12.80	QP	
5	*	366.5900	41.03	-5.83	35.20	46.00	-10.80	QP	
6		624.6100	33.05	-0.11	32.94	46.00	-13.06	QP	


測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 100 kHz
量測天線: Log-Bicon Antenna
檢測器: Quasi-Peak/Peak
環境溫度: 23°C

測試模式: RX_Adapter
視頻頻寬: 100 kHz
測試距離: 3 米
測試日期: 108/03/08
環境濕度: 70%

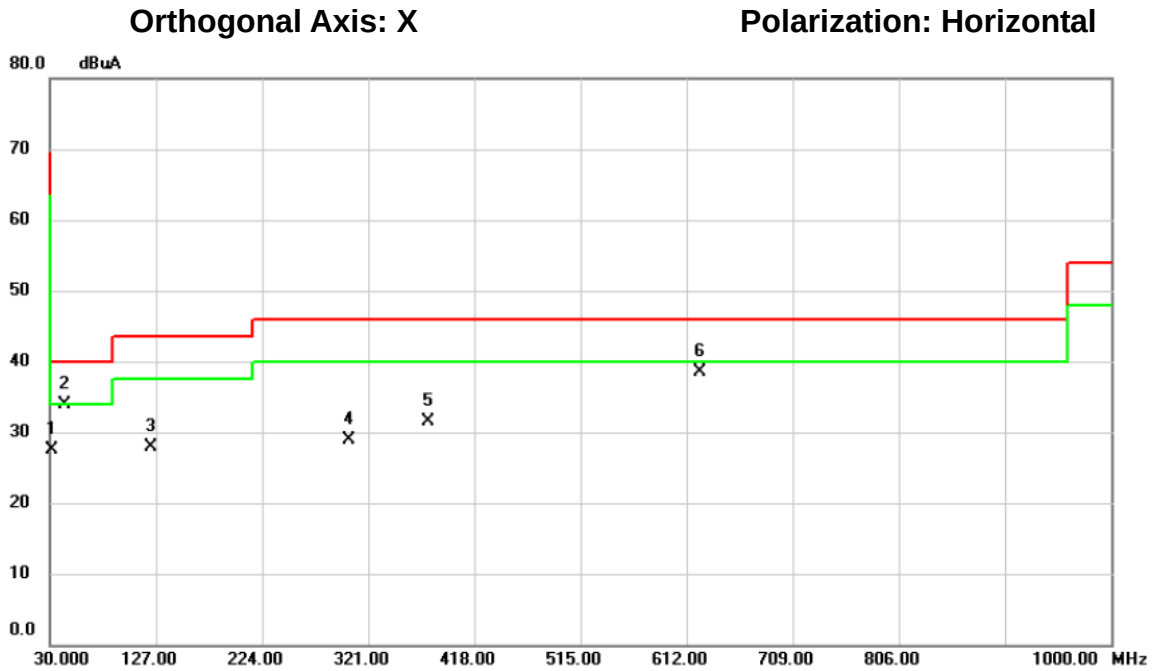


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		31.9400	36.46	-9.04	27.42	40.00	-12.58	QP	
2	*	43.5800	42.13	-8.32	33.81	40.00	-6.19	QP	
3		122.1500	38.55	-10.55	28.00	43.50	-15.50	QP	
4		303.5400	36.30	-7.42	28.88	46.00	-17.12	QP	
5		375.3200	37.10	-5.63	31.47	46.00	-14.53	QP	
6		624.6100	38.65	-0.11	38.54	46.00	-7.46	QP	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

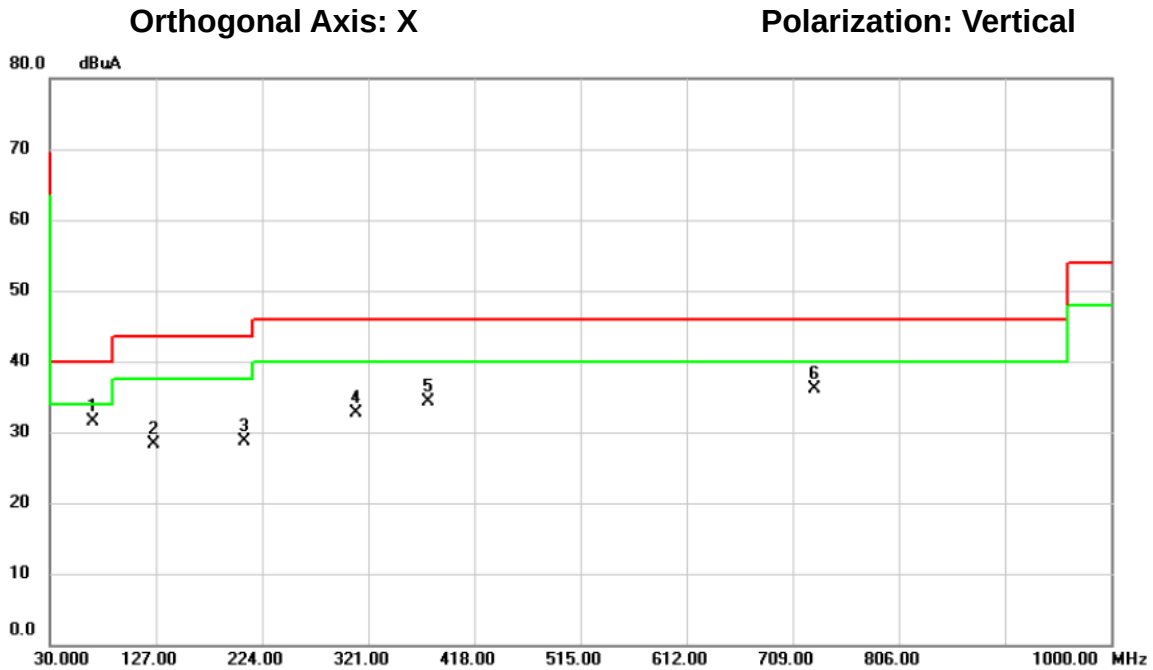

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuA	dB	dBuA	dBuA	dB		
1	*	69.7700	42.07	-10.66	31.41	40.00	-8.59	peak	
2		125.0600	38.58	-10.31	28.27	43.50	-15.23	peak	
3		207.5100	39.54	-10.74	28.80	43.50	-14.70	peak	
4		309.3600	39.93	-7.26	32.67	46.00	-13.33	peak	
5		375.3200	40.01	-5.63	34.38	46.00	-11.62	peak	
6		729.3700	34.19	1.90	36.09	46.00	-9.91	peak	


測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz 測試模式: RX_Adapter
 解析頻寬: 100 kHz 視頻頻寬: 100 kHz
 量測天線: Log-Bicon Antenna 測試距離: 3 米
 檢測器: Quasi-Peak/Peak 測試日期: 108/03/08
 環境溫度: 23°C 環境濕度: 70%

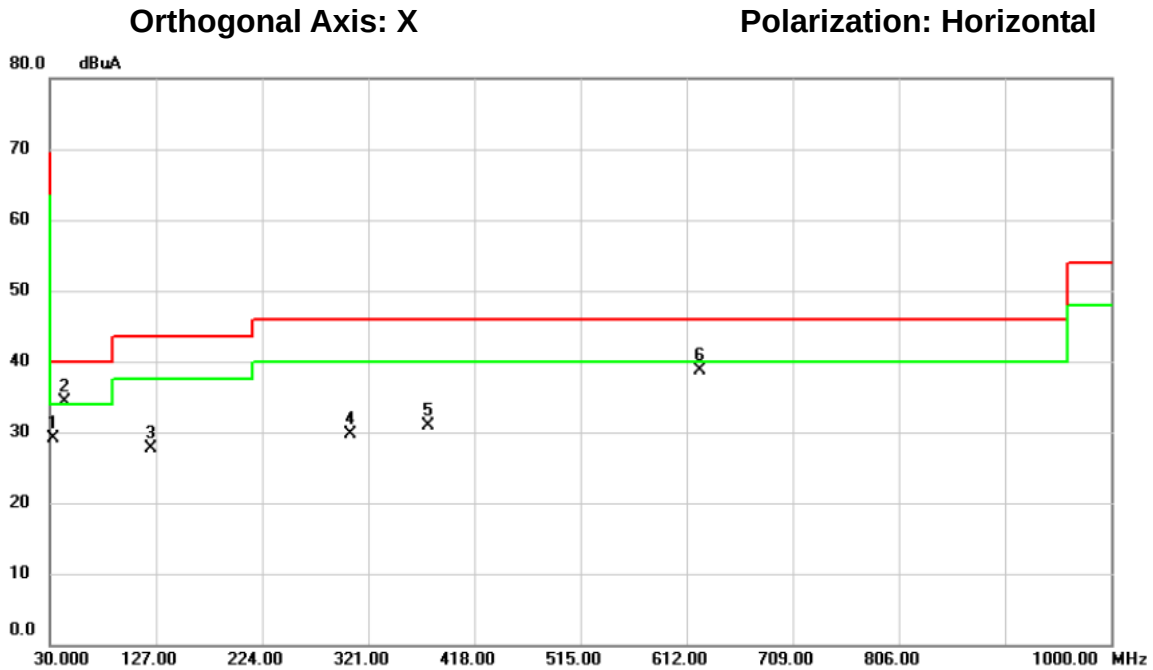

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		32.9100	38.08	-9.04	29.04	40.00	-10.96	peak	
2	*	43.5800	42.56	-8.32	34.24	40.00	-5.76	peak	
3		122.1500	38.28	-10.55	27.73	43.50	-15.77	peak	
4		304.5100	37.08	-7.40	29.68	46.00	-16.32	peak	
5		375.3200	36.58	-5.63	30.95	46.00	-15.05	peak	
6		624.6100	38.76	-0.11	38.65	46.00	-7.35	peak	

16.4.2 諧波及本地震盪(1000 MHz - 主波之十倍諧波)


測試頻道: IEEE 802.11a / 5180 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

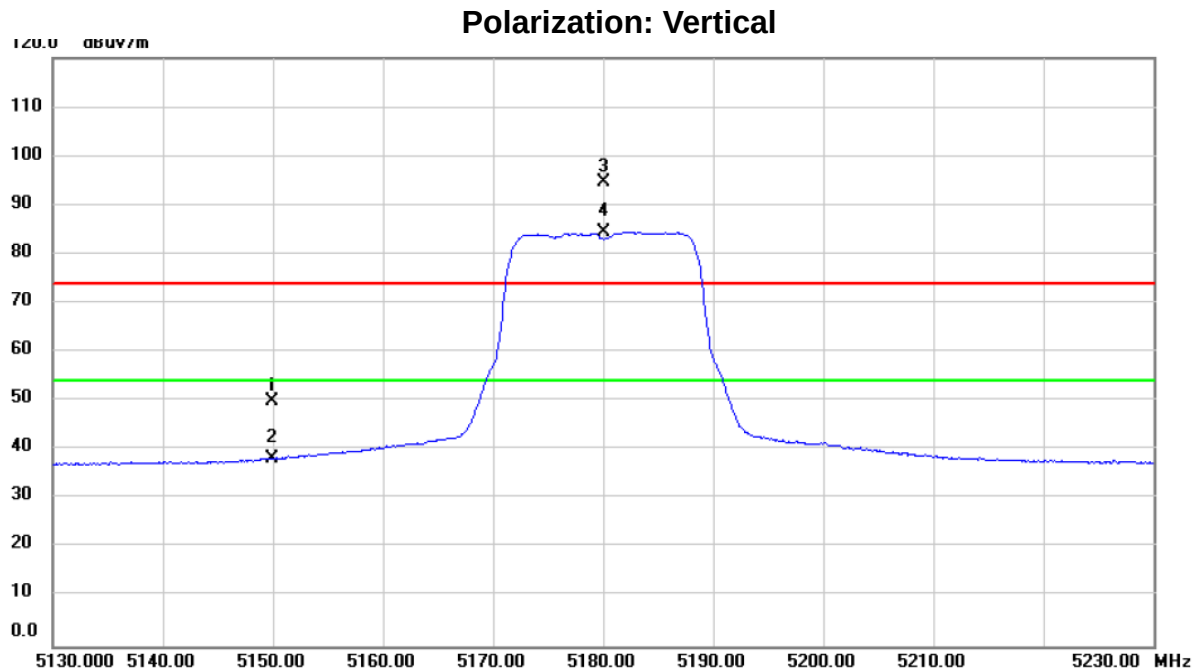

Lo. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5149.900	12.52	37.54	50.06	74.00	-23.94	peak	
2	5149.900	0.78	37.54	38.32	54.00	-15.68	AVG	
3 X	5180.000	56.97	37.58	94.55	74.00	20.55	peak	No Limit
4 *	5180.000	46.86	37.58	84.44	54.00	30.44	AVG	No Limit

測試頻道: IEEE 802.11a / 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

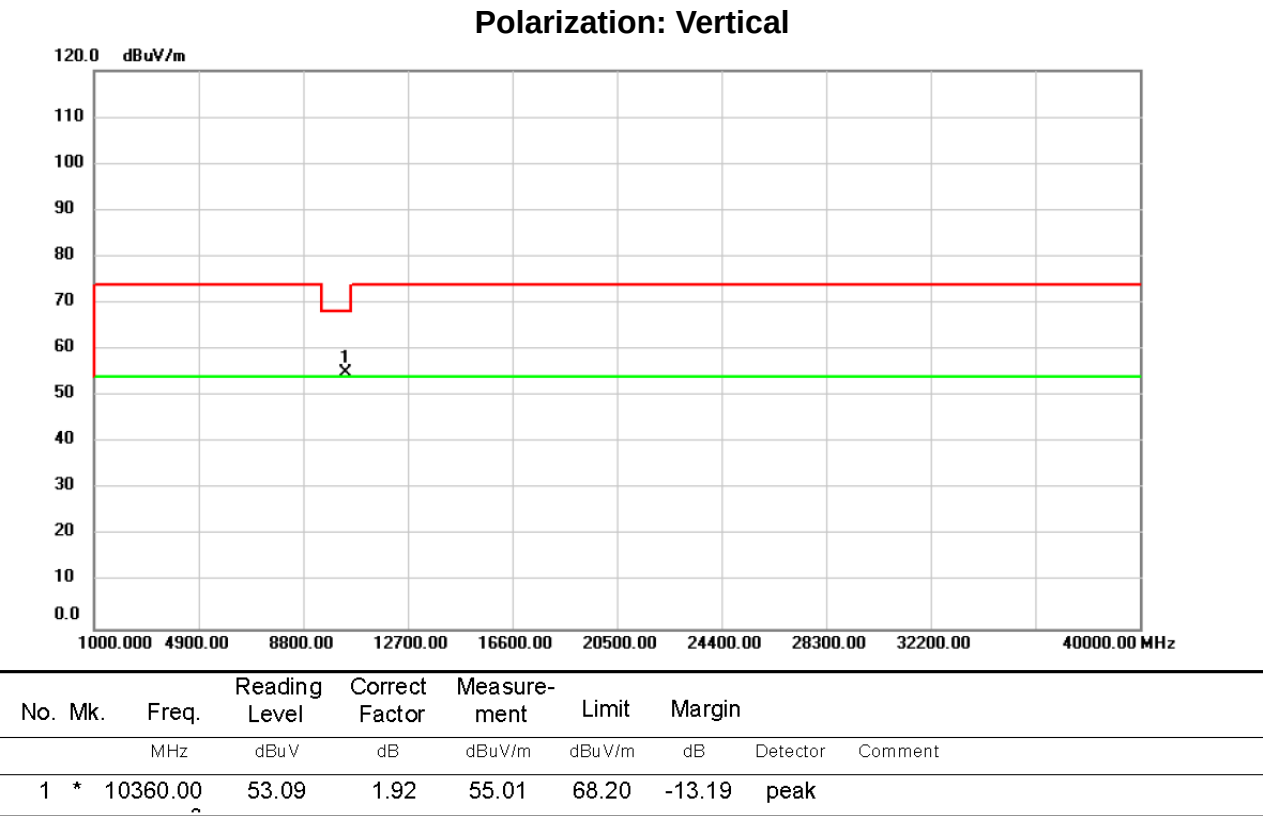

測試頻道: IEEE 802.11a / 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

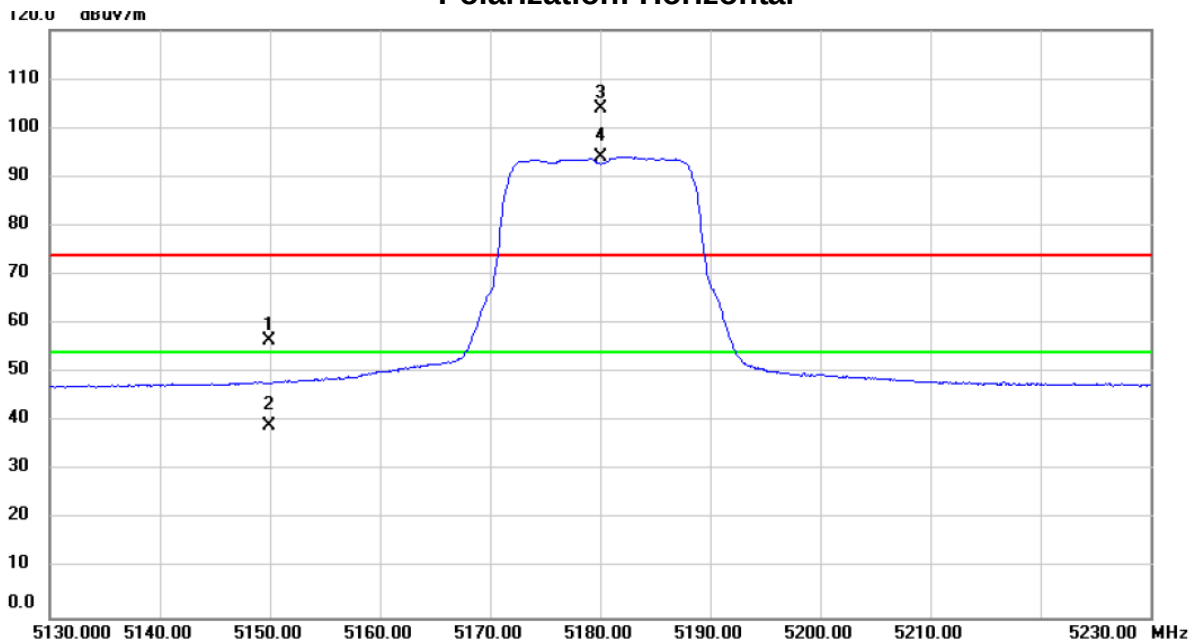

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5149.880	19.04	37.54	56.58	74.00	-17.42	peak	
2	5149.880	1.75	37.54	39.29	54.00	-14.71	AVG	
3 X	5180.000	66.23	37.58	103.81	74.00	29.81	peak	No Limit
4 *	5180.000	56.48	37.58	94.06	54.00	40.06	AVG	No Limit

測試頻道: IEEE 802.11a / 5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Horizontal

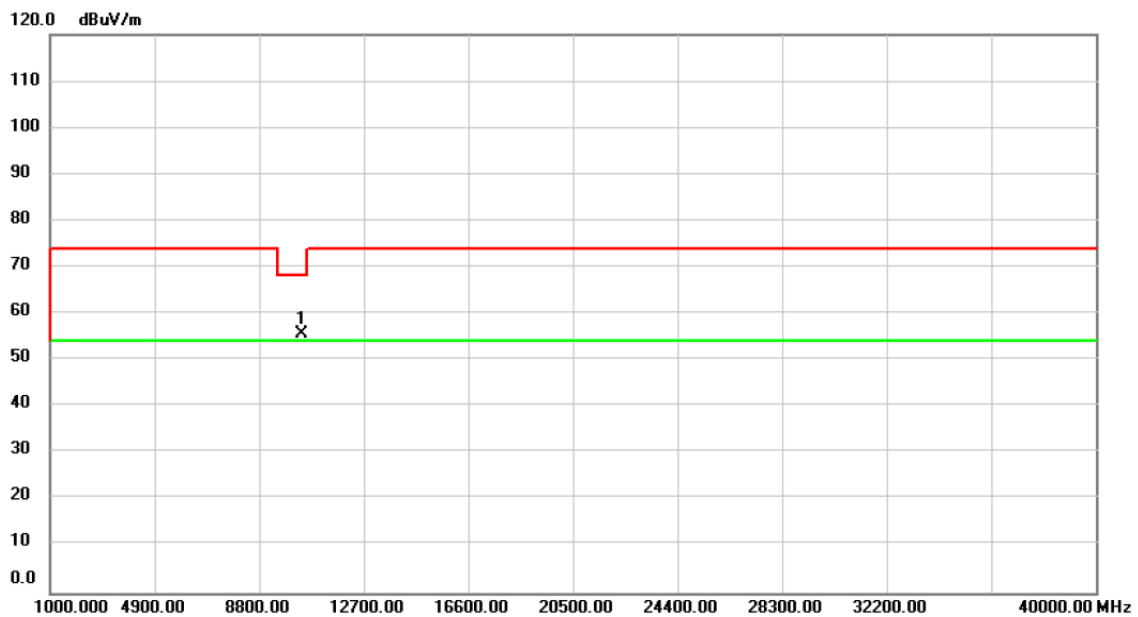

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	53.65	1.92	55.57	68.20	-12.63	peak	

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

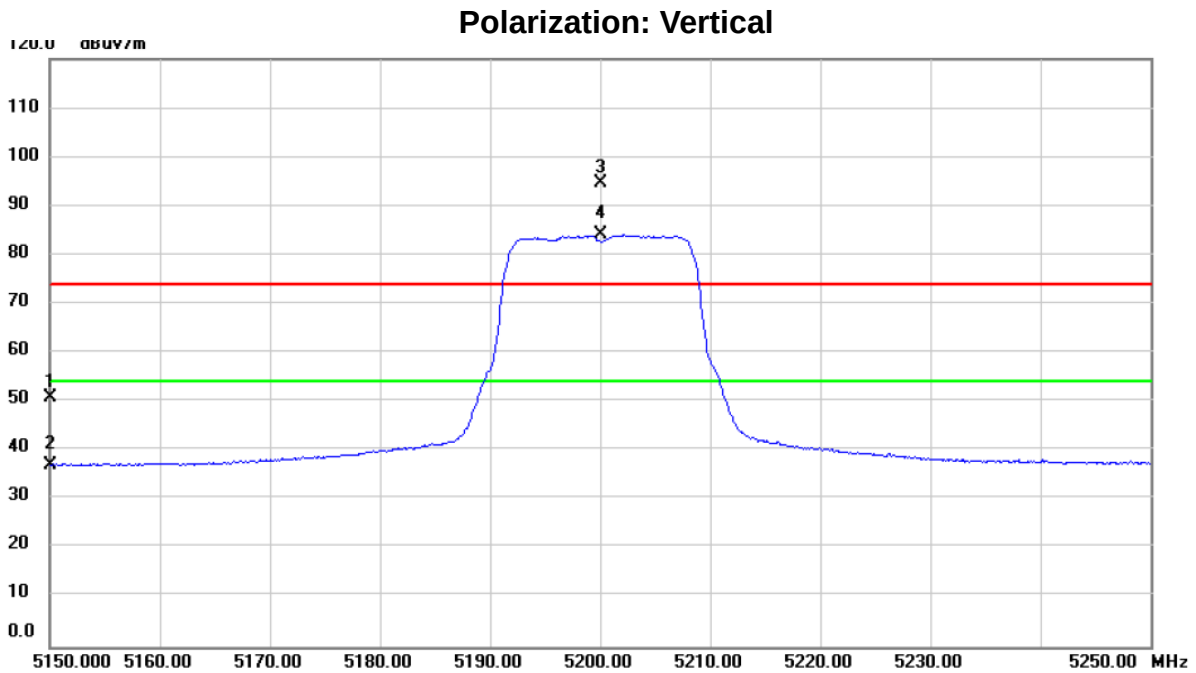

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.000	13.42	37.54	50.96	74.00	-23.04	peak	
2	5150.000	-0.53	37.54	37.01	54.00	-16.99	AVG	
3 X	5200.000	56.98	37.60	94.58	74.00	20.58	peak	No Limit
4 *	5200.000	46.45	37.60	84.05	54.00	30.05	AVG	No Limit

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

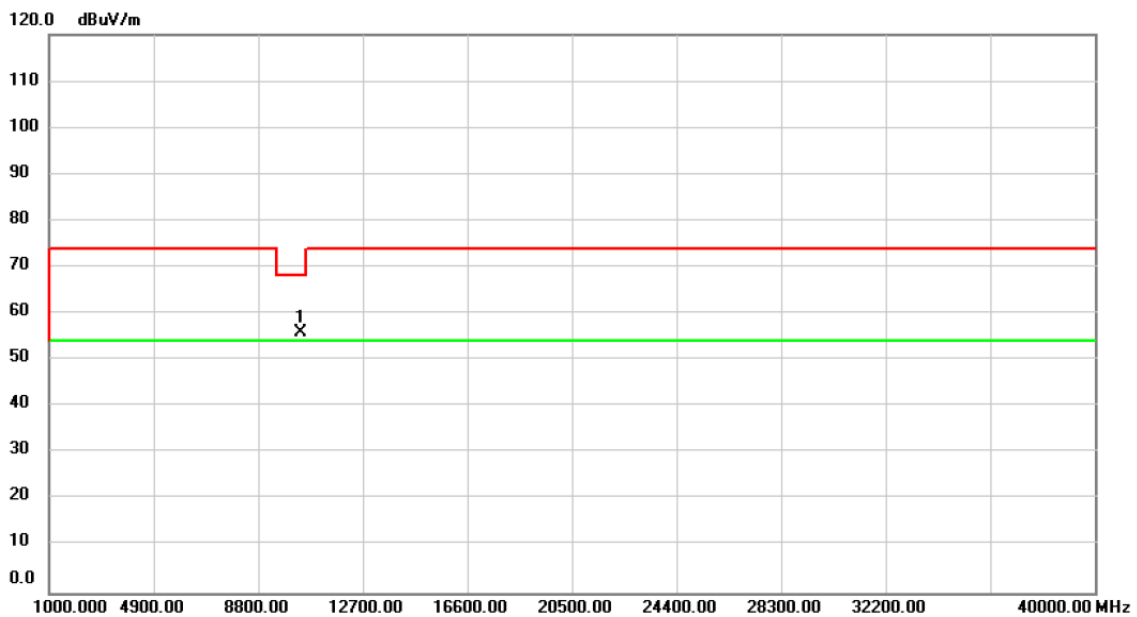
Polarization: Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.86	1.95	55.81	68.20	-12.39	peak	

測試頻道: IEEE 802.11a / 5200 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

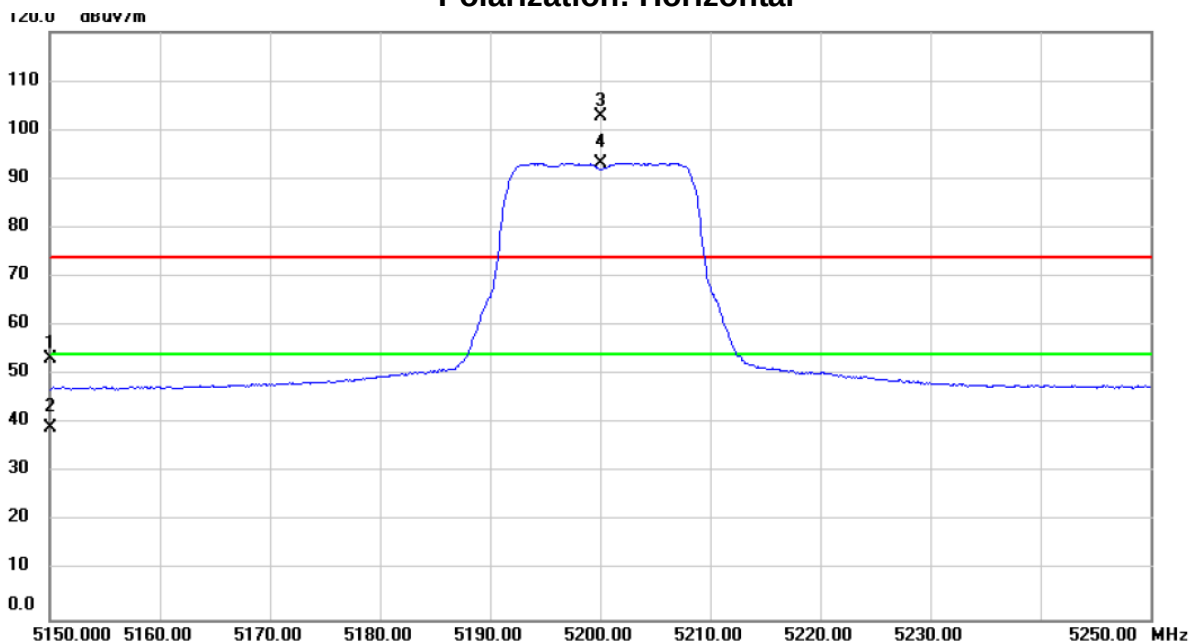


Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.000	15.60	37.54	53.14	74.00	-20.86	peak	
2	5150.000	1.72	37.54	39.26	54.00	-14.74	AVG	
3 X	5200.000	65.24	37.60	102.84	74.00	28.84	peak	No Limit
4 *	5200.000	55.70	37.60	93.30	54.00	39.30	AVG	No Limit

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%


Polarization: Horizontal

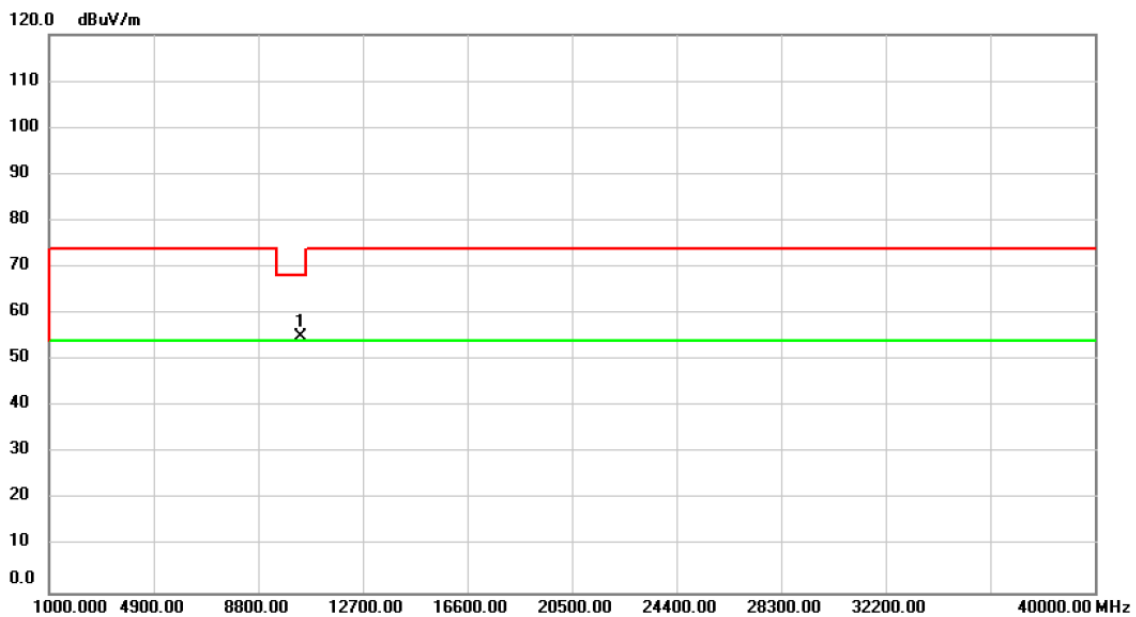

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	53.10	1.95	55.05	68.20	-13.15	peak	

測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

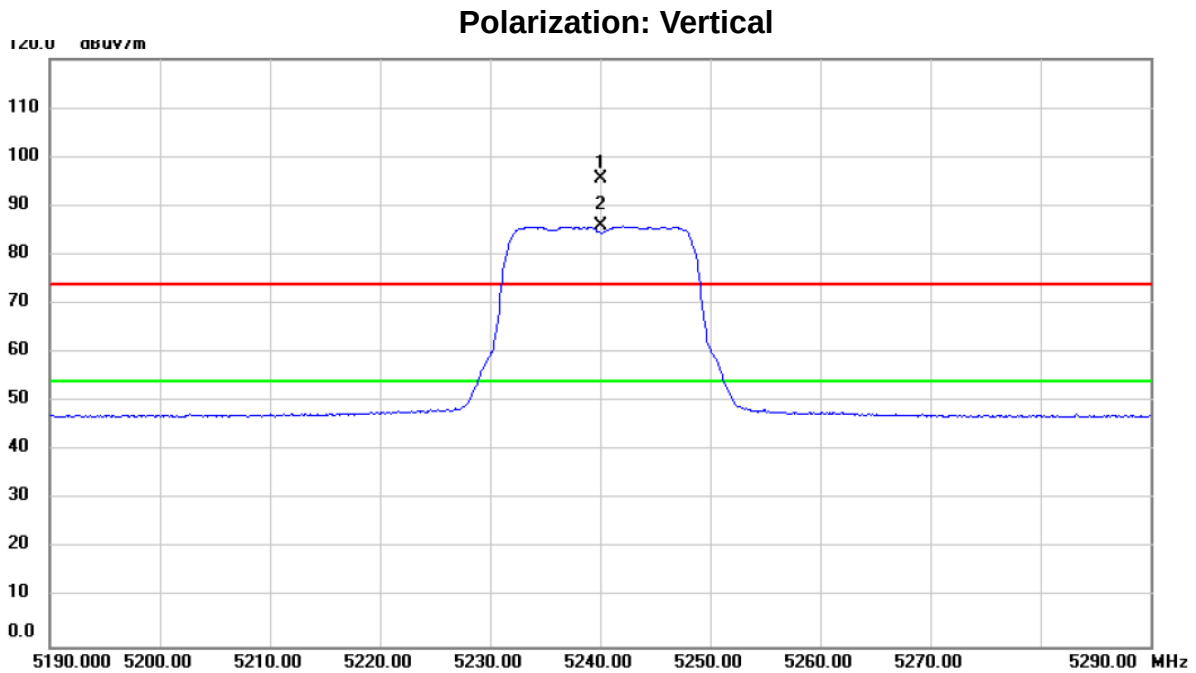

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	58.03	37.64	95.67	74.00	21.67	peak	No Limit
2	*	5240.000	48.17	37.64	85.81	54.00	31.81	AVG	No Limit

測試頻道: IEEE 802.11a / 5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Vertical

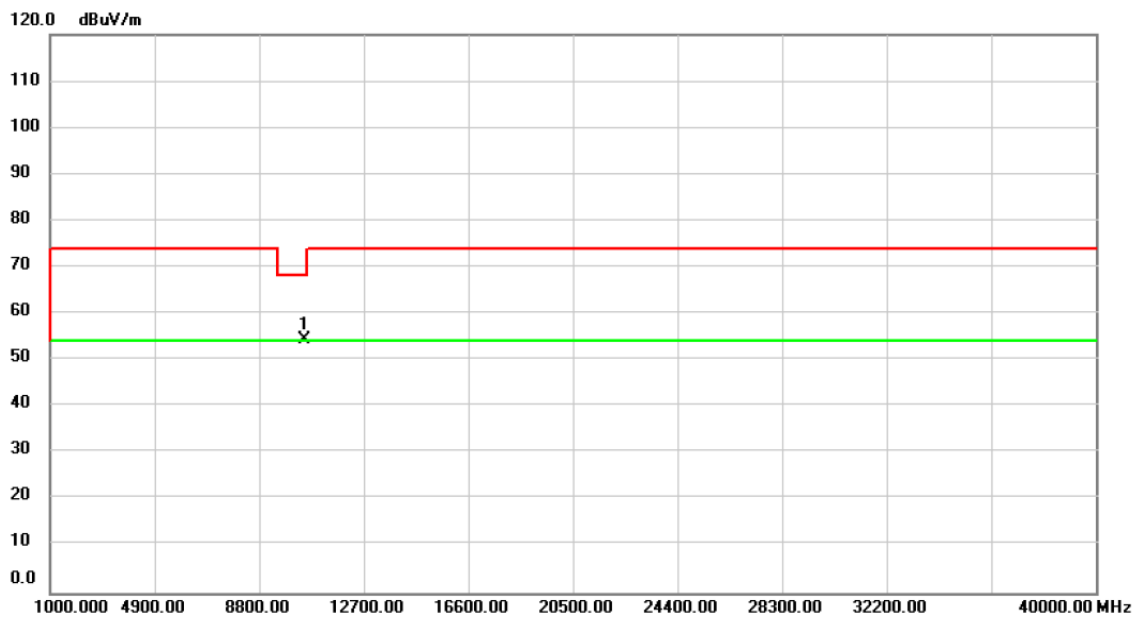


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	52.59	1.96	54.55	68.20	-13.65	peak	

測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

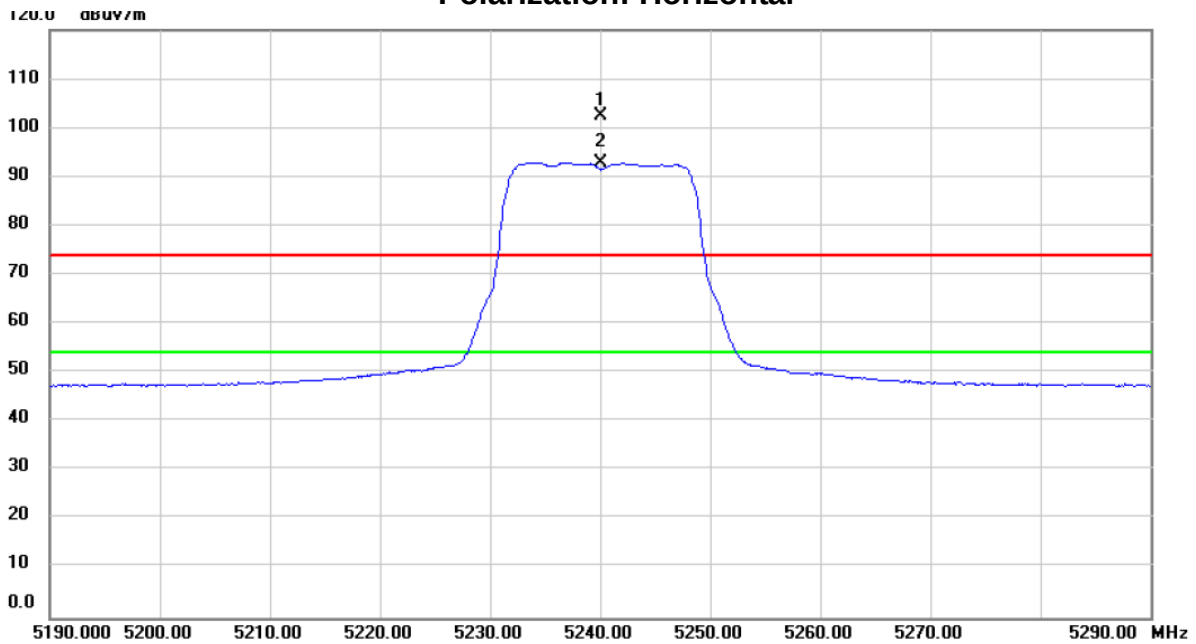

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	64.81	37.64	102.45	74.00	28.45	peak	No Limit
2	*	5240.000	55.24	37.64	92.88	54.00	38.88	AVG	No Limit

測試頻道: IEEE 802.11a / 5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Horizontal

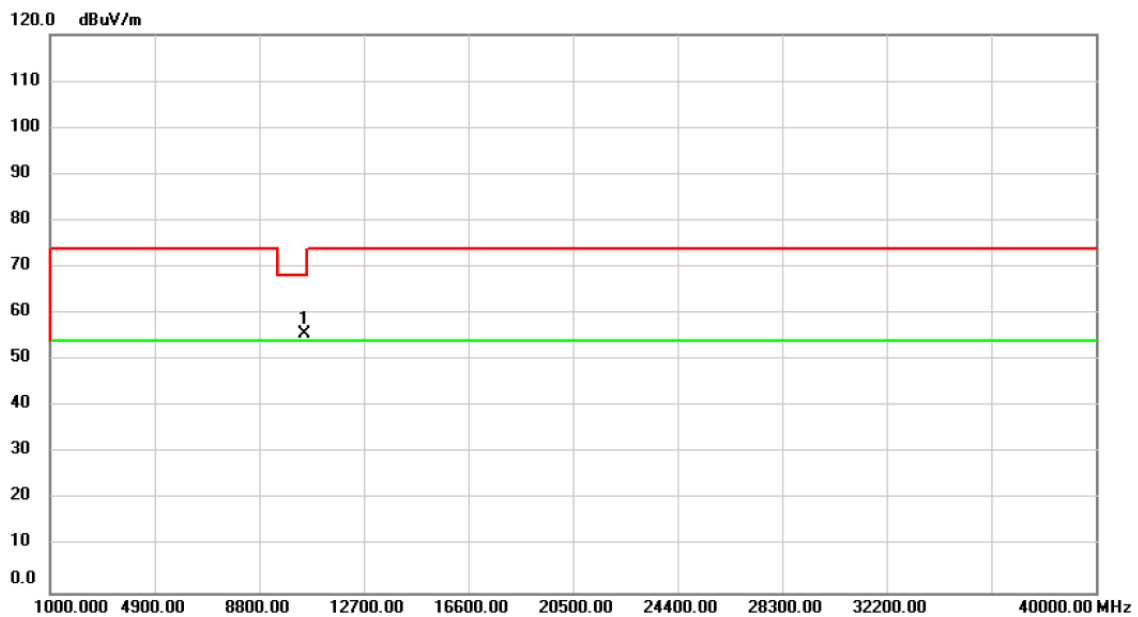

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	53.63	1.96	55.59	68.20	-12.61	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5180 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

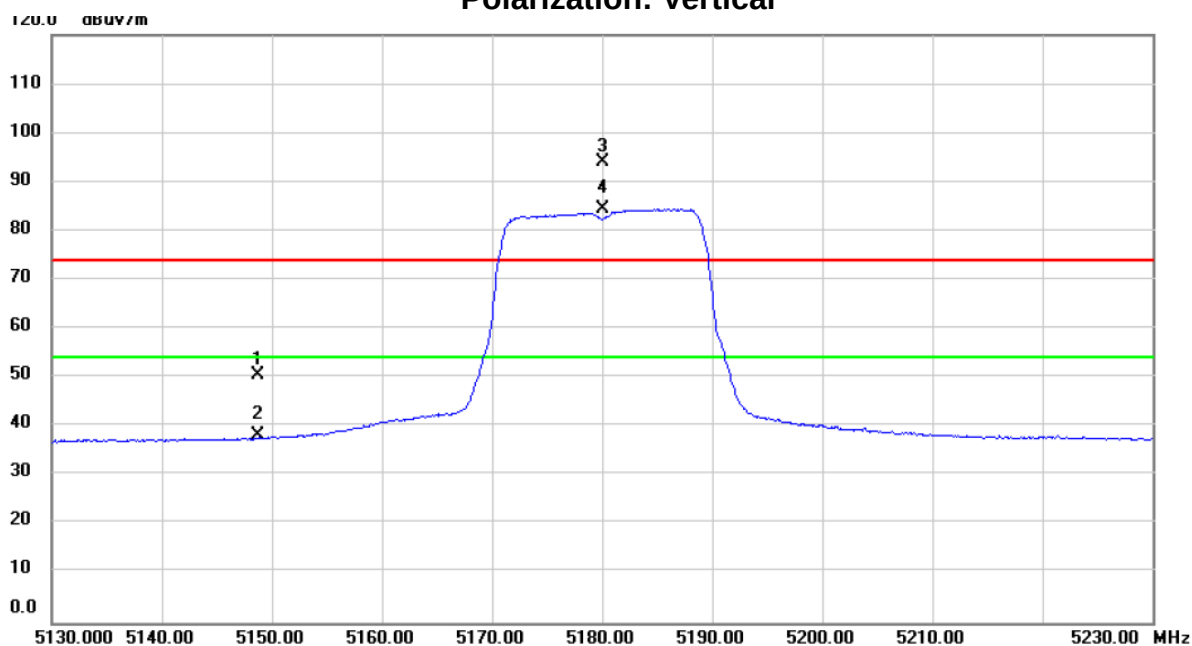

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5148.720	13.15	37.54	50.69	74.00	-23.31	peak	
2	5148.720	0.56	37.54	38.10	54.00	-15.90	AVG	
3 X	5180.000	56.54	37.58	94.12	74.00	20.12	peak	No Limit
4 *	5180.000	46.91	37.58	84.49	54.00	30.49	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5180 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

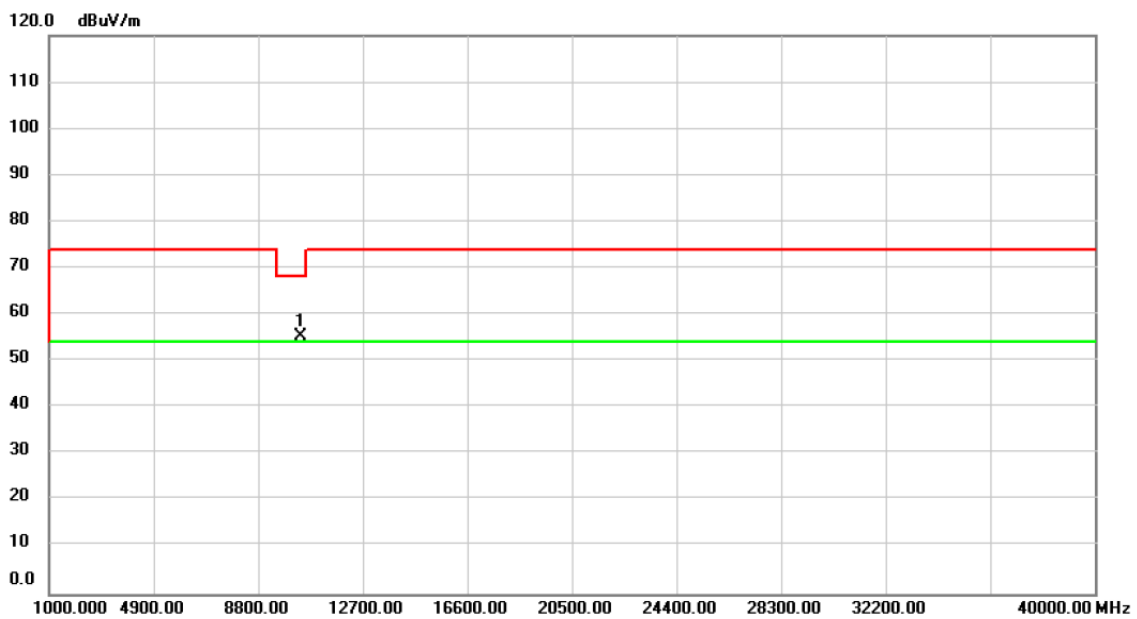

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	53.39	1.92	55.31	68.20	-12.89	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5180
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Horizontal

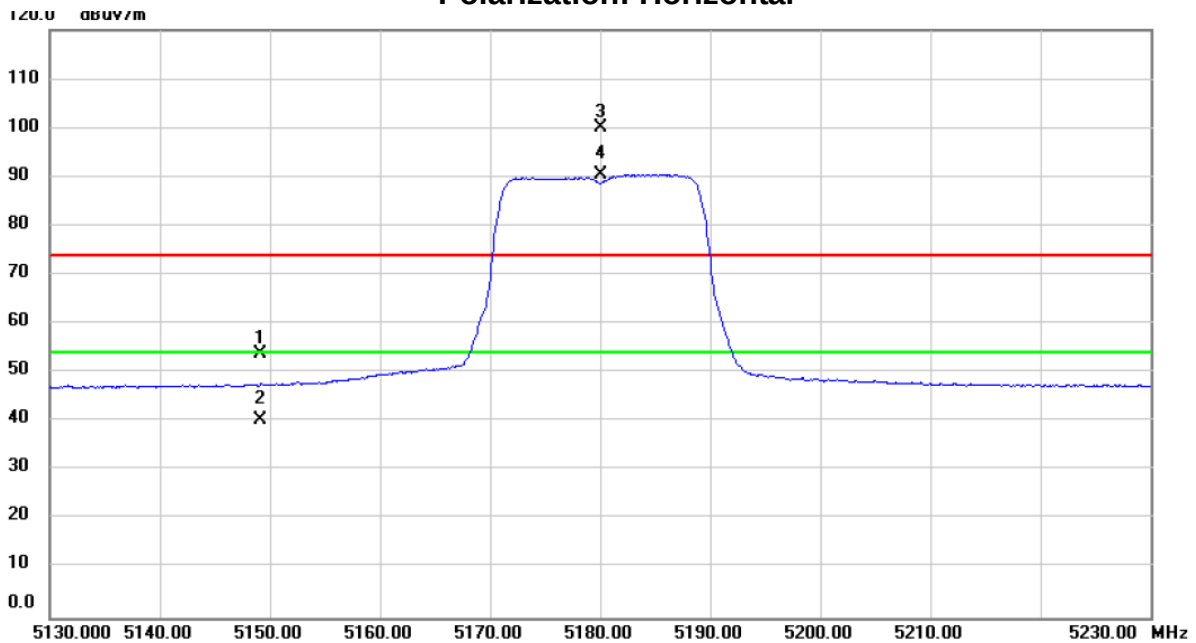

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5149.120	16.25	37.54	53.79	74.00	-20.21	peak	
2	5149.120	2.94	37.54	40.48	54.00	-13.52	AVG	
3 X	5180.000	62.50	37.58	100.08	74.00	26.08	peak	No Limit
4 *	5180.000	52.90	37.58	90.48	54.00	36.48	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5180
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Horizontal

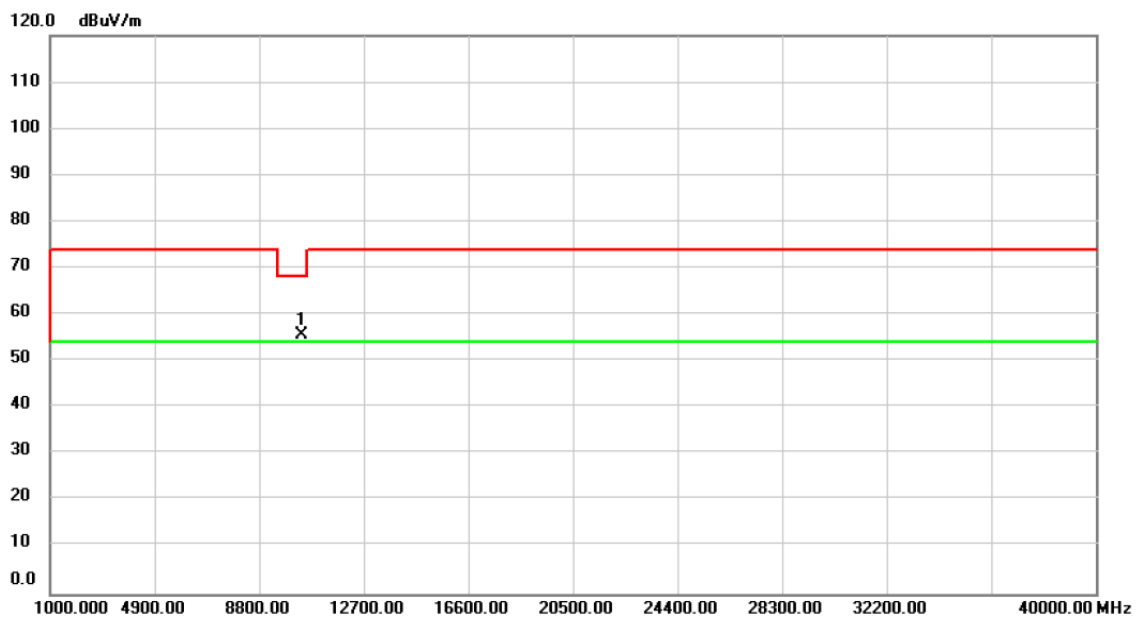

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.60	1.92	55.52	68.20	-12.68	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5200 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Vertical

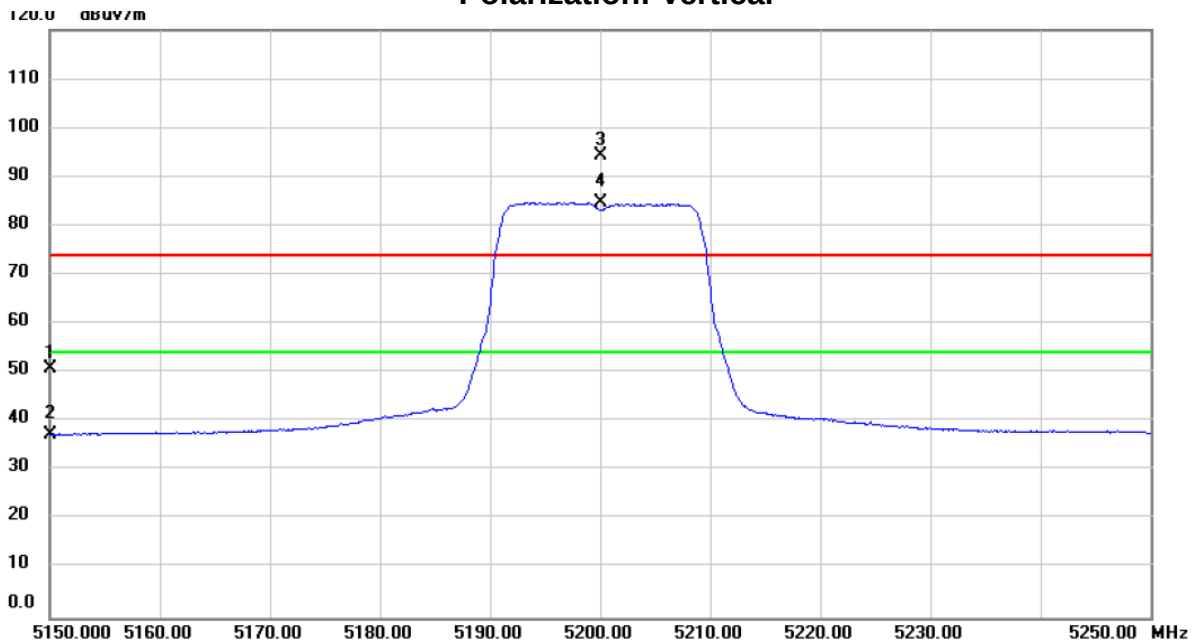

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.000	13.38	37.54	50.92	74.00	-23.08	peak	
2	5150.000	-0.16	37.54	37.38	54.00	-16.62	AVG	
3 X	5200.000	56.75	37.60	94.35	74.00	20.35	peak	No Limit
4 *	5200.000	47.17	37.60	84.77	54.00	30.77	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5200
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Vertical

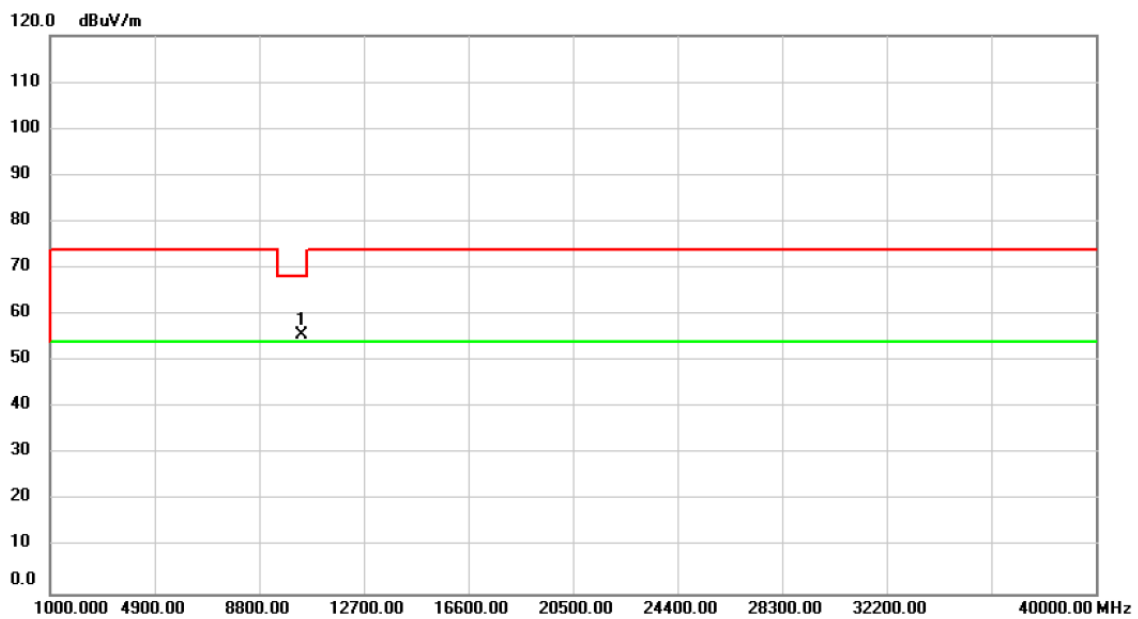

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	53.64	1.95	55.59	68.20	-12.61	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5200 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Horizontal

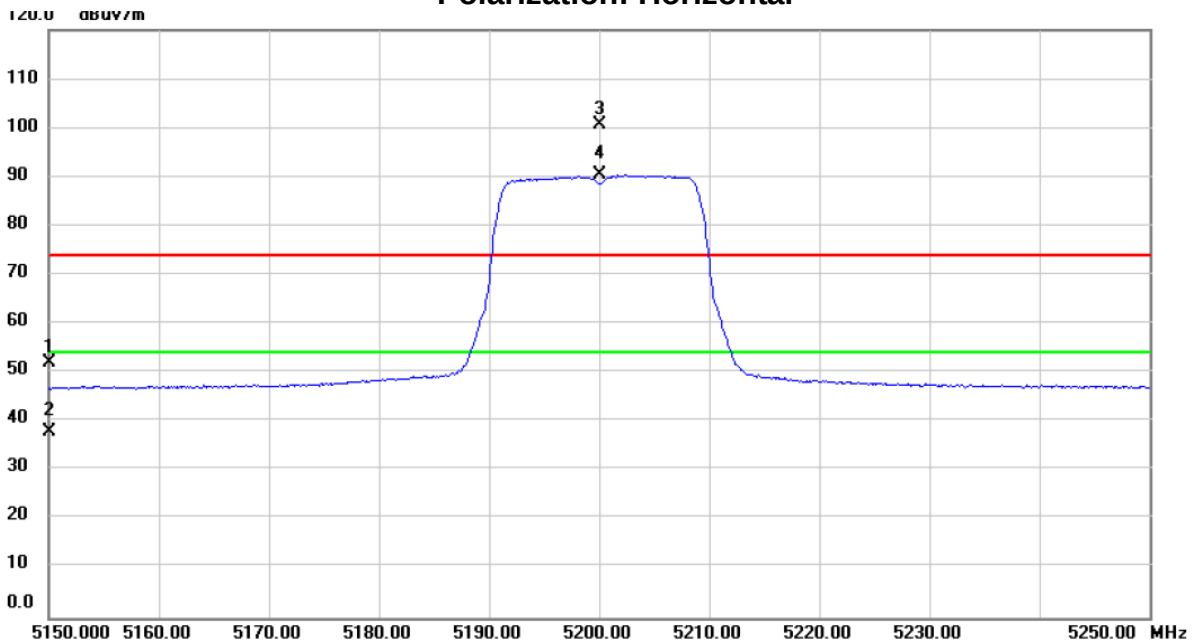

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.000	14.37	37.54	51.91	74.00	-22.09	peak	
2	5150.000	0.45	37.54	37.99	54.00	-16.01	AVG	
3 X	5200.000	63.10	37.60	100.70	74.00	26.70	peak	No Limit
4 *	5200.000	52.95	37.60	90.55	54.00	36.55	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5200
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Horizontal

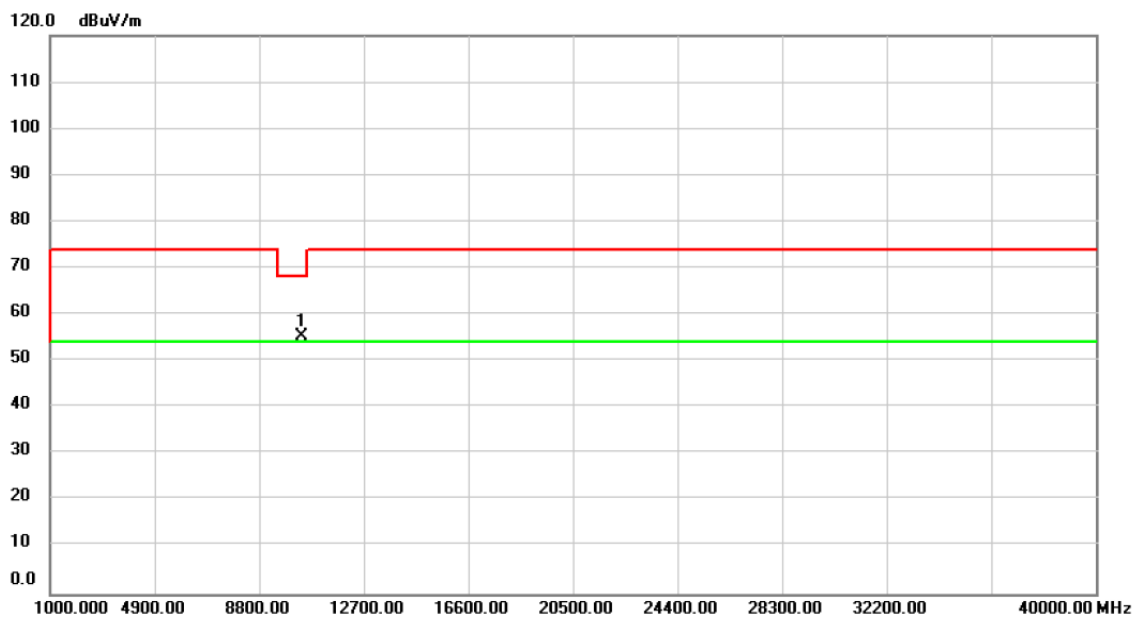

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.42	1.95	55.37	68.20	-12.83	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

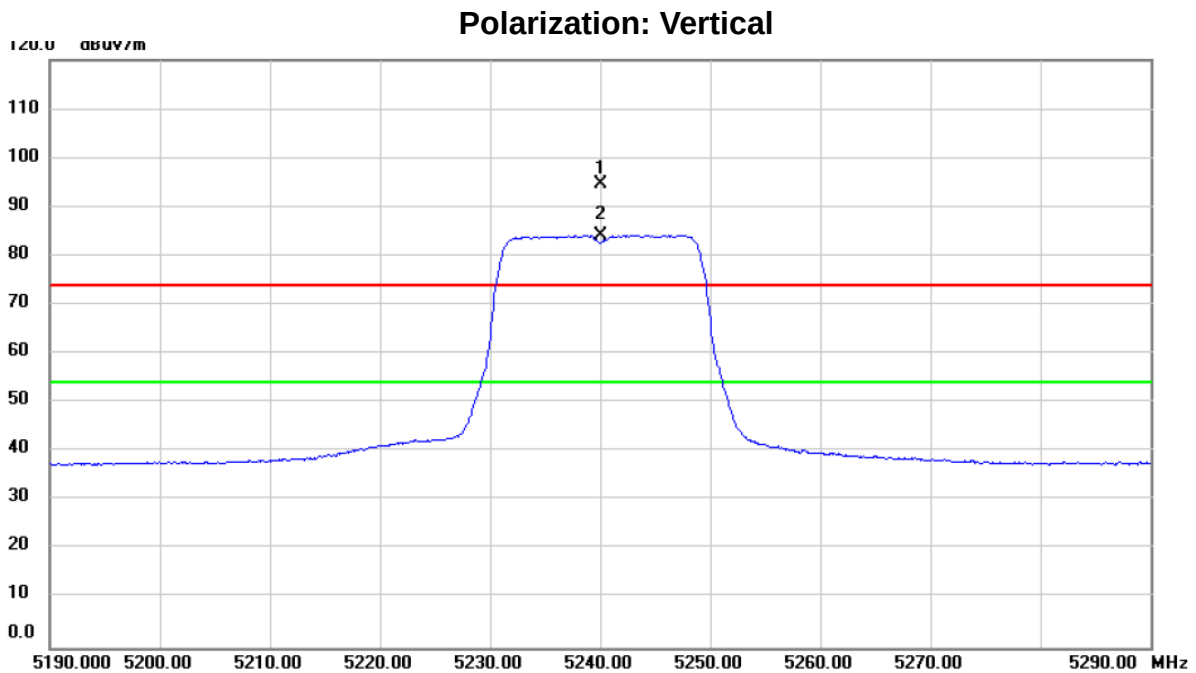


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	57.14	37.64	94.78	74.00	20.78	peak	No Limit
2	*	5240.000	46.65	37.64	84.29	54.00	30.29	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Vertical

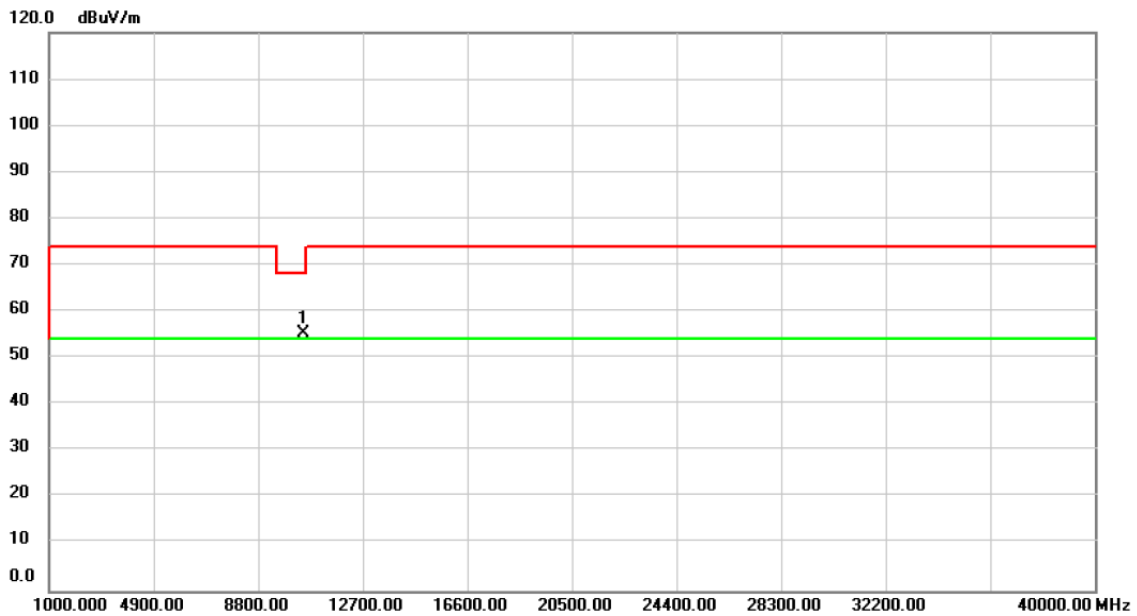

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	53.45	1.96	55.41	68.20	-12.79	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5240 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%


Polarization: Horizontal

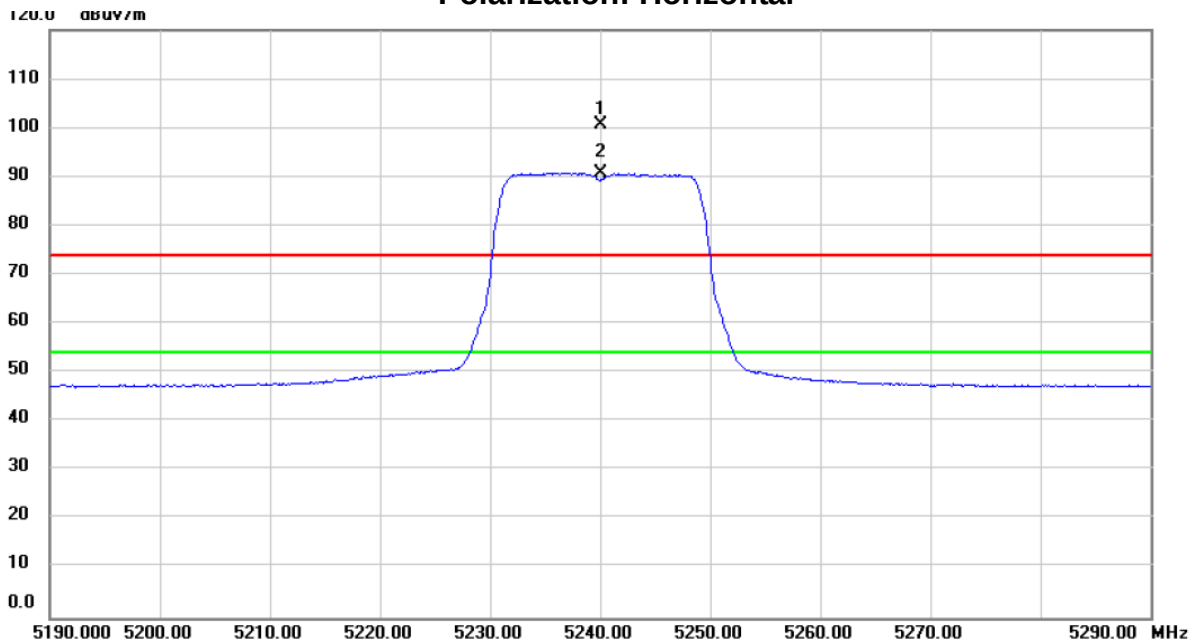

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	62.92	37.64	100.56	74.00	26.56	peak	No Limit
2	*	5240.000	53.23	37.64	90.87	54.00	36.87	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5240
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

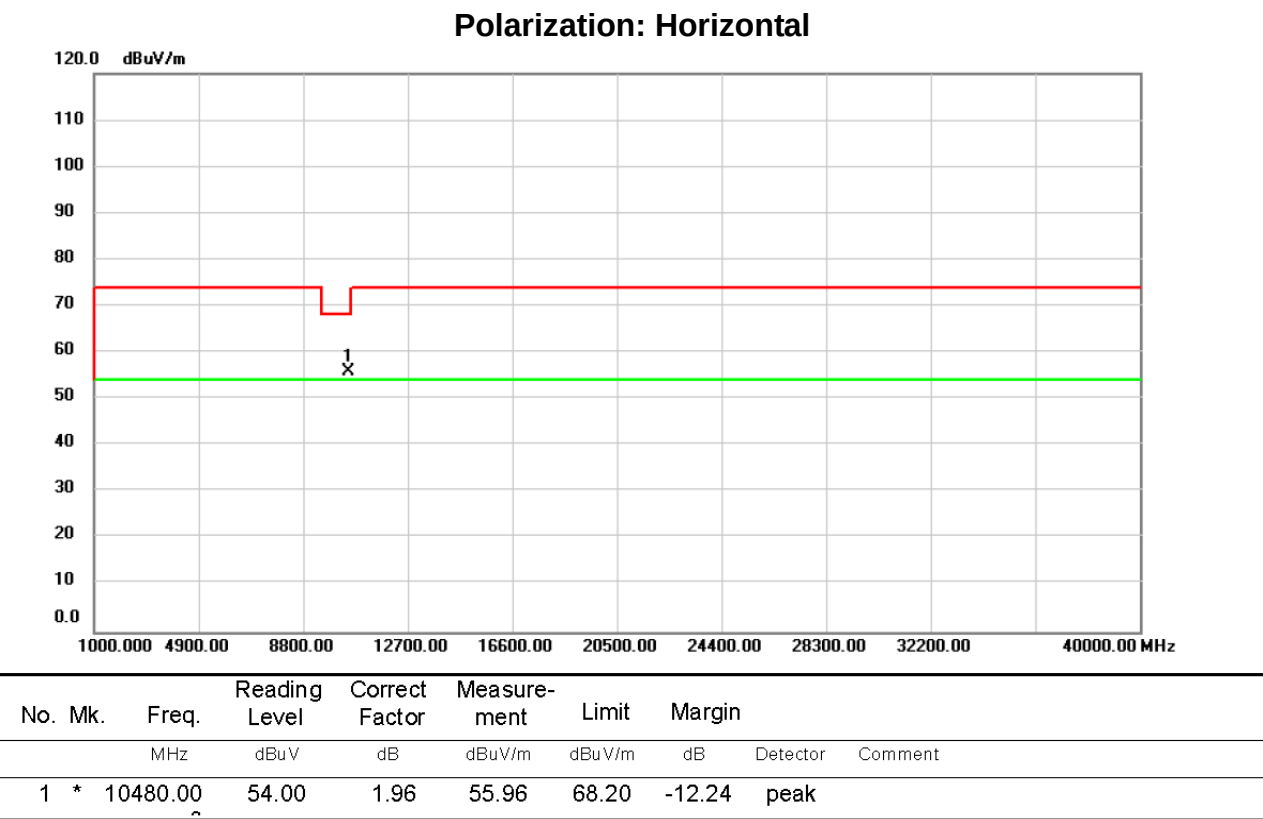

測試頻道: IEEE 802.11ac (VHT40) / 5190
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Vertical

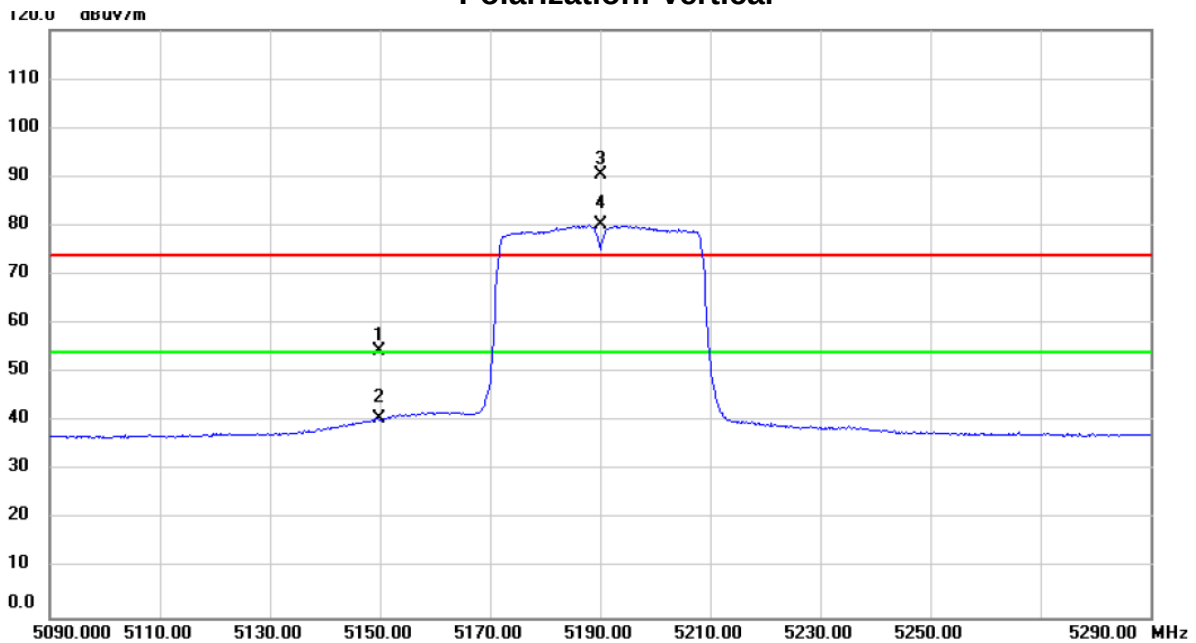


Io. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5149.940	16.80	37.54	54.34	74.00	-19.66	peak	
2	5149.940	3.11	37.54	40.65	54.00	-13.35	AVG	
3 X	5190.000	52.73	37.58	90.31	74.00	16.31	peak	No Limit
4 *	5190.000	42.54	37.58	80.12	54.00	26.12	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT40) / 5190 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Vertical

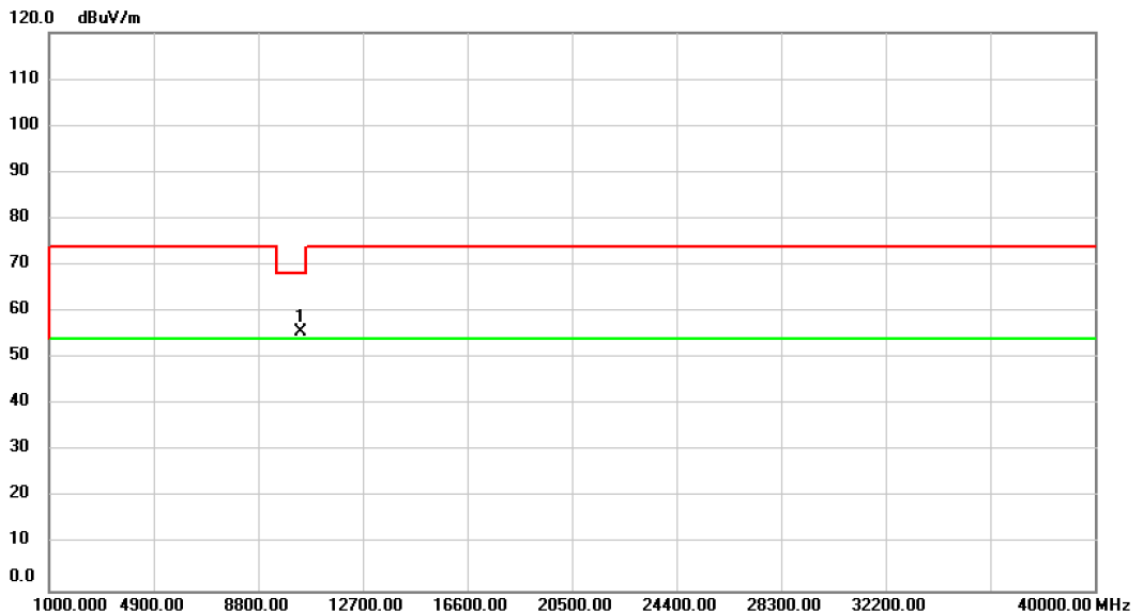

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10380.00	53.65	1.94	55.59	68.20	-12.61	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5190 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Horizontal

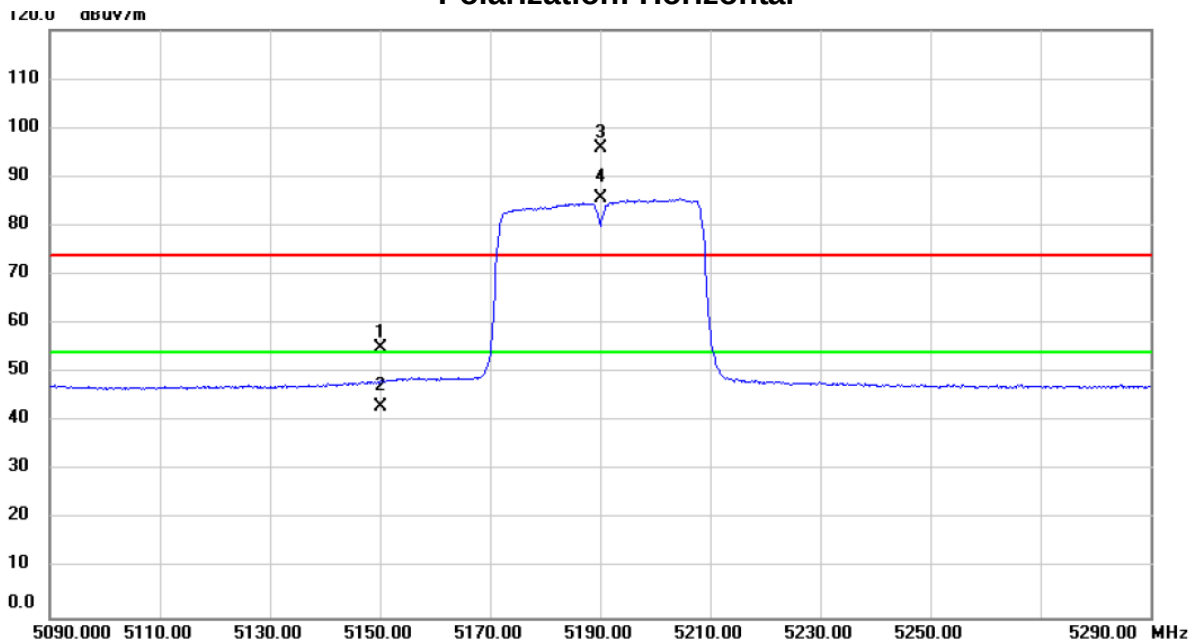

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.000	17.54	37.54	55.08	74.00	-18.92	peak	
2	5150.000	5.61	37.54	43.15	54.00	-10.85	AVG	
3 X	5190.000	58.26	37.58	95.84	74.00	21.84	peak	No Limit
4 *	5190.000	48.08	37.58	85.66	54.00	31.66	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT40) / 5190 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

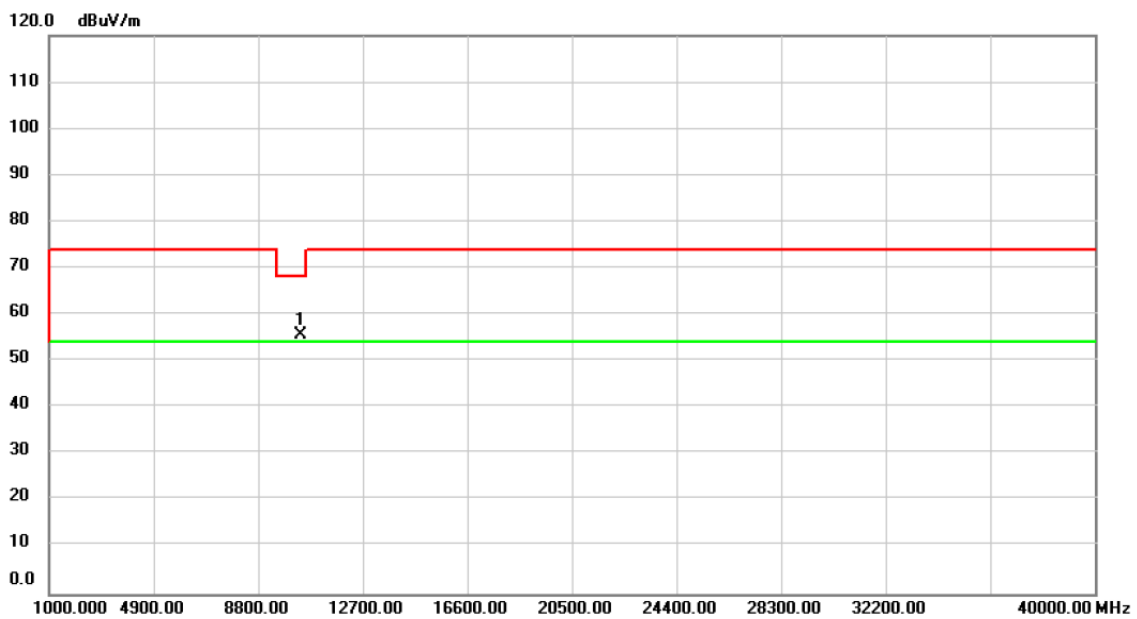

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10380.00	53.71	1.94	55.65	68.20	-12.55	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5230
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

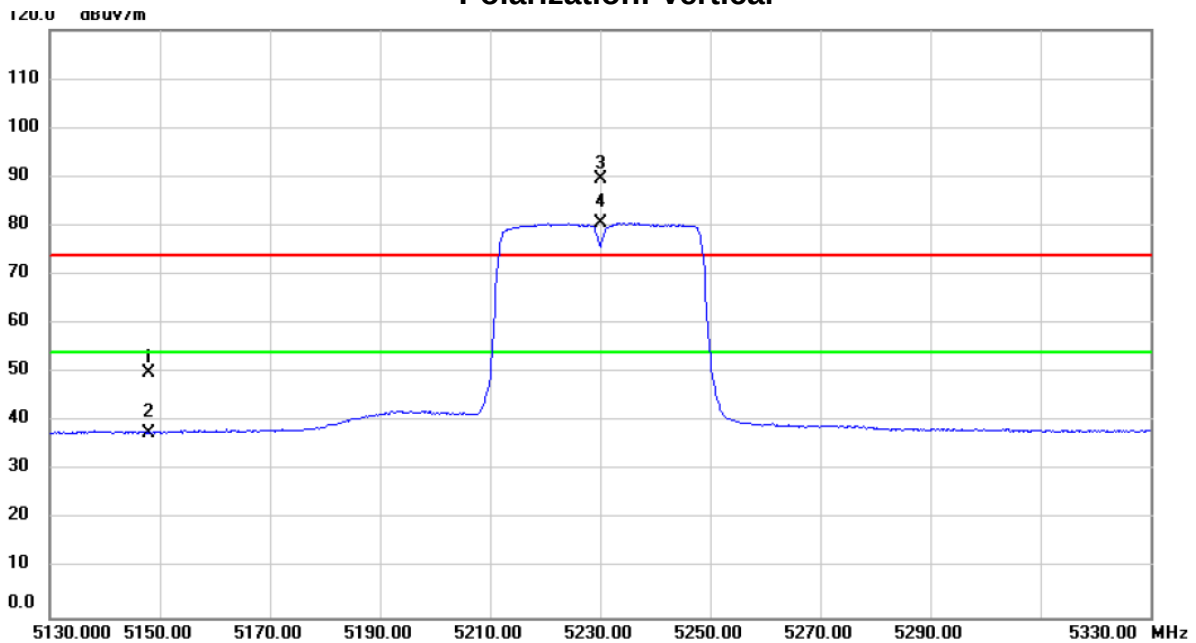

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5148.120	12.30	37.54	49.84	74.00	-24.16	peak	
2	5148.120	-0.03	37.54	37.51	54.00	-16.49	AVG	
3 X	5230.000	51.99	37.63	89.62	74.00	15.62	peak	No Limit
4 *	5230.000	43.02	37.63	80.65	54.00	26.65	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT40) / 5230
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

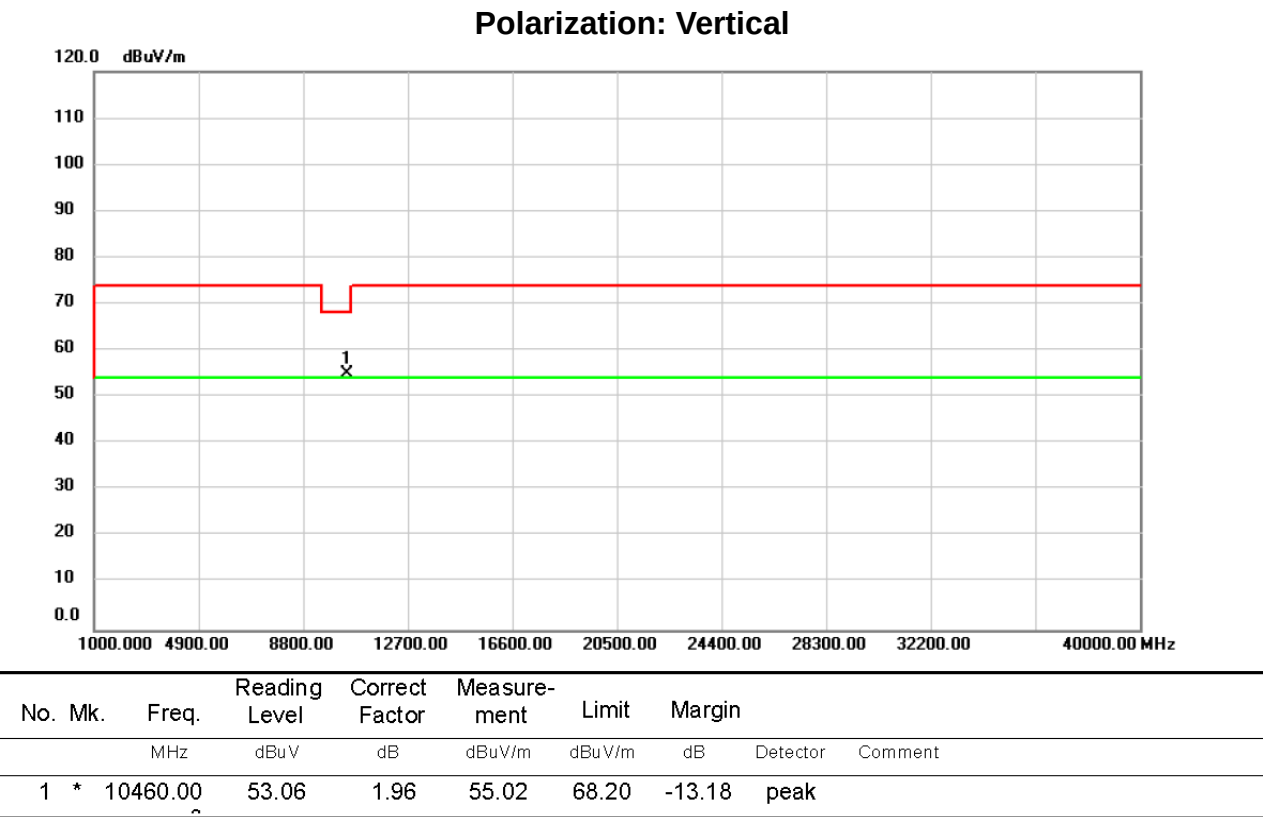

測試頻道: IEEE 802.11ac (VHT40) / 5230 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Horizontal

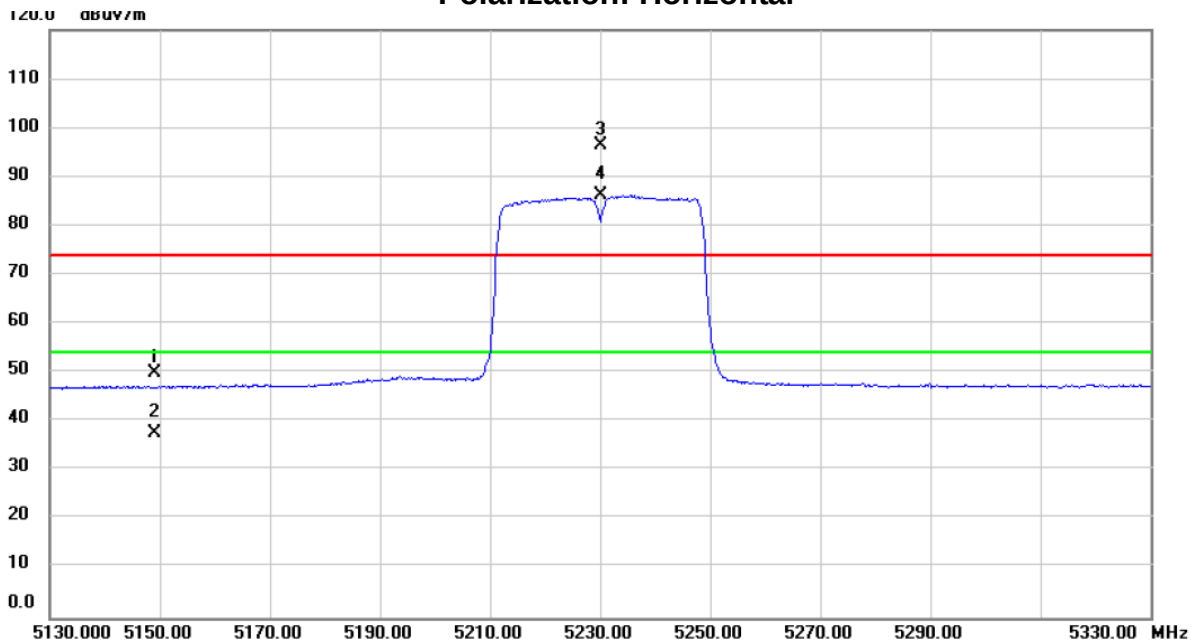


Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5148.960	12.40	37.54	49.94	74.00	-24.06	peak	
2	5148.960	0.06	37.54	37.60	54.00	-16.40	AVG	
3 X	5230.000	58.70	37.63	96.33	74.00	22.33	peak	No Limit
4 *	5230.000	48.52	37.63	86.15	54.00	32.15	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT40) / 5230 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

Polarization: Horizontal

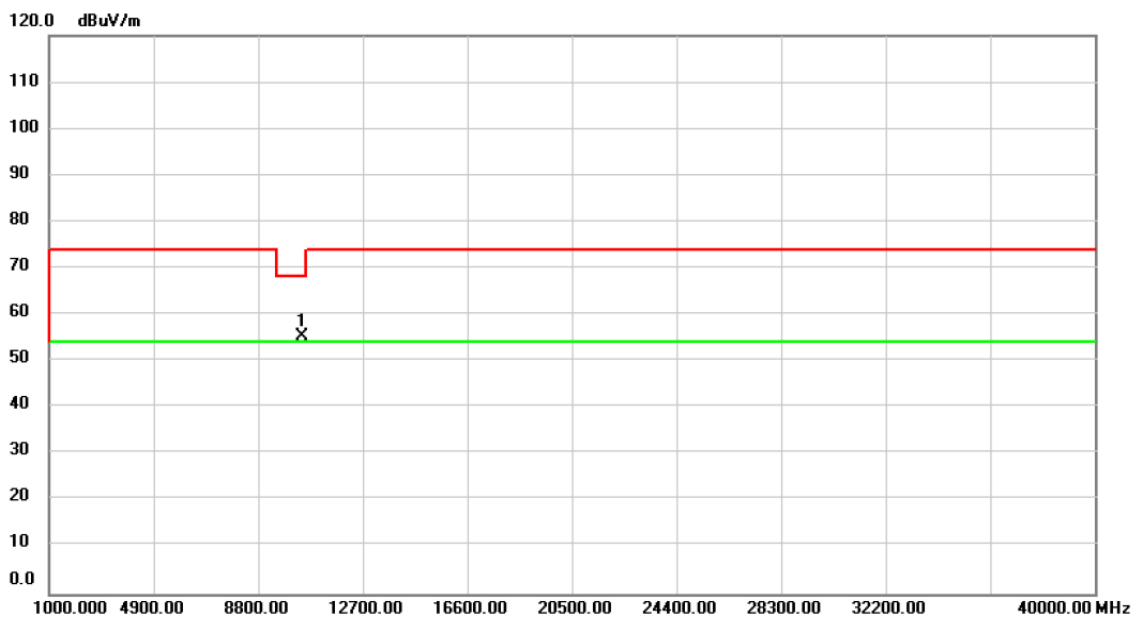

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.00	53.40	1.96	55.36	68.20	-12.84	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5210
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Vertical

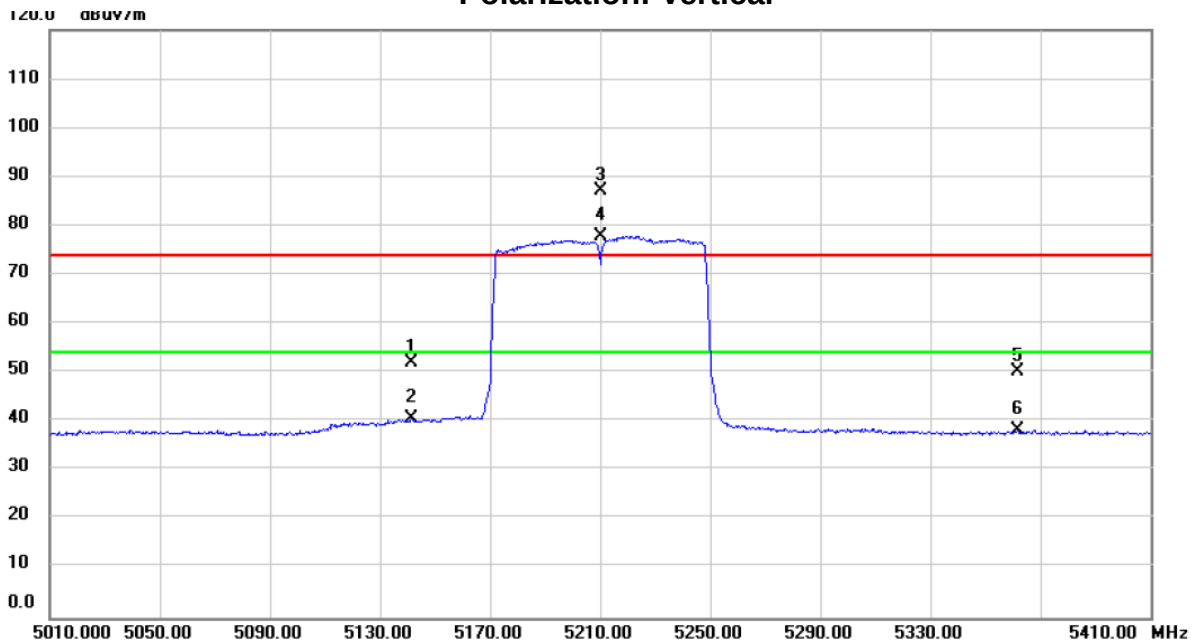

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5141.600	14.57	37.53	52.10	74.00	-21.90	peak	
2	5141.600	2.99	37.53	40.52	54.00	-13.48	AVG	
3 X	5210.000	49.43	37.61	87.04	74.00	13.04	peak	No Limit
4 *	5210.000	40.26	37.61	77.87	54.00	23.87	AVG	No Limit
5	5361.600	12.42	37.77	50.19	74.00	-23.81	peak	
6	5361.600	0.50	37.77	38.27	54.00	-15.73	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

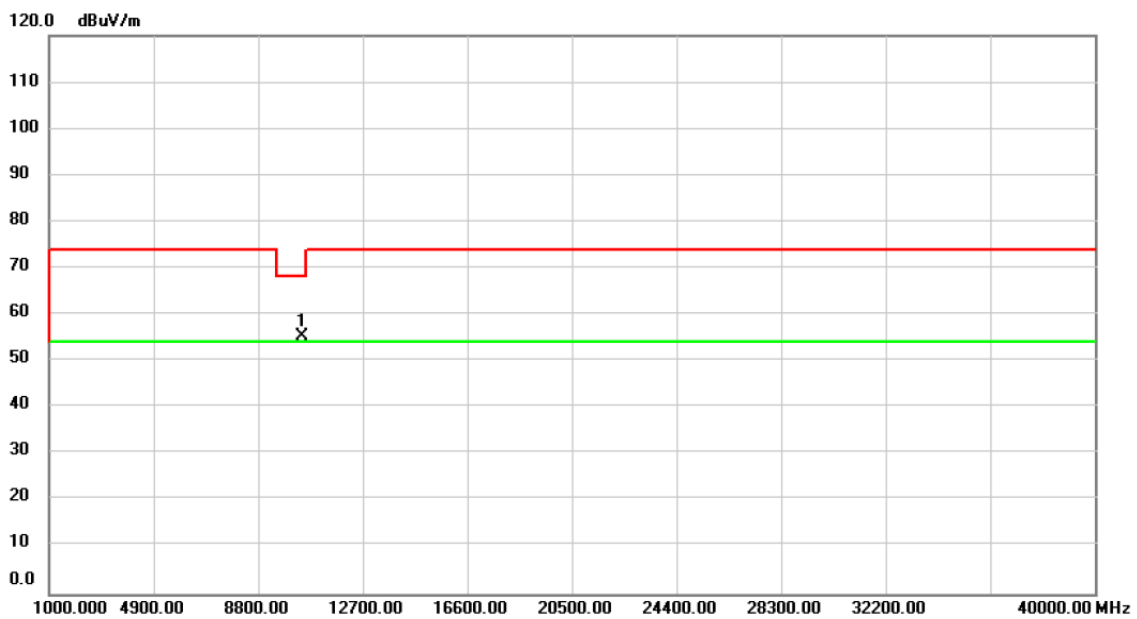

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	53.47	1.95	55.42	68.20	-12.78	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5210
MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%


Polarization: Horizontal

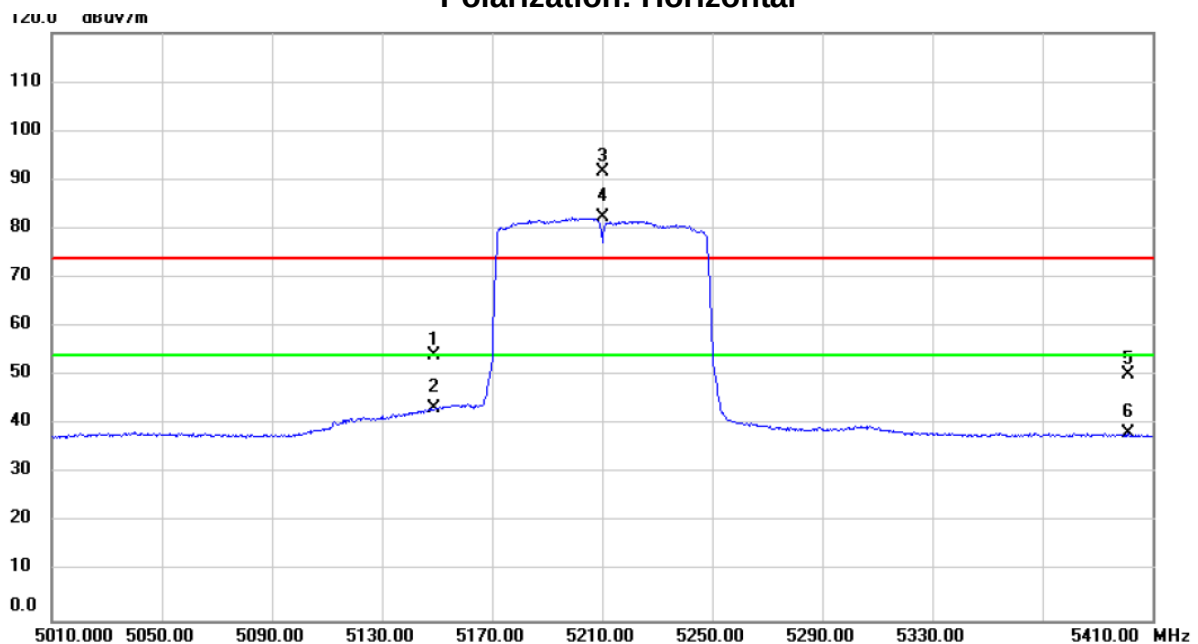

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5148.880	16.67	37.54	54.21	74.00	-19.79	peak	
2	5148.880	5.77	37.54	43.31	54.00	-10.69	AVG	
3 X	5210.000	54.05	37.61	91.66	74.00	17.66	peak	No Limit
4 *	5210.000	44.65	37.61	82.26	54.00	28.26	AVG	No Limit
5	5401.200	12.34	37.81	50.15	74.00	-23.85	peak	
6	5401.200	0.34	37.81	38.15	54.00	-15.85	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%


Polarization: Horizontal

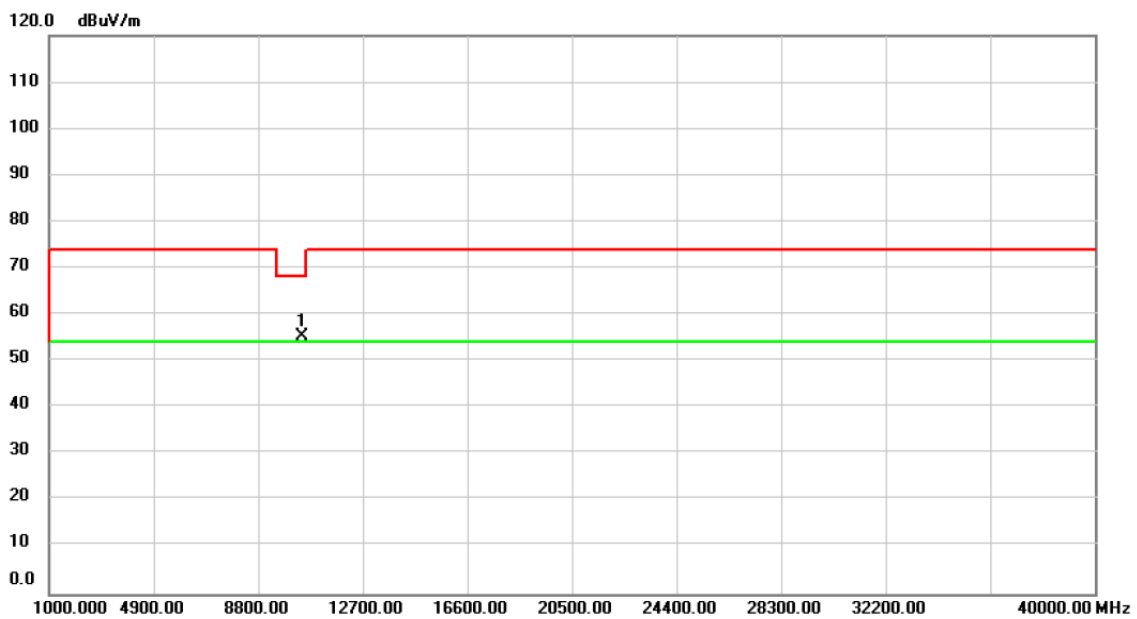

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	53.30	1.95	55.25	68.20	-12.95	peak	

測試頻道: IEEE 802.11a / 5260 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

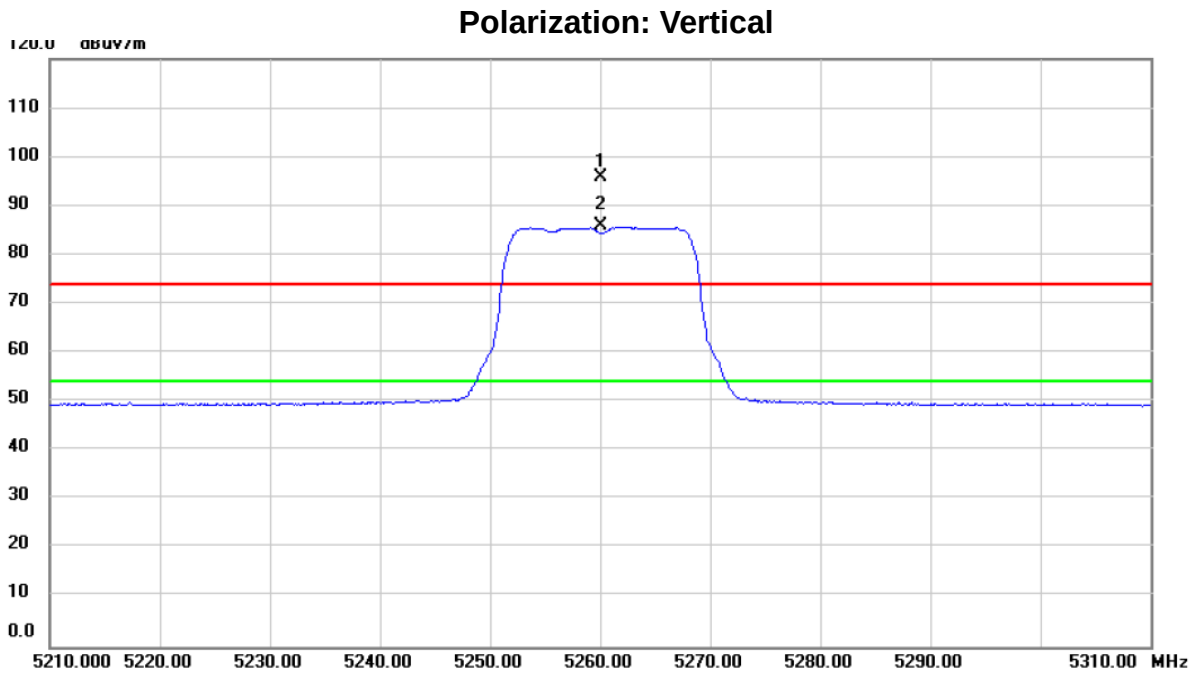

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5260.000	58.08	37.66	95.74	74.00	21.74	peak	No Limit
2	*	5260.000	48.22	37.66	85.88	54.00	31.88	AVG	No Limit

測試頻道: IEEE 802.11a / 5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%

Polarization: Vertical

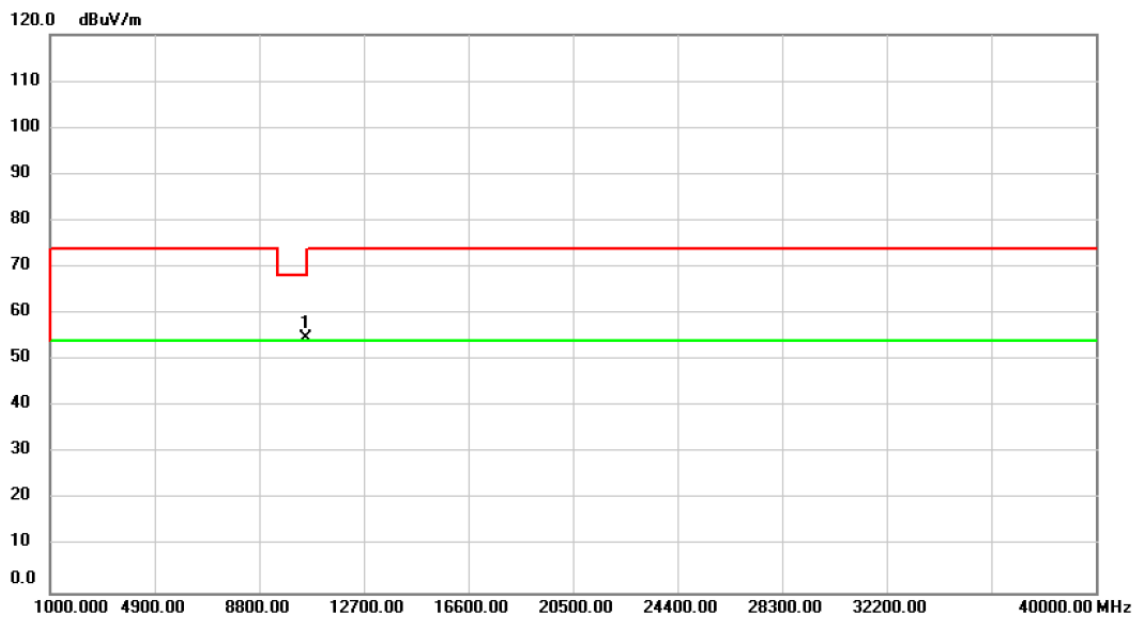


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.85	2.00	54.85	68.20	-13.35	peak	

測試頻道: IEEE 802.11a / 5260 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

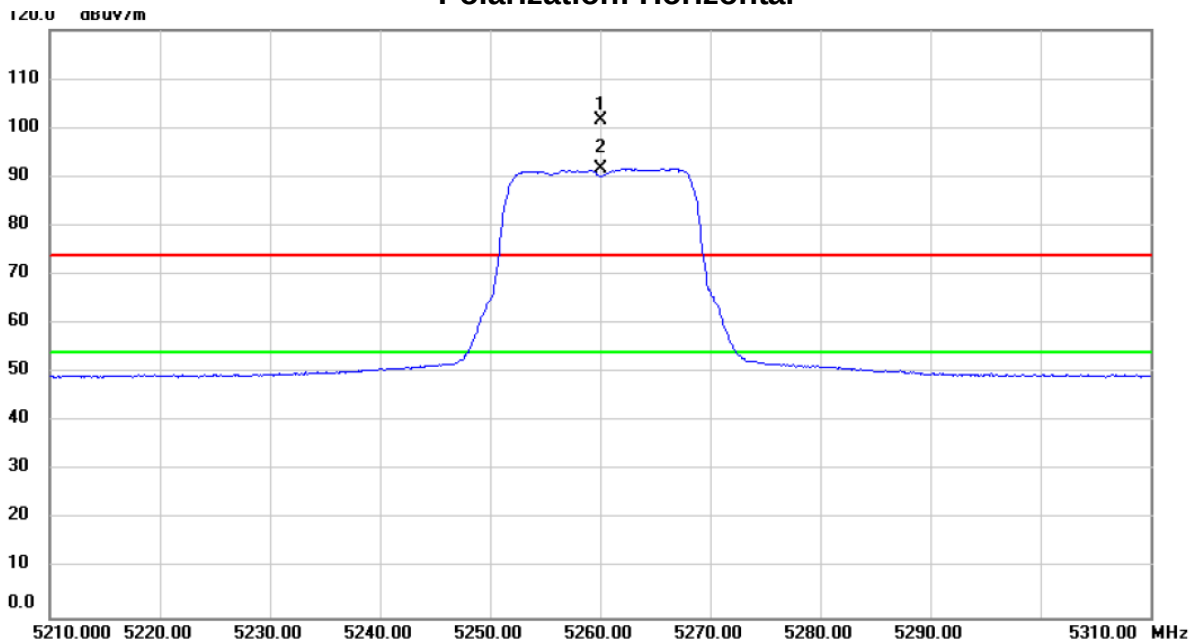

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5260.000	63.85	37.66	101.51	74.00	27.51	peak	No Limit
2	*	5260.000	54.01	37.66	91.67	54.00	37.67	AVG	No Limit

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

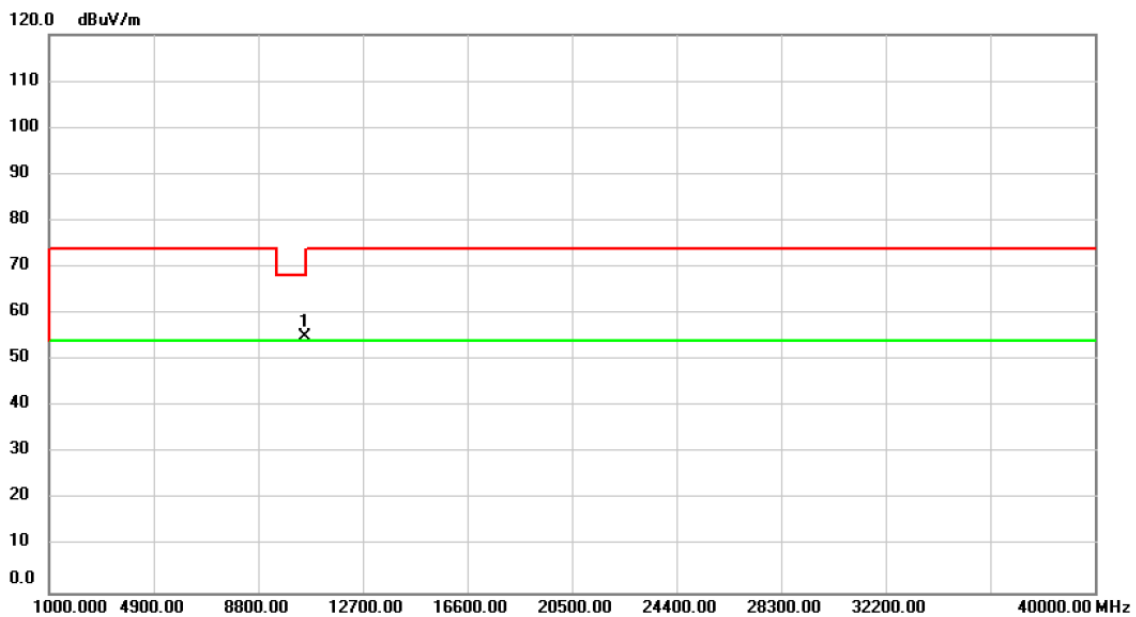
Polarization: Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.13	2.00	55.13	68.20	-13.07	peak	

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%


Polarization: Vertical

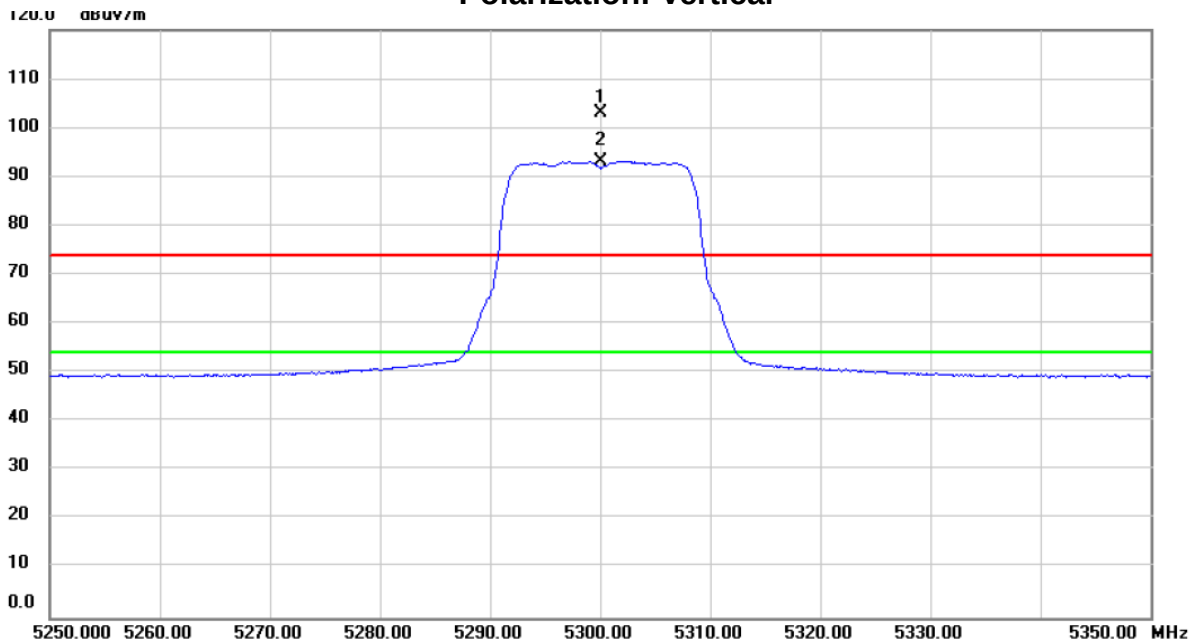

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5300.000	65.31	37.70	103.01	74.00	29.01	peak	No Limit
2	*	5300.000	55.51	37.70	93.21	54.00	39.21	AVG	No Limit

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

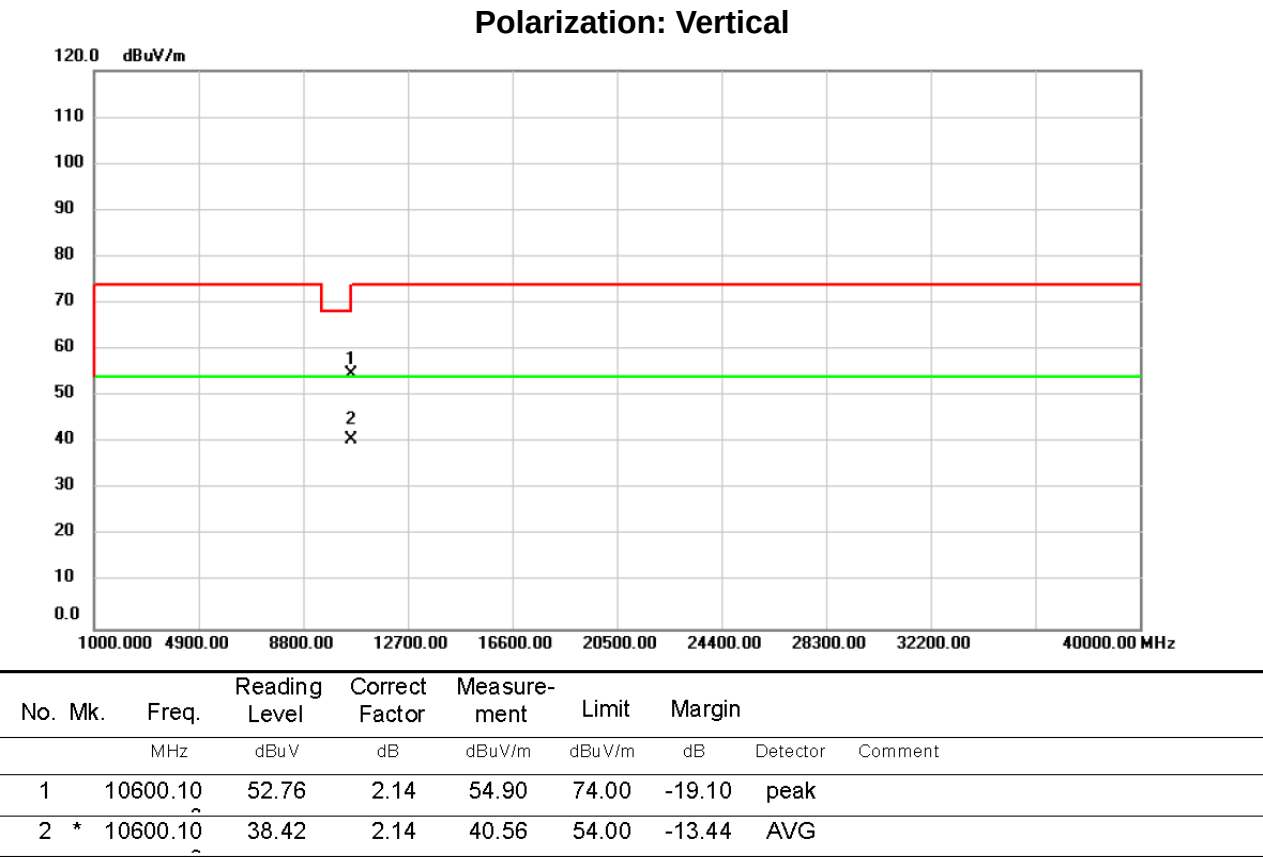

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%


Polarization: Horizontal

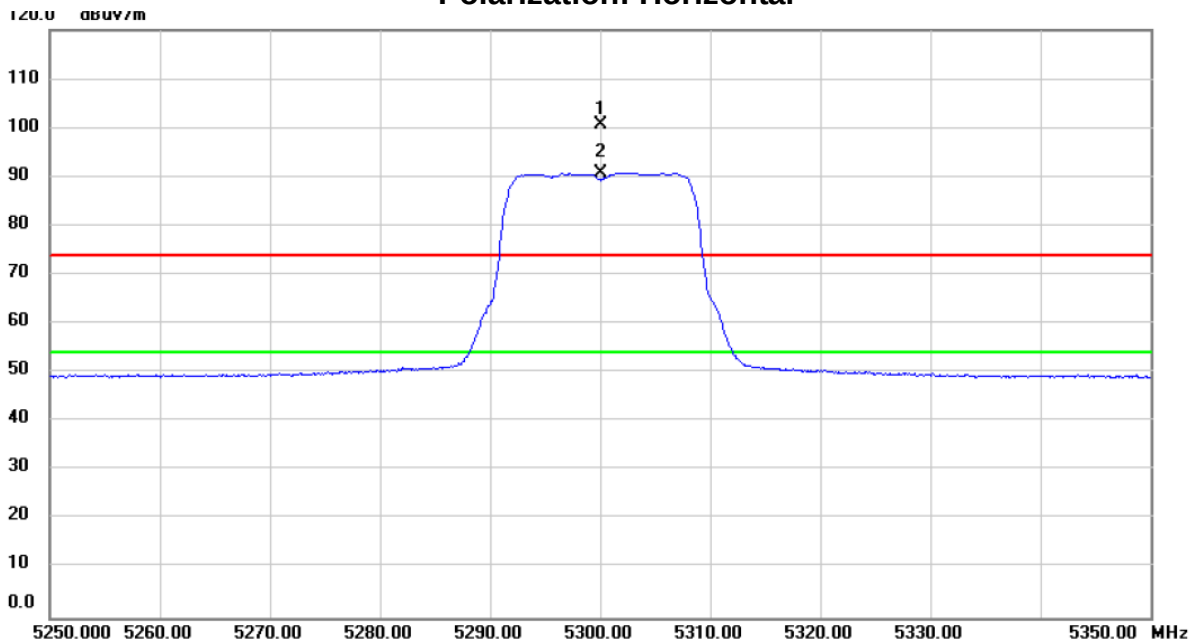

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5300.000	63.02	37.70	100.72	74.00	26.72	peak	No Limit
2	*	5300.000	53.17	37.70	90.87	54.00	36.87	AVG	No Limit


測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

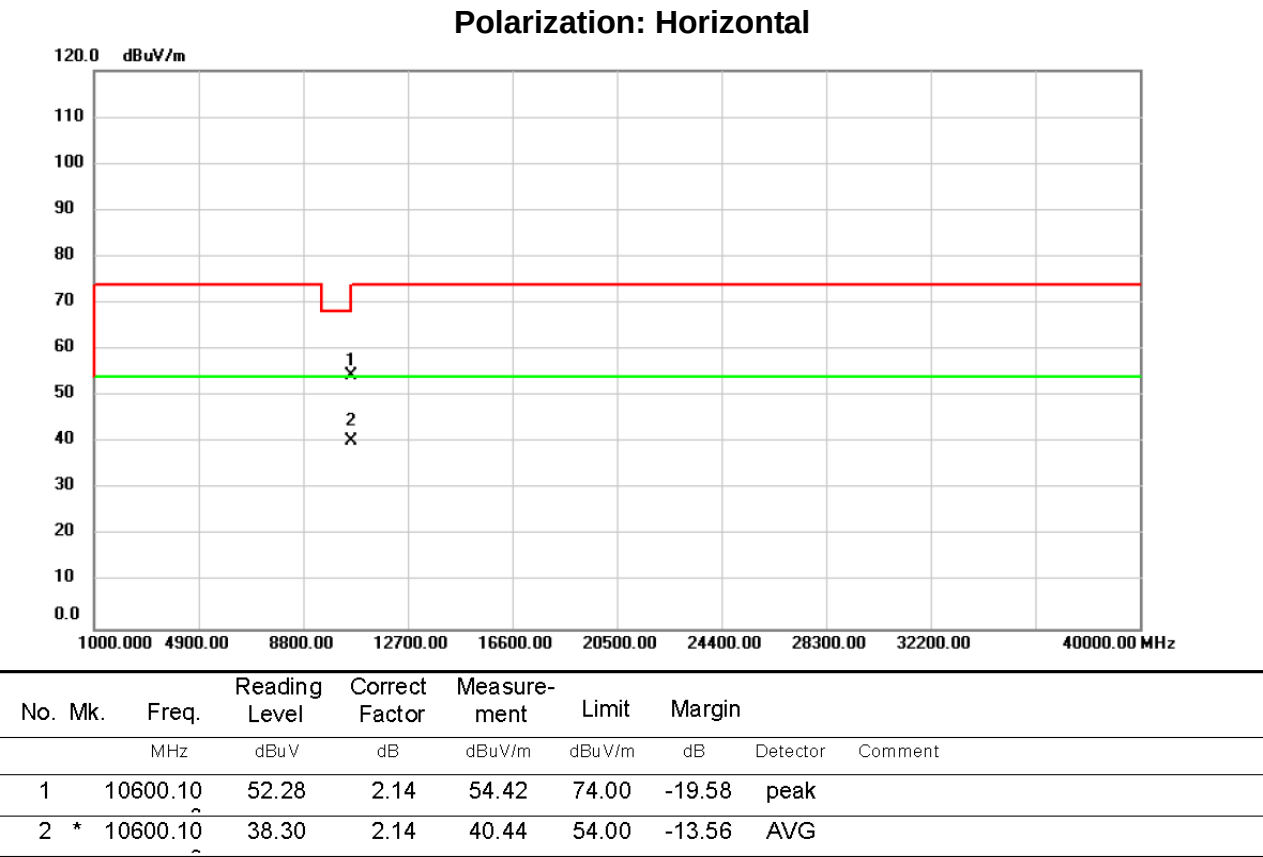

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

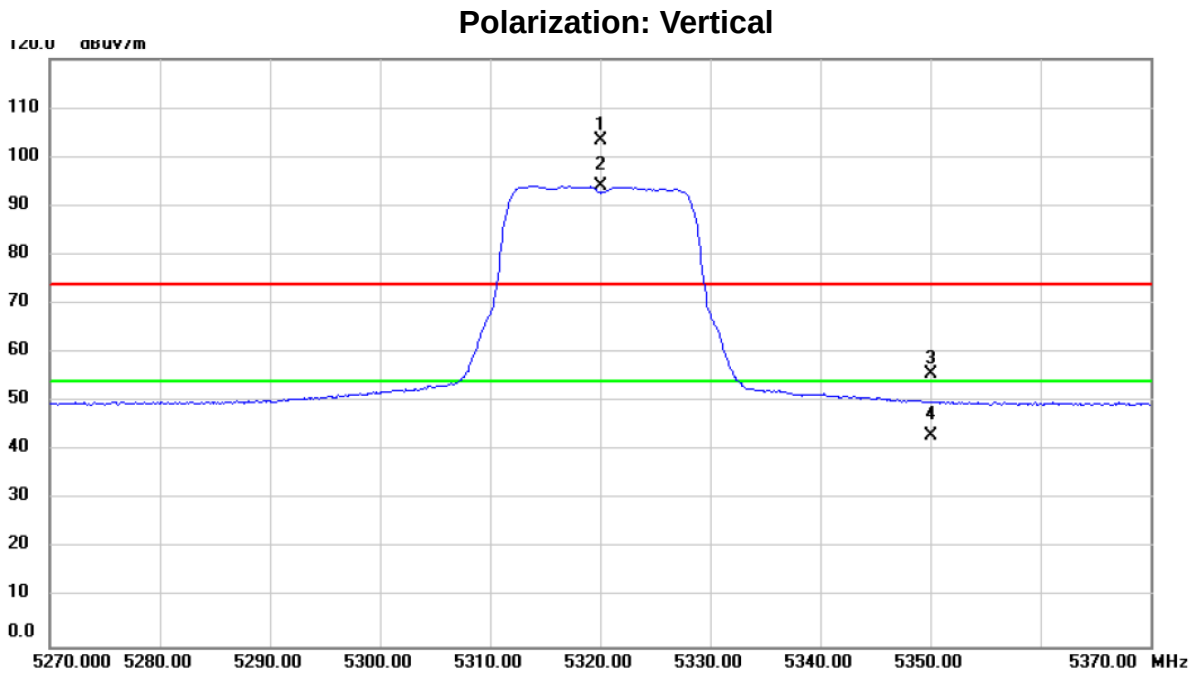

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5320.000	65.78	37.72	103.50	74.00	29.50	peak	No Limit
2	*	5320.000	56.27	37.72	93.99	54.00	39.99	AVG	No Limit
3		5350.040	17.83	37.76	55.59	74.00	-18.41	peak	
4		5350.040	5.28	37.76	43.04	54.00	-10.96	AVG	

測試頻道: IEEE 802.11a / 5320 MHz

測試模式: TX / X 軸

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10Hz

量測天線: Horn Antenna

測試距離: 3 米


檢 測 器: Peak/AV

測試日期: 107/01/02

環境溫度: 23°C

環境濕度: 70%

Polarization: Vertical

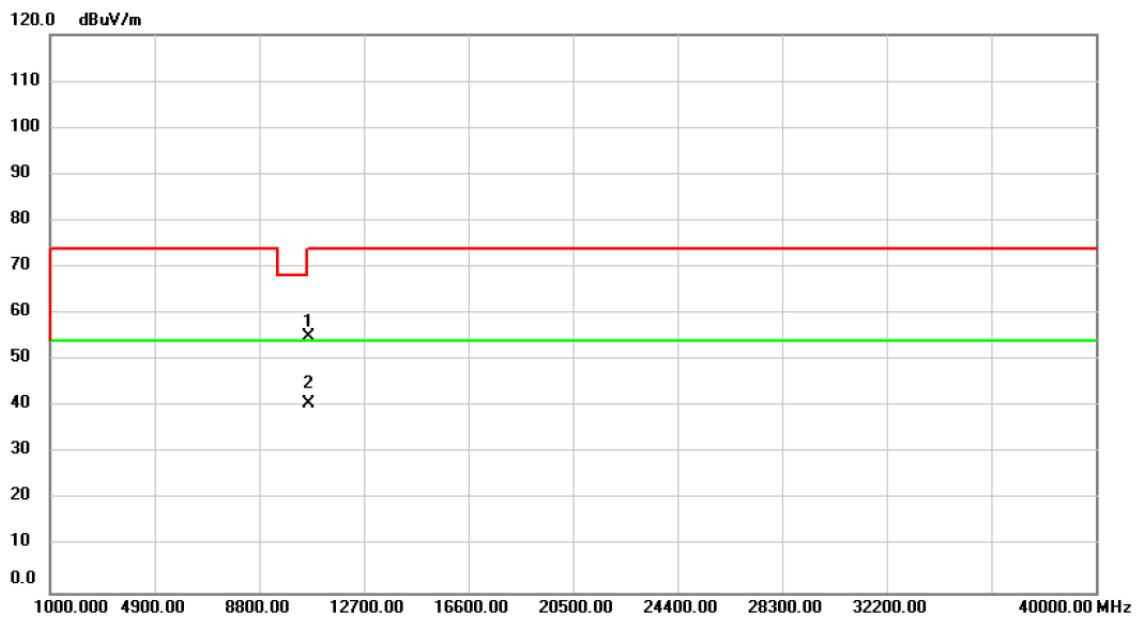


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	52.83	2.22	55.05	74.00	-18.95	peak	
2	*	10640.00	38.45	2.22	40.67	54.00	-13.33	AVG	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: TX / X 軸
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 107/01/02
環境濕度: 70%

Polarization: Horizontal

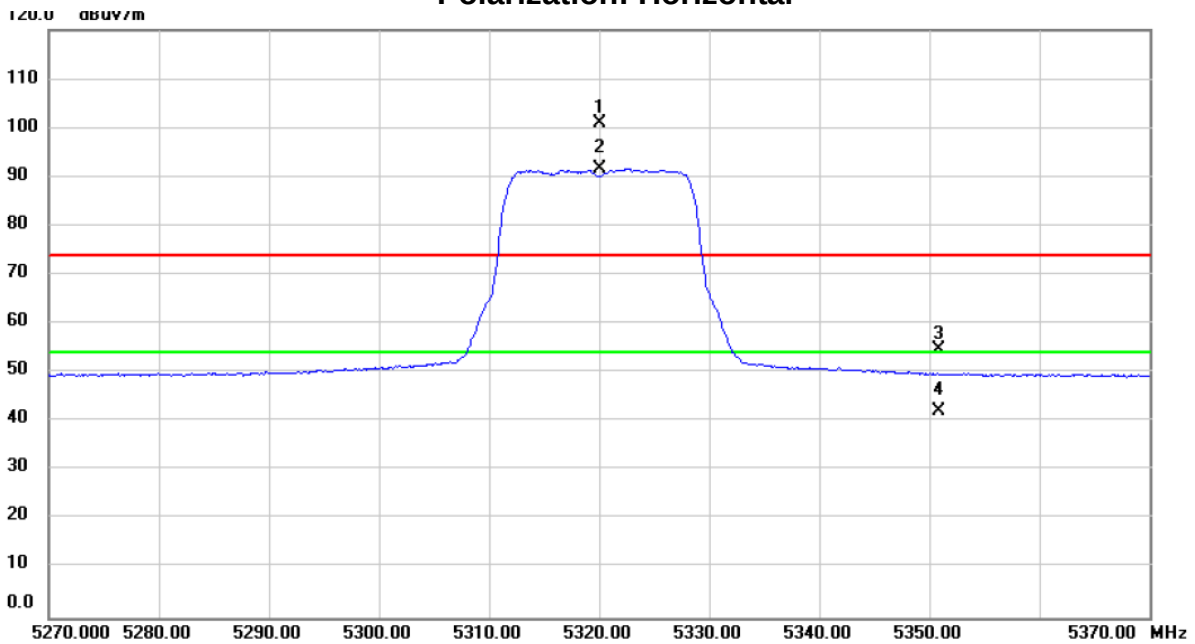

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5320.000	63.36	37.72	101.08	74.00	27.08	peak	No Limit
2	*	5320.000	53.95	37.72	91.67	54.00	37.67	AVG	No Limit
3		5350.880	16.87	37.76	54.63	74.00	-19.37	peak	
4		5350.880	4.54	37.76	42.30	54.00	-11.70	AVG	

測試頻道: IEEE 802.11a / 5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Horizontal

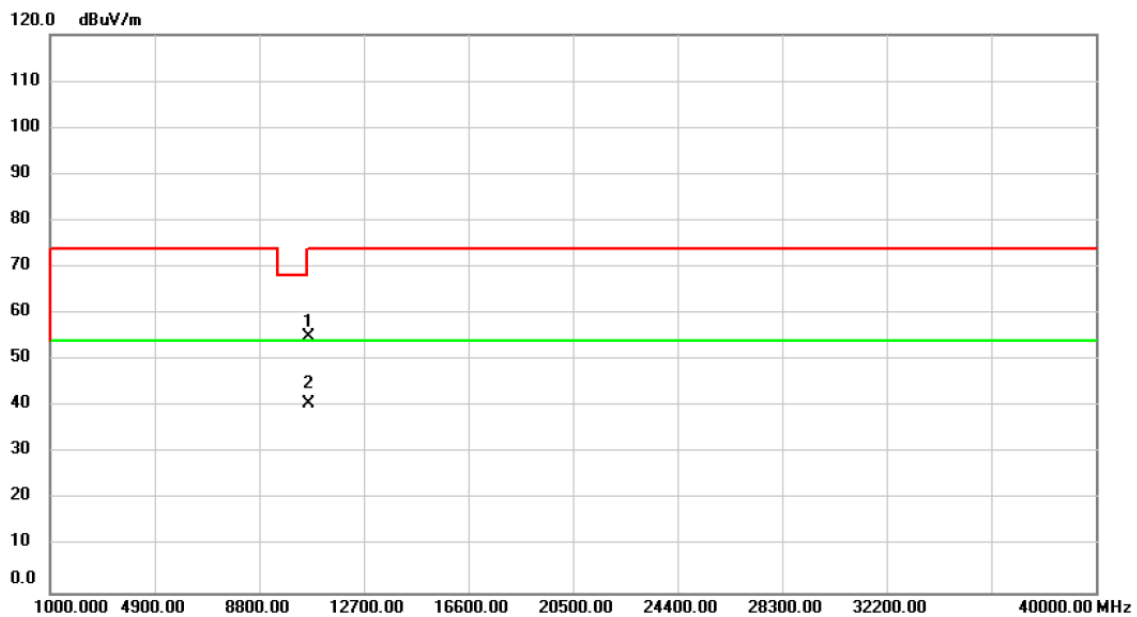

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	52.83	2.22	55.05	74.00	-18.95	peak	
2	*	10640.00	38.54	2.22	40.76	54.00	-13.24	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5260 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

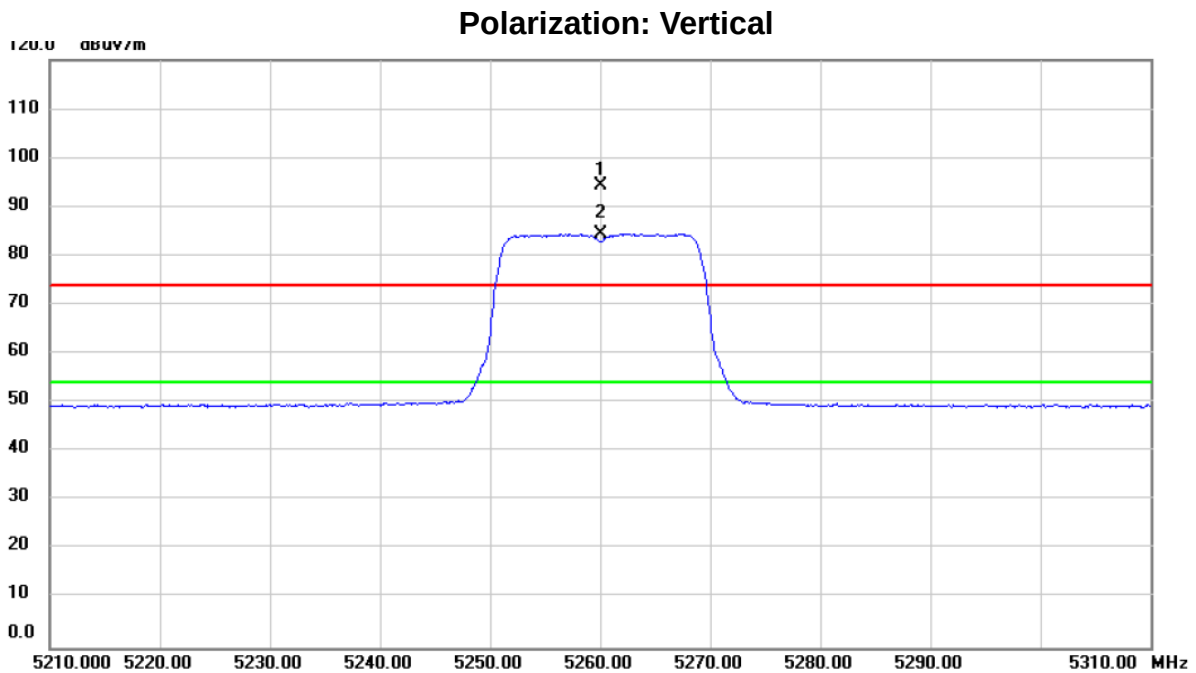

Io. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5260.000	56.59	37.66	94.25	74.00	20.25	peak	No Limit
2 *	5260.000	46.93	37.66	84.59	54.00	30.59	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5260 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Vertical

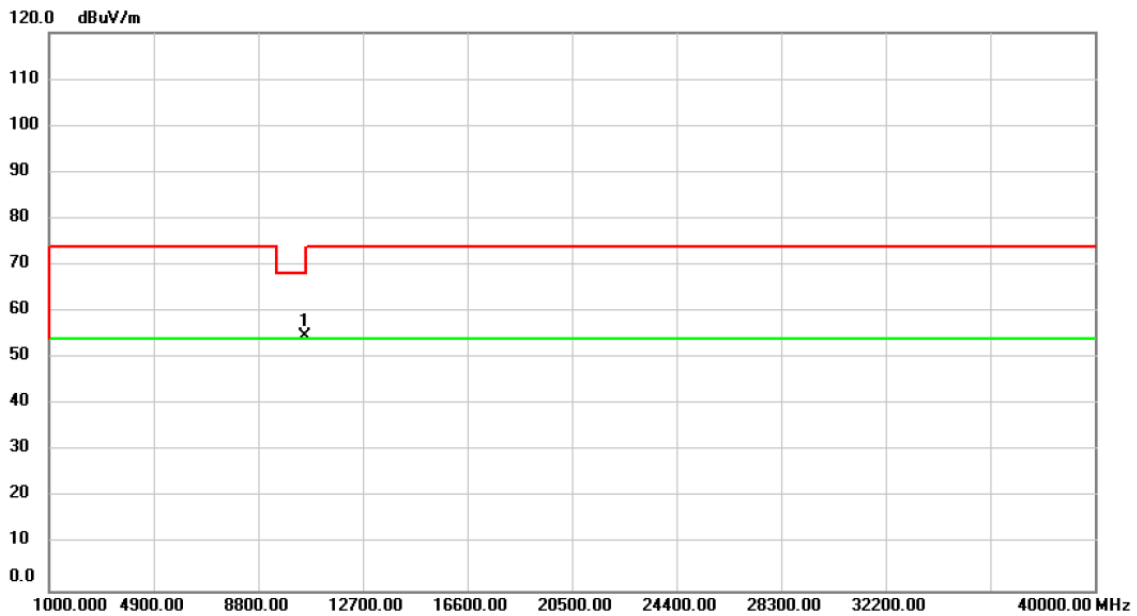

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.00	52.65	2.00	54.65	68.20	-13.55	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5260 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Horizontal

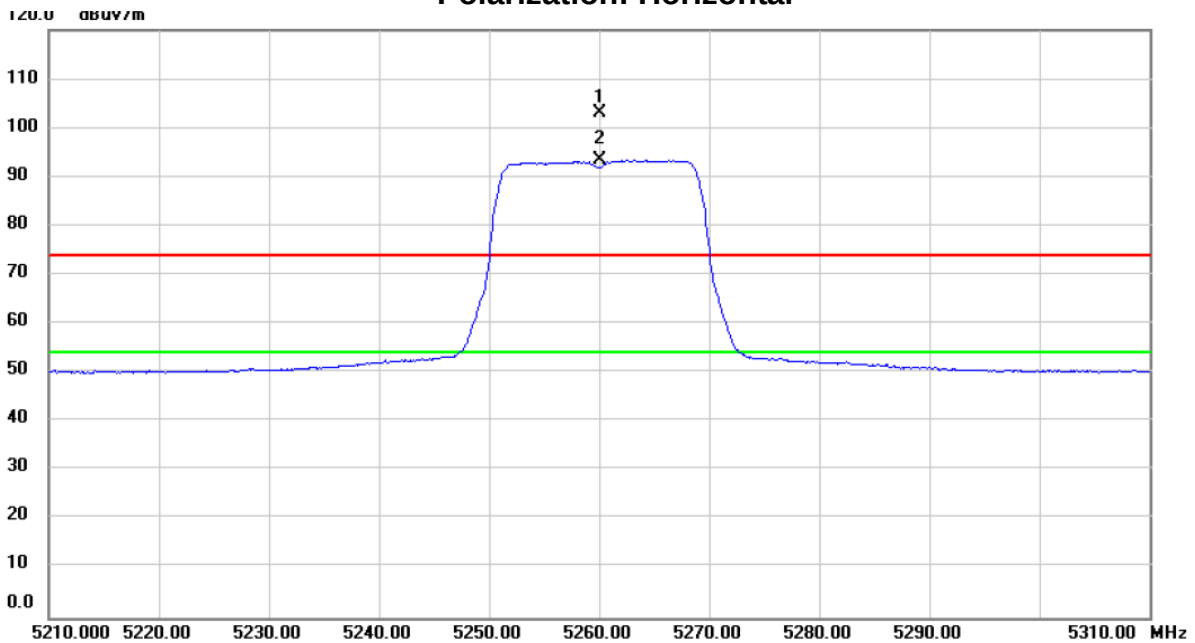

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5260.000	65.24	37.66	102.90	74.00	28.90	peak	No Limit
2 *	5260.000	55.75	37.66	93.41	54.00	39.41	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5260
MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: TX / X 軸


視頻頻寬: 1000 kHz / 10Hz

測試距離: 3 米

測試日期: 107/01/02

環境濕度: 70%


Polarization: Horizontal

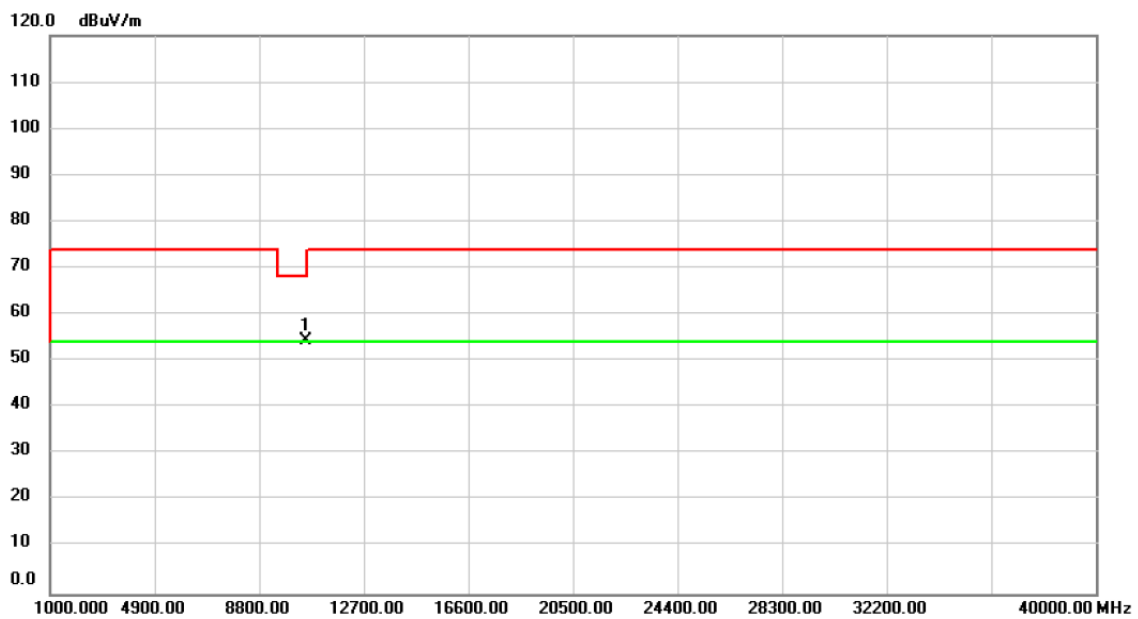

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	52.42	2.00	54.42	68.20	-13.78	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5300 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%


Polarization: Vertical

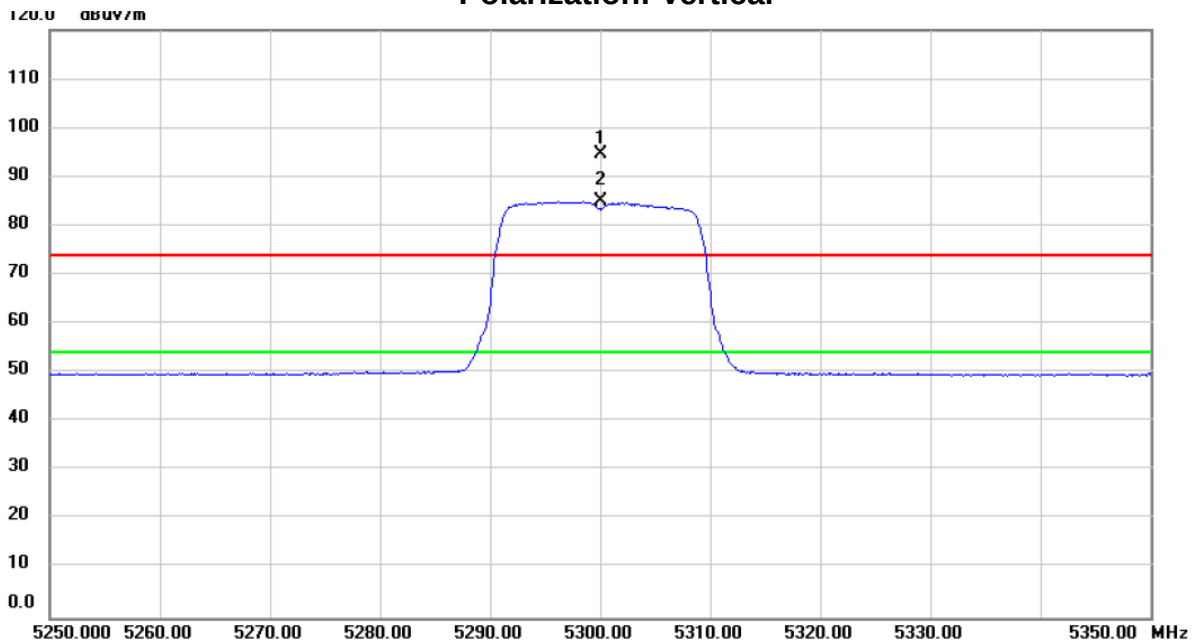

Io. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	5300.000	56.86	37.70	94.56	74.00	20.56	peak	No Limit
2 *	5300.000	47.21	37.70	84.91	54.00	30.91	AVG	No Limit


測試頻道: IEEE 802.11ac (VHT20) / 5300
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

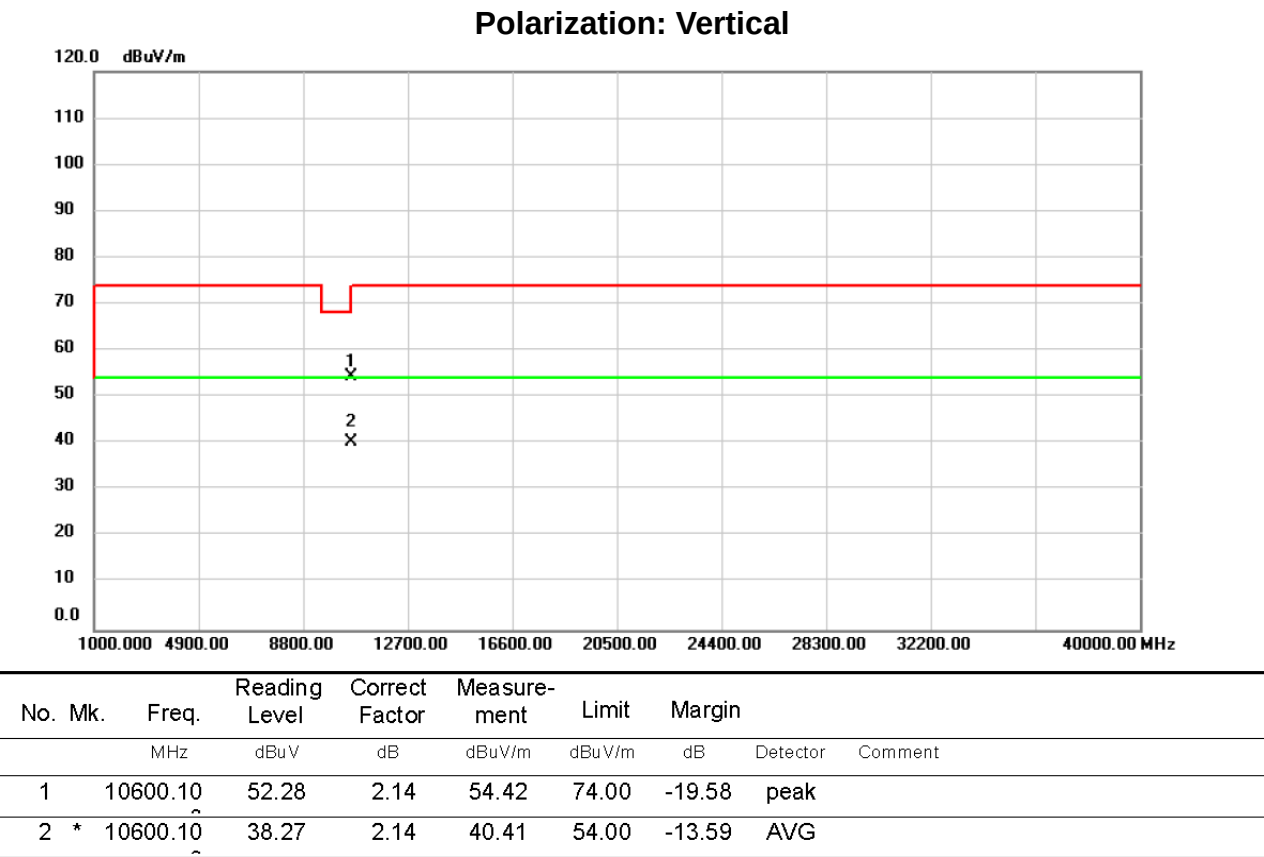

測試頻道: IEEE 802.11ac (VHT20) / 5300 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%


Polarization: Horizontal

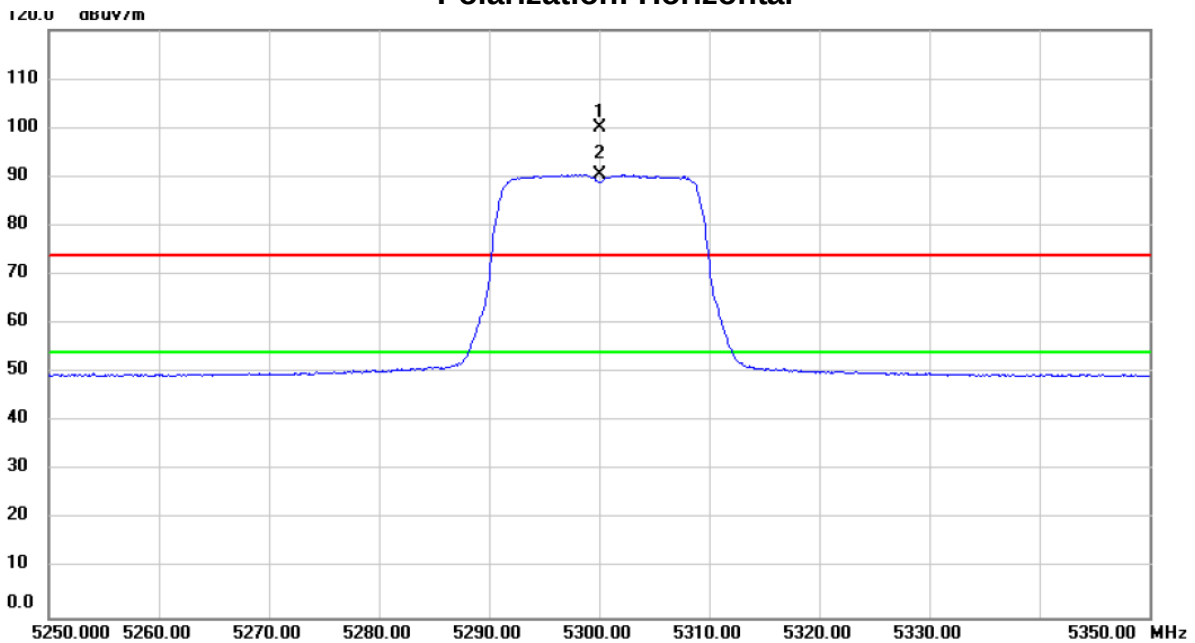


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5300.000	62.44	37.70	100.14	74.00	26.14	peak	No Limit
2	*	5300.000	52.69	37.70	90.39	54.00	36.39	AVG	No Limit

測試頻道: IEEE 802.11ac (VHT20) / 5300
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

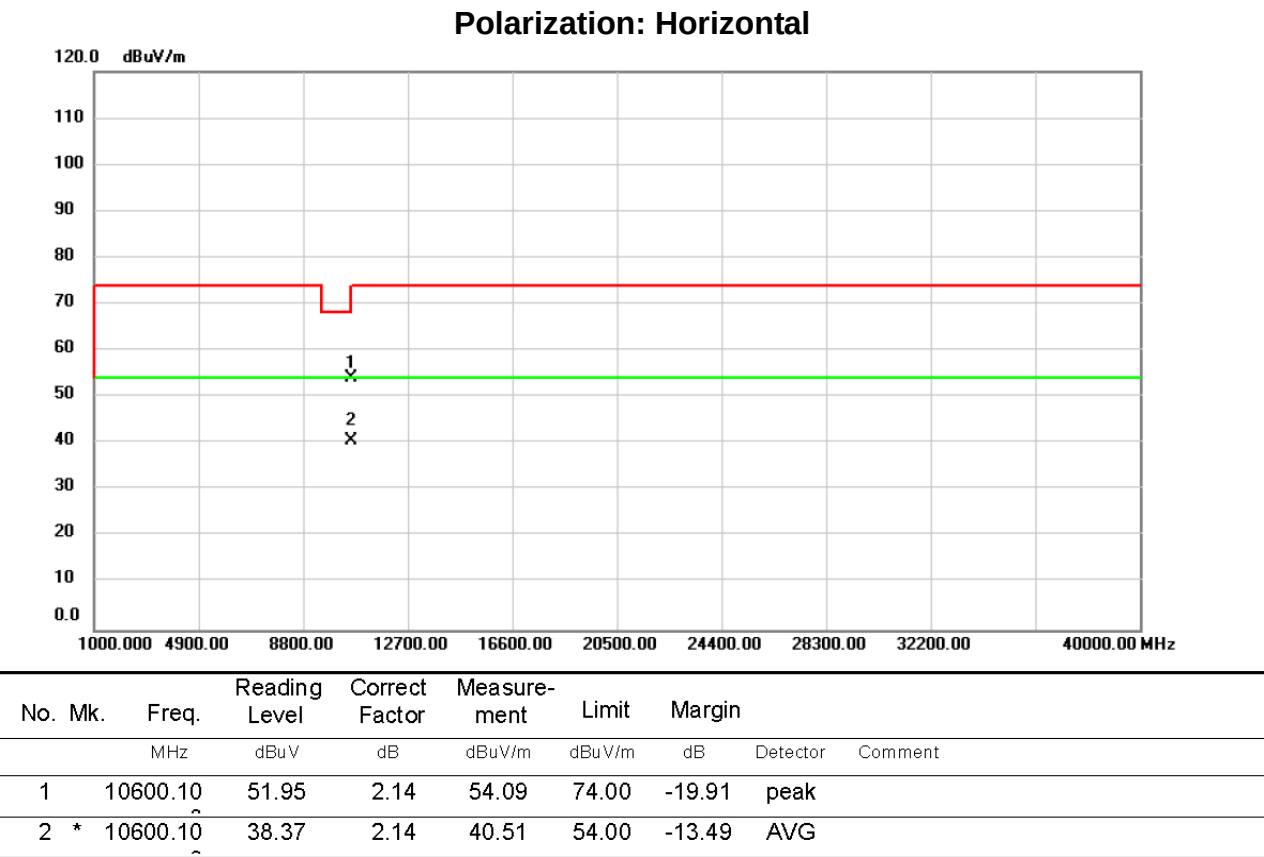


測試頻道: IEEE 802.11ac (VHT20) / 5320 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

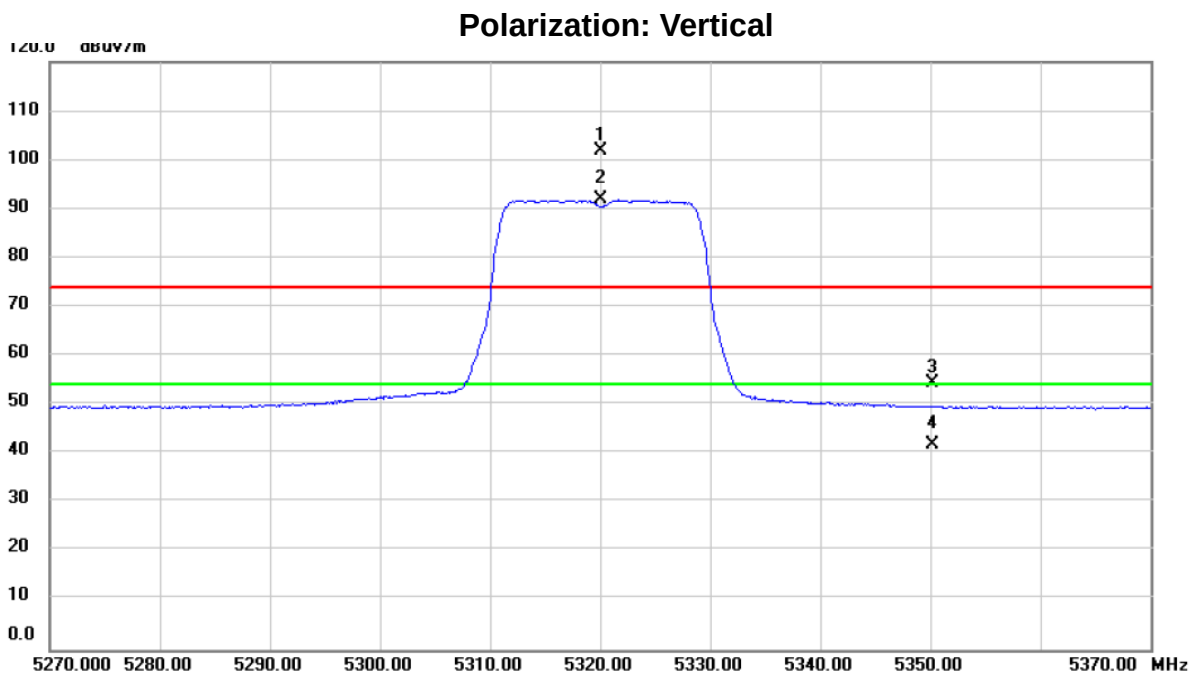

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5320.000	63.99	37.72	101.71	74.00	27.71	peak	No Limit
2	*	5320.000	54.15	37.72	91.87	54.00	37.87	AVG	No Limit
3		5350.200	16.57	37.76	54.33	74.00	-19.67	peak	
4		5350.200	4.17	37.76	41.93	54.00	-12.07	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5320 MHz	測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna	測試距離: 3 米
檢 測 器: Peak/AV	測試日期: 107/01/02
環境溫度: 23°C	環境濕度: 70%

Polarization: Vertical

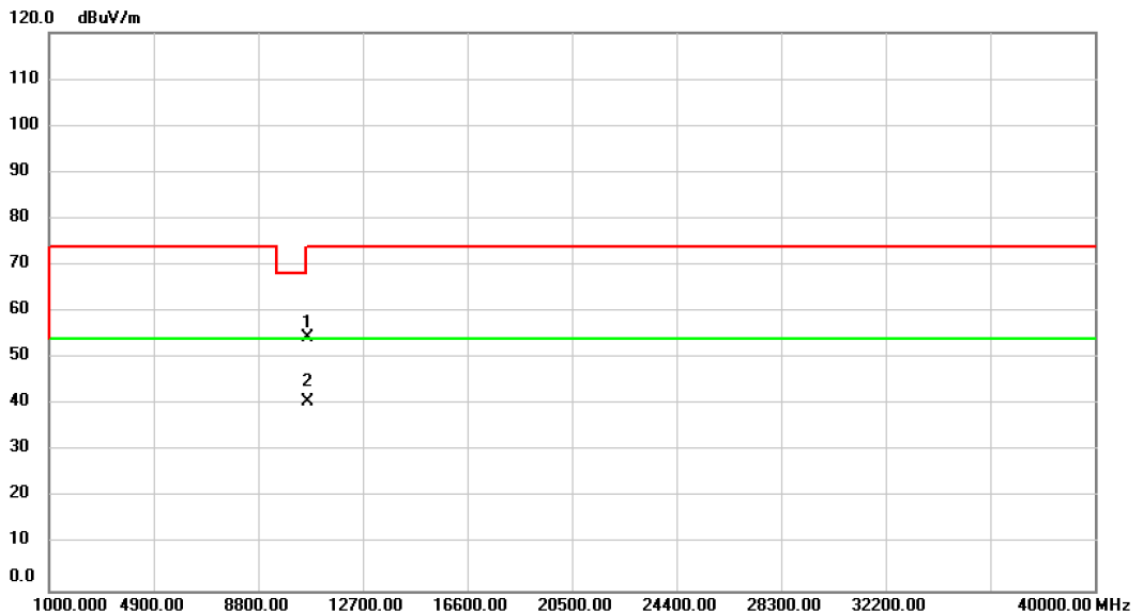


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	52.31	2.22	54.53	74.00	-19.47	peak	
2	*	10640.00	38.34	2.22	40.56	54.00	-13.44	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%


Polarization: Horizontal

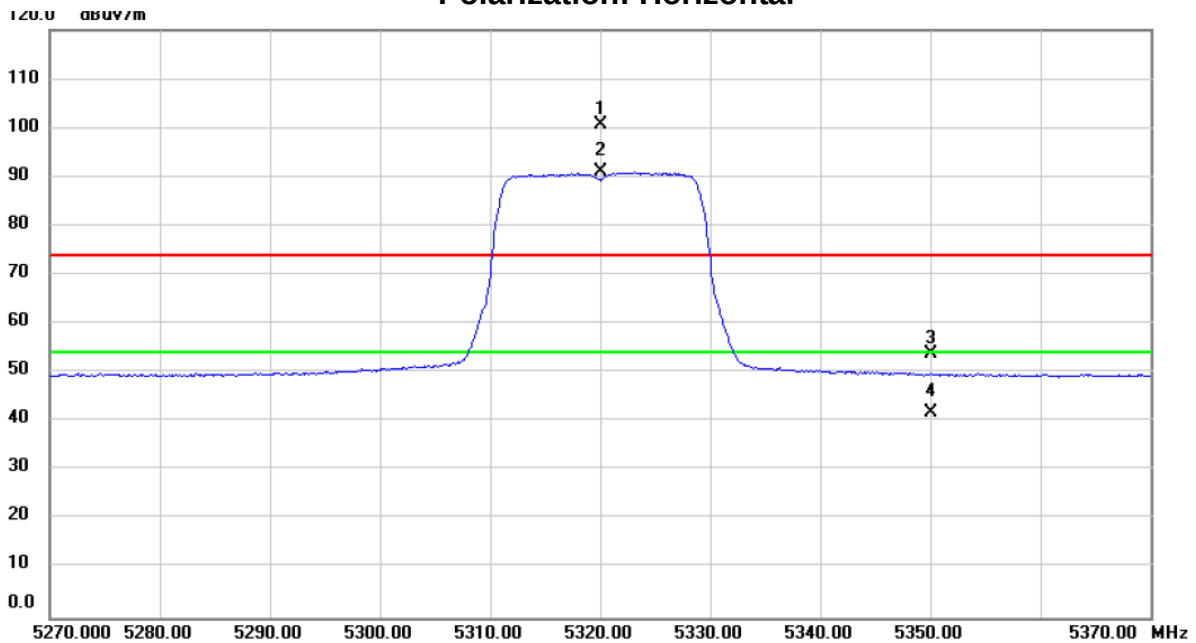

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5320.000	62.85	37.72	100.57	74.00	26.57	peak	No Limit
2	*	5320.000	53.42	37.72	91.14	54.00	37.14	AVG	No Limit
3		5350.000	16.20	37.76	53.96	74.00	-20.04	peak	
4		5350.000	4.21	37.76	41.97	54.00	-12.03	AVG	


測試頻道: IEEE 802.11ac (VHT20) / 5320
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

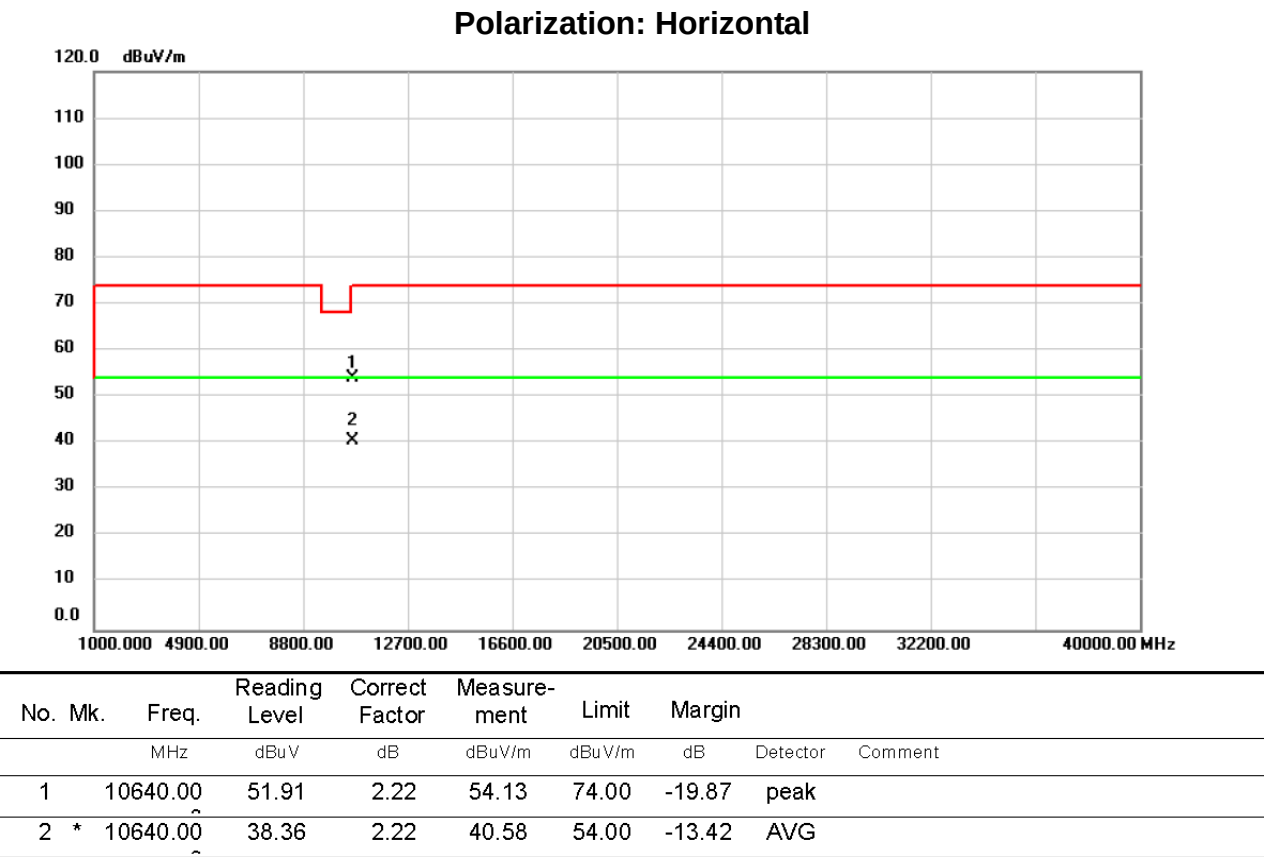

測試頻道: IEEE 802.11ac (VHT40) / 5270 MHz
測試模式: TX / X 軸
解析頻寬: 1000 kHz / 1000 kHz
視頻頻寬: 1000 kHz / 10Hz
量測天線: Horn Antenna
測試距離: 3 米
檢 測 器: Peak/AV
測試日期: 107/01/02
環境溫度: 23°C
環境濕度: 70%


Polarization: Vertical

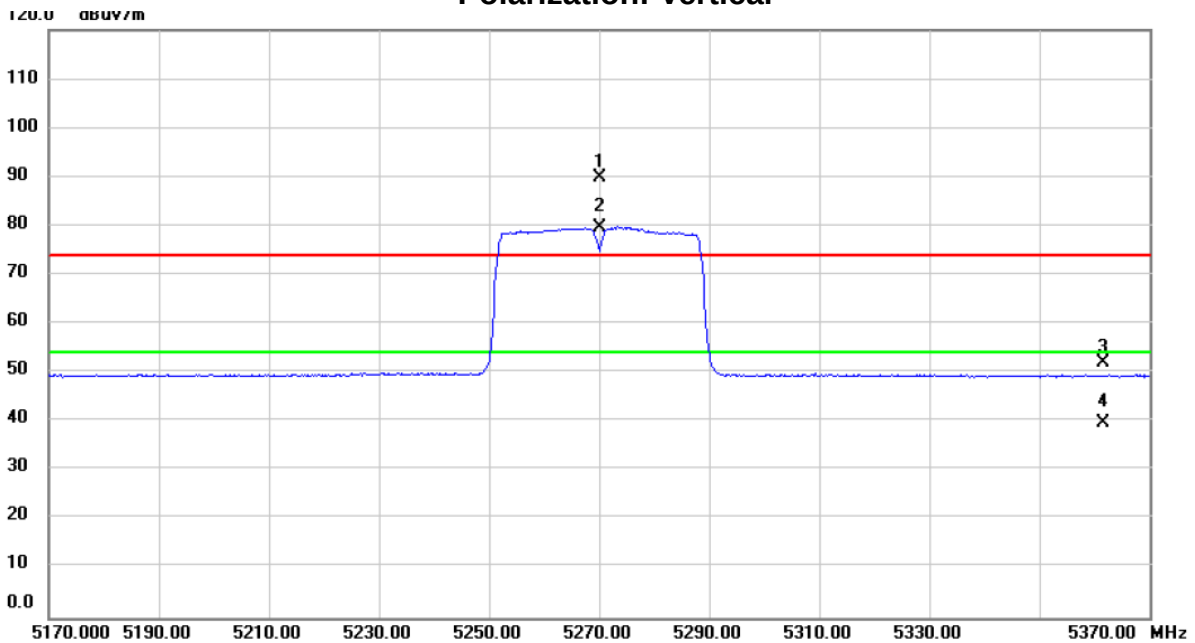

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5270.000	52.05	37.67	89.72	74.00	15.72	peak	No Limit
2	*	5270.000	42.06	37.67	79.73	54.00	25.73	AVG	No Limit
3		5361.700	14.31	37.77	52.08	74.00	-21.92	peak	
4		5361.700	1.98	37.77	39.75	54.00	-14.25	AVG	


測試頻道: IEEE 802.11ac (VHT40) / 5270 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: TX / X 軸
 視頻頻寬: 1000 kHz / 10Hz
 測試距離: 3 米
 測試日期: 107/01/02
 環境濕度: 70%

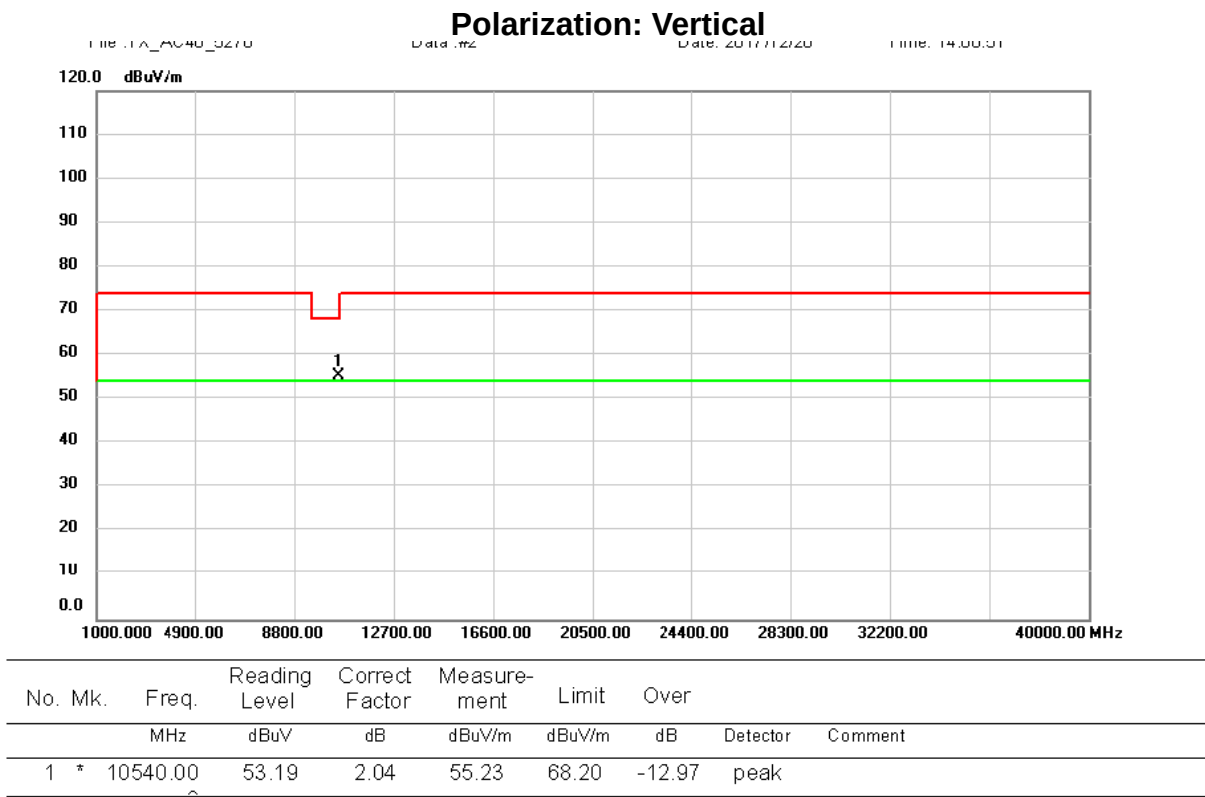

測試頻道: IEEE 802.11ac (VHT40) / 5270 MHz
 測試模式: TX / X 軸
 解析頻寬: 1000 kHz / 1000 kHz
 視頻頻寬: 1000 kHz / 10Hz
 量測天線: Horn Antenna
 測試距離: 3 米
 檢 測 器: Peak/AV
 測試日期: 107/01/02
 環境溫度: 23°C
 環境濕度: 70%

Polarization: Horizontal

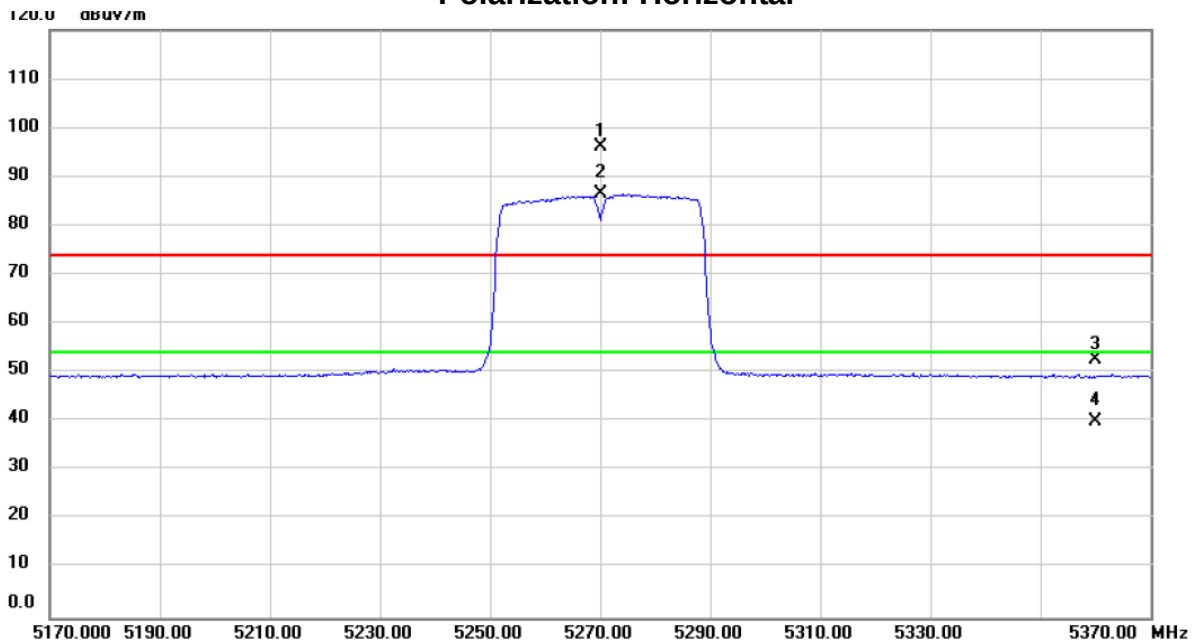

Io.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5270.000	58.40	37.67	96.07	74.00	22.07	peak	No Limit
2	*	5270.000	48.75	37.67	86.42	54.00	32.42	AVG	No Limit
3		5359.880	14.89	37.77	52.66	74.00	-21.34	peak	
4		5359.880	2.14	37.77	39.91	54.00	-14.09	AVG	