


測試頻道: IEEE 802.11a / 5200 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AVG
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

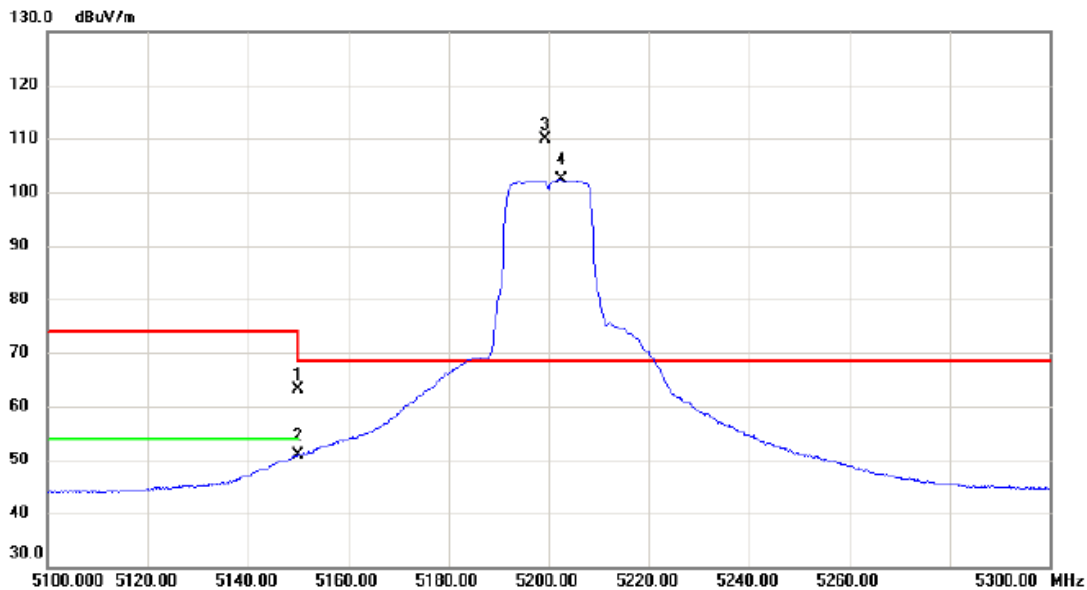


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	48.70	14.36	63.06	74.00	-10.94	peak	
2		5150.000	36.51	14.36	50.87	54.00	-3.13	AVG	
3	*	5199.400	95.49	14.45	109.94	68.30	41.64	peak	主波訊號不予判定
4	X	5202.500	87.89	14.45	102.34	68.30	34.04	AVG	主波訊號不予判定

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

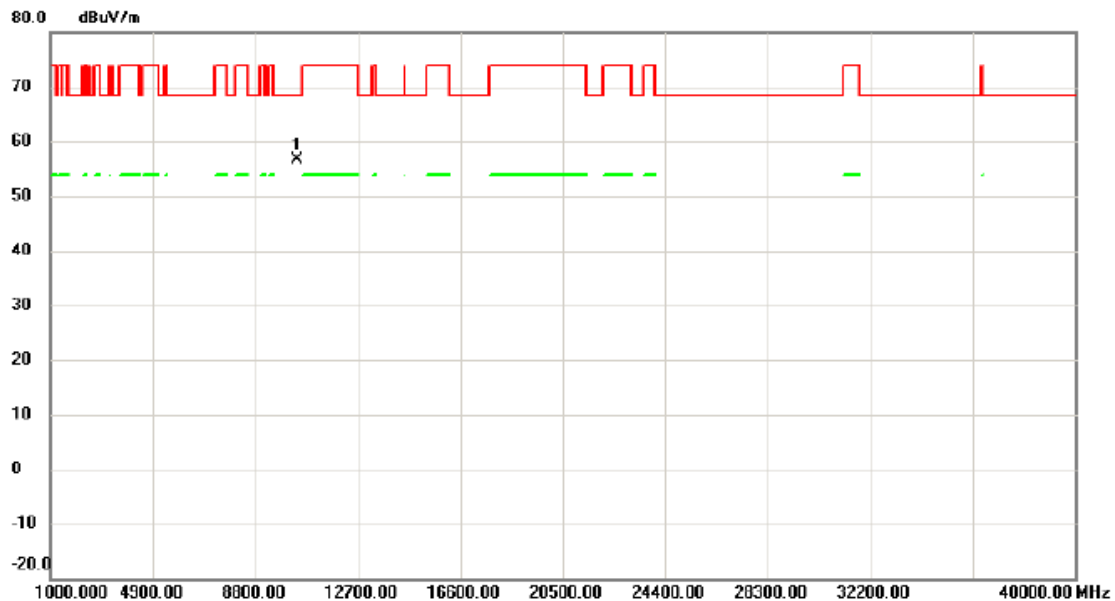


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10398.680	42.41	14.25	56.66	68.30	-11.64	peak	

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

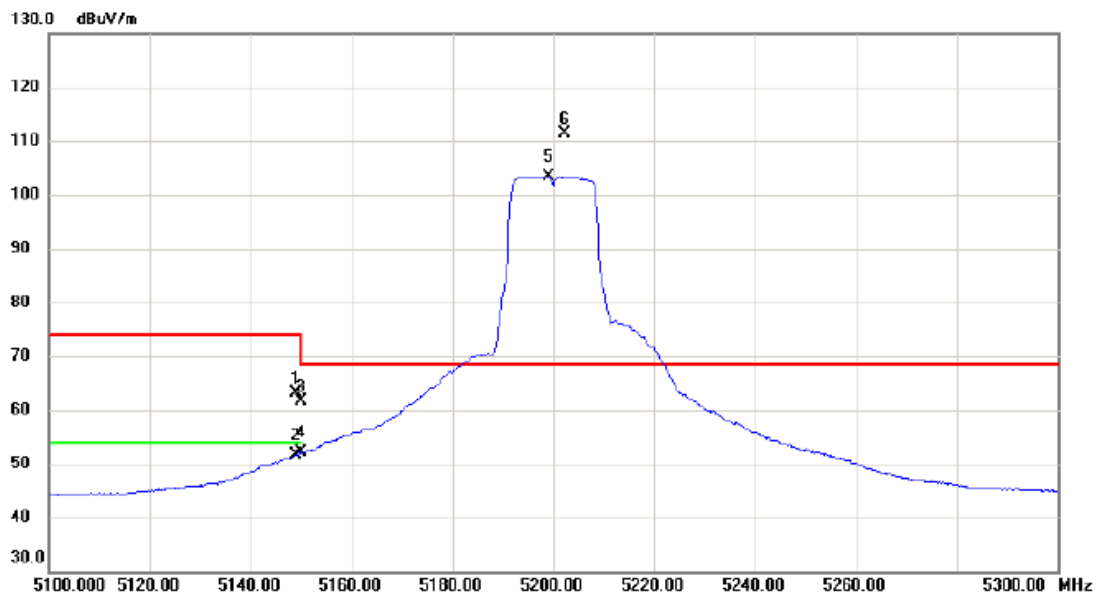


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.800	48.72	14.36	63.08	74.00	-10.92	peak	
2		5148.800	37.23	14.36	51.59	54.00	-2.41	AVG	
3		5150.000	47.34	14.36	61.70	74.00	-12.30	peak	
4		5150.000	37.67	14.36	52.03	54.00	-1.97	AVG	
5	X	5199.100	88.97	14.45	103.42	68.30	35.12	AVG	主波訊號不予判定
6	*	5202.300	96.84	14.45	111.29	68.30	42.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

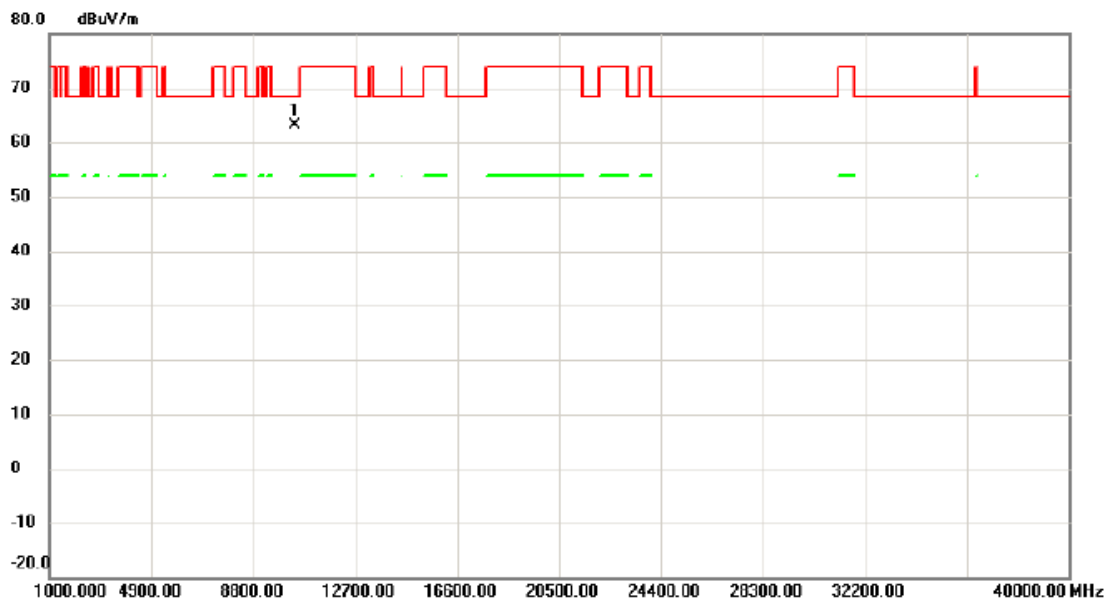


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10398.400	48.96	14.25	63.21	68.30	-5.09	peak	

測試頻道: IEEE 802.11a / 5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

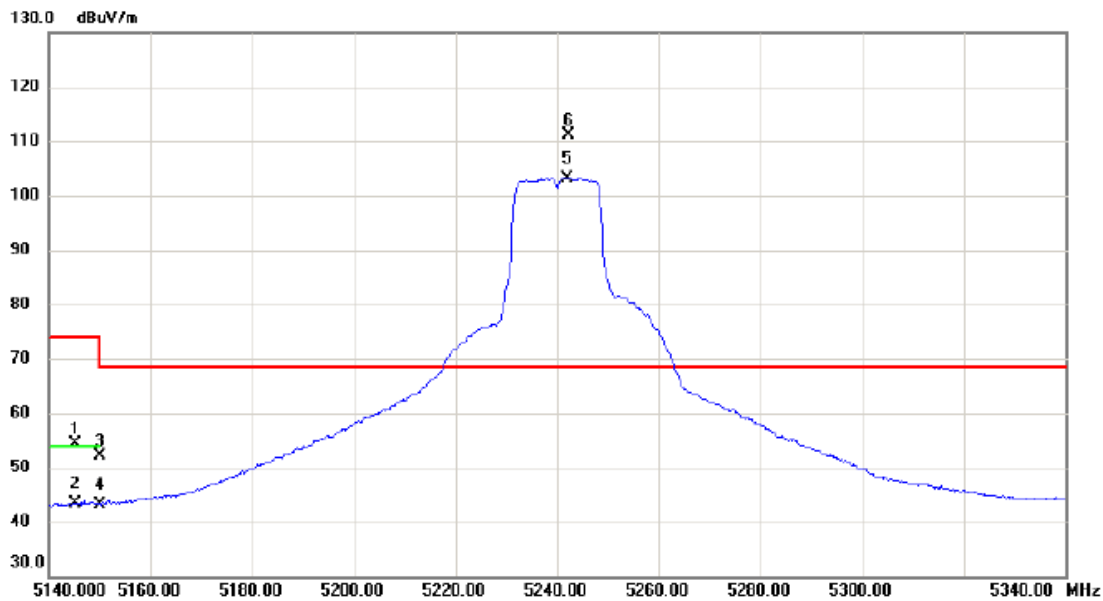


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.300	40.09	14.36	54.45	74.00	-19.55	peak	
2		5145.300	29.12	14.36	43.48	54.00	-10.52	AVG	
3		5150.000	37.83	14.36	52.19	74.00	-21.81	peak	
4		5150.000	28.89	14.36	43.25	54.00	-10.75	AVG	
5	X	5242.000	88.68	14.52	103.20	68.30	34.90	AVG	主波訊號不予判定
6	*	5242.400	96.51	14.52	111.03	68.30	42.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

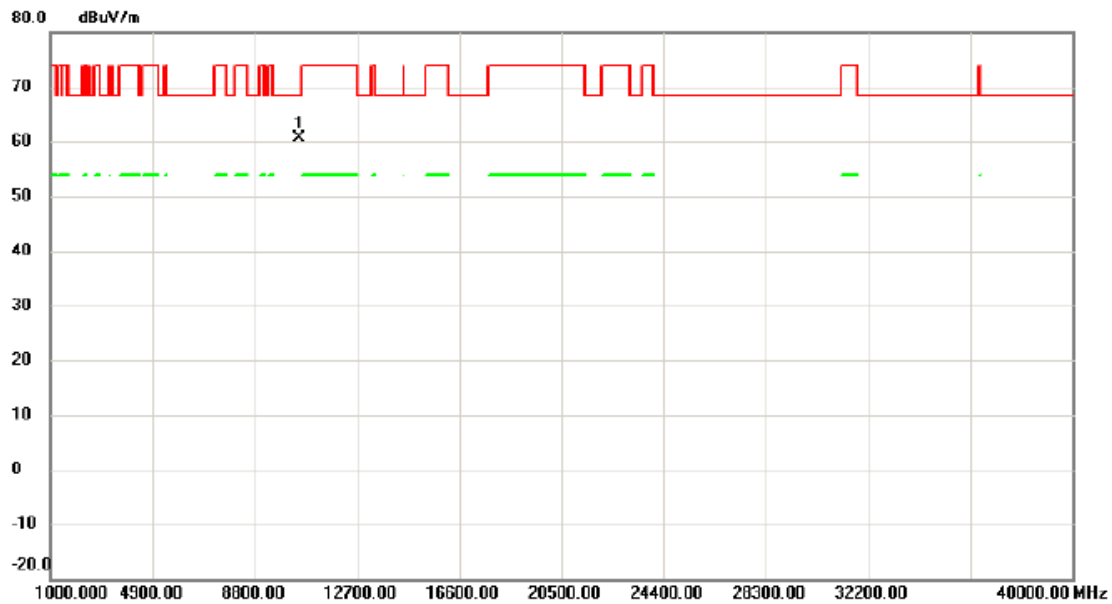


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10478.840	46.22	14.52	60.74	68.30	-7.56	peak	

測試頻道: IEEE 802.11a / 5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

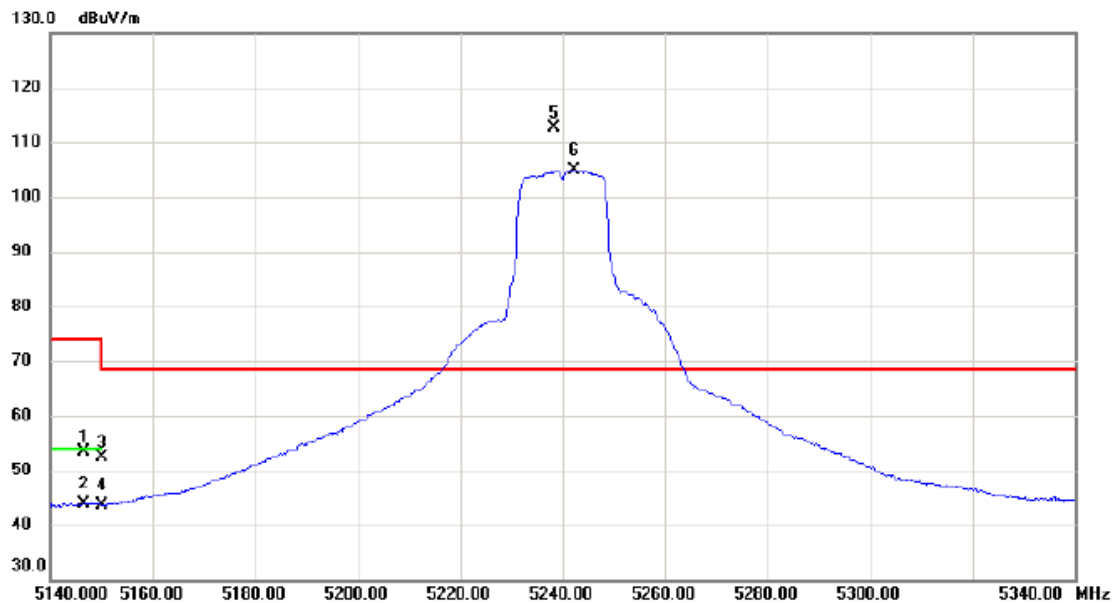

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.600	39.04	14.36	53.40	74.00	-20.60	peak	
2		5146.600	29.41	14.36	43.77	54.00	-10.23	AVG	
3		5150.000	38.05	14.36	52.41	74.00	-21.59	peak	
4		5150.000	29.28	14.36	43.64	54.00	-10.36	AVG	
5	*	5238.300	98.22	14.51	112.73	68.30	44.43	peak	主波訊號不予判定
6	X	5242.200	90.33	14.52	104.85	68.30	36.55	AVG	主波訊號不予判定

測試頻道: IEEE 802.11a / 5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

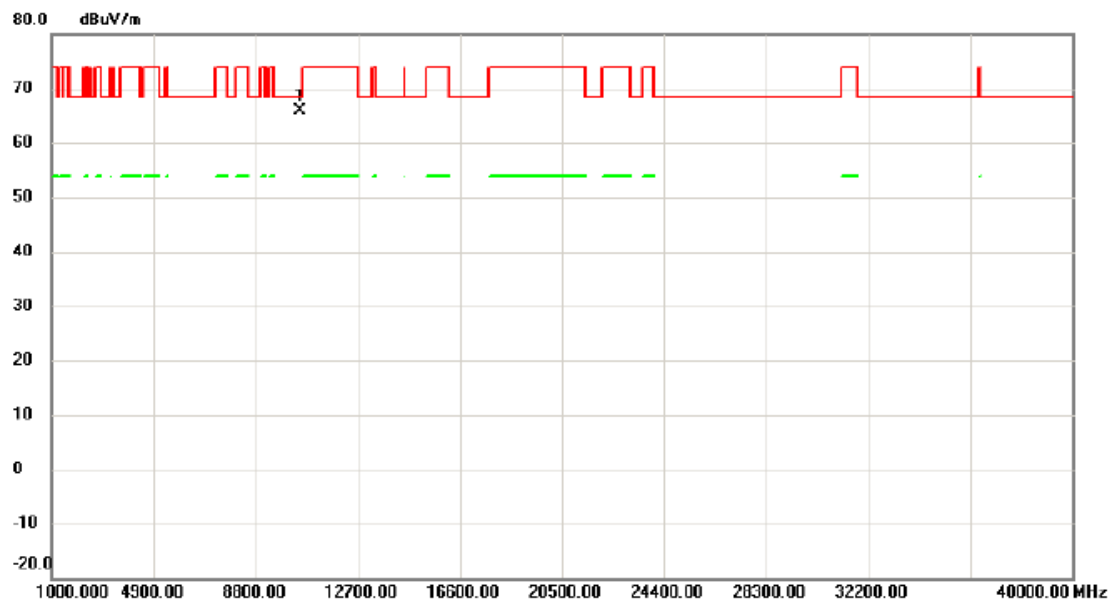

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10478.860	51.48	14.52	66.00	68.30	-2.30	peak	

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

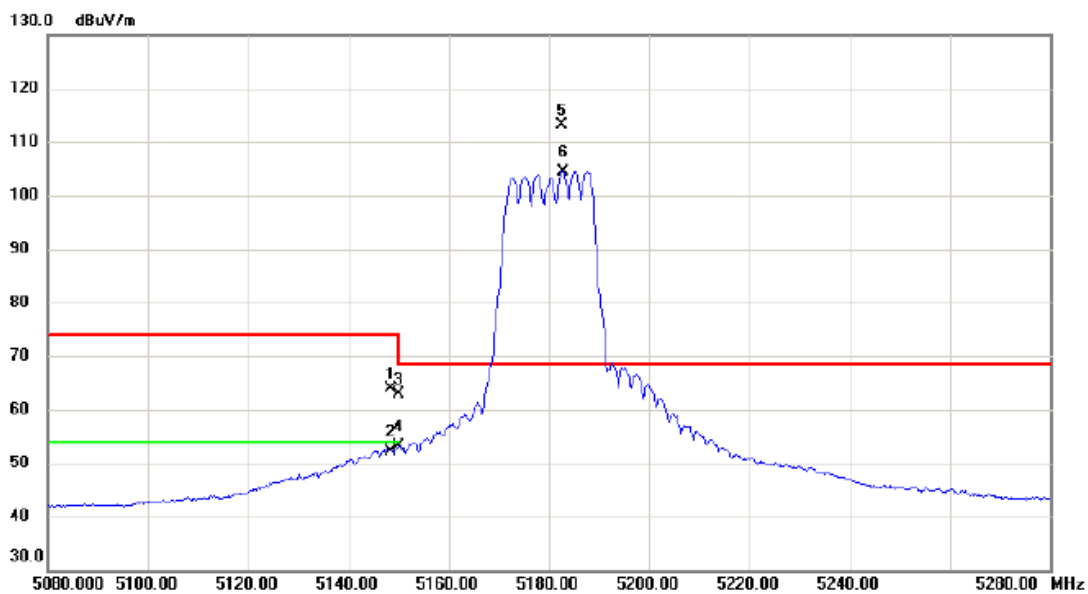

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.500	49.58	14.36	63.94	74.00	-10.06	peak	
2		5148.500	37.87	14.36	52.23	54.00	-1.77	AVG	
3		5150.000	48.59	14.36	62.95	74.00	-11.05	peak	
4		5150.000	38.66	14.36	53.02	54.00	-0.98	AVG	
5	*	5182.600	98.82	14.42	113.24	68.30	44.94	peak	主波訊號不予判定
6	X	5182.800	90.06	14.42	104.48	68.30	36.18	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

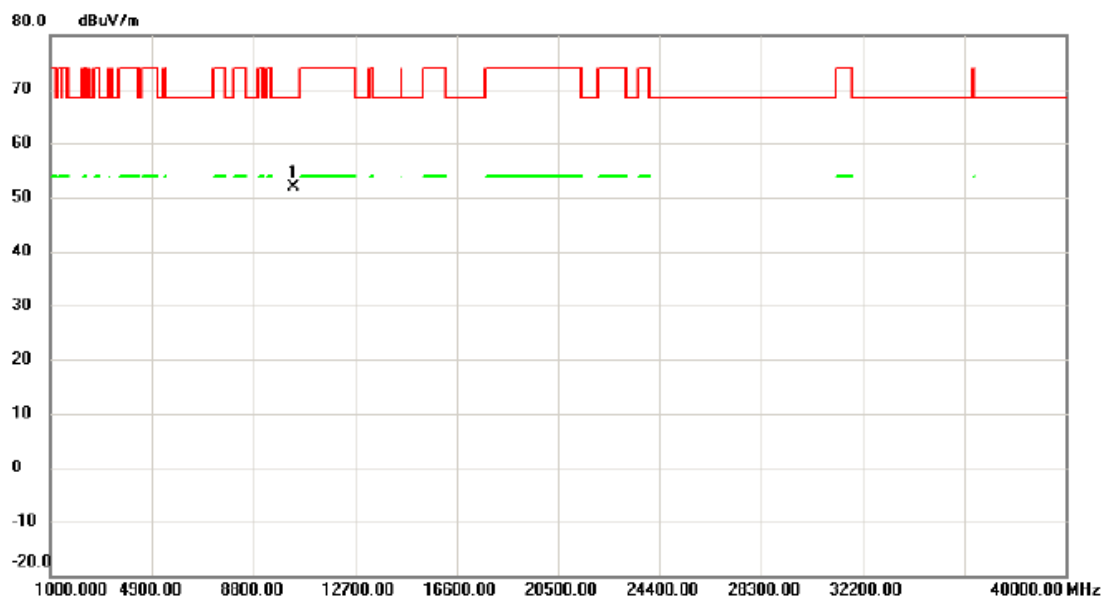

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10354.600	37.88	14.10	51.98	68.30	-16.32	peak	

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

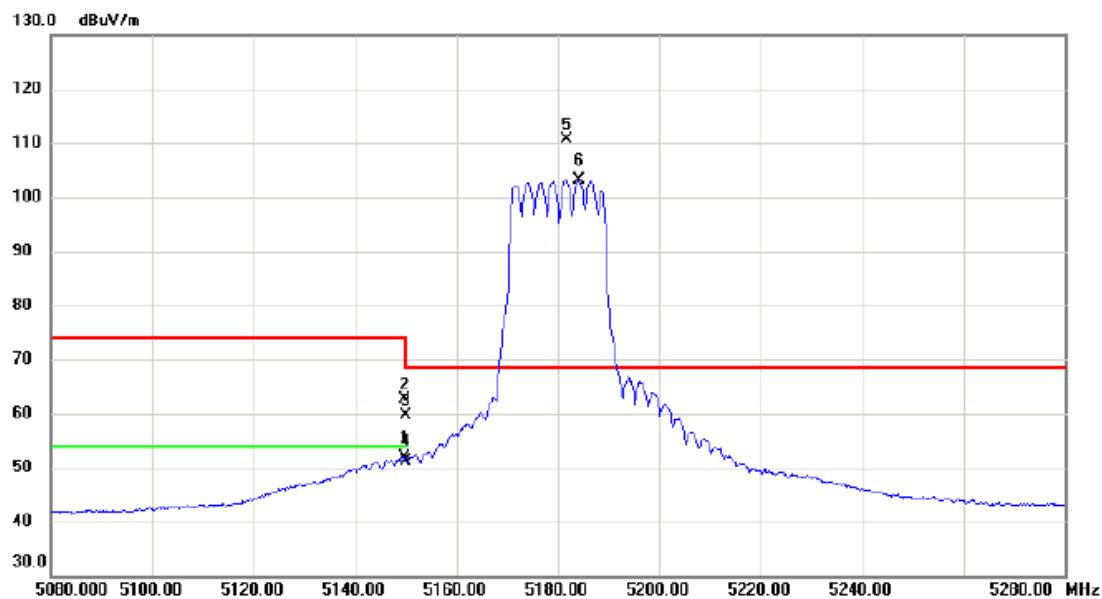

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.600	37.51	14.36	51.87	54.00	-2.13	AVG	
2		5149.800	48.17	14.36	62.53	74.00	-11.47	peak	
3		5150.000	45.25	14.36	59.61	74.00	-14.39	peak	
4		5150.000	36.76	14.36	51.12	54.00	-2.88	AVG	
5	*	5181.700	96.18	14.42	110.60	68.30	42.30	peak	主波訊號不予判定
6	X	5184.100	88.67	14.42	103.09	68.30	34.79	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

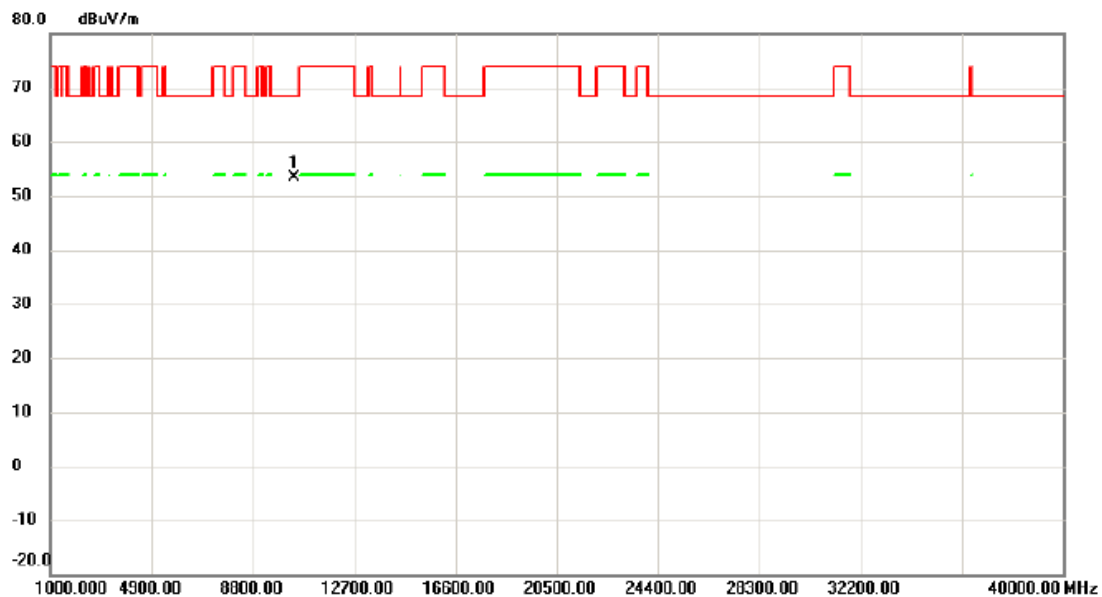

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10361.425	39.16	14.13	53.29	68.30	-15.01	peak	

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

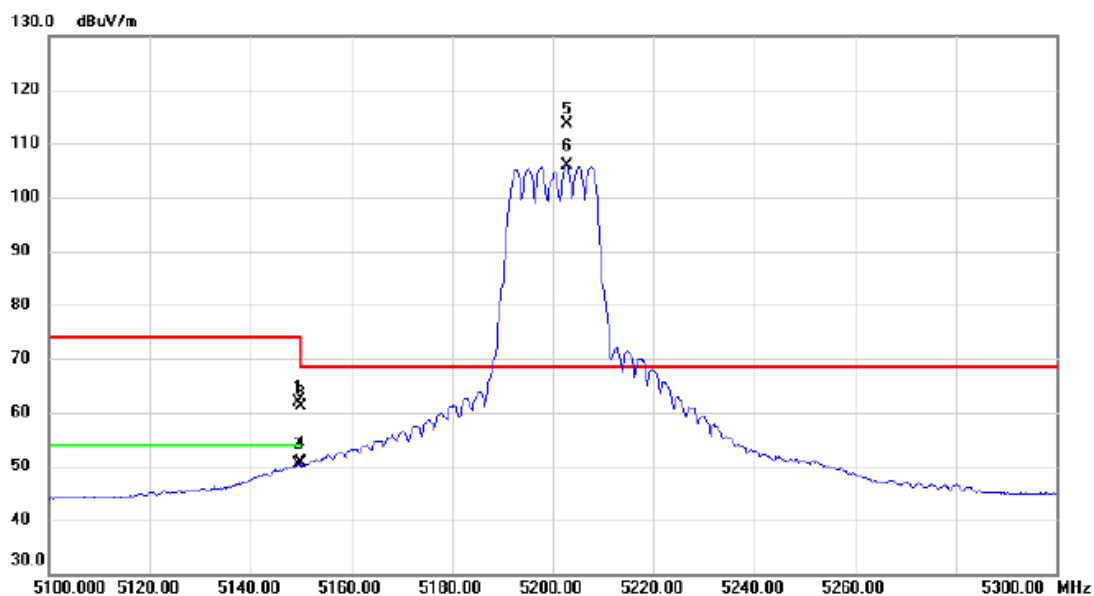

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.500	47.59	14.36	61.95	74.00	-12.05	peak	
2		5149.500	35.96	14.36	50.32	54.00	-3.68	AVG	
3		5150.000	46.76	14.36	61.12	74.00	-12.88	peak	
4		5150.000	36.30	14.36	50.66	54.00	-3.34	AVG	
5	*	5202.700	99.26	14.45	113.71	68.30	45.41	peak	主波訊號不予判定
6	X	5202.700	91.41	14.45	105.86	68.30	37.56	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

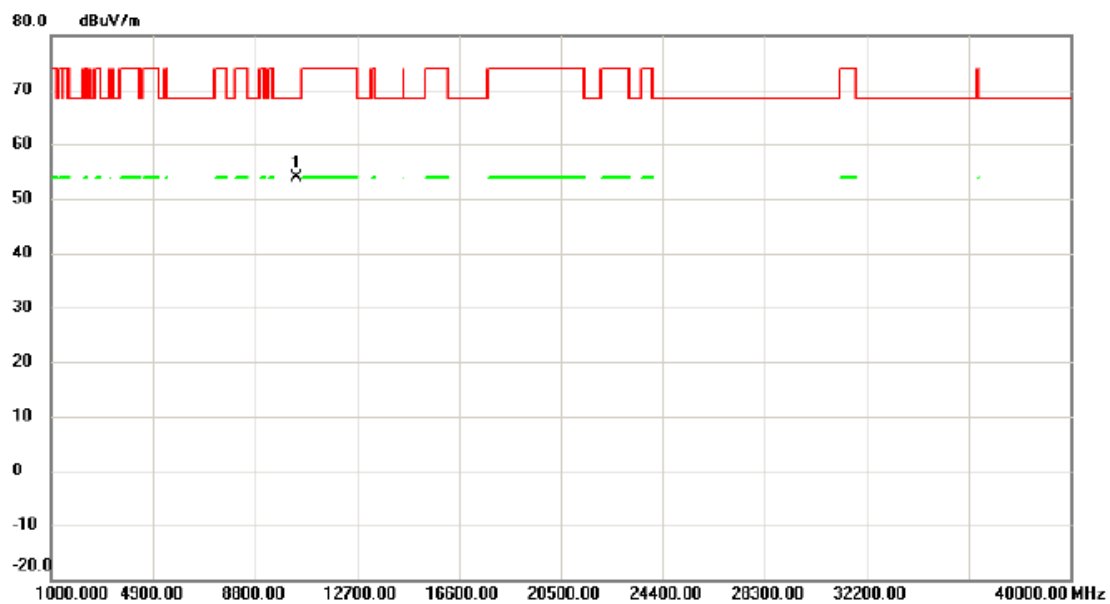

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10399.575	39.56	14.26	53.82	68.30	-14.48	peak	

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

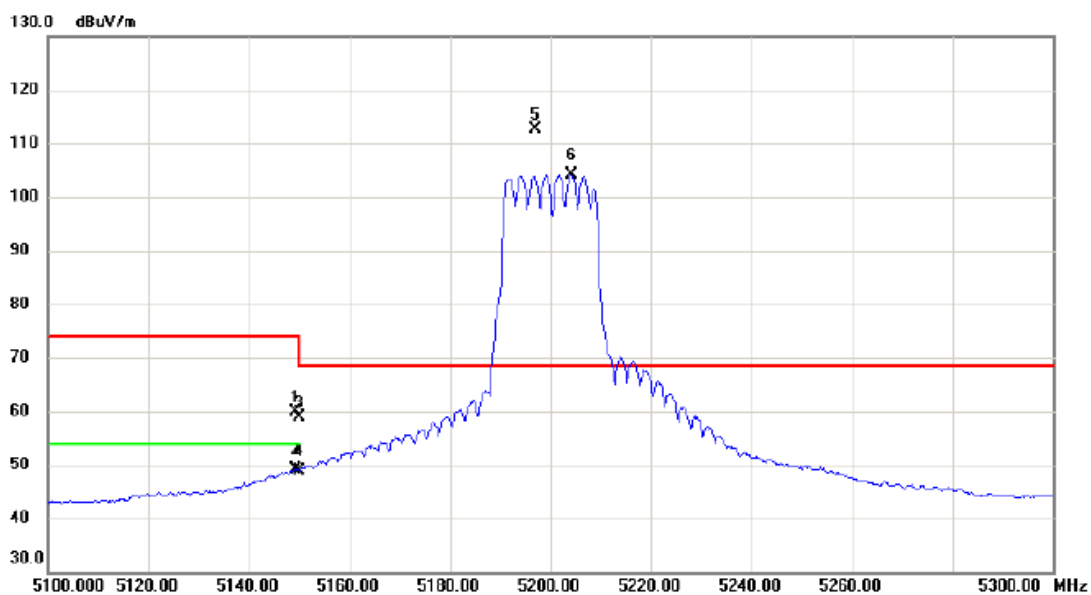

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.200	45.46	14.36	59.82	74.00	-14.18	peak	
2		5149.200	34.74	14.36	49.10	54.00	-4.90	AVG	
3		5150.000	44.47	14.36	58.83	74.00	-15.17	peak	
4		5150.000	34.63	14.36	48.99	54.00	-5.01	AVG	
5	*	5196.900	98.20	14.44	112.64	68.30	44.34	peak	主波訊號不予判定
6	X	5204.100	89.63	14.45	104.08	68.30	35.78	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

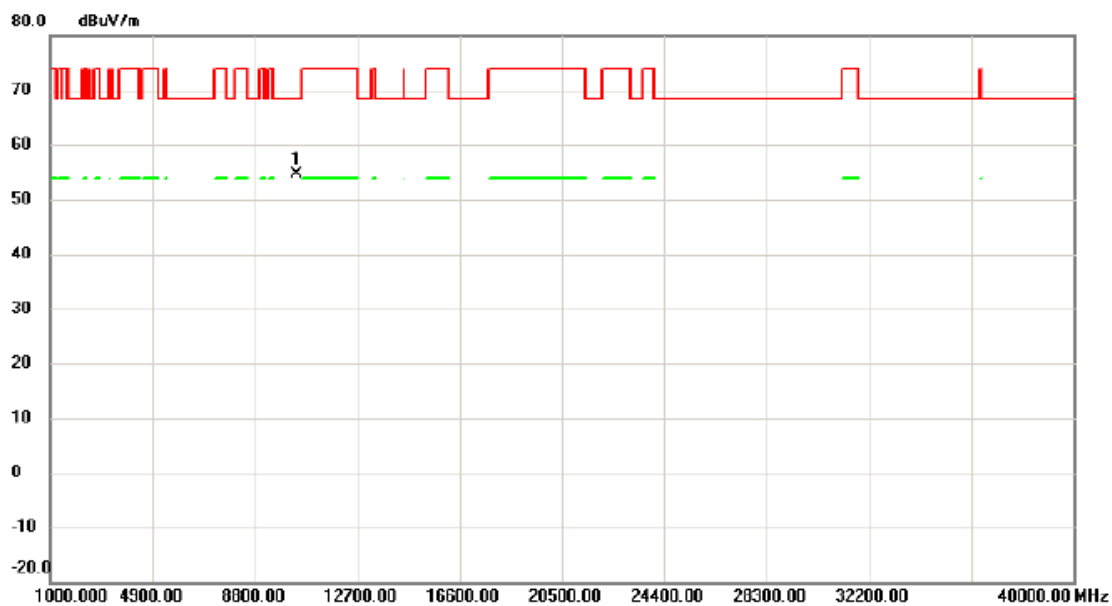

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10391.500	40.41	14.22	54.63	68.30	-13.67	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

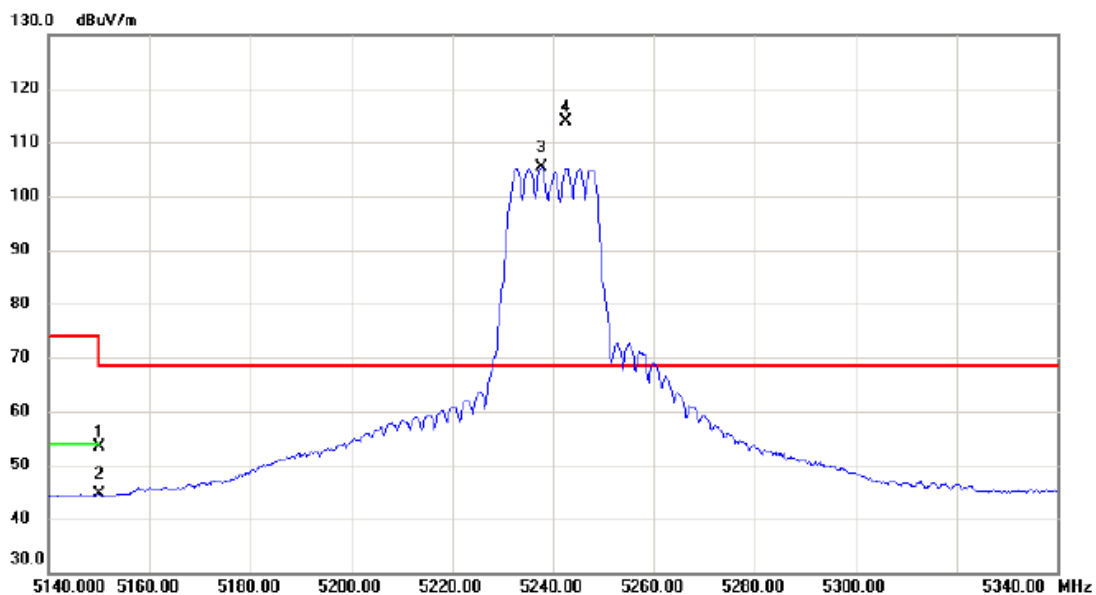

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	38.91	14.36	53.27	74.00	-20.73	peak	
2		5150.000	30.15	14.36	44.51	54.00	-9.49	AVG	
3	X	5237.700	90.86	14.51	105.37	68.30	37.07	AVG	主波訊號不予判定
4	*	5242.500	99.48	14.52	114.00	68.30	45.70	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

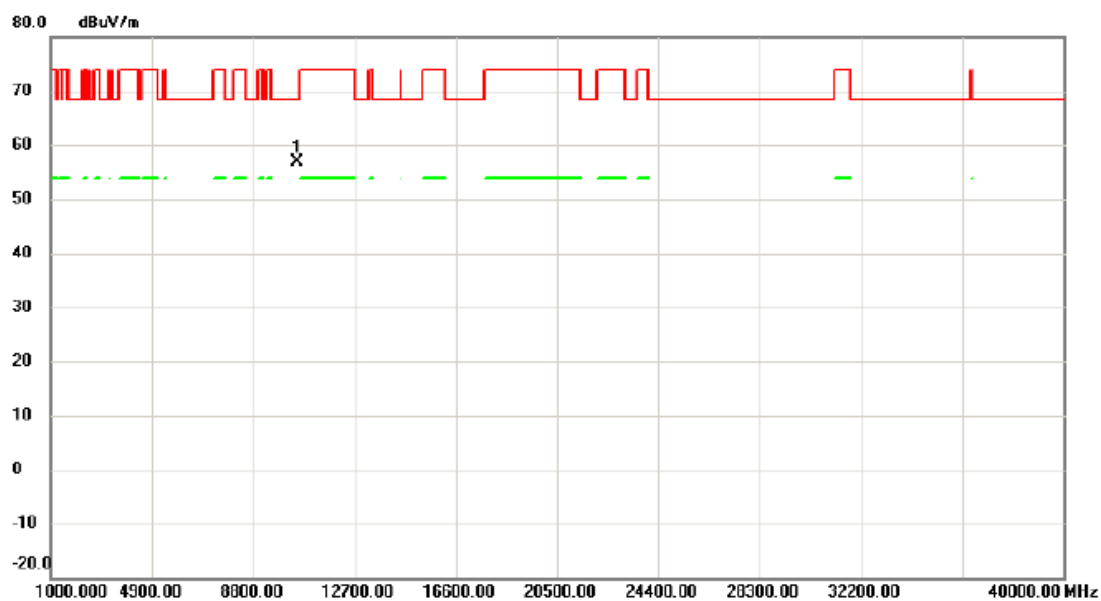


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10484.475	42.45	14.54	56.99	68.30	-11.31	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

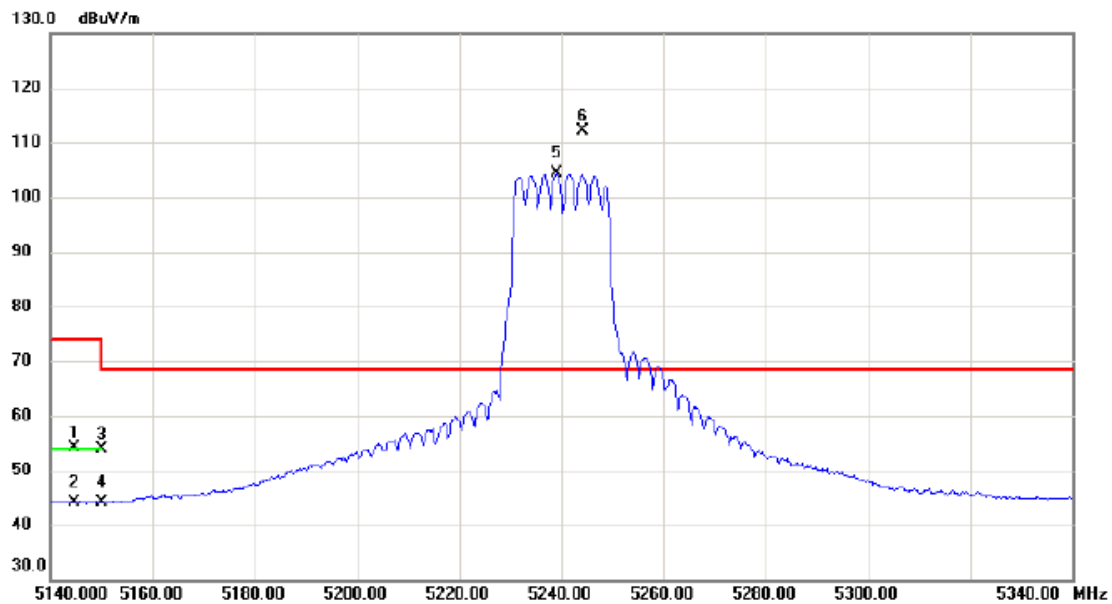

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.600	39.71	14.35	54.06	74.00	-19.94	peak	
2		5144.600	29.73	14.35	44.08	54.00	-9.92	AVG	
3		5150.000	39.41	14.36	53.77	74.00	-20.23	peak	
4		5150.000	29.83	14.36	44.19	54.00	-9.81	AVG	
5	X	5239.200	89.84	14.51	104.35	68.30	36.05	AVG	主波訊號不予判定
6	*	5244.100	97.65	14.53	112.18	68.30	43.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

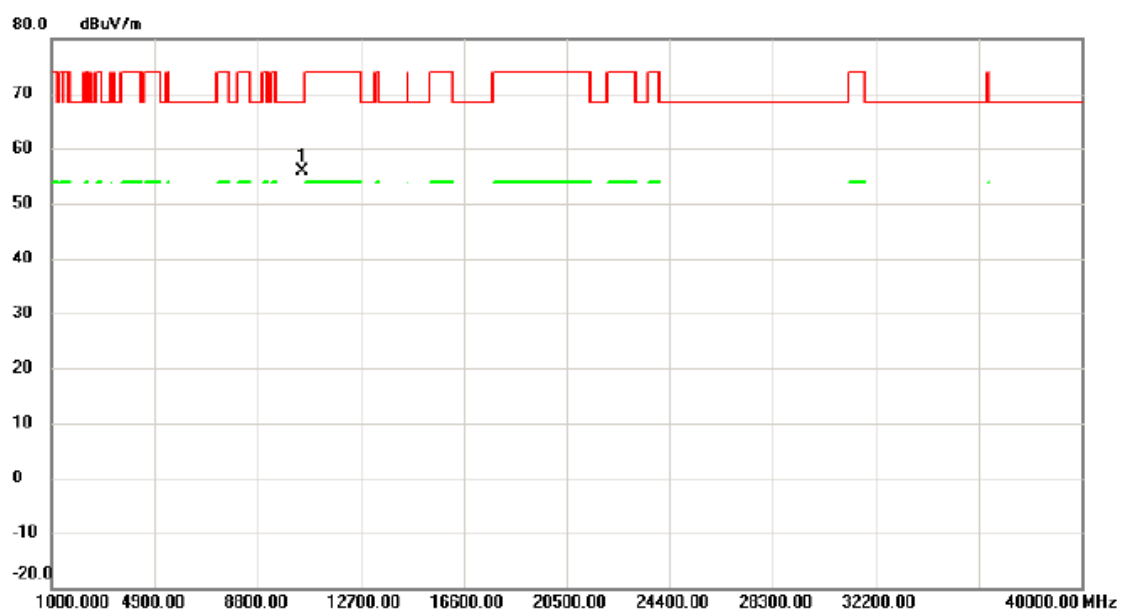

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10479.125	41.42	14.52	55.94	68.30	-12.36	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

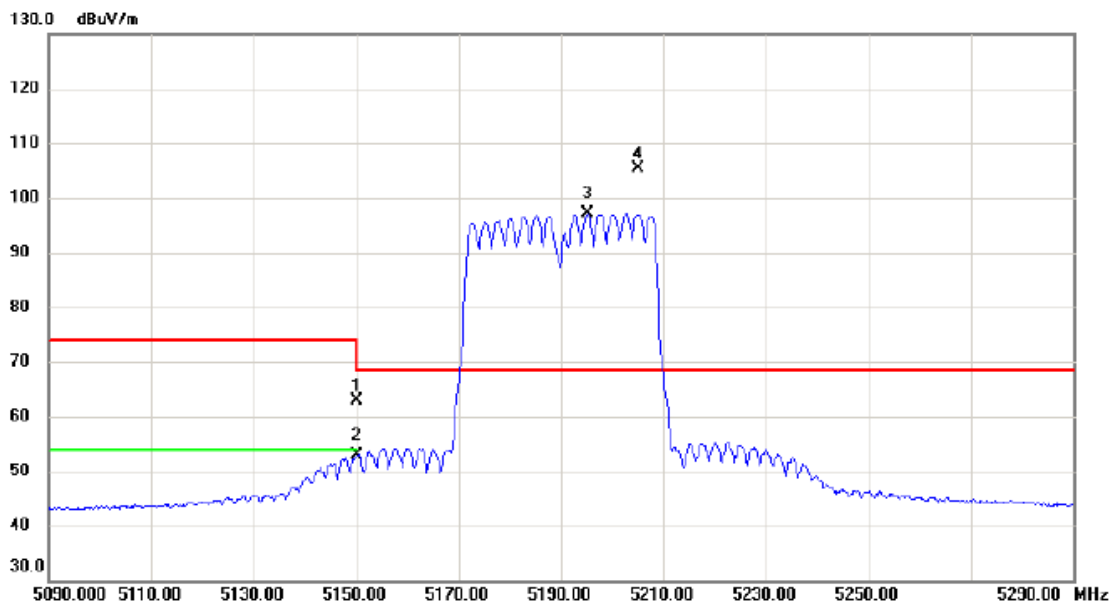

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	48.62	14.36	62.98	74.00	-11.02	peak	
2		5150.000	38.52	14.36	52.88	54.00	-1.12	AVG	
3	X	5195.300	82.64	14.44	97.08	68.30	28.78	AVG	主波訊號不予判定
4	*	5205.100	90.95	14.45	105.40	68.30	37.10	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

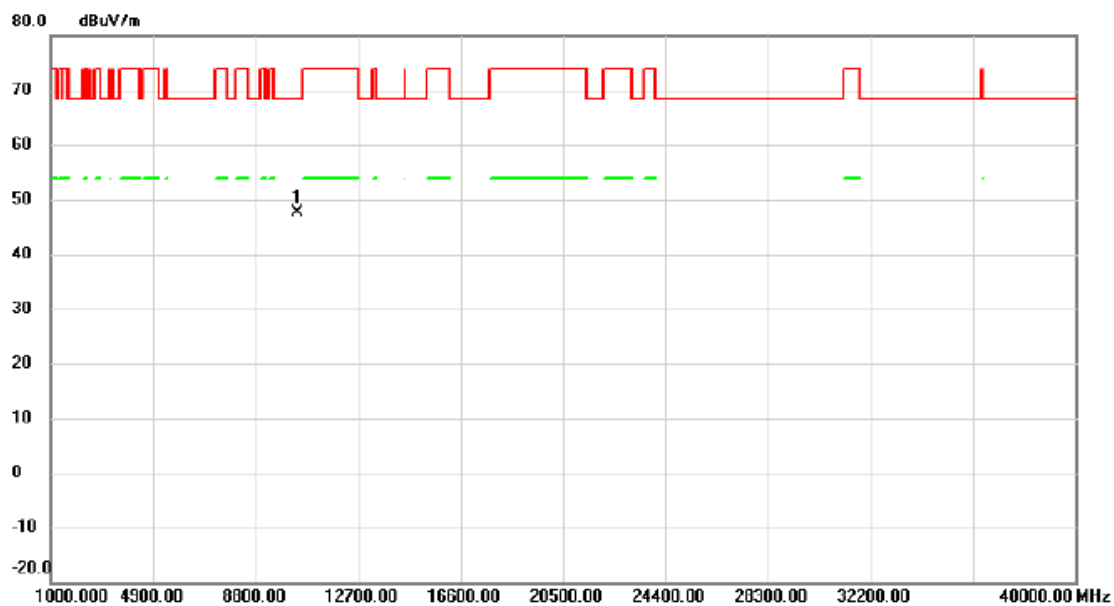

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10386.150	33.33	14.21	47.54	68.30	-20.76	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AVG

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

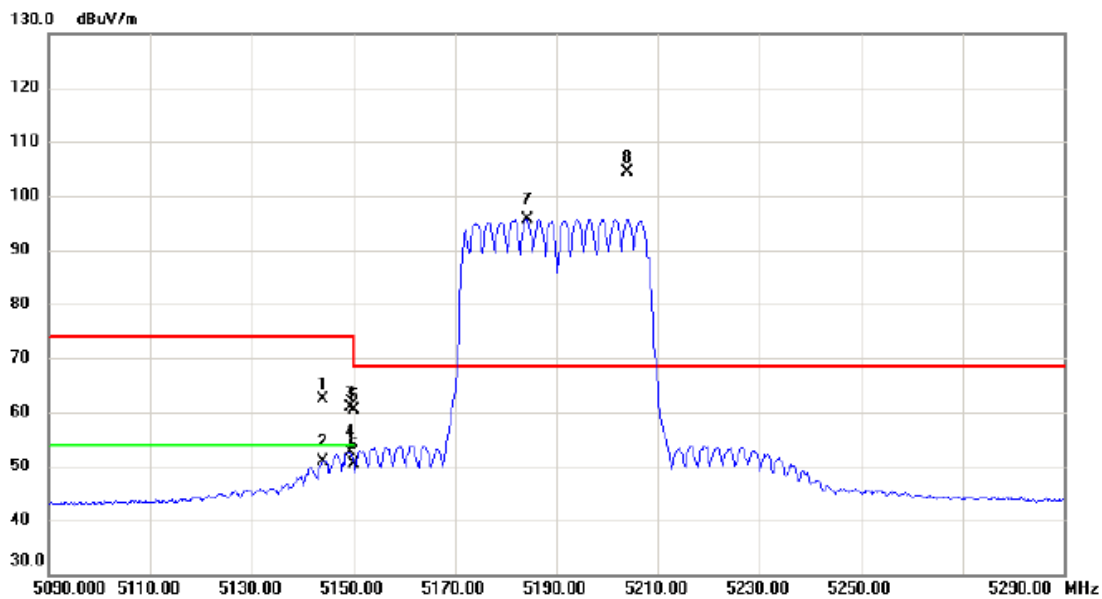

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.000	48.03	14.35	62.38	74.00	-11.62	peak	
2		5144.000	36.54	14.35	50.89	54.00	-3.11	AVG	
3		5149.400	46.53	14.36	60.89	74.00	-13.11	peak	
4		5149.400	38.23	14.36	52.59	54.00	-1.41	AVG	
5		5150.000	45.97	14.36	60.33	74.00	-13.67	peak	
6		5150.000	35.91	14.36	50.27	54.00	-3.73	AVG	
7	X	5184.200	81.31	14.42	95.73	68.30	27.43	AVG	主波訊號不予判定
8	*	5204.100	90.05	14.45	104.50	68.30	36.20	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

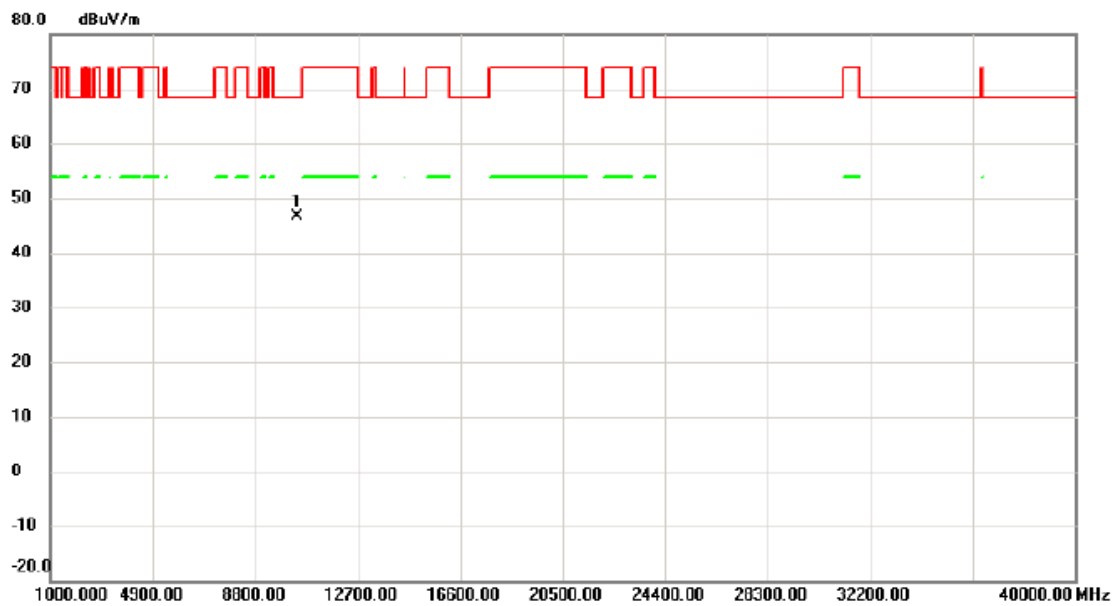

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10378.900	32.32	14.19	46.51	68.30	-21.79	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

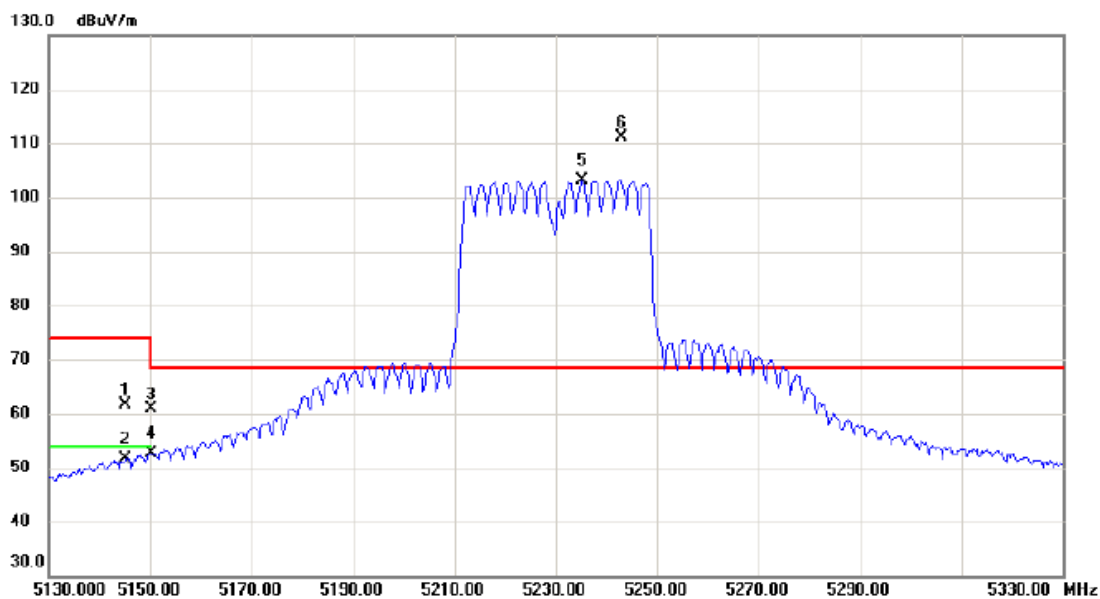

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.200	47.23	14.36	61.59	74.00	-12.41	peak	
2		5145.200	37.20	14.36	51.56	54.00	-2.44	AVG	
3		5150.000	46.40	14.36	60.76	74.00	-13.24	peak	
4		5150.000	38.18	14.36	52.54	54.00	-1.46	AVG	
5	X	5235.200	88.64	14.51	103.15	68.30	34.85	AVG	主波訊號不予判定
6	*	5242.800	96.69	14.52	111.21	68.30	42.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

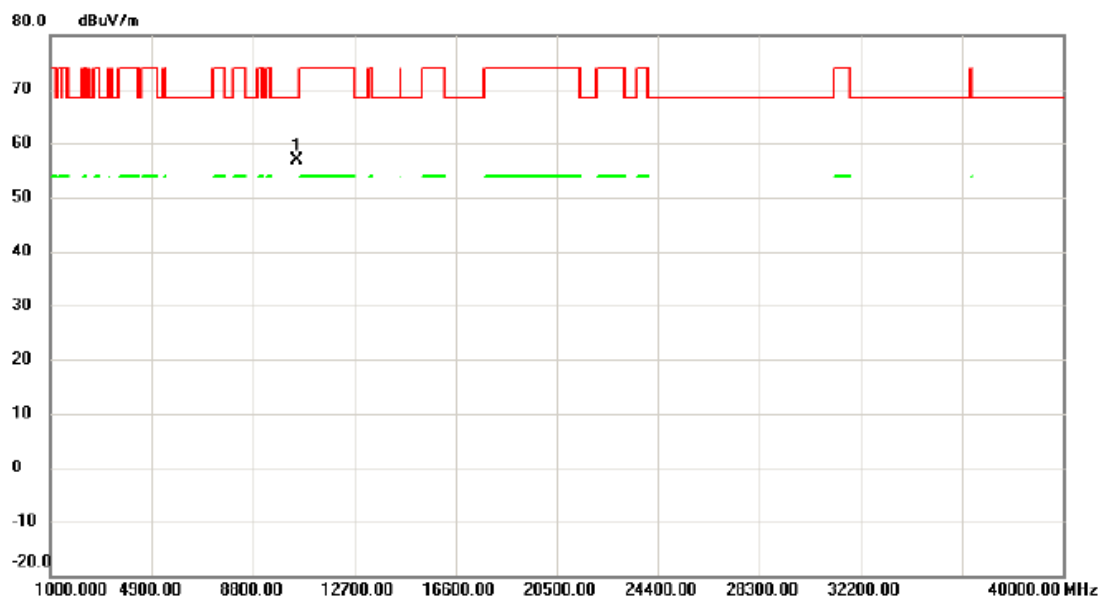

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10467.950	42.42	14.48	56.90	68.30	-11.40	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AVG

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

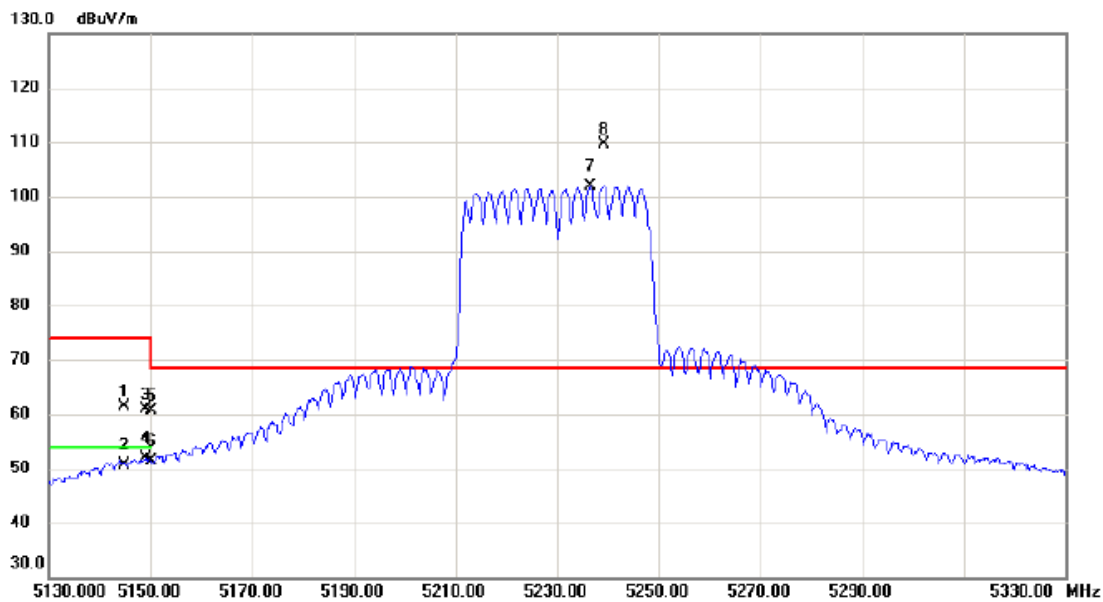

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.900	46.99	14.36	61.35	74.00	-12.65	peak	
2		5144.900	36.26	14.36	50.62	54.00	-3.38	AVG	
3		5149.000	46.60	14.36	60.96	74.00	-13.04	peak	
4		5149.000	37.46	14.36	51.82	54.00	-2.18	AVG	
5		5150.000	46.26	14.36	60.62	74.00	-13.38	peak	
6		5150.000	36.92	14.36	51.28	54.00	-2.72	AVG	
7	X	5236.600	87.26	14.51	101.77	68.30	33.47	AVG	主波訊號不予判定
8	*	5239.300	95.07	14.51	109.58	68.30	41.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

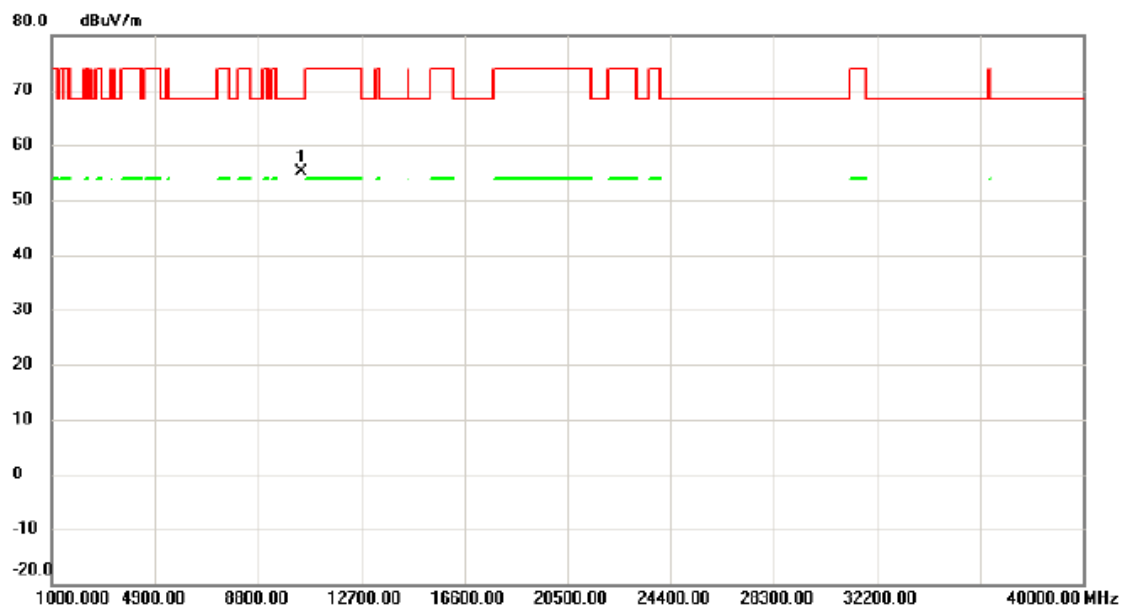


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10456.500	40.76	14.44	55.20	68.30	-13.10	peak	

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

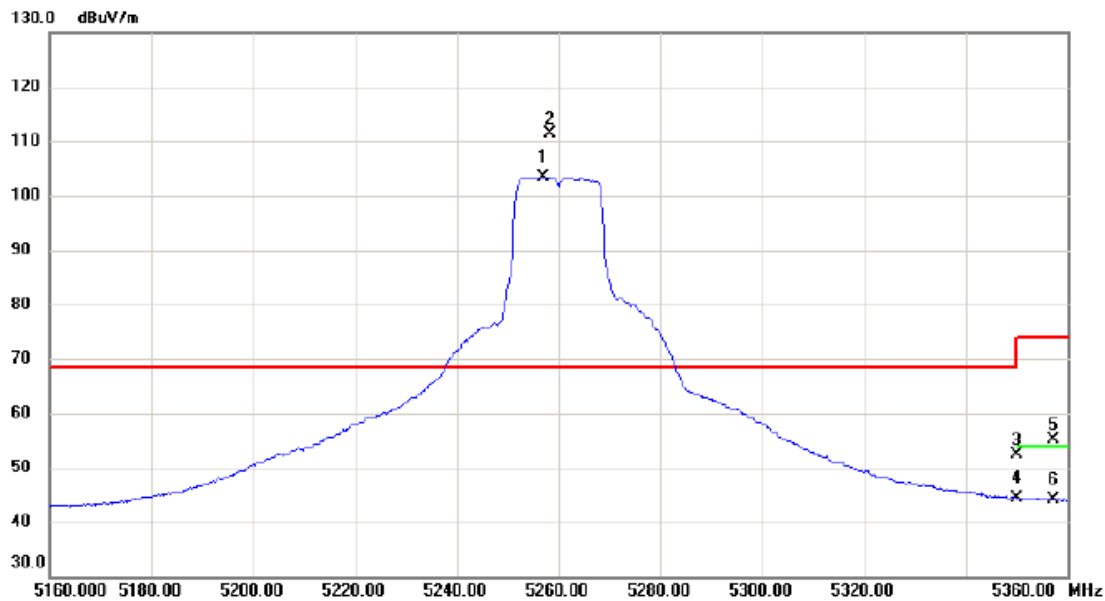


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5256.800	88.84	14.55	103.39	68.30	35.09	AVG	主波訊號不予判定
2	*	5258.200	96.82	14.55	111.37	68.30	43.07	peak	主波訊號不予判定
3		5350.000	37.64	14.71	52.35	74.00	-21.65	peak	
4		5350.000	29.75	14.71	44.46	54.00	-9.54	AVG	
5		5357.100	40.38	14.73	55.11	74.00	-18.89	peak	
6		5357.100	29.36	14.73	44.09	54.00	-9.91	AVG	

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

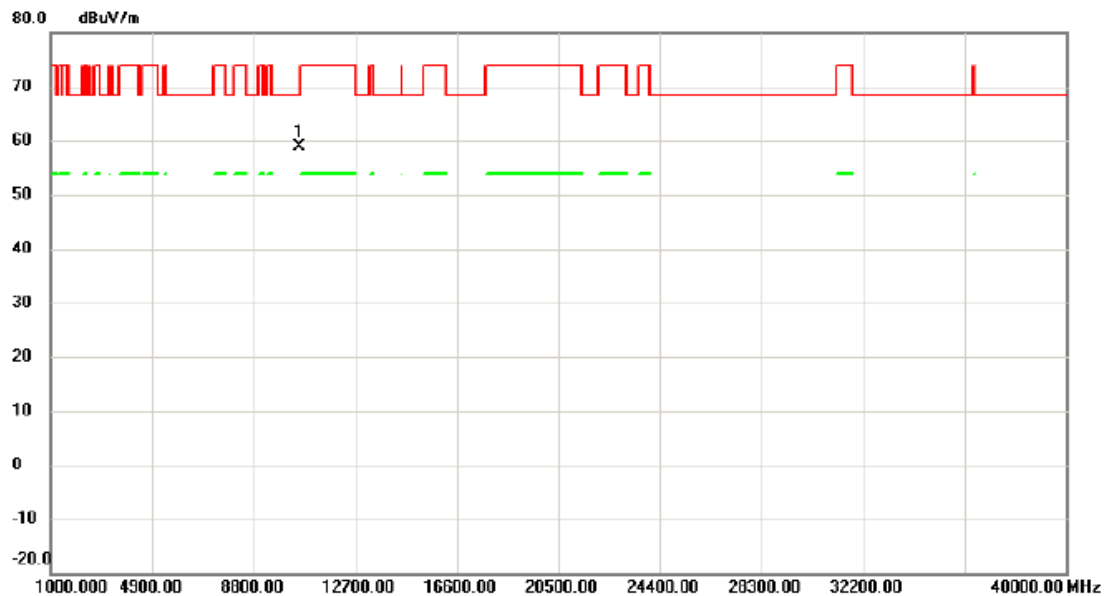


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10518.820	44.35	14.65	59.00	68.30	-9.30	peak	

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

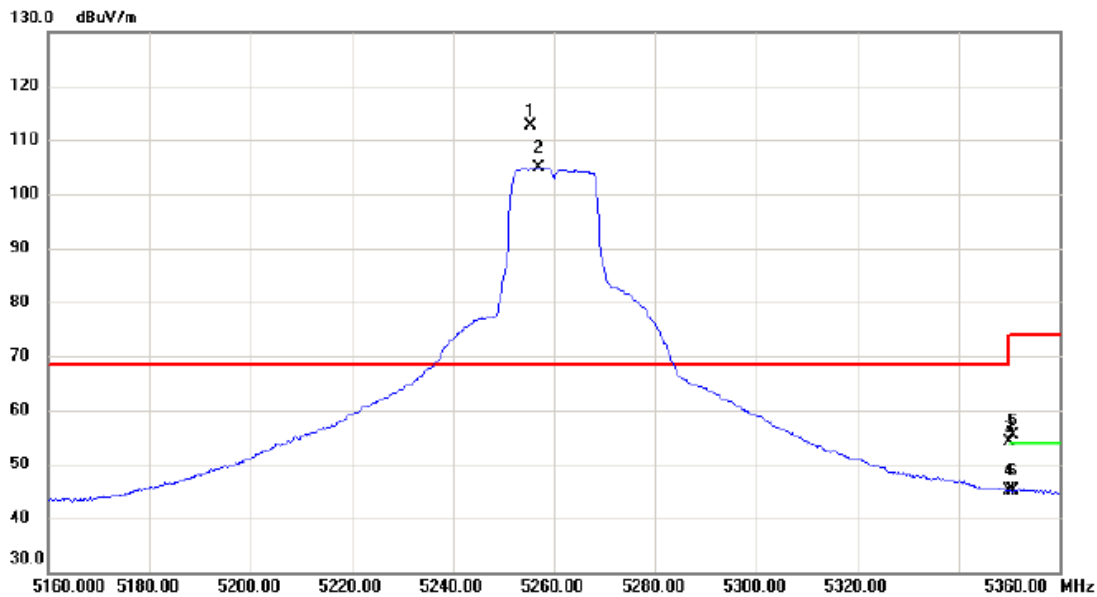

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5255.300	98.02	14.54	112.56	68.30	44.26	peak	主波訊號不予判定
2	X	5257.000	90.28	14.55	104.83	68.30	36.53	AVG	主波訊號不予判定
3		5350.000	39.34	14.71	54.05	74.00	-19.95	peak	
4		5350.000	30.51	14.71	45.22	54.00	-8.78	AVG	
5		5350.800	40.59	14.71	55.30	74.00	-18.70	peak	
6		5350.800	30.42	14.71	45.13	54.00	-8.87	AVG	

測試頻道: IEEE 802.11a / 5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

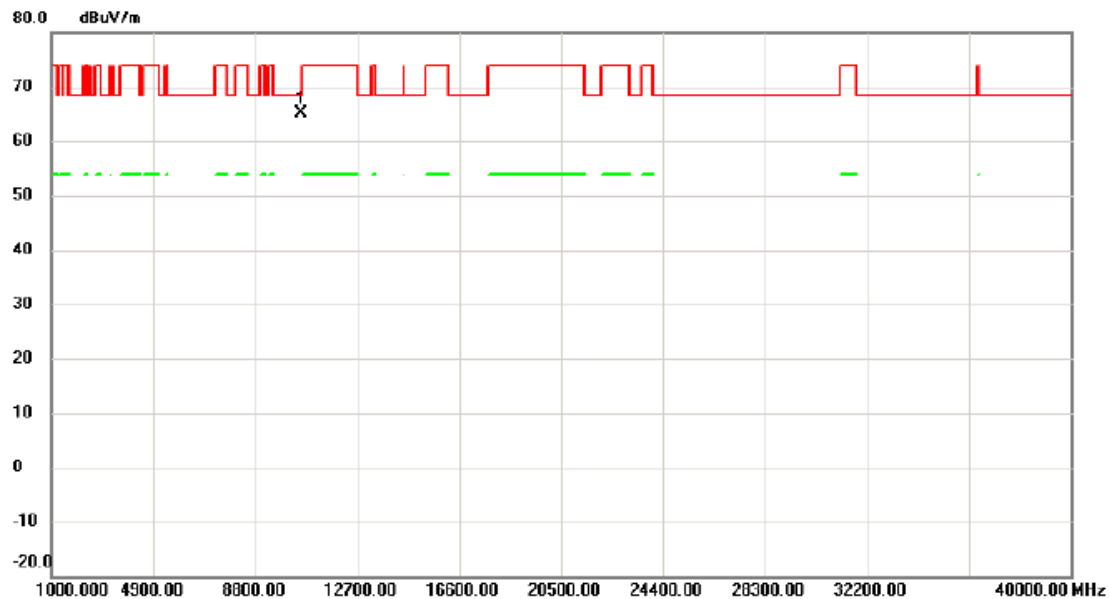


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10518.900	50.57	14.65	65.22	68.30	-3.08	peak	

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

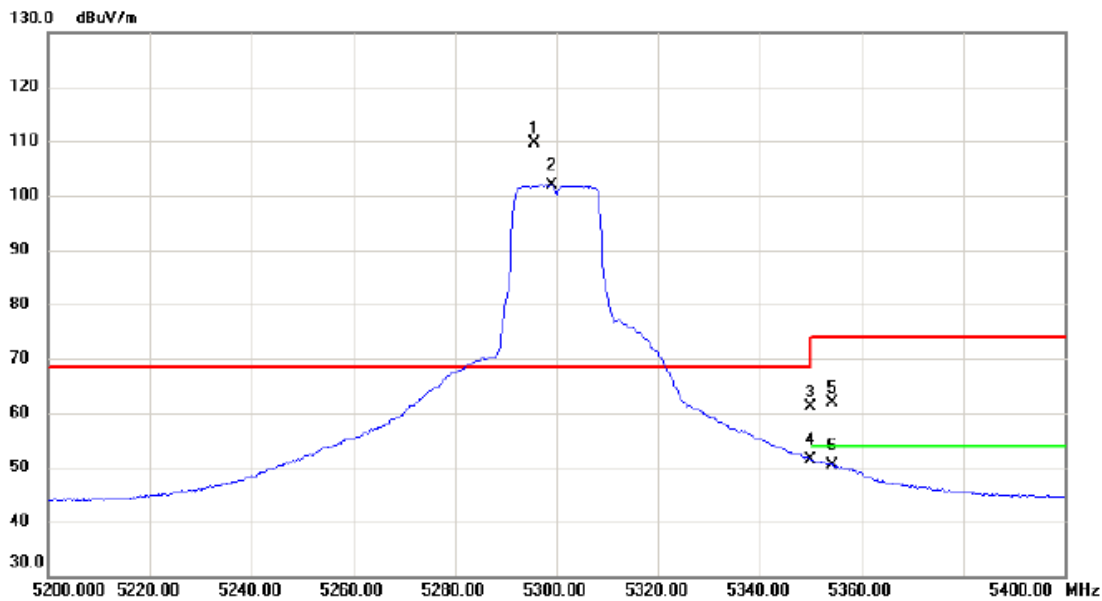


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5295.700	95.04	14.62	109.66	68.30	41.36	peak	主波訊號不予判定
2	X	5299.100	87.21	14.62	101.83	68.30	33.53	AVG	主波訊號不予判定
3		5350.000	46.54	14.71	61.25	74.00	-12.75	peak	
4		5350.000	36.75	14.71	51.46	54.00	-2.54	AVG	
5		5354.400	47.09	14.71	61.80	74.00	-12.20	peak	
6		5354.400	35.77	14.71	50.48	54.00	-3.52	AVG	

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

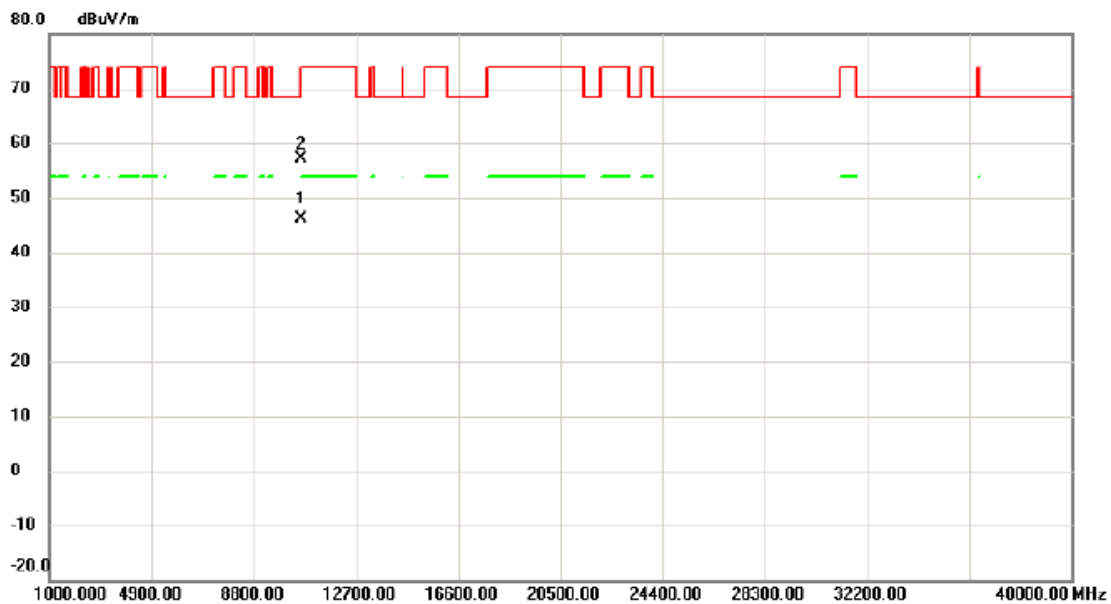


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10602.540	31.17	14.90	46.07	54.00	-7.93	AVG	
2		10605.460	42.30	14.90	57.20	74.00	-16.80	peak	

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

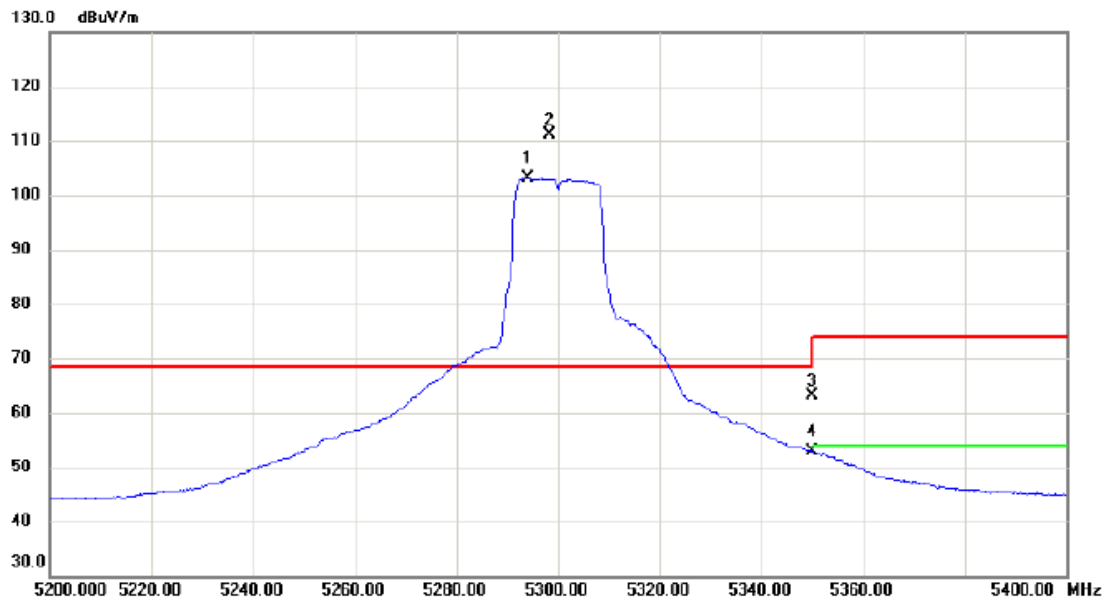


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5293.900	88.46	14.62	103.08	68.30	34.78	AVG	主波訊號不予判定
2	*	5298.400	96.55	14.62	111.17	68.30	42.87	peak	主波訊號不予判定
3		5350.000	48.47	14.71	63.18	74.00	-10.82	peak	
4		5350.000	38.07	14.71	52.78	54.00	-1.22	AVG	

測試頻道: IEEE 802.11a / 5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

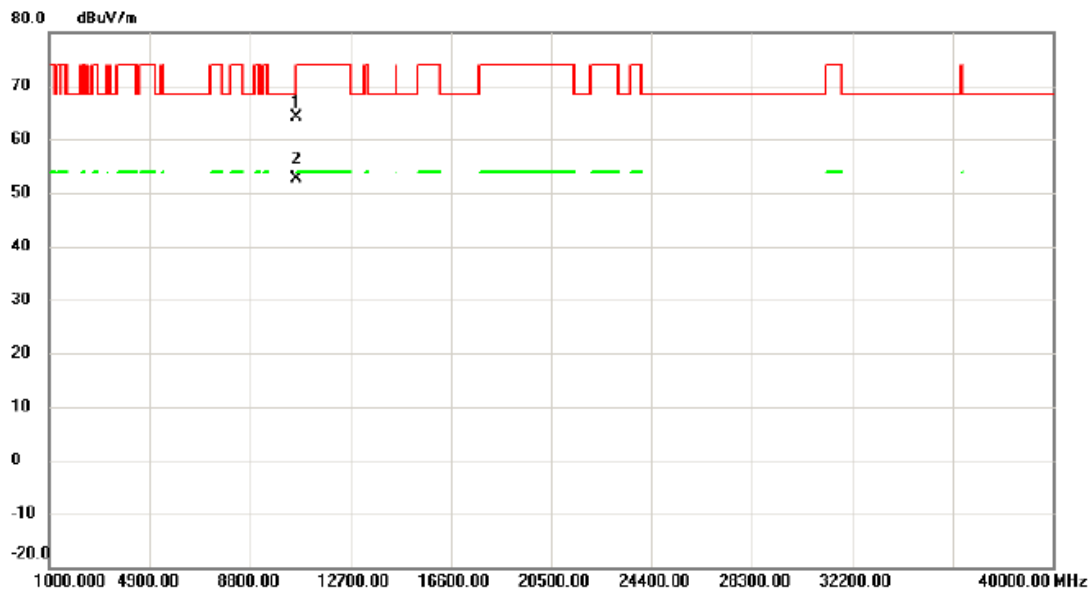


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10598.660	49.17	14.89	64.06	68.30	-4.24	peak	
2	*	10601.980	37.77	14.89	52.66	54.00	-1.34	AVG	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

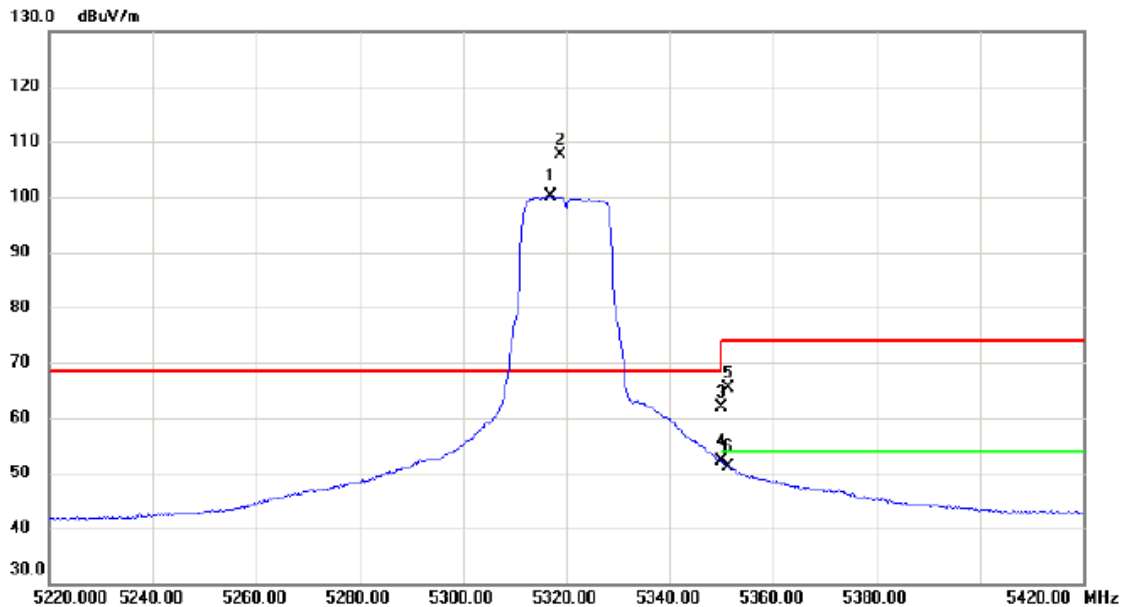


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5316.800	85.39	14.65	100.04	68.30	31.74	AVG	主波訊號不予判定
2	*	5318.700	92.88	14.65	107.53	68.30	39.23	peak	主波訊號不予判定
3		5350.000	47.17	14.71	61.88	74.00	-12.12	peak	
4		5350.000	37.34	14.71	52.05	54.00	-1.95	AVG	
5		5351.400	50.75	14.71	65.46	74.00	-8.54	peak	
6		5351.400	36.46	14.71	51.17	54.00	-2.83	AVG	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

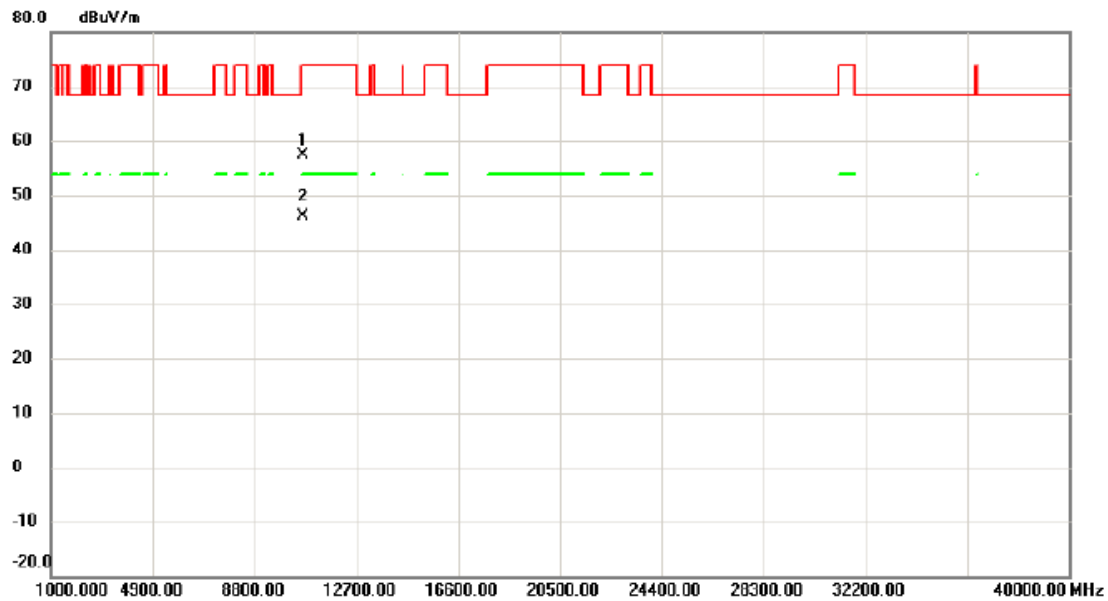


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.720	42.29	15.01	57.30	74.00	-16.70	peak	
2 *		10643.040	31.11	15.02	46.13	54.00	-7.87	AVG	

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

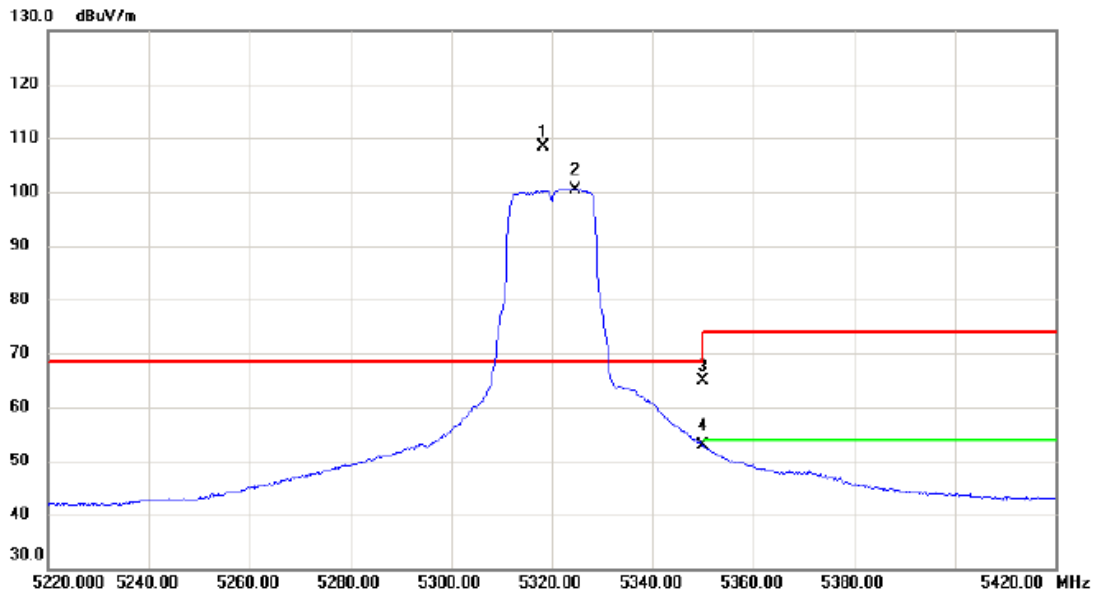


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5318.400	93.70	14.65	108.35	68.30	40.05	peak	主波訊號不予判定
2	X	5324.600	85.81	14.66	100.47	68.30	32.17	AVG	主波訊號不予判定
3		5350.000	50.07	14.71	64.78	74.00	-9.22	peak	
4		5350.000	38.28	14.71	52.99	54.00	-1.01	AVG	

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

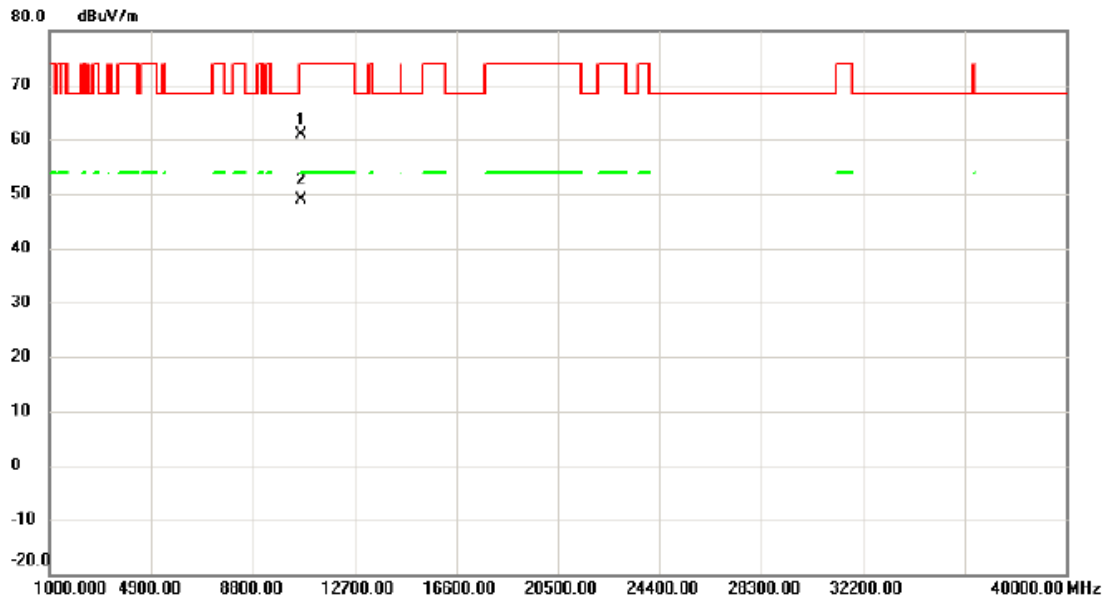

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10642.640	45.82	15.02	60.84	74.00	-13.16	peak	
2 *		10642.880	33.98	15.02	49.00	54.00	-5.00	AVG	

測試頻道: IEEE 802.11n (HT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

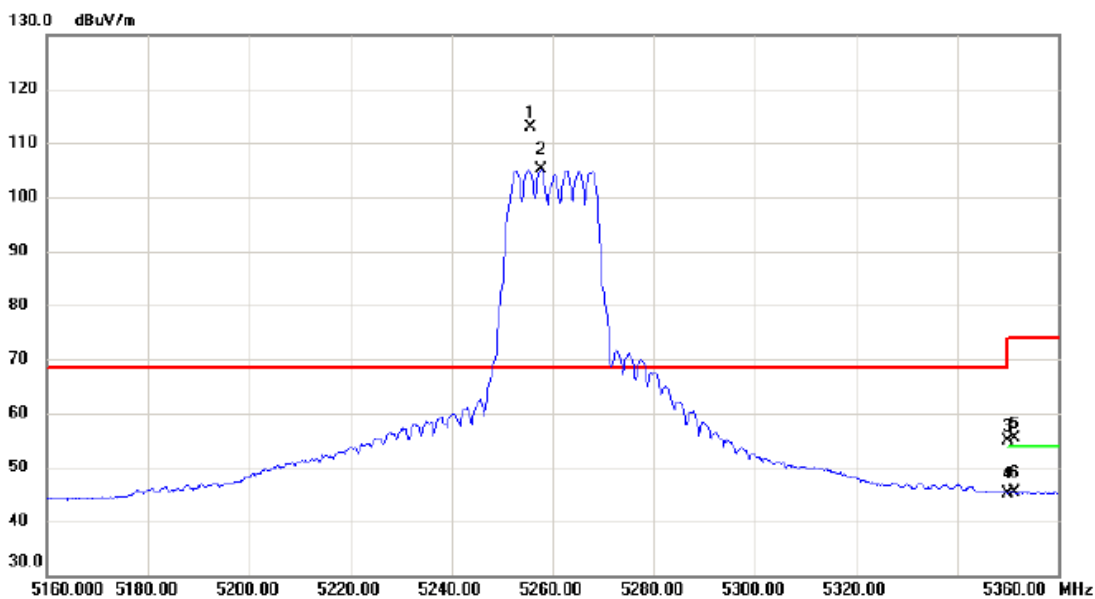


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5255.600	98.33	14.54	112.87	68.30	44.57	peak	主波訊號不予判定
2	X	5257.700	90.56	14.55	105.11	68.30	36.81	AVG	主波訊號不予判定
3		5350.000	40.19	14.71	54.90	74.00	-19.10	peak	
4		5350.000	30.53	14.71	45.24	54.00	-8.76	AVG	
5		5351.400	40.74	14.71	55.45	74.00	-18.55	peak	
6		5351.400	30.65	14.71	45.36	54.00	-8.64	AVG	

測試頻道: IEEE 802.11n (HT20) /
5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

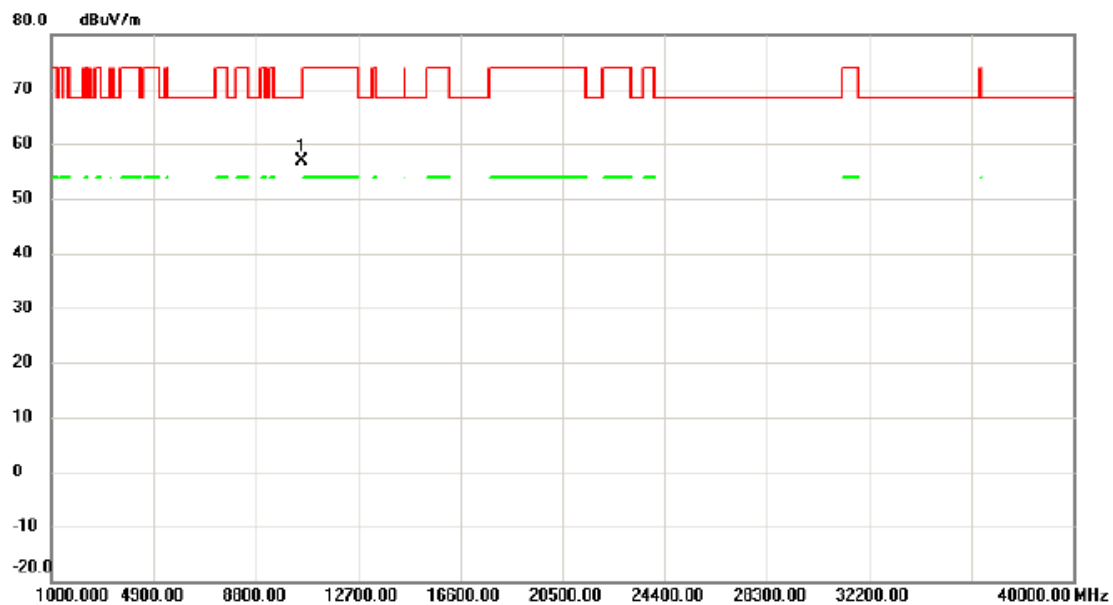

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10519.475	42.13	14.65	56.78	68.30	-11.52	peak	

測試頻道: IEEE 802.11n (HT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AVG

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

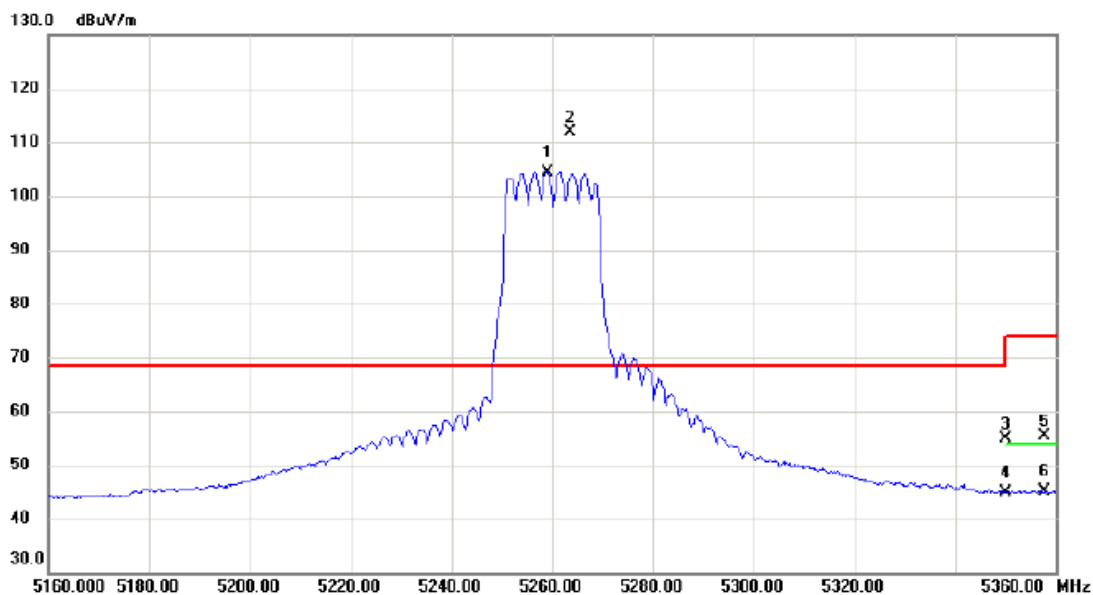

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5259.100	89.86	14.56	104.42	68.30	36.12	AVG	主波訊號不予判定
2	*	5263.600	97.44	14.56	112.00	68.30	43.70	peak	主波訊號不予判定
3		5350.000	40.21	14.71	54.92	74.00	-19.08	peak	
4		5350.000	30.29	14.71	45.00	54.00	-9.00	AVG	
5		5357.700	40.76	14.73	55.49	74.00	-18.51	peak	
6		5357.700	30.30	14.73	45.03	54.00	-8.97	AVG	

測試頻道: IEEE 802.11n (HT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

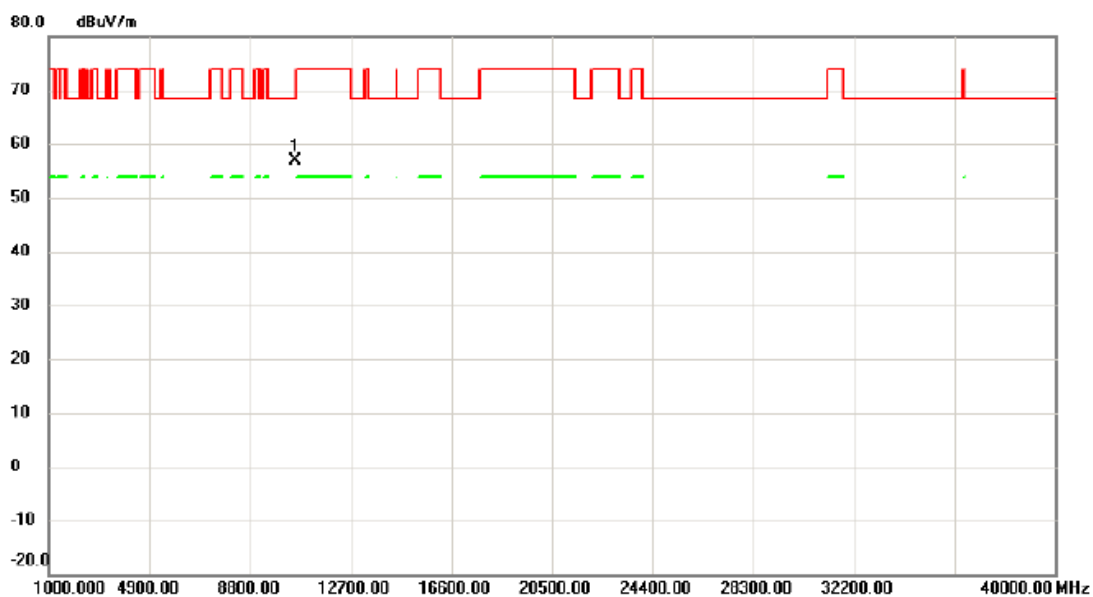


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10521.950	42.22	14.65	56.87	68.30	-11.43	peak	

測試頻道: IEEE 802.11n (HT20) /
5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

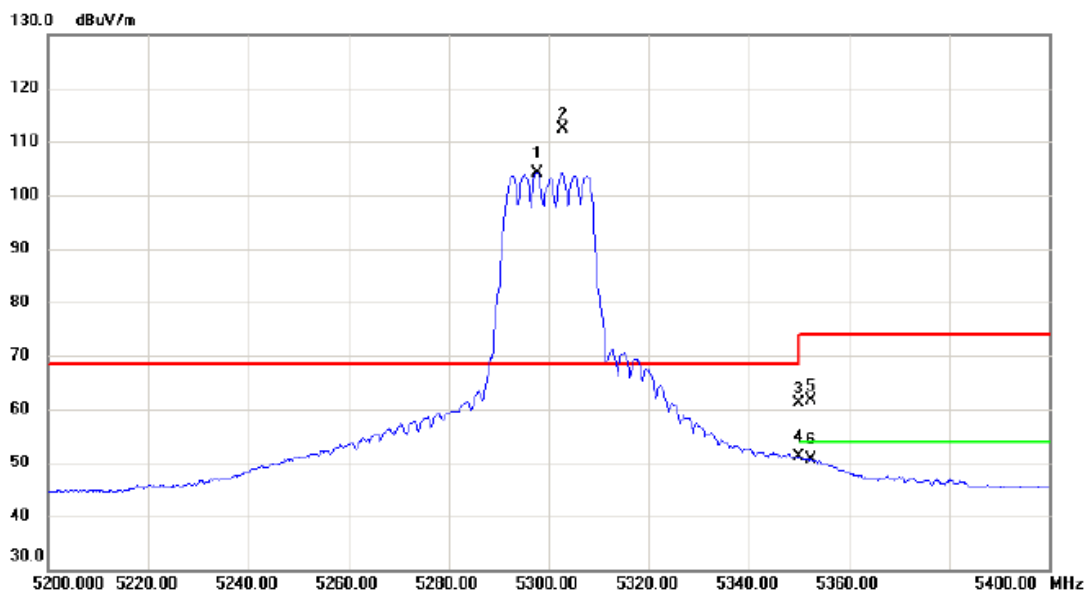

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5297.700	89.61	14.62	104.23	68.30	35.93	AVG	主波訊號不予判定
2	*	5302.700	97.79	14.63	112.42	68.30	44.12	peak	主波訊號不予判定
3		5350.000	46.36	14.71	61.07	74.00	-12.93	peak	
4		5350.000	36.48	14.71	51.19	54.00	-2.81	AVG	
5		5352.300	46.99	14.71	61.70	74.00	-12.30	peak	
6		5352.300	35.87	14.71	50.58	54.00	-3.42	AVG	

測試頻道: IEEE 802.11n (HT20) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

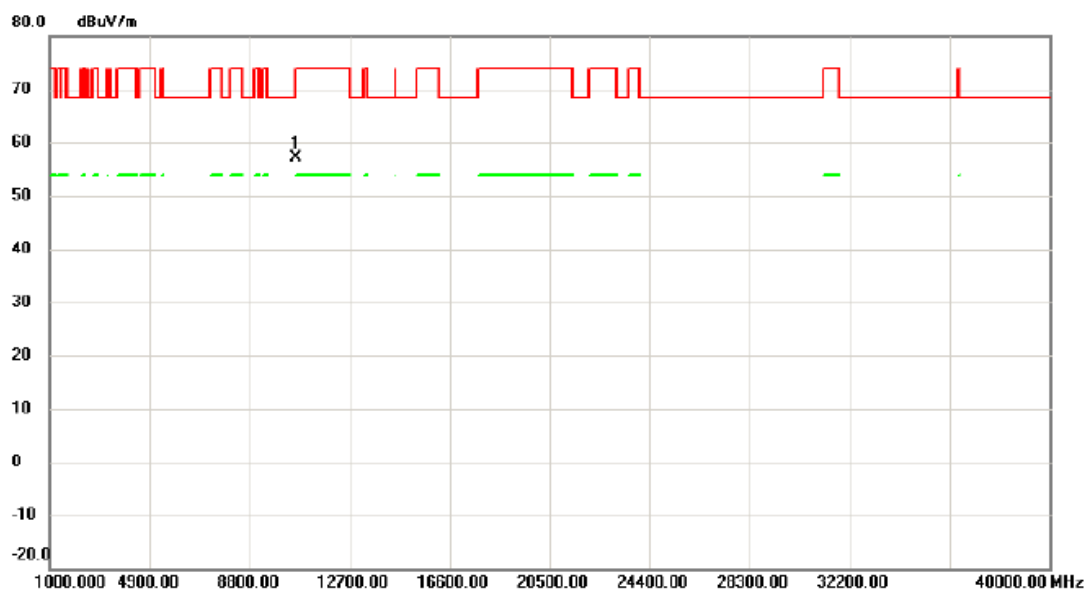

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10598.900	42.14	14.89	57.03	68.30	-11.27	peak	

測試頻道: IEEE 802.11n (HT20) /
5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

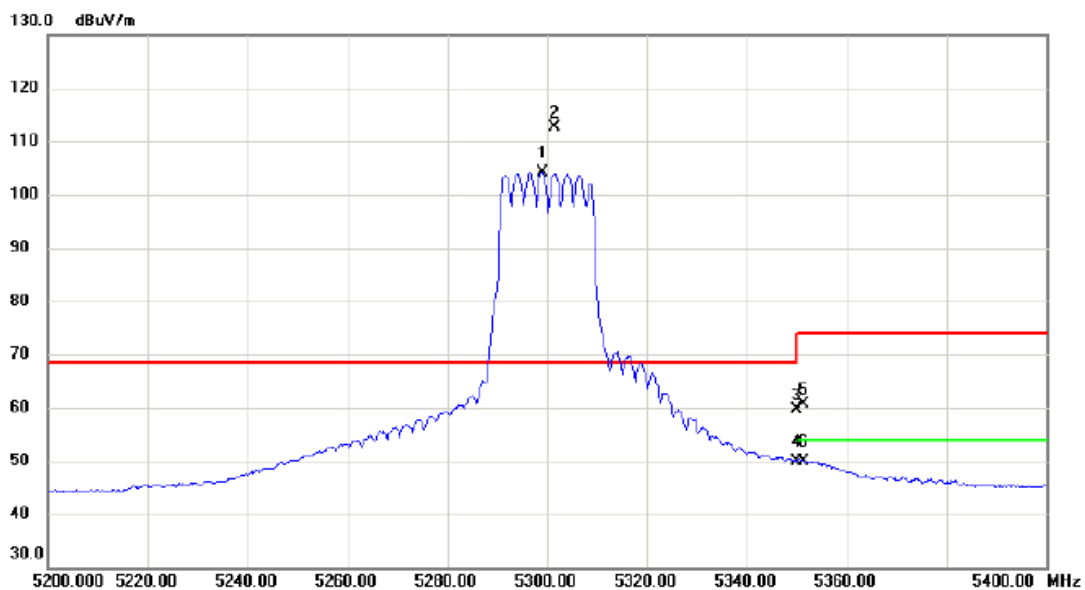

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5299.000	89.51	14.62	104.13	68.30	35.83	AVG	主波訊號不予判定
2	*	5301.400	97.91	14.62	112.53	68.30	44.23	peak	主波訊號不予判定
3		5350.000	44.90	14.71	59.61	74.00	-14.39	peak	
4		5350.000	35.23	14.71	49.94	54.00	-4.06	AVG	
5		5351.300	45.86	14.71	60.57	74.00	-13.43	peak	
6		5351.300	35.29	14.71	50.00	54.00	-4.00	AVG	

測試頻道: IEEE 802.11n (HT20) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

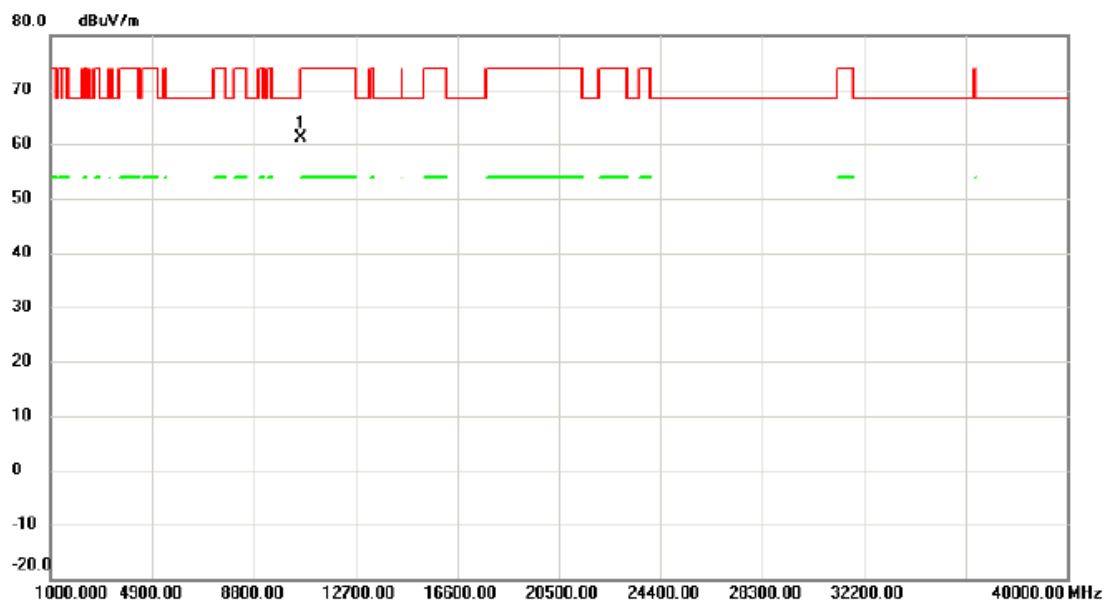

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10596.725	46.13	14.88	61.01	68.30	-7.29	peak	

測試頻道: IEEE 802.11n (HT20) /
5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

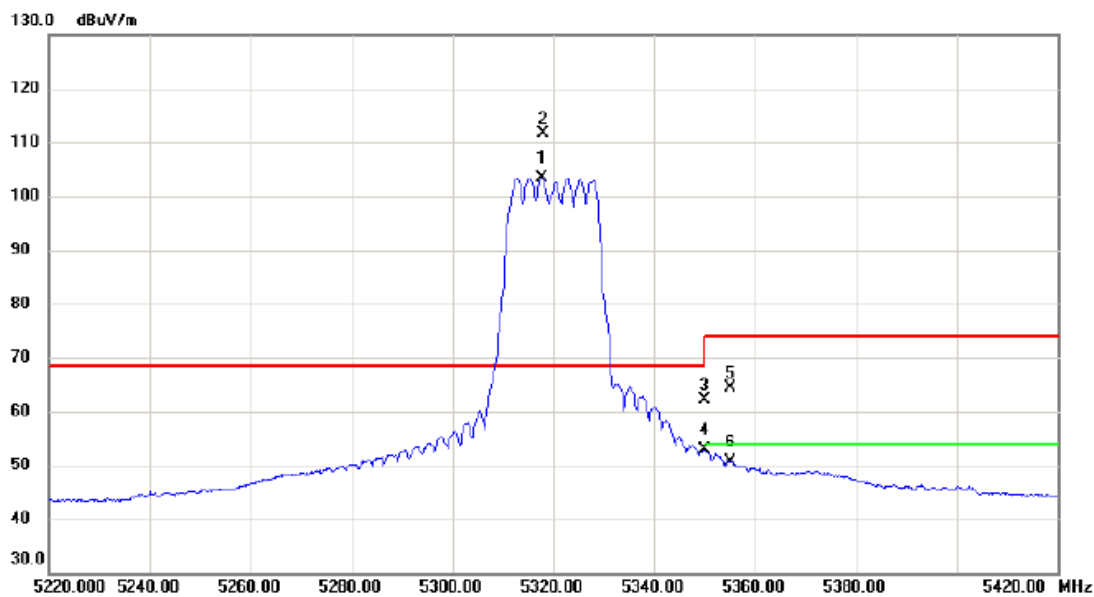

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5317.800	88.77	14.65	103.42	68.30	35.12	AVG	主波訊號不予判定
2	*	5318.000	97.07	14.65	111.72	68.30	43.42	peak	主波訊號不予判定
3		5350.000	47.37	14.71	62.08	74.00	-11.92	peak	
4		5350.000	38.09	14.71	52.80	54.00	-1.20	AVG	
5		5355.000	49.72	14.71	64.43	74.00	-9.57	peak	
6		5355.000	35.94	14.71	50.65	54.00	-3.35	AVG	

測試頻道: IEEE 802.11n (HT20) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

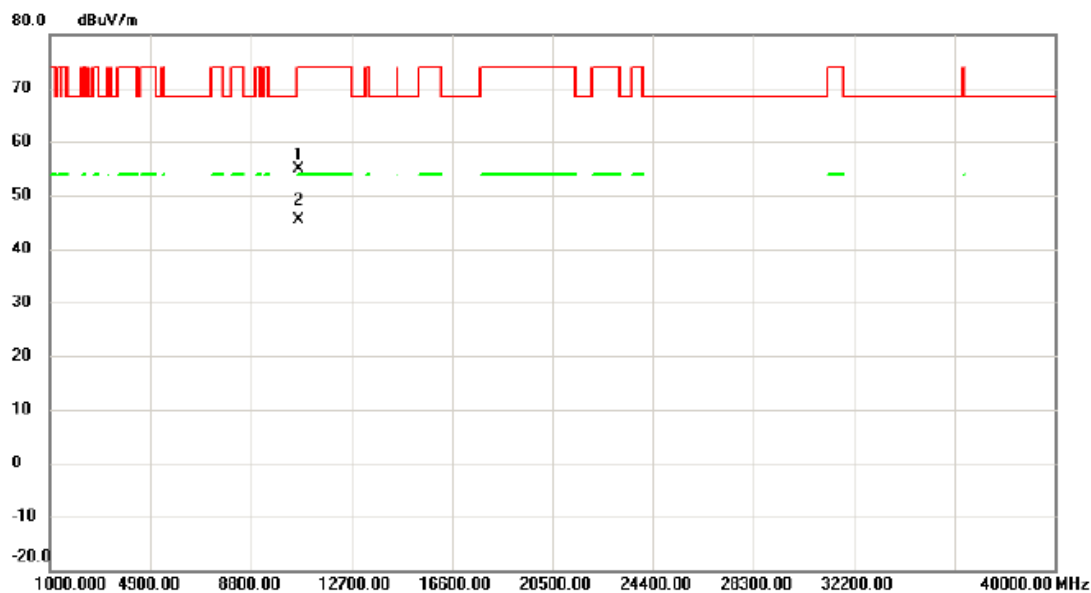

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10632.075	39.85	14.99	54.84	74.00	-19.16	peak	
2	*	10639.275	30.47	15.01	45.48	54.00	-8.52	AVG	

測試頻道: IEEE 802.11n (HT20) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

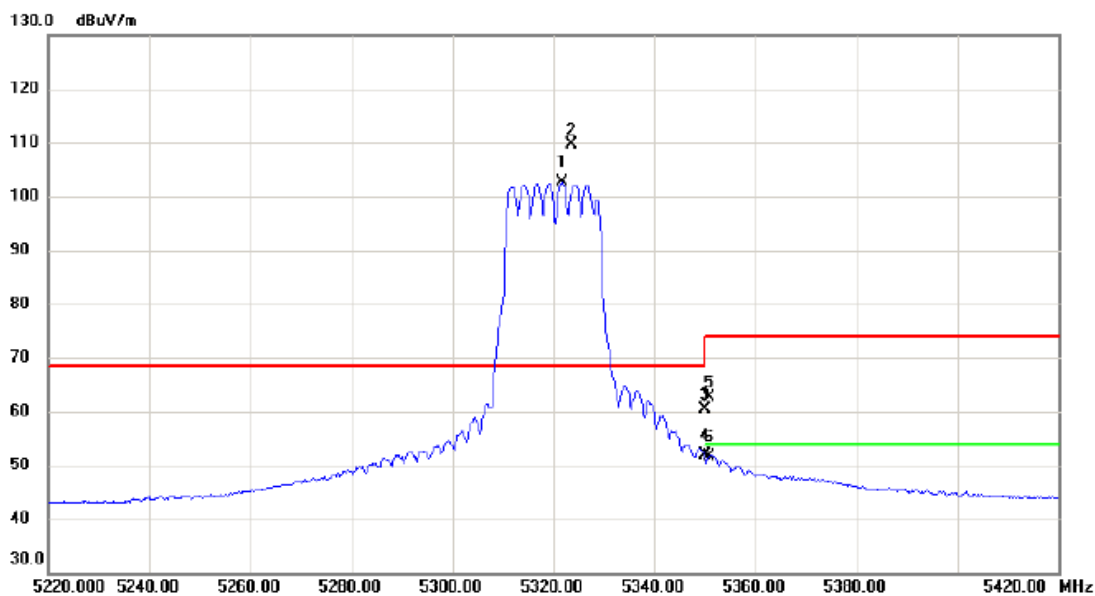

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5321.800	87.89	14.66	102.55	68.30	34.25	AVG	主波訊號不予判定
2	*	5323.700	94.93	14.66	109.59	68.30	41.29	peak	主波訊號不予判定
3		5350.000	45.77	14.71	60.48	74.00	-13.52	peak	
4		5350.000	37.26	14.71	51.97	54.00	-2.03	AVG	
5		5350.800	47.80	14.71	62.51	74.00	-11.49	peak	
6		5350.800	36.92	14.71	51.63	54.00	-2.37	AVG	

測試頻道: IEEE 802.11n (HT20) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

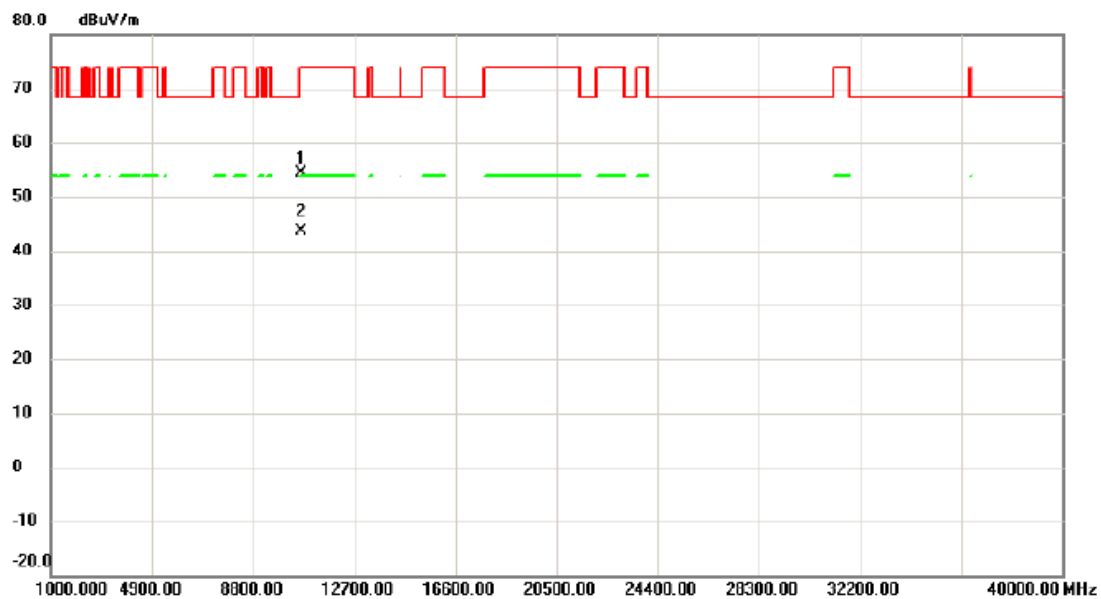

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10639.025	39.31	15.01	54.32	74.00	-19.68	peak	
2	*	10641.525	28.71	15.01	43.72	54.00	-10.28	AVG	

測試頻道: IEEE 802.11n (HT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

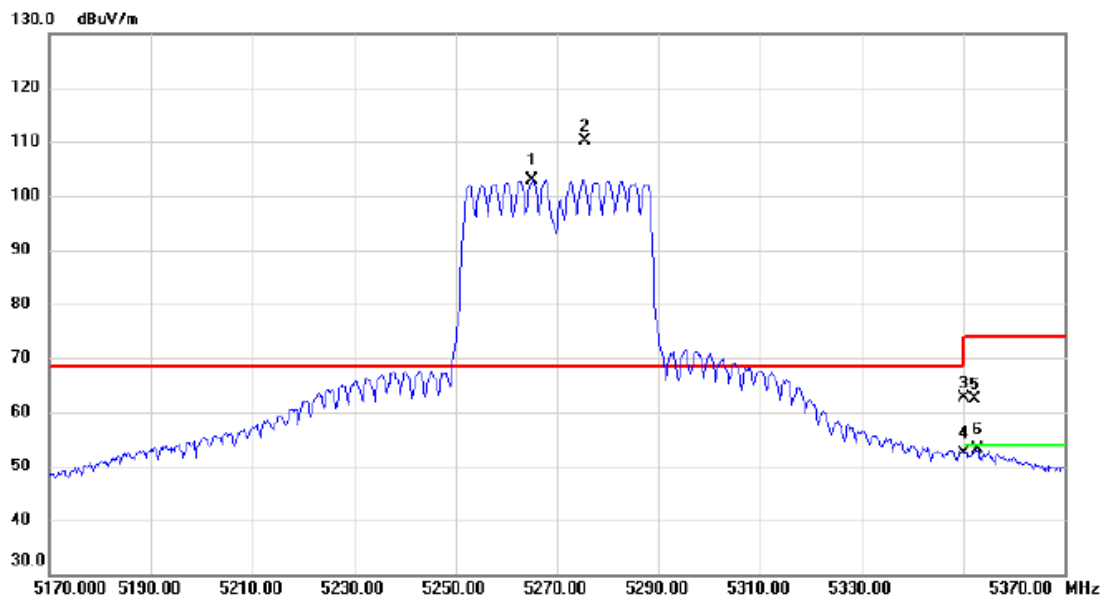

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5265.200	88.41	14.56	102.97	68.30	34.67	AVG	主波訊號不予判定
2	*	5275.500	95.56	14.58	110.14	68.30	41.84	peak	主波訊號不予判定
3		5350.000	48.02	14.71	62.73	74.00	-11.27	peak	
4		5350.000	37.64	14.71	52.35	54.00	-1.65	AVG	
5		5352.400	47.74	14.71	62.45	74.00	-11.55	peak	
6		5352.700	38.37	14.71	53.08	54.00	-0.92	AVG	

測試頻道: IEEE 802.11n (HT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

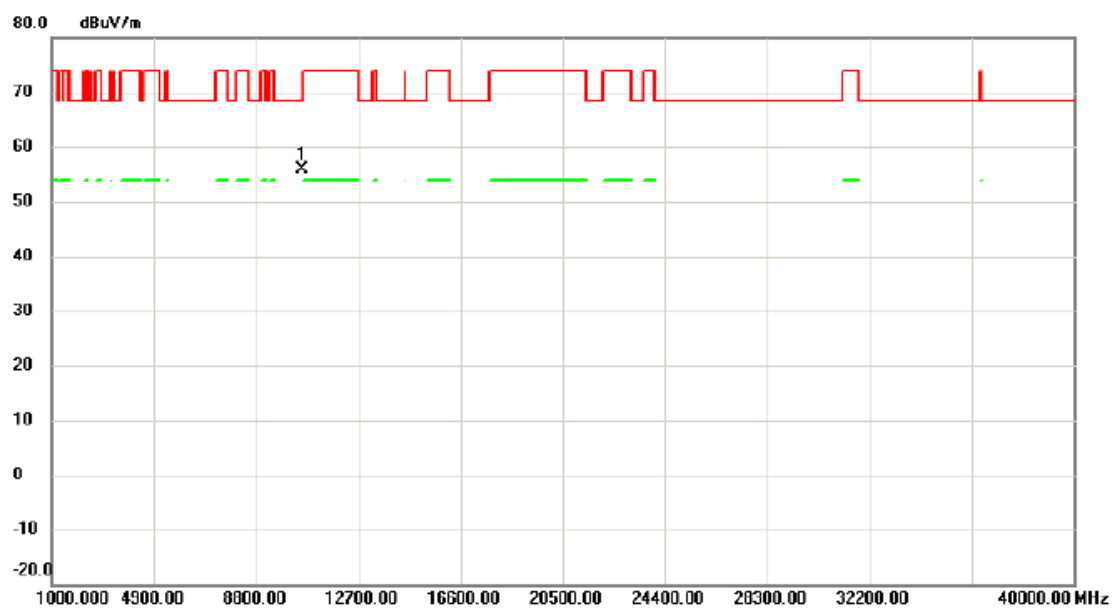

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10548.450	41.20	14.74	55.94	68.30	-12.36	peak	

測試頻道: IEEE 802.11n (HT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AVG

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

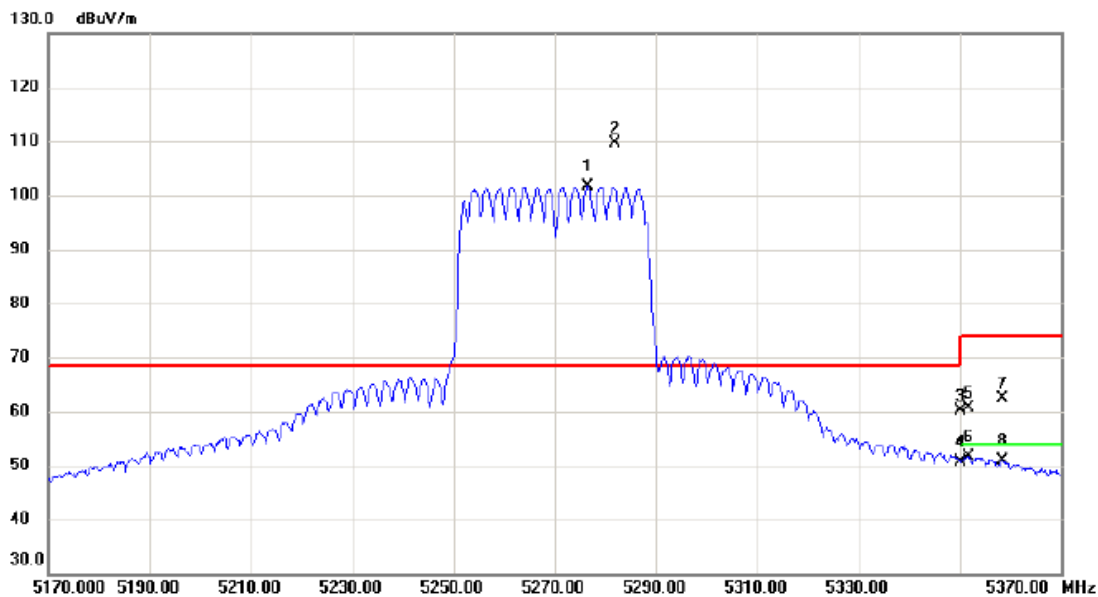

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5276.600	87.11	14.59	101.70	68.30	33.40	AVG	主波訊號不予判定
2	*	5281.800	95.03	14.60	109.63	68.30	41.33	peak	主波訊號不予判定
3		5350.000	45.50	14.71	60.21	74.00	-13.79	peak	
4		5350.000	35.86	14.71	50.57	54.00	-3.43	AVG	
5		5351.600	45.83	14.71	60.54	74.00	-13.46	peak	
6		5351.600	37.03	14.71	51.74	54.00	-2.26	AVG	
7		5358.500	47.62	14.74	62.36	74.00	-11.64	peak	
8		5358.500	36.10	14.74	50.84	54.00	-3.16	AVG	

測試頻道: IEEE 802.11n (HT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

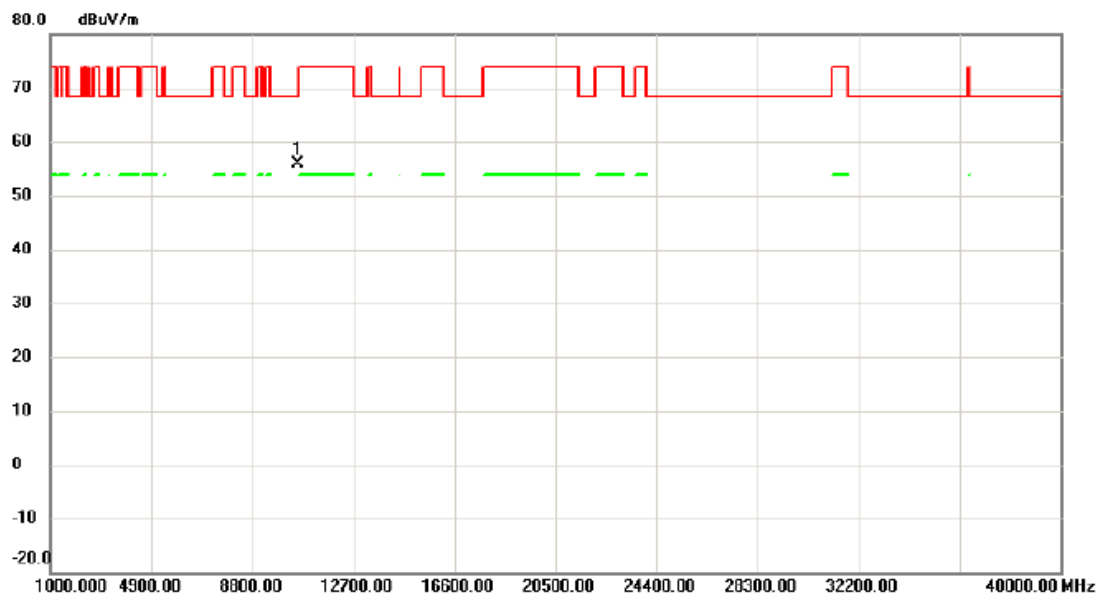

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10548.150	41.25	14.74	55.99	68.30	-12.31	peak	

測試頻道: IEEE 802.11n (HT40) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

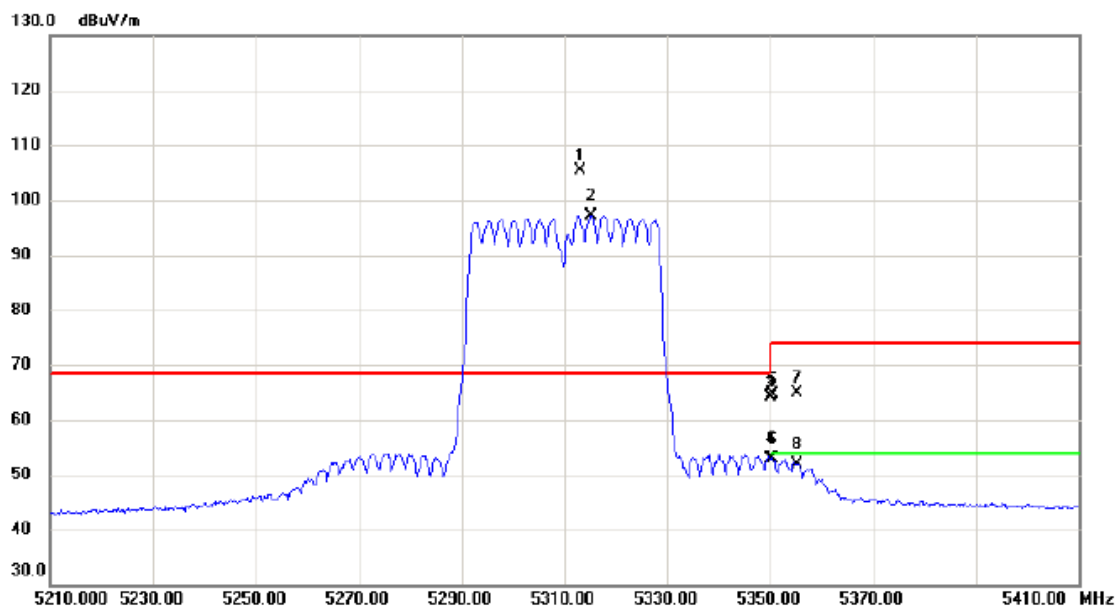

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5313.100	90.83	14.65	105.48	68.30	37.18	peak	主波訊號不予判定
2	X	5315.100	82.57	14.65	97.22	68.30	28.92	AVG	主波訊號不予判定
3		5350.000	49.35	14.71	64.06	74.00	-9.94	peak	
4		5350.000	38.27	14.71	52.98	54.00	-1.02	AVG	
5		5350.400	49.94	14.71	64.65	74.00	-9.35	peak	
6		5350.400	38.29	14.71	53.00	54.00	-1.00	AVG	
7		5355.200	50.20	14.71	64.91	74.00	-9.09	peak	
8		5355.200	37.11	14.71	51.82	54.00	-2.18	AVG	

測試頻道: IEEE 802.11n (HT40) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

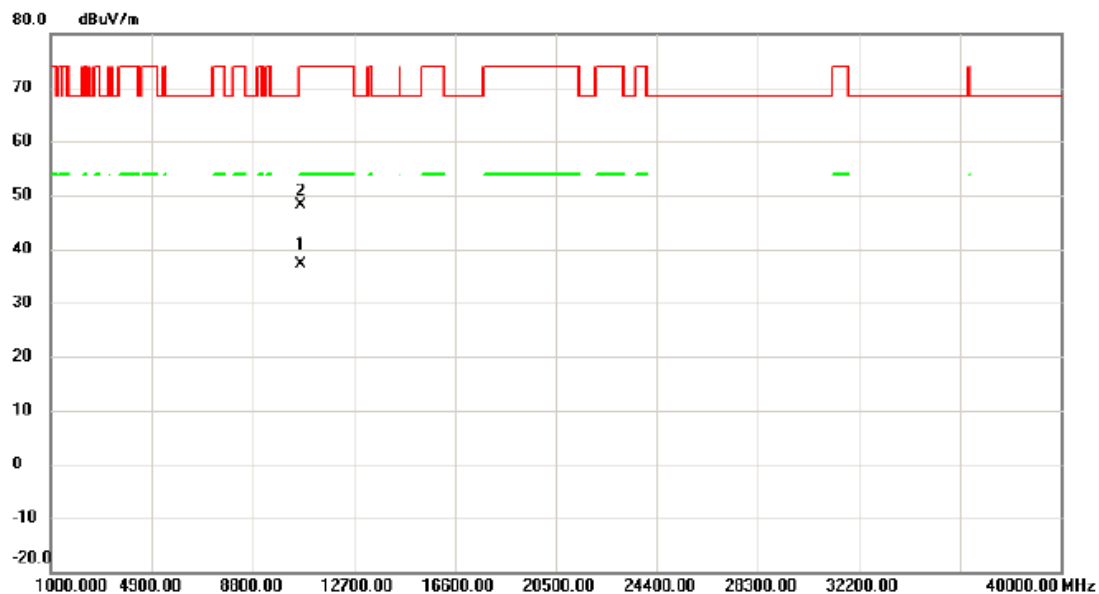

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10621.850	22.27	14.95	37.22	54.00	-16.78	AVG	
2	10636.200	33.11	15.00	48.11	74.00	-25.89	peak	

測試頻道: IEEE 802.11n (HT40) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

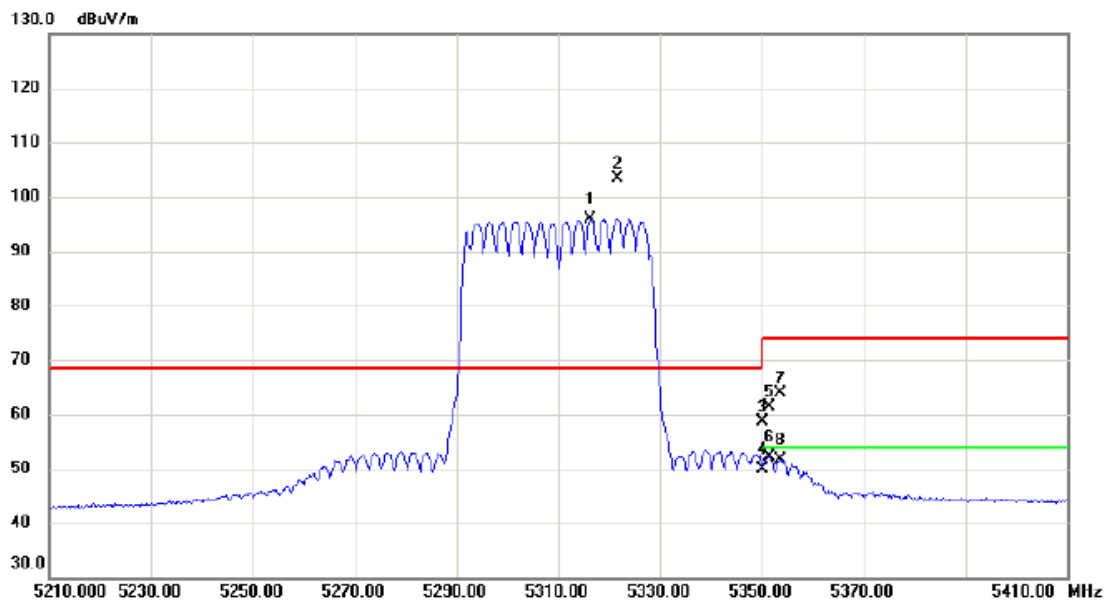

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5316.400	81.27	14.65	95.92	68.30	27.62	AVG	主波訊號不予判定
2	*	5321.500	88.78	14.66	103.44	68.30	35.14	peak	主波訊號不予判定
3		5350.000	43.92	14.71	58.63	74.00	-15.37	peak	
4		5350.000	35.22	14.71	49.93	54.00	-4.07	AVG	
5		5351.500	46.62	14.71	61.33	74.00	-12.67	peak	
6		5351.500	37.35	14.71	52.06	54.00	-1.94	AVG	
7		5353.700	49.29	14.71	64.00	74.00	-10.00	peak	
8		5353.700	36.81	14.71	51.52	54.00	-2.48	AVG	

測試頻道: IEEE 802.11n (HT40) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

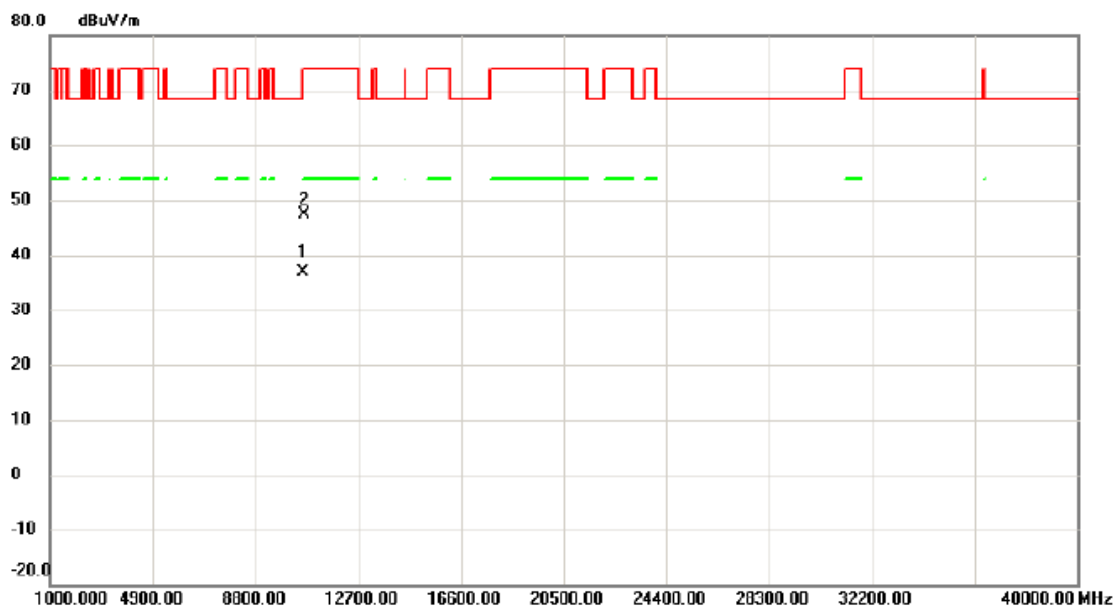


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10616.550	22.00	14.94	36.94	54.00	-17.06	AVG	
2		10624.100	32.40	14.96	47.36	74.00	-26.64	peak	

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

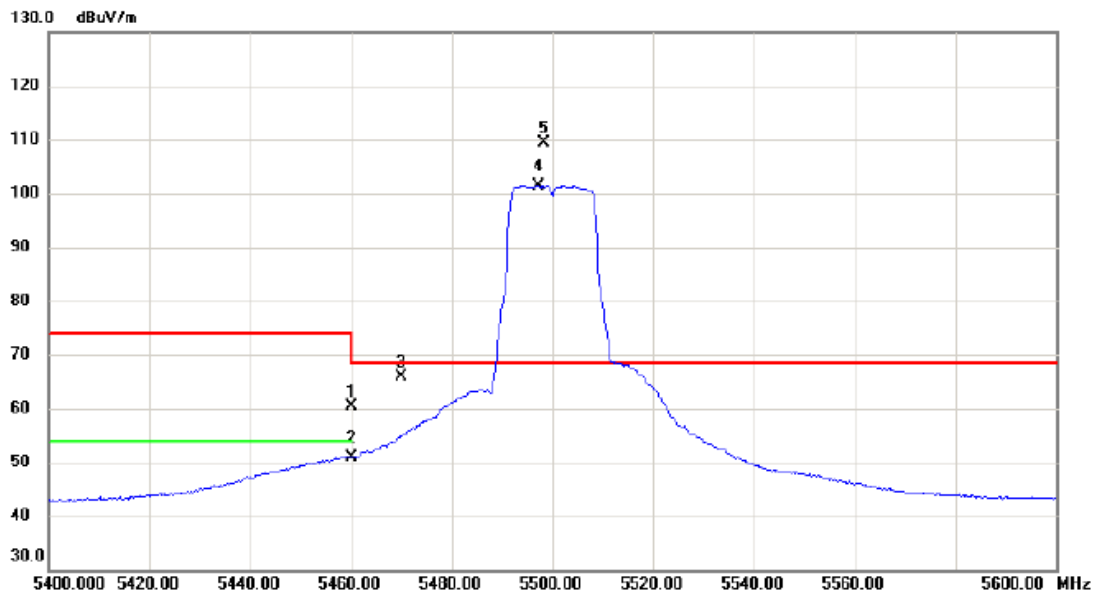


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	45.59	14.91	60.50	74.00	-13.50	peak	
2		5460.000	36.07	14.91	50.98	54.00	-3.02	AVG	
3		5470.000	51.04	14.93	65.97	68.30	-2.33	peak	
4	X	5497.200	86.48	14.98	101.46	68.30	33.16	AVG	主波訊號不予判定
5	*	5498.200	94.42	14.98	109.40	68.30	41.10	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/20
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

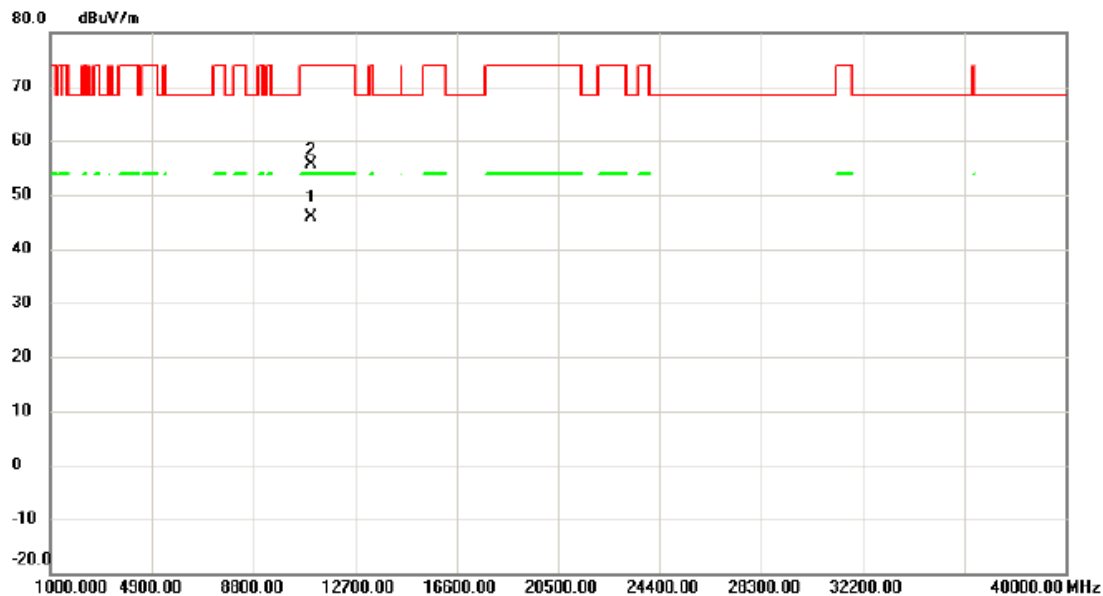


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11002.600	29.86	16.09	45.95	54.00	-8.05	AVG	
2		11003.060	39.48	16.09	55.57	74.00	-18.43	peak	

測試頻道: IEEE 802.11a / 5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

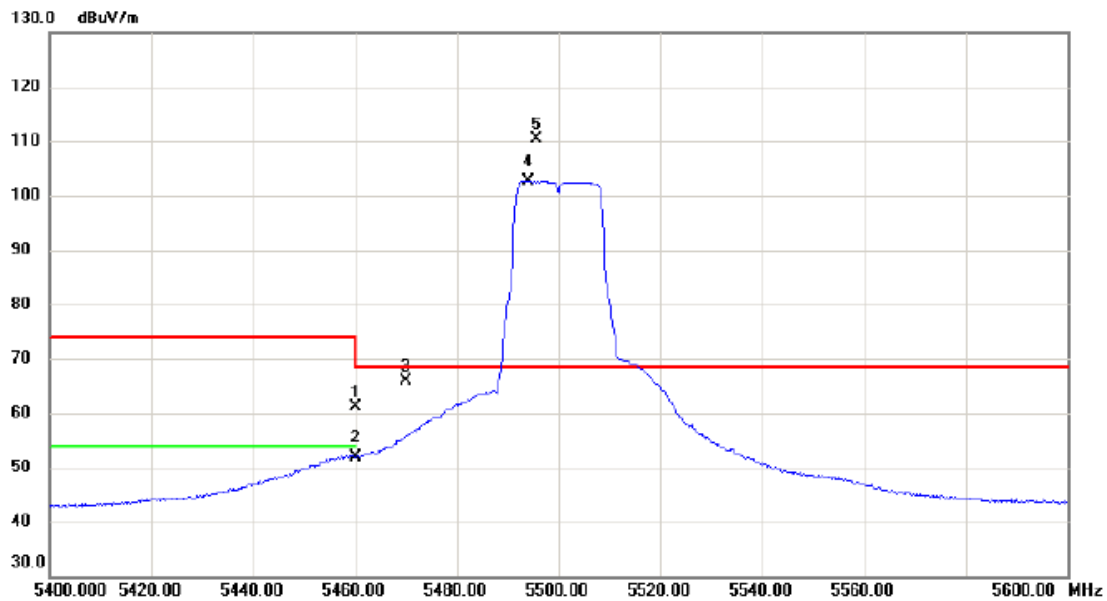

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	46.27	14.91	61.18	74.00	-12.82	peak	
2		5460.000	37.09	14.91	52.00	54.00	-2.00	AVG	
3		5470.000	50.91	14.93	65.84	68.30	-2.46	peak	
4	X	5494.000	87.73	14.98	102.71	68.30	34.41	AVG	主波訊號不予判定
5	*	5495.500	95.39	14.98	110.37	68.30	42.07	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

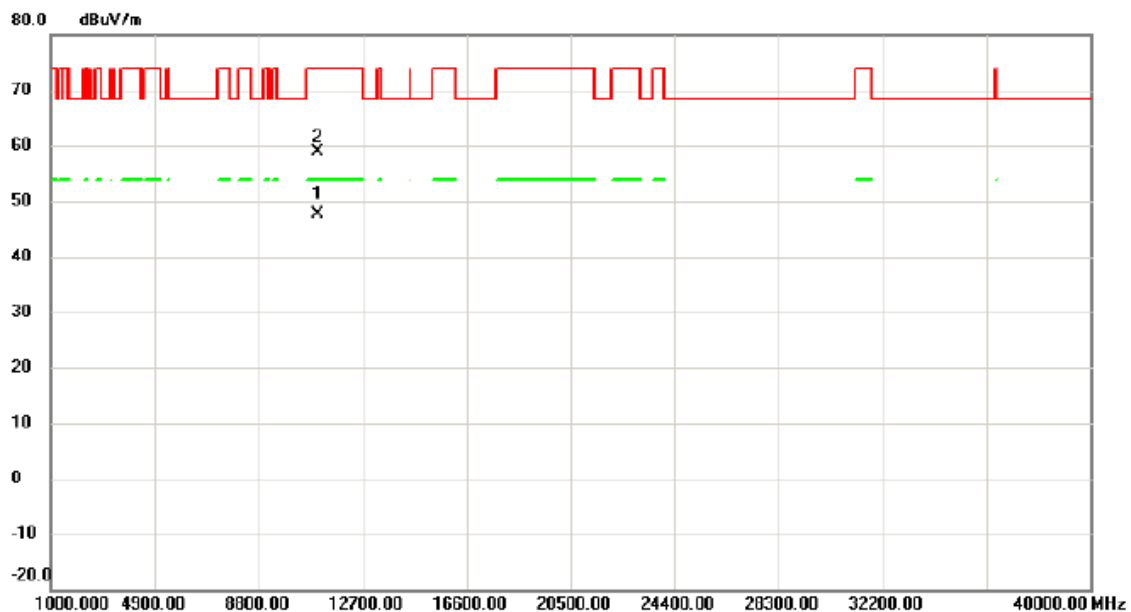


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11002.800	31.55	16.09	47.64	54.00	-6.36	AVG	
2		11002.840	42.69	16.09	58.78	74.00	-15.22	peak	

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

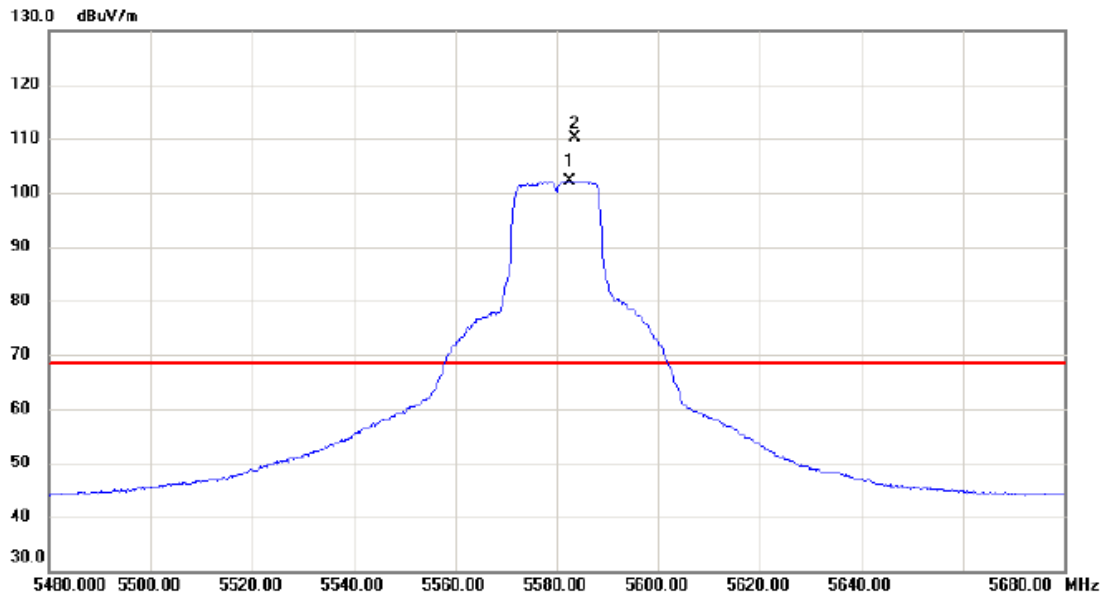


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5582.600	86.96	15.08	102.04	68.30	33.74	AVG	主波訊號不予判定
2	*	5583.700	95.07	15.09	110.16	68.30	41.86	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

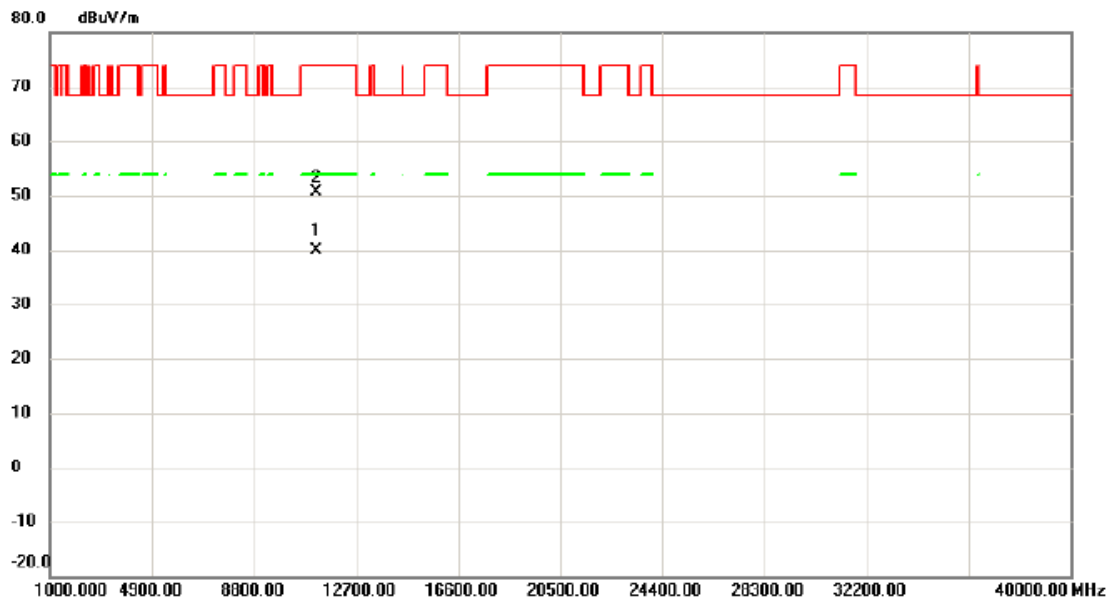


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11159.640	23.53	16.31	39.84	54.00	-14.16	AVG	
2		11160.600	34.22	16.31	50.53	74.00	-23.47	peak	

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

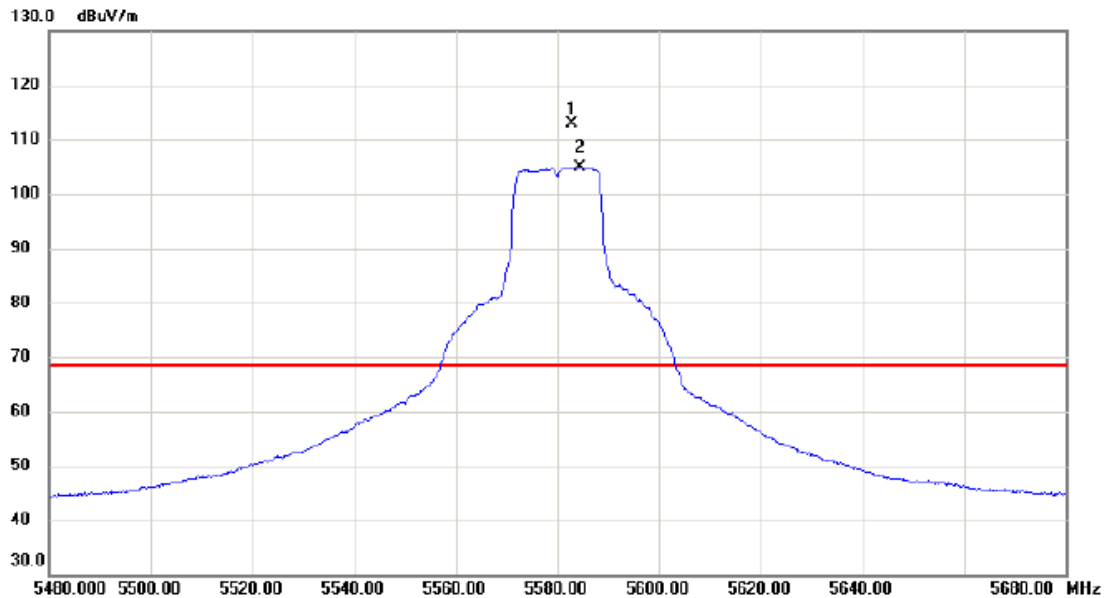


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5582.800	97.82	15.08	112.90	68.30	44.60	peak	主波訊號不予判定
2	X	5584.500	89.84	15.09	104.93	68.30	36.63	AVG	主波訊號不予判定

測試頻道: IEEE 802.11a / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

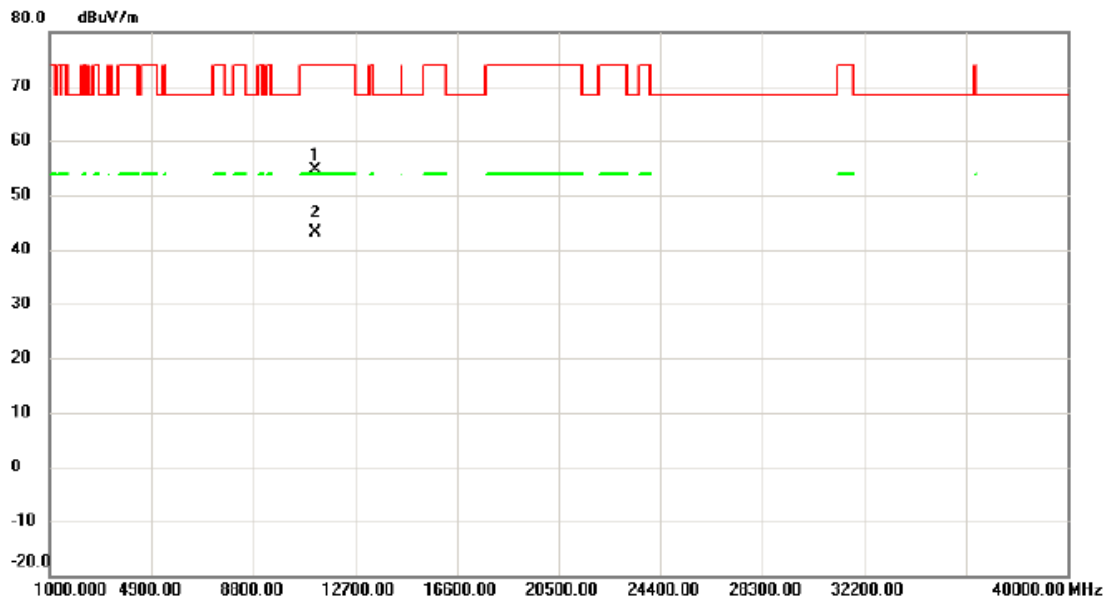


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11159.440	38.43	16.31	54.74	74.00	-19.26	peak	
2	*	11159.500	26.89	16.31	43.20	54.00	-10.80	AVG	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

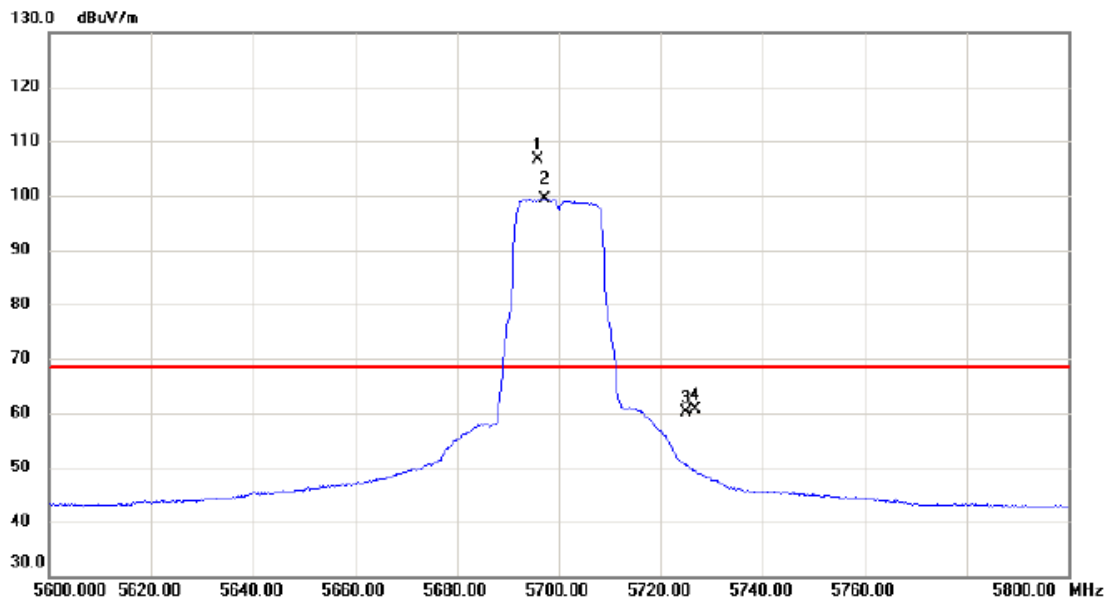


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5695.900	91.37	15.24	106.61	68.30	38.31	peak	主波訊號不予判定
2	X	5697.200	84.05	15.24	99.29	68.30	30.99	AVG	主波訊號不予判定
3		5725.000	44.76	15.27	60.03	68.30	-8.27	peak	
4		5726.900	45.47	15.27	60.74	68.30	-7.56	peak	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

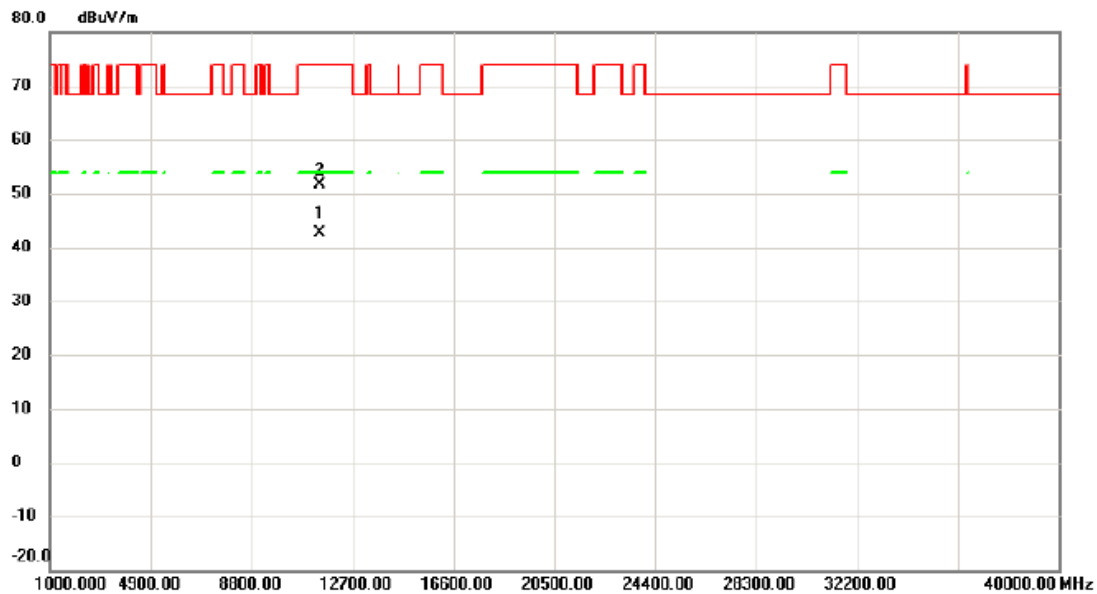


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11400.820	26.11	16.62	42.73	54.00	-11.27	AVG	
2		11401.640	34.95	16.62	51.57	74.00	-22.43	peak	

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

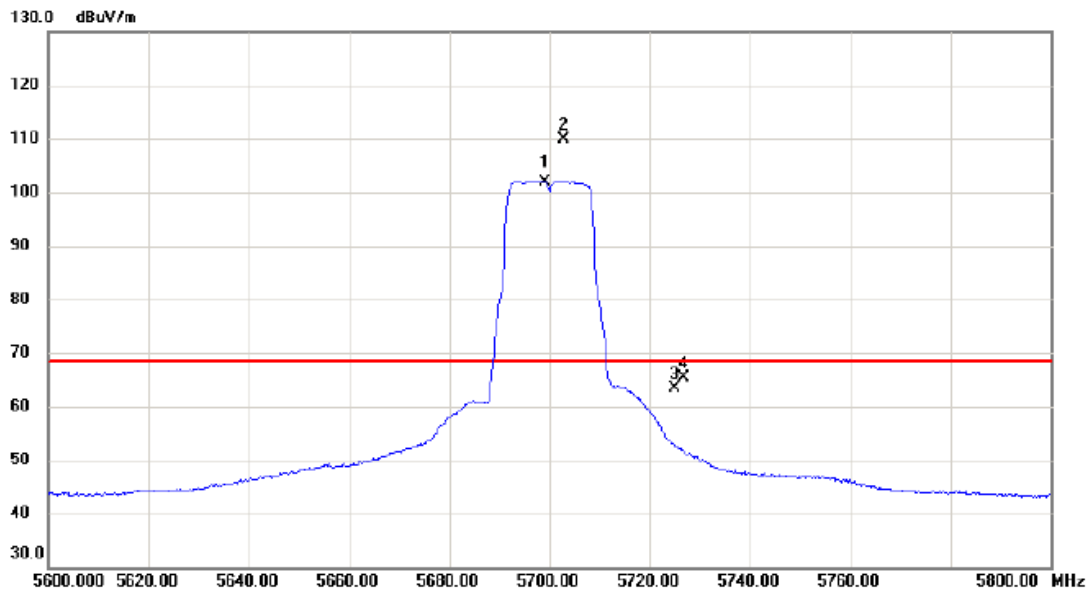


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5699.000	86.76	15.24	102.00	68.30	33.70	AVG	主波訊號不予判定
2	*	5702.700	94.77	15.23	110.00	68.30	41.70	peak	主波訊號不予判定
3		5725.000	48.21	15.27	63.48	68.30	-4.82	peak	
4		5726.900	50.04	15.27	65.31	68.30	-2.99	peak	

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

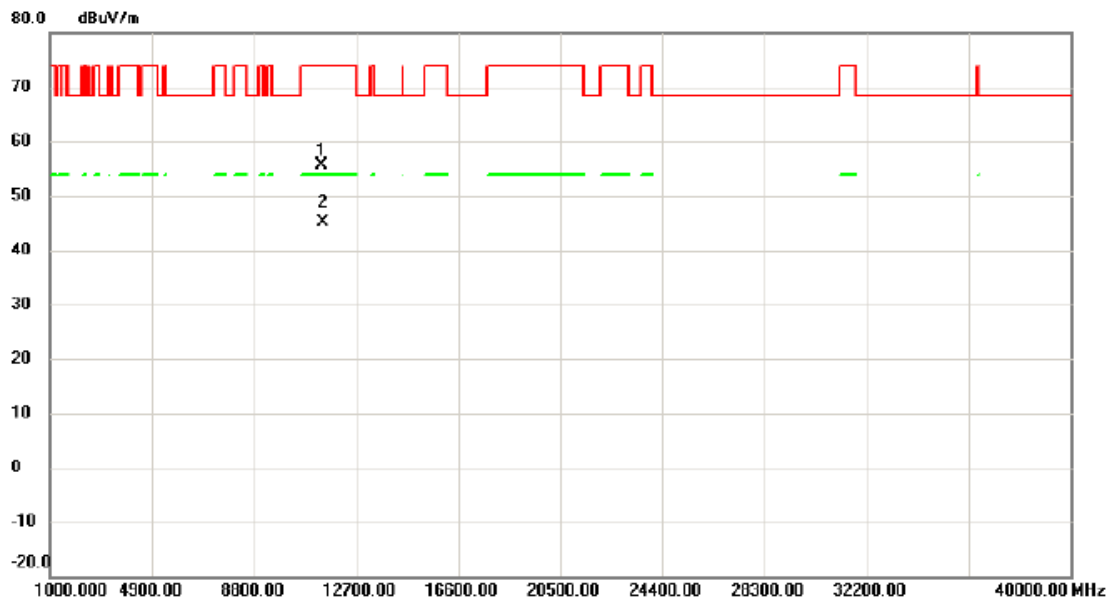

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11397.000	38.90	16.61	55.51	74.00	-18.49	peak	
2	*	11402.960	28.43	16.62	45.05	54.00	-8.95	AVG	

測試頻道: IEEE 802.11n (HT20) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

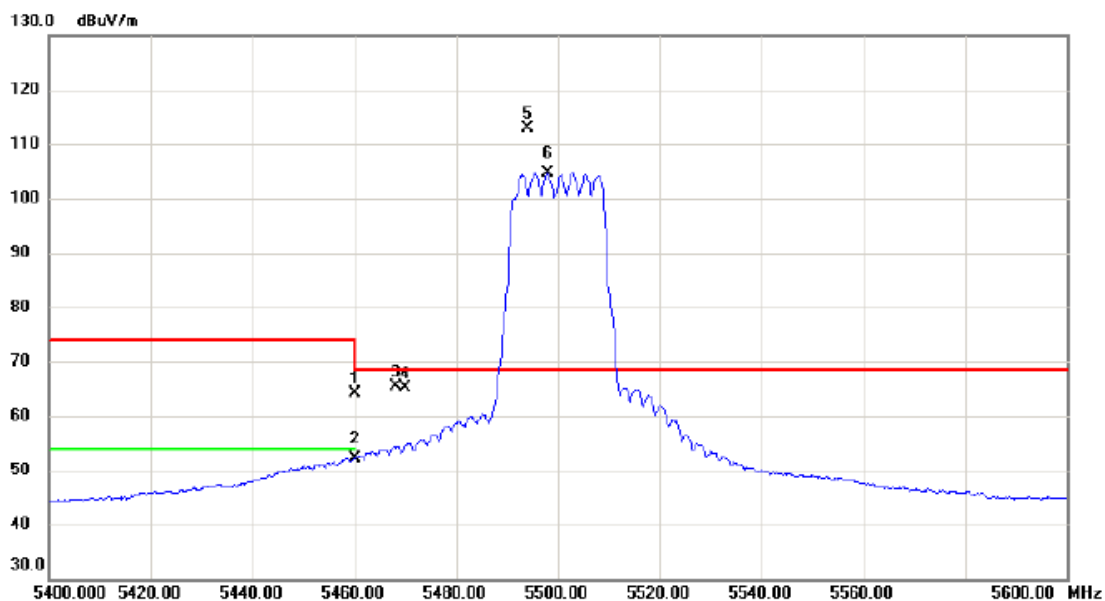

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	49.12	14.91	64.03	74.00	-9.97	peak	
2		5460.000	37.12	14.91	52.03	54.00	-1.97	AVG	
3		5468.200	50.45	14.92	65.37	68.30	-2.93	peak	
4		5470.000	50.10	14.93	65.03	68.30	-3.27	peak	
5 *		5493.900	97.83	14.98	112.81	68.30	44.51	peak	主波訊號不予判定
6 X		5497.900	89.73	14.98	104.71	68.30	36.41	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

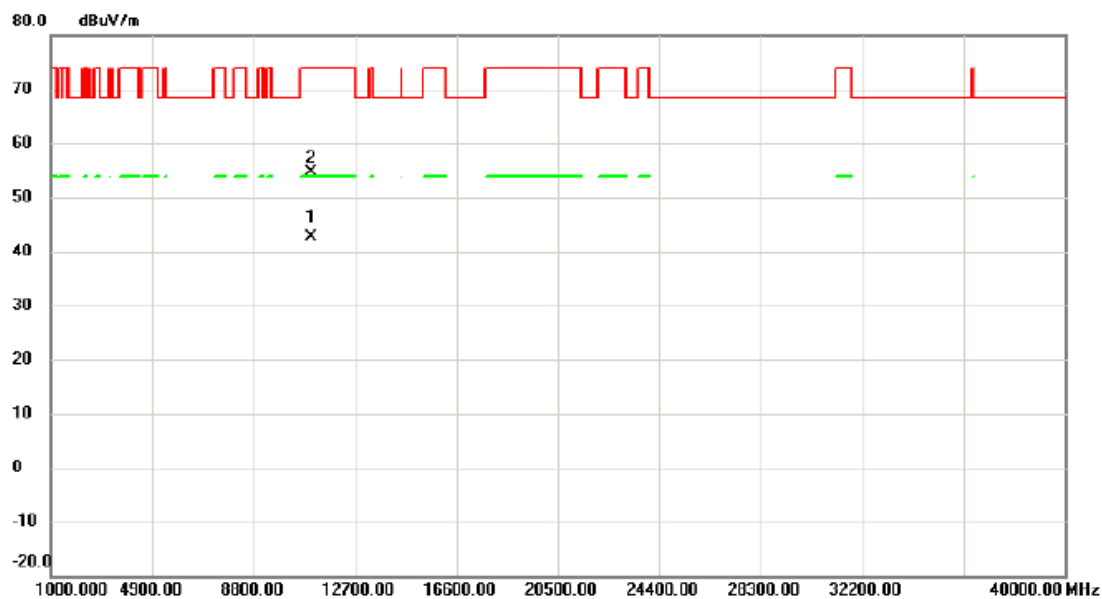

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10999.100	26.65	16.09	42.74	54.00	-11.26	AVG	
2		11001.520	38.51	16.09	54.60	74.00	-19.40	peak	

測試頻道: IEEE 802.11n (HT20) /
5500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

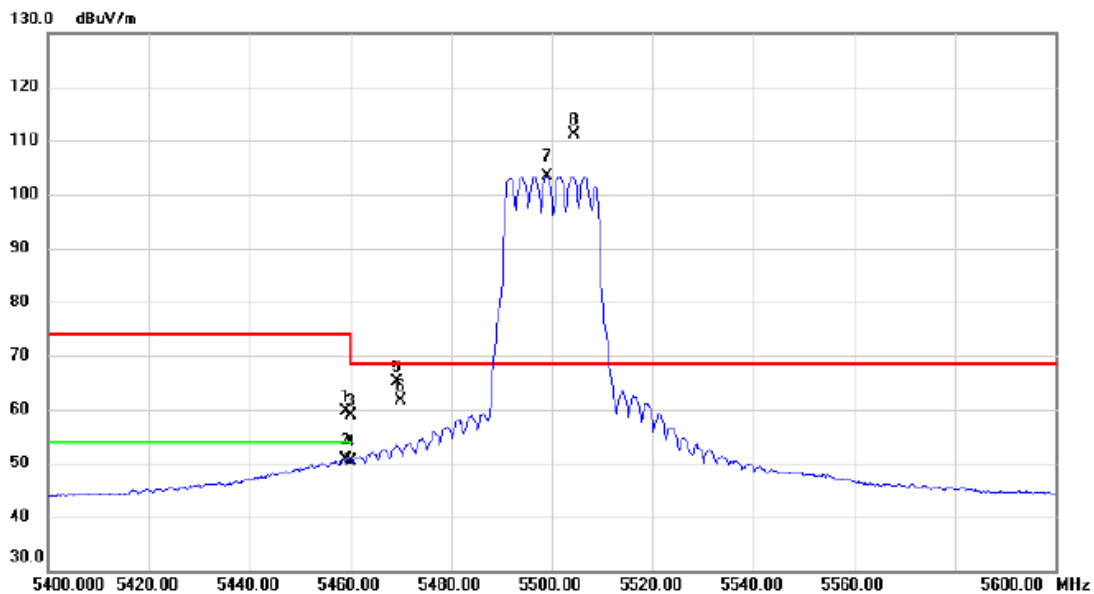


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5459.100	44.70	14.91	59.61	74.00	-14.39	peak	
2		5459.100	35.69	14.91	50.60	54.00	-3.40	AVG	
3		5460.000	44.05	14.91	58.96	74.00	-15.04	peak	
4		5460.000	35.46	14.91	50.37	54.00	-3.63	AVG	
5		5469.300	50.29	14.93	65.22	68.30	-3.08	peak	
6		5470.000	46.62	14.93	61.55	68.30	-6.75	peak	
7	X	5499.100	88.48	14.98	103.46	68.30	35.16	AVG	主波訊號不予判定
8	*	5504.300	96.23	14.98	111.21	68.30	42.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5500 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

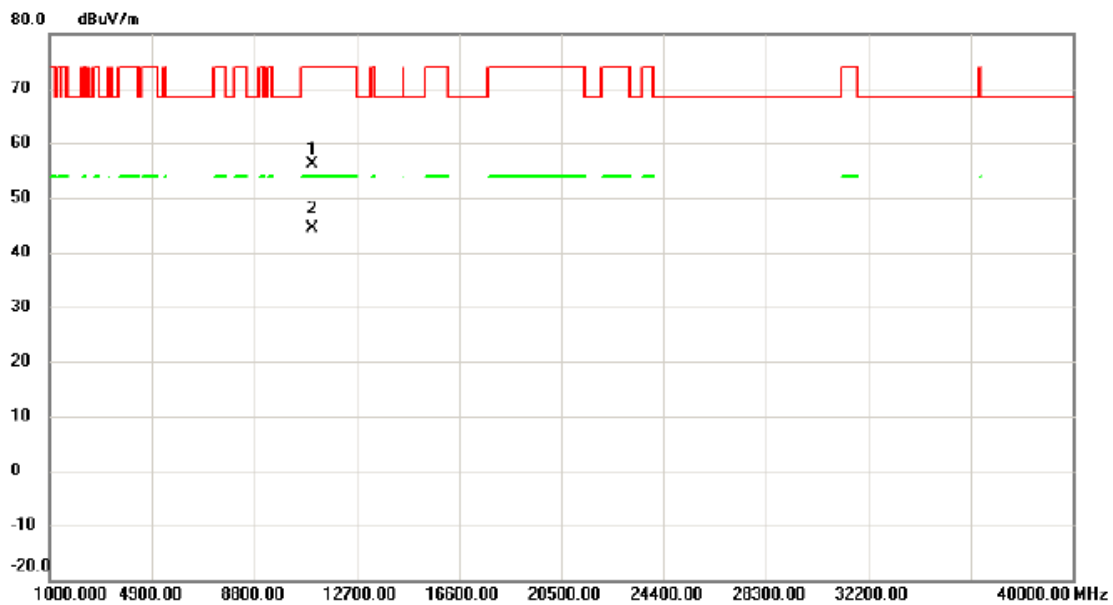

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10999.340	40.05	16.09	56.14	74.00	-17.86	peak	
2	*	11001.560	28.33	16.09	44.42	54.00	-9.58	AVG	

測試頻道: IEEE 802.11n (HT20) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

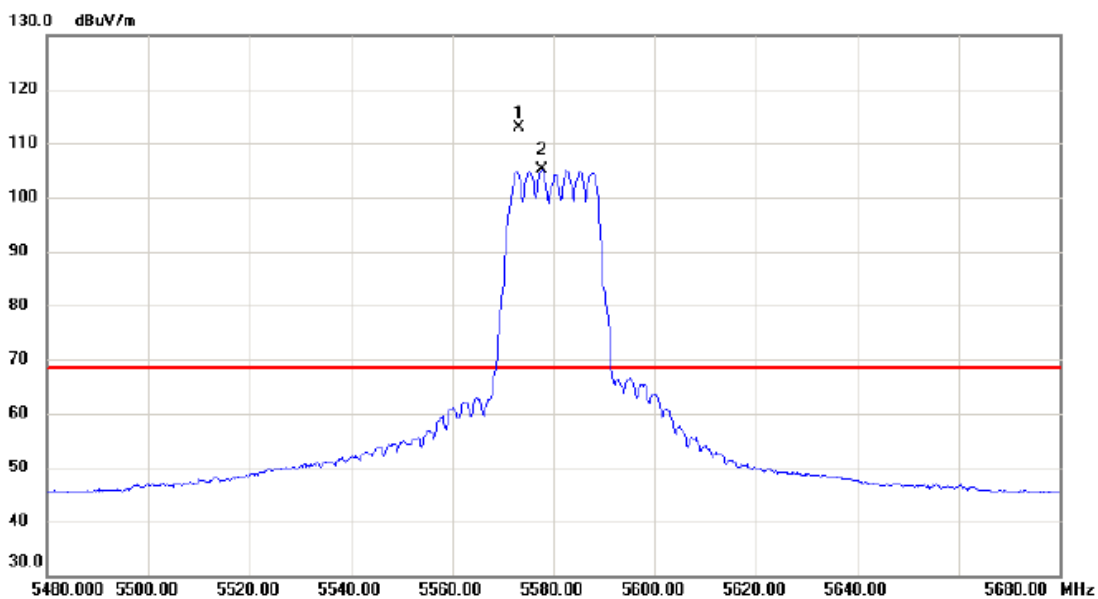

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5573.100	97.84	15.07	112.91	68.30	44.61	peak	主波訊號不予判定
2	X	5577.800	89.99	15.08	105.07	68.30	36.77	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

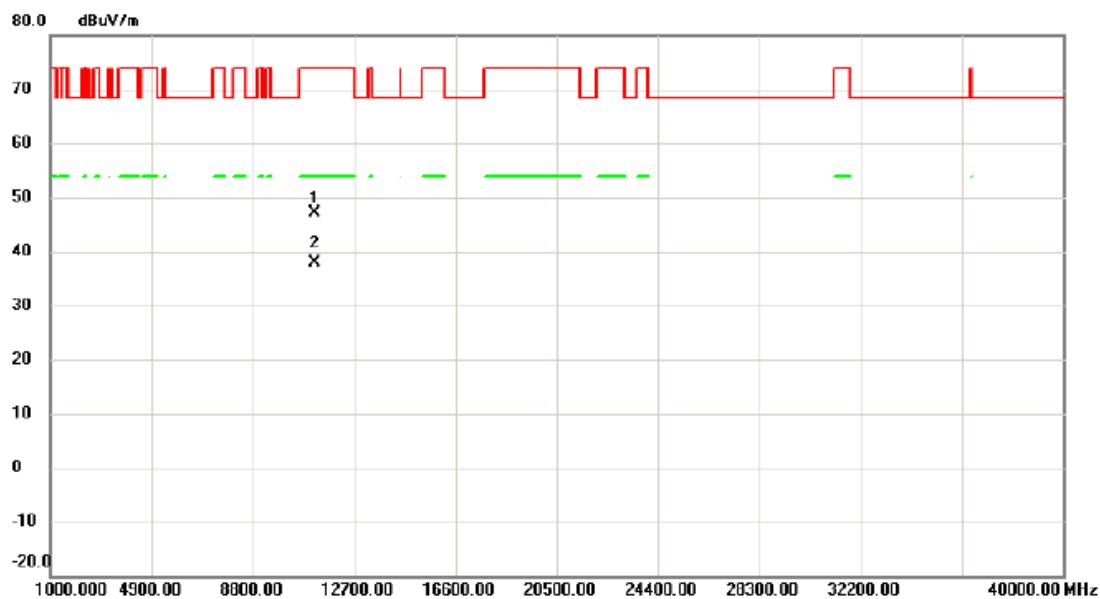

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11158.920	30.88	16.31	47.19	74.00	-26.81	peak	
2 *		11159.000	21.45	16.31	37.76	54.00	-16.24	AVG	

測試頻道: IEEE 802.11n (HT20) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

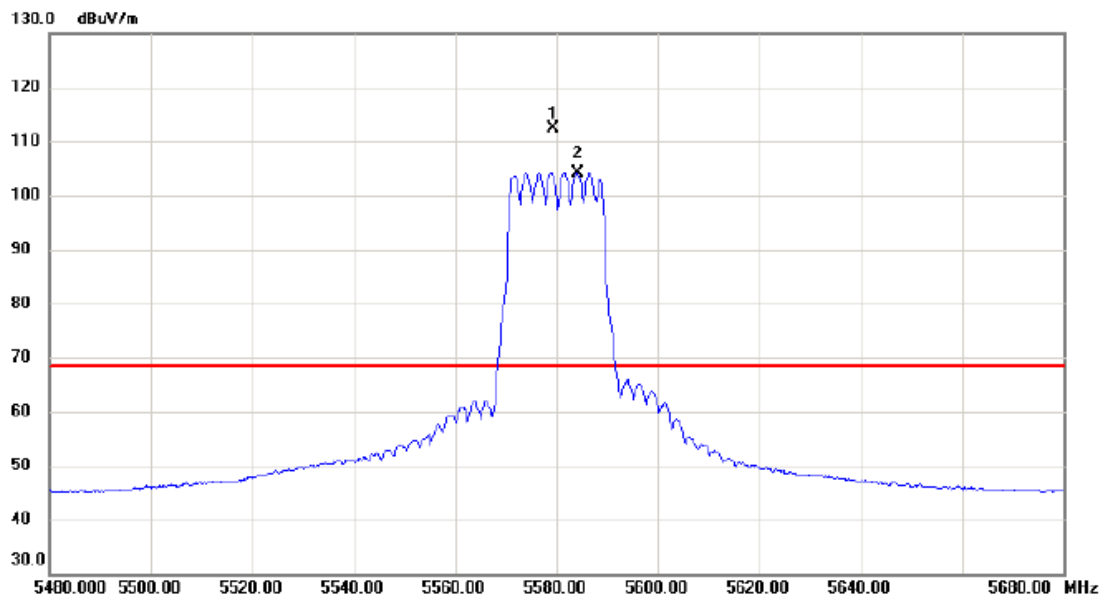

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5579.400	97.39	15.08	112.47	68.30	44.17	peak	主波訊號不予判定
2	X	5584.100	89.14	15.09	104.23	68.30	35.93	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

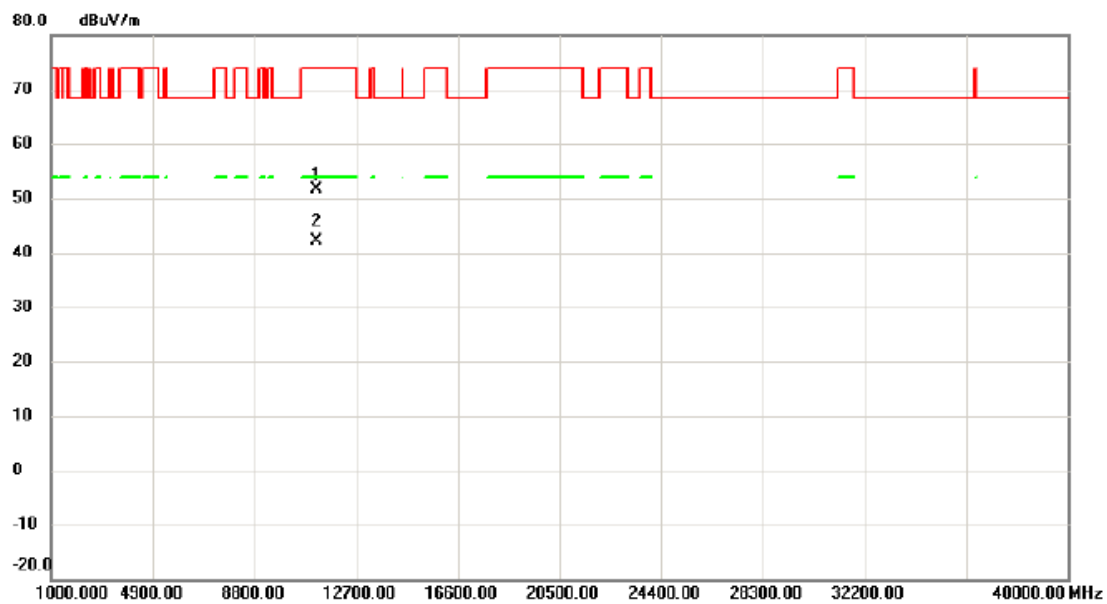

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11158.960	35.30	16.31	51.61	74.00	-22.39	peak	
2	*	11159.000	25.74	16.31	42.05	54.00	-11.95	AVG	

測試頻道: IEEE 802.11n (HT20) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

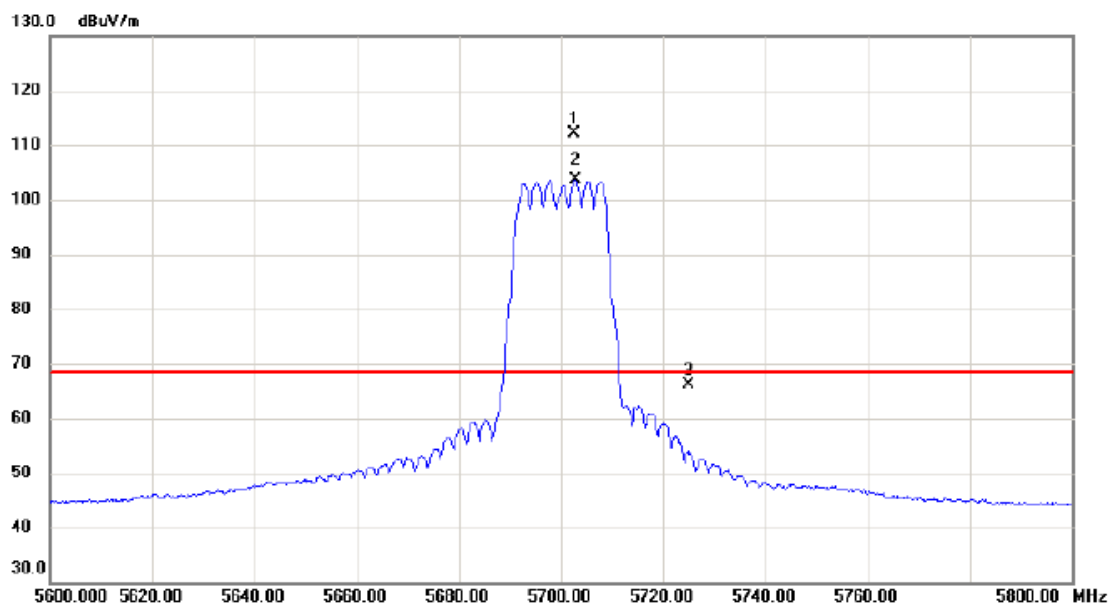

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5702.500	96.88	15.23	112.11	68.30	43.81	peak	主波訊號不予判定
2	X	5702.700	88.37	15.23	103.60	68.30	35.30	AVG	主波訊號不予判定
3		5725.000	50.77	15.27	66.04	68.30	-2.26	peak	

測試頻道: IEEE 802.11n (HT20) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

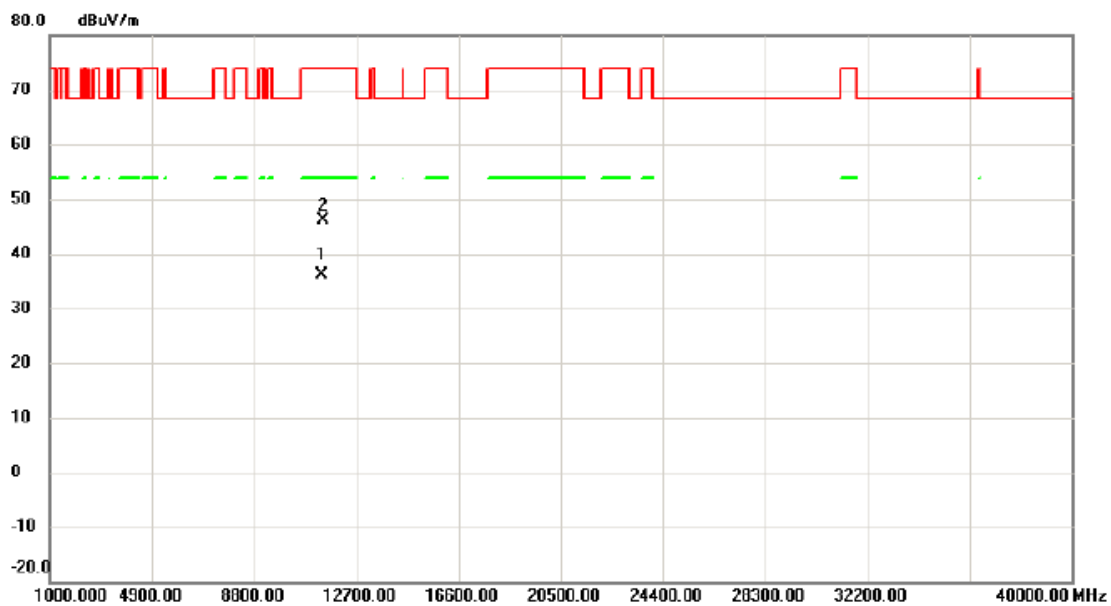

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11398.680	19.47	16.62	36.09	54.00	-17.91	AVG	
2		11401.320	29.42	16.62	46.04	74.00	-27.96	peak	

測試頻道: IEEE 802.11n (HT20) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

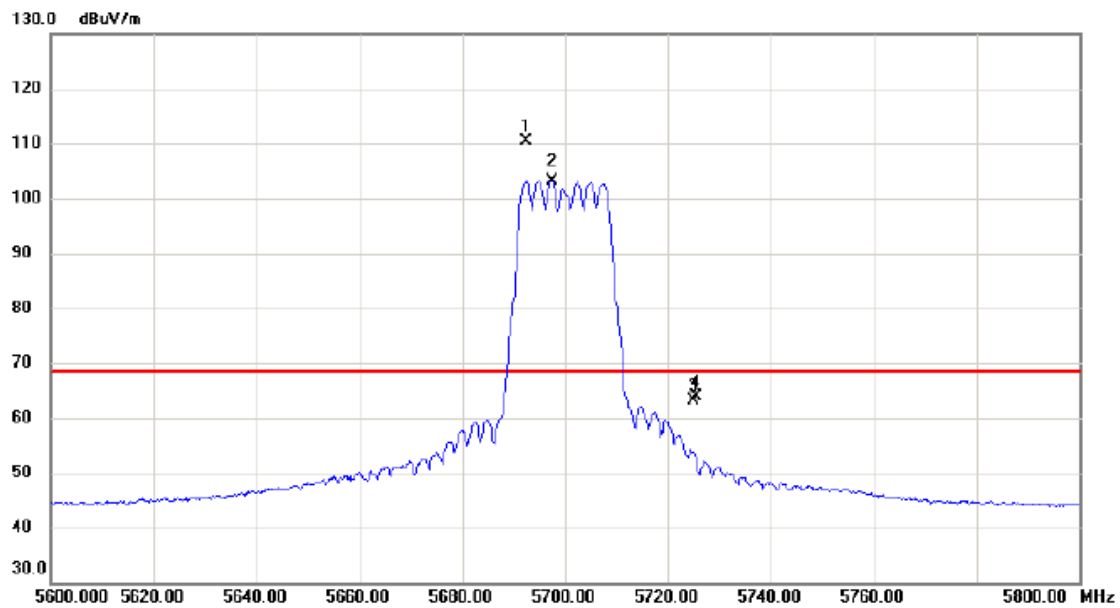


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5692.400	95.13	15.22	110.35	68.30	42.05	peak	主波訊號不予判定
2	X	5697.400	87.89	15.24	103.13	68.30	34.83	AVG	主波訊號不予判定
3		5725.000	47.78	15.27	63.05	68.30	-5.25	peak	
4		5725.500	48.69	15.27	63.96	68.30	-4.34	peak	

測試頻道: IEEE 802.11n (HT20) /
 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/20
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

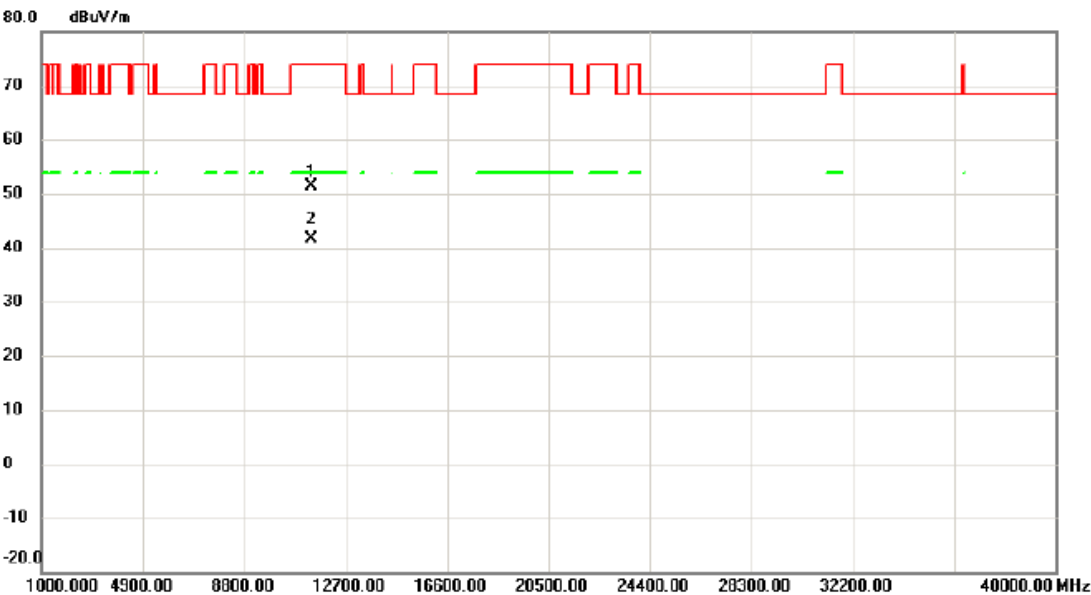

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11391.760	34.69	16.61	51.30	74.00	-22.70	peak	
2	*	11399.060	25.04	16.62	41.66	54.00	-12.34	AVG	

測試頻道: IEEE 802.11n (HT40) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

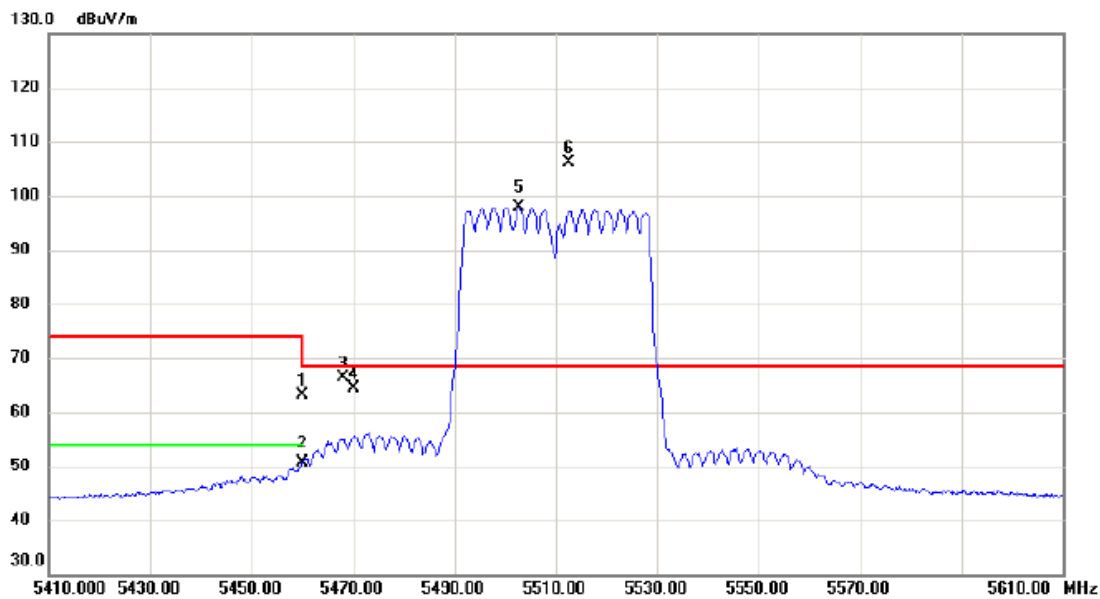

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	48.20	14.91	63.11	74.00	-10.89	peak	
2		5460.000	35.72	14.91	50.63	54.00	-3.37	AVG	
3		5468.000	51.38	14.92	66.30	68.30	-2.00	peak	
4		5470.000	49.33	14.93	64.26	68.30	-4.04	peak	
5	X	5502.600	83.00	14.98	97.98	68.30	29.68	AVG	主波訊號不予判定
6	*	5512.500	91.16	14.99	106.15	68.30	37.85	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

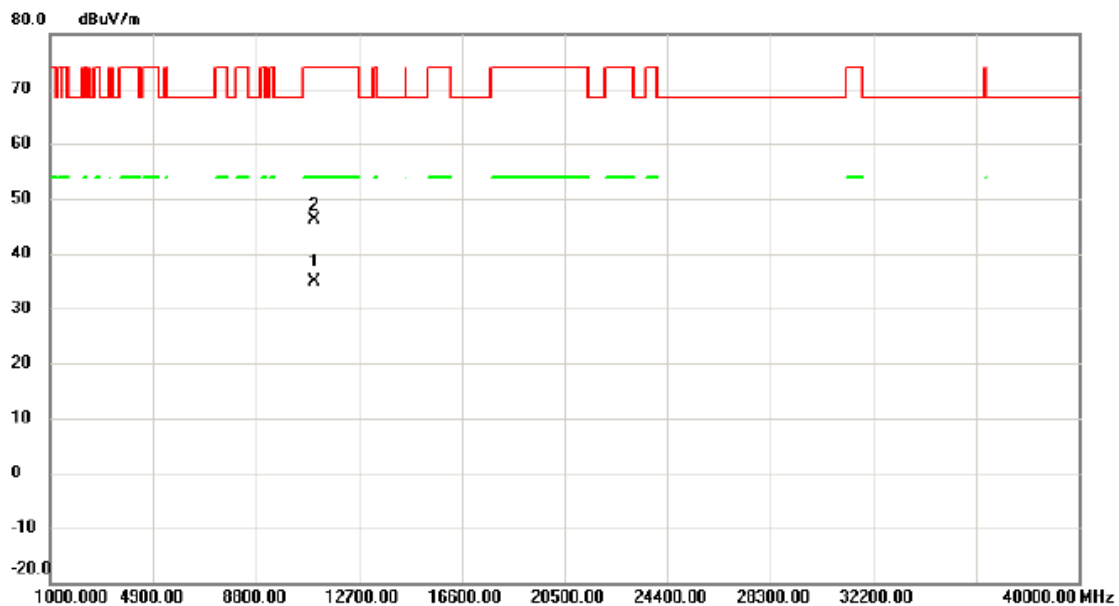

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11016.875	18.82	16.11	34.93	54.00	-19.07	AVG	
2		11017.250	30.06	16.11	46.17	74.00	-27.83	peak	

測試頻道: IEEE 802.11n (HT40) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

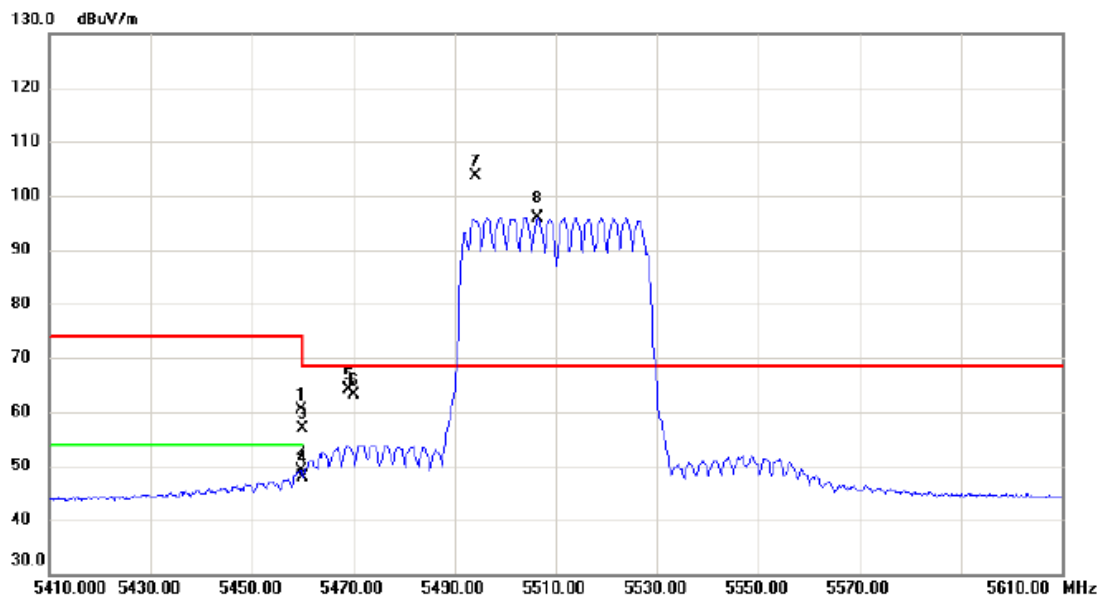

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5459.600	45.36	14.91	60.27	74.00	-13.73	peak	
2		5459.600	34.16	14.91	49.07	54.00	-4.93	AVG	
3		5460.000	42.08	14.91	56.99	74.00	-17.01	peak	
4		5460.000	33.03	14.91	47.94	54.00	-6.06	AVG	
5		5469.000	49.18	14.93	64.11	68.30	-4.19	peak	
6		5470.000	48.23	14.93	63.16	68.30	-5.14	peak	
7	*	5494.000	88.55	14.98	103.53	68.30	35.23	peak	主波訊號不予判定
8	X	5506.500	80.98	15.00	95.98	68.30	27.68	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

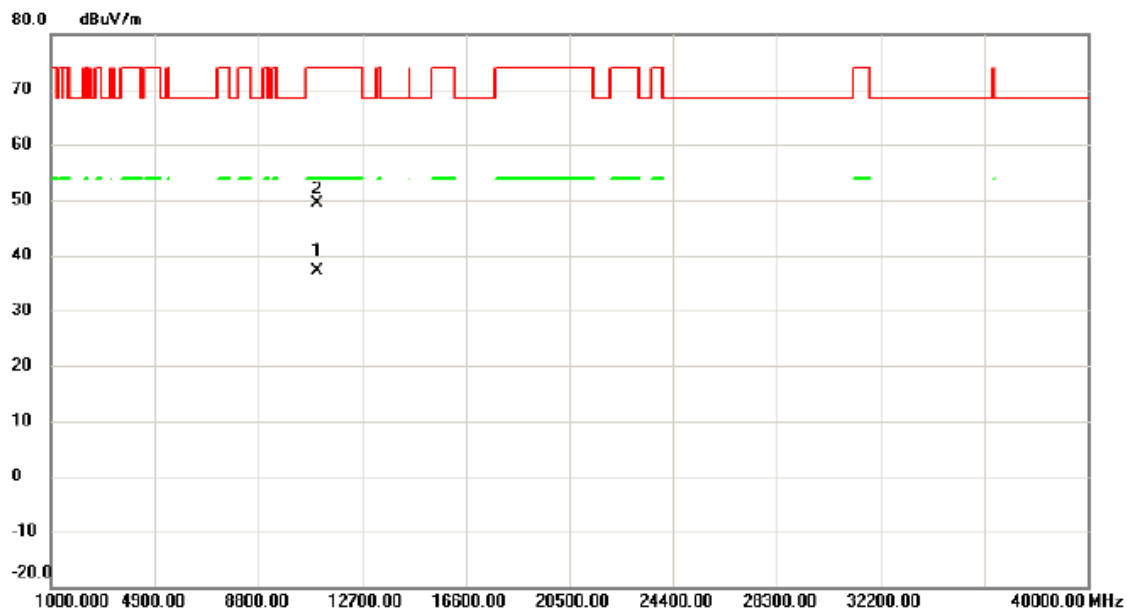

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11019.250	21.10	16.11	37.21	54.00	-16.79	AVG	
2		11019.325	33.20	16.11	49.31	74.00	-24.69	peak	

測試頻道: IEEE 802.11n (HT40) /
5550 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

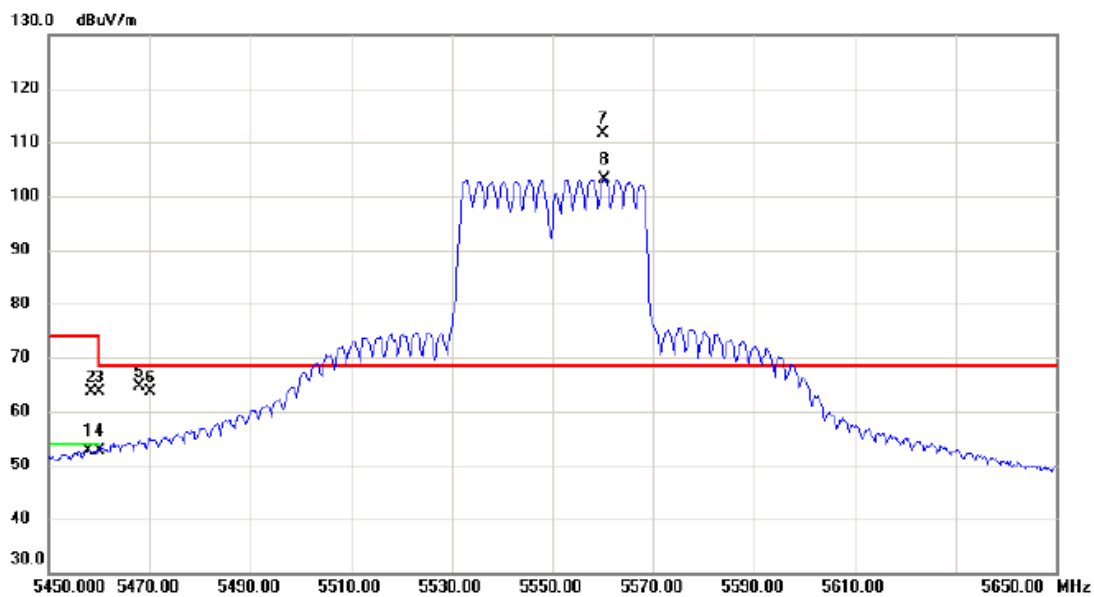

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.900	37.85	14.90	52.75	54.00	-1.25	AVG	
2		5458.300	48.82	14.90	63.72	74.00	-10.28	peak	
3		5460.000	48.76	14.91	63.67	74.00	-10.33	peak	
4		5460.000	37.79	14.91	52.70	54.00	-1.30	AVG	
5		5468.100	49.61	14.92	64.53	68.30	-3.77	peak	
6		5470.000	48.74	14.93	63.67	68.30	-4.63	peak	
7	*	5560.100	96.46	15.05	111.51	68.30	43.21	peak	主波訊號不予判定
8	X	5560.400	87.97	15.05	103.02	68.30	34.72	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

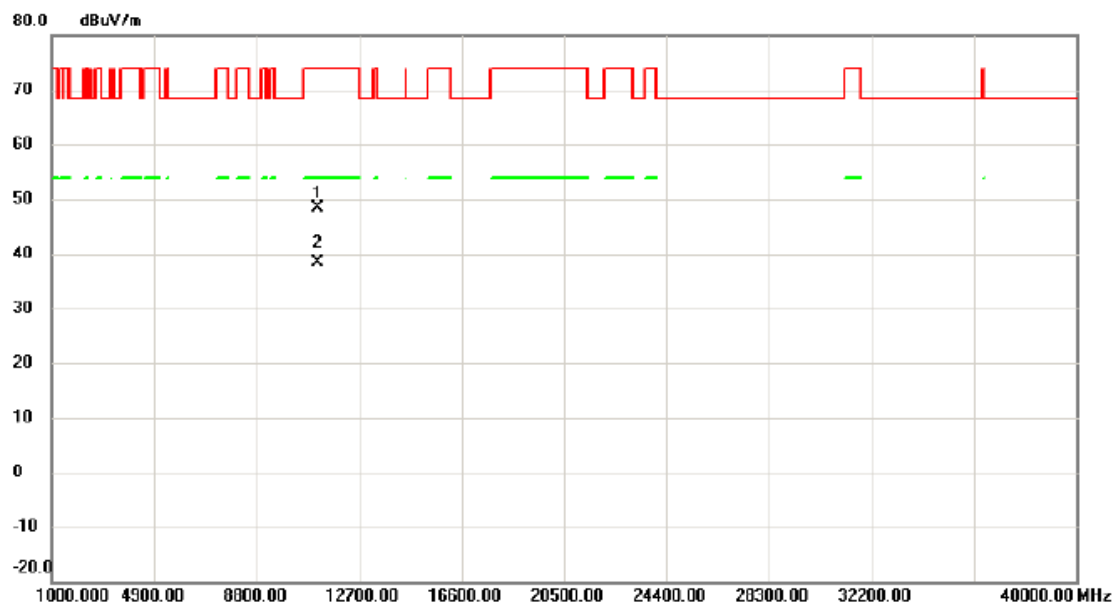

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11101.850	32.26	16.22	48.48	74.00	-25.52	peak	
2	*	11104.425	22.05	16.23	38.28	54.00	-15.72	AVG	

測試頻道: IEEE 802.11n (HT40) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

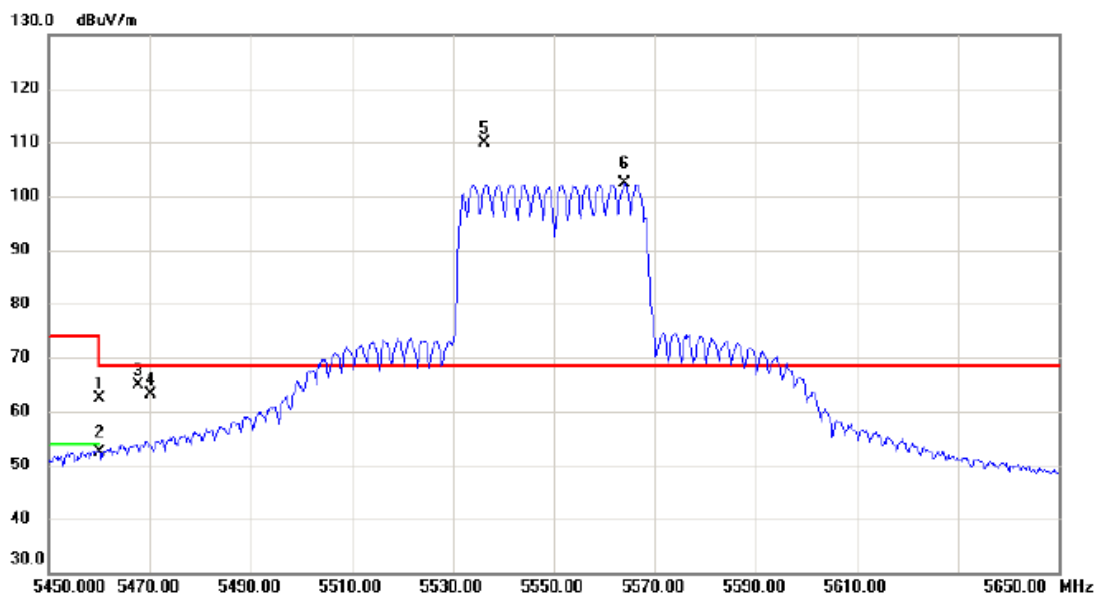

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	47.56	14.91	62.47	74.00	-11.53	peak	
2		5460.000	37.45	14.91	52.36	54.00	-1.64	AVG	
3		5467.800	50.02	14.92	64.94	68.30	-3.36	peak	
4		5470.000	48.23	14.93	63.16	68.30	-5.14	peak	
5	*	5536.300	94.95	15.03	109.98	68.30	41.68	peak	主波訊號不予判定
6	X	5564.000	87.27	15.06	102.33	68.30	34.03	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

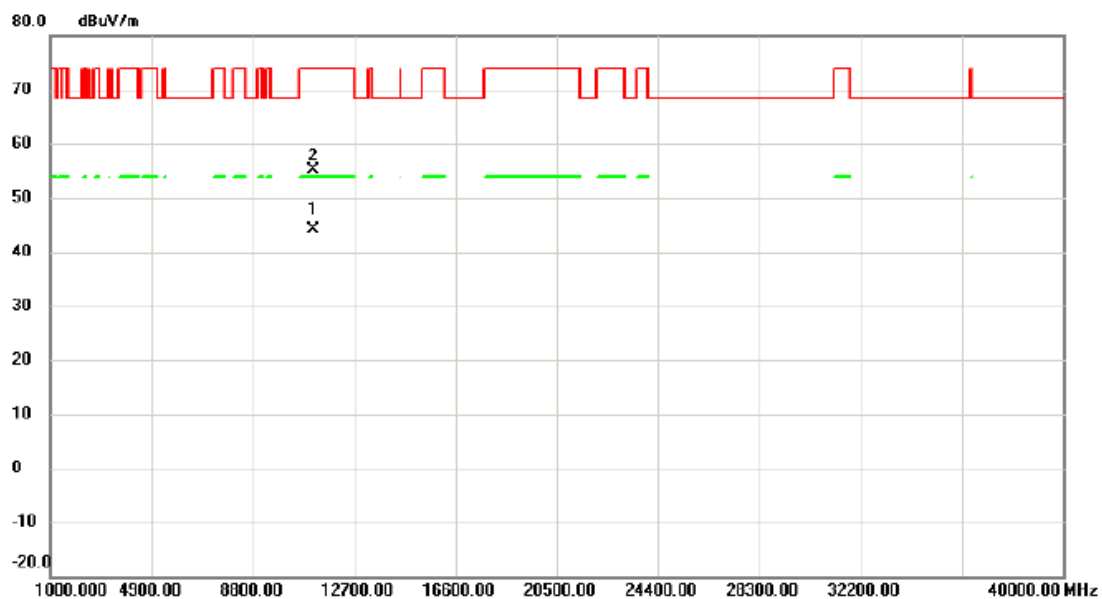

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11104.200	28.01	16.23	44.24	54.00	-9.76	AVG	
2		11108.425	38.98	16.24	55.22	74.00	-18.78	peak	

測試頻道: IEEE 802.11n (HT40) /
5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

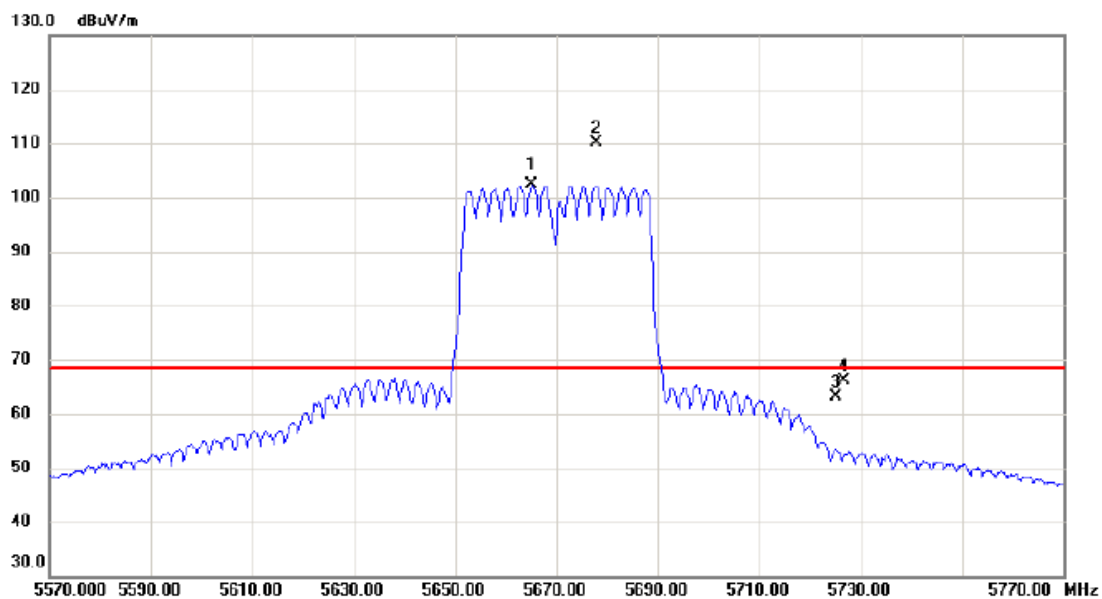

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5665.200	87.07	15.20	102.27	68.30	33.97	AVG	主波訊號不予判定
2	*	5677.800	94.80	15.21	110.01	68.30	41.71	peak	主波訊號不予判定
3		5725.000	47.91	15.27	63.18	68.30	-5.12	peak	
4		5726.600	50.94	15.27	66.21	68.30	-2.09	peak	

測試頻道: IEEE 802.11n (HT40) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

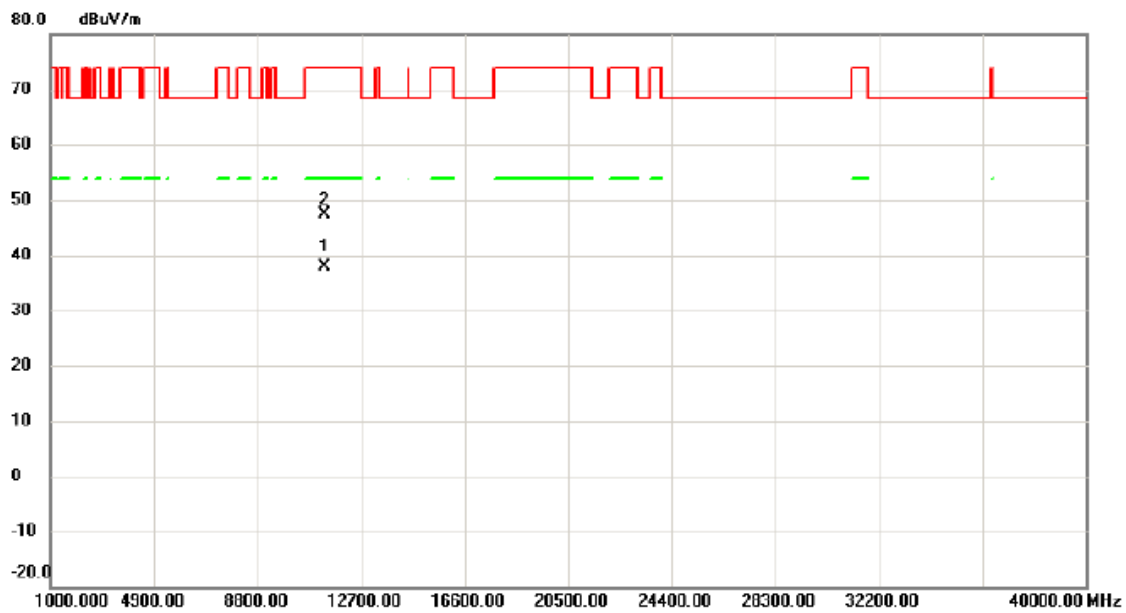

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11336.525	21.38	16.53	37.91	54.00	-16.09	AVG	
2		11347.775	30.75	16.55	47.30	74.00	-26.70	peak	

測試頻道: IEEE 802.11n (HT40) /
5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

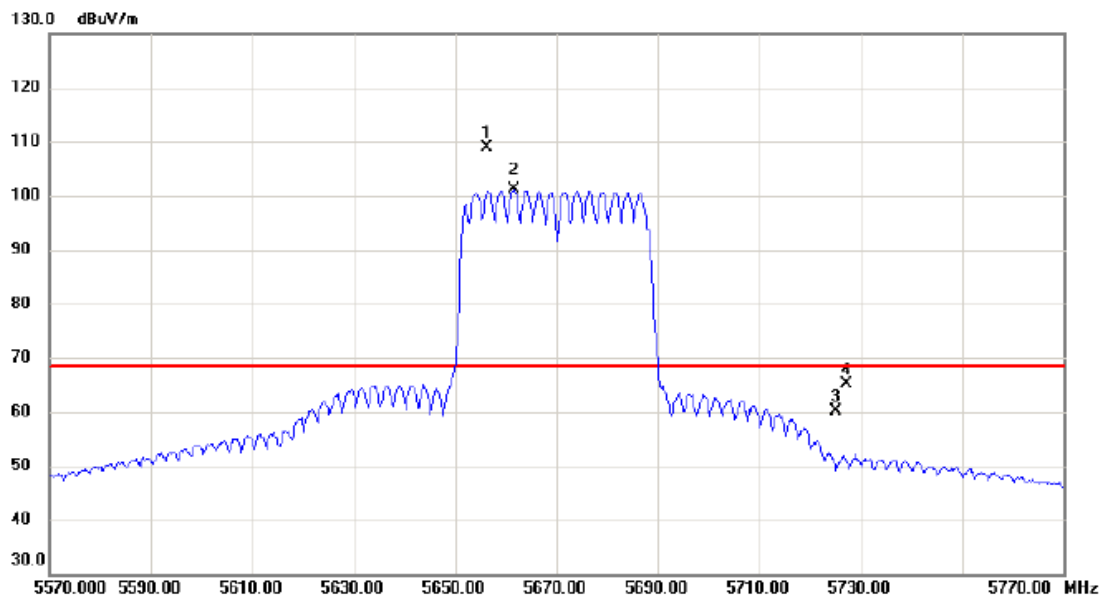


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5656.400	93.69	15.18	108.87	68.30	40.57	peak	主波訊號不予判定
2	X	5661.600	85.85	15.19	101.04	68.30	32.74	AVG	主波訊號不予判定
3		5725.000	44.95	15.27	60.22	68.30	-8.08	peak	
4		5727.140	49.80	15.27	65.07	68.30	-3.23	peak	

測試頻道: IEEE 802.11n (HT40) /
5670 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

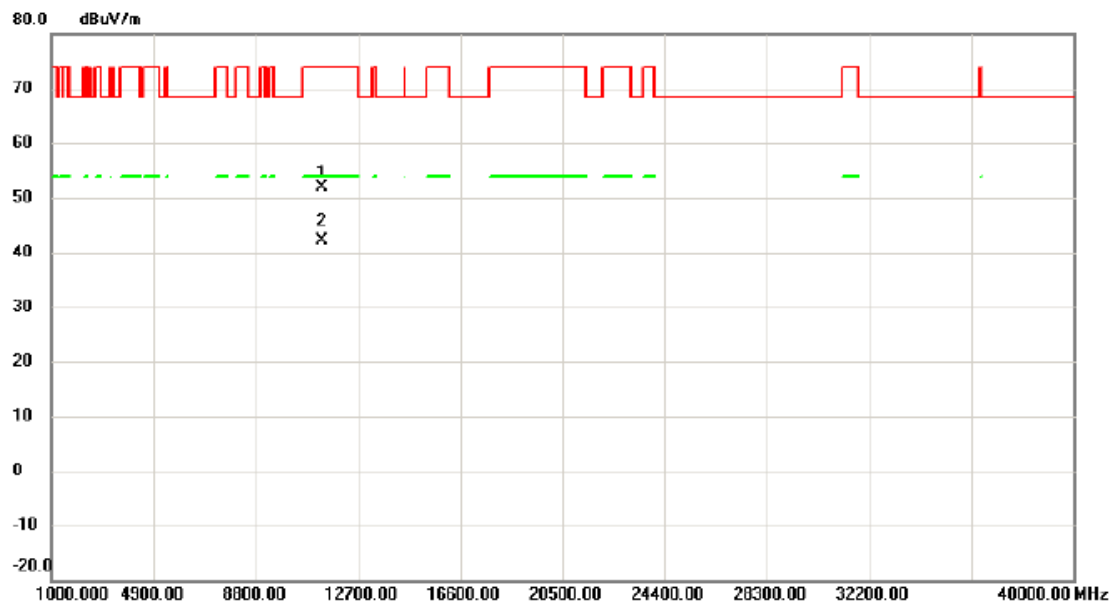


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11339.100	35.30	16.53	51.83	74.00	-22.17	peak	
2	*	11341.475	25.54	16.53	42.07	54.00	-11.93	AVG	

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

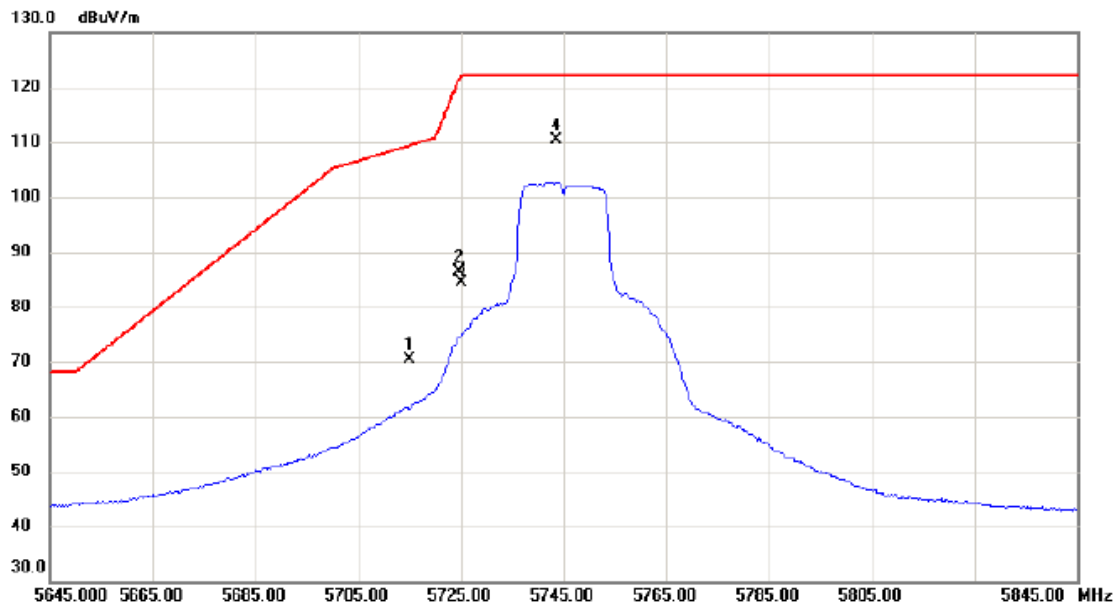


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	55.01	15.26	70.27	109.40	-39.13	peak	
2		5724.500	71.09	15.26	86.35	121.06	-34.71	peak	
3		5725.000	69.21	15.27	84.48	122.20	-37.72	peak	
4	*	5743.500	95.03	15.29	110.32	122.20	-11.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

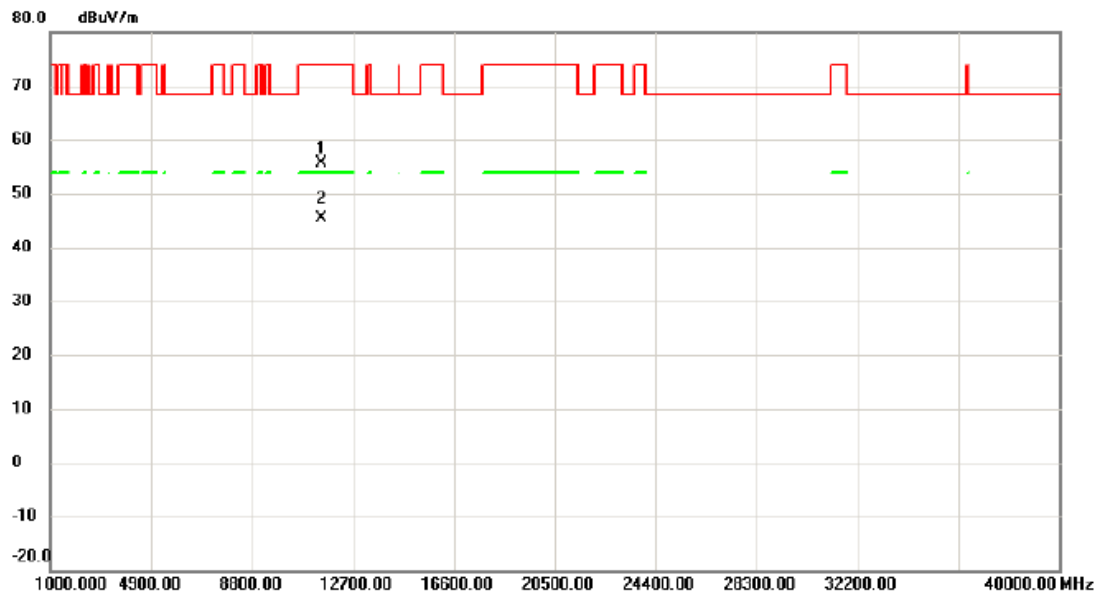


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11492.560	38.86	16.75	55.61	74.00	-18.39	peak	
2	*	11492.760	28.58	16.75	45.33	54.00	-8.67	AVG	

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

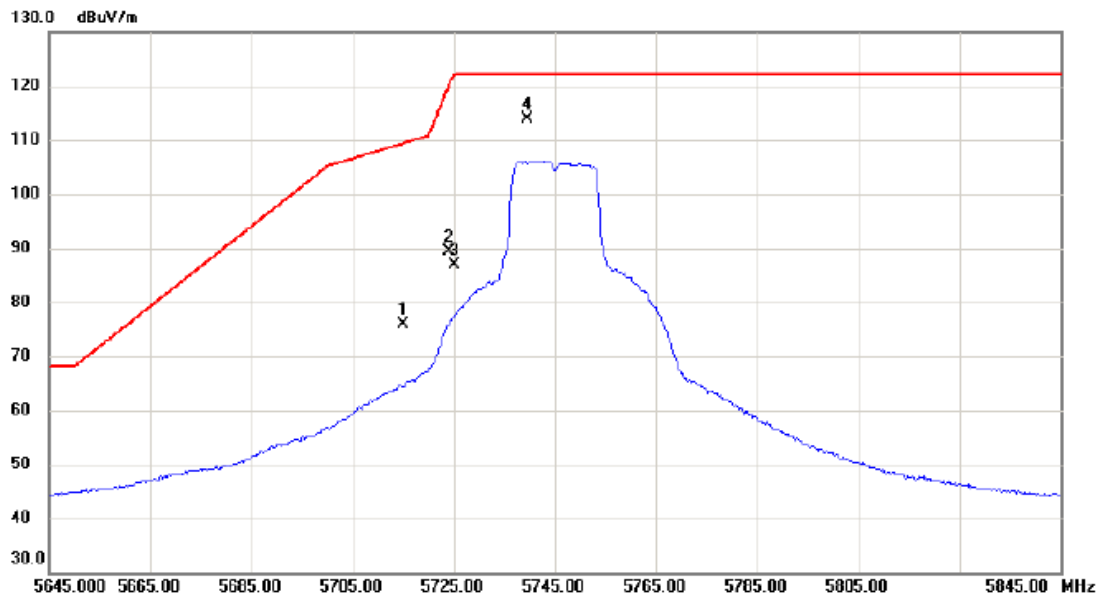

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	60.59	15.26	75.85	109.40	-33.55	peak	
2		5724.100	74.10	15.26	89.36	120.15	-30.79	peak	
3		5725.000	71.64	15.27	86.91	122.20	-35.29	peak	
4	*	5739.600	98.63	15.29	113.92	122.20	-8.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

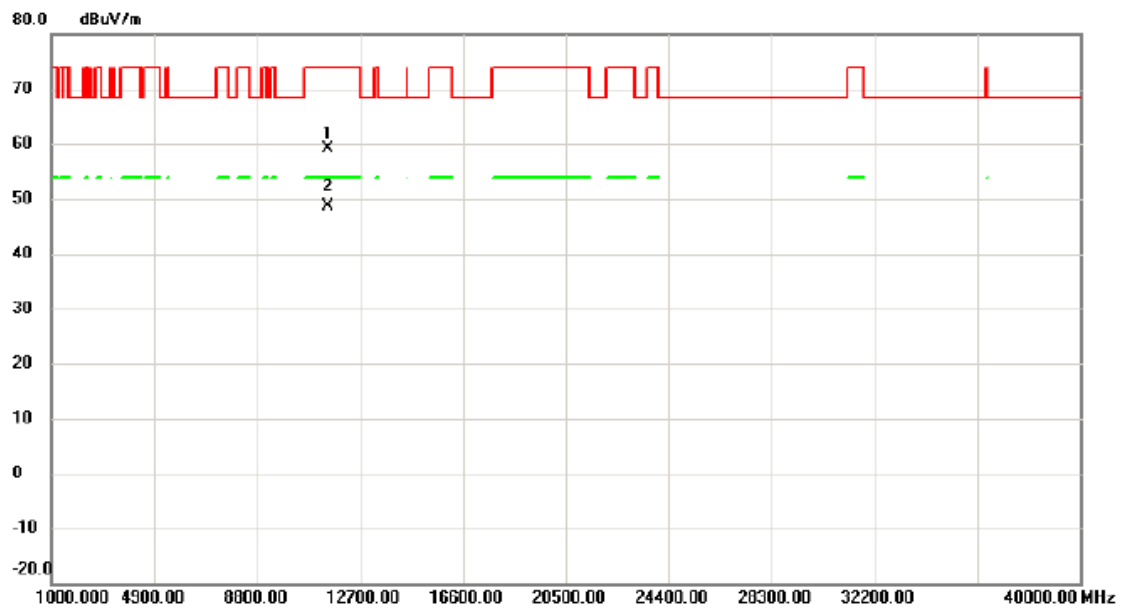


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11488.740	42.28	16.73	59.01	74.00	-14.99	peak	
2	*	11491.940	31.81	16.75	48.56	54.00	-5.44	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

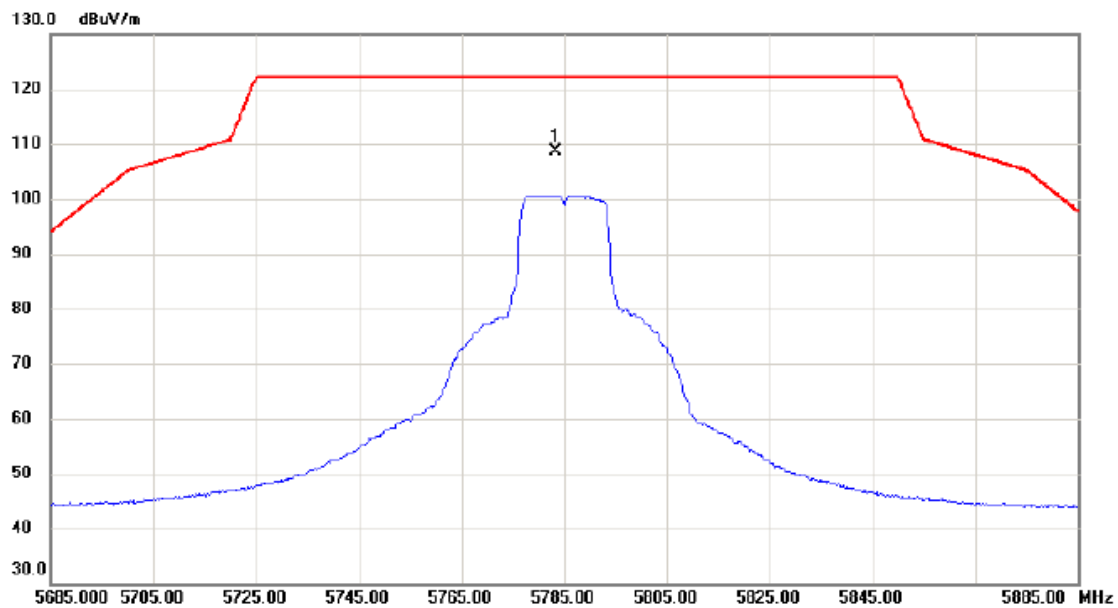


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5783.400	93.38	15.34	108.72	122.20	-13.48	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

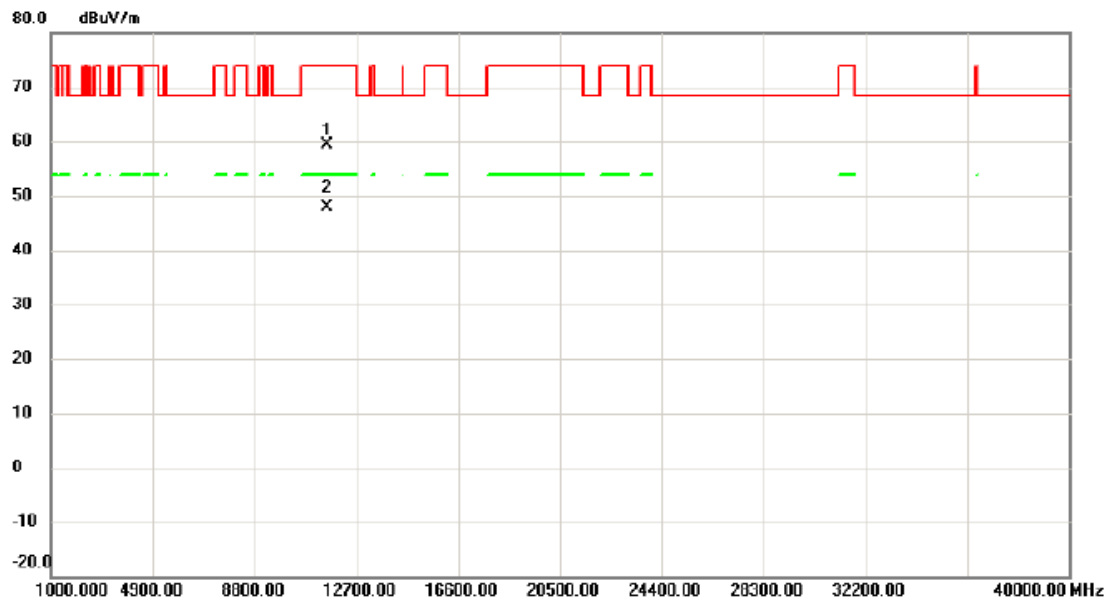


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11568.790	42.71	16.55	59.26	74.00	-14.74	peak	
2 *		11570.050	31.27	16.55	47.82	54.00	-6.18	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

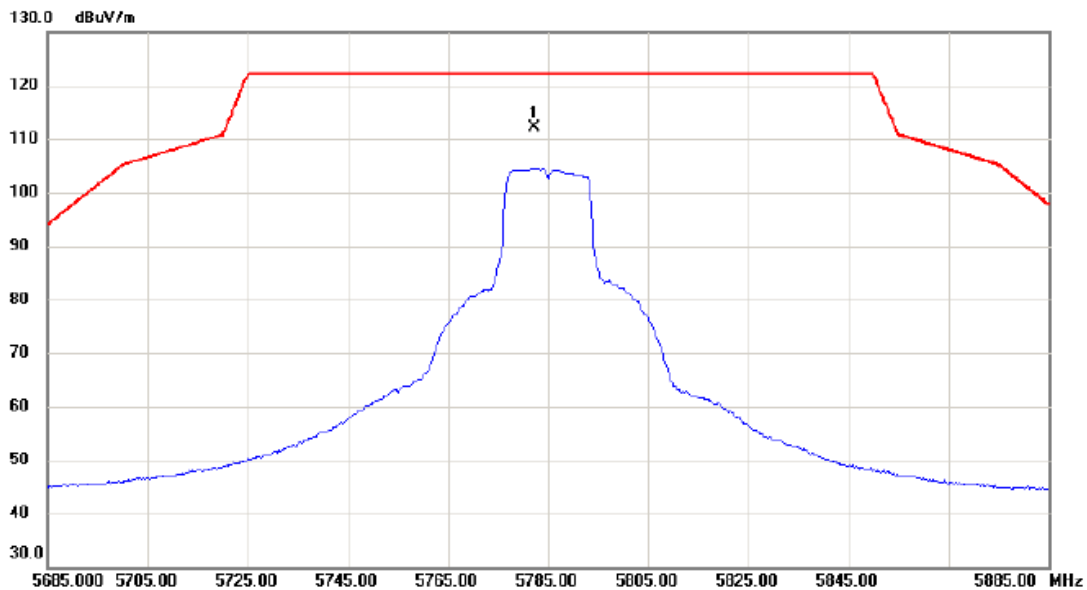


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5782.300	96.90	15.33	112.23	122.20	-9.97	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

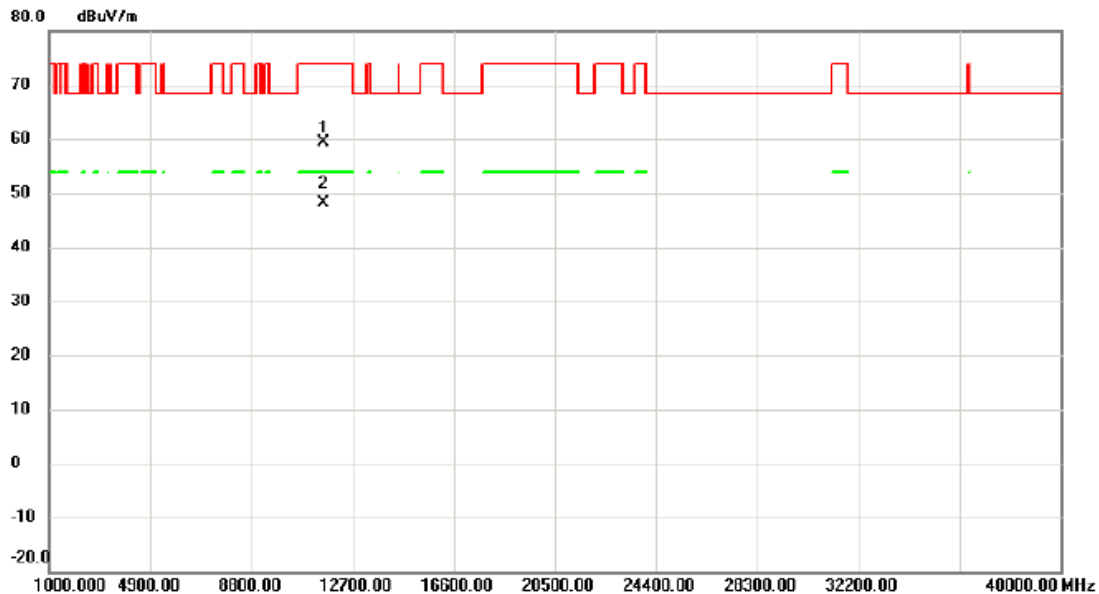


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11569.025	42.85	16.55	59.40	74.00	-14.60	peak	
2	*	11571.925	31.71	16.54	48.25	54.00	-5.75	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

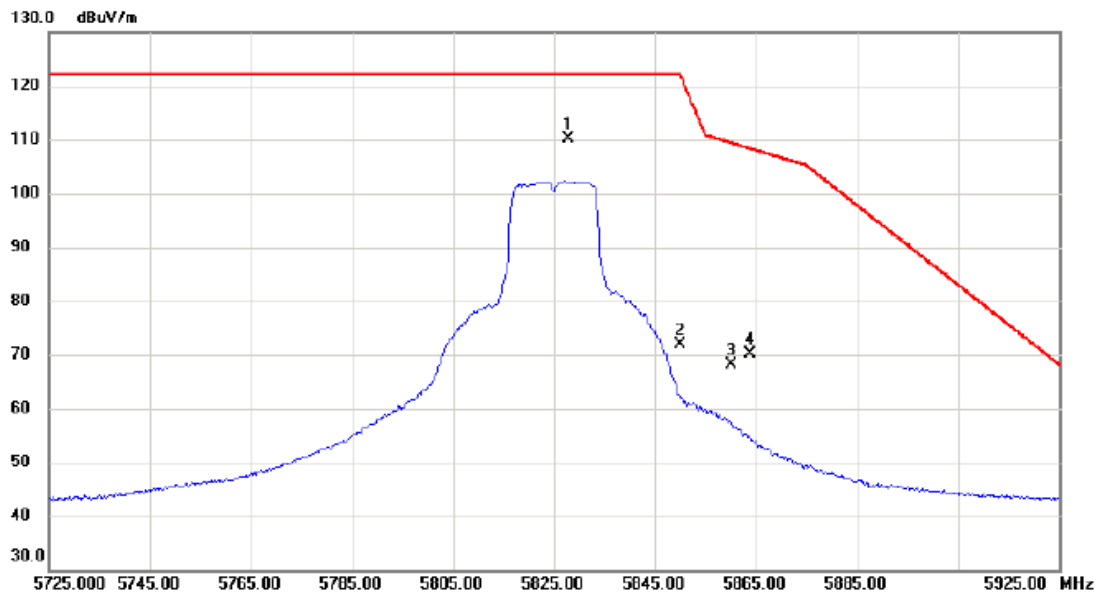


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5827.900	94.64	15.41	110.05	122.20	-12.15	peak	主波訊號不予判定
2		5850.000	56.54	15.43	71.97	122.20	-50.23	peak	
3		5860.000	52.63	15.44	68.07	109.40	-41.33	peak	
4		5863.900	54.59	15.44	70.03	108.31	-38.28	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

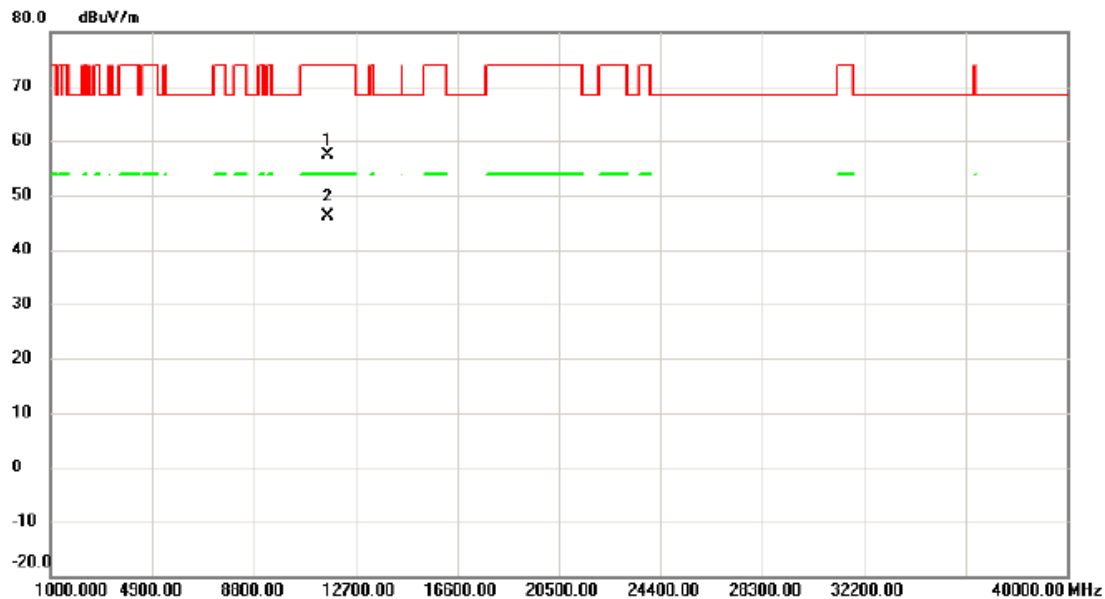


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11648.860	41.07	16.32	57.39	74.00	-16.61	peak	
2	*	11650.800	29.73	16.32	46.05	54.00	-7.95	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

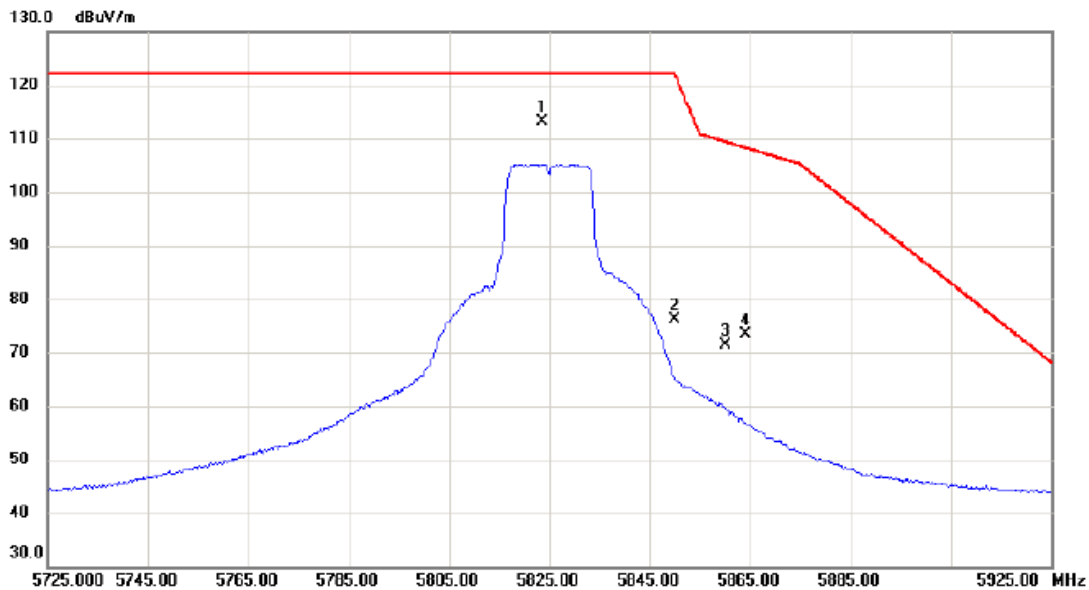

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5823.500	97.62	15.39	113.01	122.20	-9.19	peak	主波訊號不予判定
2		5850.000	60.65	15.43	76.08	122.20	-46.12	peak	
3		5860.000	55.97	15.44	71.41	109.40	-37.99	peak	
4		5864.200	57.83	15.44	73.27	108.22	-34.95	peak	

測試頻道: IEEE 802.11a / 5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

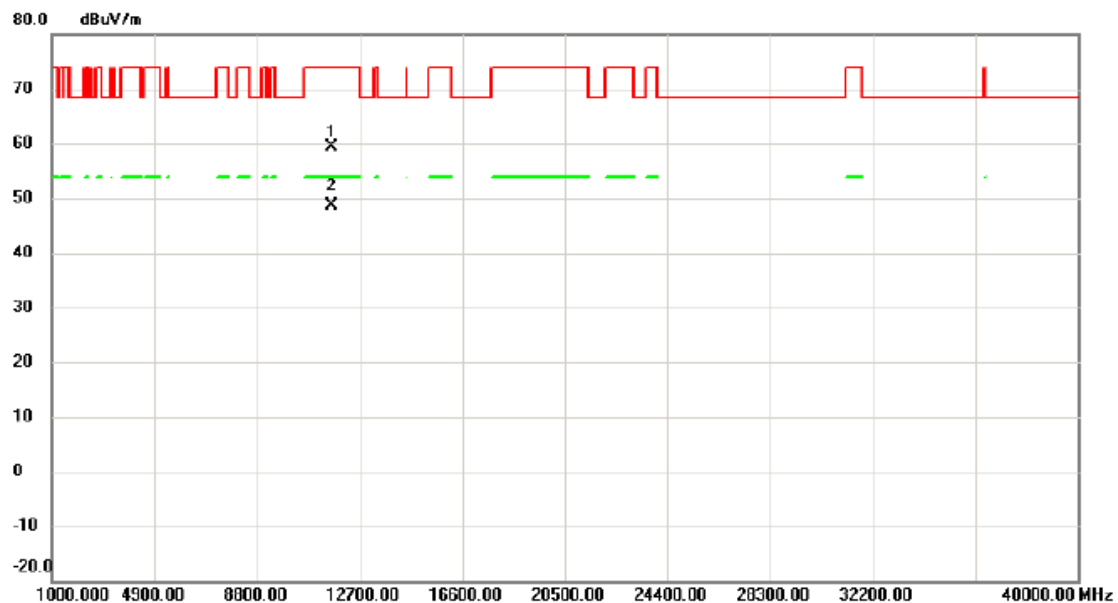

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11648.800	43.02	16.32	59.34	74.00	-14.66	peak	
2	*	11652.780	32.43	16.31	48.74	54.00	-5.26	AVG	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

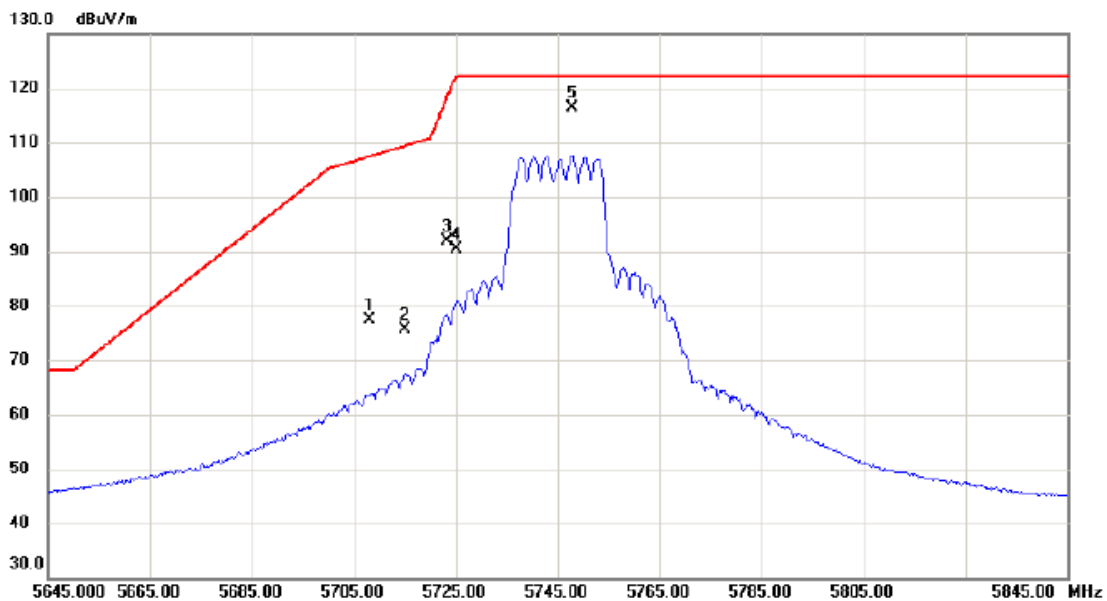

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5708.200	62.13	15.25	77.38	107.50	-30.12	peak	
2		5715.000	60.48	15.26	75.74	109.40	-33.66	peak	
3		5723.400	76.72	15.26	91.98	118.55	-26.57	peak	
4		5725.000	75.03	15.27	90.30	122.20	-31.90	peak	
5 *		5747.700	100.98	15.30	116.28	122.20	-5.92	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

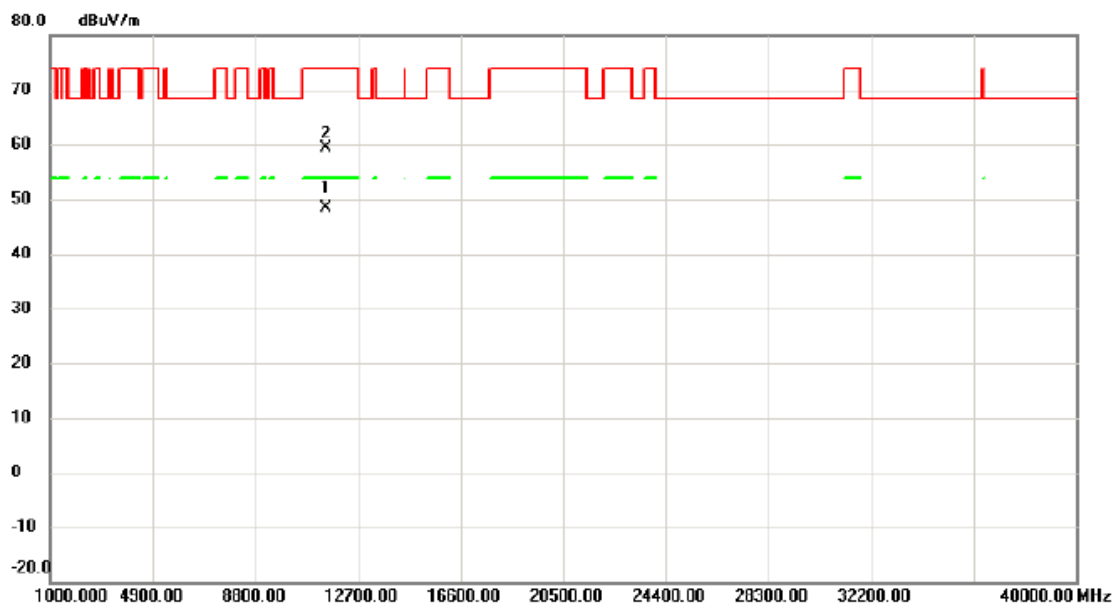

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11489.360	31.68	16.73	48.41	54.00	-5.59	AVG	
2		11494.200	42.64	16.75	59.39	74.00	-14.61	peak	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

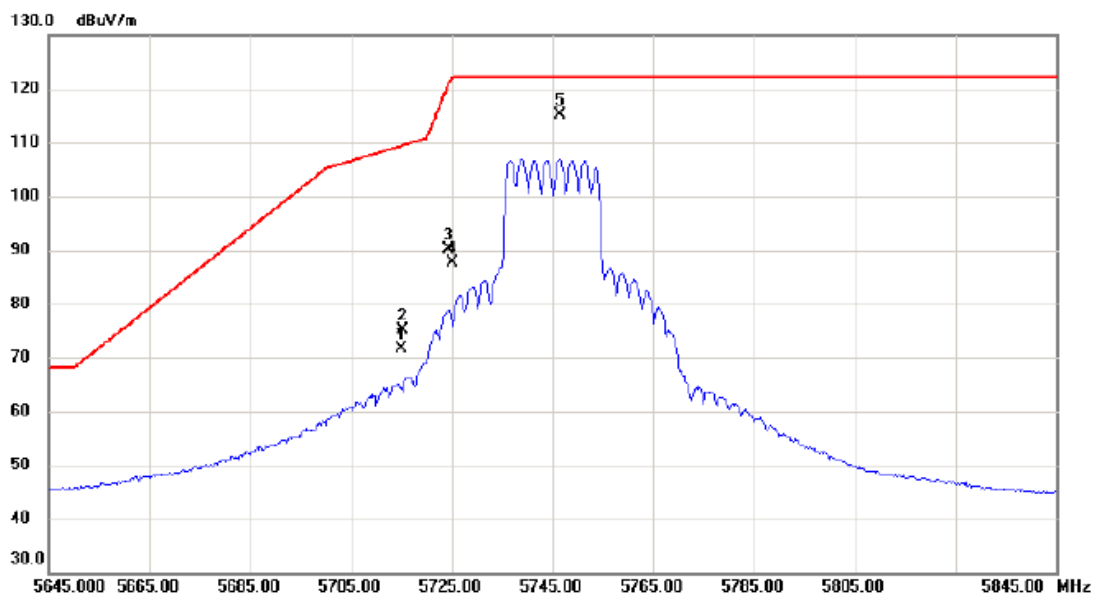

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	56.39	15.26	71.65	109.40	-37.75	peak	
2		5715.200	59.79	15.26	75.05	109.46	-34.41	peak	
3		5724.400	74.87	15.26	90.13	120.83	-30.70	peak	
4		5725.000	72.29	15.27	87.56	122.20	-34.64	peak	
5 *		5746.400	99.83	15.30	115.13	122.20	-7.07	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

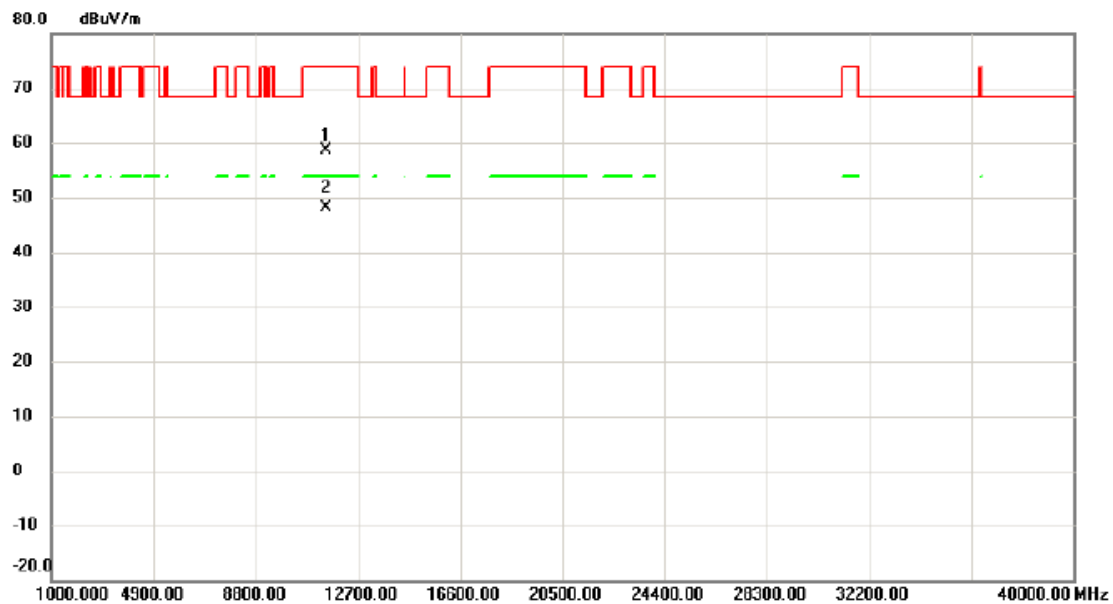

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11486.550	41.87	16.73	58.60	74.00	-15.40	peak	
2	*	11488.825	31.37	16.73	48.10	54.00	-5.90	AVG	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

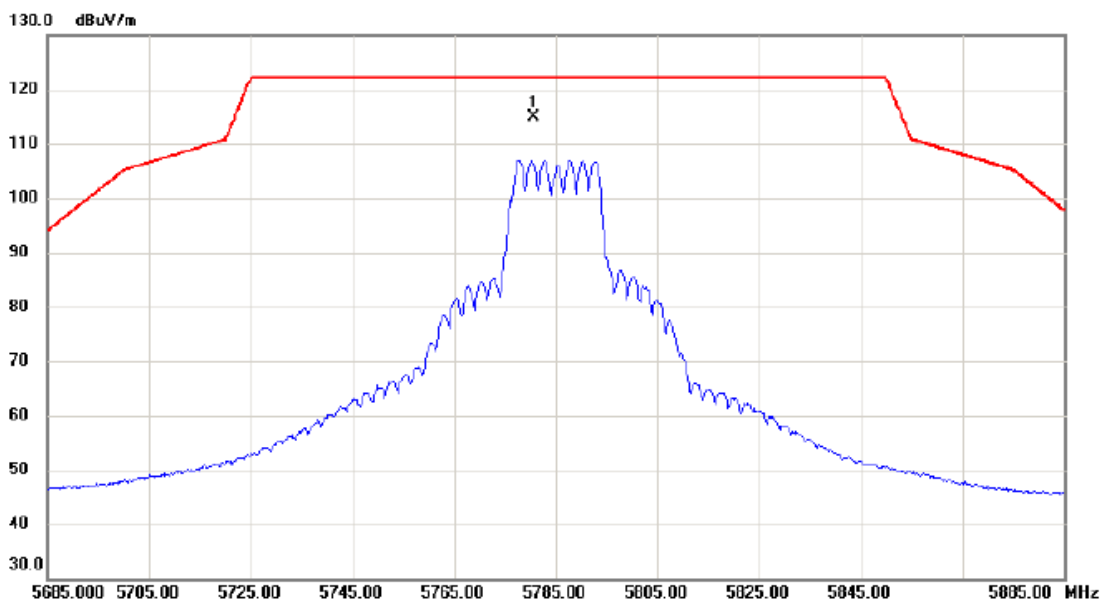

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5780.600	99.66	15.34	115.00	122.20	-7.20	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

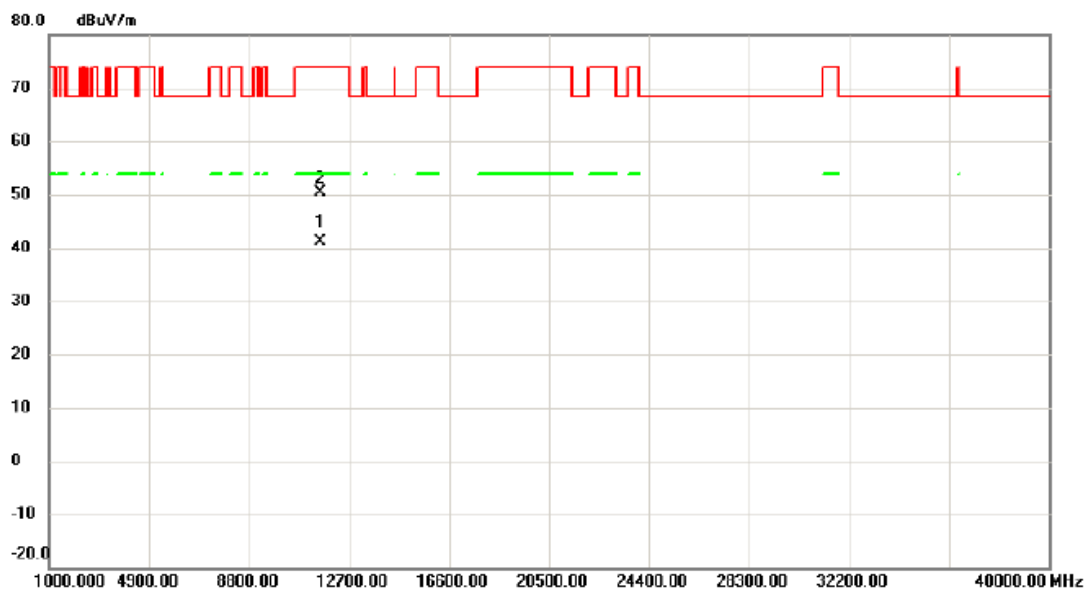

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11568.540	24.49	16.55	41.04	54.00	-12.96	AVG	
2		11571.220	33.92	16.54	50.46	74.00	-23.54	peak	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

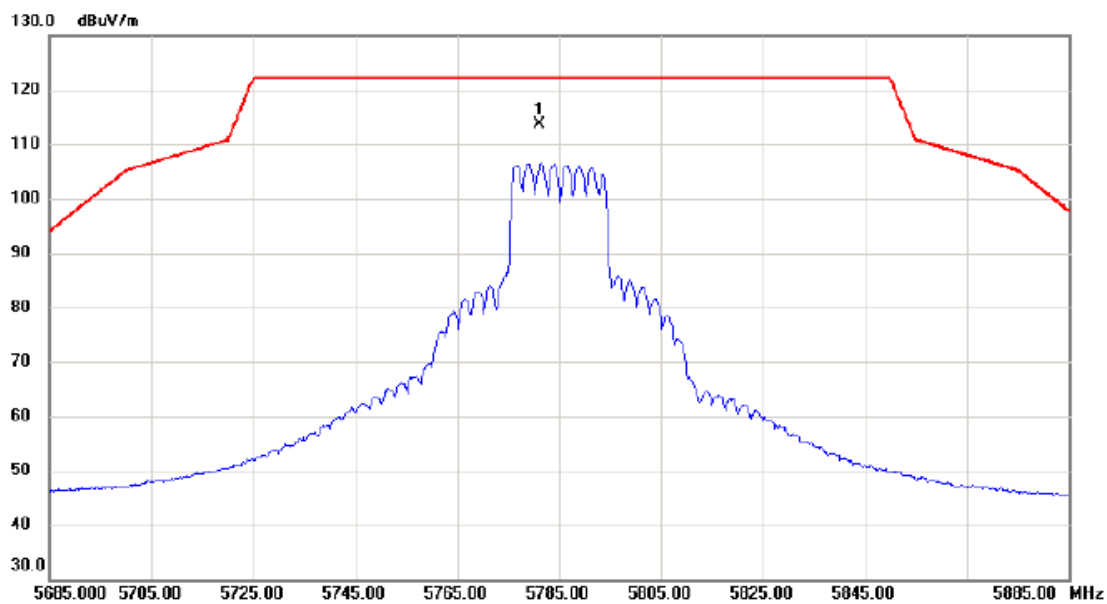

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5781.200	98.26	15.34	113.60	122.20	-8.60	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

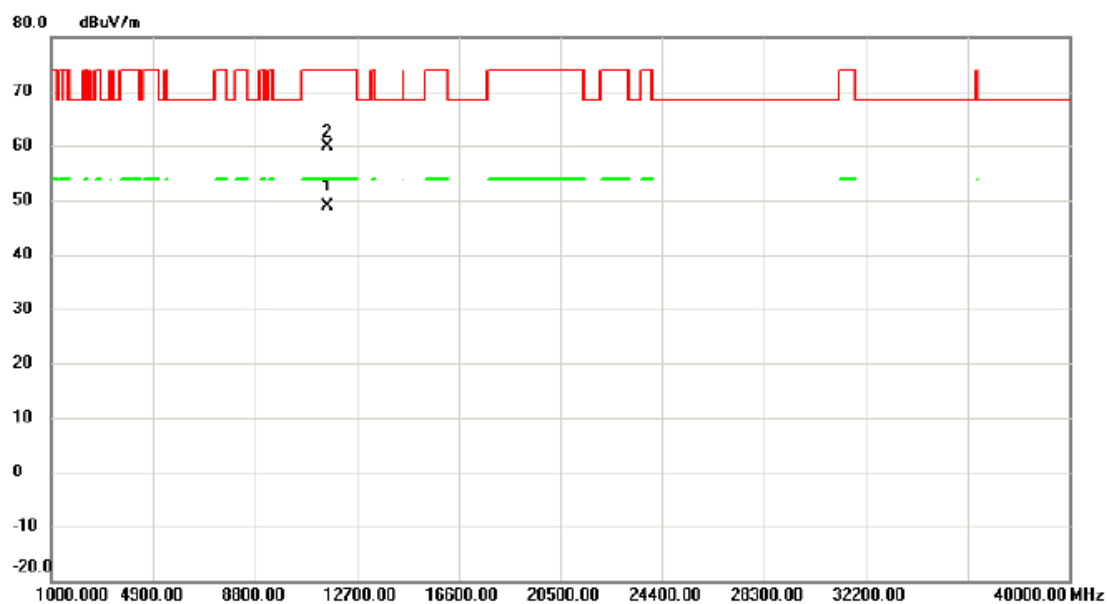

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11568.960	32.41	16.55	48.96	54.00	-5.04	AVG	
2		11571.260	43.34	16.54	59.88	74.00	-14.12	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

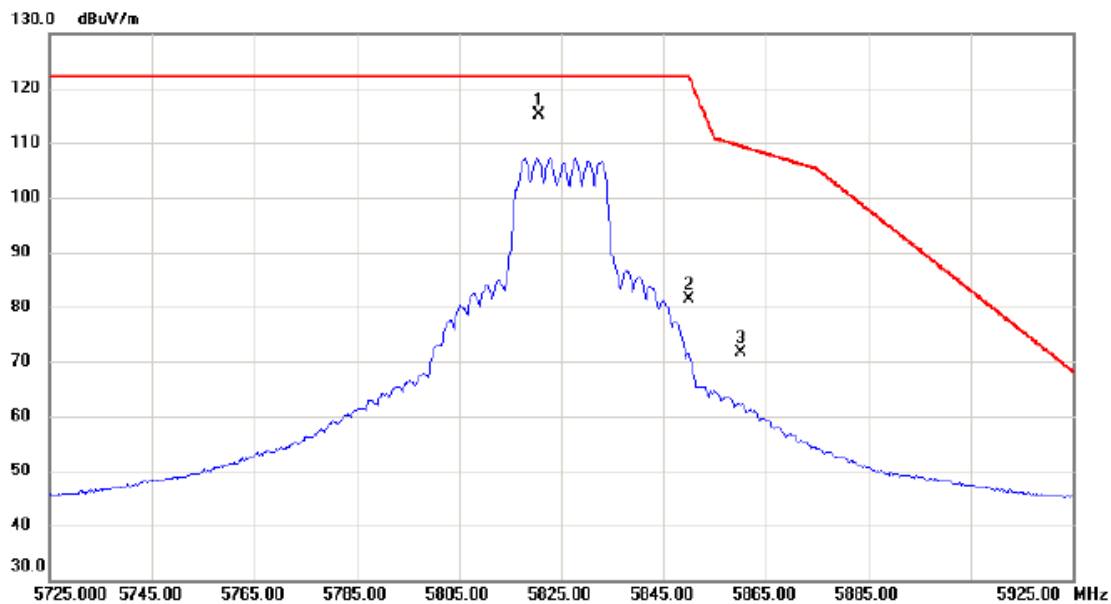

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.700	99.65	15.39	115.04	122.20	-7.16	peak	主波訊號不予判定
2		5850.000	65.91	15.43	81.34	122.20	-40.86	peak	
3		5860.000	56.30	15.44	71.74	109.40	-37.66	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/20

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

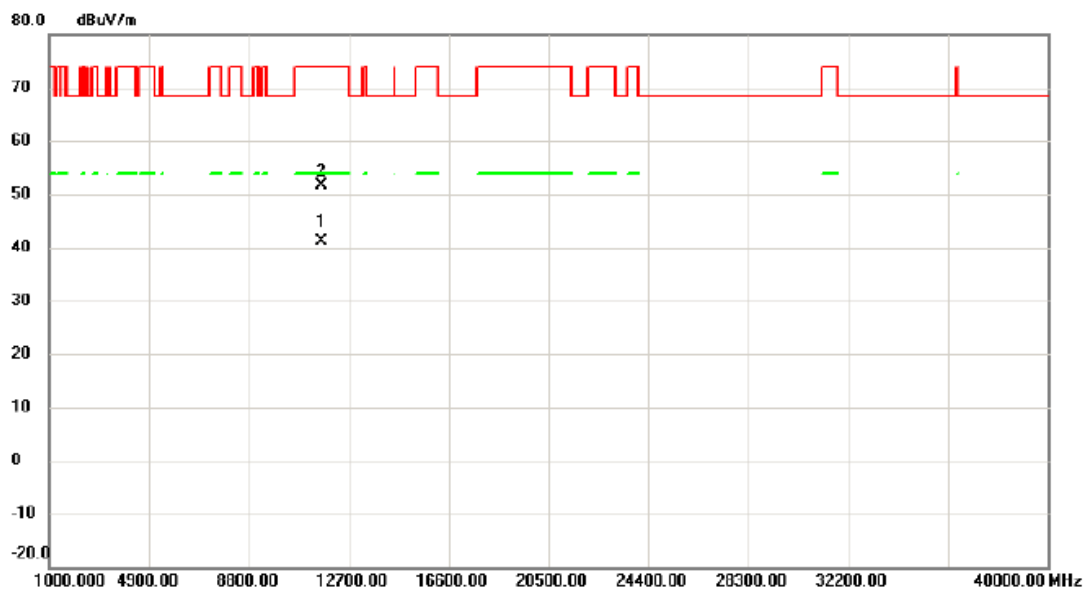

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11648.580	24.70	16.32	41.02	54.00	-12.98	AVG	
2		11656.020	35.31	16.30	51.61	74.00	-22.39	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

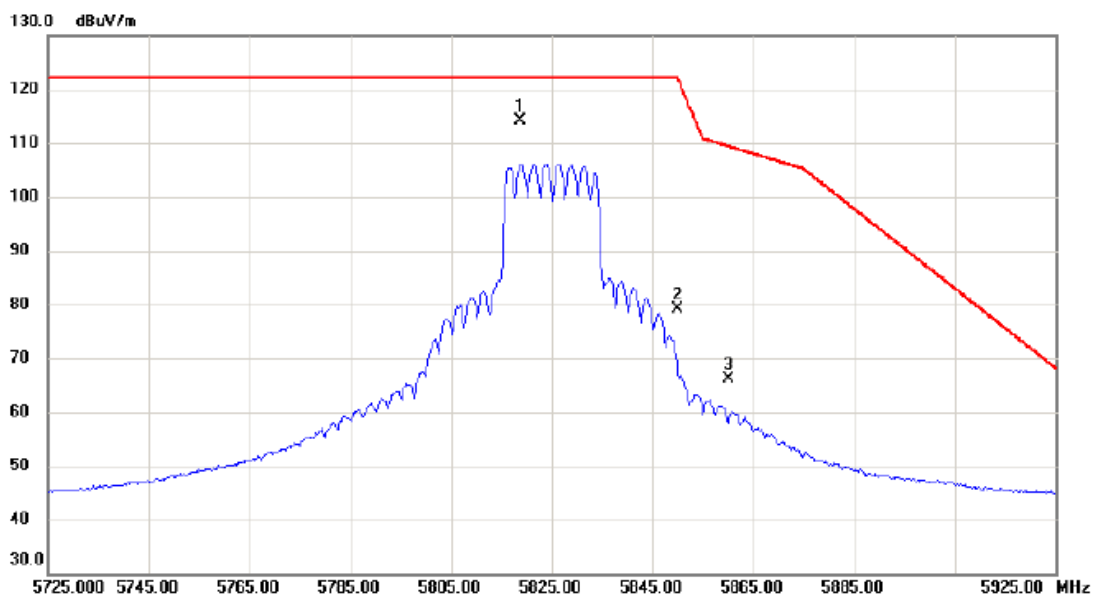

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5818.700	98.76	15.39	114.15	122.20	-8.05	peak	主波訊號不予判定
2		5850.000	63.77	15.43	79.20	122.20	-43.00	peak	
3		5860.000	50.59	15.44	66.03	109.40	-43.37	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/20

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

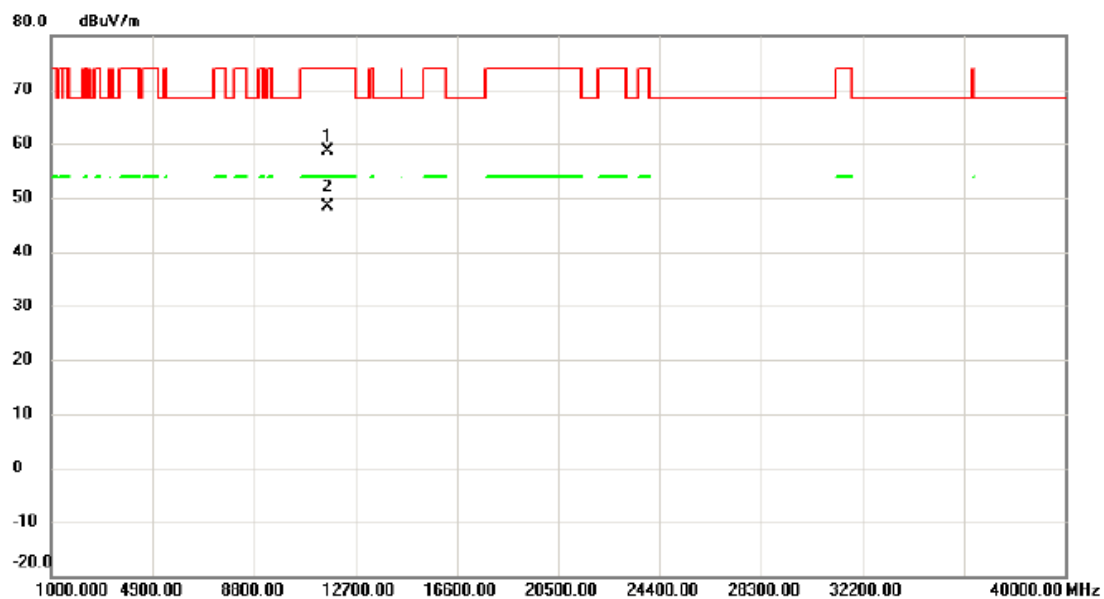

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.940	42.32	16.32	58.64	74.00	-15.36	peak	
2	*	11651.380	32.05	16.32	48.37	54.00	-5.63	AVG	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

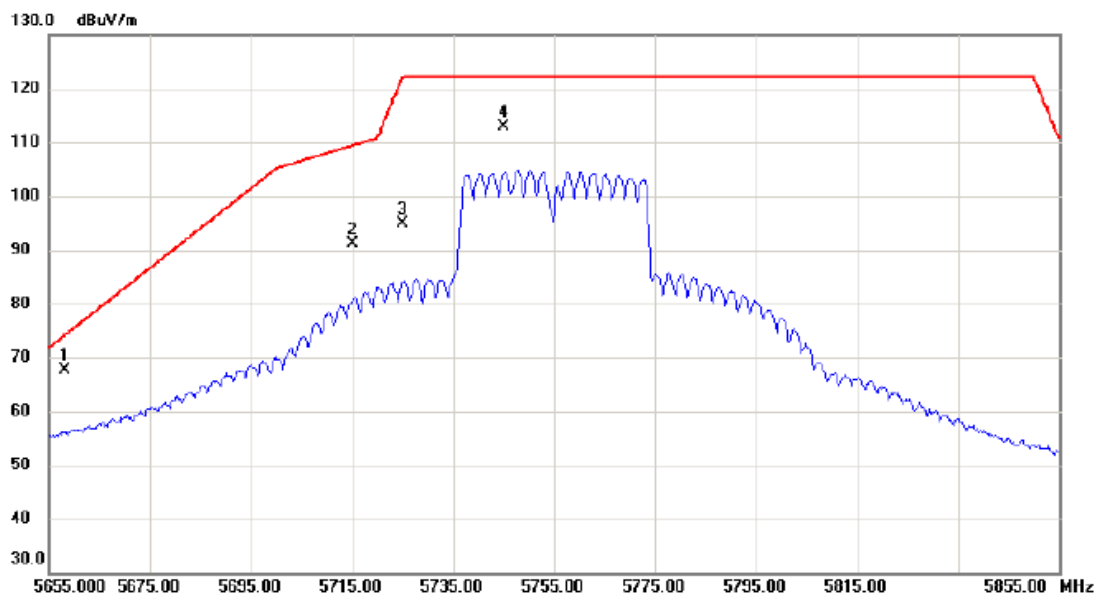

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5658.000	52.54	15.18	67.72	74.12	-6.40	peak	
2		5715.000	75.75	15.26	91.01	109.40	-18.39	peak	
3		5725.000	79.72	15.27	94.99	122.20	-27.21	peak	
4		5745.000	97.68	15.30	112.98	122.20	-9.22	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

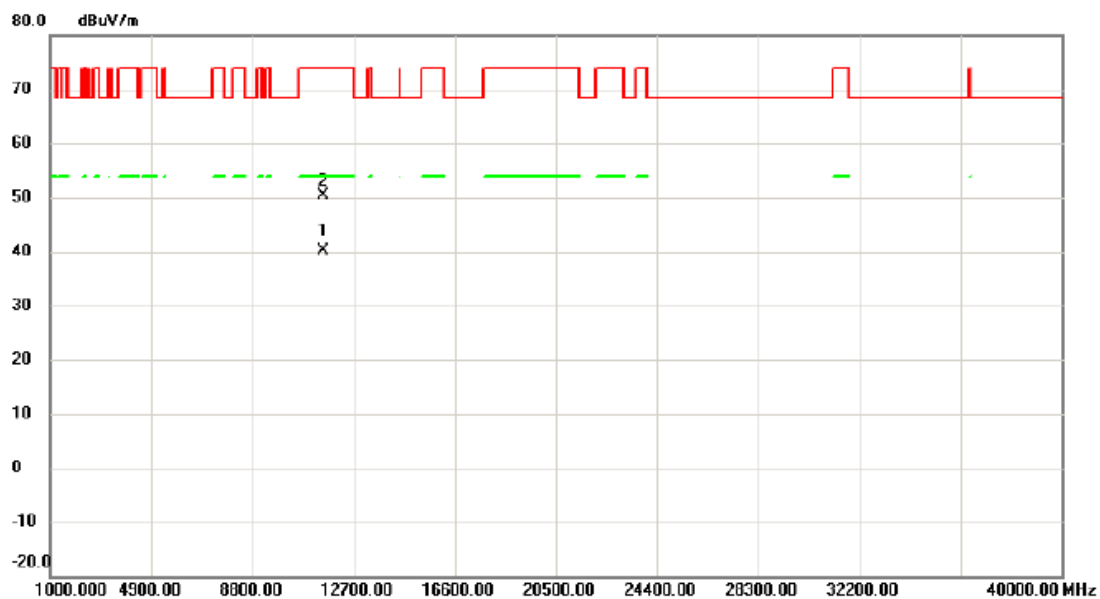

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
		MHz	Level	Factor	ment				
1	*	11508.550	23.30	16.73	40.03	54.00	-13.97	AVG	
2		11511.200	33.74	16.72	50.46	74.00	-23.54	peak	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

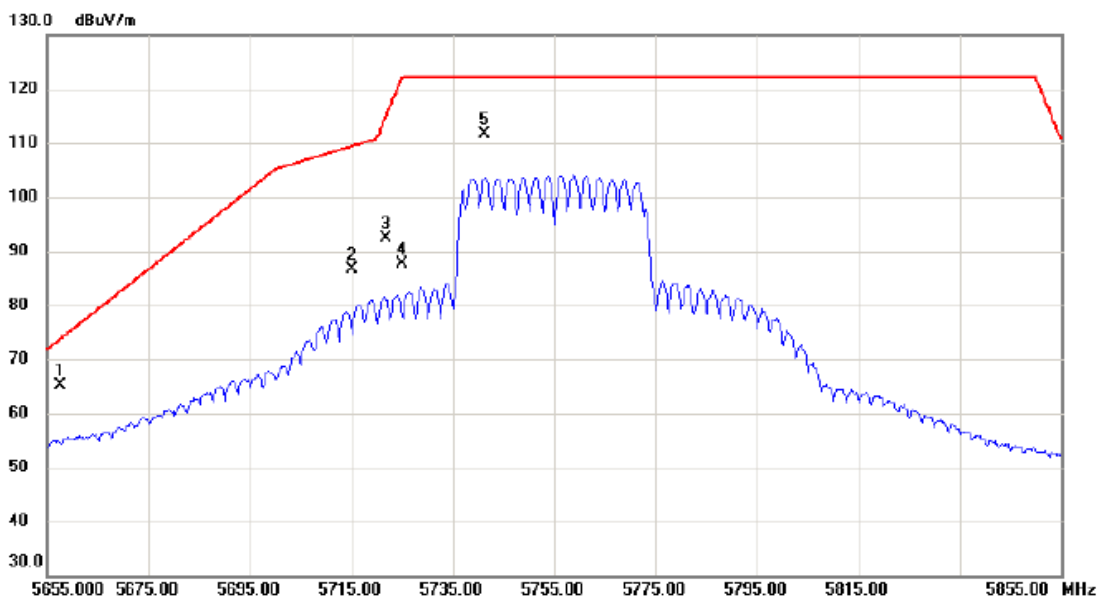

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5657.600	49.87	15.18	65.05	73.82	-8.77	peak	
2		5715.000	71.32	15.26	86.58	109.40	-22.82	peak	
3		5721.700	77.03	15.26	92.29	114.68	-22.39	peak	
4		5725.000	72.32	15.27	87.59	122.20	-34.61	peak	
5		5741.300	96.43	15.29	111.72	122.20	-10.48	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

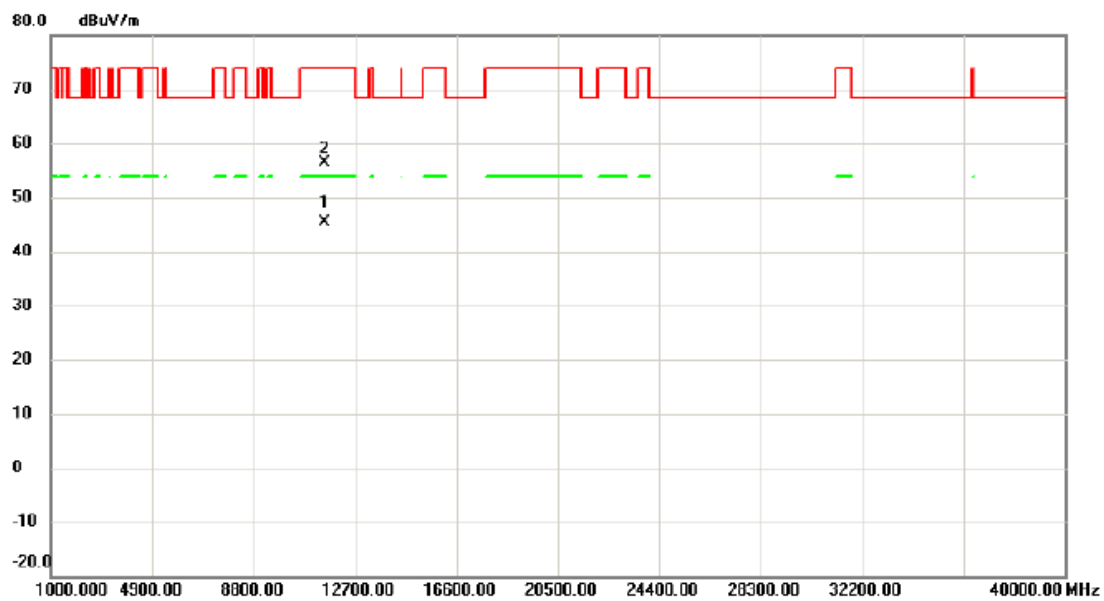


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11509.125	28.56	16.73	45.29	54.00	-8.71	AVG	
2		11511.475	39.72	16.72	56.44	74.00	-17.56	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

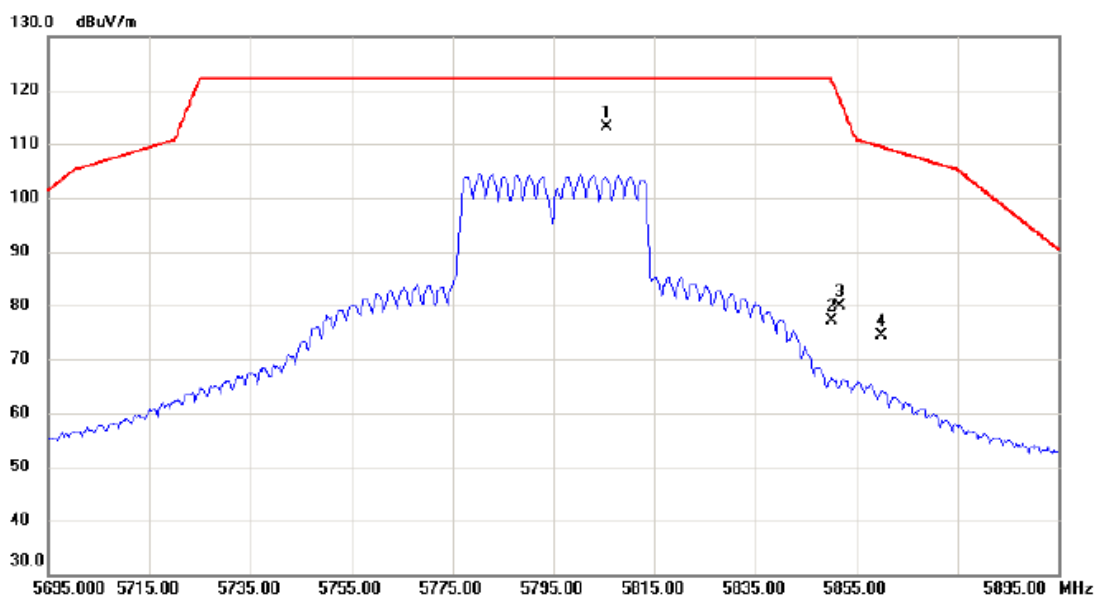

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5805.500	97.75	15.37	113.12	122.20	-9.08	peak	主波訊號不予判定
2		5850.000	61.78	15.43	77.21	122.20	-44.99	peak	
3		5851.600	64.40	15.43	79.83	118.55	-38.72	peak	
4		5860.000	59.02	15.44	74.46	109.40	-34.94	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/20

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

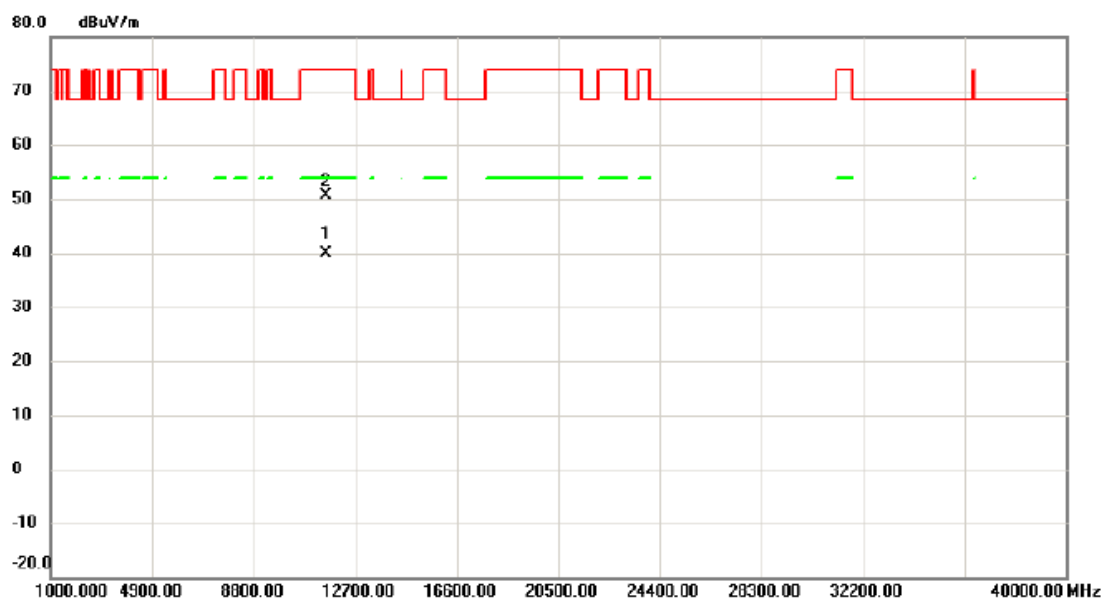


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11588.400	23.29	16.49	39.78	54.00	-14.22	AVG	
2		11593.800	34.14	16.49	50.63	74.00	-23.37	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

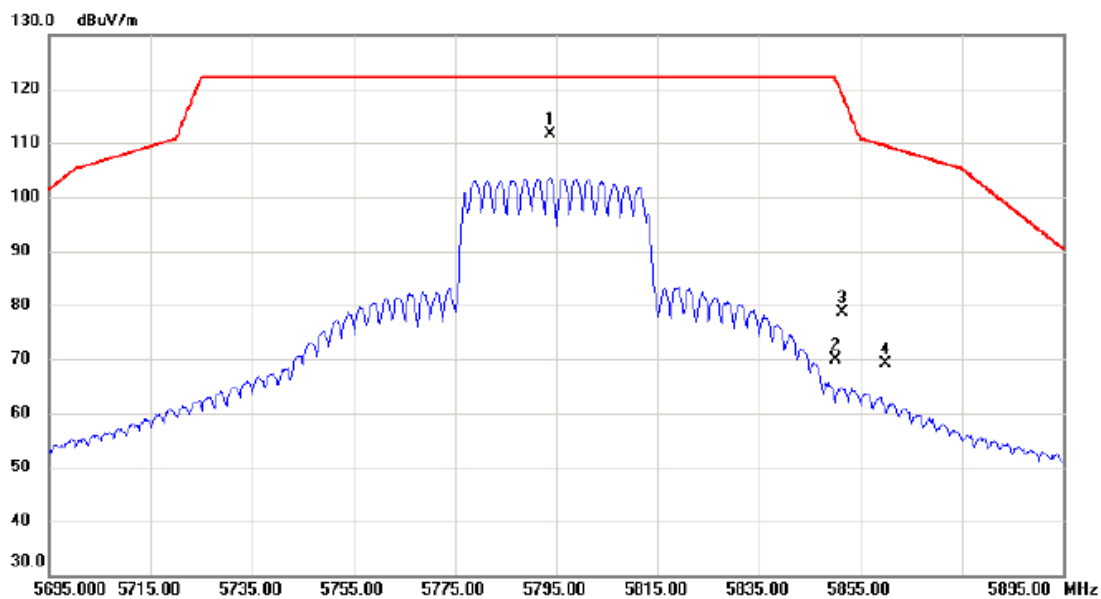

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5793.900	96.28	15.35	111.63	122.20	-10.57	peak	主波訊號不予判定
2		5850.000	54.50	15.43	69.93	122.20	-52.27	peak	
3		5851.300	63.28	15.43	78.71	119.24	-40.53	peak	
4		5860.000	53.76	15.44	69.20	109.40	-40.20	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

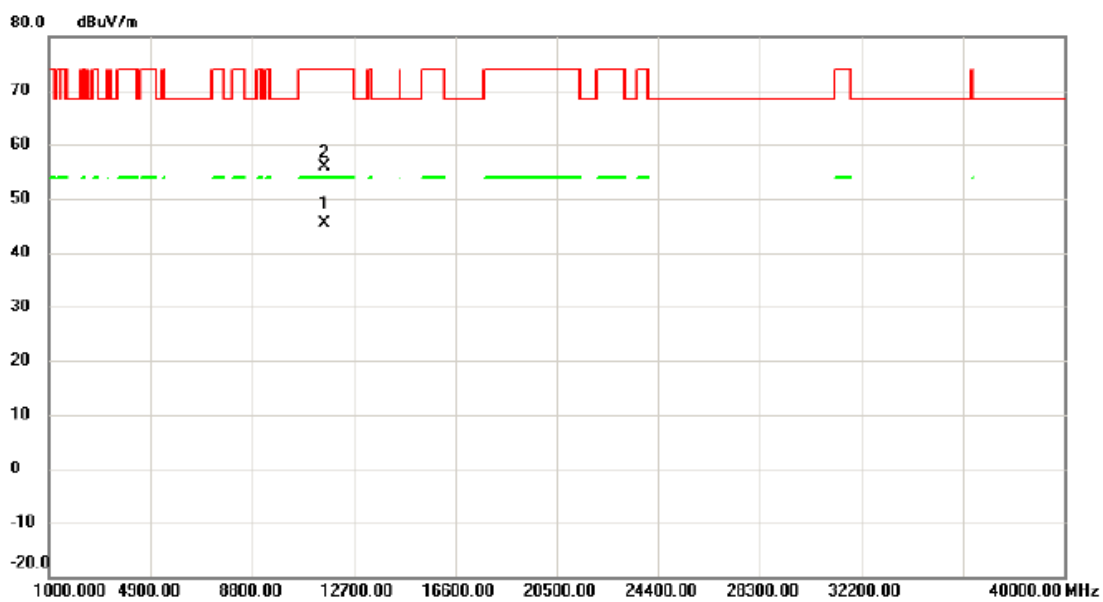

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11589.125	29.01	16.49	45.50	54.00	-8.50	AVG	
2		11604.125	39.39	16.46	55.85	74.00	-18.15	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

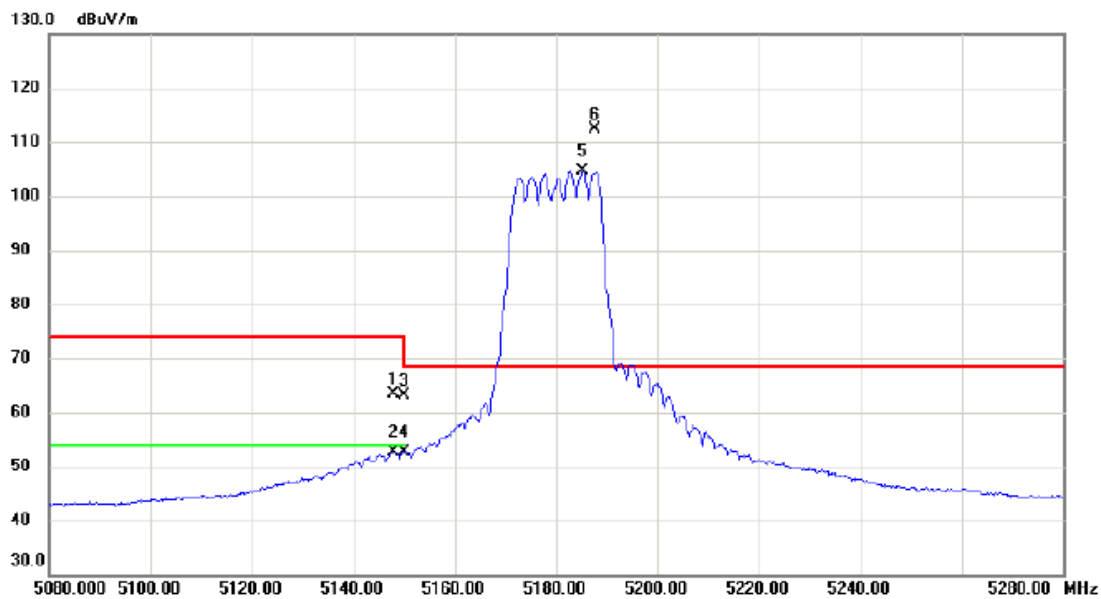

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.900	49.08	14.36	63.44	74.00	-10.56	peak	
2	5147.900	38.17	14.36	52.53	54.00	-1.47	AVG	
3	5150.000	48.79	14.36	63.15	74.00	-10.85	peak	
4	5150.000	38.38	14.36	52.74	54.00	-1.26	AVG	
5 X	5185.200	90.16	14.42	104.58	68.30	36.28	AVG	主波訊號不予判定
6 *	5187.700	97.86	14.42	112.28	68.30	43.98	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/20

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

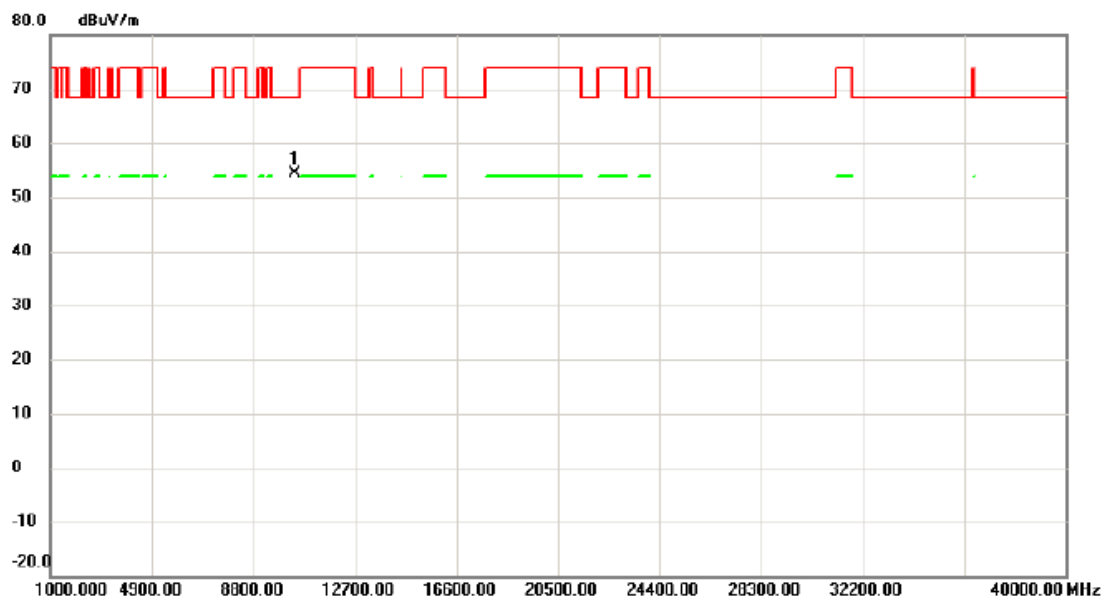

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10361.650	40.30	14.13	54.43	68.30	-13.87	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

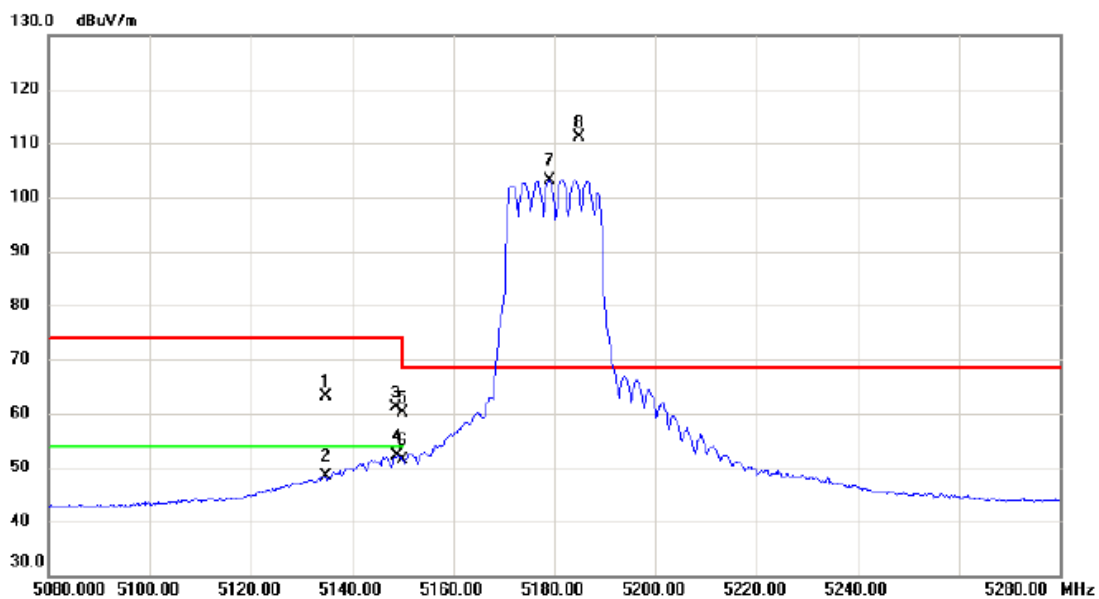

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5134.900	48.92	14.33	63.25	74.00	-10.75	peak	
2		5134.900	33.99	14.33	48.32	54.00	-5.68	AVG	
3		5148.700	46.78	14.36	61.14	74.00	-12.86	peak	
4		5148.800	37.84	14.36	52.20	54.00	-1.80	AVG	
5		5150.000	45.78	14.36	60.14	74.00	-13.86	peak	
6		5150.000	37.14	14.36	51.50	54.00	-2.50	AVG	
7	X	5179.100	88.83	14.41	103.24	68.30	34.94	AVG	主波訊號不予判定
8	*	5184.900	96.81	14.42	111.23	68.30	42.93	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

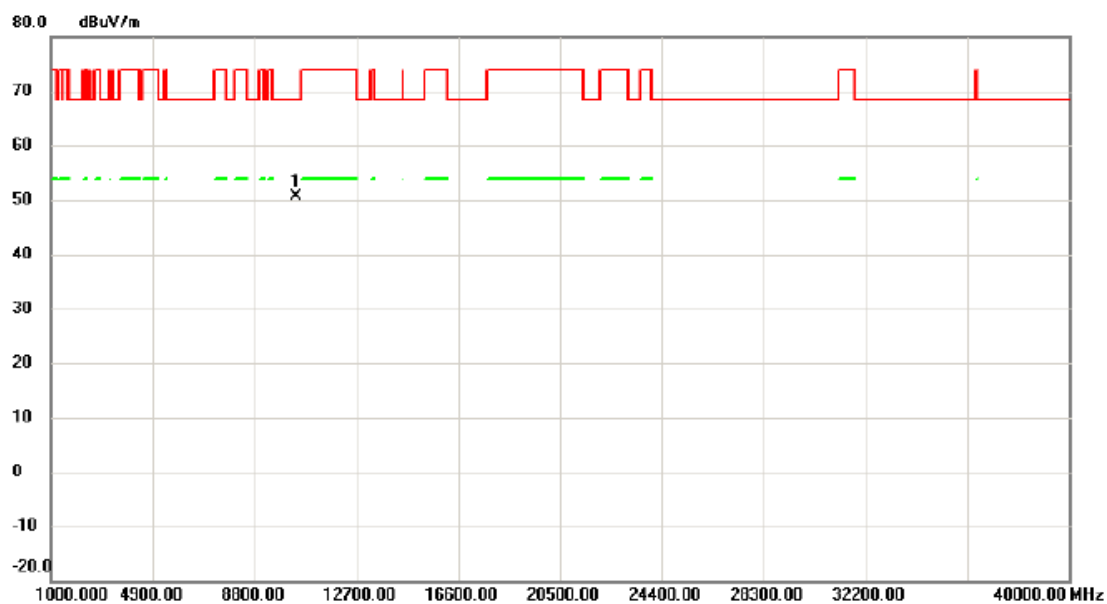

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10361.450	36.59	14.13	50.72	68.30	-17.58	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

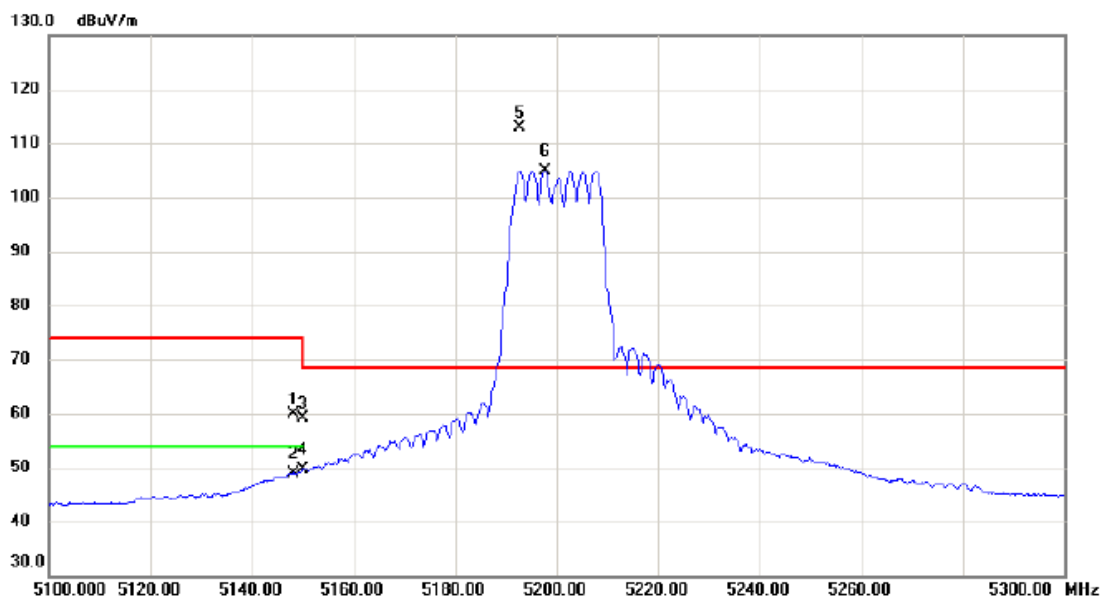

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.000	45.40	14.36	59.76	74.00	-14.24	peak	
2		5148.000	34.59	14.36	48.95	54.00	-5.05	AVG	
3		5150.000	44.70	14.36	59.06	74.00	-14.94	peak	
4		5150.000	35.33	14.36	49.69	54.00	-4.31	AVG	
5 *		5192.600	98.45	14.43	112.88	68.30	44.58	peak	主波訊號不予判定
6 X		5197.800	90.55	14.45	105.00	68.30	36.70	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

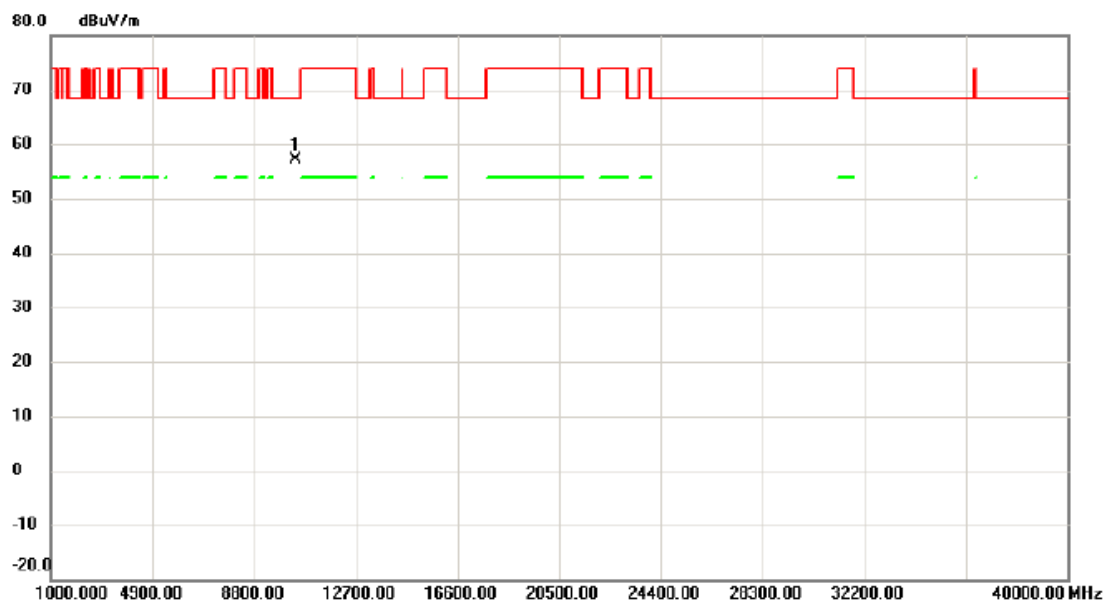

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10401.650	42.94	14.26	57.20	68.30	-11.10	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

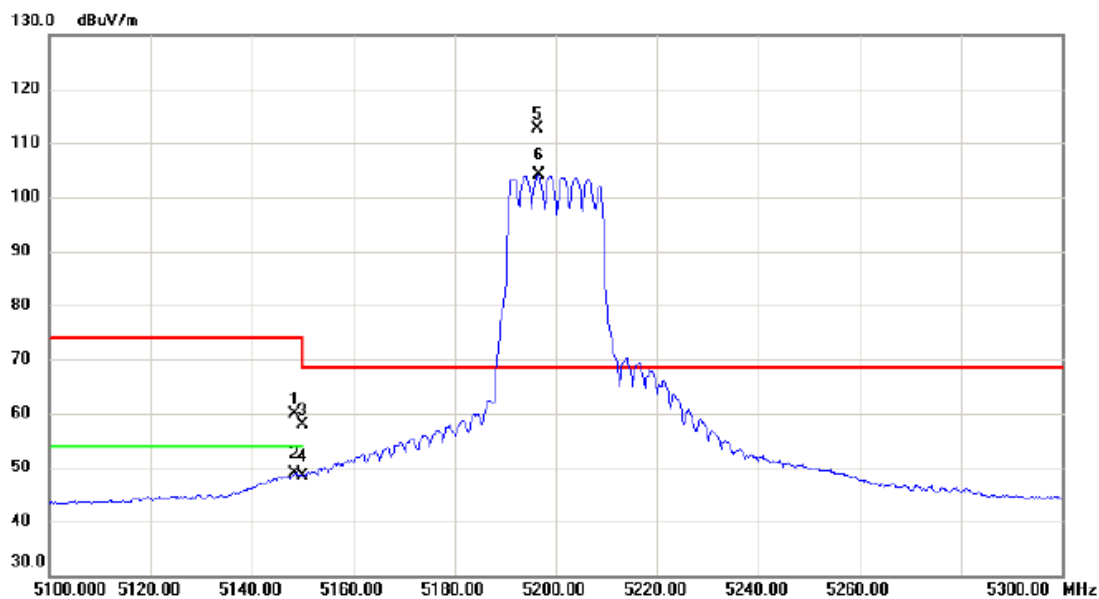


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.400	45.42	14.36	59.78	74.00	-14.22	peak	
2		5148.400	34.56	14.36	48.92	54.00	-5.08	AVG	
3		5150.000	43.45	14.36	57.81	74.00	-16.19	peak	
4		5150.000	34.05	14.36	48.41	54.00	-5.59	AVG	
5 *		5196.400	98.17	14.44	112.61	68.30	44.31	peak	主波訊號不予判定
6 X		5196.600	89.65	14.44	104.09	68.30	35.79	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

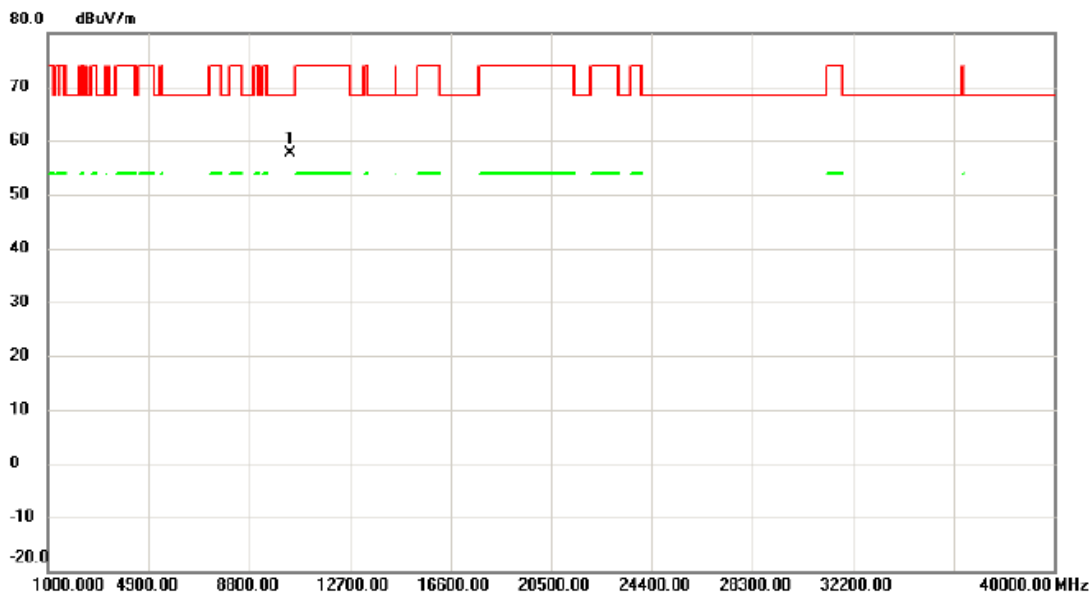

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10398.975	43.37	14.26	57.63	68.30	-10.67	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

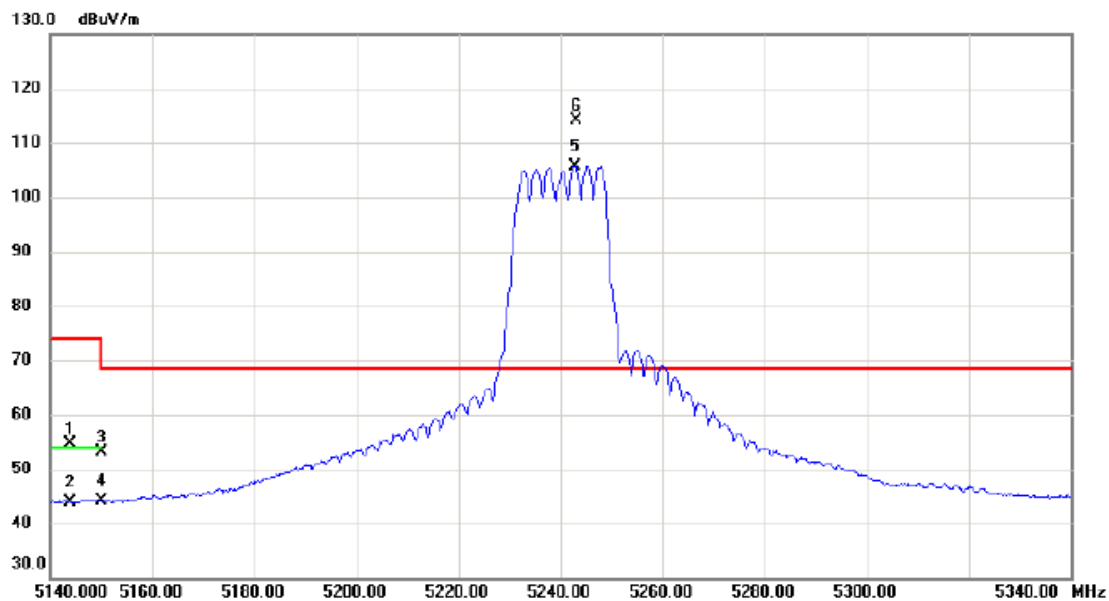

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5143.800	40.26	14.35	54.61	74.00	-19.39	peak	
2		5143.800	29.51	14.35	43.86	54.00	-10.14	AVG	
3		5150.000	38.69	14.36	53.05	74.00	-20.95	peak	
4		5150.000	29.68	14.36	44.04	54.00	-9.96	AVG	
5	X	5242.800	91.23	14.52	105.75	68.30	37.45	AVG	主波訊號不予判定
6	*	5243.200	99.51	14.52	114.03	68.30	45.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

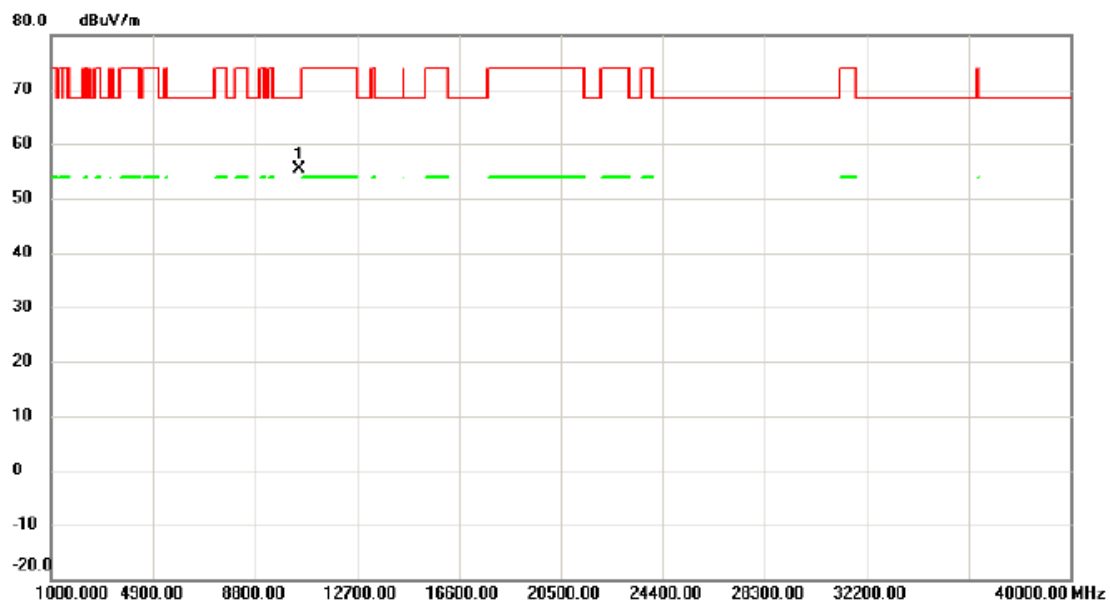


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10479.300	40.77	14.52	55.29	68.30	-13.01	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

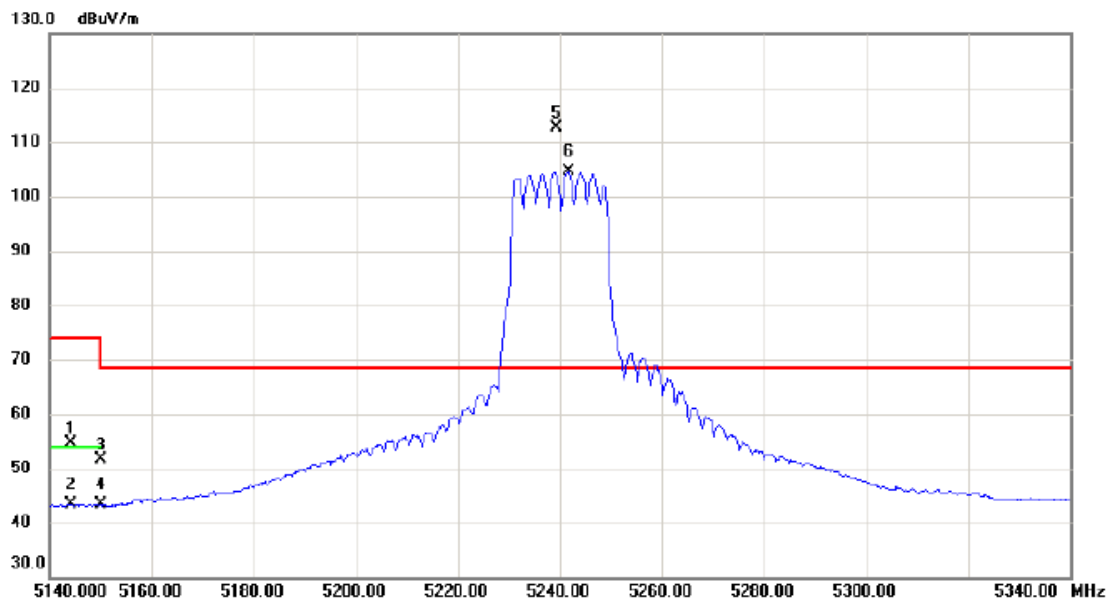

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.100	40.16	14.35	54.51	74.00	-19.49	peak	
2		5144.100	29.01	14.35	43.36	54.00	-10.64	AVG	
3		5150.000	37.33	14.36	51.69	74.00	-22.31	peak	
4		5150.000	29.07	14.36	43.43	54.00	-10.57	AVG	
5	*	5239.400	98.04	14.51	112.55	68.30	44.25	peak	主波訊號不予判定
6	X	5241.600	90.02	14.51	104.53	68.30	36.23	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

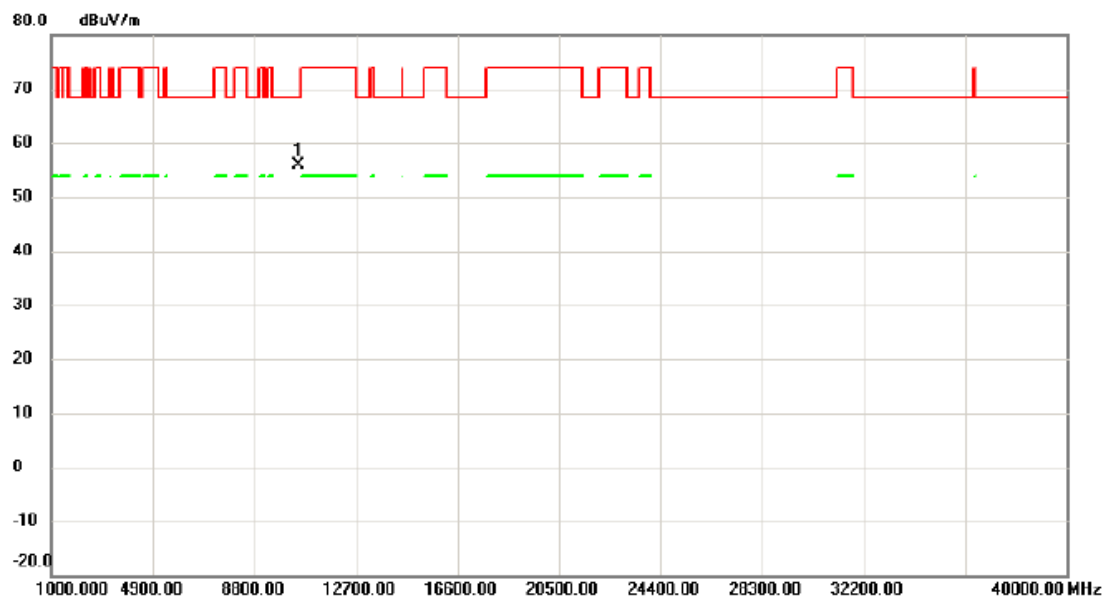


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10476.950	41.27	14.52	55.79	68.30	-12.51	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

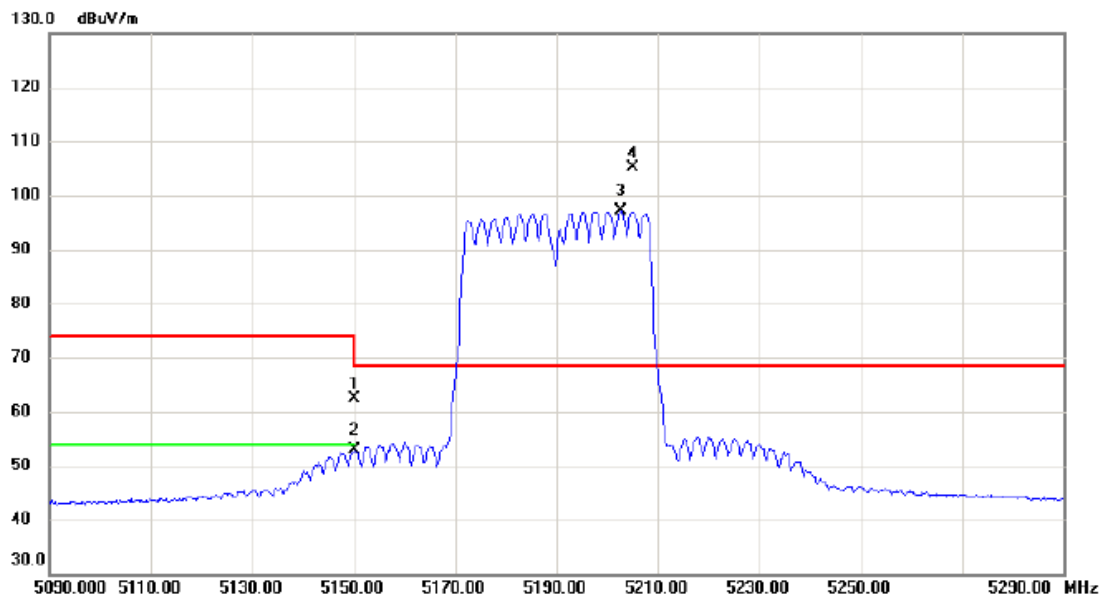


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	47.92	14.36	62.28	74.00	-11.72	peak	
2		5150.000	38.57	14.36	52.93	54.00	-1.07	AVG	
3	X	5202.600	82.68	14.45	97.13	68.30	28.83	AVG	主波訊號不予判定
4	*	5205.200	90.71	14.45	105.16	68.30	36.86	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

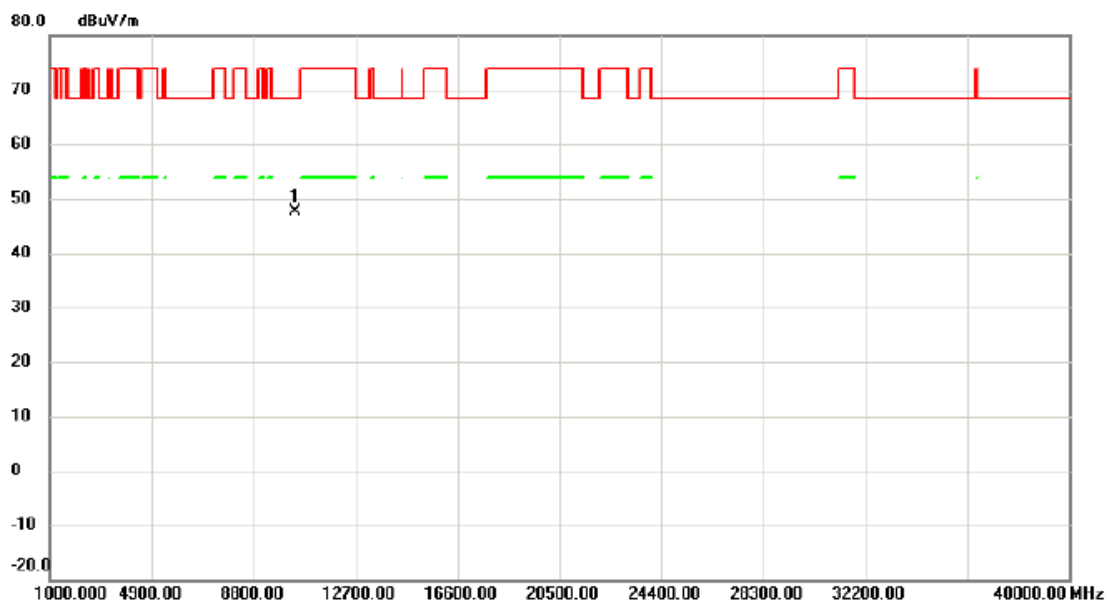

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10378.750	33.42	14.19	47.61	68.30	-20.69	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

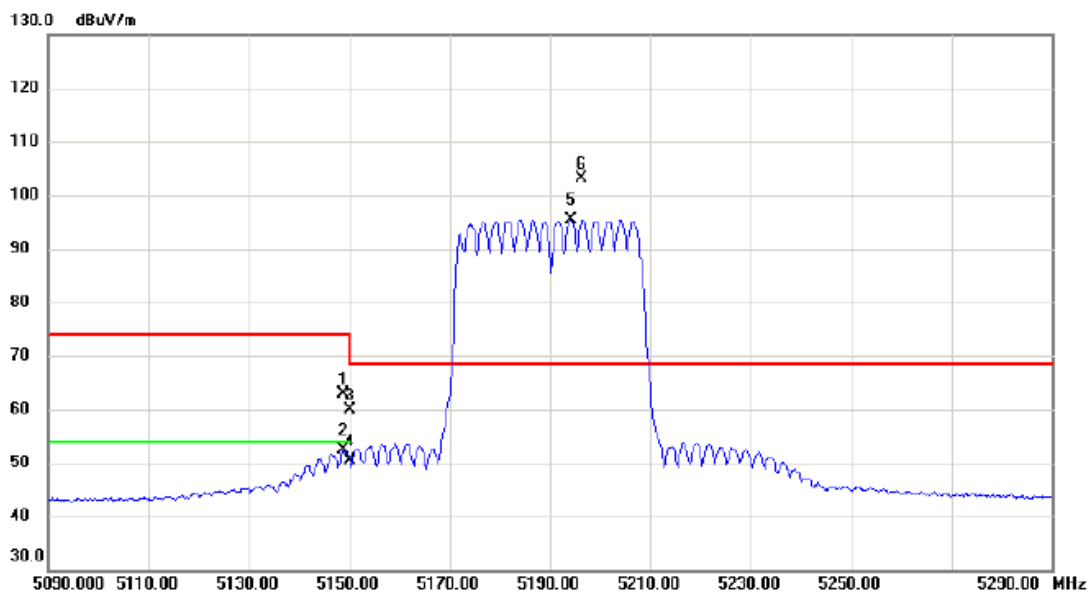


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.800	48.64	14.36	63.00	74.00	-11.00	peak	
2		5148.800	37.91	14.36	52.27	54.00	-1.73	AVG	
3		5150.000	45.55	14.36	59.91	74.00	-14.09	peak	
4		5150.000	36.11	14.36	50.47	54.00	-3.53	AVG	
5	X	5194.100	81.00	14.44	95.44	68.30	27.14	AVG	主波訊號不予判定
6	*	5196.400	88.75	14.44	103.19	68.30	34.89	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

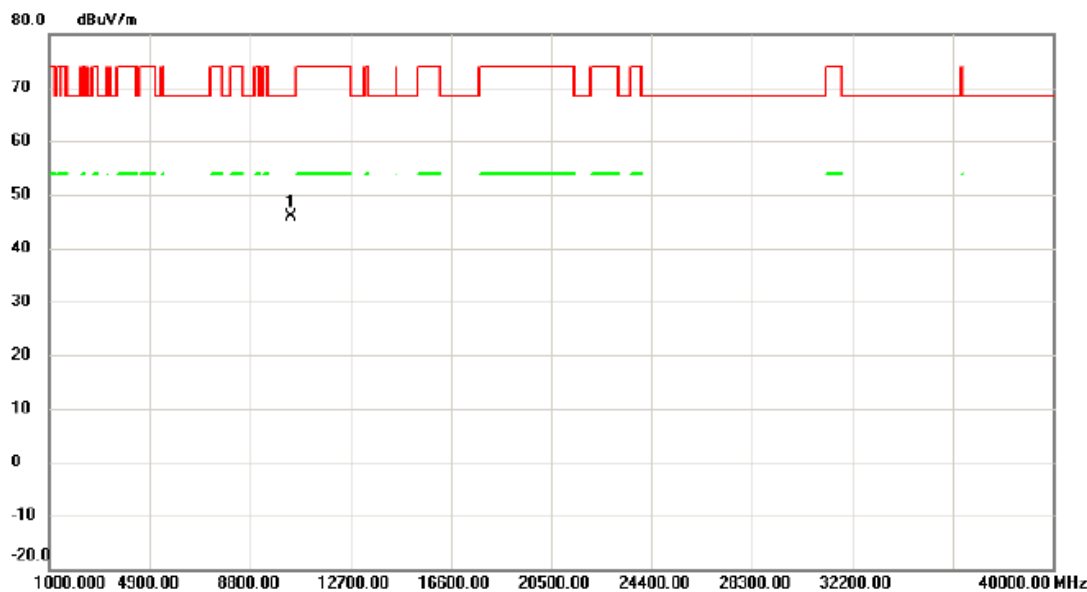


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10402.150	31.69	14.26	45.95	68.30	-22.35	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

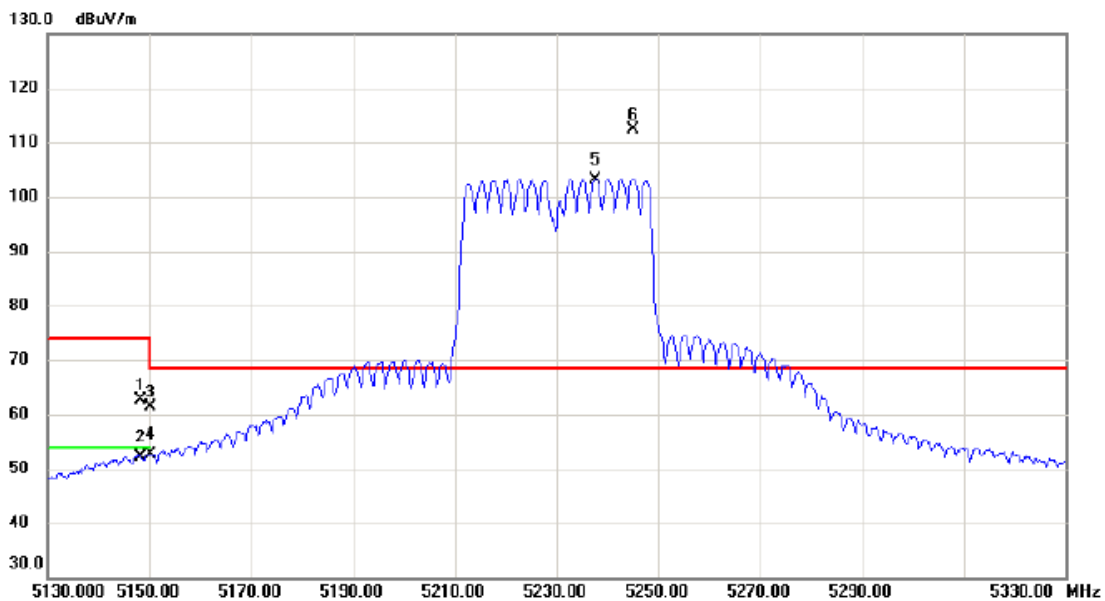

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.200	48.34	14.36	62.70	74.00	-11.30	peak	
2		5148.200	37.82	14.36	52.18	54.00	-1.82	AVG	
3		5150.000	47.14	14.36	61.50	74.00	-12.50	peak	
4		5150.000	38.18	14.36	52.54	54.00	-1.46	AVG	
5	X	5237.700	88.72	14.51	103.23	68.30	34.93	AVG	主波訊號不予判定
6	*	5245.100	97.76	14.53	112.29	68.30	43.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

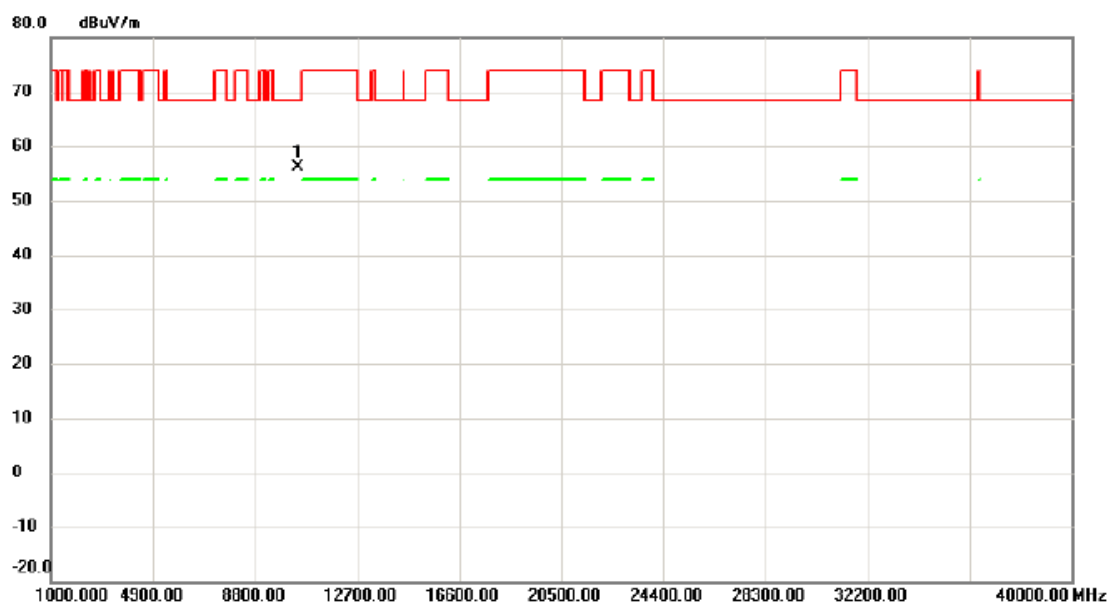


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10456.750	41.76	14.44	56.20	68.30	-12.10	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

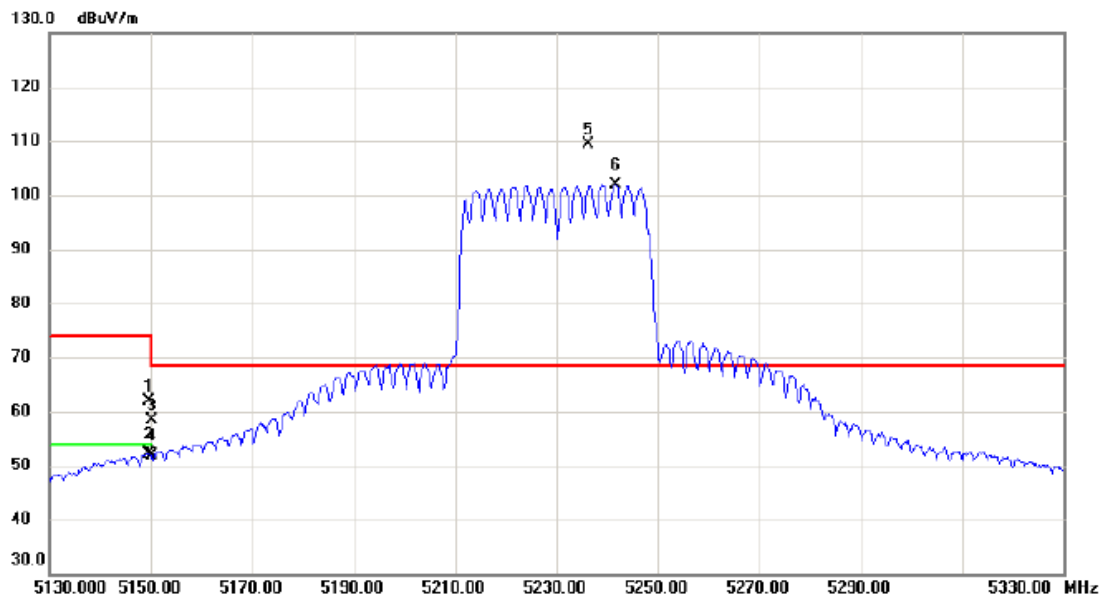


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.600	47.50	14.36	61.86	74.00	-12.14	peak	
2		5149.600	37.85	14.36	52.21	54.00	-1.79	AVG	
3		5150.000	44.02	14.36	58.38	74.00	-15.62	peak	
4		5150.000	37.51	14.36	51.87	54.00	-2.13	AVG	
5	*	5236.200	94.92	14.51	109.43	68.30	41.13	peak	主波訊號不予判定
6	X	5241.600	87.35	14.51	101.86	68.30	33.56	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/20
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

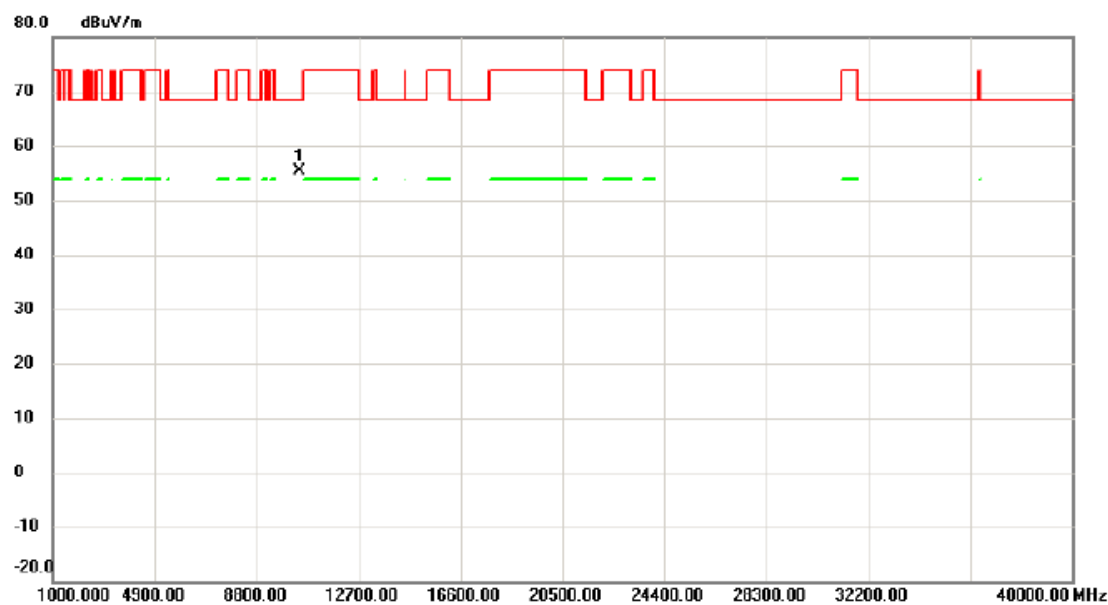


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10458.750	40.96	14.46	55.42	68.30	-12.88	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

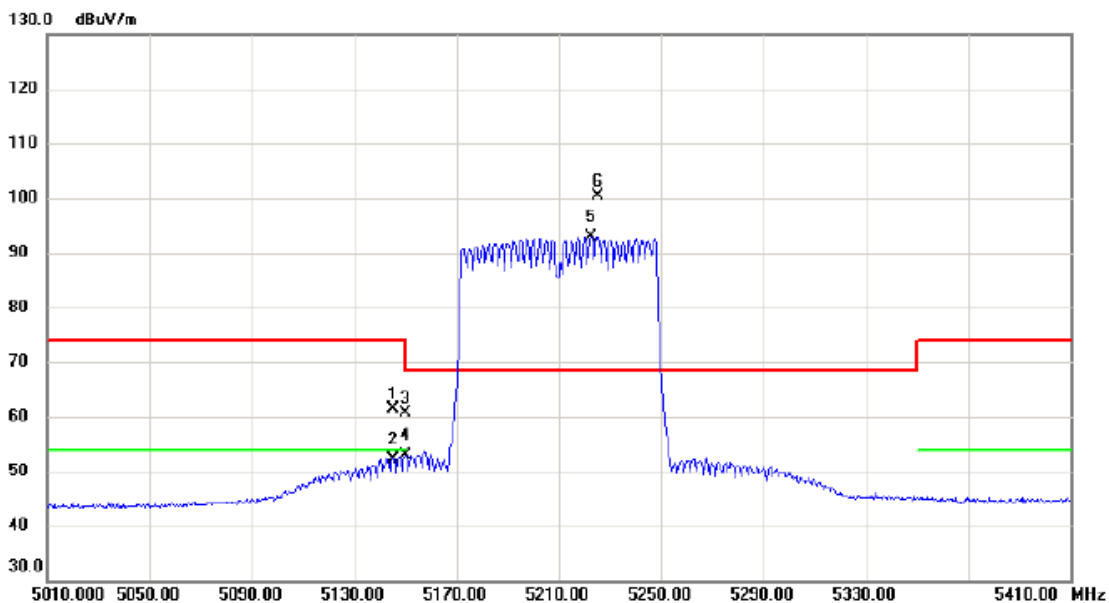

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.400	46.99	14.36	61.35	74.00	-12.65	peak	
2		5145.400	37.69	14.36	52.05	54.00	-1.95	AVG	
3		5150.000	46.29	14.36	60.65	74.00	-13.35	peak	
4		5150.000	38.64	14.36	53.00	54.00	-1.00	AVG	
5	X	5222.600	78.50	14.48	92.98	68.30	24.68	AVG	主波訊號不予判定
6	*	5225.200	85.90	14.50	100.40	68.30	32.10	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

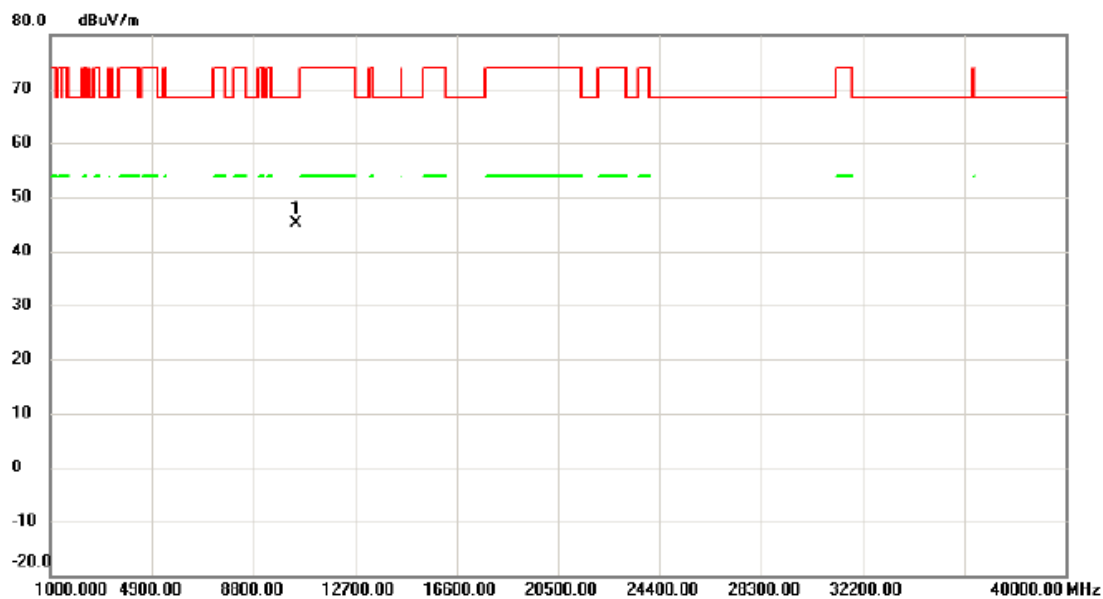


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10418.030	30.84	14.31	45.15	68.30	-23.15	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

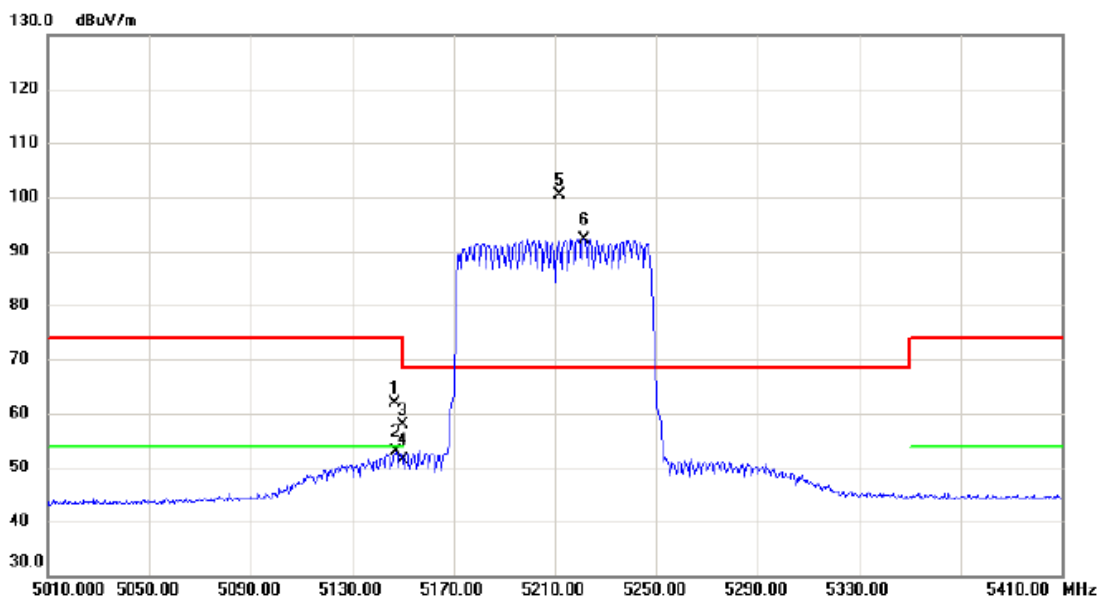

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.000	47.63	14.36	61.99	74.00	-12.01	peak	
2		5147.200	38.52	14.36	52.88	54.00	-1.12	AVG	
3		5150.000	43.50	14.36	57.86	74.00	-16.14	peak	
4		5150.000	37.05	14.36	51.41	54.00	-2.59	AVG	
5	*	5212.000	85.97	14.47	100.44	68.30	32.14	peak	主波訊號不予判定
6	X	5221.600	77.77	14.48	92.25	68.30	23.95	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

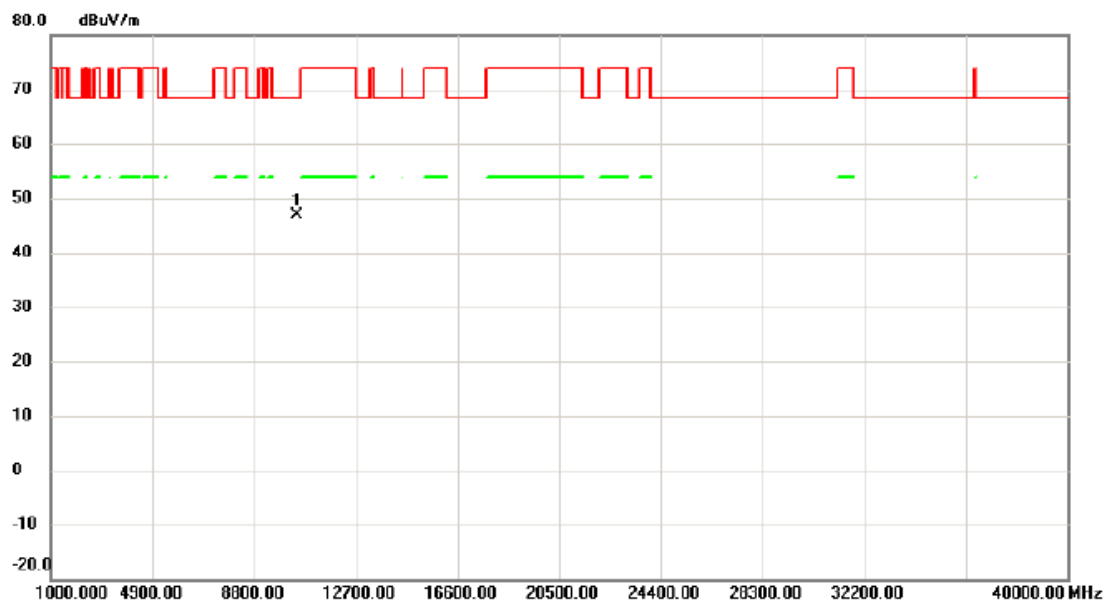

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10416.340	32.49	14.31	46.80	68.30	-21.50	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

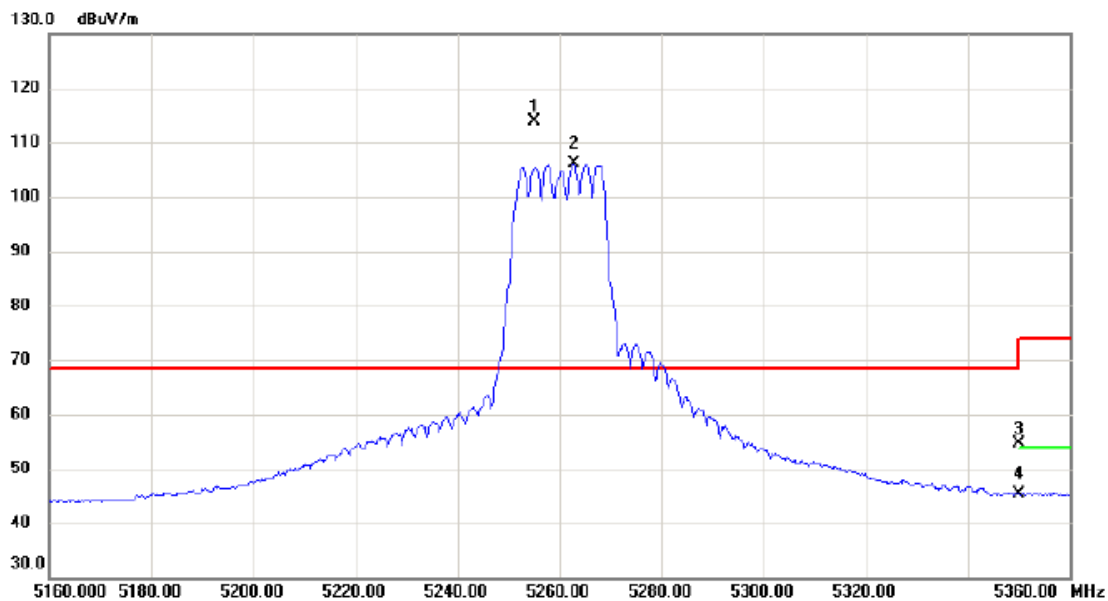

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5255.000	99.35	14.54	113.89	68.30	45.59	peak	主波訊號不予判定
2	X	5262.700	91.57	14.56	106.13	68.30	37.83	AVG	主波訊號不予判定
3		5350.000	39.86	14.71	54.57	74.00	-19.43	peak	
4		5350.000	30.66	14.71	45.37	54.00	-8.63	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

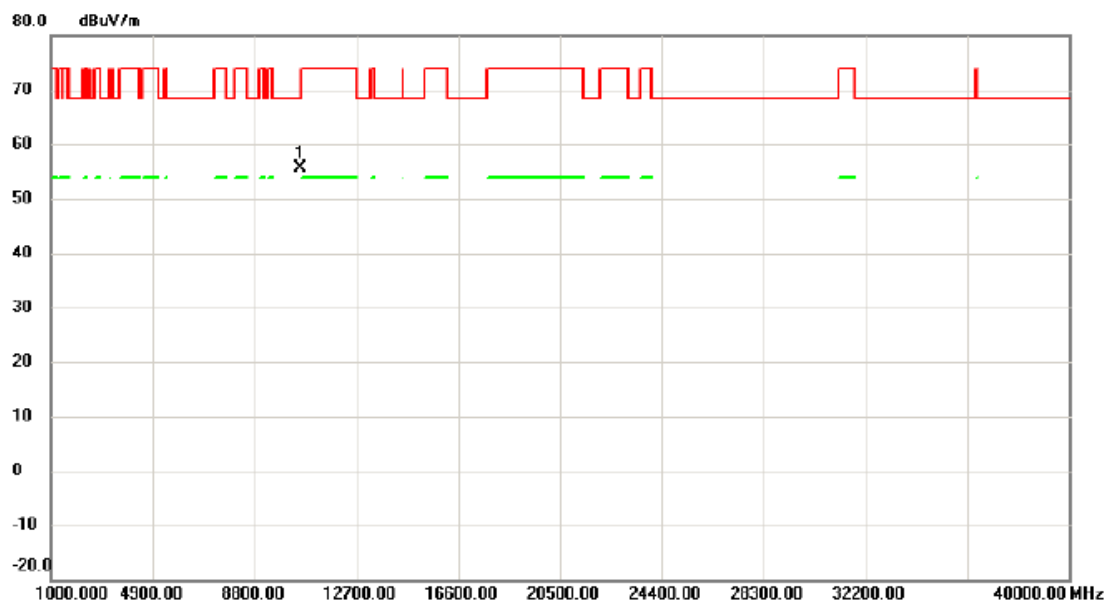

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10519.550	41.02	14.65	55.67	68.30	-12.63	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

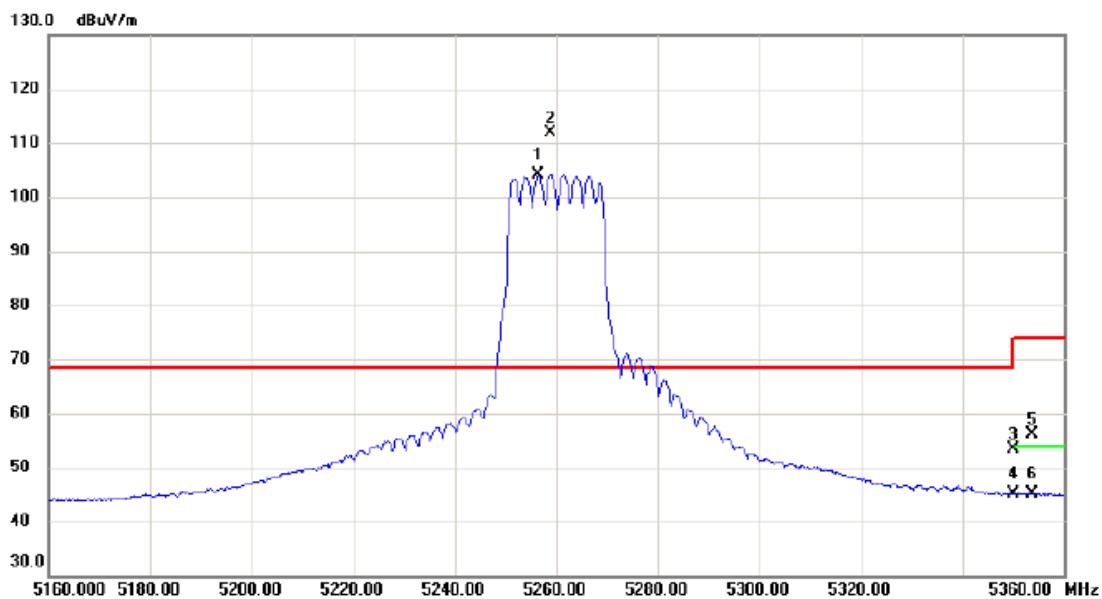

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5256.400	89.64	14.55	104.19	68.30	35.89	AVG	主波訊號不予判定
2	*	5258.700	97.38	14.56	111.94	68.30	43.64	peak	主波訊號不予判定
3		5350.000	38.77	14.71	53.48	74.00	-20.52	peak	
4		5350.000	30.40	14.71	45.11	54.00	-8.89	AVG	
5		5353.600	41.33	14.71	56.04	74.00	-17.96	peak	
6		5353.600	30.36	14.71	45.07	54.00	-8.93	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

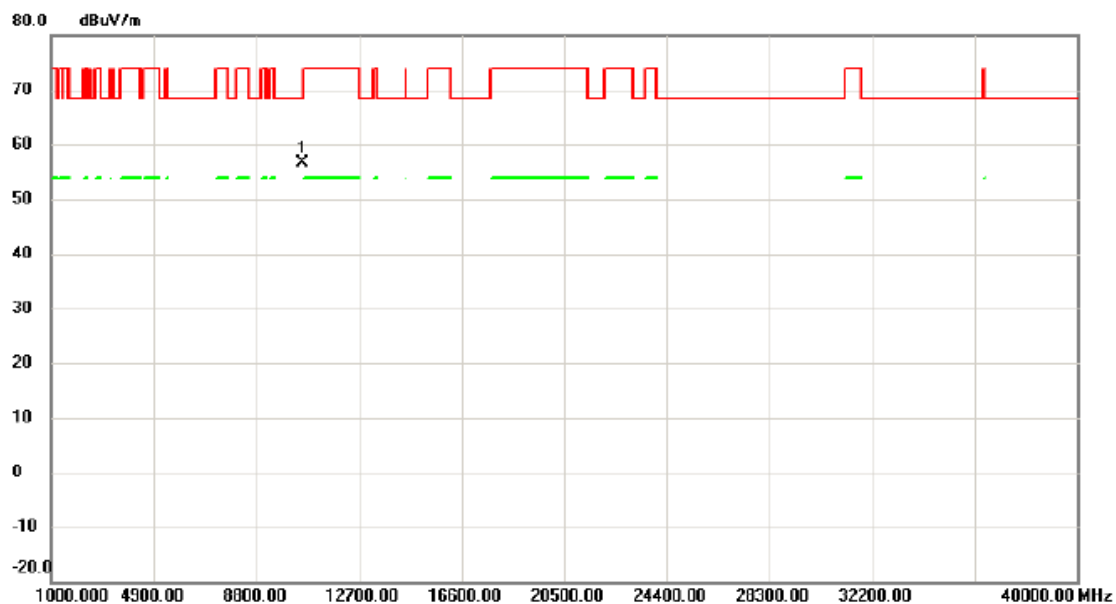

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10521.875	41.99	14.65	56.64	68.30	-11.66	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

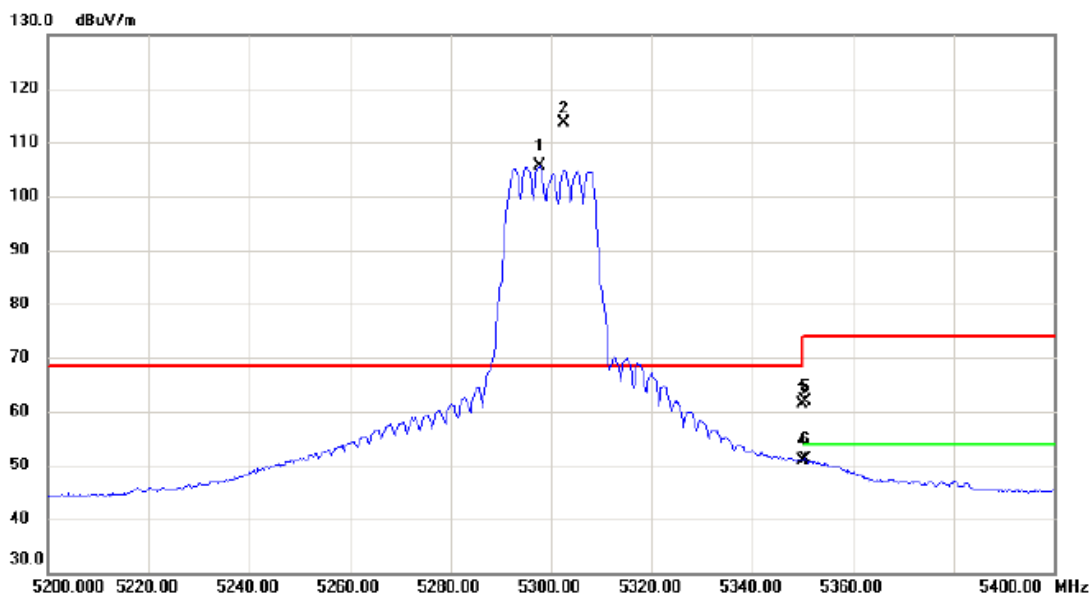

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5297.700	90.97	14.62	105.59	68.30	37.29	AVG	主波訊號不予判定
2	*	5302.600	98.91	14.62	113.53	68.30	45.23	peak	主波訊號不予判定
3		5350.000	46.70	14.71	61.41	74.00	-12.59	peak	
4		5350.000	36.06	14.71	50.77	54.00	-3.23	AVG	
5		5350.600	47.10	14.71	61.81	74.00	-12.19	peak	
6		5350.600	36.54	14.71	51.25	54.00	-2.75	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

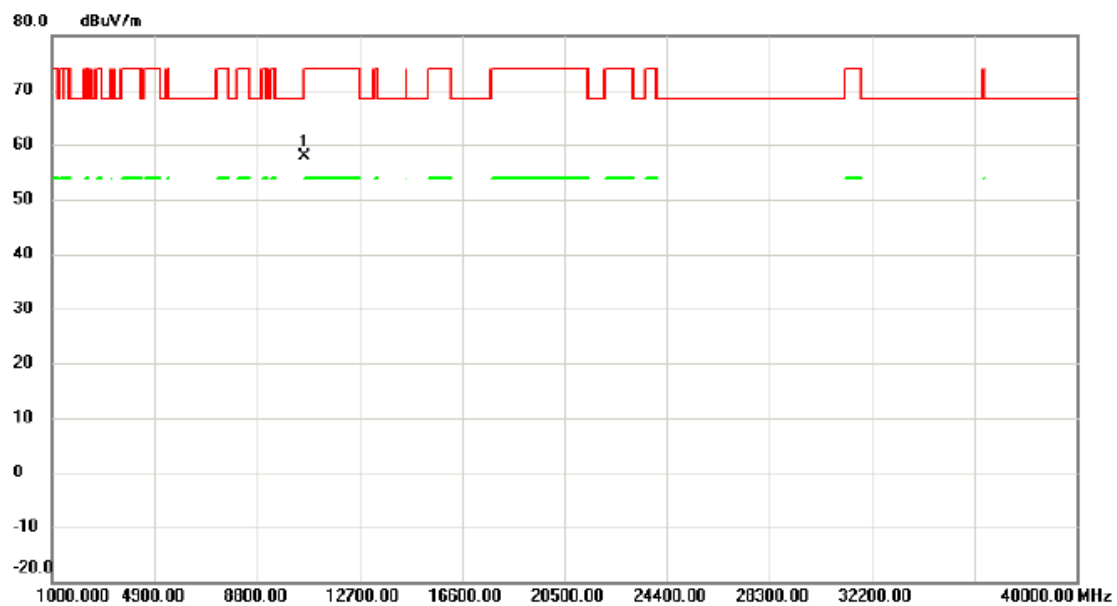


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10599.050	43.06	14.89	57.95	68.30	-10.35	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5300 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

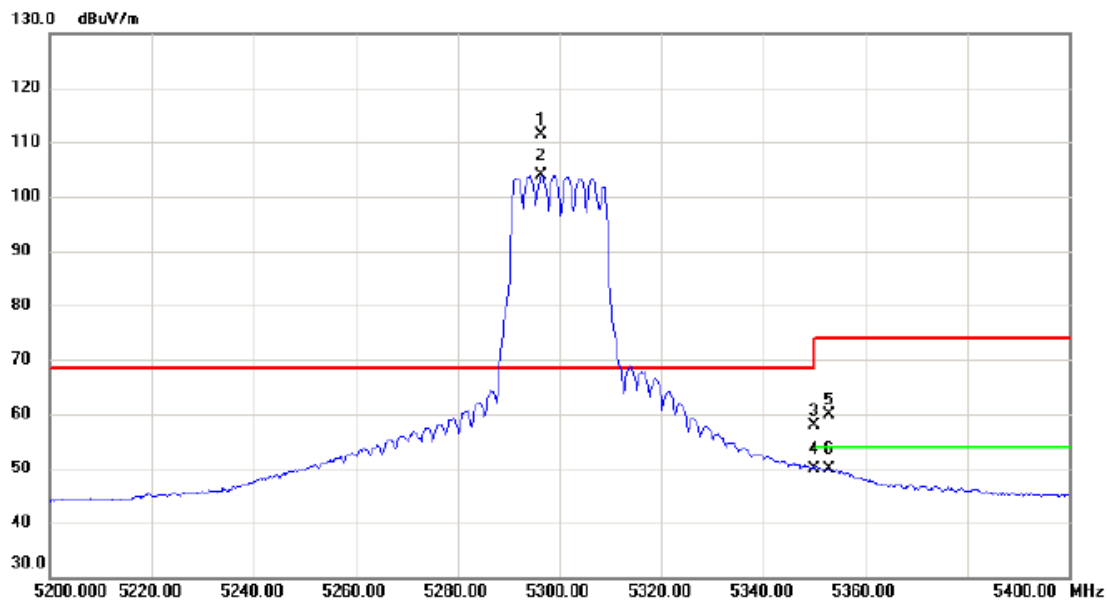

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5296.300	96.79	14.62	111.41	68.30	43.11	peak	主波訊號不予判定
2	X	5296.500	89.19	14.62	103.81	68.30	35.51	AVG	主波訊號不予判定
3		5350.000	43.22	14.71	57.93	74.00	-16.07	peak	
4		5350.000	35.08	14.71	49.79	54.00	-4.21	AVG	
5		5352.800	45.09	14.71	59.80	74.00	-14.20	peak	
6		5352.800	35.22	14.71	49.93	54.00	-4.07	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

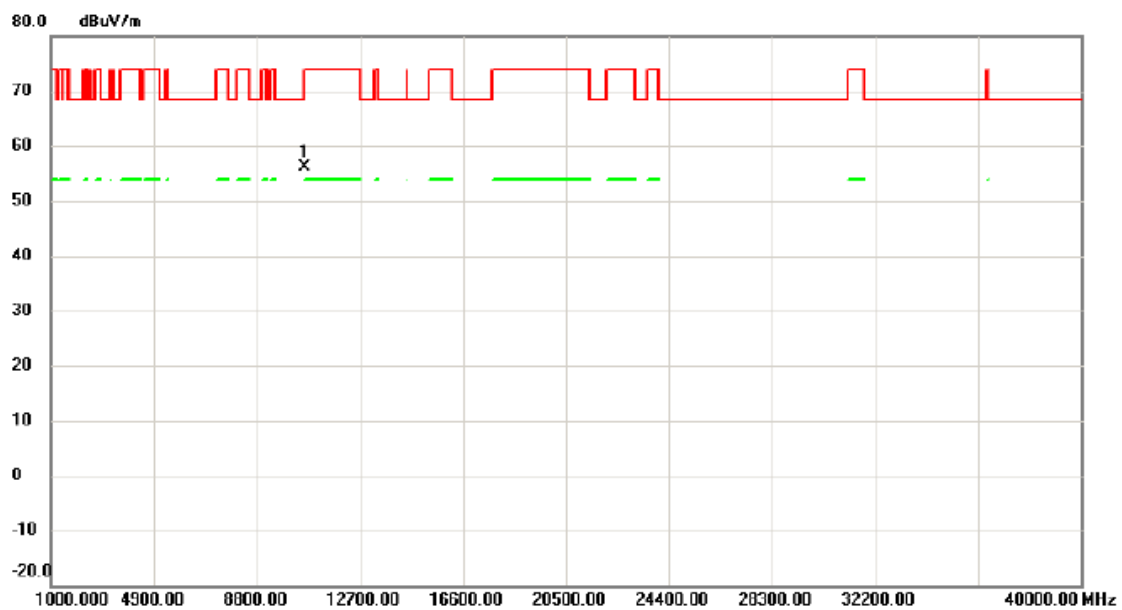

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10594.175	41.32	14.87	56.19	68.30	-12.11	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

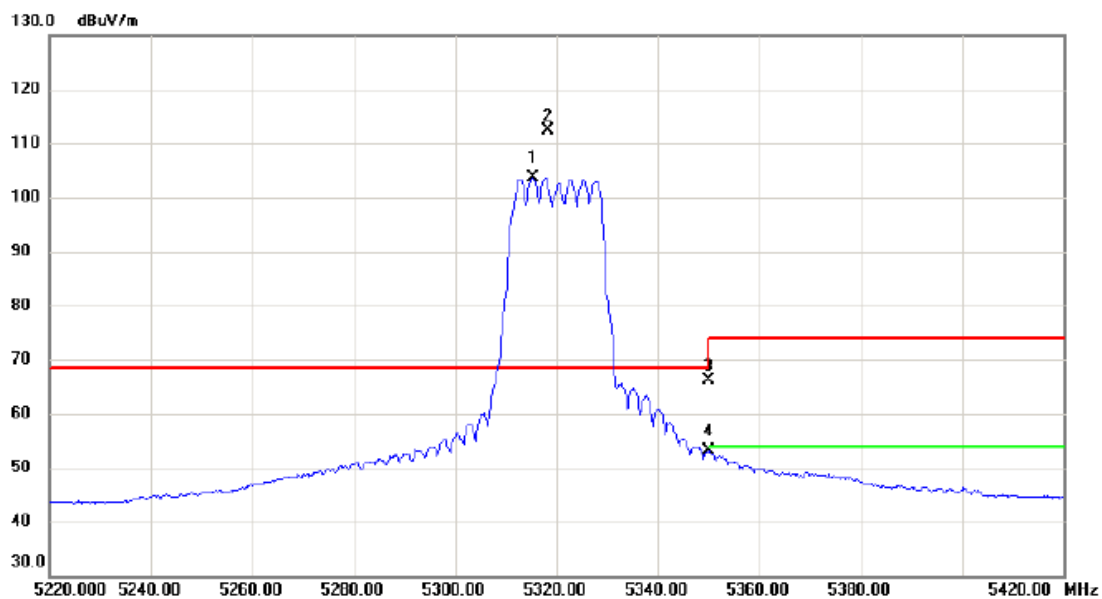


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5315.300	89.00	14.65	103.65	68.30	35.35	AVG	主波訊號不予判定
2	*	5318.300	97.73	14.65	112.38	68.30	44.08	peak	主波訊號不予判定
3		5350.000	51.43	14.71	66.14	74.00	-7.86	peak	
4		5350.000	38.35	14.71	53.06	54.00	-0.94	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5320 MHz	測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna	測試距離: 3 米
檢測器: Peak/AV	測試日期: 108/05/20
環境溫度: 24 °C	環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

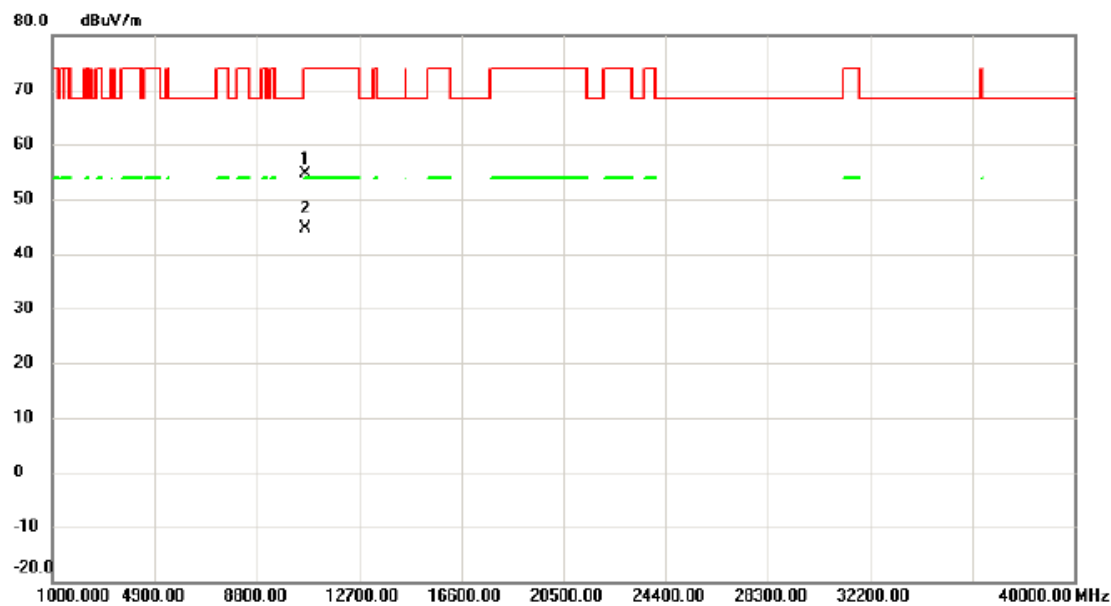

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10641.625	39.56	15.01	54.57	74.00	-19.43	peak	
2	*	10641.825	29.56	15.01	44.57	54.00	-9.43	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

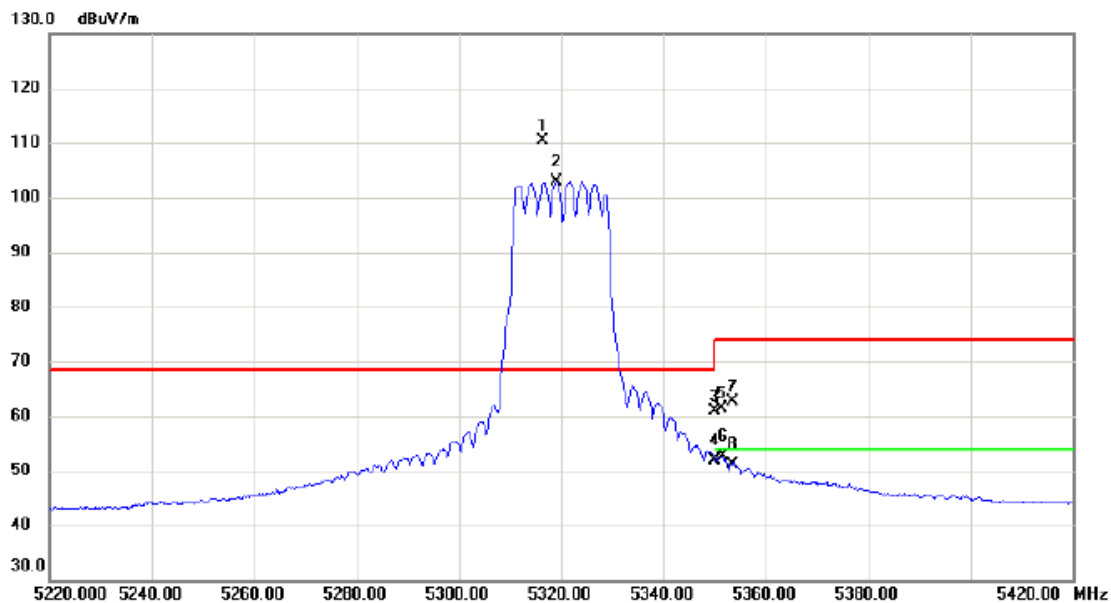


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5316.500	95.85	14.65	110.50	68.30	42.20	peak	主波訊號不予判定
2	X	5319.100	88.15	14.66	102.81	68.30	34.51	AVG	主波訊號不予判定
3		5350.000	46.22	14.71	60.93	74.00	-13.07	peak	
4		5350.000	37.20	14.71	51.91	54.00	-2.09	AVG	
5		5351.400	46.73	14.71	61.44	74.00	-12.56	peak	
6		5351.600	37.85	14.71	52.56	54.00	-1.44	AVG	
7		5353.400	48.04	14.71	62.75	74.00	-11.25	peak	
8		5353.400	36.48	14.71	51.19	54.00	-2.81	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/20
 環境濕度: 52%

Orthogonal Axis: X Polarization: Horizontal

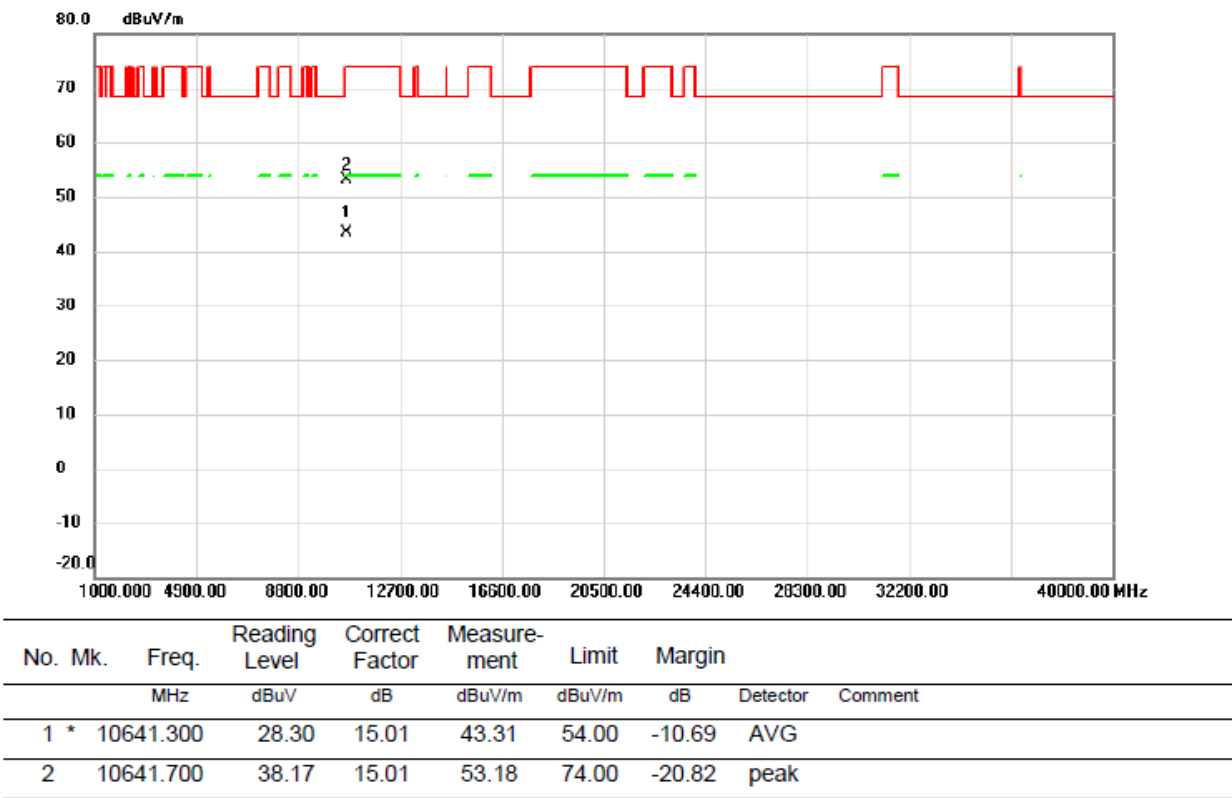

測試頻道: IEEE 802.11ac (VHT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/13

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

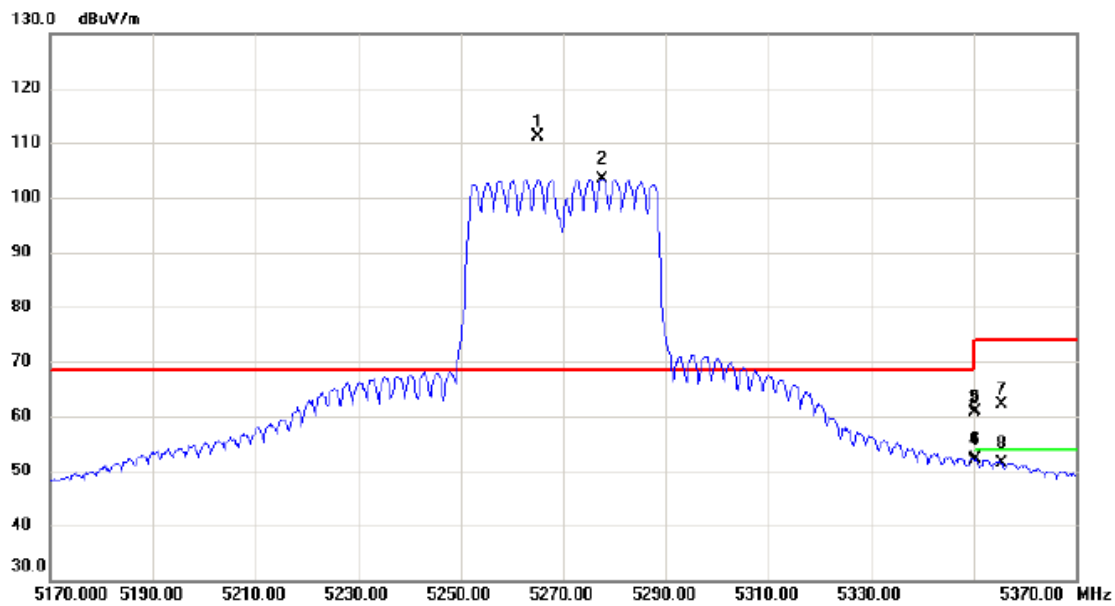


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5265.000	96.53	14.56	111.09	68.30	42.79	peak	主波訊號不予判定
2	X	5277.700	88.88	14.59	103.47	68.30	35.17	AVG	主波訊號不予判定
3		5350.000	45.99	14.71	60.70	74.00	-13.30	peak	
4		5350.000	37.25	14.71	51.96	54.00	-2.04	AVG	
5		5350.500	46.11	14.71	60.82	74.00	-13.18	peak	
6		5350.500	37.31	14.71	52.02	54.00	-1.98	AVG	
7		5355.400	47.53	14.72	62.25	74.00	-11.75	peak	
8		5355.400	36.61	14.72	51.33	54.00	-2.67	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
 5270 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/05/20
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

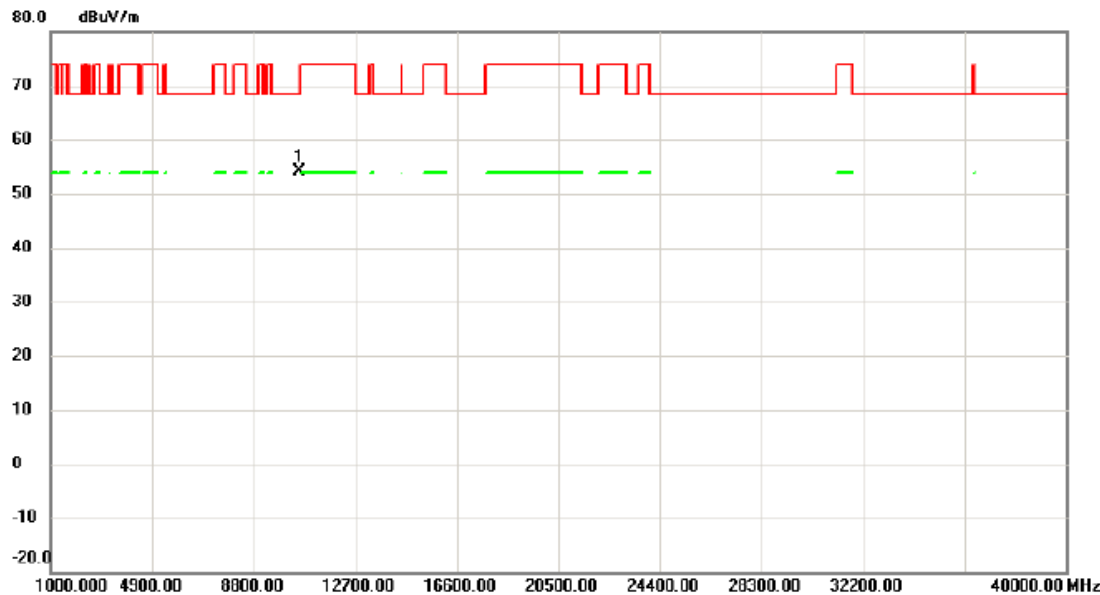

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10541.800	39.52	14.71	54.23	68.30	-14.07	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5270 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

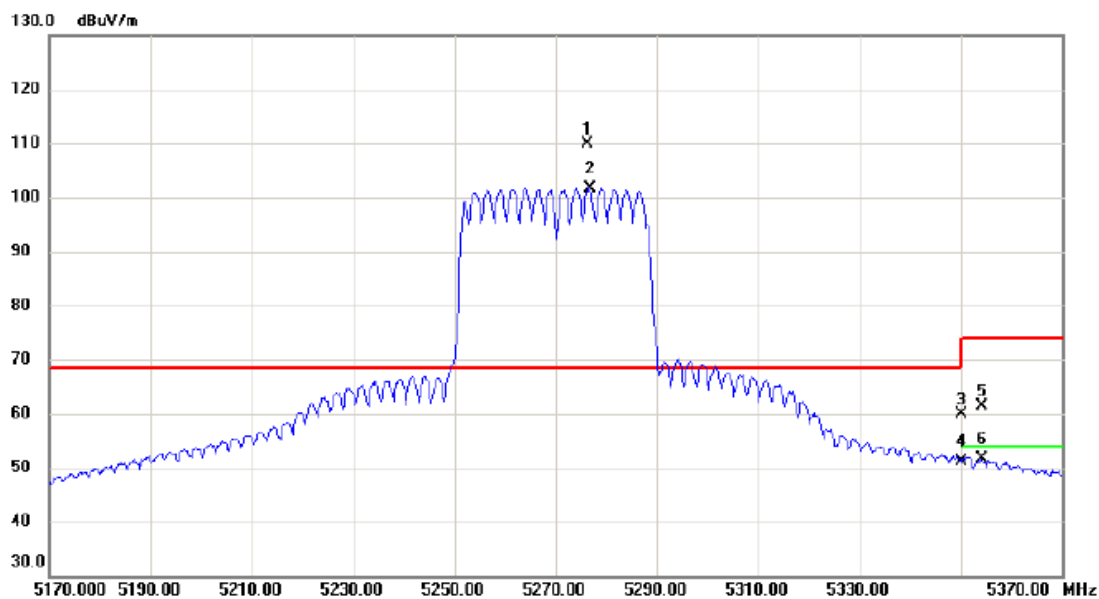

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5276.400	95.17	14.59	109.76	68.30	41.46	peak	主波訊號不予判定
2	X	5276.700	87.01	14.59	101.60	68.30	33.30	AVG	主波訊號不予判定
3		5350.000	45.28	14.71	59.99	74.00	-14.01	peak	
4		5350.000	36.37	14.71	51.08	54.00	-2.92	AVG	
5		5354.000	46.69	14.71	61.40	74.00	-12.60	peak	
6		5354.000	36.94	14.71	51.65	54.00	-2.35	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

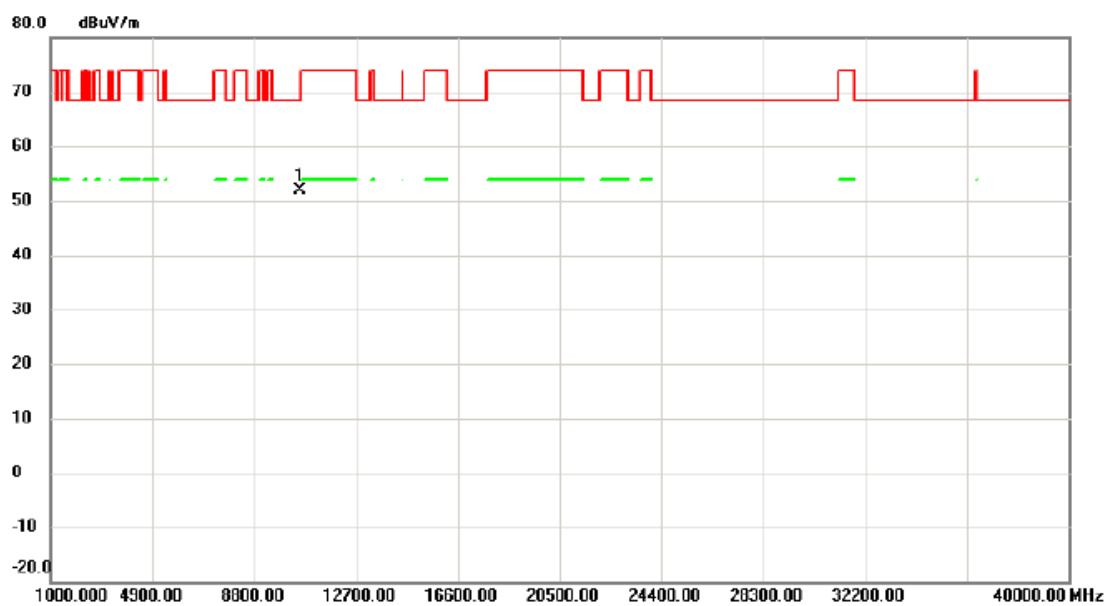

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10539.200	37.13	14.71	51.84	68.30	-16.46	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/13

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

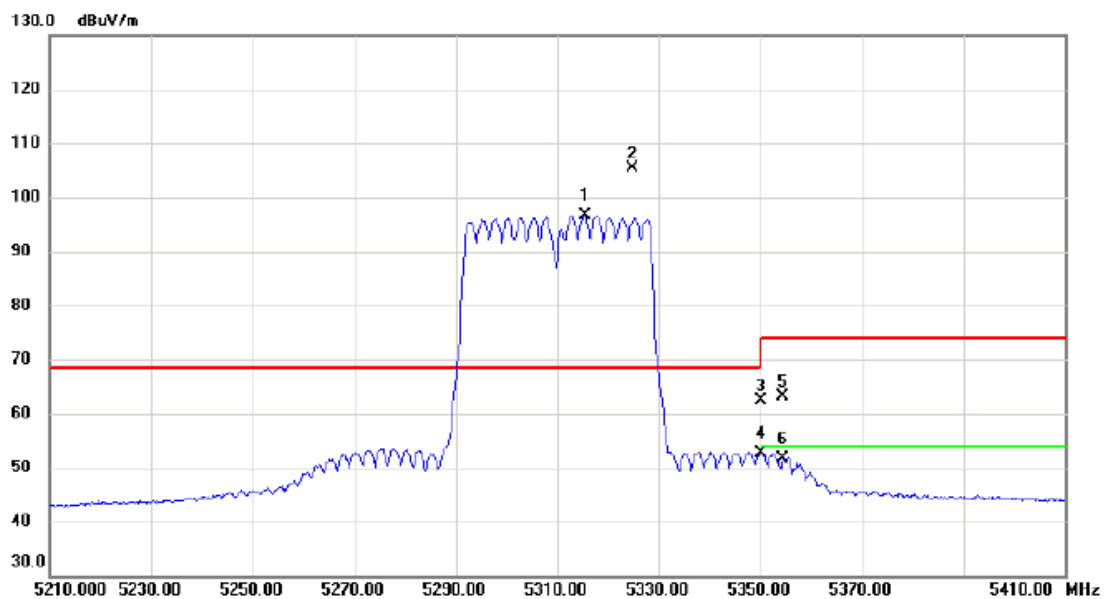

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5315.400	82.05	14.65	96.70	68.30	28.40	AVG	主波訊號不予判定
2	*	5324.900	90.71	14.66	105.37	68.30	37.07	peak	主波訊號不予判定
3		5350.000	47.63	14.71	62.34	74.00	-11.66	peak	
4		5350.000	37.81	14.71	52.52	54.00	-1.48	AVG	
5		5354.400	48.36	14.71	63.07	74.00	-10.93	peak	
6		5354.400	36.96	14.71	51.67	54.00	-2.33	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

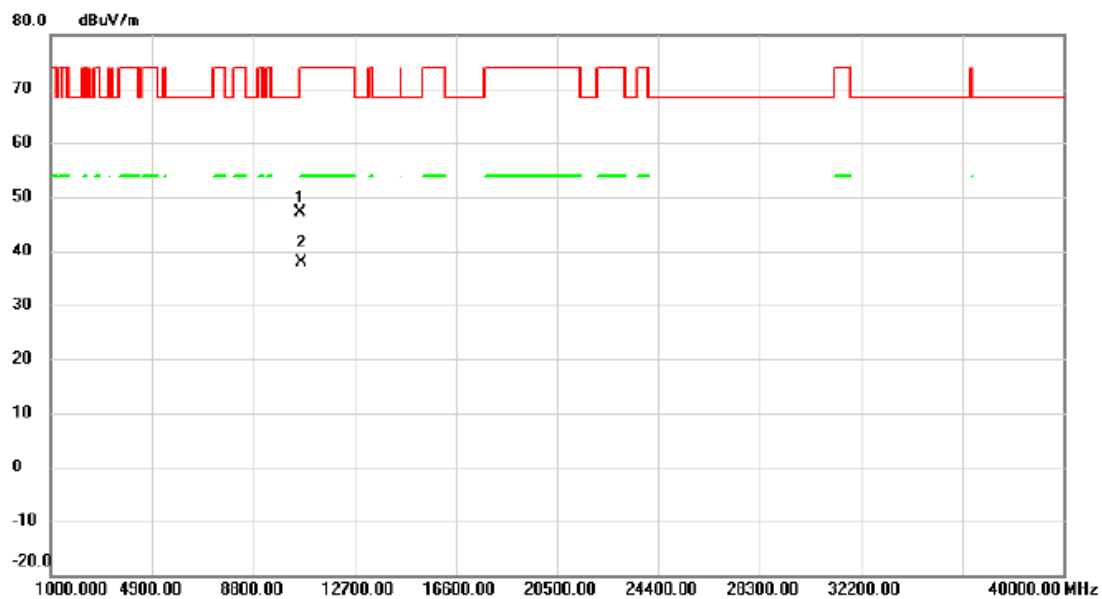


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10616.450	32.30	14.94	47.24	74.00	-26.76	peak	
2 *		10623.950	22.93	14.96	37.89	54.00	-16.11	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5310 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

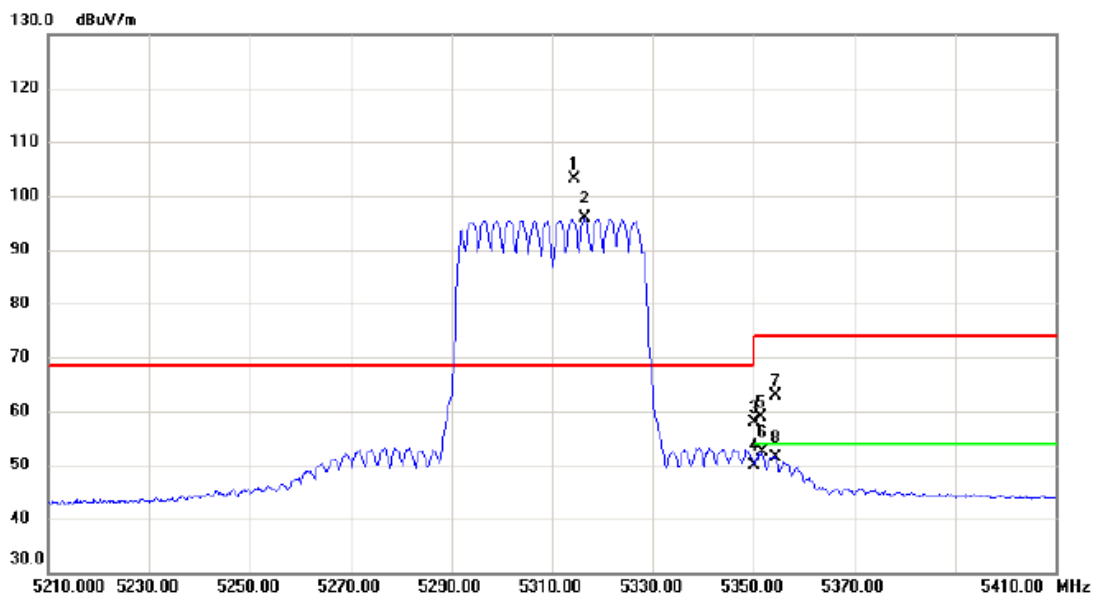

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5314.300	88.47	14.65	103.12	68.30	34.82	peak	主波訊號不予判定
2	X	5316.500	81.14	14.65	95.79	68.30	27.49	AVG	主波訊號不予判定
3		5350.000	43.05	14.71	57.76	74.00	-16.24	peak	
4		5350.000	35.15	14.71	49.86	54.00	-4.14	AVG	
5		5351.500	44.06	14.71	58.77	74.00	-15.23	peak	
6		5351.600	37.55	14.71	52.26	54.00	-1.74	AVG	
7		5354.300	48.23	14.71	62.94	74.00	-11.06	peak	
8		5354.300	36.72	14.71	51.43	54.00	-2.57	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/05/20

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

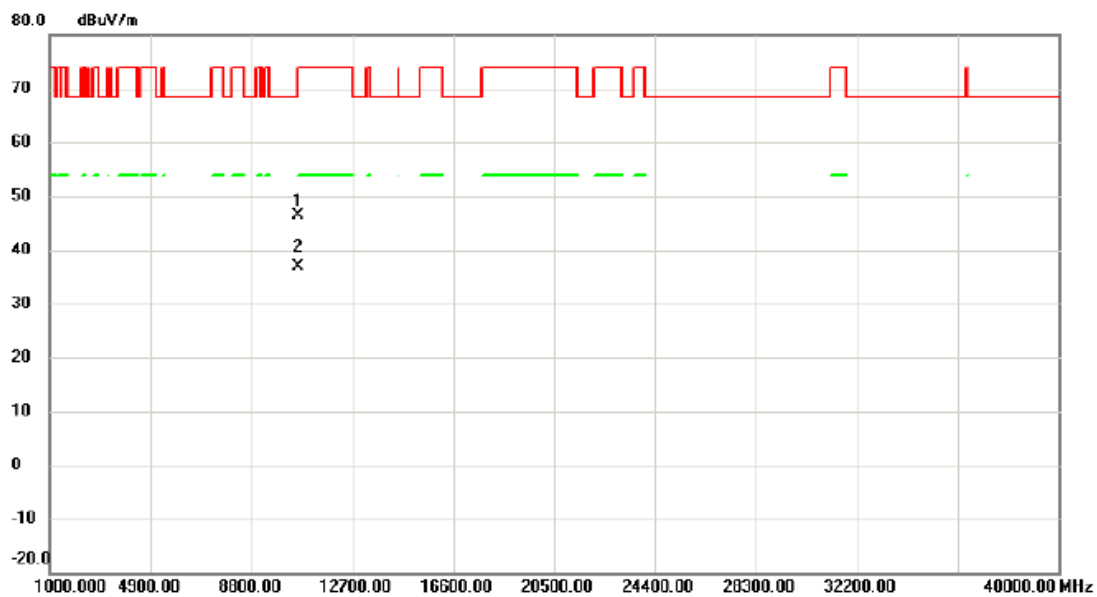


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10611.550	31.49	14.92	46.41	74.00	-27.59	peak	
2	*	10618.900	21.87	14.95	36.82	54.00	-17.18	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5290 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/05/13
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

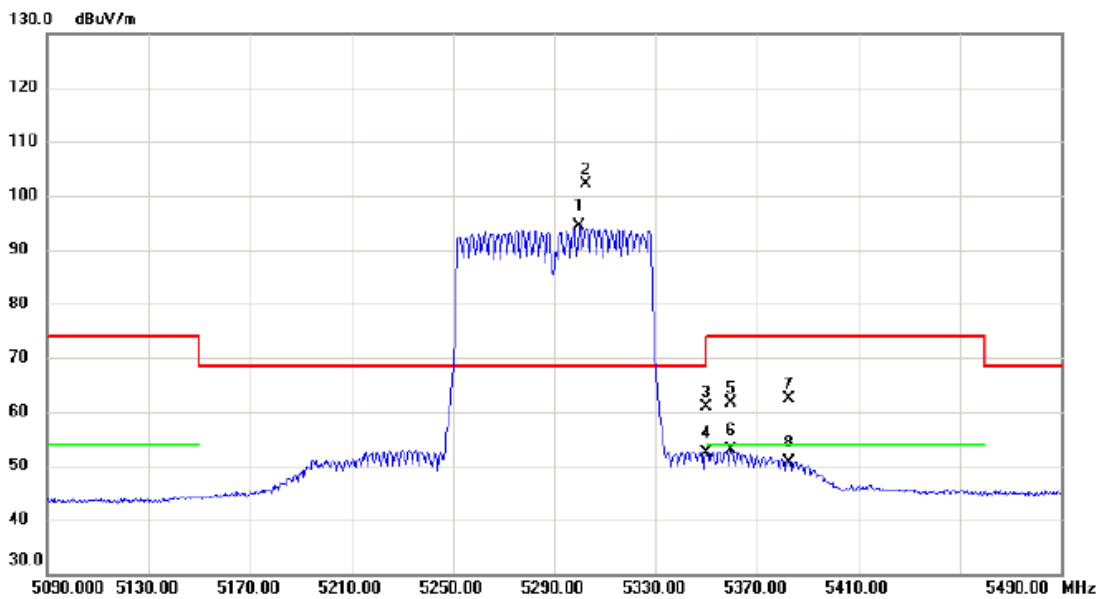

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5300.000	79.64	14.62	94.26	68.30	25.96	AVG	主波訊號不予判定
2	*	5302.600	87.56	14.62	102.18	68.30	33.88	peak	主波訊號不予判定
3		5350.000	46.08	14.71	60.79	74.00	-13.21	peak	
4		5350.000	37.74	14.71	52.45	54.00	-1.55	AVG	
5		5359.800	46.92	14.74	61.66	74.00	-12.34	peak	
6		5359.800	38.17	14.74	52.91	54.00	-1.09	AVG	
7		5382.400	47.65	14.78	62.43	74.00	-11.57	peak	
8		5382.400	35.91	14.78	50.69	54.00	-3.31	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5290 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/05/20

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

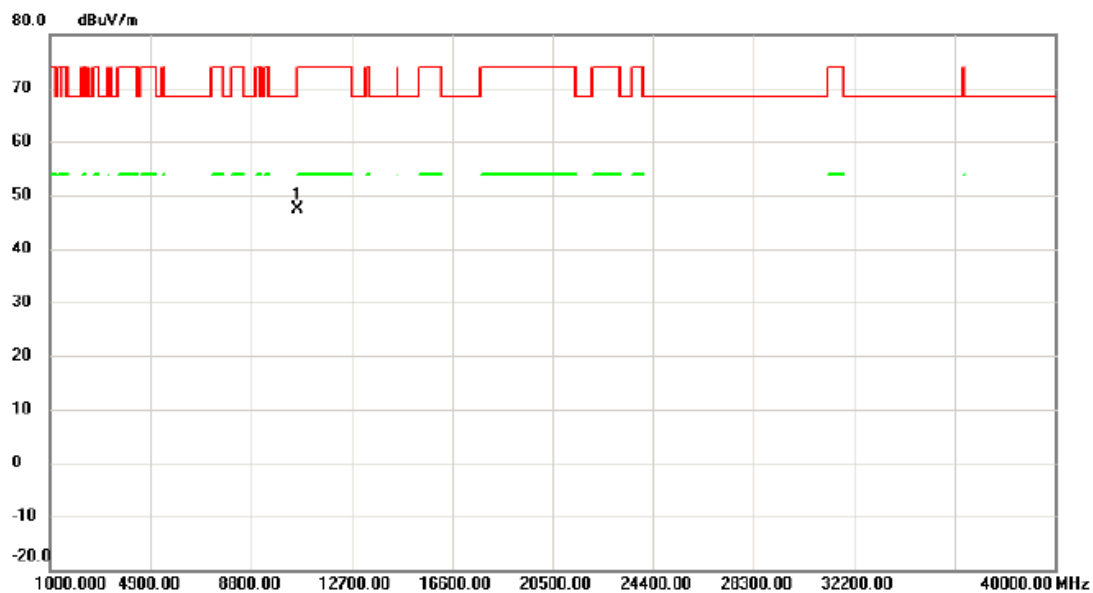

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10587.130	32.53	14.85	47.38	68.30	-20.92	peak	