Site: AC1	Time: 2018/02/27 - 08:28
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

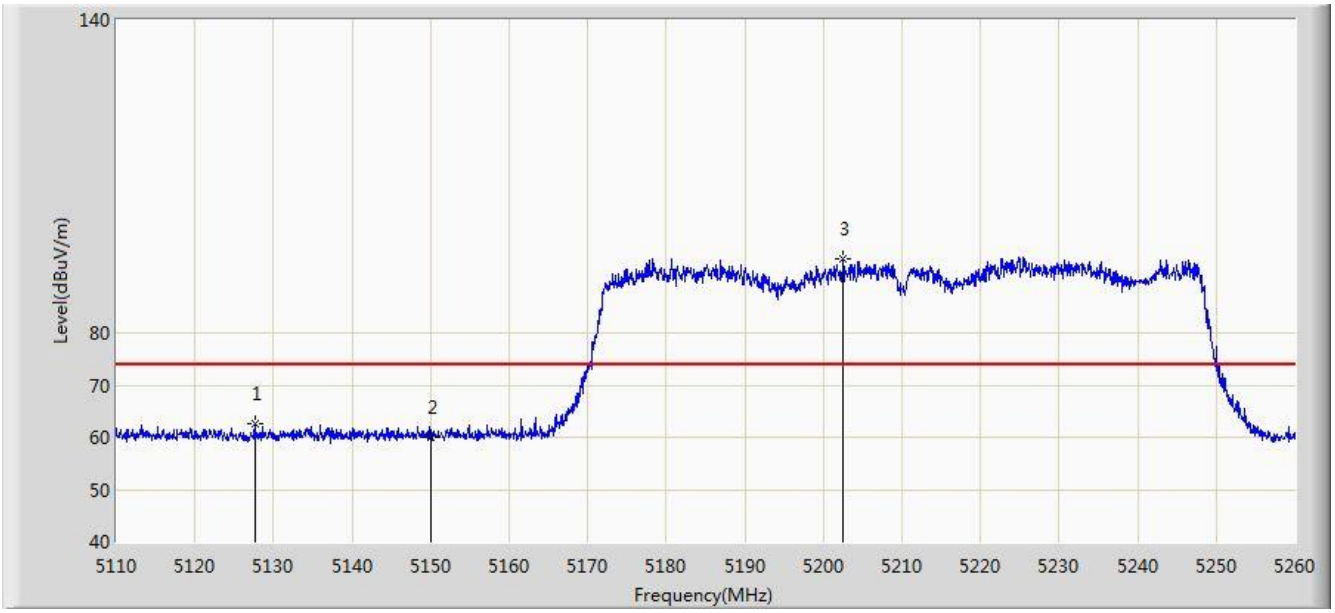

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.625	62.594	58.419	-11.406	74.000	4.175	PK
2			5150.000	59.957	55.788	-14.043	74.000	4.170	PK
3			5202.550	94.099	90.108	N/A	N/A	3.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 08:30
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.803	44.634	-5.197	54.000	4.170	AV
2			5224.975	85.258	81.334	N/A	N/A	3.924	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 08:27
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

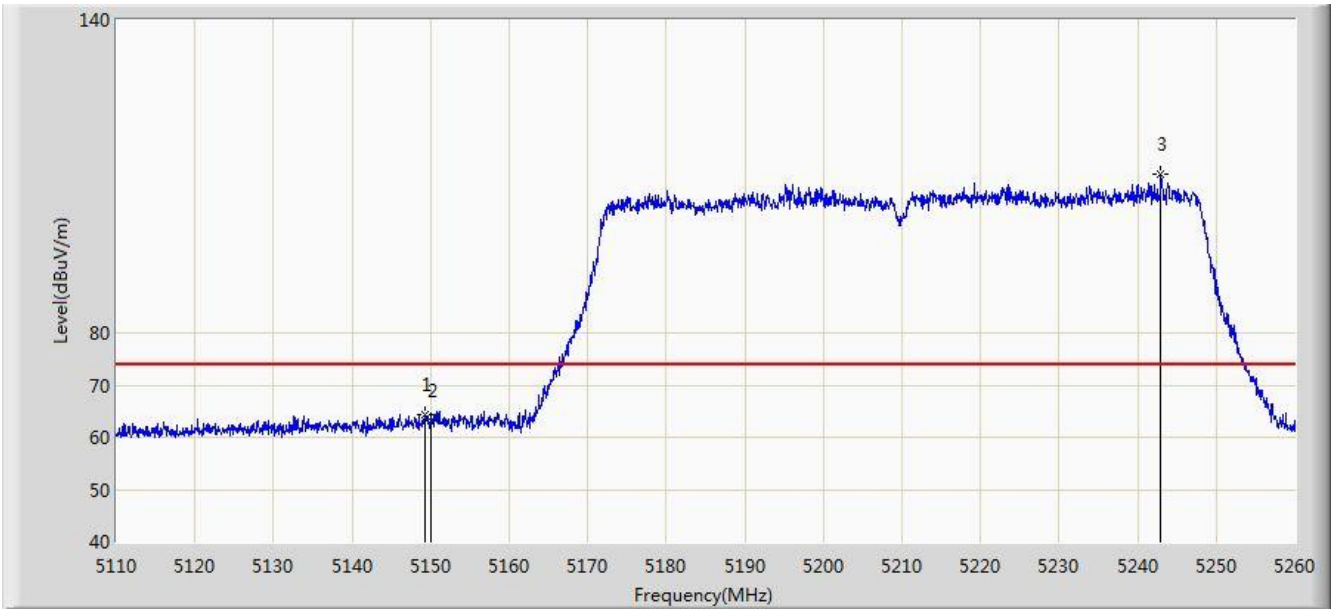

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.225	64.389	60.217	-9.611	74.000	4.172	PK
2			5150.000	63.182	59.013	-10.818	74.000	4.170	PK
3			5242.975	110.570	106.699	N/A	N/A	3.871	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 08:25
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

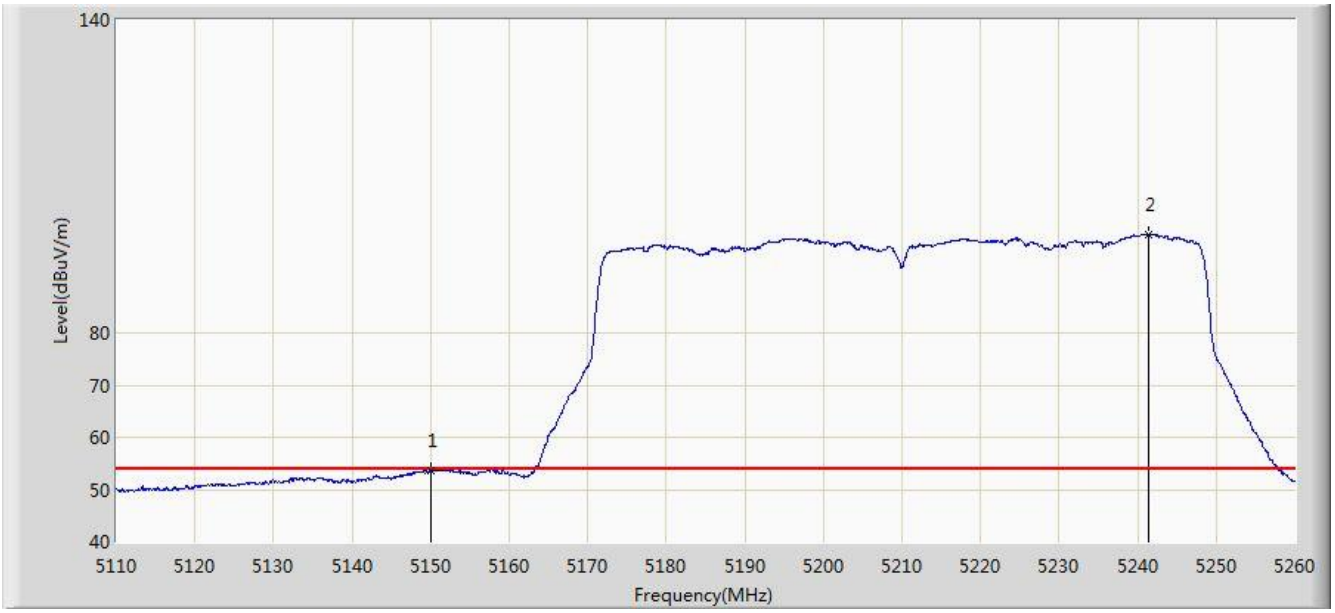

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.480	49.311	-0.520	54.000	4.170	AV
2			5241.475	98.876	95.000	N/A	N/A	3.876	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:38
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

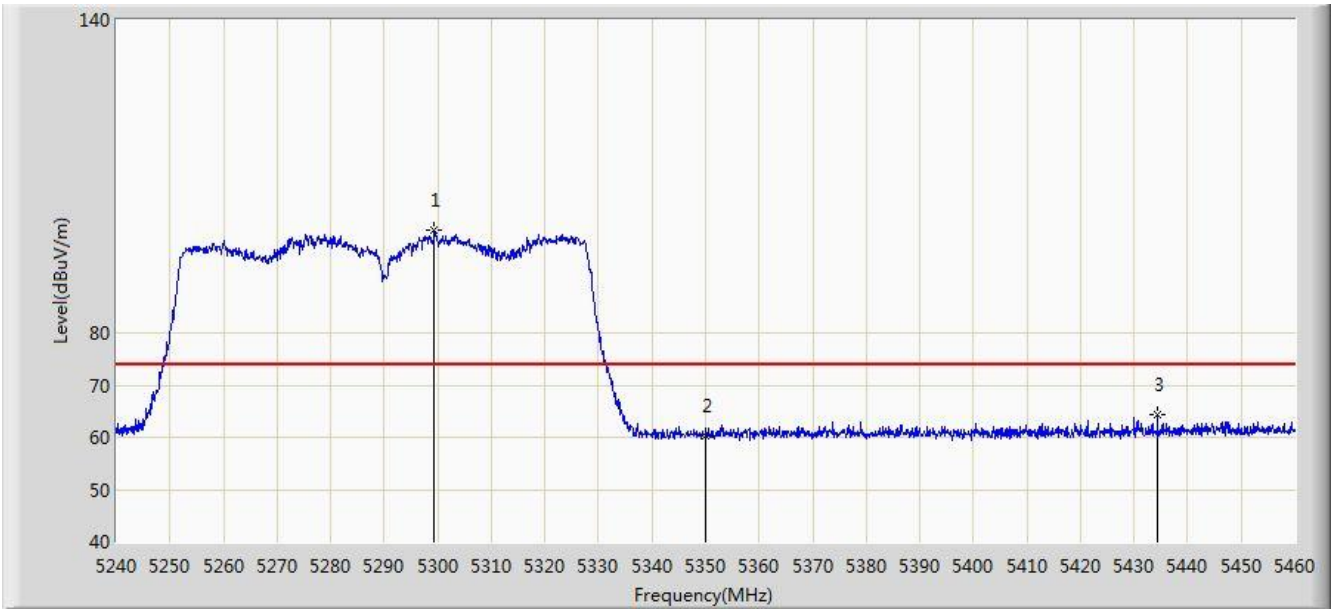

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5299.400	99.676	95.862	N/A	N/A	3.814	PK
2			5350.000	60.274	56.369	-13.726	74.000	3.904	PK
3			5434.370	64.380	60.273	-9.620	74.000	4.108	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:40
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

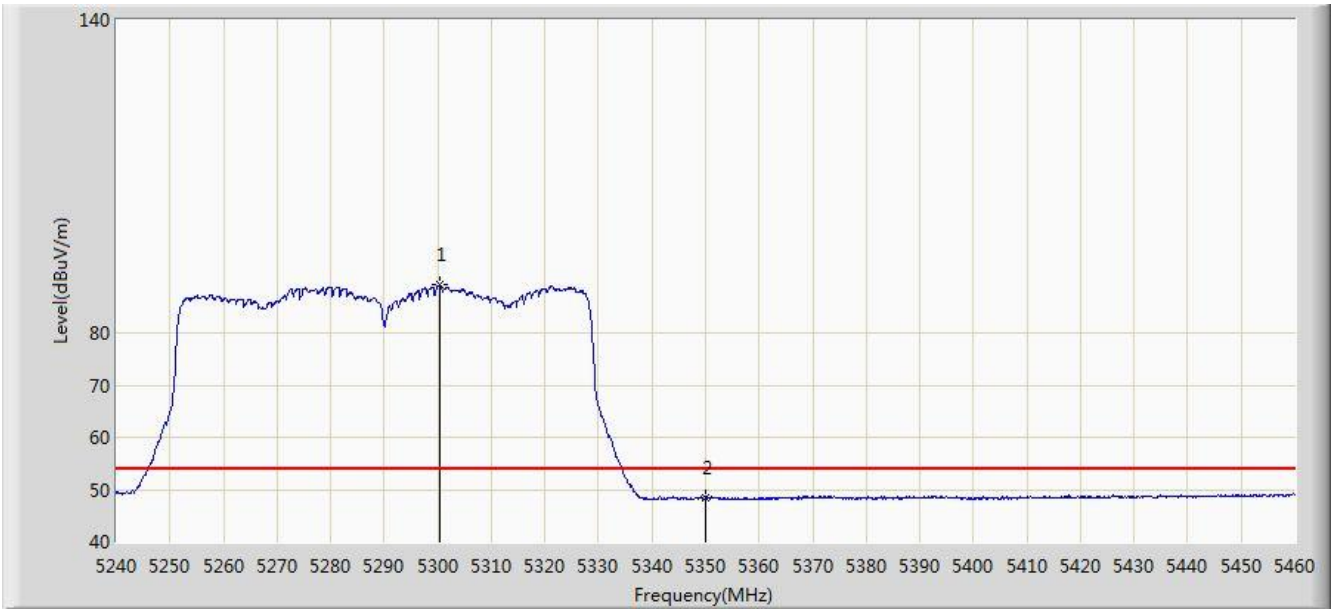

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5300.390	89.153	85.340	N/A	N/A	3.813	AV
2			5350.000	48.363	44.458	-5.637	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:37
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

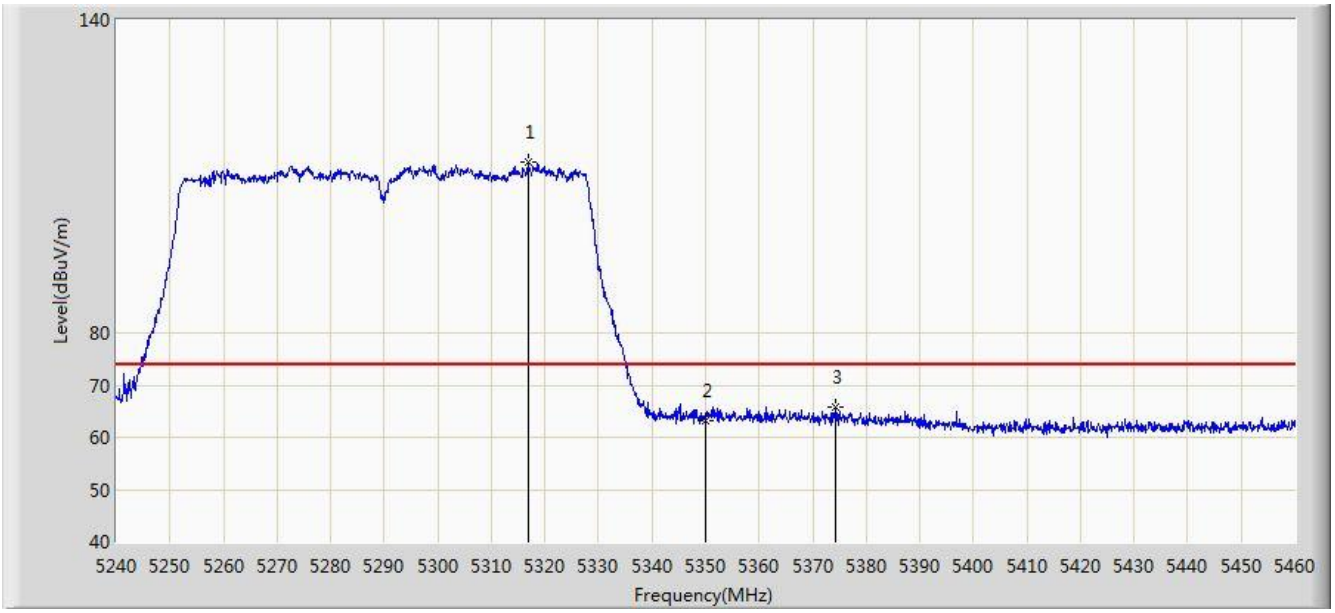

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5316.780	112.798	108.956	N/A	N/A	3.843	PK
2			5350.000	63.122	59.217	-10.878	74.000	3.904	PK
3			5374.200	65.765	61.816	-8.235	74.000	3.948	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:35
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5290MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

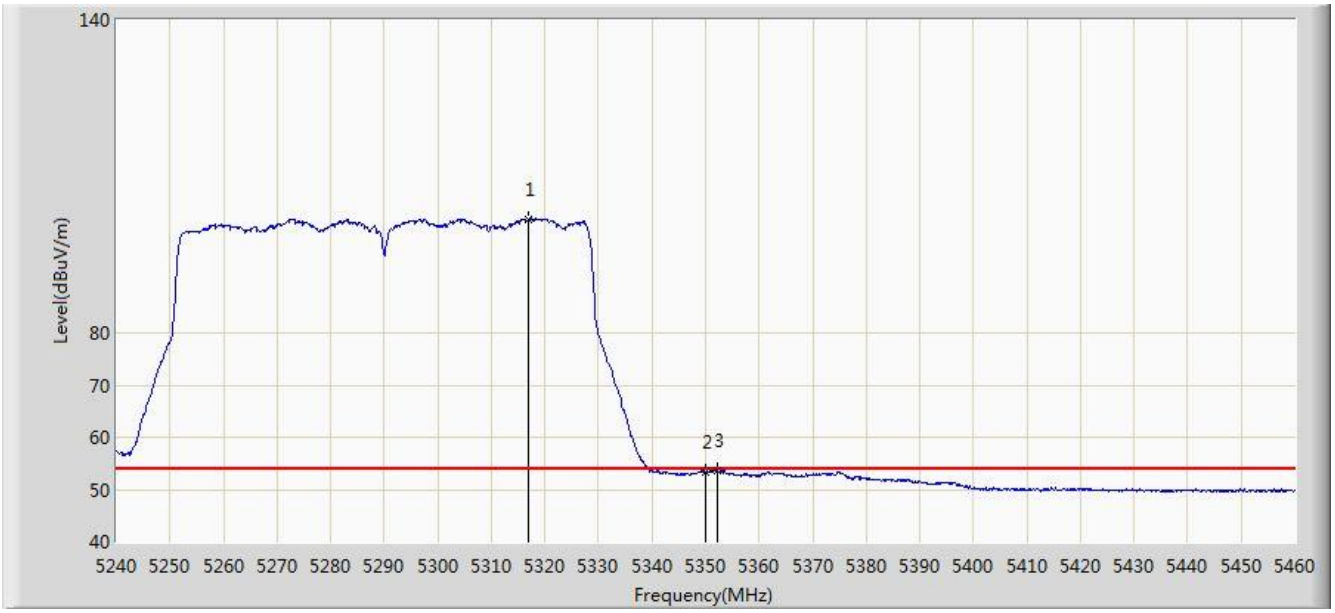

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5316.890	101.765	97.922	N/A	N/A	3.842	AV
2			5350.000	53.451	49.546	-0.549	54.000	3.904	AV
3			5352.090	53.614	49.705	-0.386	54.000	3.908	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:47
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

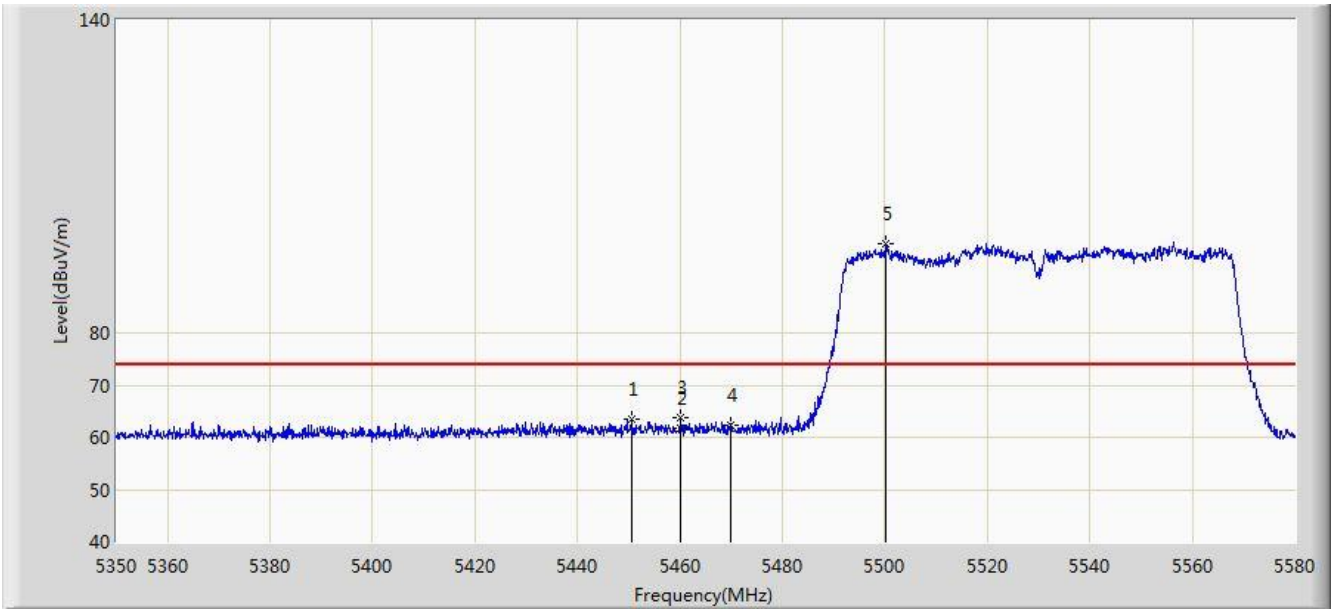

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.510	63.378	59.222	-10.622	74.000	4.157	PK
2			5460.000	61.795	57.615	-12.205	74.000	4.180	PK
3			5460.170	63.736	59.555	-4.464	68.200	4.180	PK
4			5470.000	62.259	58.057	-5.941	68.200	4.202	PK
5			5500.190	96.998	92.725	N/A	N/A	4.272	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:49
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

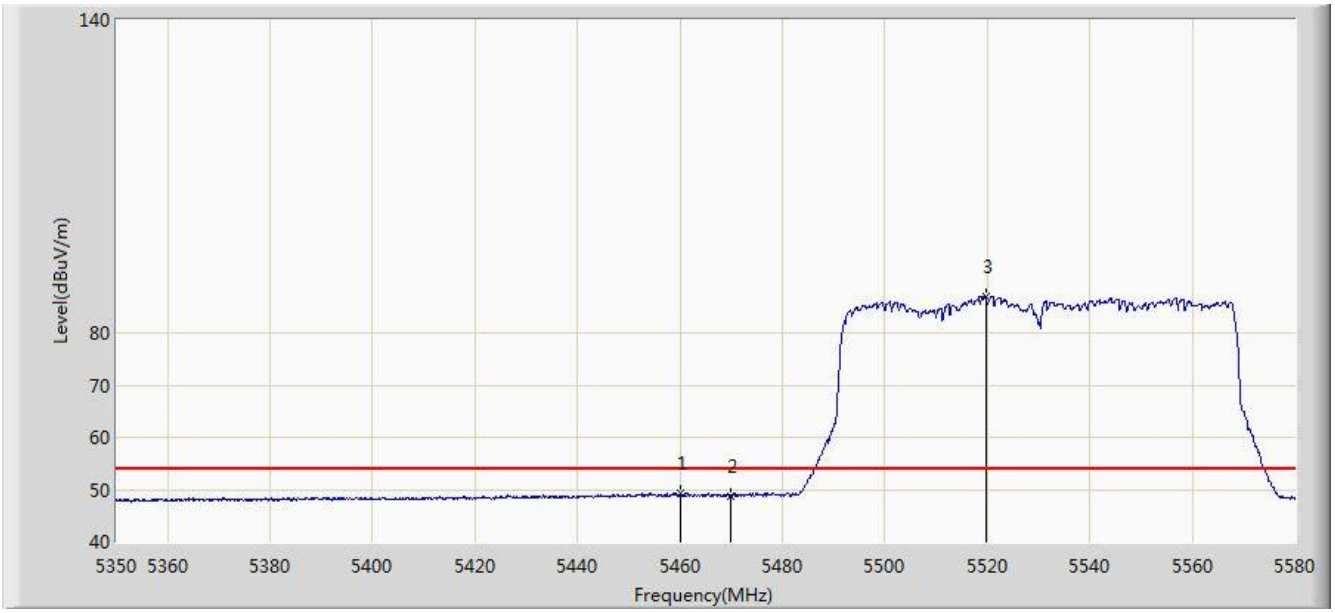

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.133	44.953	-4.867	54.000	4.180	AV
2			5470.000	48.822	44.620	N/A	N/A	4.202	AV
3			5519.740	86.840	82.510	N/A	N/A	4.331	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:46
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

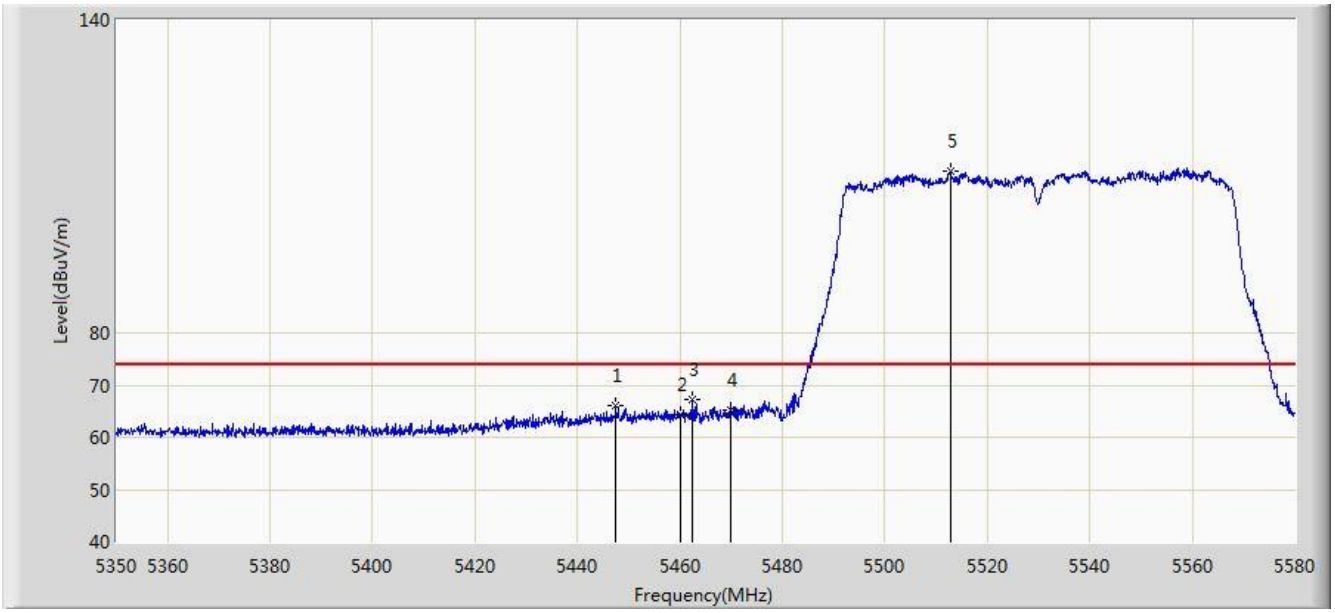

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.405	66.123	61.976	-7.877	74.000	4.146	PK
2			5460.000	64.318	60.138	-9.682	74.000	4.180	PK
3			5462.355	67.351	63.166	-0.849	68.200	4.185	PK
4			5470.000	65.235	61.033	-2.965	68.200	4.202	PK
5			5512.840	110.978	106.668	N/A	N/A	4.310	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:45
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

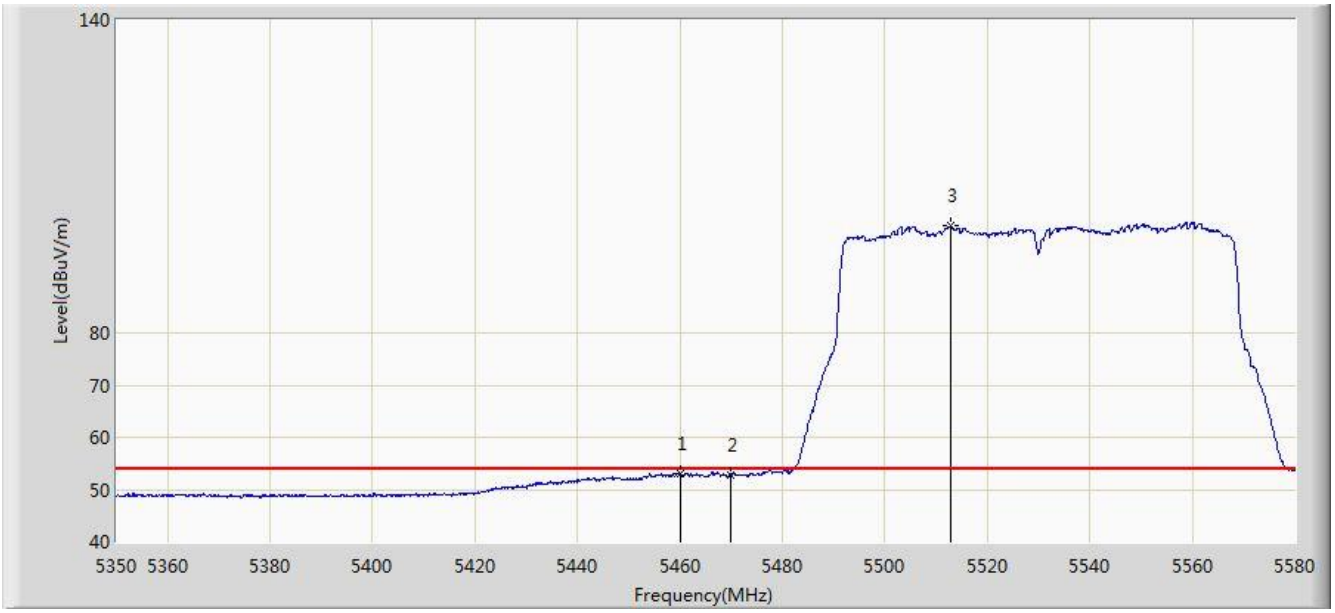

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	53.183	49.003	-0.817	54.000	4.180	AV
2			5470.000	52.774	48.572	N/A	N/A	4.202	AV
3			5512.955	100.481	96.171	N/A	N/A	4.310	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:54
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

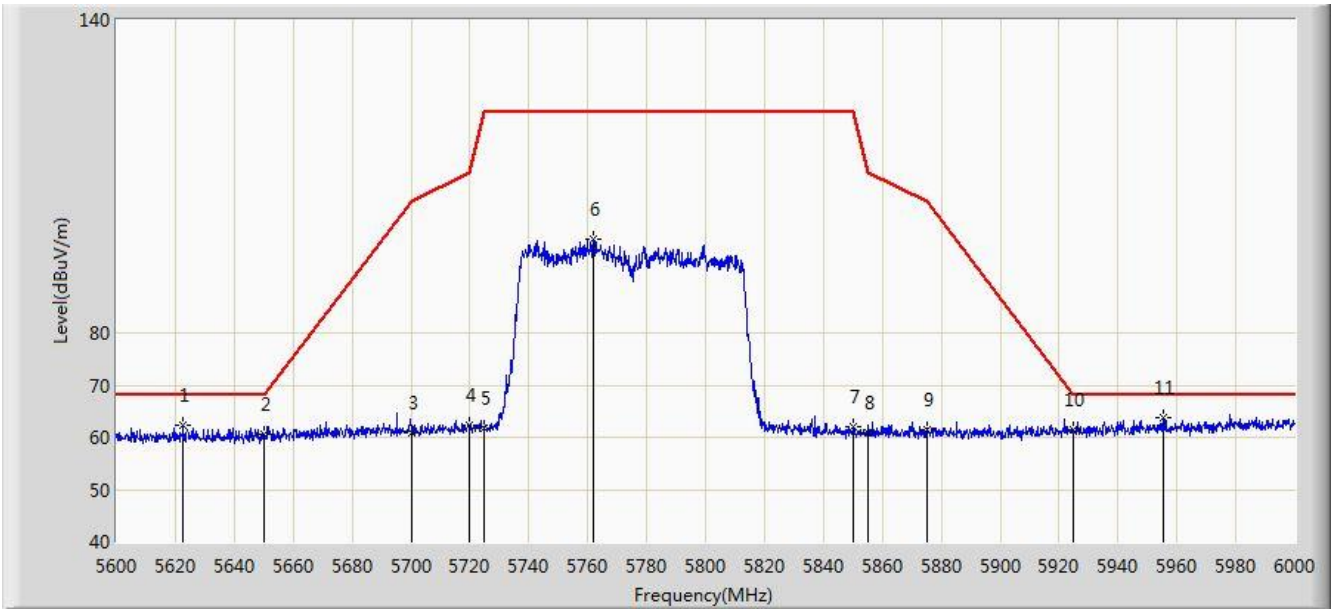

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5622.800	62.282	57.693	-5.918	68.200	4.589	PK
2			5650.000	60.484	55.813	-7.716	68.200	4.671	PK
3			5700.000	60.820	55.942	-44.380	105.200	4.878	PK
4			5720.000	62.370	57.373	-48.430	110.800	4.997	PK
5			5725.000	61.634	56.605	-60.566	122.200	5.029	PK
6			5761.800	97.958	92.709	N/A	N/A	5.249	PK
7			5850.000	62.062	56.336	-60.138	122.200	5.726	PK
8			5855.000	60.772	55.026	-50.028	110.800	5.746	PK
9			5875.000	61.442	55.622	-43.758	105.200	5.820	PK
10			5925.000	61.370	55.404	-6.830	68.200	5.967	PK
11			5955.200	63.762	57.727	-4.438	68.200	6.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/28 - 22:53
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

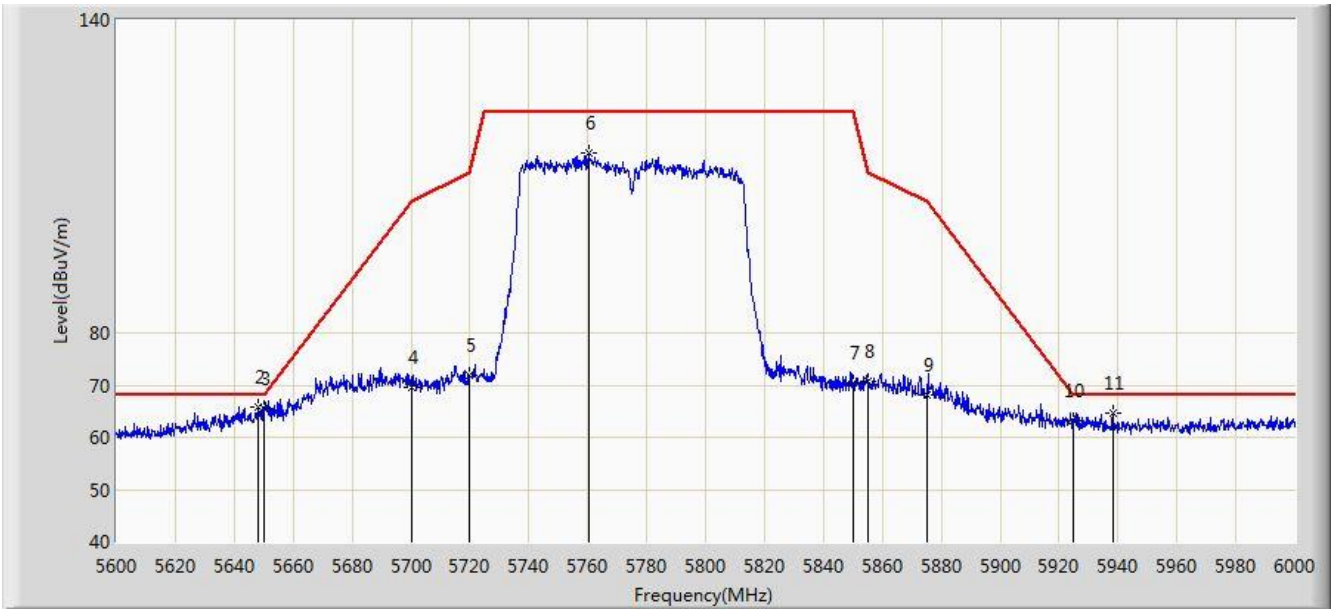

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			725.000	60.451	68.446	NaN	NaN	-7.995	PK
2			5648.200	65.853	61.188	-2.347	68.200	4.665	PK
3			5650.000	65.475	60.804	-2.725	68.200	4.671	PK
4			5700.000	69.629	64.751	-35.571	105.200	4.878	PK
5			5720.000	71.981	66.984	-38.819	110.800	4.997	PK
6			5760.400	114.370	109.128	N/A	N/A	5.242	PK
7			5850.000	70.505	64.779	-51.695	122.200	5.726	PK
8			5855.000	70.779	65.033	-40.021	110.800	5.746	PK
9			5875.000	68.064	62.244	-37.136	105.200	5.820	PK
10			5925.000	63.204	57.238	-4.996	68.200	5.967	PK
11			5938.200	64.693	58.694	-3.507	68.200	5.998	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 06:19
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

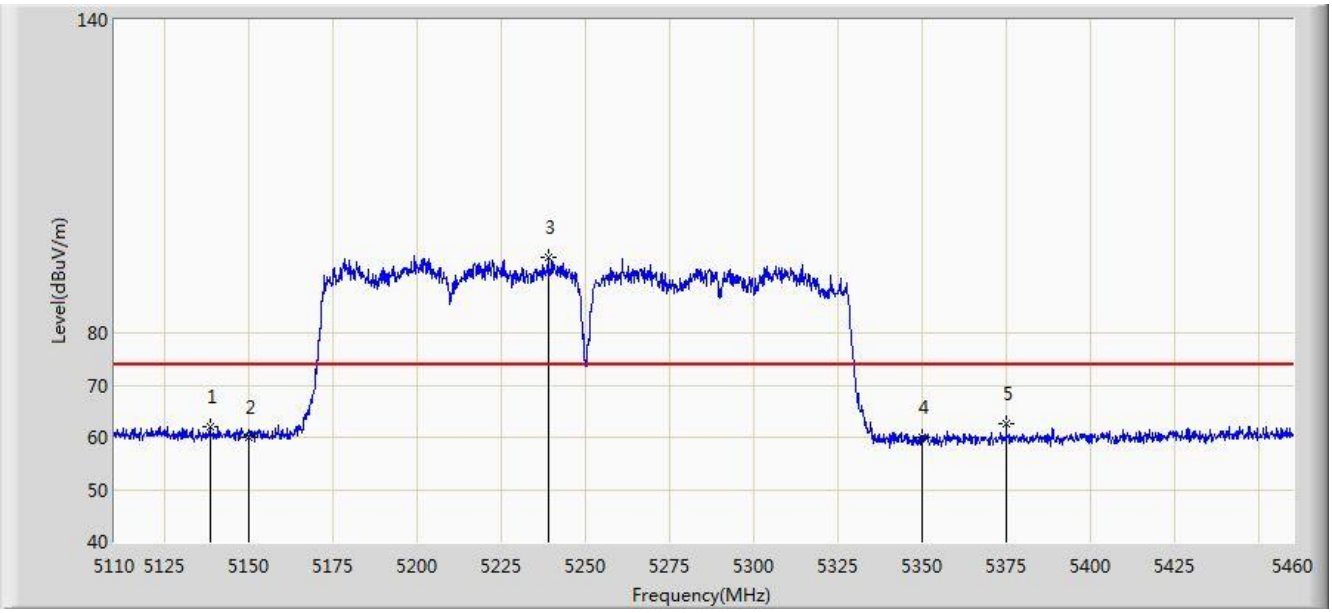

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.525	62.159	57.984	-11.841	74.000	4.175	PK
2			5150.000	60.071	55.902	-13.929	74.000	4.170	PK
3			5238.800	94.577	90.694	N/A	N/A	3.884	PK
4			5350.000	60.045	56.140	-13.955	74.000	3.904	PK
5			5374.950	62.586	58.636	-11.414	74.000	3.950	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 06:21
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

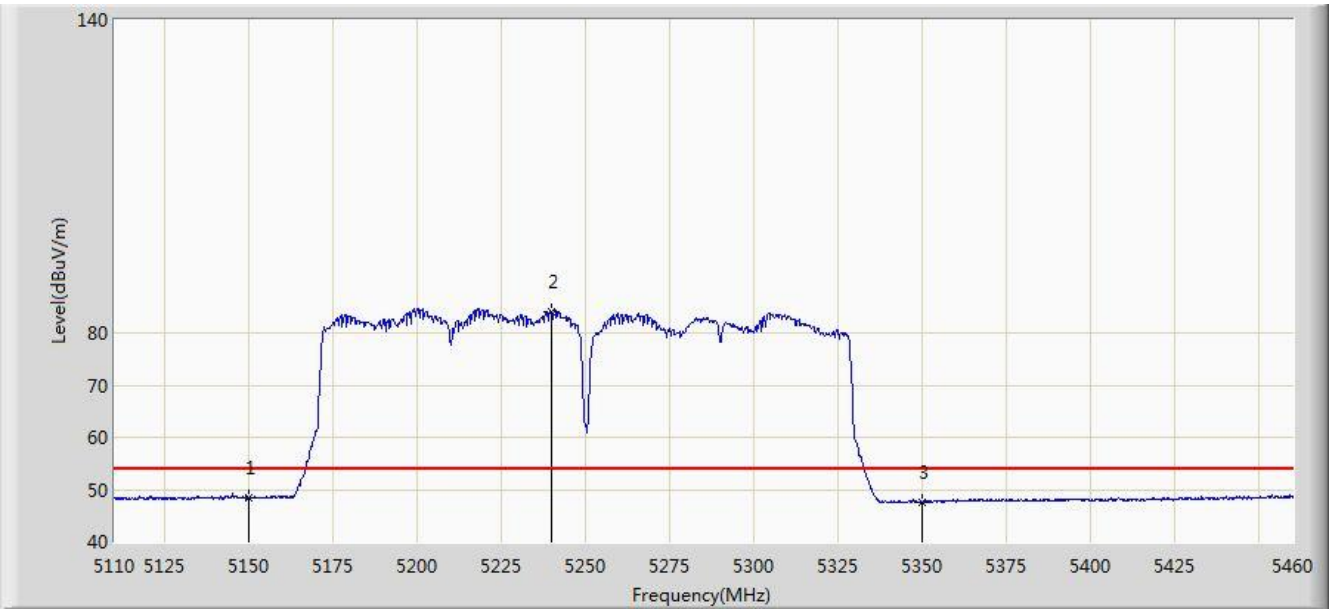

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.409	44.240	-5.591	54.000	4.170	AV
2			5239.850	84.120	80.240	N/A	N/A	3.880	AV
3			5350.000	47.635	43.730	-6.365	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 06:18
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

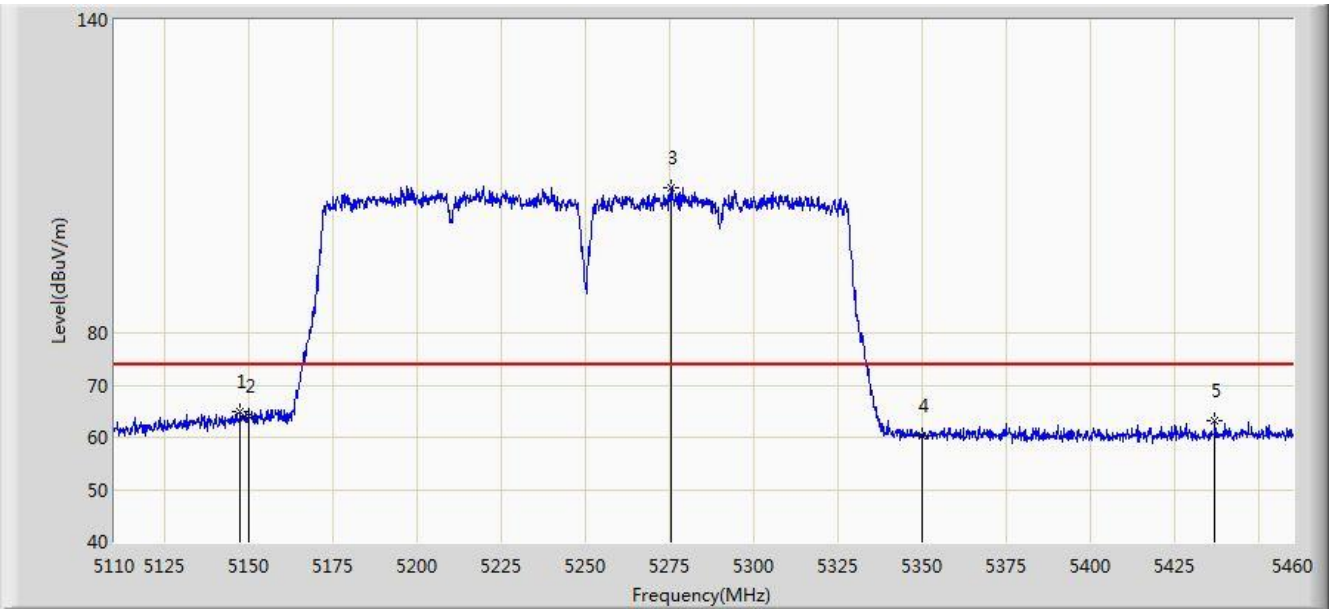

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.450	64.875	60.699	-9.125	74.000	4.176	PK
2			5150.000	64.155	59.986	-9.845	74.000	4.170	PK
3			5275.550	107.894	104.063	N/A	N/A	3.830	PK
4			5350.000	60.283	56.378	-13.717	74.000	3.904	PK
5			5436.725	63.154	59.039	-10.846	74.000	4.115	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/27 - 06:16
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5210MHz+5290MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

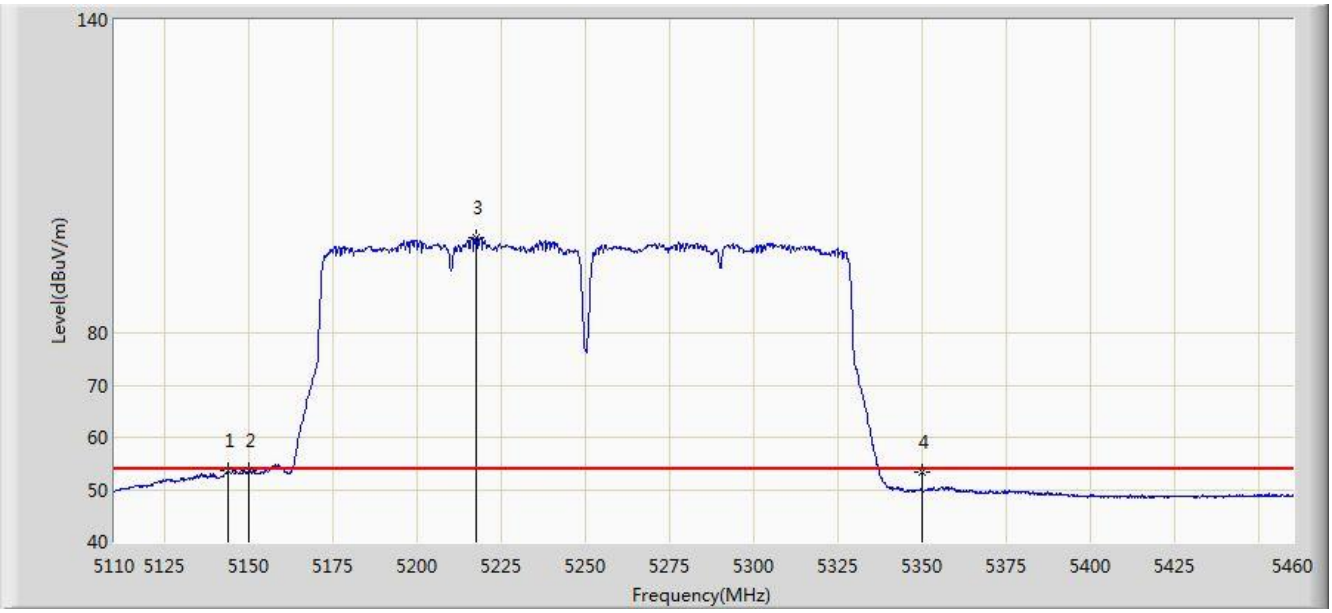

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.775	53.503	49.327	-0.497	54.000	4.175	AV
2			5150.000	53.548	49.379	-0.452	54.000	4.170	AV
3			5217.625	98.336	94.390	N/A	N/A	3.946	AV
4			5350.000	53.410	49.505	-0.590	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/01 - 01:18
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

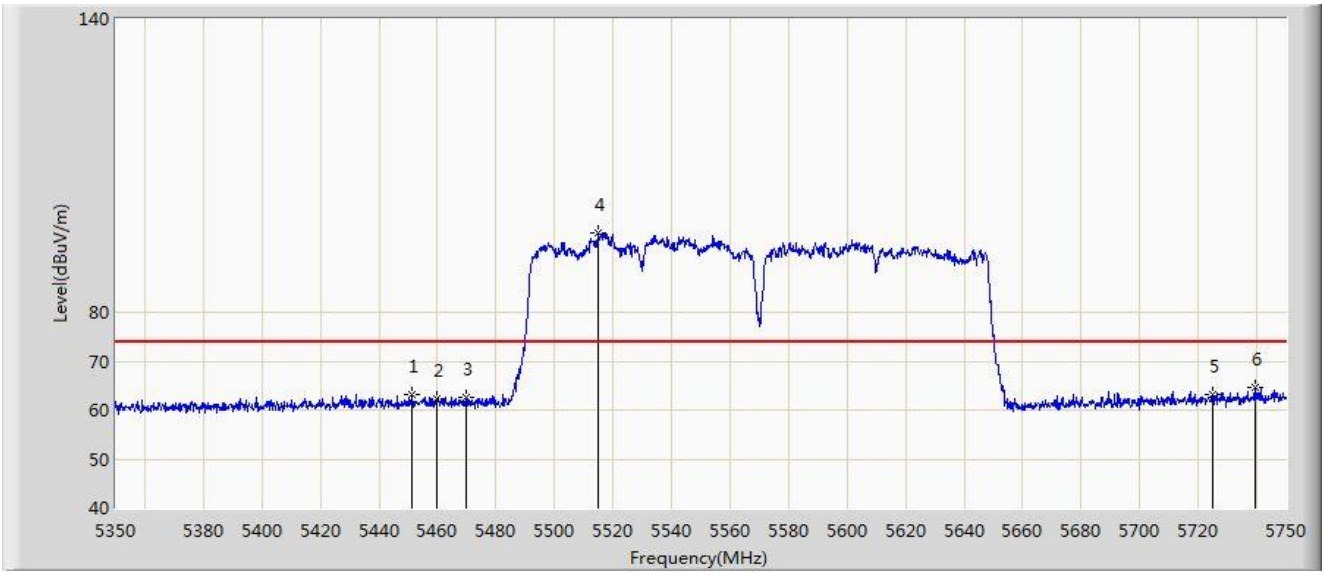

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.200	63.327	59.168	-10.673	74.000	4.159	PK
2			5460.000	62.252	58.072	-11.748	74.000	4.180	PK
3			5470.000	62.525	58.323	-5.675	68.200	4.202	PK
4		*	5515.000	96.228	91.912	N/A	N/A	4.316	PK
5			5725.000	63.211	58.182	-10.789	74.000	5.029	PK
6			5739.600	64.635	59.513	-9.365	74.000	5.122	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/01 - 01:20
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

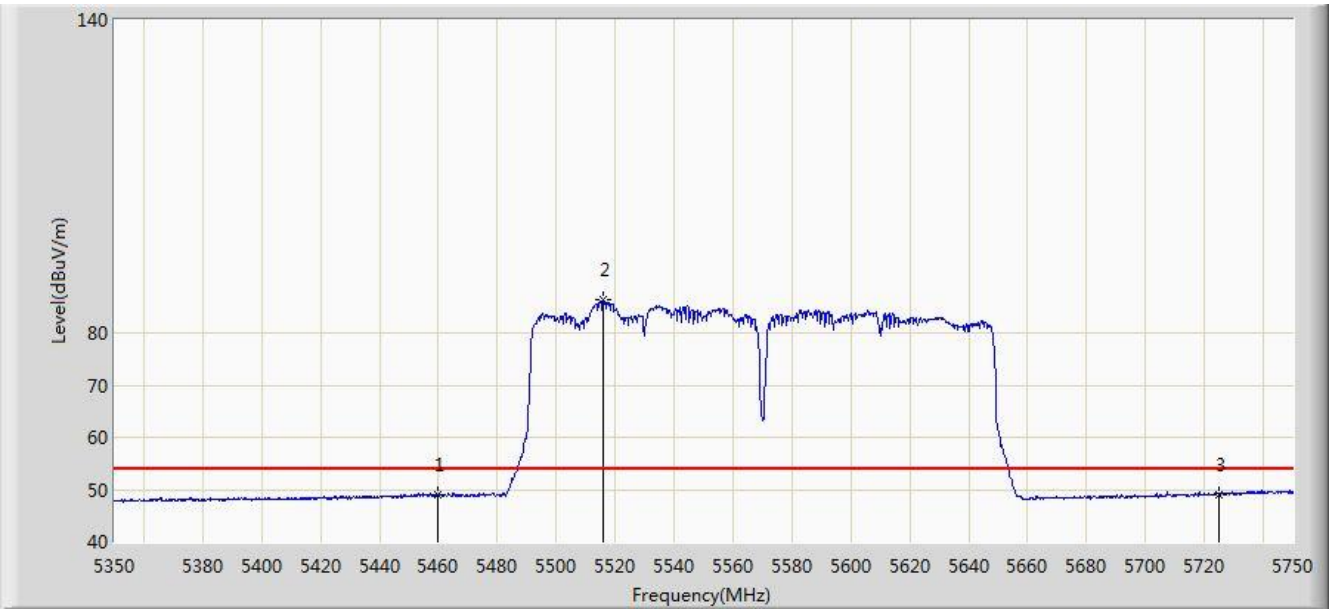

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.905	44.725	-5.095	54.000	4.180	AV
2			5516.000	86.232	81.913	N/A	N/A	4.319	AV
3			5725.000	49.113	44.084	-4.887	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/01 - 01:14
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

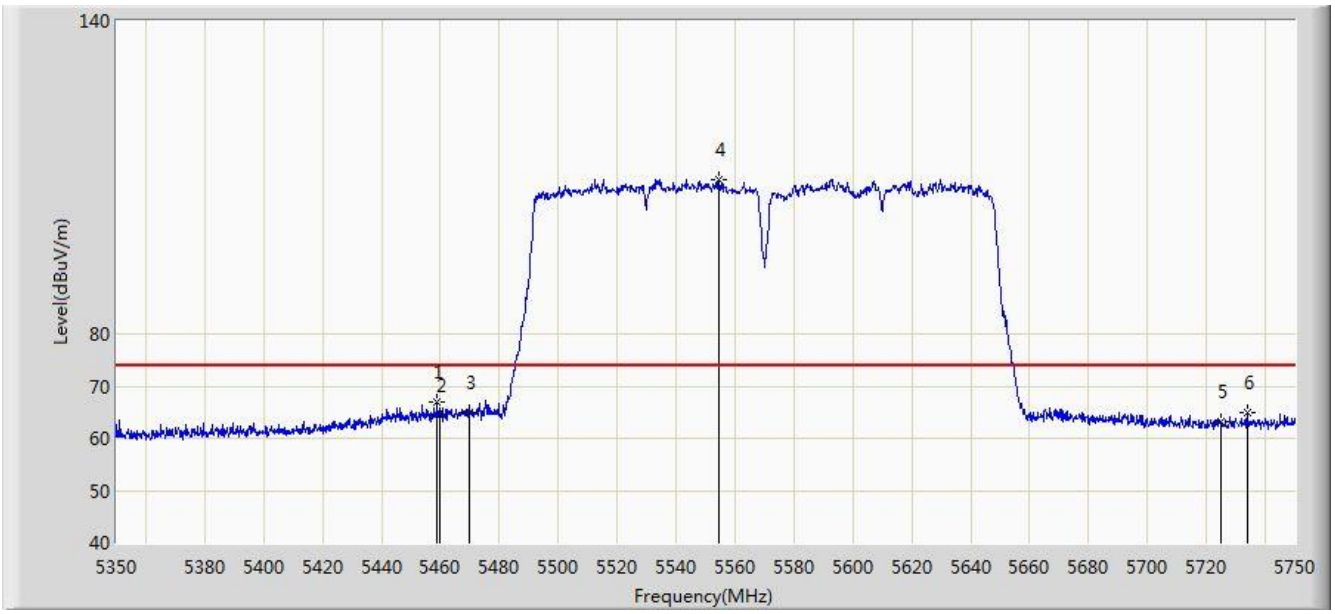

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.800	66.832	62.654	-7.168	74.000	4.178	PK
2			5460.000	64.277	60.097	-9.723	74.000	4.180	PK
3			5470.000	64.888	60.686	-3.312	68.200	4.202	PK
4			5554.400	109.494	105.064	N/A	N/A	4.430	PK
5			5725.000	63.213	58.184	-10.787	74.000	5.029	PK
6			5734.000	64.835	59.749	-9.165	74.000	5.086	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/01 - 01:16
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VTH80+80 Contiguous at Channel 5530MHz+5610MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

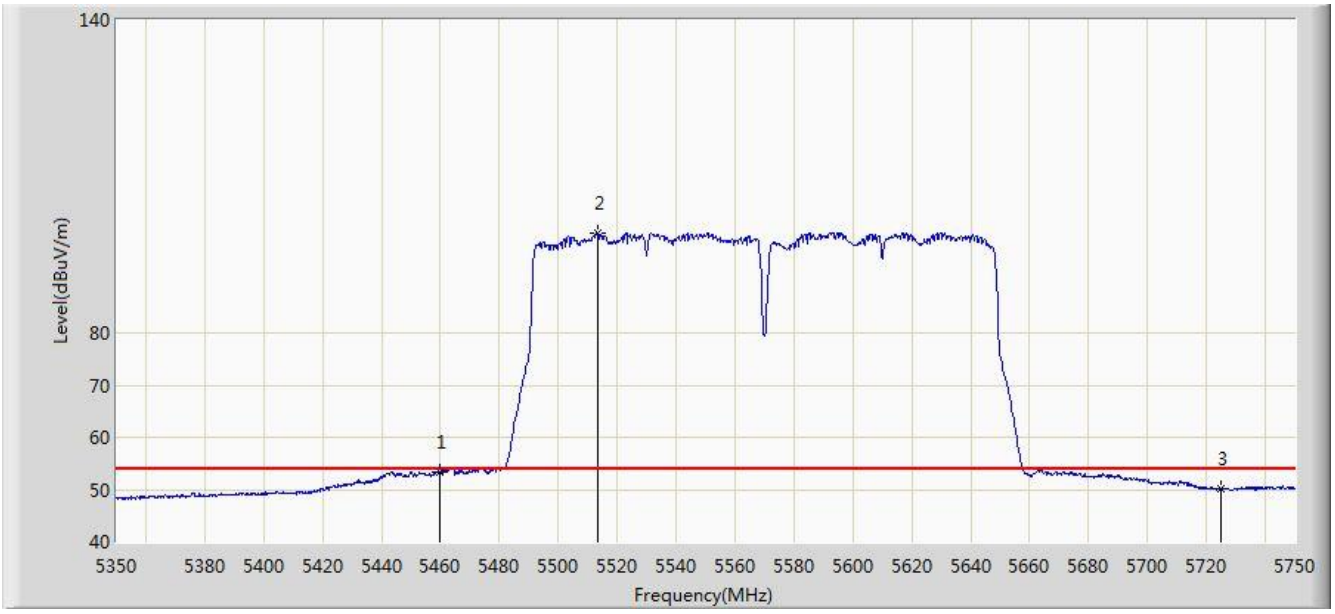

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	53.256	49.076	-0.744	54.000	4.180	AV
2			5513.200	99.210	94.899	N/A	N/A	4.310	AV
3			5725.000	50.111	45.082	-3.889	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:17
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

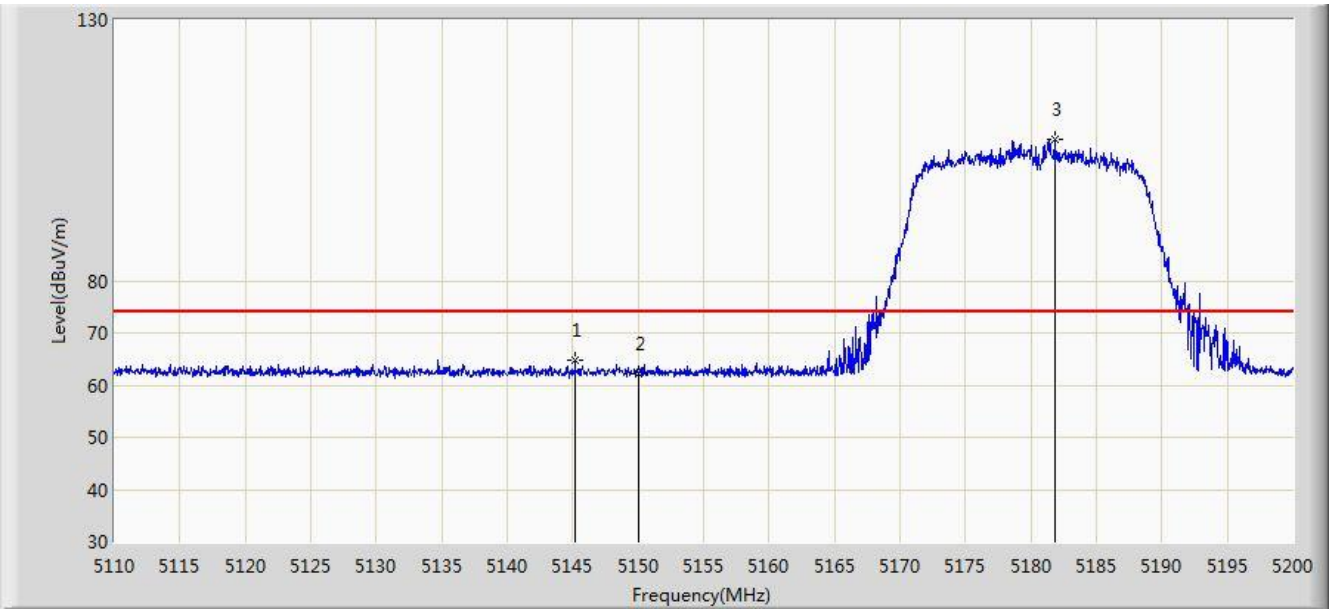

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.190	64.862	60.686	-9.138	74.000	4.176	PK
2			5150.000	62.187	58.018	-11.813	74.000	4.170	PK
3			5181.820	106.981	102.919	N/A	N/A	4.063	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:21
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3	

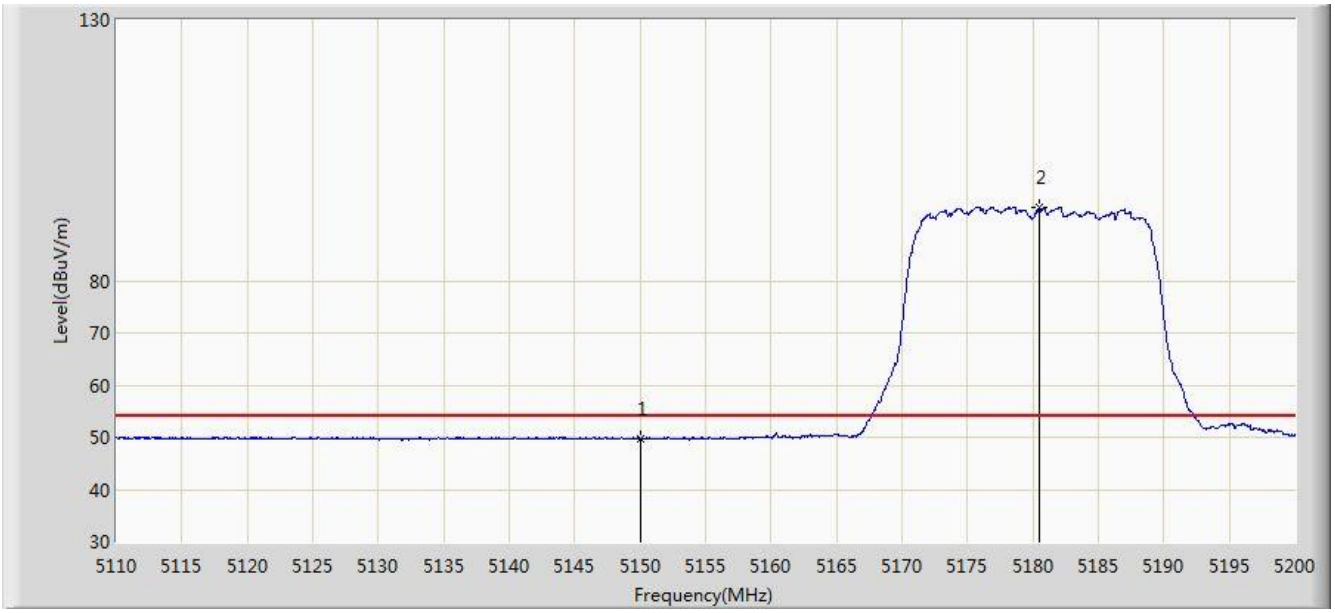

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.718	45.549	-4.282	54.000	4.170	AV
2			5180.515	94.034	89.967	N/A	N/A	4.067	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:08
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

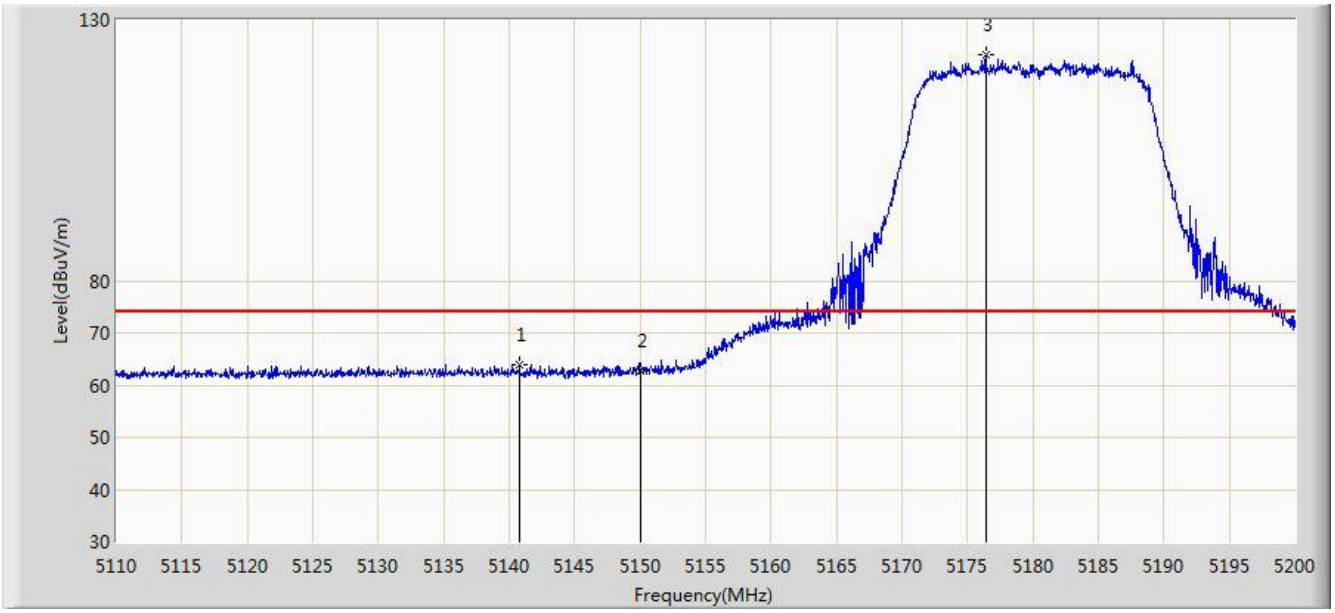

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.780	63.886	59.711	-10.114	74.000	4.176	PK
2			5150.000	62.711	58.542	-11.289	74.000	4.170	PK
3			5176.375	123.473	119.391	N/A	N/A	4.081	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:15
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

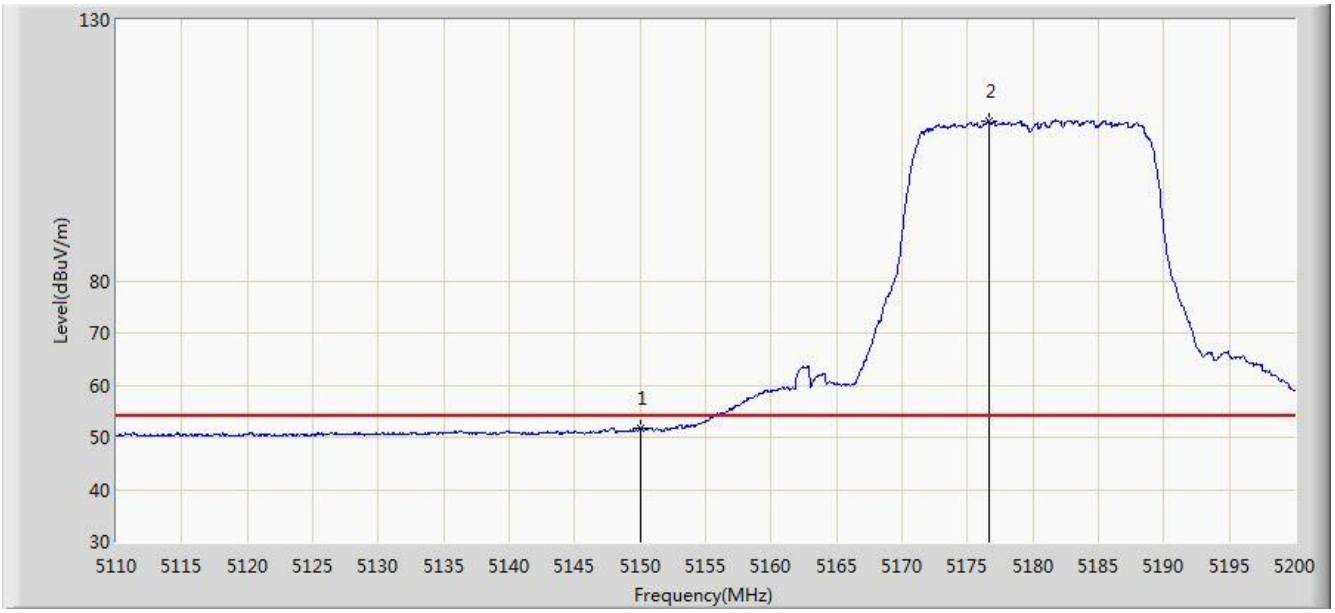

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.615	47.446	-2.385	54.000	4.170	AV
2	X		5176.600	110.656	106.575	N/A	N/A	4.080	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:22
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

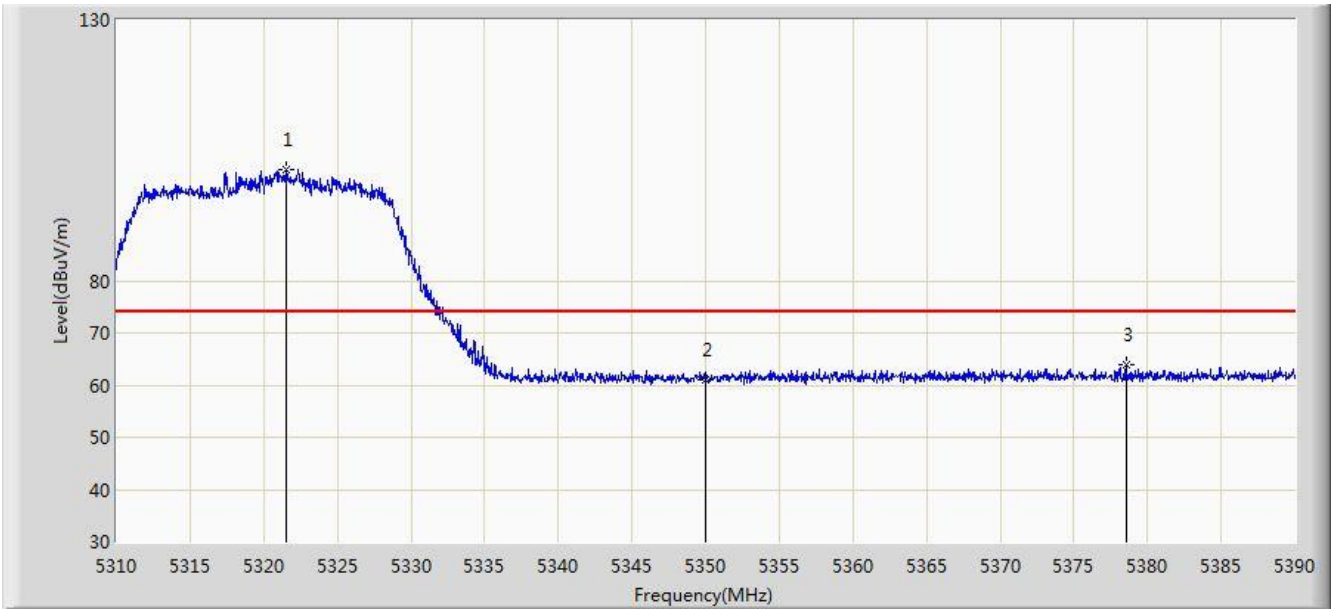

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5321.480	101.389	97.538	N/A	N/A	3.851	PK
2			5350.000	60.959	57.054	-13.041	74.000	3.904	PK
3			5378.560	63.851	59.894	-10.149	74.000	3.956	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 01:28
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

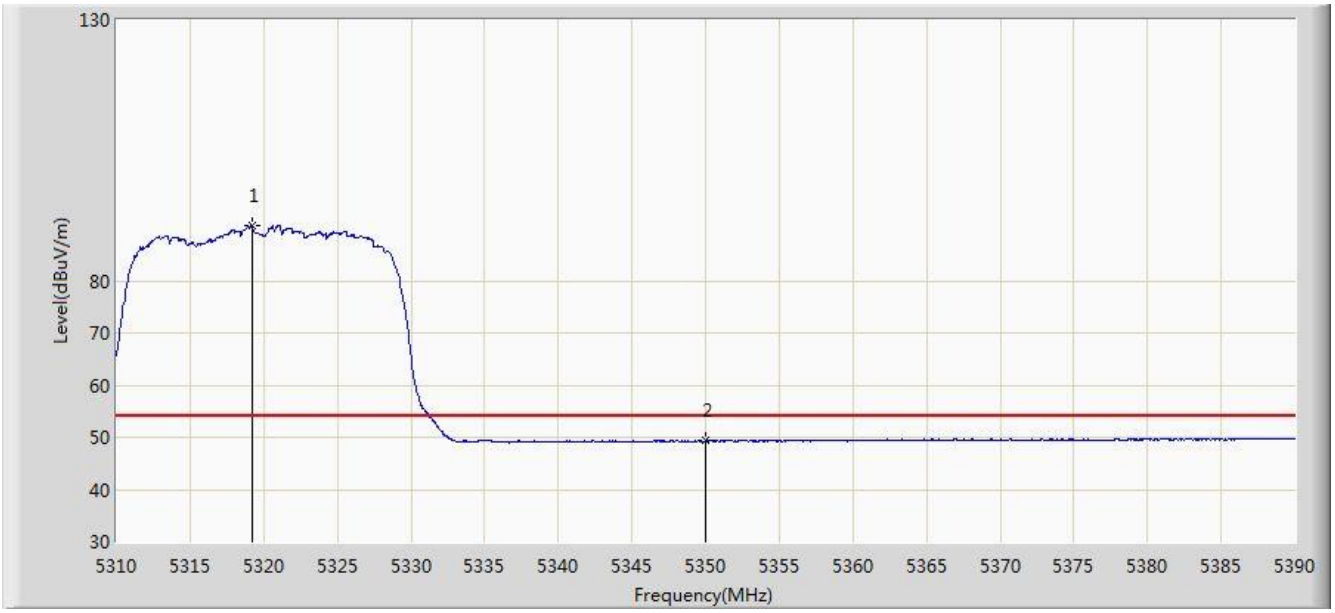

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5319.240	90.584	86.737	N/A	N/A	3.847	AV
2			5350.000	49.333	45.428	-4.667	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 02:47
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

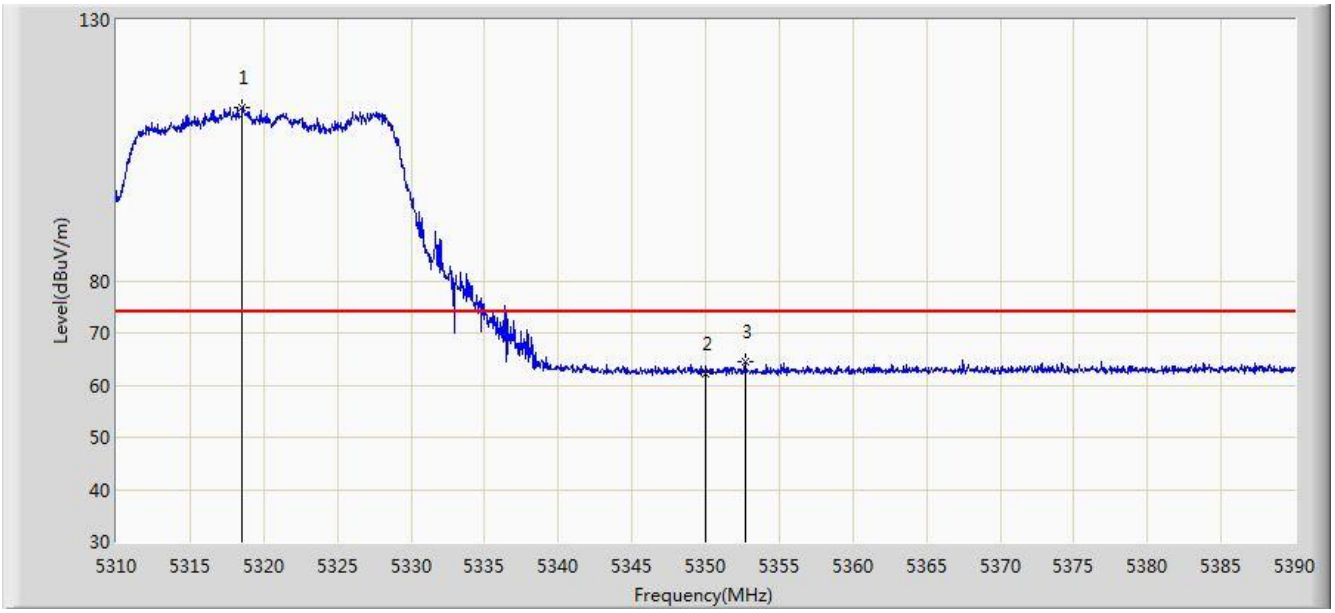

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5318.560	113.135	109.289	N/A	N/A	3.846	PK
2			5350.000	62.289	58.384	-11.711	74.000	3.904	PK
3			5352.680	64.385	60.475	-9.615	74.000	3.910	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:32
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

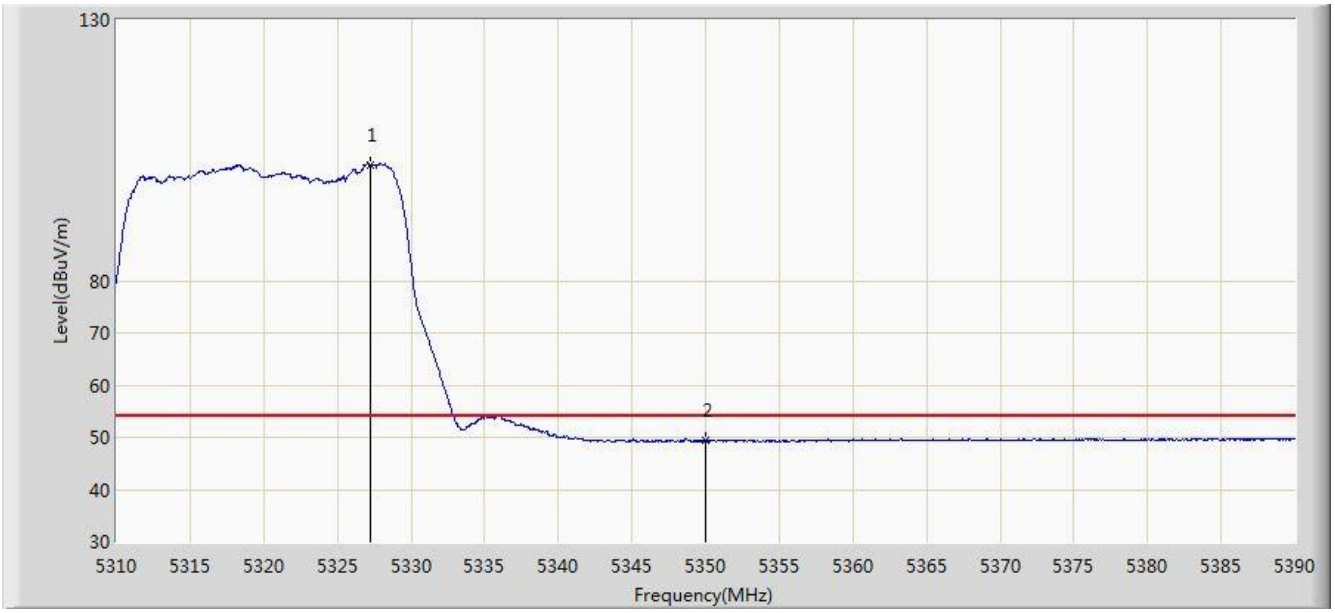

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5327.280	102.241	98.379	N/A	N/A	3.862	AV
2			5350.000	49.314	45.409	-4.686	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:50
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

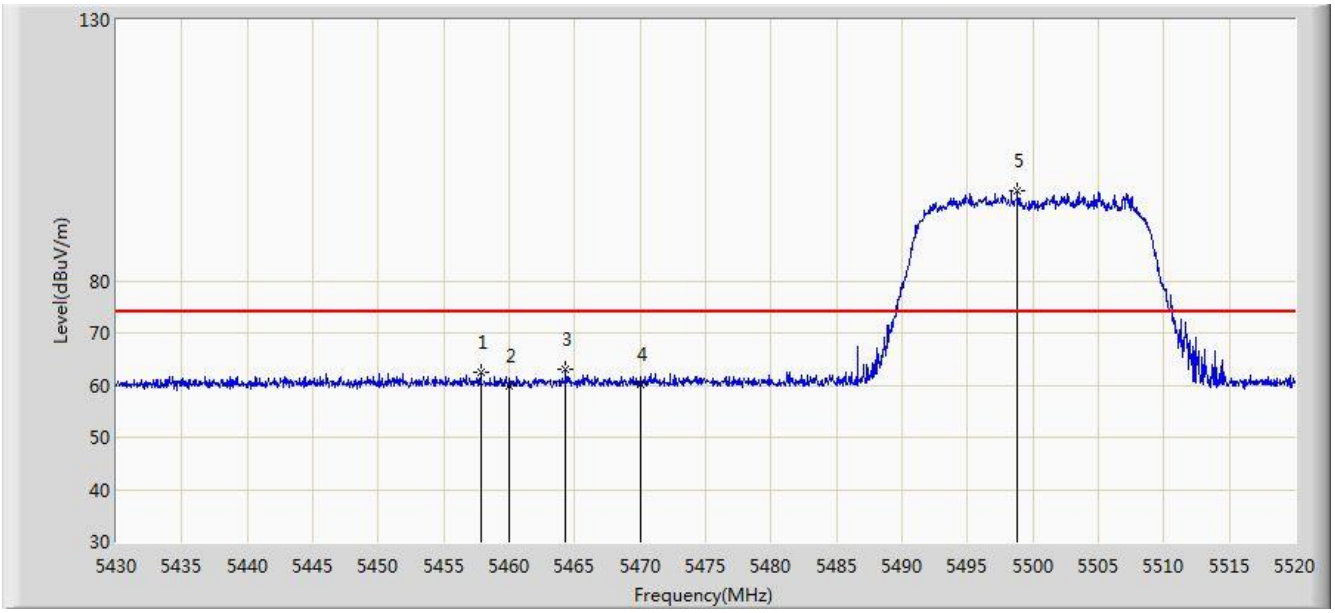

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.810	62.468	58.292	-11.532	74.000	4.176	PK
2			5460.000	59.977	55.797	-14.023	74.000	4.180	PK
3			5464.290	63.100	58.910	-5.100	68.200	4.190	PK
4			5470.000	60.059	55.857	-8.141	68.200	4.202	PK
5			5498.805	97.379	93.110	N/A	N/A	4.268	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:52
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

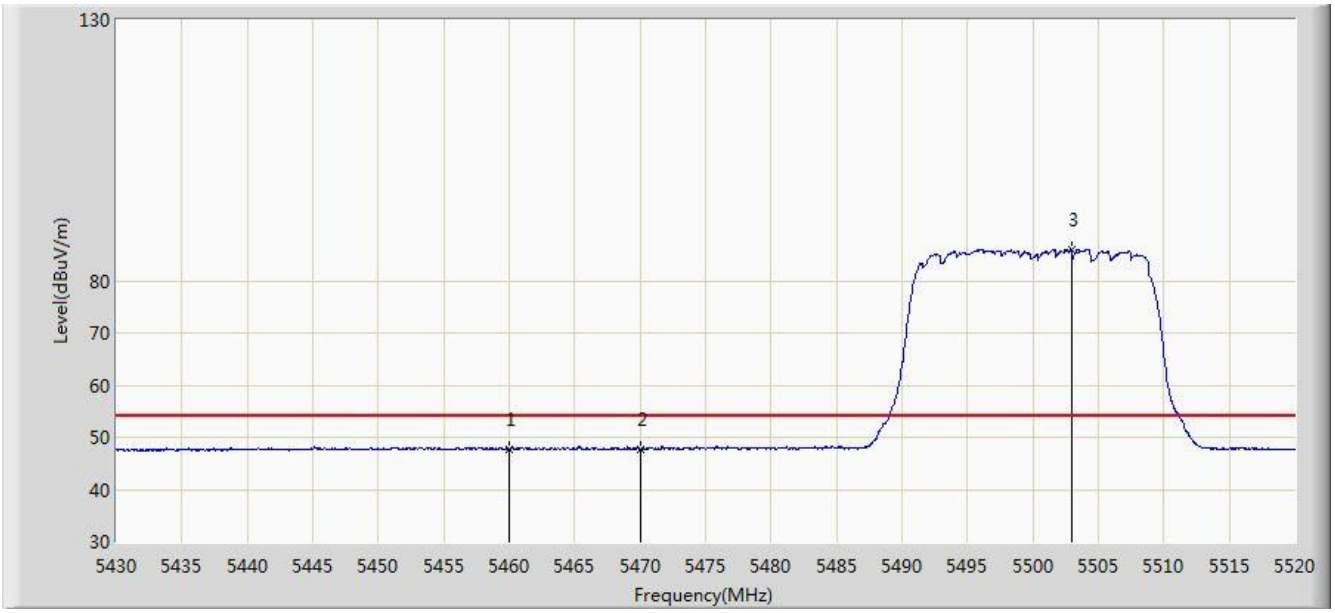

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.656	43.476	-6.344	54.000	4.180	AV
2			5470.000	47.790	43.588	N/A	N/A	4.202	AV
3			5502.945	86.076	81.795	N/A	N/A	4.281	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:36
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

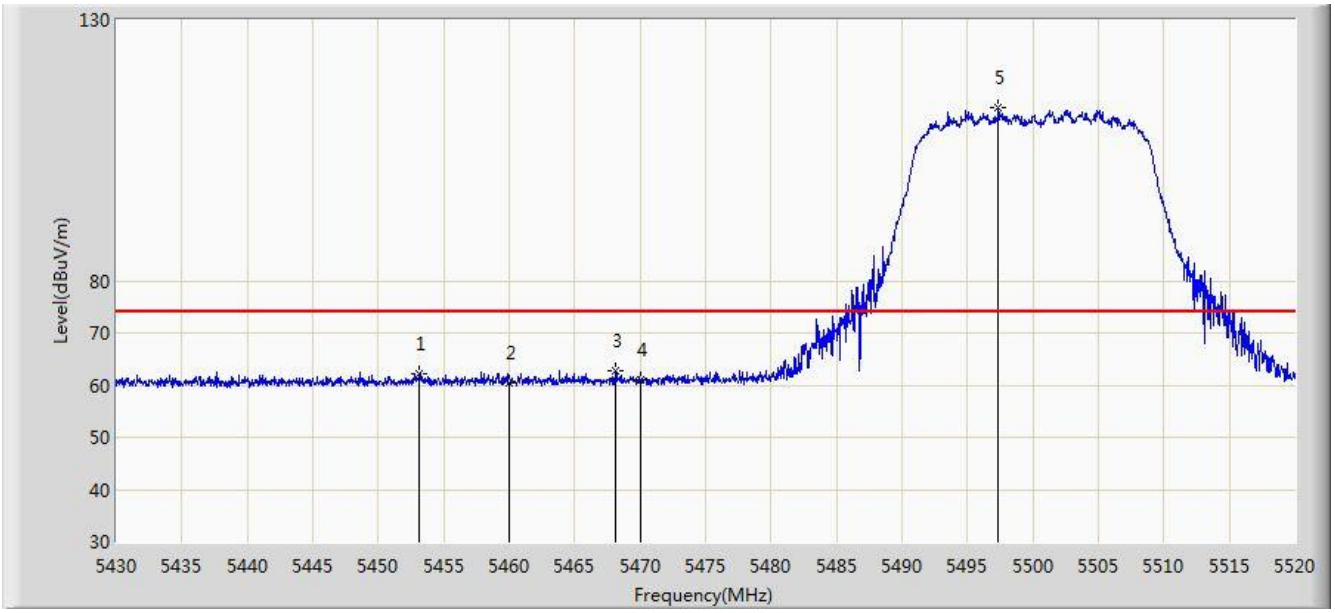

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.130	62.279	58.114	-11.721	74.000	4.164	PK
2			5460.000	60.447	56.267	-13.553	74.000	4.180	PK
3			5468.070	62.803	58.605	-5.397	68.200	4.198	PK
4			5470.000	60.876	56.674	-7.324	68.200	4.202	PK
5			5497.320	113.147	108.883	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:44
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

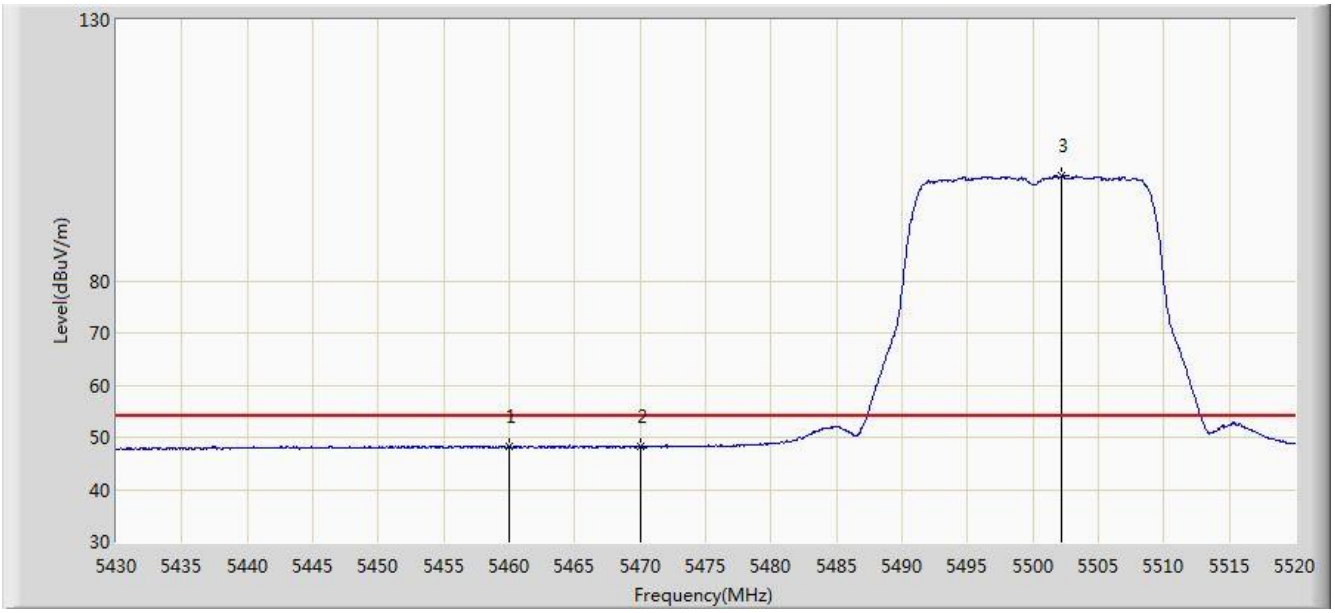

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.121	43.941	-5.879	54.000	4.180	AV
2			5470.000	48.220	44.018	N/A	N/A	4.202	AV
3			5502.225	100.084	95.805	N/A	N/A	4.278	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:04
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

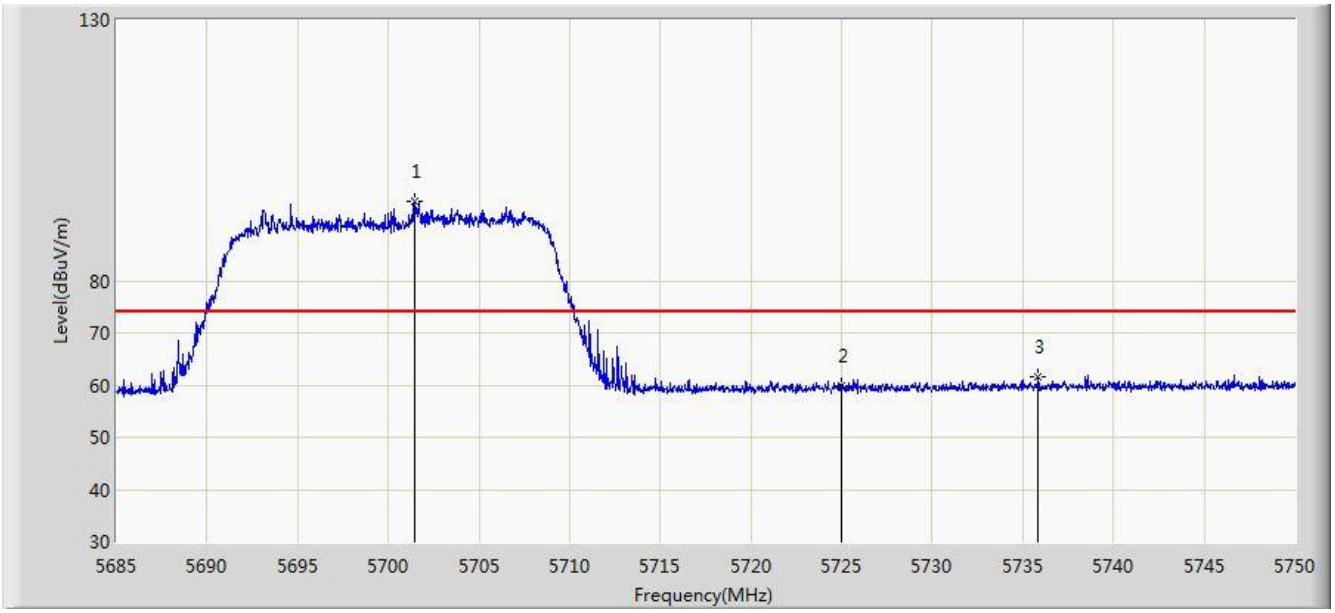

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5701.445	95.253	90.367	N/A	N/A	4.886	PK
2			5725.000	59.799	54.770	-14.201	74.000	5.029	PK
3			5735.862	61.537	56.439	-12.463	74.000	5.098	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:08
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

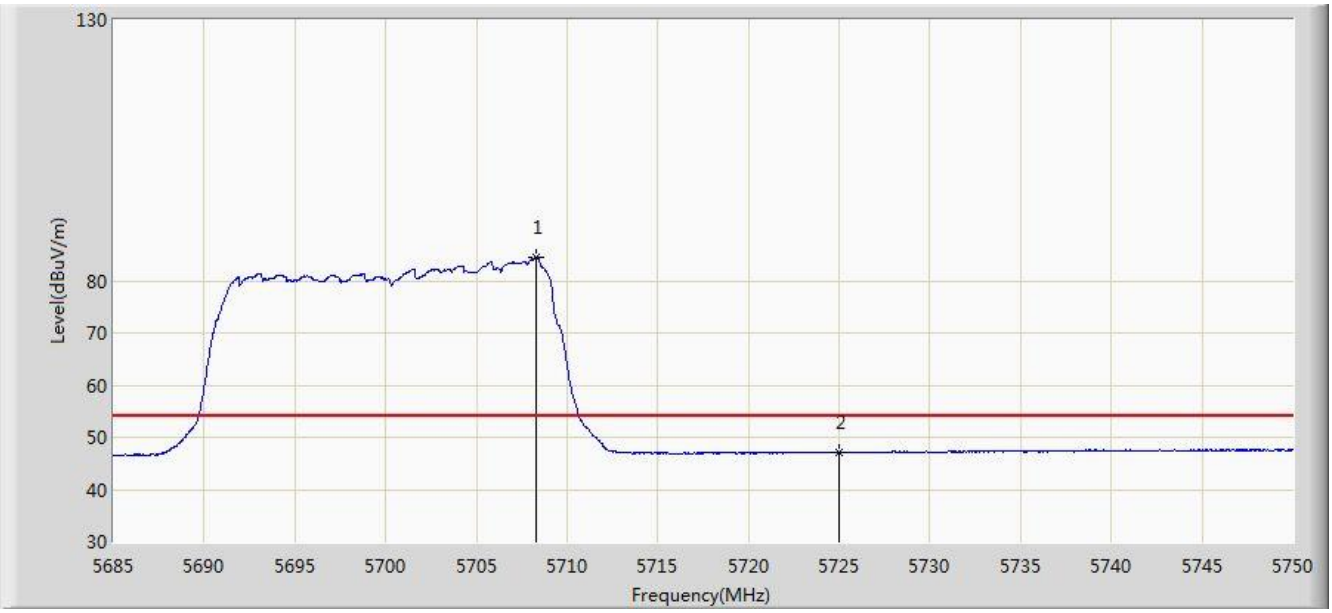

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5708.270	84.514	79.592	N/A	N/A	4.922	AV
2			5725.000	47.074	42.045	-6.926	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 03:54
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

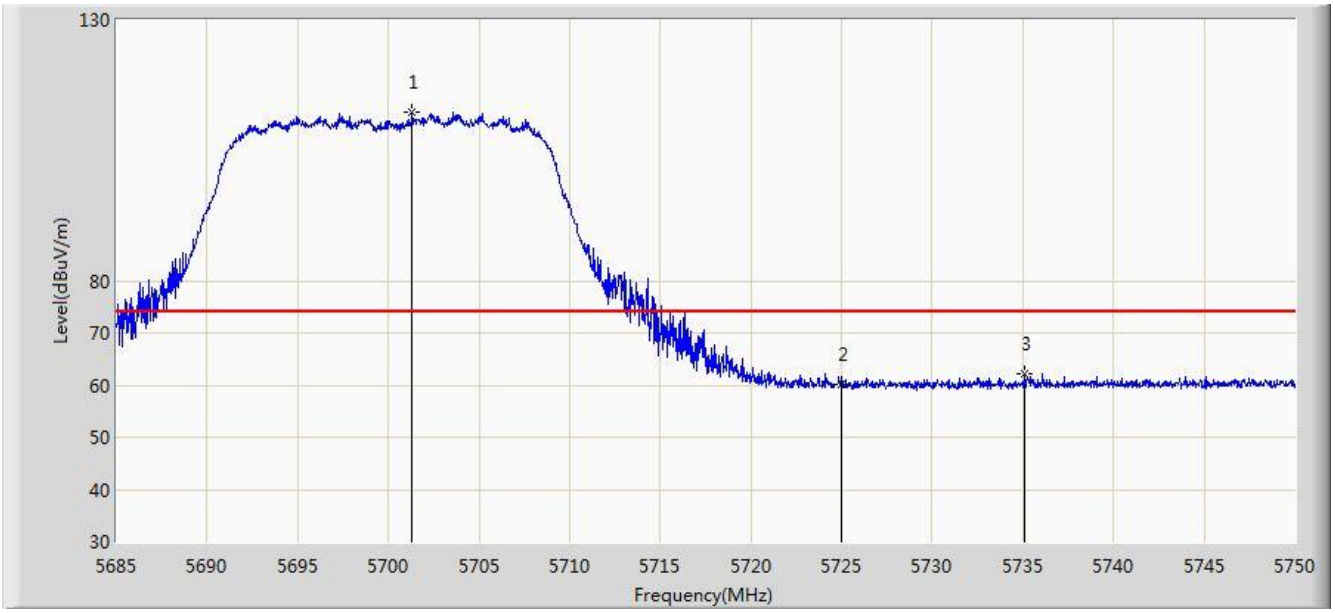

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5701.315	112.300	107.415	N/A	N/A	4.885	PK
2			5725.000	60.015	54.986	-13.985	74.000	5.029	PK
3			5735.083	62.317	57.224	-11.683	74.000	5.093	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:03
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

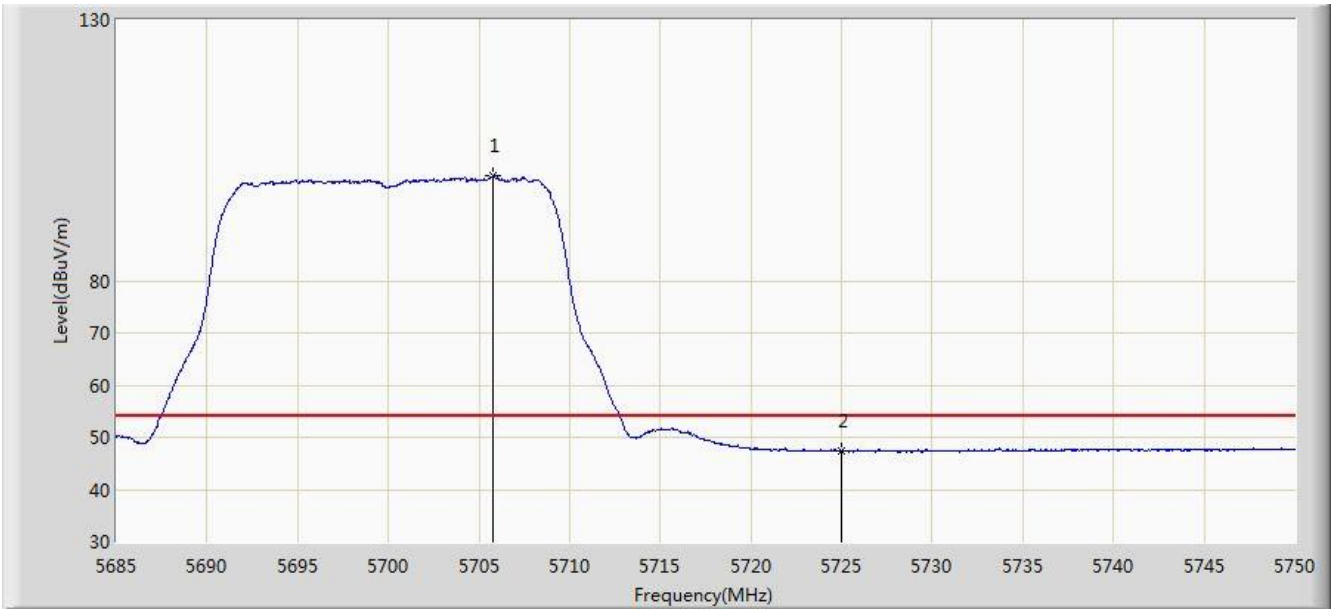

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5705.800	100.091	95.182	N/A	N/A	4.909	AV
2			5725.000	47.373	42.344	-6.627	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:14
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

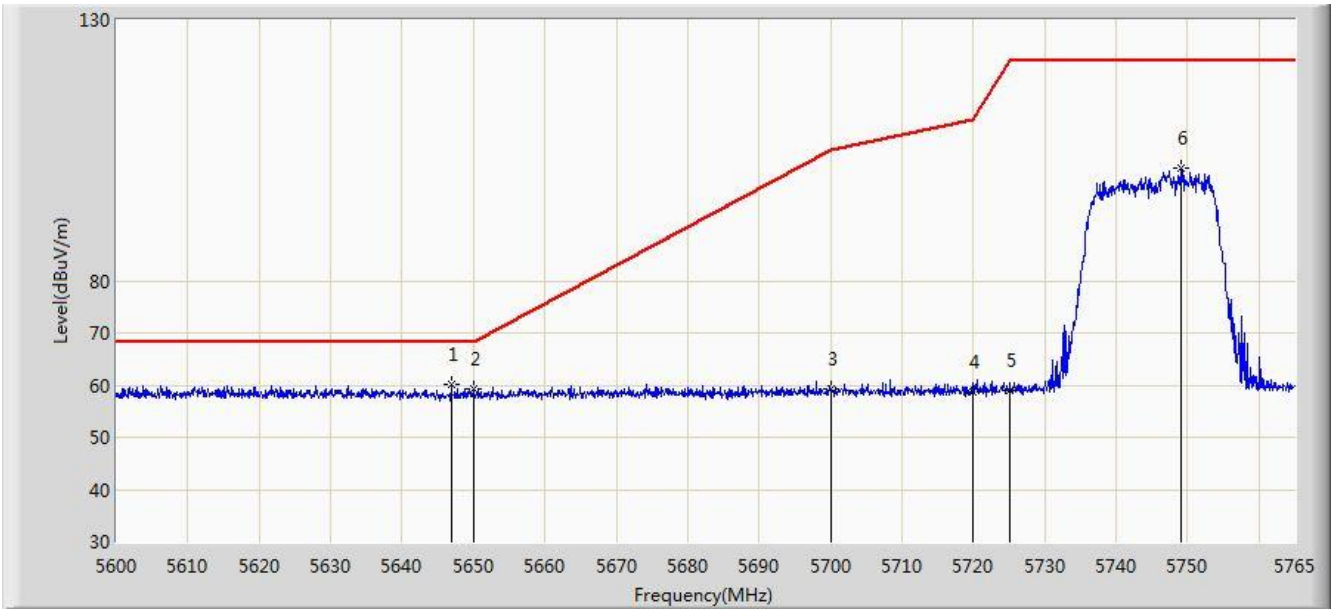

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5646.860	60.227	55.566	-7.973	68.200	4.661	PK
2			5650.000	59.267	54.596	-8.933	68.200	4.671	PK
3			5700.000	59.272	54.394	-45.928	105.200	4.878	PK
4			5720.000	58.571	53.574	-52.229	110.800	4.997	PK
5			5725.000	59.017	53.988	-63.183	122.200	5.029	PK
6			5748.995	101.580	96.402	N/A	N/A	5.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:09
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

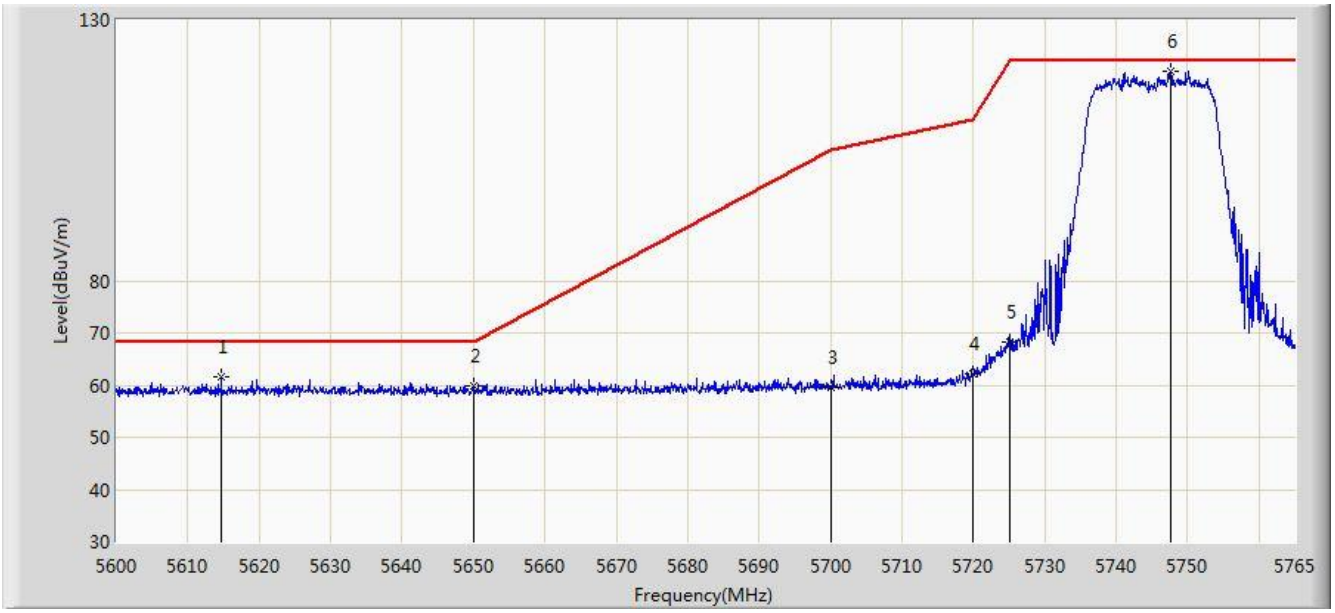

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5614.685	61.634	57.069	-6.566	68.200	4.566	PK
2			5650.000	59.711	55.040	-8.489	68.200	4.671	PK
3			5700.000	59.591	54.713	-45.609	105.200	4.878	PK
4			5720.000	62.137	57.140	-48.663	110.800	4.997	PK
5			5725.000	68.263	63.234	-53.937	122.200	5.029	PK
6			5747.675	120.173	115.003	N/A	N/A	5.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:19
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

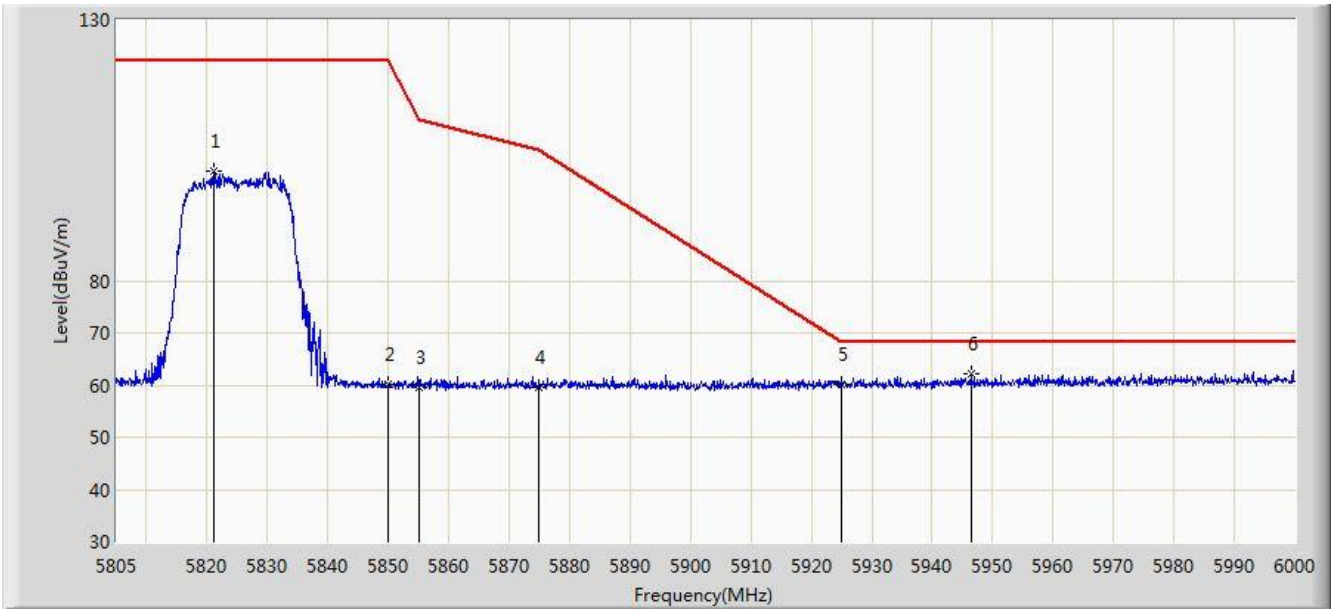

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.185	101.071	95.505	N/A	N/A	5.566	PK
2			5850.000	60.085	54.359	-62.115	122.200	5.726	PK
3			5855.000	59.680	53.934	-51.120	110.800	5.746	PK
4			5875.000	59.547	53.727	-45.653	105.200	5.820	PK
5			5925.000	60.037	54.071	-8.163	68.200	5.967	PK
6			5946.375	62.172	56.153	-6.028	68.200	6.019	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:15
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

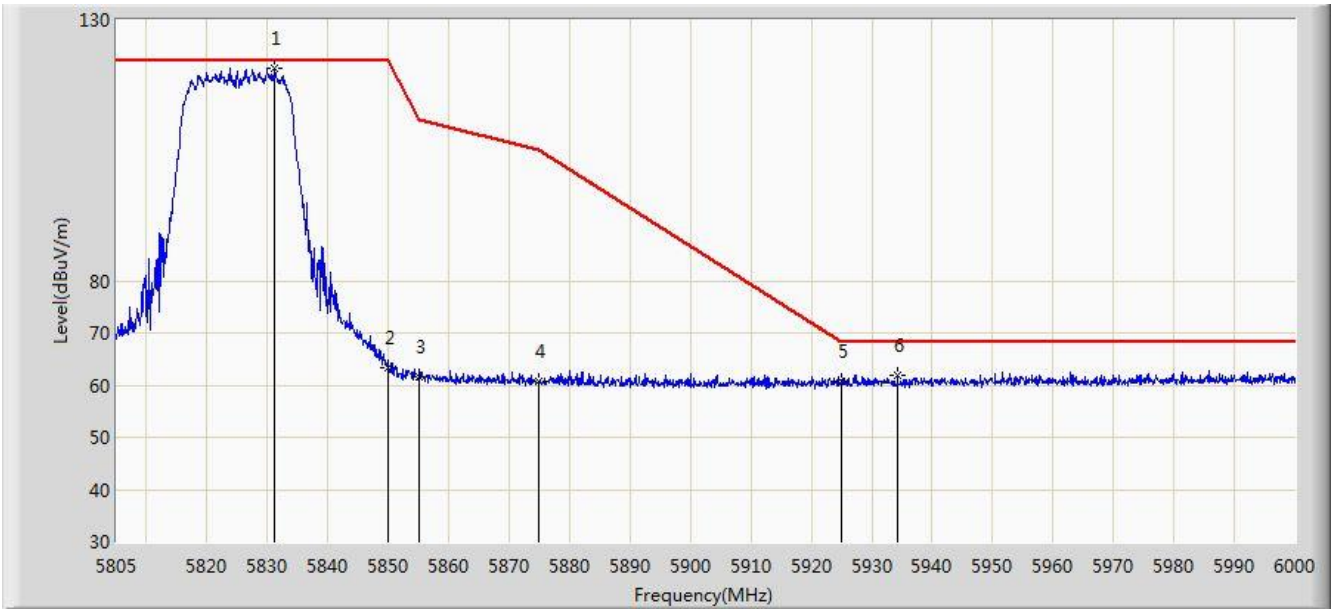

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5831.130	120.708	115.084	N/A	N/A	5.624	PK
2			5850.000	63.457	57.731	-58.743	122.200	5.726	PK
3			5855.000	61.626	55.880	-49.174	110.800	5.746	PK
4			5875.000	60.785	54.965	-44.415	105.200	5.820	PK
5			5925.000	60.819	54.853	-7.381	68.200	5.967	PK
6			5934.285	61.941	55.951	-6.259	68.200	5.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:46
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

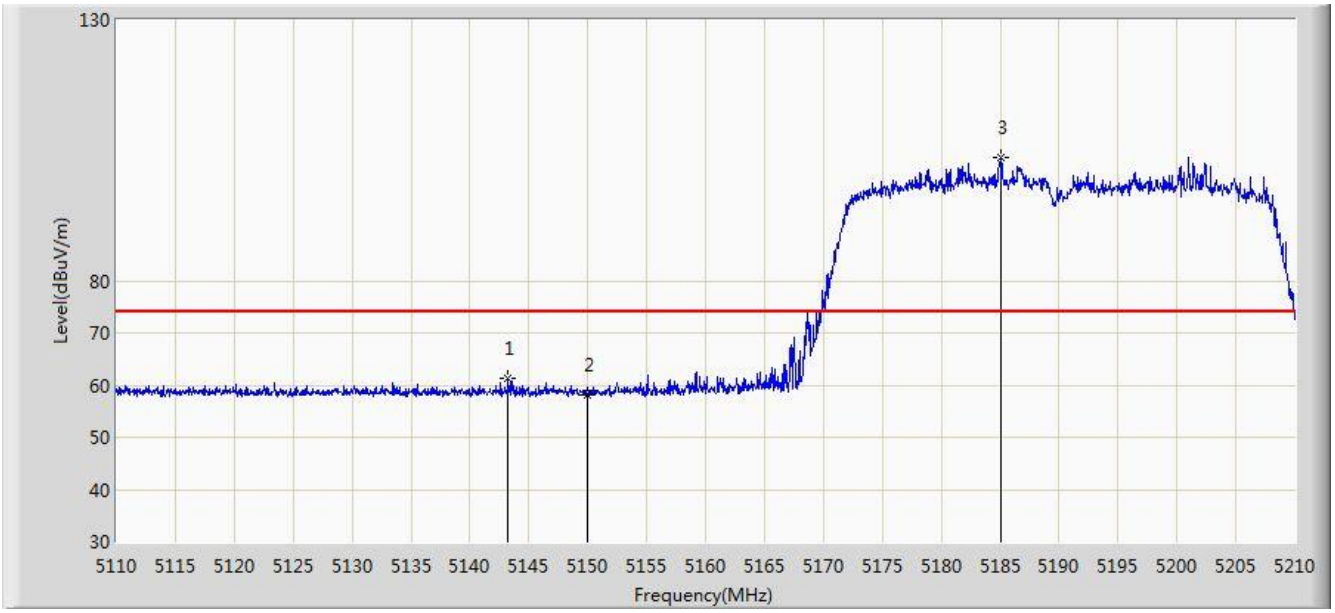

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.250	61.331	57.155	-12.669	74.000	4.176	PK
2			5150.000	58.258	54.089	-15.742	74.000	4.170	PK
3			5185.000	103.540	99.489	N/A	N/A	4.052	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:51
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

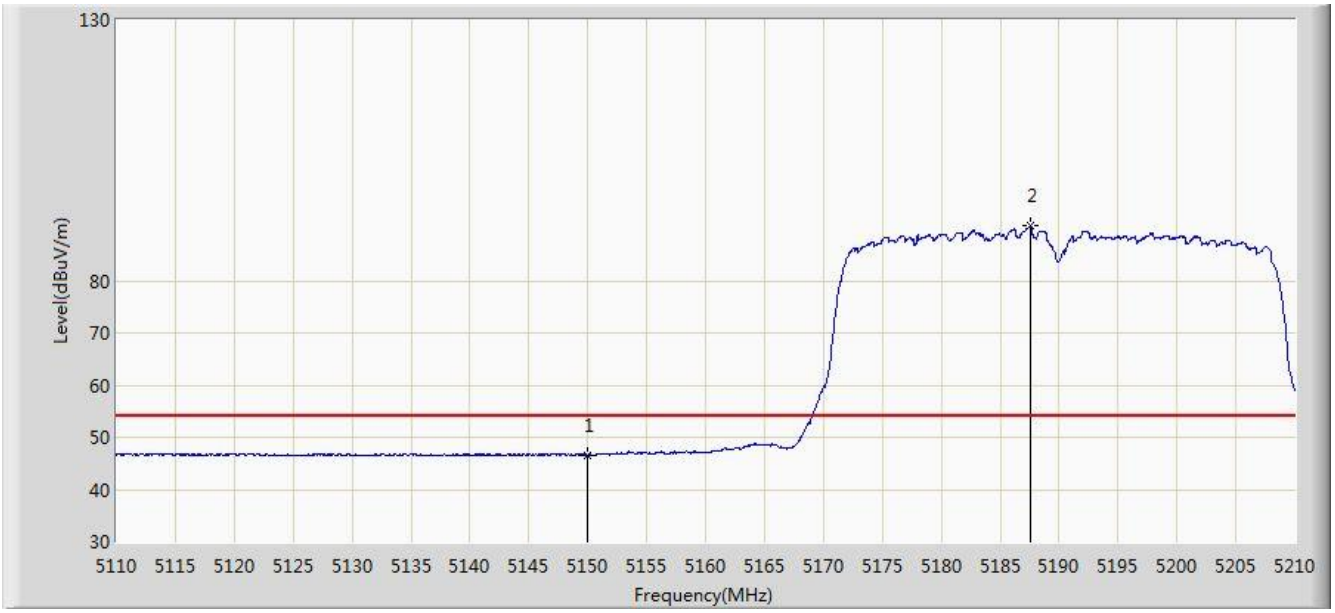

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.640	42.471	-7.360	54.000	4.170	AV
2			5187.550	90.442	86.400	N/A	N/A	4.042	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:42
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

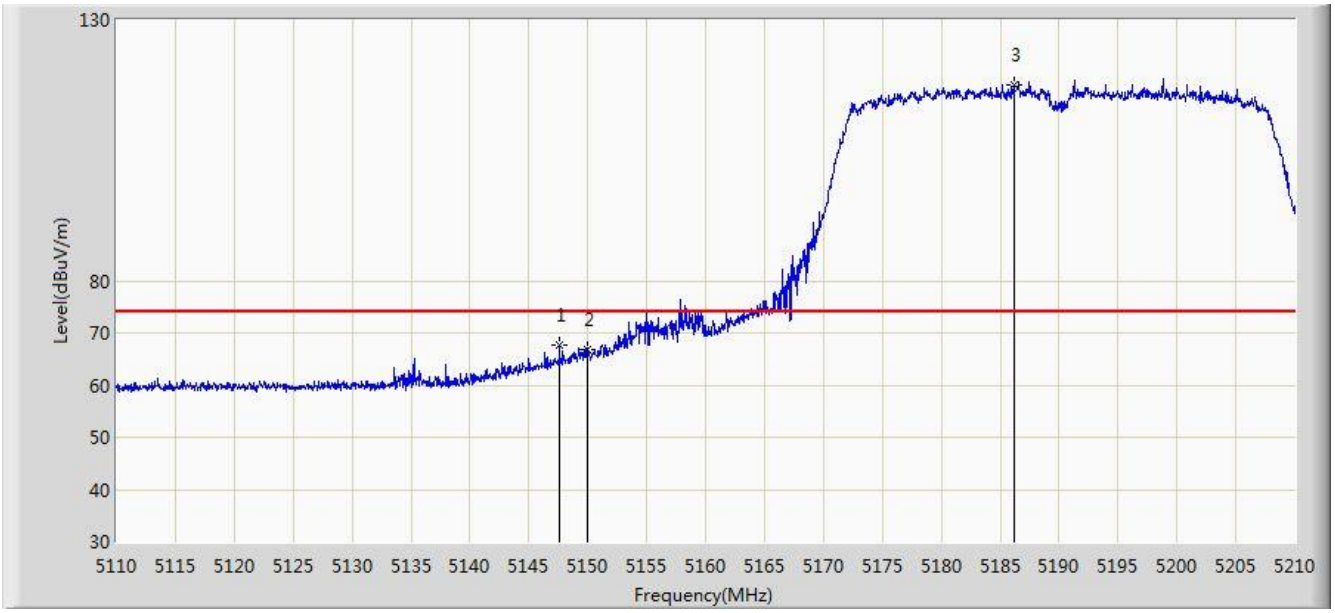

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.600	67.765	63.589	-6.235	74.000	4.176	PK
2			5150.000	66.730	62.561	-7.270	74.000	4.170	PK
3			5186.150	117.421	113.374	N/A	N/A	4.047	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:40
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

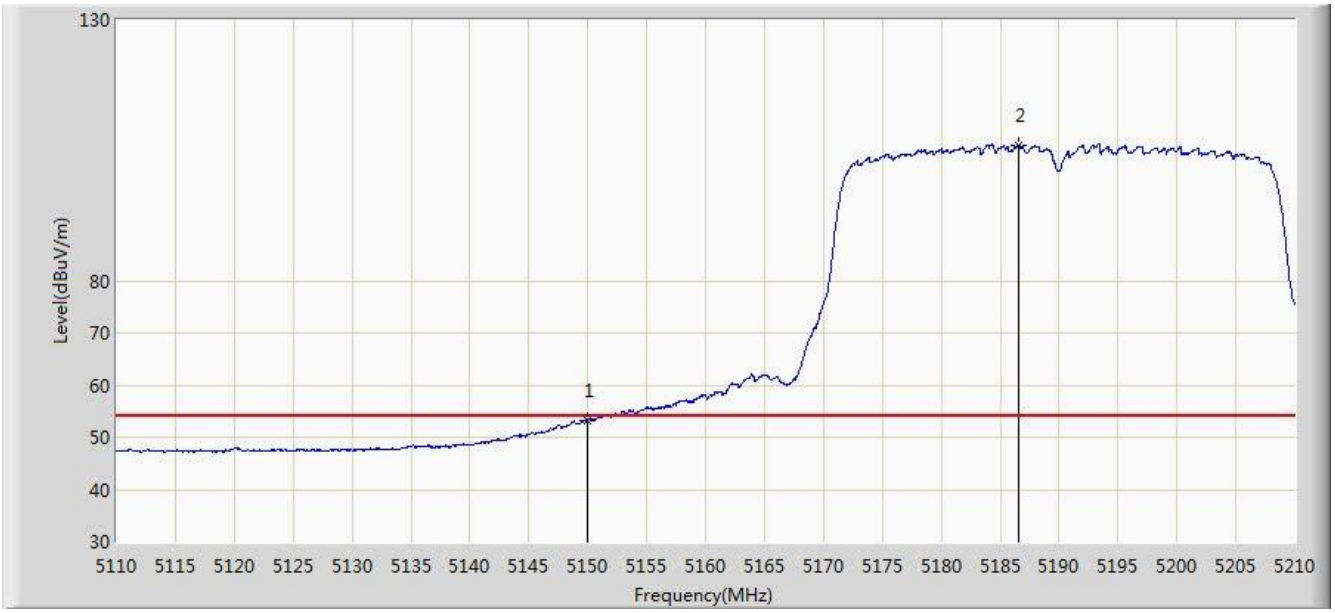

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.211	49.042	-0.789	54.000	4.170	AV
2			5186.600	105.985	101.940	N/A	N/A	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:59
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

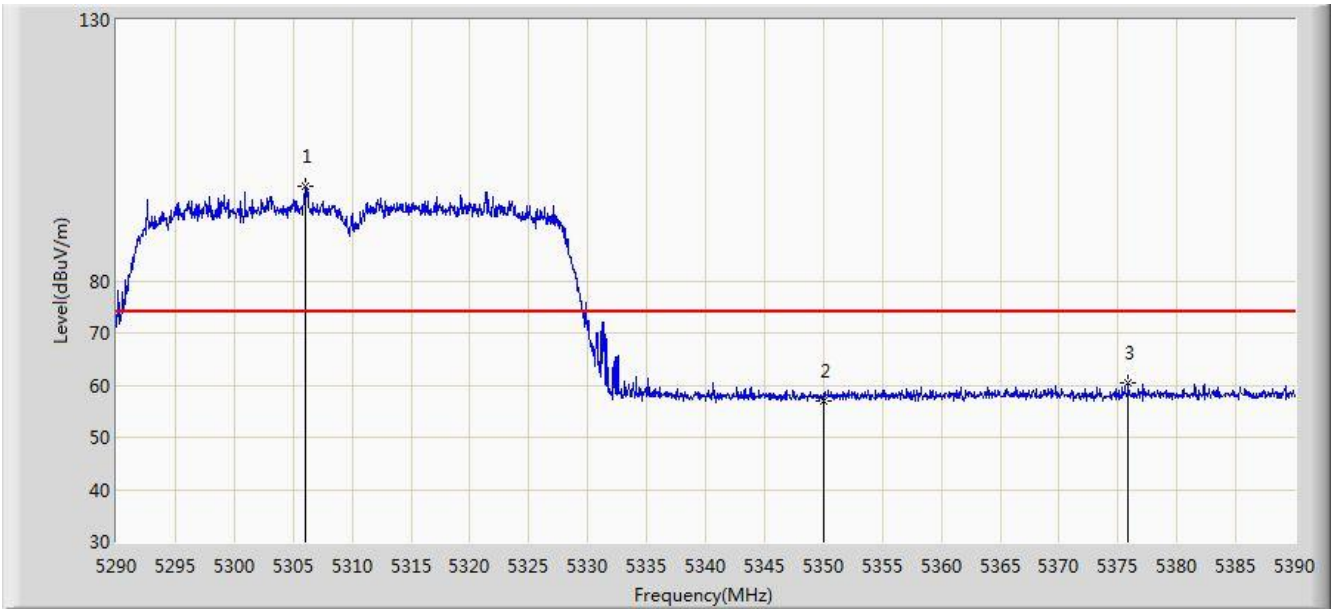

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5306.050	98.186	94.363	N/A	N/A	3.823	PK
2			5350.000	57.046	53.141	-16.954	74.000	3.904	PK
3			5375.900	60.431	56.479	-13.569	74.000	3.952	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:00
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

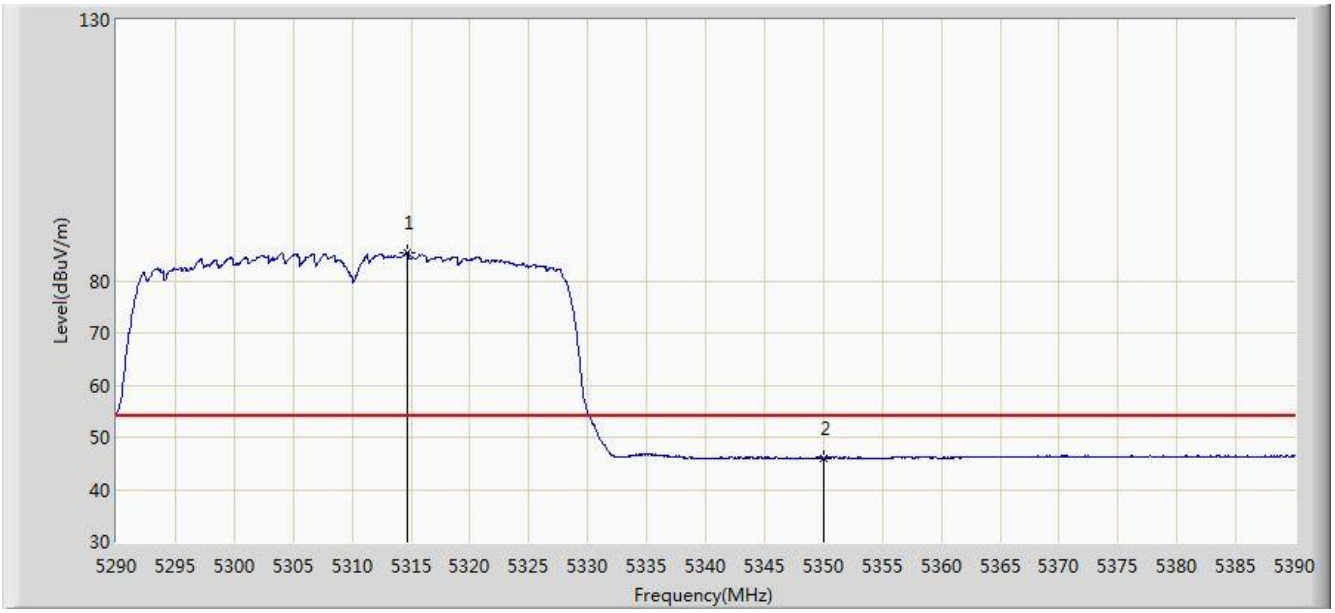

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5314.700	85.462	81.623	N/A	N/A	3.838	AV
2			5350.000	46.037	42.132	-7.963	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:54
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

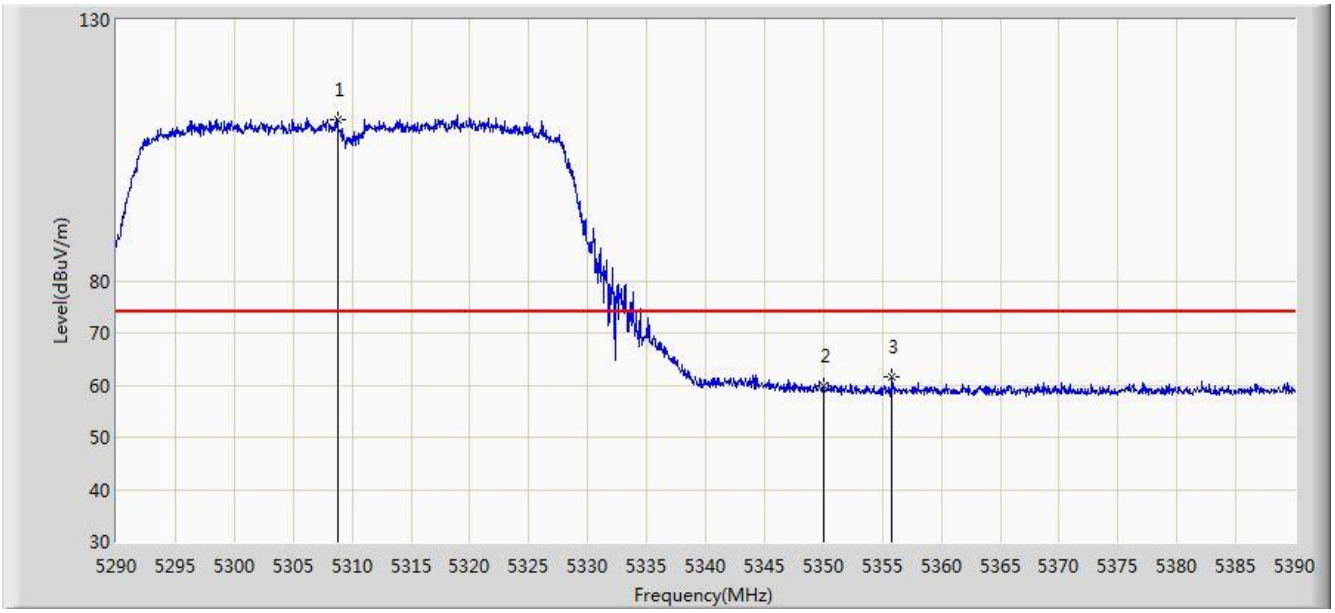

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5308.750	110.931	107.103	N/A	N/A	3.828	PK
2			5350.000	59.953	56.048	-14.047	74.000	3.904	PK
3			5355.850	61.532	57.617	-12.468	74.000	3.915	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 04:57
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

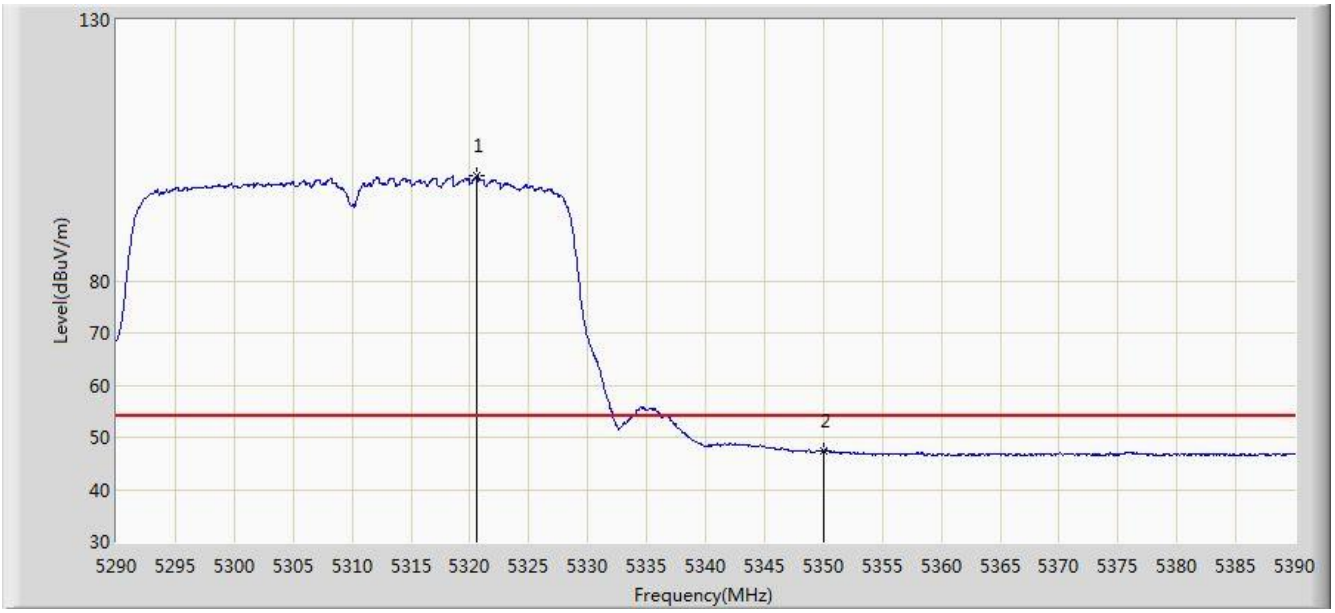

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5320.550	100.056	96.206	N/A	N/A	3.850	AV
2			5350.000	47.331	43.426	-6.669	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:10
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

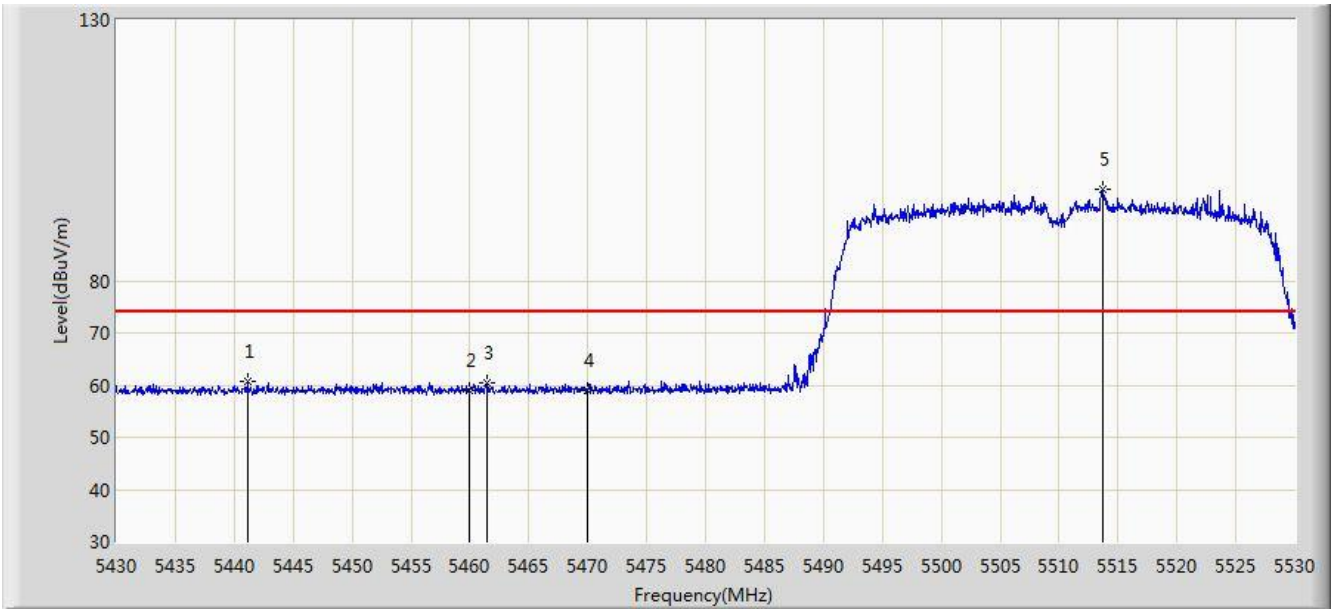

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.100	60.802	56.674	-13.198	74.000	4.127	PK
2			5460.000	58.936	54.756	-15.064	74.000	4.180	PK
3			5461.400	60.445	56.262	-7.755	68.200	4.183	PK
4			5470.000	58.856	54.654	-9.344	68.200	4.202	PK
5			5513.700	97.415	93.103	N/A	N/A	4.313	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:14
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

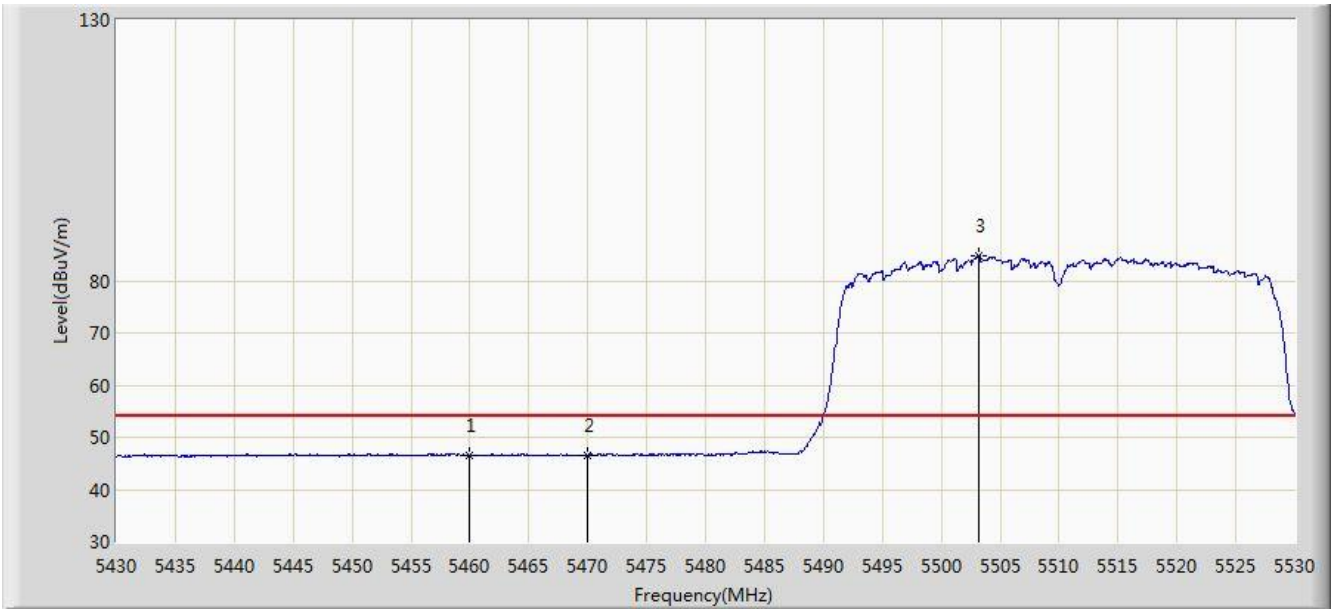

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.513	42.333	-7.487	54.000	4.180	AV
2			5470.000	46.545	42.343	N/A	N/A	4.202	AV
3			5503.200	84.835	80.554	N/A	N/A	4.281	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:02
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

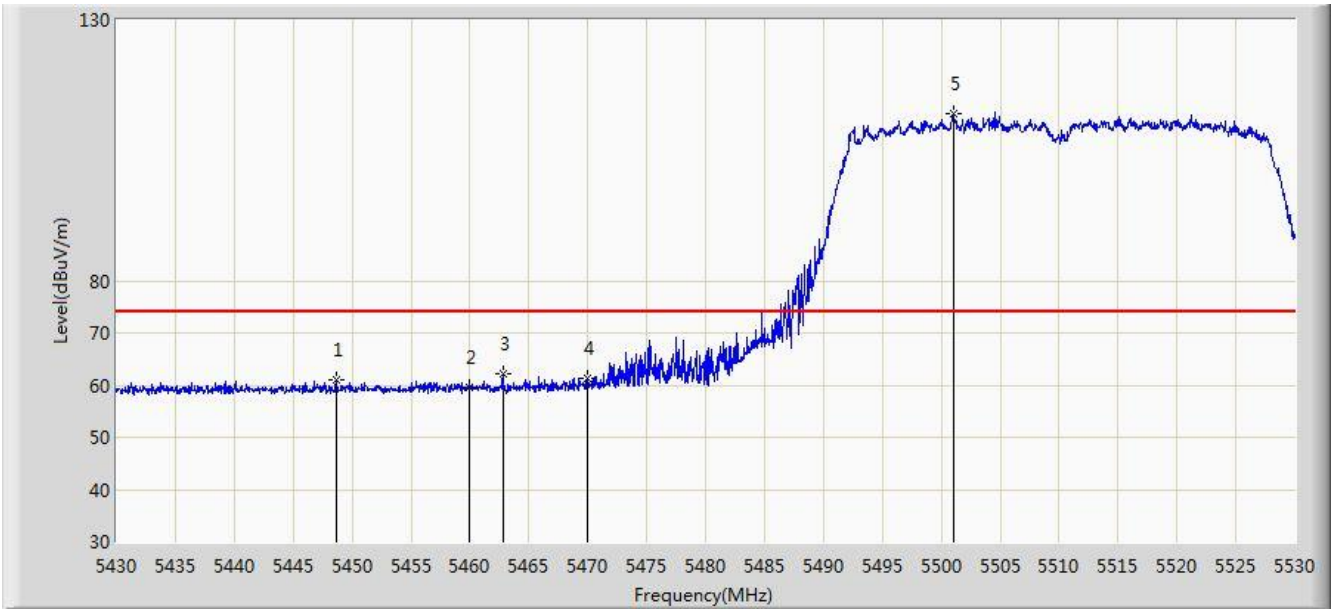

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.650	61.105	56.954	-12.895	74.000	4.151	PK
2			5460.000	59.440	55.260	-14.560	74.000	4.180	PK
3			5462.800	62.142	57.956	-6.058	68.200	4.186	PK
4			5470.000	61.432	57.230	-6.768	68.200	4.202	PK
5			5501.100	112.081	107.806	N/A	N/A	4.275	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:09
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

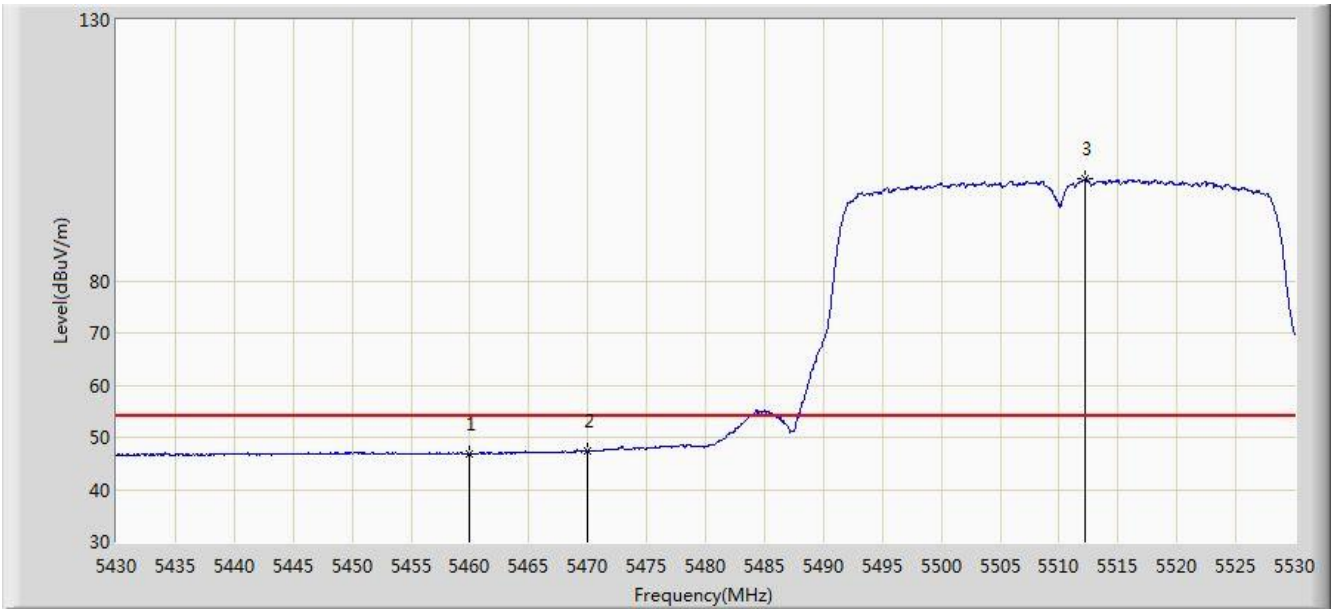

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.948	42.768	-7.052	54.000	4.180	AV
2			5470.000	47.262	43.060	N/A	N/A	4.202	AV
3			5512.250	99.580	95.272	N/A	N/A	4.308	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:22
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

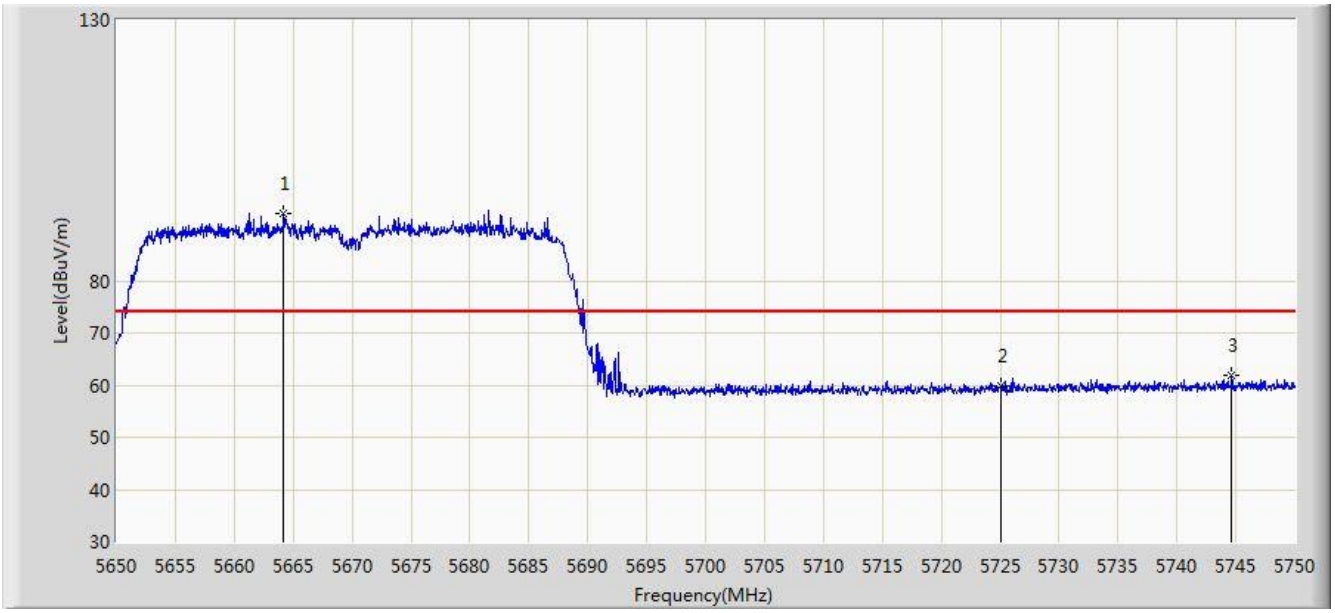

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5664.150	93.021	88.297	N/A	N/A	4.724	PK
2			5725.000	59.955	54.926	-14.045	74.000	5.029	PK
3			5744.650	61.818	56.665	-12.182	74.000	5.152	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:24
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

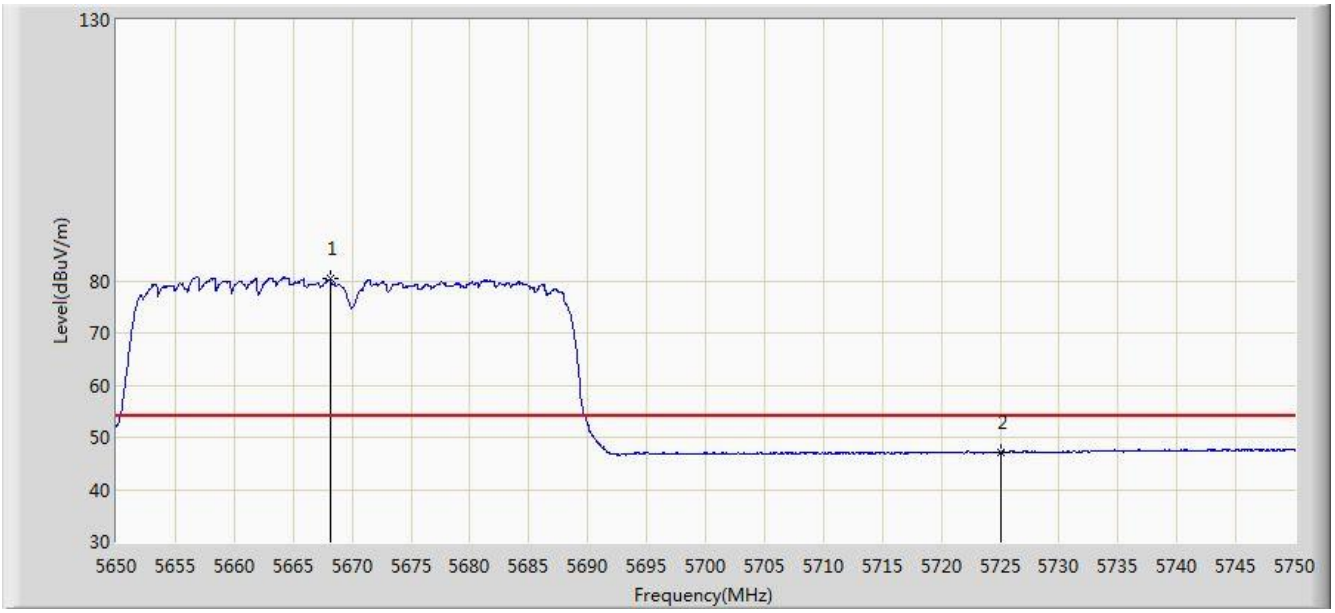

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5668.150	80.304	75.564	N/A	N/A	4.739	AV
2			5725.000	47.145	42.116	-6.855	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:17
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

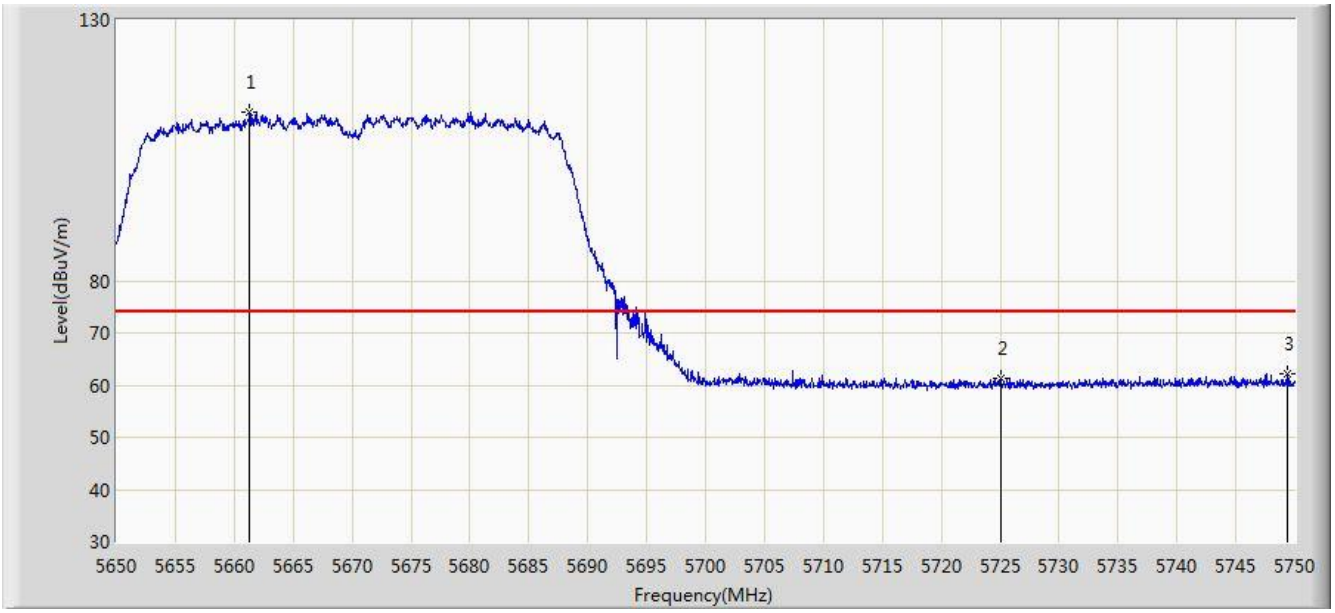

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5661.300	112.449	107.737	N/A	N/A	4.712	PK
2			5725.000	61.415	56.386	-12.585	74.000	5.029	PK
3			5749.350	62.175	56.995	-11.825	74.000	5.180	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:22
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

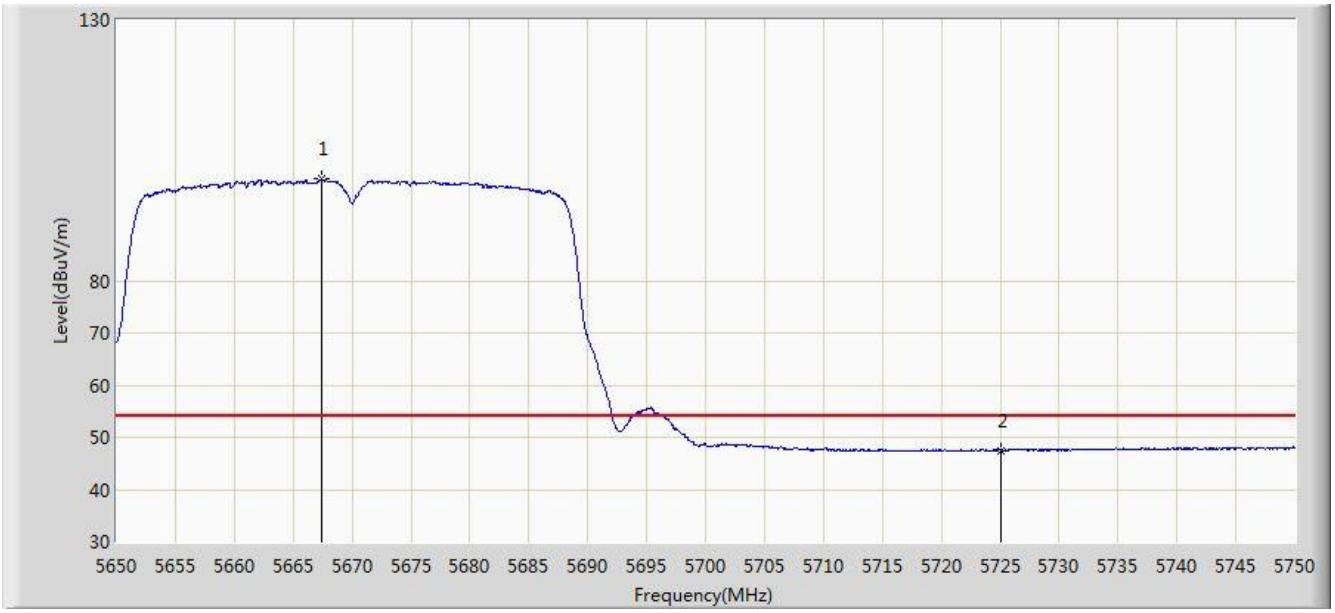

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5667.400	99.497	94.760	N/A	N/A	4.737	AV
2			5725.000	47.518	42.489	-6.482	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:34
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

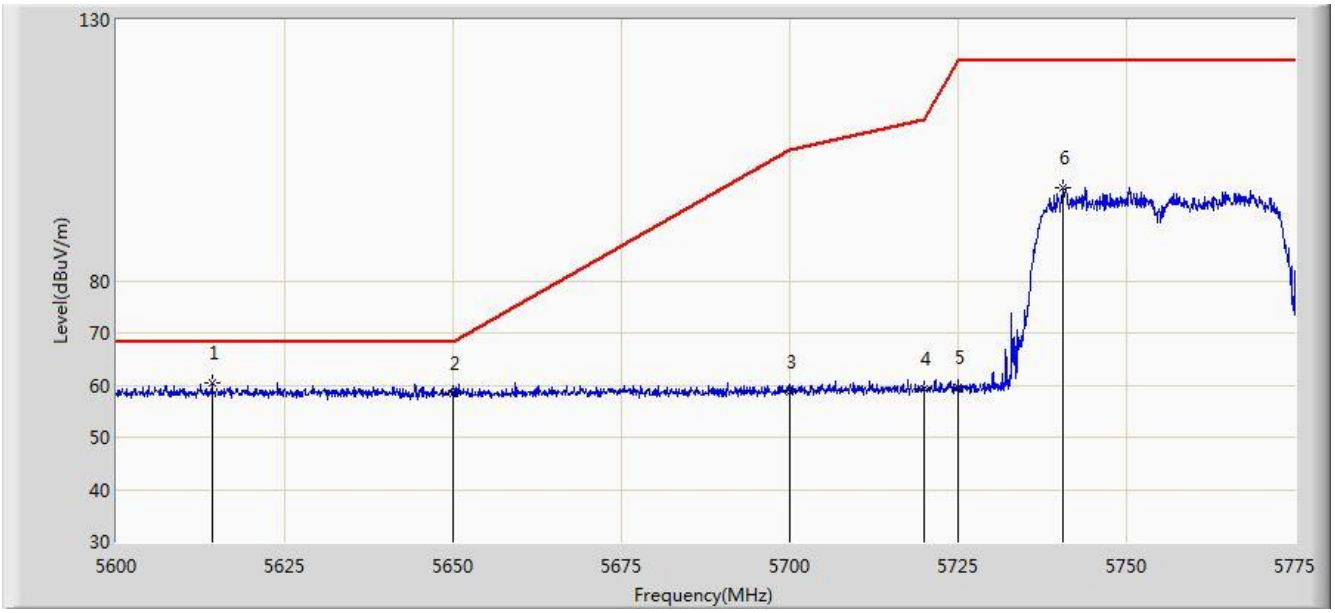

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5614.175	60.410	55.846	-7.790	68.200	4.563	PK
2			5650.000	58.488	53.817	-9.712	68.200	4.671	PK
3			5700.000	58.638	53.760	-46.562	105.200	4.878	PK
4			5720.000	59.300	54.303	-51.500	110.800	4.997	PK
5			5725.000	59.671	54.642	-62.529	122.200	5.029	PK
6			5740.612	97.927	92.798	N/A	N/A	5.129	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:26
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

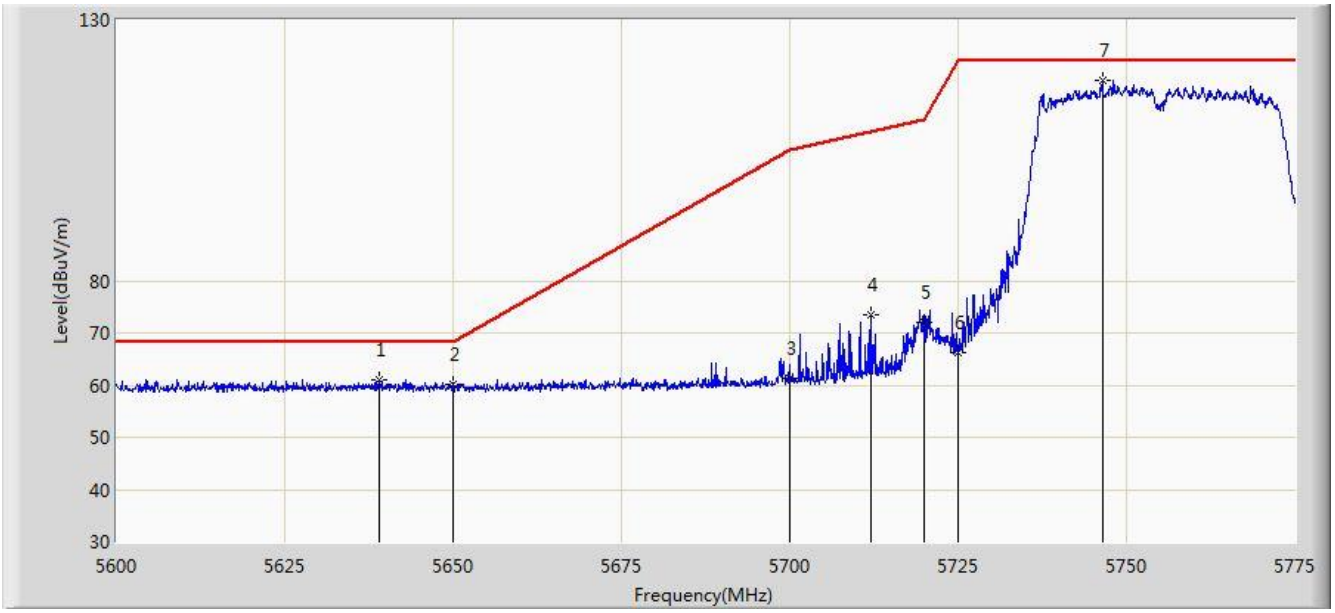

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.937	60.982	56.347	-7.218	68.200	4.635	PK
2			5650.000	60.119	55.448	-8.081	68.200	4.671	PK
3			5700.000	61.165	56.287	-44.035	105.200	4.878	PK
4			5712.000	73.477	68.532	-35.085	108.562	4.945	PK
5			5720.000	72.083	67.086	-38.717	110.800	4.997	PK
6			5725.000	66.244	61.215	-55.956	122.200	5.029	PK
7			5746.388	118.335	113.172	N/A	N/A	5.163	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:39
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

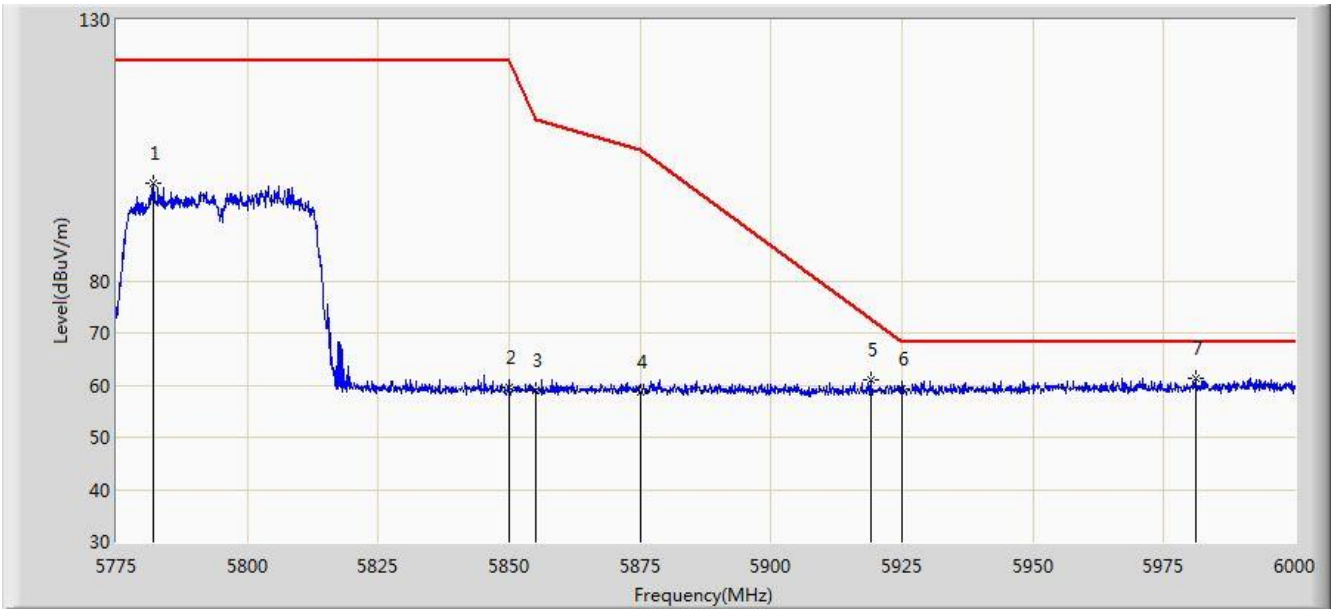

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5781.975	98.605	93.254	N/A	N/A	5.351	PK
2			5850.000	59.670	53.944	-62.530	122.200	5.726	PK
3			5855.000	59.101	53.355	-51.699	110.800	5.746	PK
4			5875.000	58.773	52.953	-46.427	105.200	5.820	PK
5			5919.000	60.919	54.967	-11.705	72.623	5.951	PK
6			5925.000	59.324	53.358	-8.876	68.200	5.967	PK
7			5980.987	61.413	55.334	-6.787	68.200	6.079	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 05:36
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

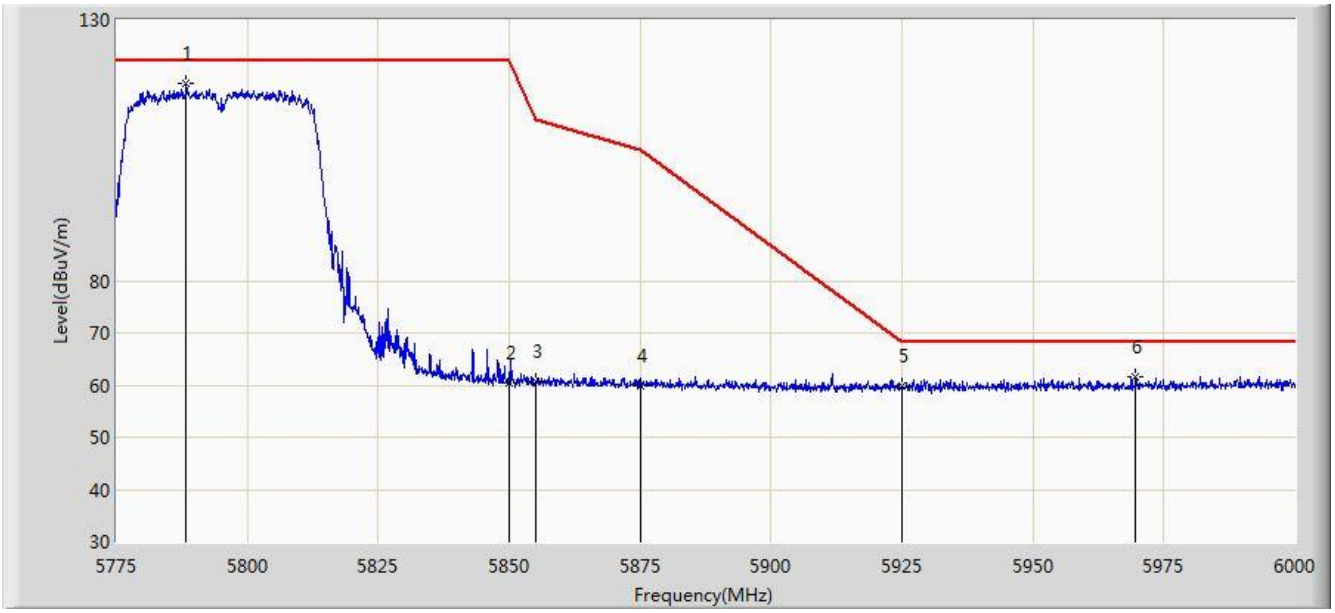

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5788.275	117.732	112.349	N/A	N/A	5.383	PK
2			5850.000	60.344	54.618	-61.856	122.200	5.726	PK
3			5855.000	60.680	54.934	-50.120	110.800	5.746	PK
4			5875.000	59.972	54.152	-45.228	105.200	5.820	PK
5			5925.000	59.874	53.908	-8.326	68.200	5.967	PK
6			5969.625	61.722	55.662	-6.478	68.200	6.061	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 14:03
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

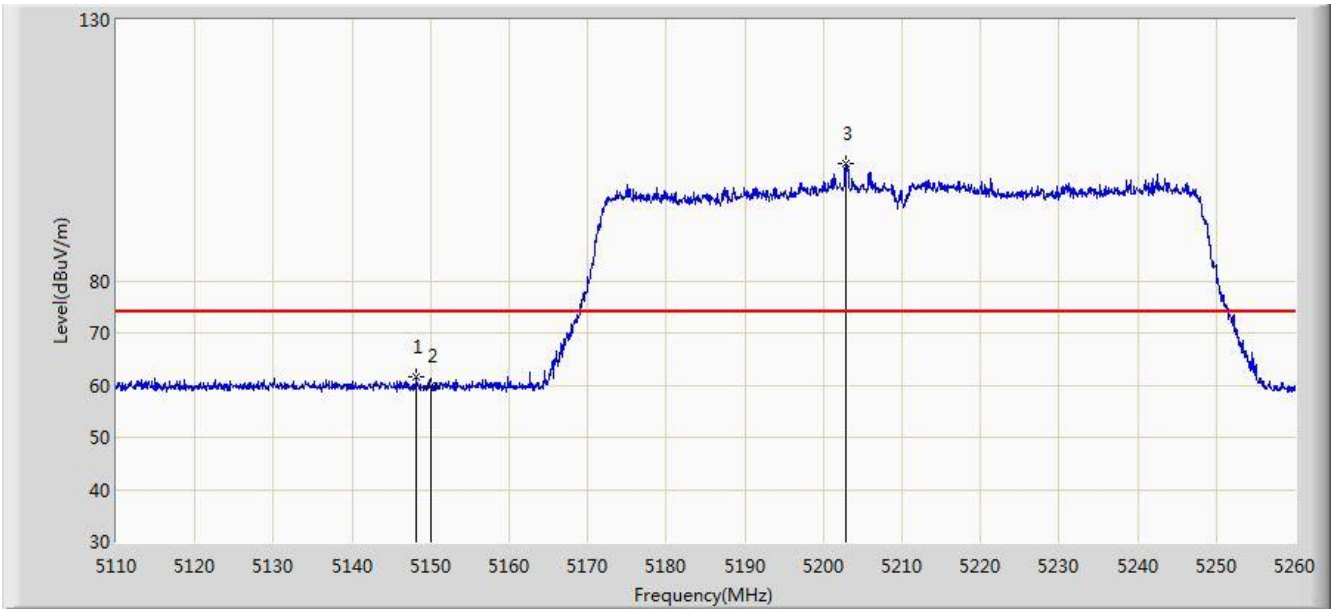

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.250	61.641	57.466	-12.359	74.000	4.174	PK
2			5150.000	59.744	55.575	-14.256	74.000	4.170	PK
3			5202.925	102.456	98.466	N/A	N/A	3.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/03 - 14:06
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT - Omni Antenna (AP-ANT-20W)	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

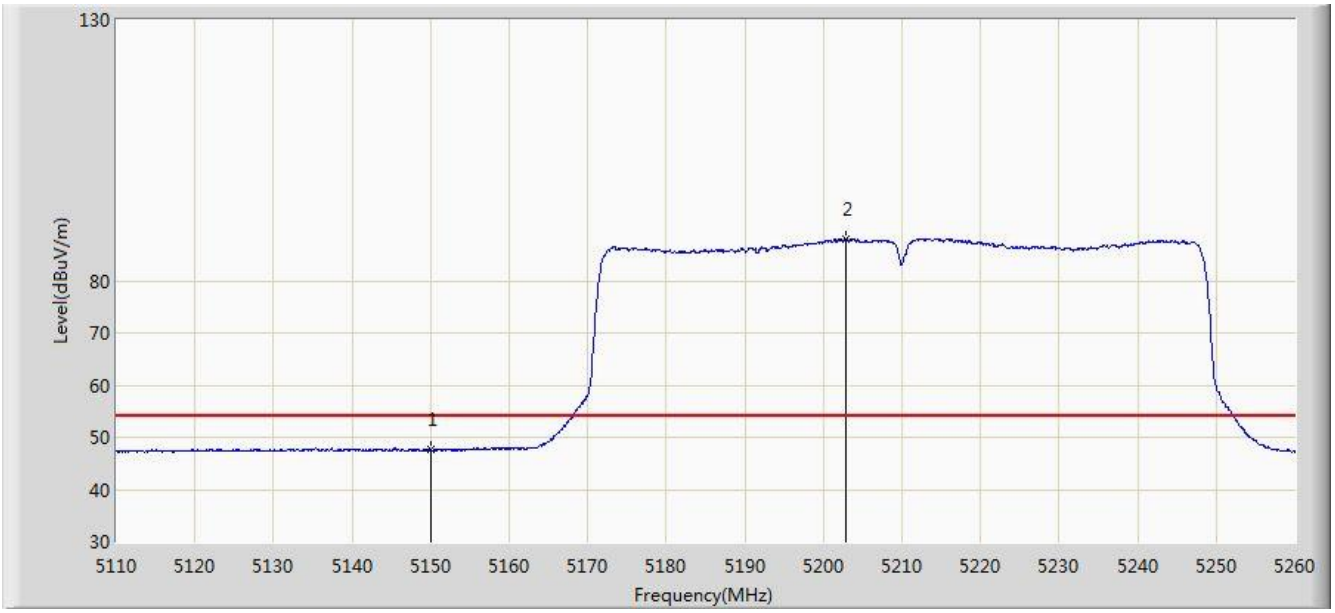

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.659	43.490	-6.341	54.000	4.170	AV
2			5202.775	87.937	83.947	N/A	N/A	3.991	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)