


Maximum conducted output power:
Channel 155

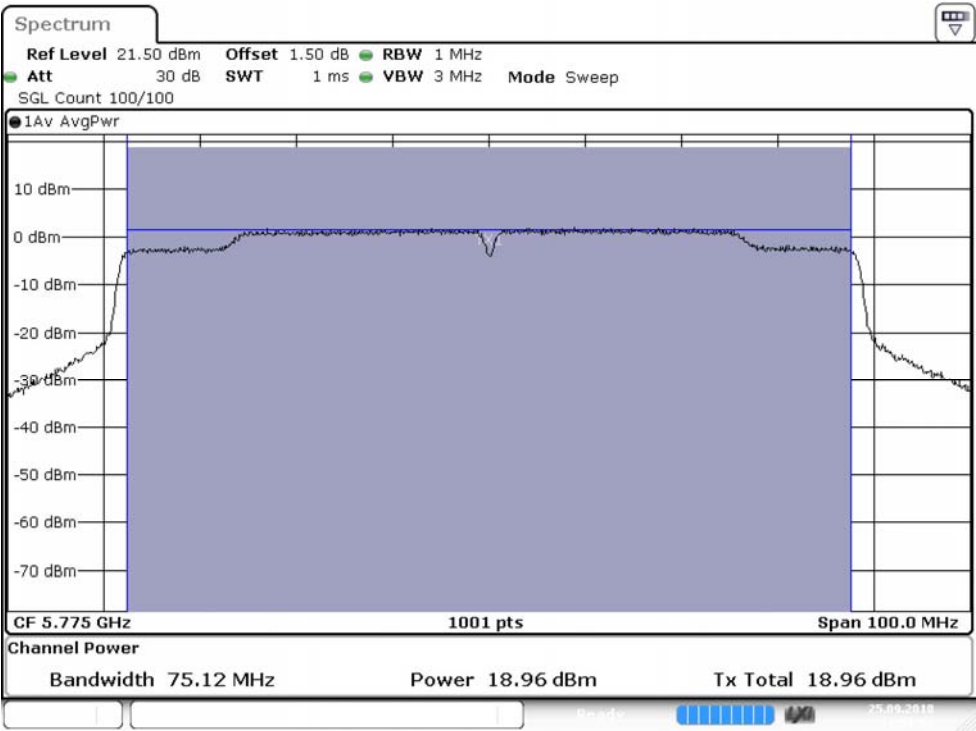

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 2: SISO B: 發射器 802.11ac-160BW

6 dB 頻寬：1MHz

視頻頻寬：3MHz

檢測器：峰值

環境溫度：21 °C

測試日期：107 年 09 月 25 日

環境濕度：53 %


Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	195	260	390	520	585	650	780	866.7
50 (U-NII-1)	5250	11.02	10.97	10.83	10.77	10.65	10.59	10.41	10.38	10.22	10.14
50 (U-NII-2A)	5250	10.96	10.83	10.74	10.69	10.53	10.47	10.32	10.29	10.16	10.08
114	5570	13.56	13.44	13.39	13.26	13.11	13.08	12.98	12.84	12.73	12.63

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	11.02	30	--
50 (U-NII-2A)	5250	76.399	10.96	24	29.83
114	5570	152.797	13.56	24	32.84


99% Occupied Bandwidth:
Channel 50

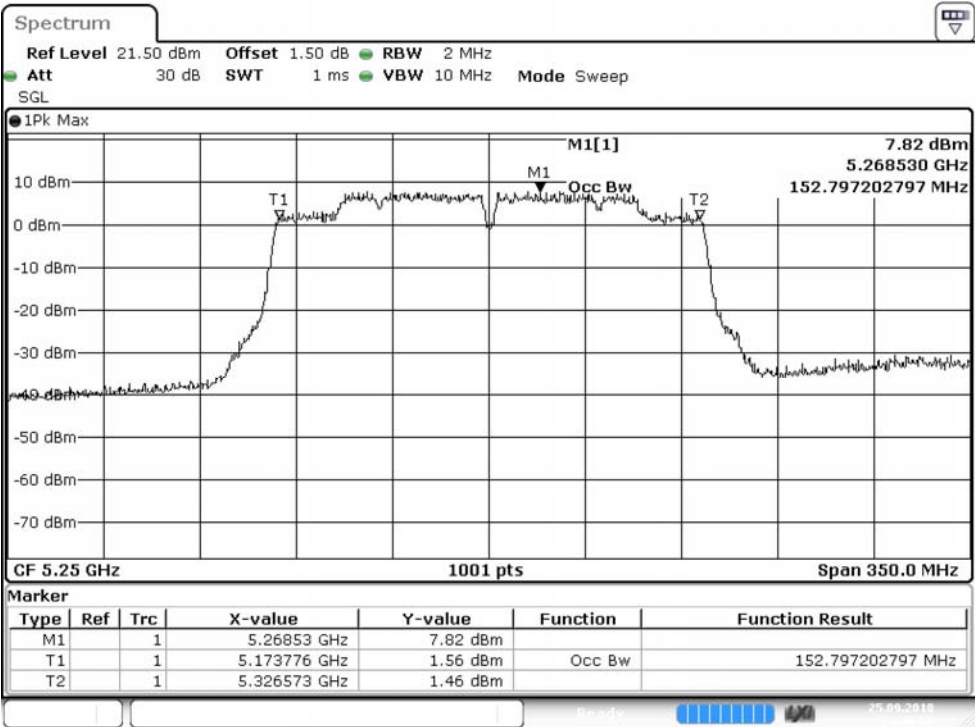


Channel 114

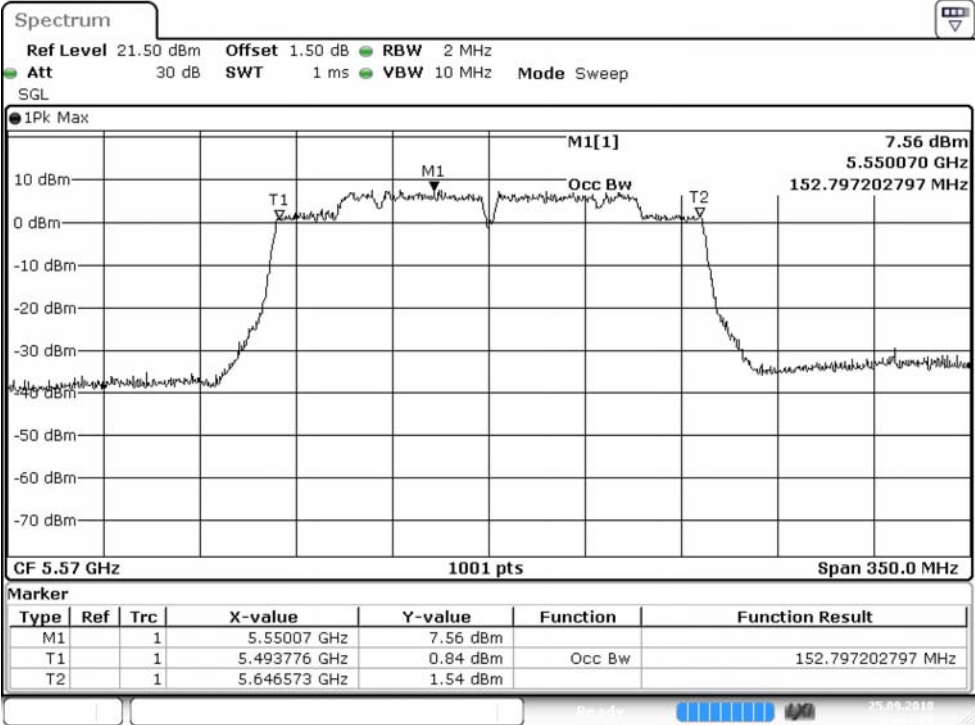


Maximum conducted output power:
Channel 50 (U-NII-1)

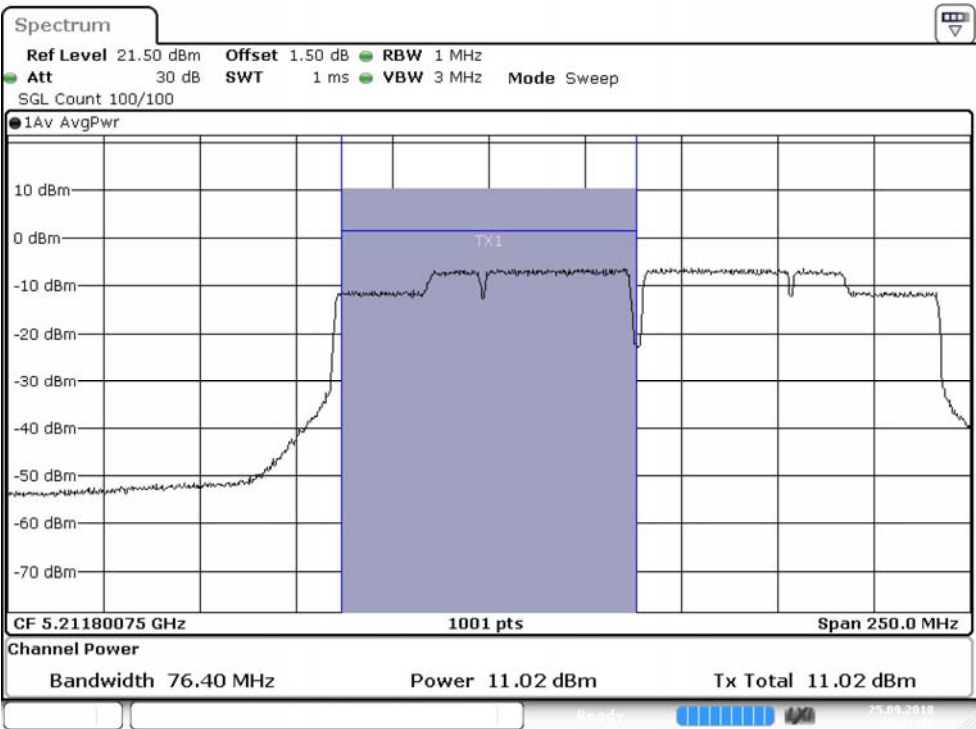

Maximum conducted output power:
Channel 50 (U-NII-2A)

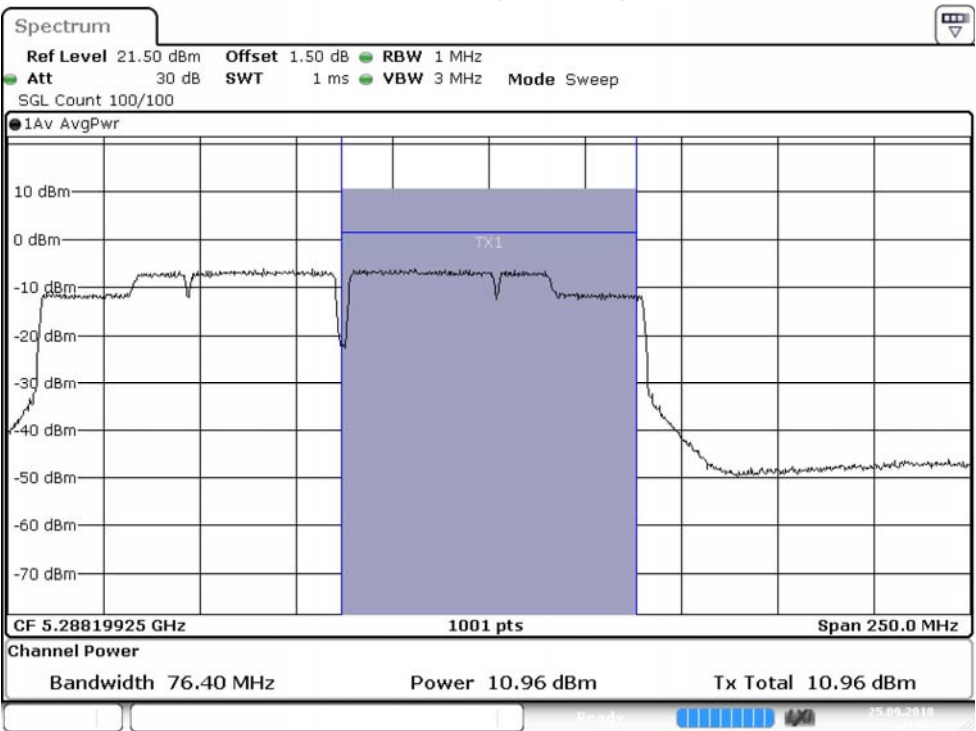

Maximum conducted output power:
Channel 114

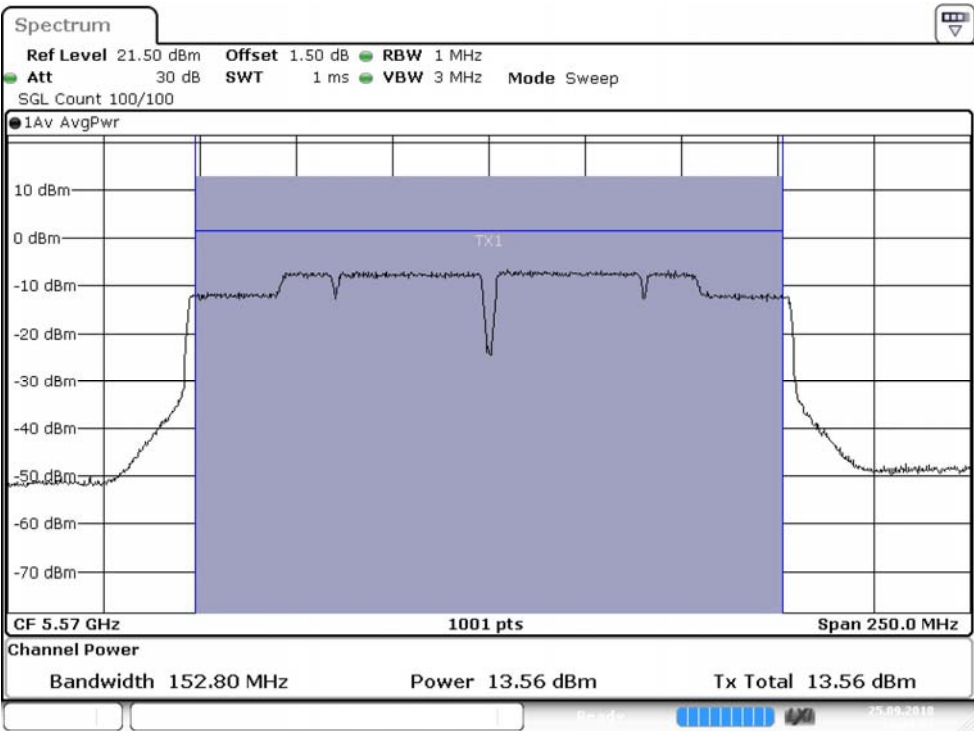

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 3: MIMO: 發射器 802.11n-20BW

檢測器：峰值

環境溫度：21 °C

測試日期：107年09月25日

環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
36	5180	15.35	--	--	--	--	--	--	--
44	5220	17.77	17.62	17.54	17.43	17.38	17.26	17.14	17.05
48	5240	17.71	--	--	--	--	--	--	--
52	5260	17.74	--	--	--	--	--	--	--
60	5300	17.73	17.66	17.57	17.41	17.39	17.21	17.19	17.02
64	5320	14.81	--	--	--	--	--	--	--
100	5500	15.47	--	--	--	--	--	--	--
116	5580	17.81	17.72	17.63	17.58	17.42	17.31	17.22	17.15
140	5700	14.40	--	--	--	--	--	--	--
144(U-NII-2C)	5720	16.74	16.65	16.59	16.43	16.33	16.27	16.14	16.08
144(U-NII-3)	5720	11.12	11.07	10.95	10.84	10.74	10.66	10.52	10.42
149	5745	17.90	--	--	--	--	--	--	--
157	5785	17.81	17.76	17.69	17.54	17.43	17.35	17.29	17.11
165	5825	17.78	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4
36	5180	15.44	--	--	--	--	--	--	--
44	5220	17.95	17.82	17.75	17.64	17.53	17.42	17.31	17.29
48	5240	17.98	--	--	--	--	--	--	--
52	5260	17.99	--	--	--	--	--	--	--
60	5300	17.71	17.65	17.55	17.42	17.38	17.29	17.16	17.04
64	5320	14.84	--	--	--	--	--	--	--
100	5500	15.40	--	--	--	--	--	--	--
116	5580	17.98	17.88	17.73	17.61	17.55	17.47	17.39	17.25
140	5700	14.49	--	--	--	--	--	--	--
144(U-NII-2C)	5720	16.81	16.76	16.62	16.52	16.44	16.38	16.22	16.14
144(U-NII-3)	5720	11.32	11.24	11.17	11.05	10.93	10.86	10.75	10.63
149	5745	17.88	--	--	--	--	--	--	--
157	5785	17.92	17.83	17.71	17.64	17.58	17.49	17.32	17.27
165	5825	17.83	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	15.35	15.44	18.41	30	--
44	5220	--	17.77	17.95	20.87	30	--
48	5240	--	17.71	17.98	20.86	30	--
52	5260	17.932	17.74	17.99	20.88	24	23.54
60	5300	17.882	17.73	17.71	20.73	24	23.52
64	5320	17.932	14.81	14.84	17.84	24	23.54
100	5500	17.932	15.47	15.40	18.45	24	23.54
116	5580	17.932	17.81	17.98	20.91	24	23.54
140	5700	17.932	14.40	14.49	17.46	24	23.54
144(U-NII-2C)	5720	14.066	16.74	16.81	19.79	24	22.48
144(U-NII-3)	5720	--	11.12	11.32	14.23	30	--
149	5745	--	17.90	17.88	20.90	30	--
157	5785	--	17.81	17.92	20.88	30	--
165	5825	--	17.78	17.83	20.82	30	--

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 52 (Chain A)

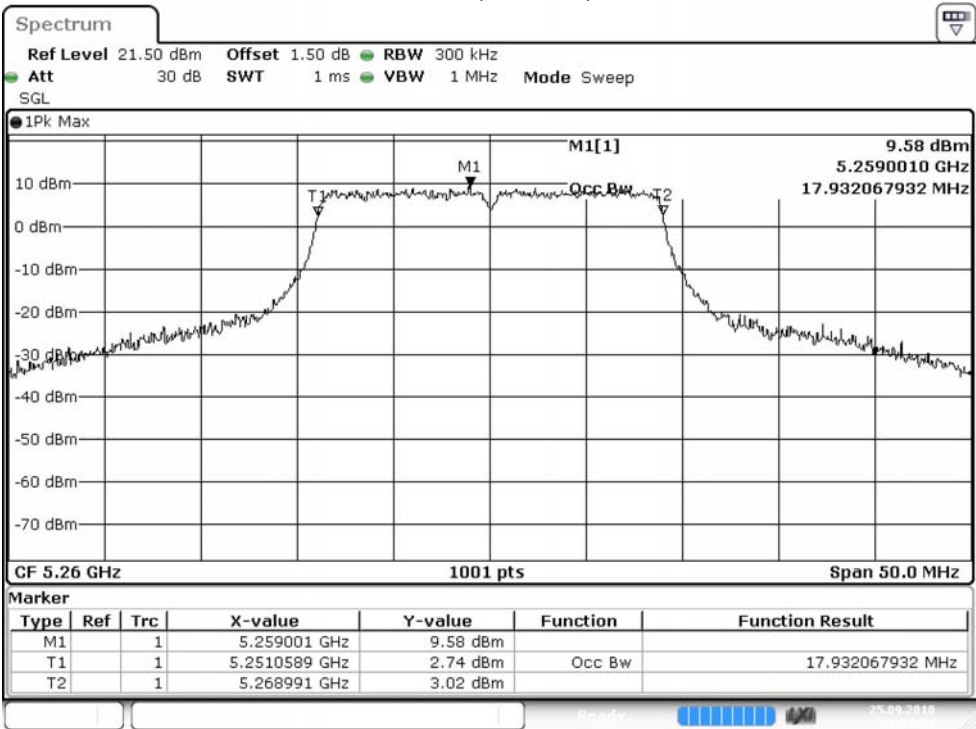


Channel 52 (Chain B)

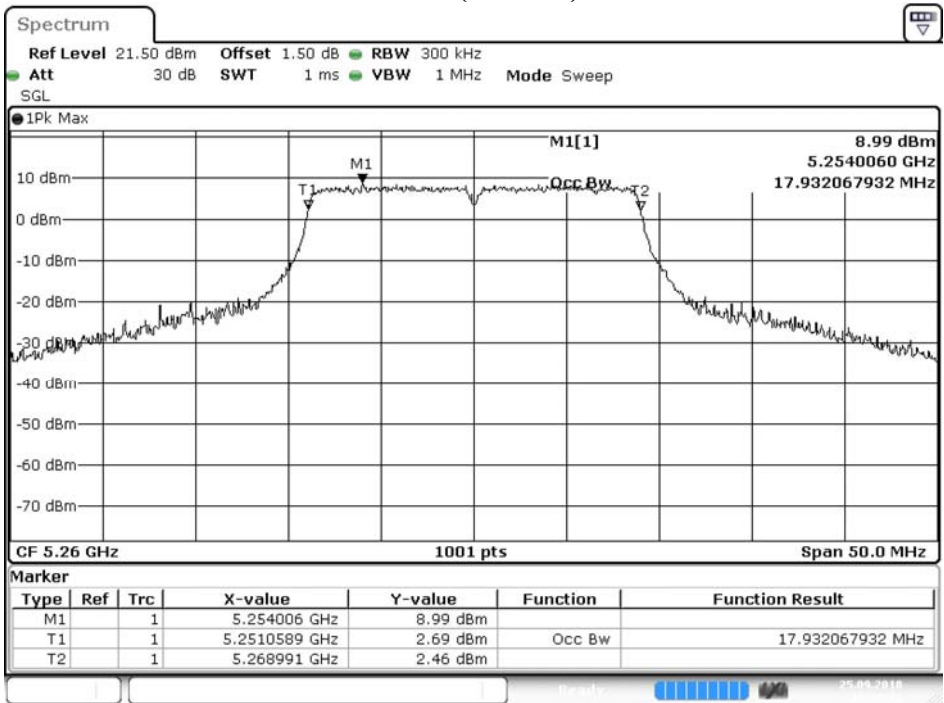


Date: 25.SEP.2018 16:00:31

Channel 60 (Chain A)

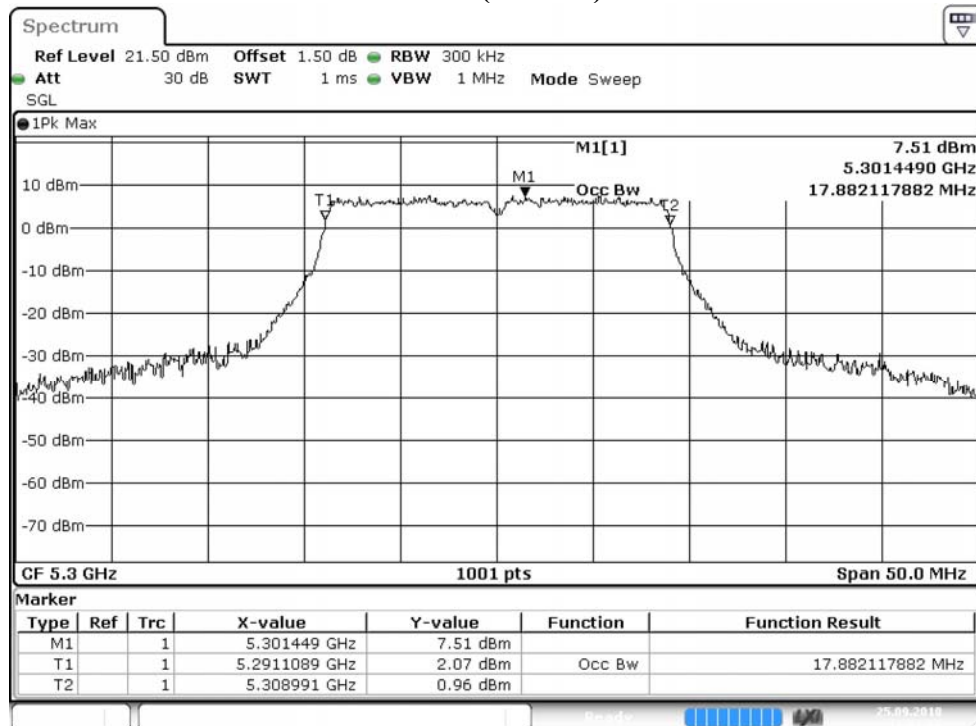


Channel 60 (Chain B)

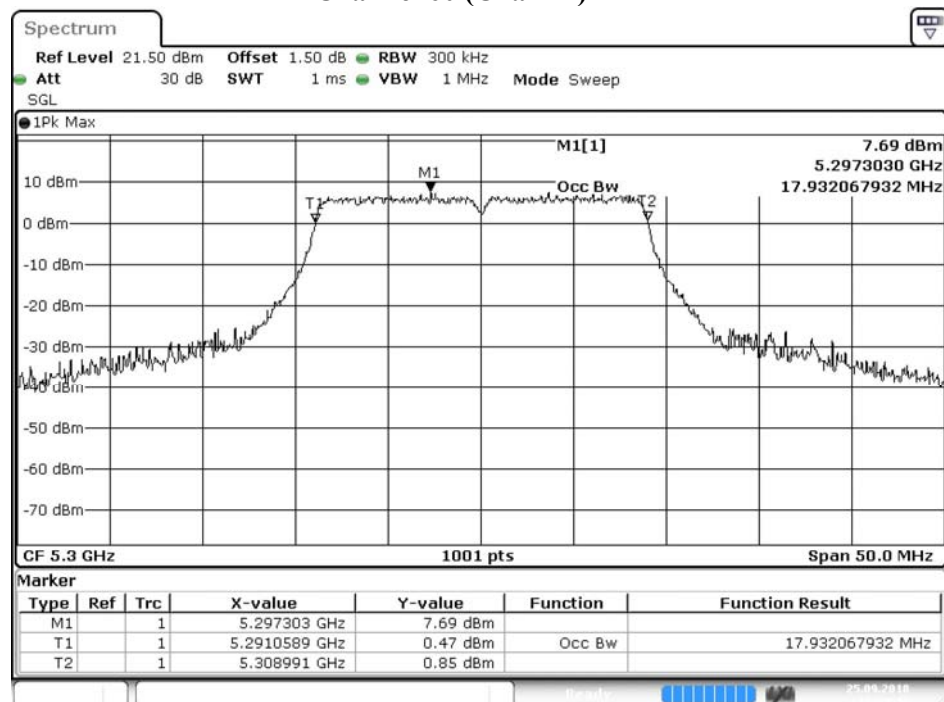


Date: 25.SEP.2018 16:03:47

Channel 64 (Chain A)

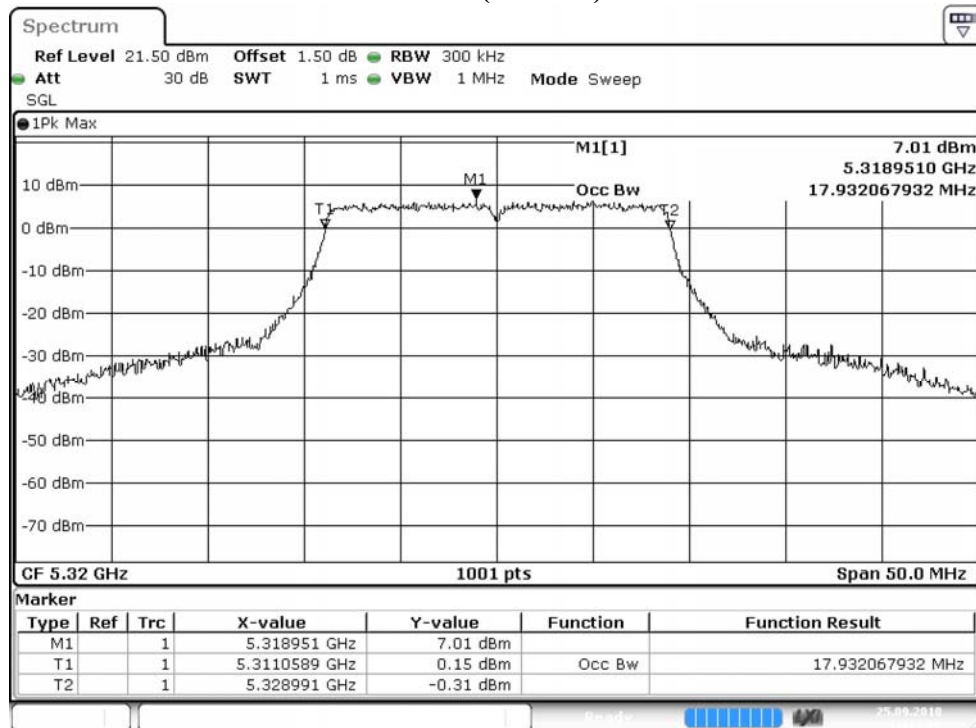


Channel 64 (Chain B)

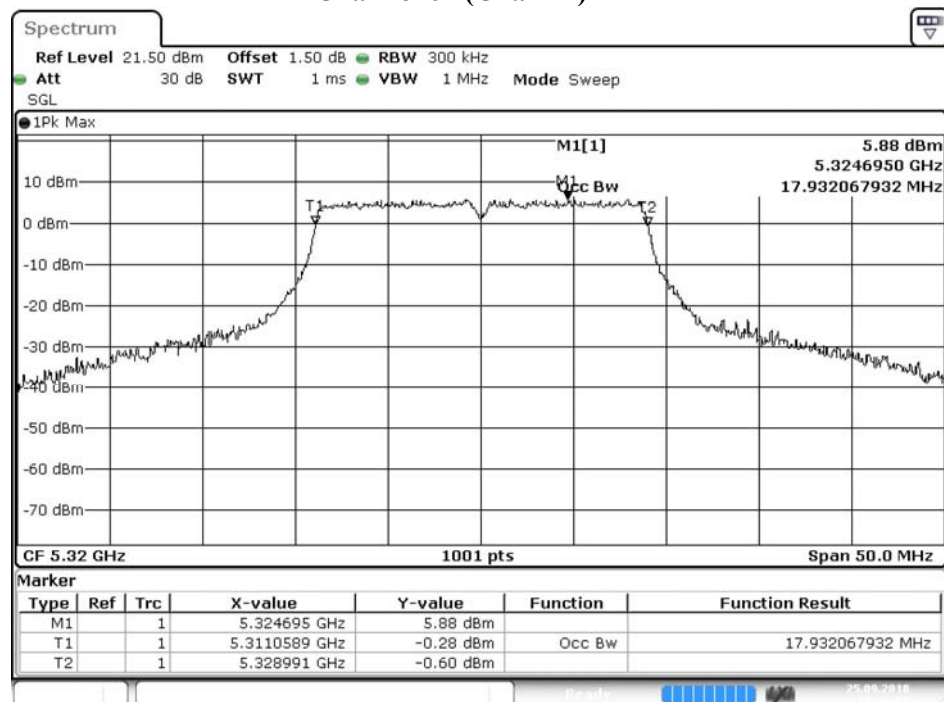


Date: 25.SEP.2018 16:06:59

Channel 100 (Chain A)

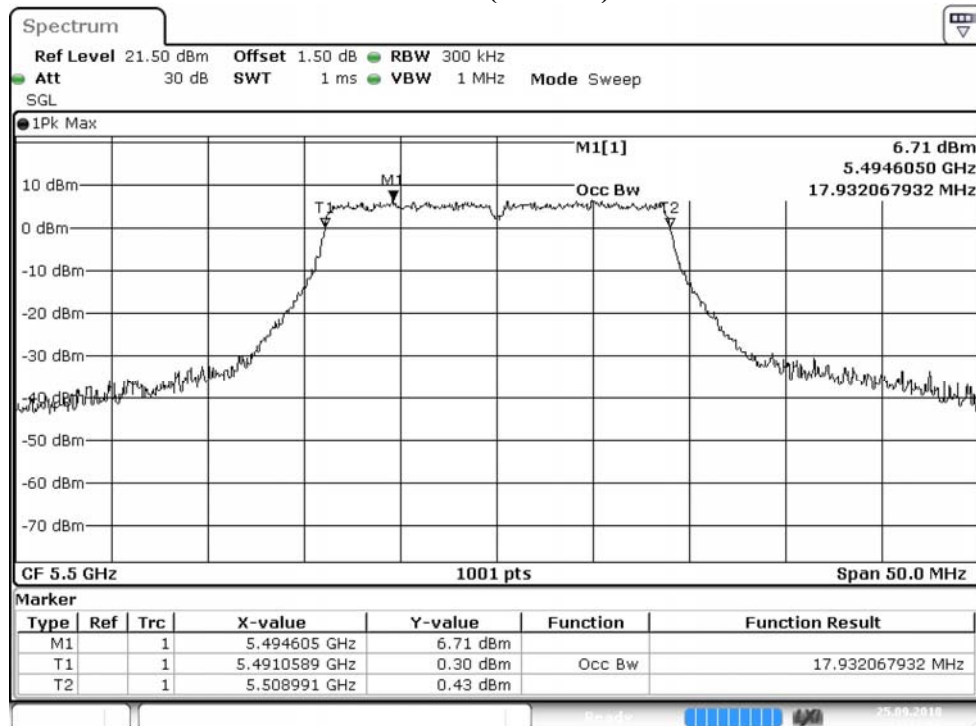


Channel 100 (Chain B)

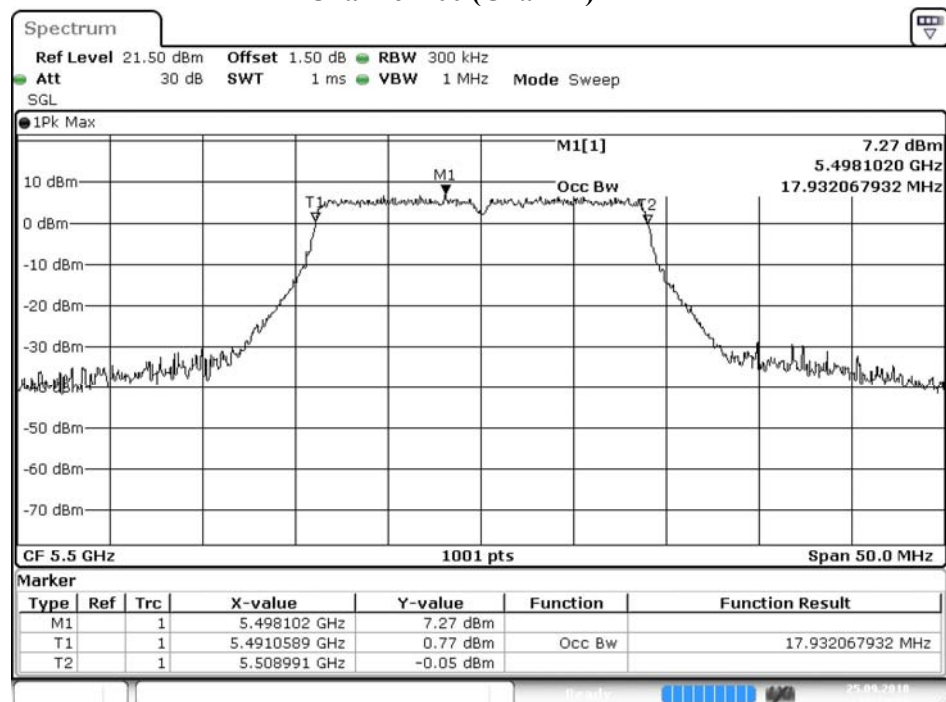


Date: 25.SEP.2018 16:10:28

Channel 116 (Chain A)

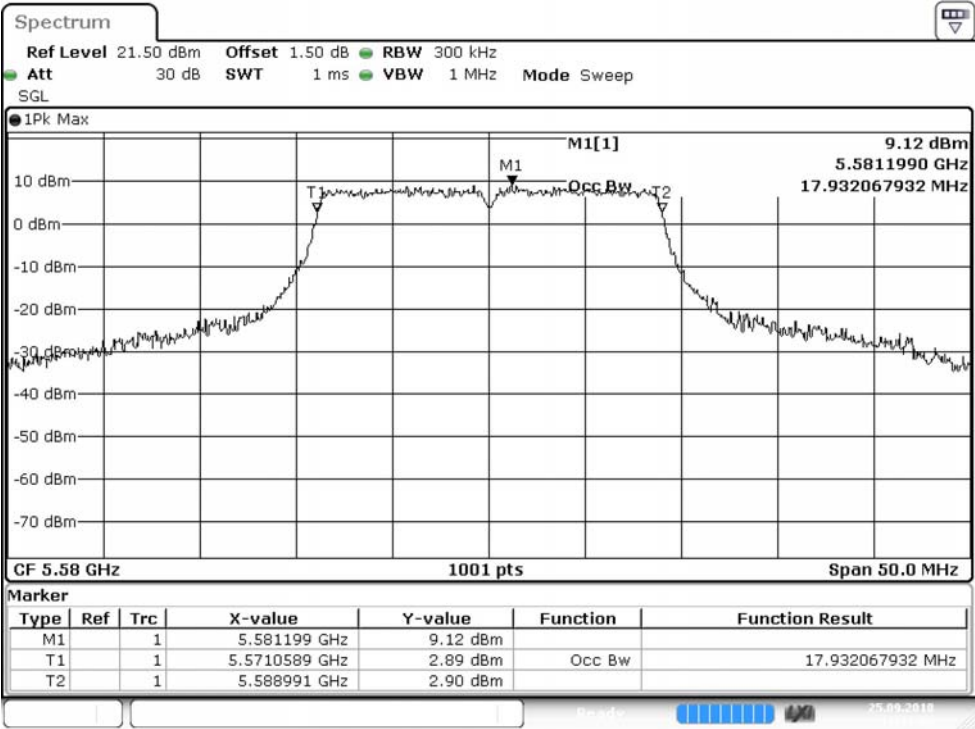


Channel 116 (Chain B)

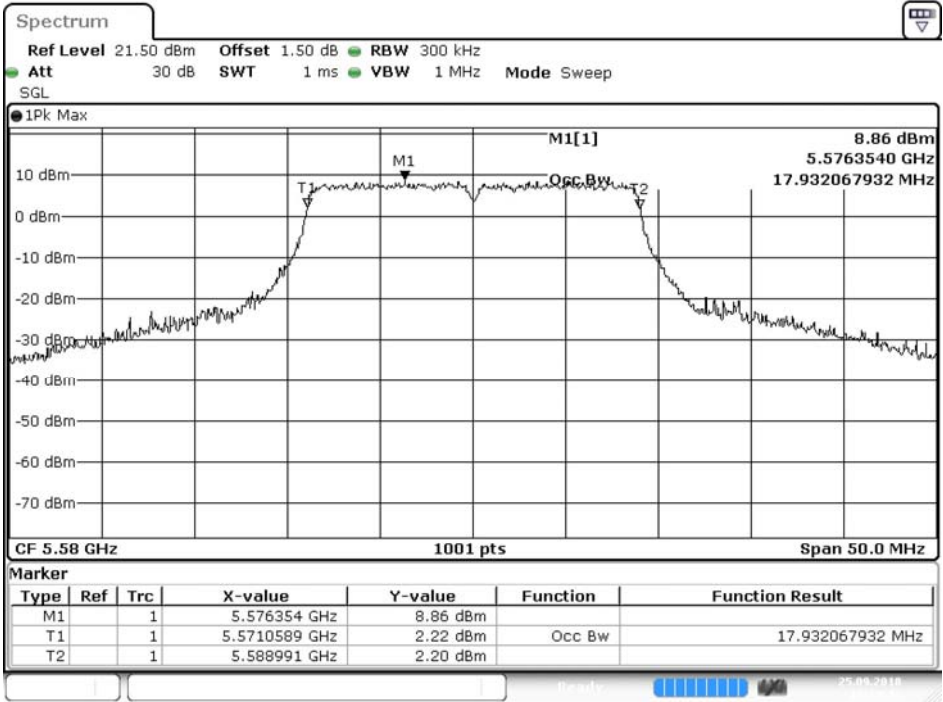


Date: 25.SEP.2018 16:13:43

Channel 140 (Chain A)

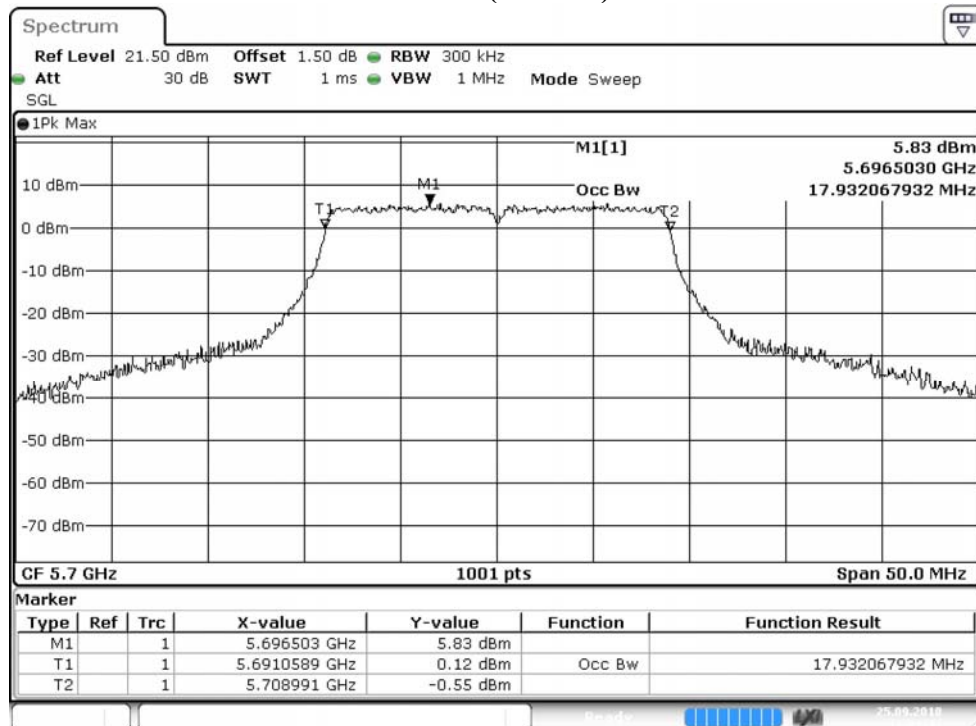


Channel 140 (Chain B)

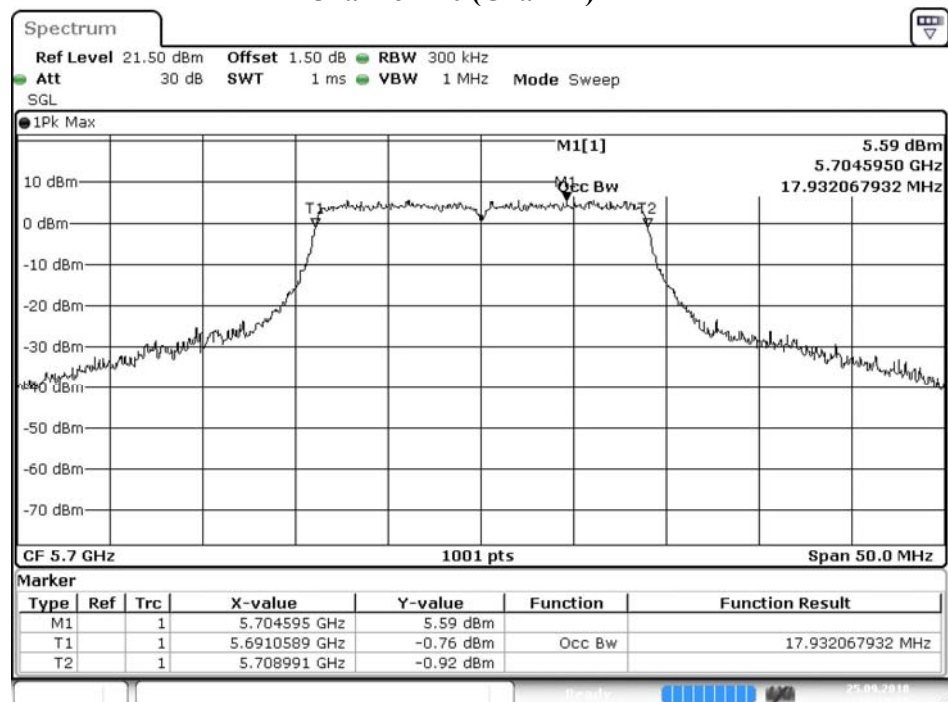


Date: 25.SEP.2018 16:17:20

Channel 144 (Chain A)

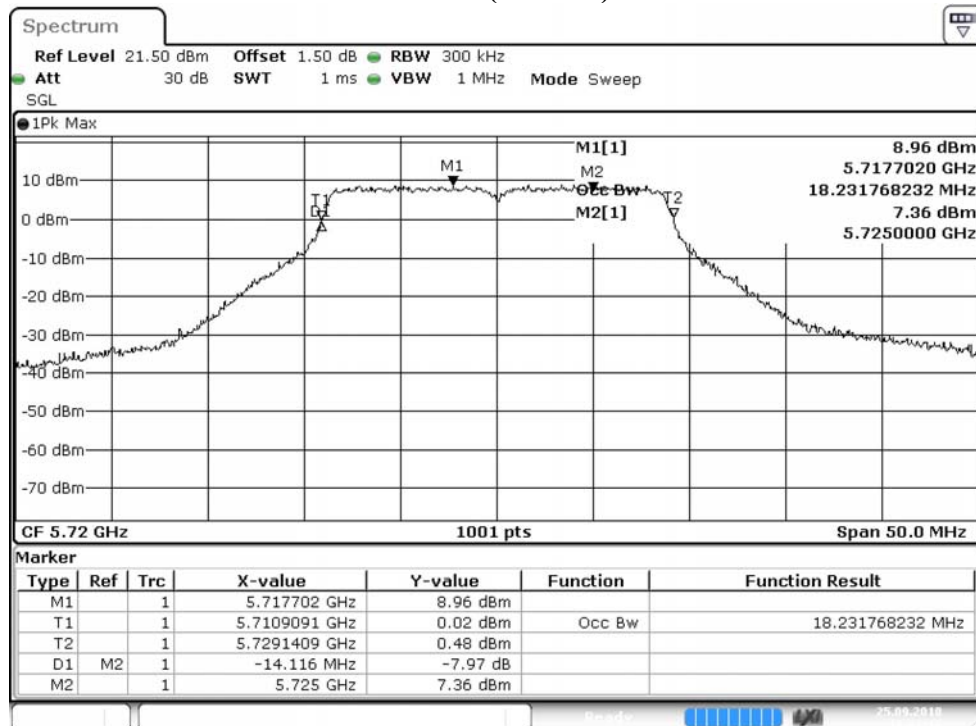


Channel 144 (Chain B)

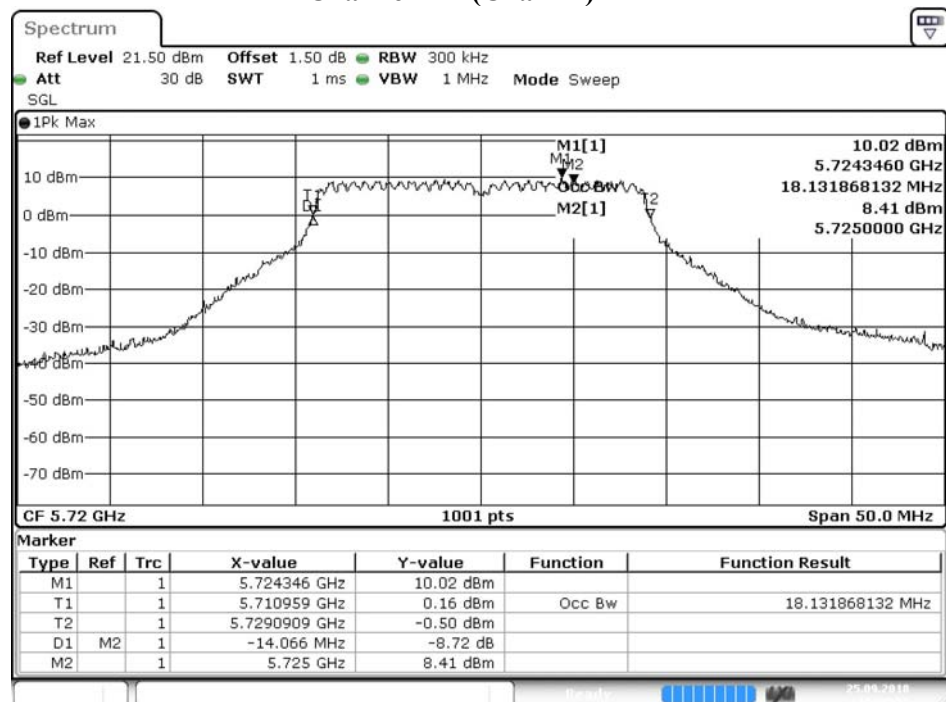


Date: 25.SEP.2018 15:20:51


Maximum conducted output power:
Channel 144 (U-NII-2C) (Chain A)

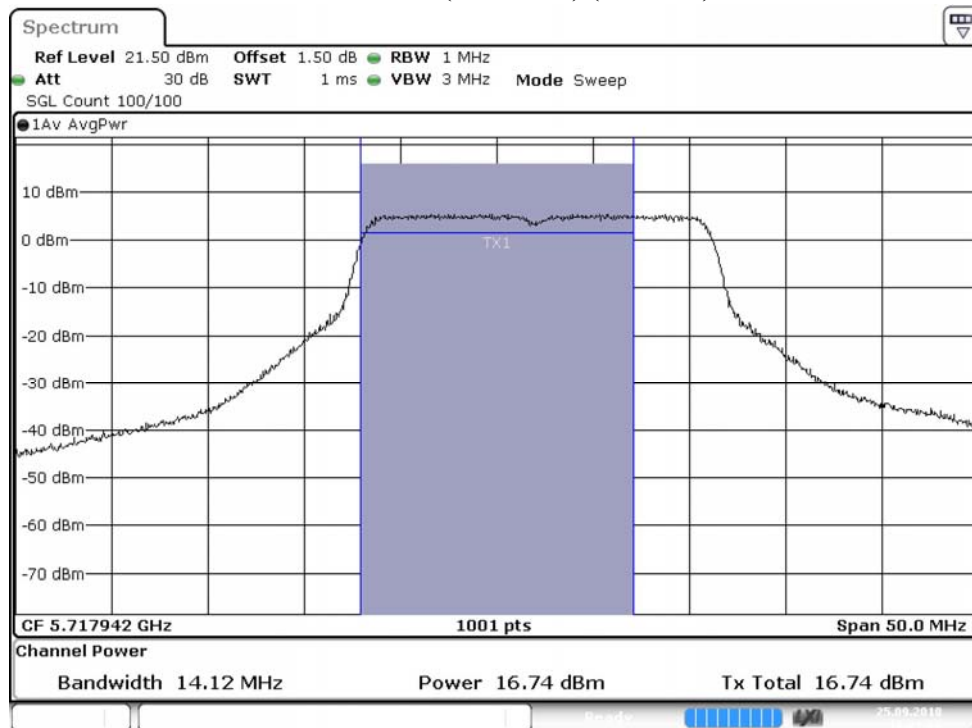

Maximum conducted output power:
Channel 144 (U-NII-3) (Chain A)

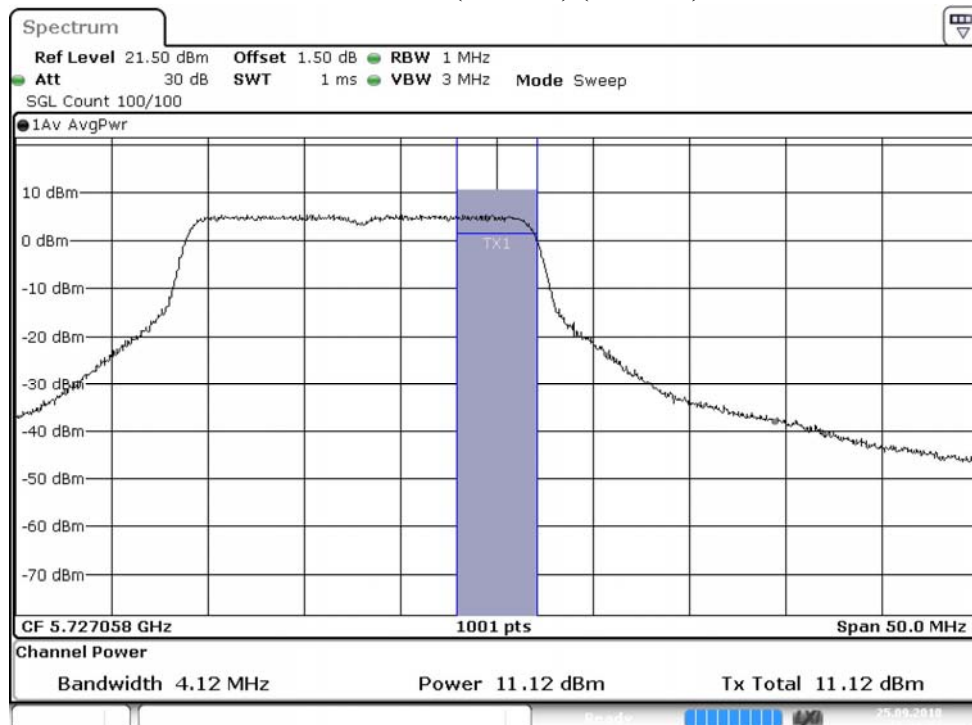


Maximum conducted output power:
Channel 144 (U-NII-2C) (Chain B)

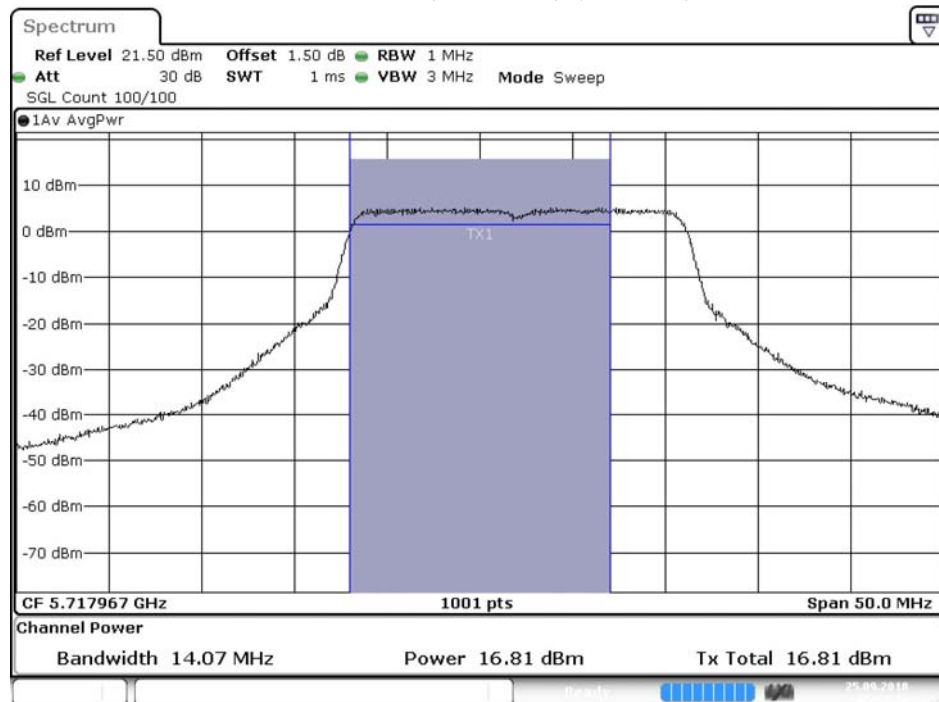

Date: 25.SEP.2018 15:23:48

Maximum conducted output power:
Channel 144 (U-NII-3) (Chain B)

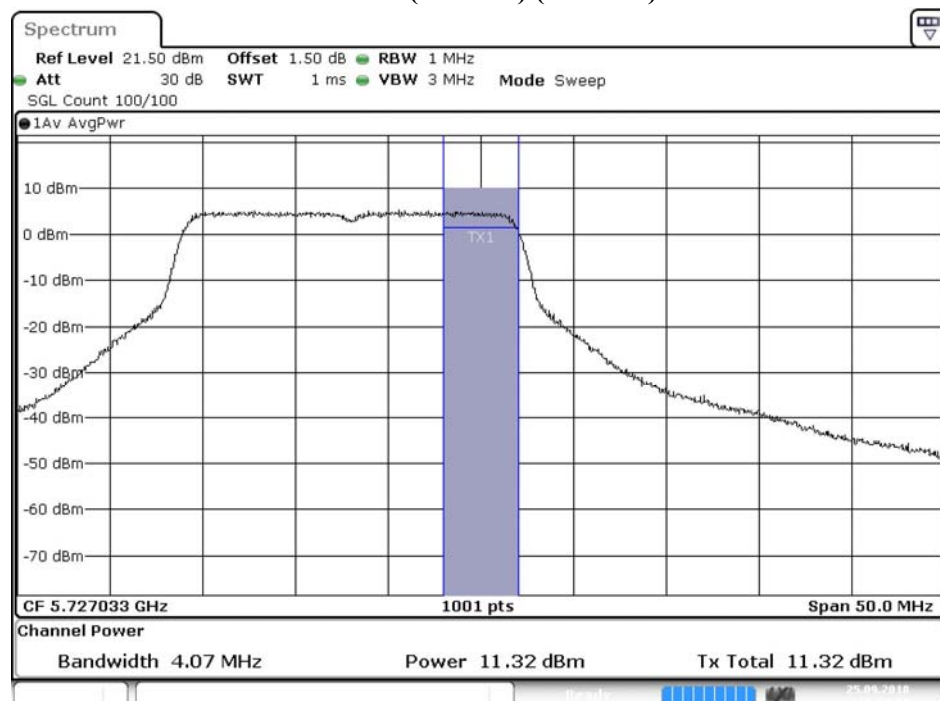

Date: 25.SEP.2018 15:24:10

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 3: MIMO: 發射器 802.11n-40BW

檢測器：峰值

環境溫度：21 °C

測試日期：107 年 09 月 25 日

環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
38	5190	15.43	--	--	--	--	--	--	--
46	5230	17.94	17.86	17.73	17.61	17.59	17.42	17.33	17.29
54	5270	17.86	--	--	--	--	--	--	--
62	5310	13.96	13.81	13.76	13.64	13.52	13.49	13.35	13.22
102	5510	14.27	--	--	--	--	--	--	--
110	5550	17.90	17.85	17.74	17.69	17.51	17.44	17.39	17.27
134	5670	16.93	--	--	--	--	--	--	--
142(U-NII-2C)	5710	17.51	17.47	17.32	17.28	17.11	17.05	16.98	16.83
142(U-NII-3)	5710	7.41	7.36	7.24	7.16	7.07	6.99	6.85	6.74
151	5755	17.75	--	--	--	--	--	--	--
159	5795	17.95	17.87	17.72	17.68	17.55	17.41	17.38	17.24

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		30	60	90	120	180	240	270	300
38	5190	15.32	--	--	--	--	--	--	--
46	5230	17.94	17.87	17.76	17.61	17.53	17.48	17.39	17.28
54	5270	17.95	--	--	--	--	--	--	--
62	5310	13.84	13.75	13.62	13.51	13.47	13.35	13.28	13.16
102	5510	14.46	--	--	--	--	--	--	--
110	5550	17.98	17.83	17.74	17.62	17.54	17.41	17.38	17.26
134	5670	16.93	--	--	--	--	--	--	--
142(U-NII-2C)	5710	17.32	17.27	17.16	17.03	16.97	16.83	16.74	16.66
142(U-NII-3)	5710	7.28	7.17	7.09	6.97	6.85	6.74	6.66	6.52
151	5755	17.80	--	--	--	--	--	--	--
159	5795	17.95	17.88	17.71	17.68	17.55	17.42	17.36	17.29

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	15.43	15.32	18.39	30	--
46	5230	--	17.94	17.94	20.95	30	--
54	5270	36.464	17.86	17.95	20.92	24	26.62
62	5310	36.364	13.96	13.84	16.91	24	26.61
102	5510	36.464	14.27	14.46	17.38	24	26.62
110	5550	36.464	17.90	17.98	20.95	24	26.62
134	5670	36.464	16.93	16.93	19.94	24	26.62
142(U-NII-2C)	5710	39.302	17.51	17.32	20.43	24	26.94
142(U-NII-3)	5710	--	7.41	7.28	10.36	30	--
151	5755	--	17.75	17.80	20.79	30	--
159	5795	--	17.95	17.95	20.96	30	--

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 54 (Chain A)

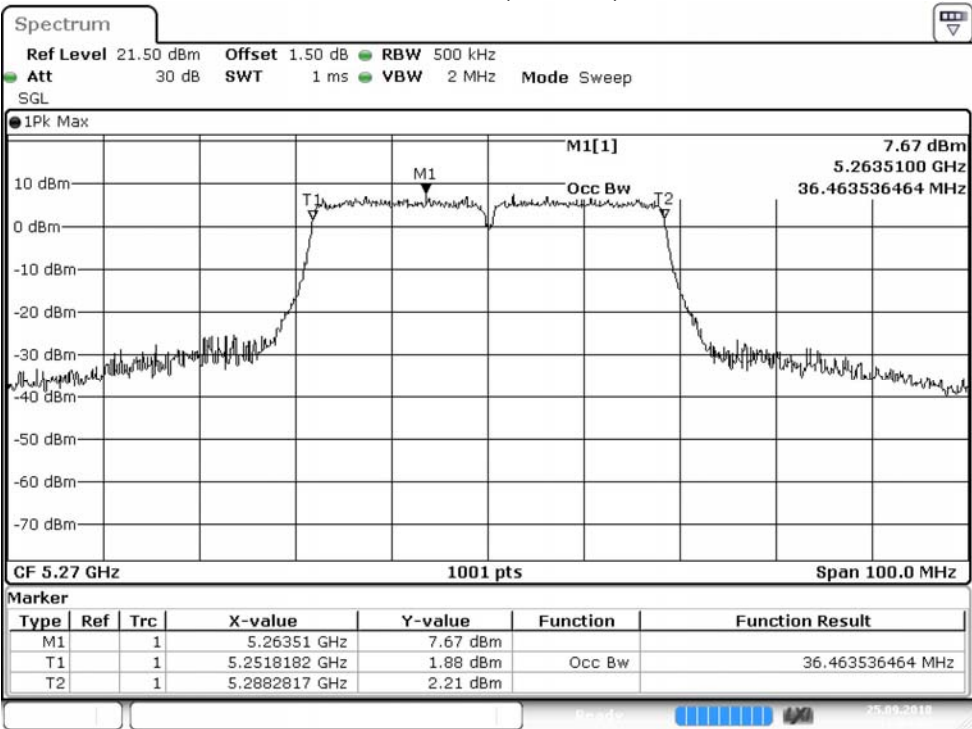


Channel 54 (Chain B)

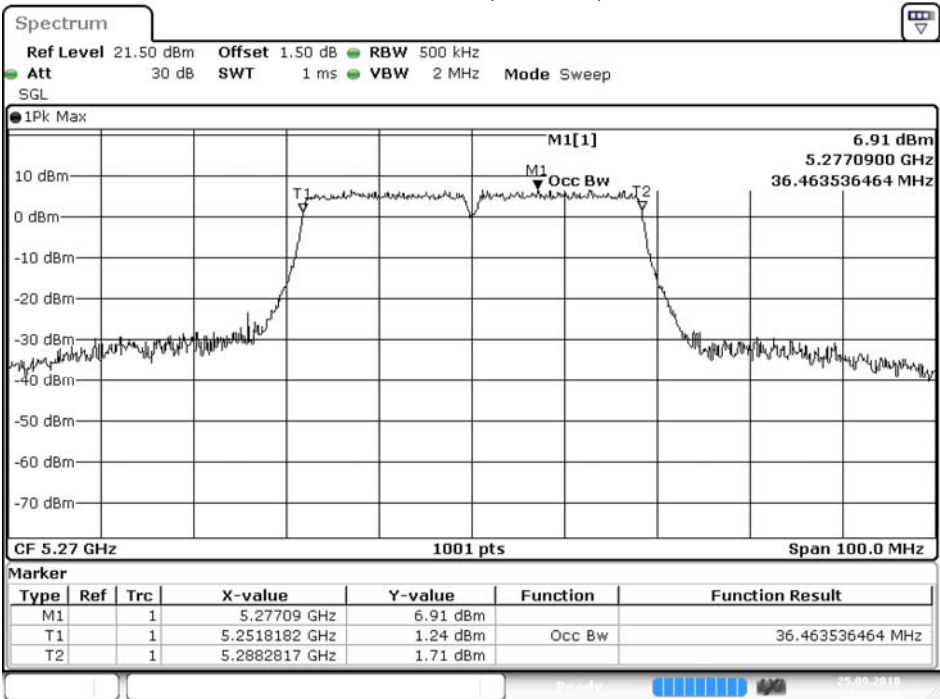


Date: 25.SEP.2018 16:29:33

Channel 62 (Chain A)

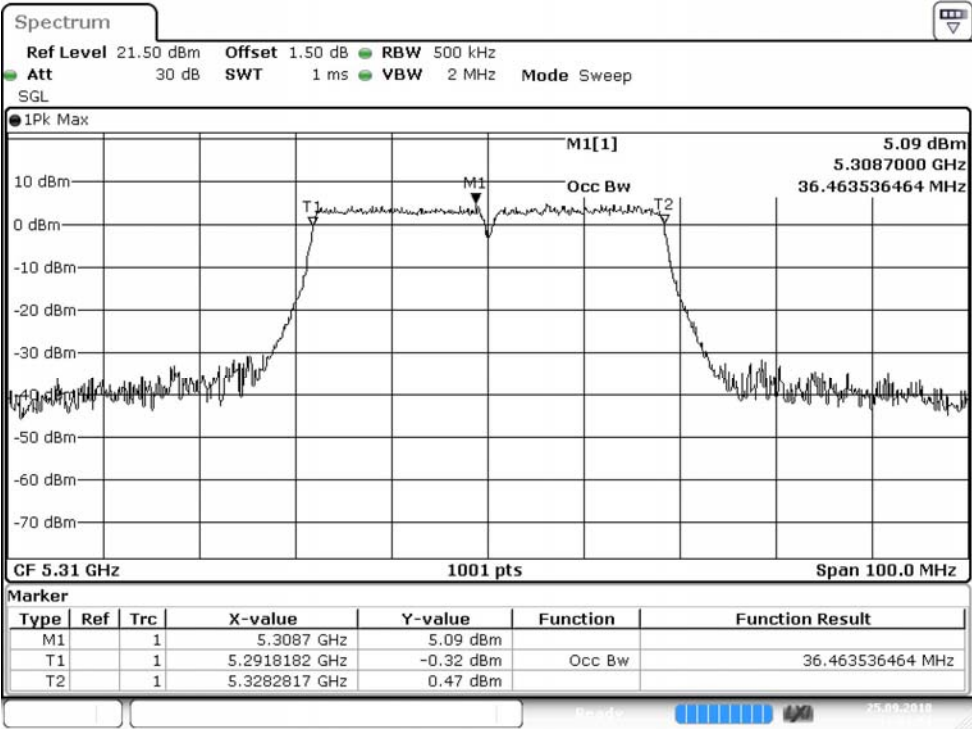


Channel 62 (Chain B)

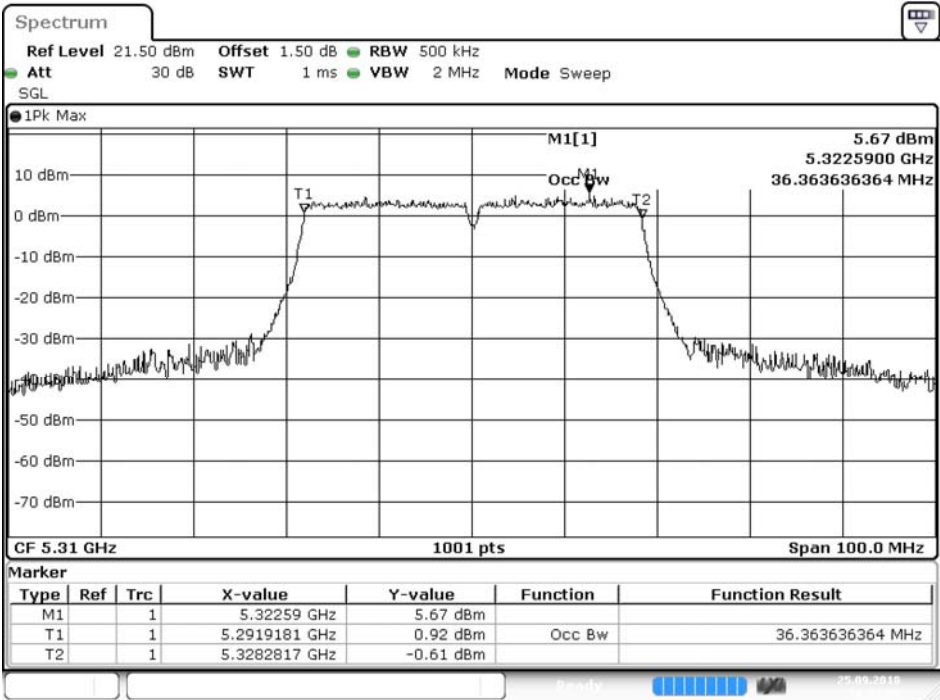


Date: 25.SEP.2018 16:32:29

Channel 102 (Chain A)

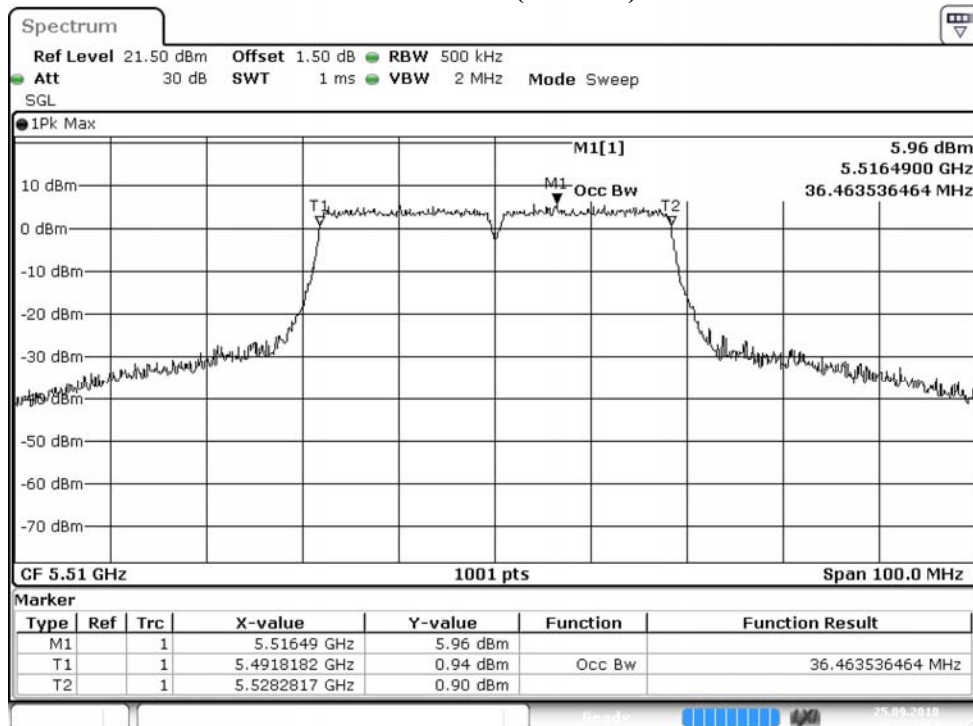


Channel 102 (Chain B)

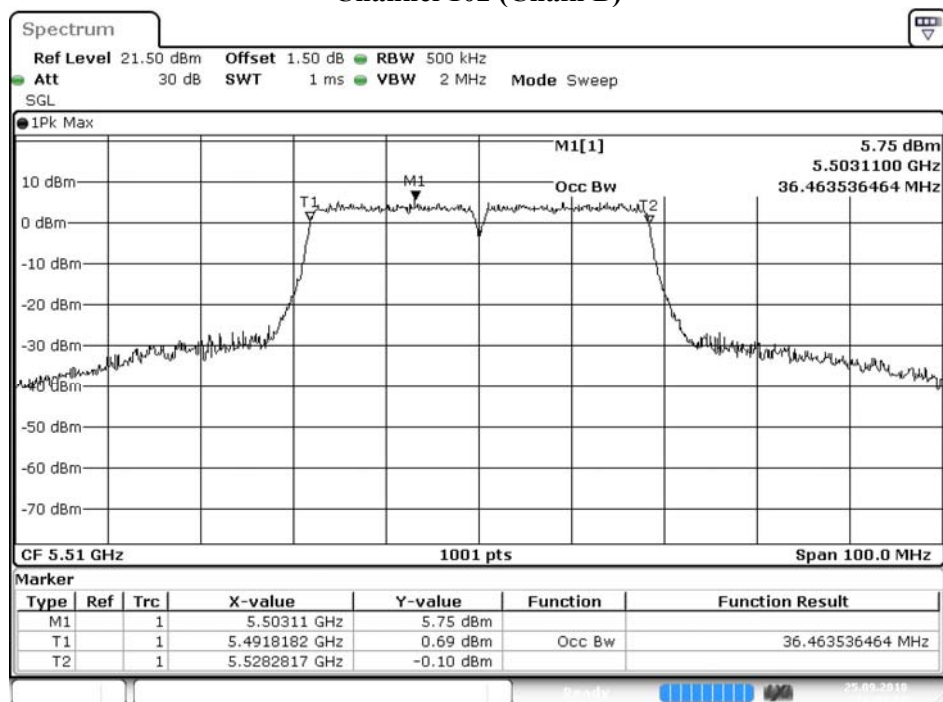


Date: 25.SEP.2018 16:35:52

Channel 110 (Chain A)

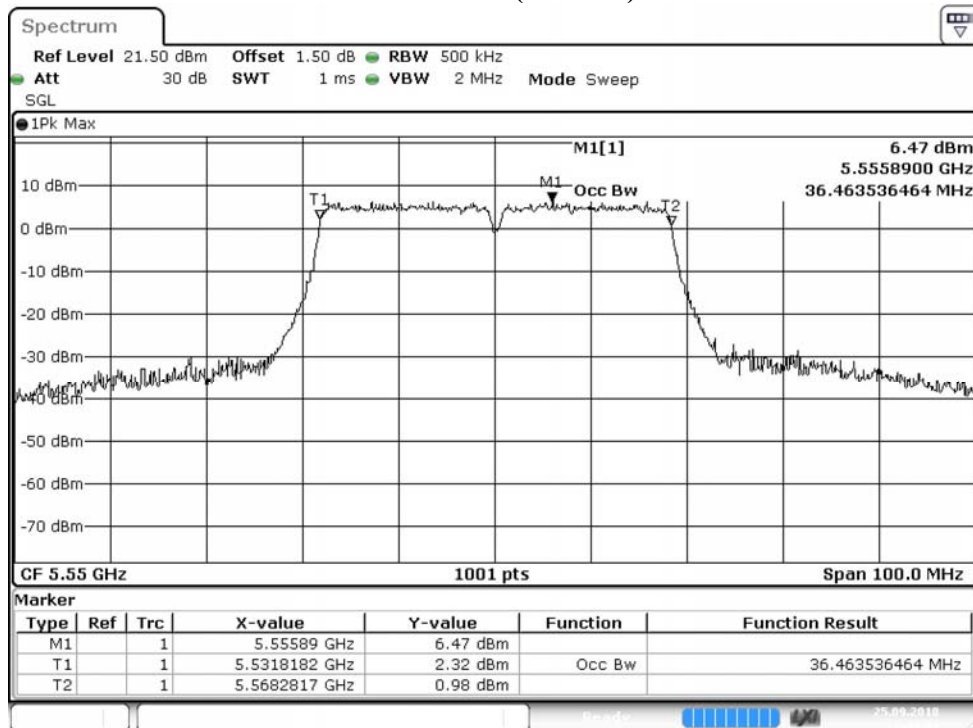


Channel 110 (Chain B)

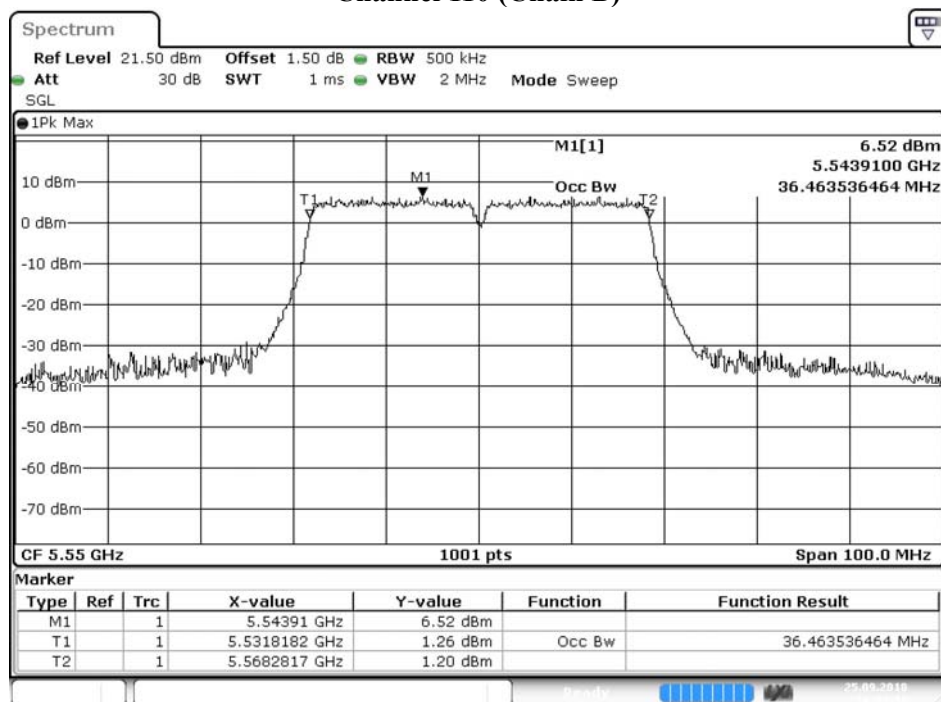


Date: 25.SEP.2018 16:39:12

Channel 134 (Chain A)

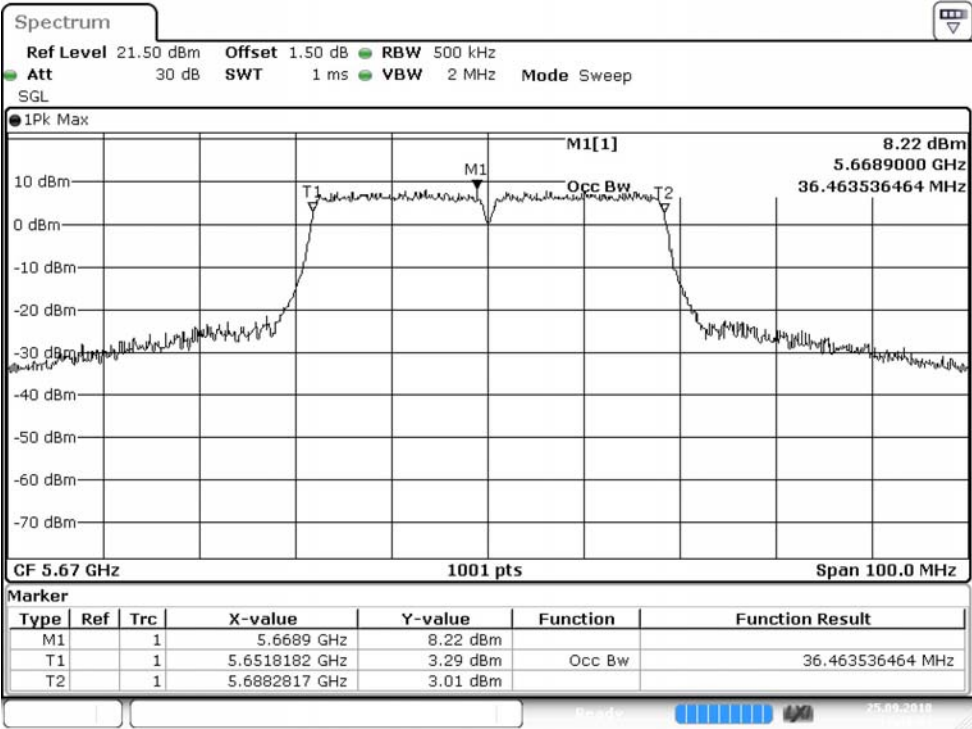


Channel 134 (Chain B)

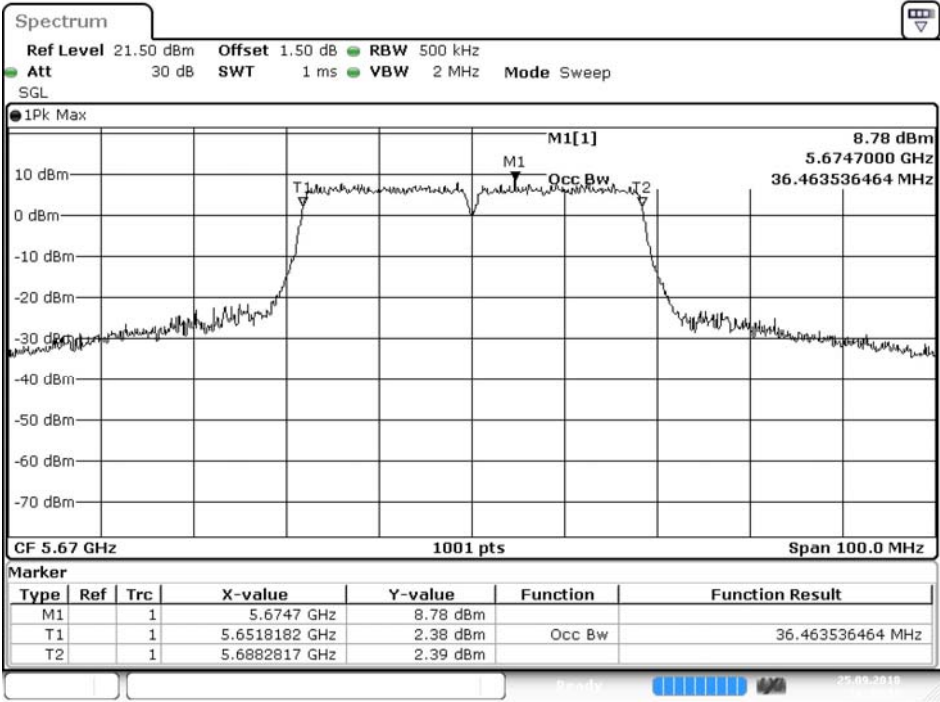


Date: 25.SEP.2018 16:42:12

Channel 142 (Chain A)

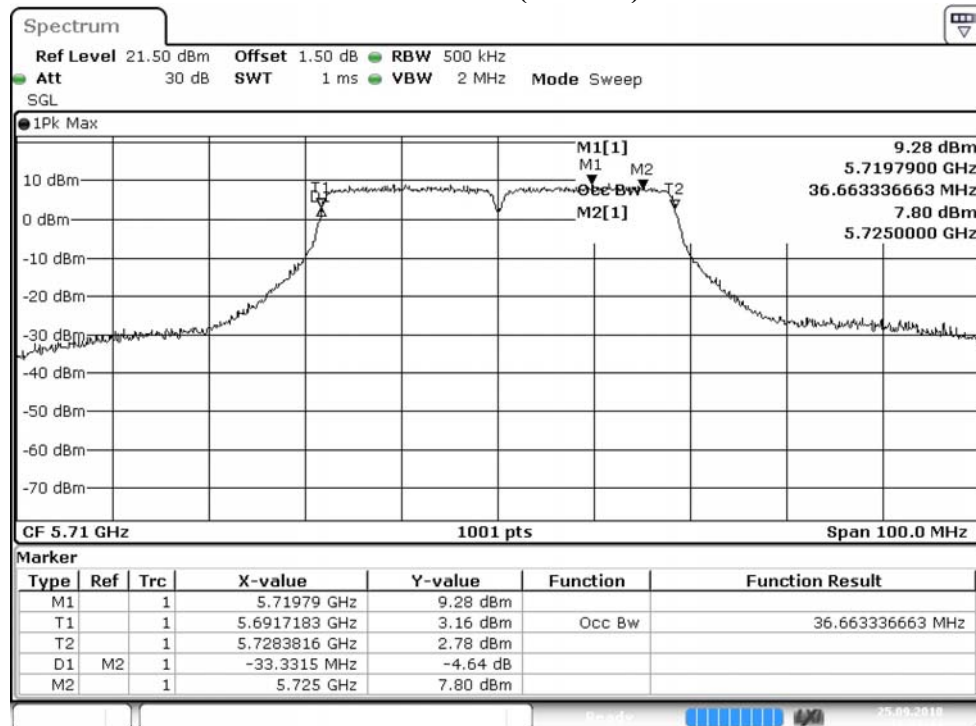


Channel 142 (Chain B)

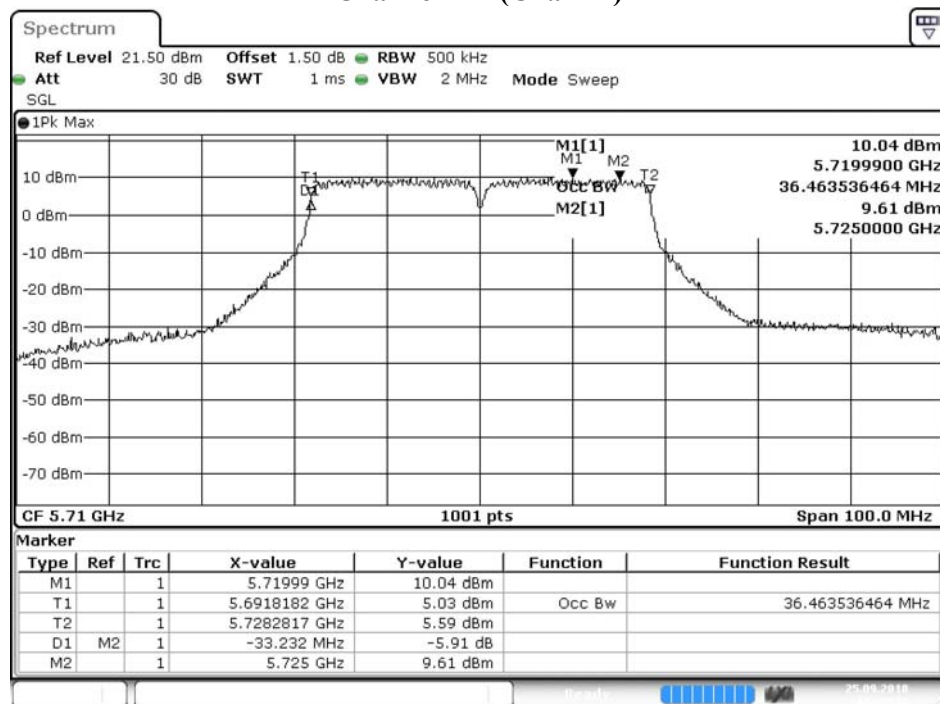


Date: 25.SEP.2018 15:25:21


Maximum conducted output power:
Channel 142(U-NII-2C) (Chain A)

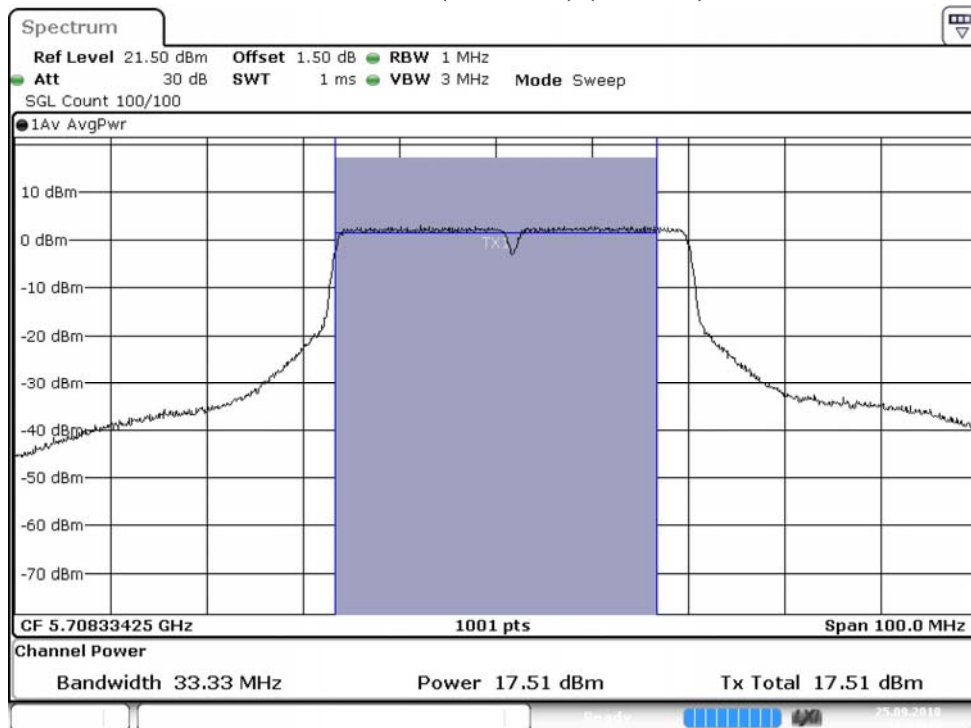

Maximum conducted output power:
Channel 142(U-NII-3) (Chain A)

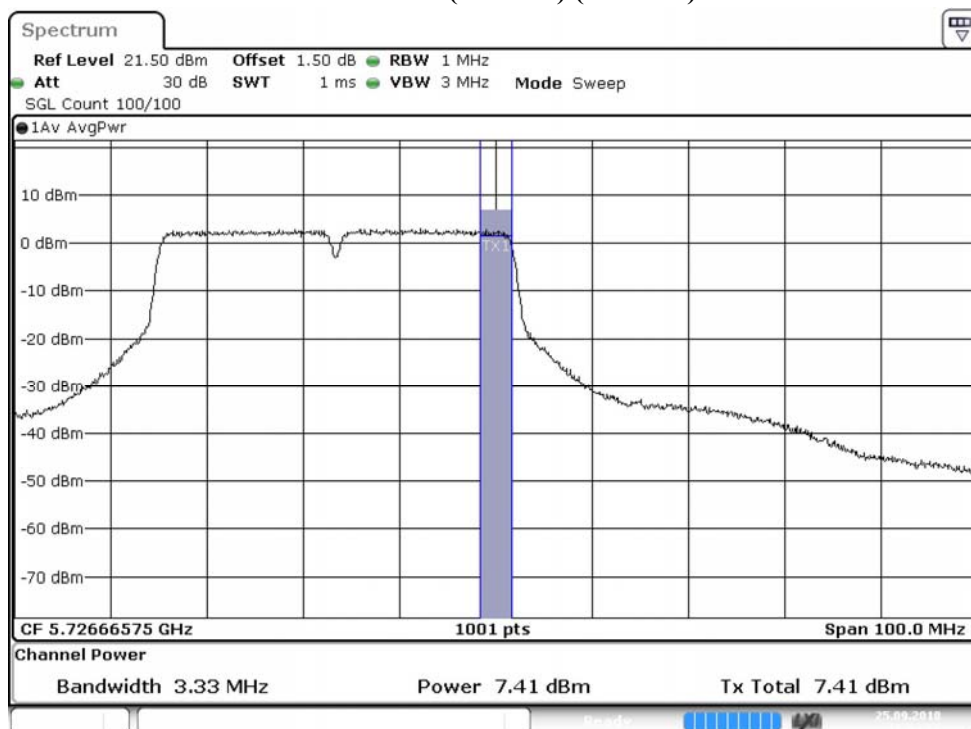


Maximum conducted output power:
Channel 142(U-NII-2C) (Chain B)

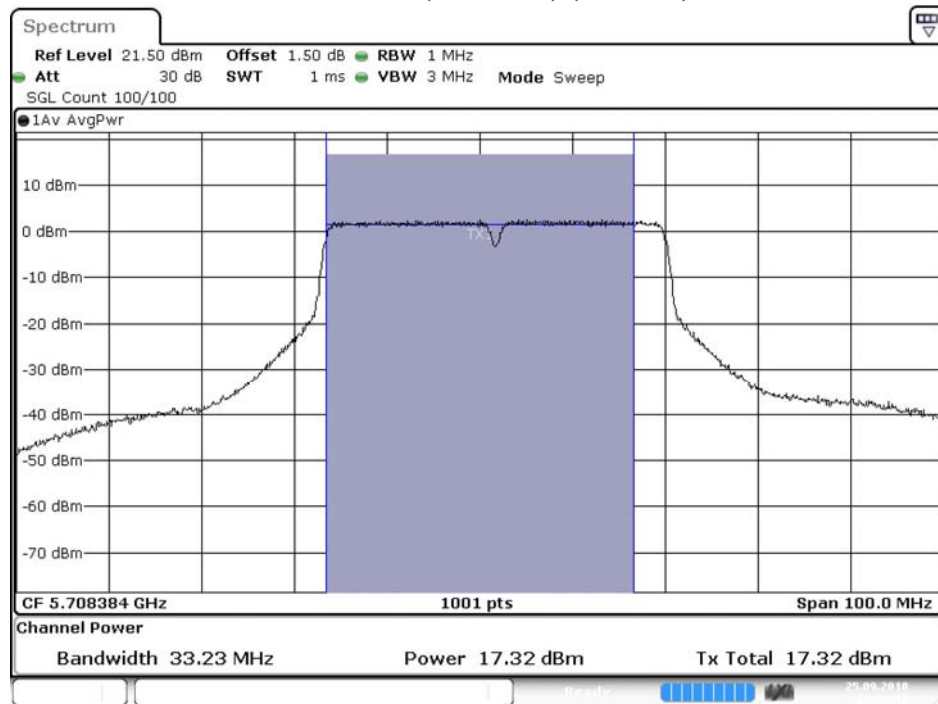

Date: 25.SEP.2018 15:28:18

Maximum conducted output power:
Channel 142(U-NII-3) (Chain B)

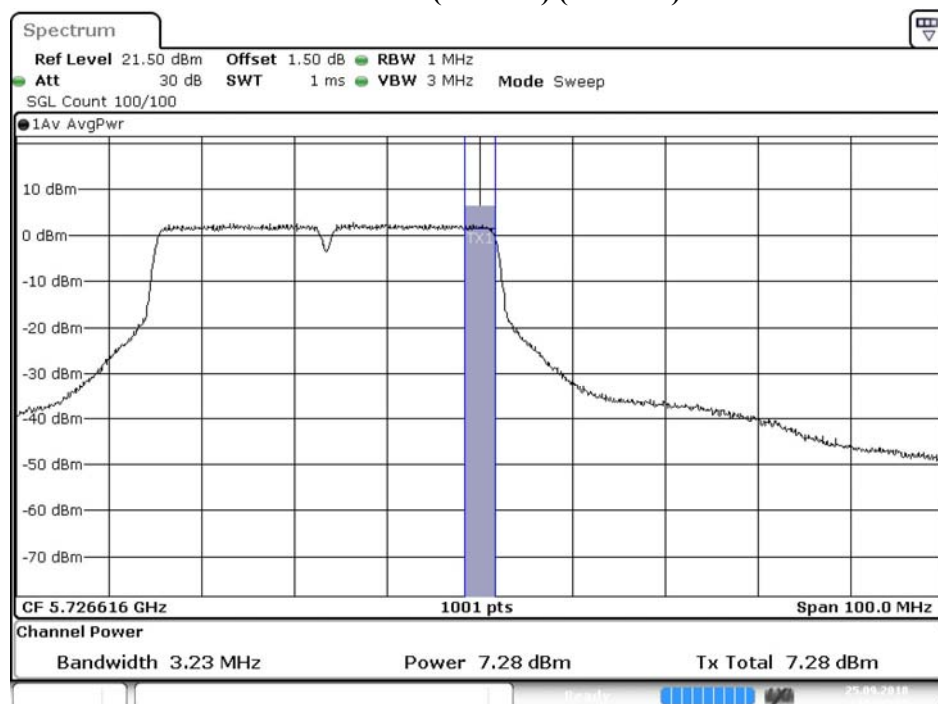

Date: 25.SEP.2018 15:28:40

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 3: MIMO: 發射器 802.11ac-80BW

6 dB 頻寬：1MHz

視頻頻寬：3MHz

檢測器：峰值

環境溫度：21 °C

測試日期：107 年 09 月 27 日

環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	1965	260	390	520	585	650	780	866.7
42	5210	14.97	14.84	14.76	14.63	14.51	14.47	14.38	14.25	14.17	14.06
58	5290	14.08	13.98	13.84	13.76	13.62	13.55	13.41	13.37	13.24	13.11
106	5530	15.26	--	--	--	--	--	--	--	--	--
122	5610	17.78	17.65	17.55	17.47	17.31	17.28	17.14	17.08	16.97	16.86
138 (U-NII-2C)	5690	17.79	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	1.48	--	--	--	--	--	--	--	--	--
155	5775	15.73	15.66	15.54	15.43	15.32	15.25	15.19	15.04	14.93	14.85

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		65	130	1965	260	390	520	585	650	780	866.7
42	5210	15.04	14.97	14.86	14.75	14.66	14.52	14.41	14.38	14.26	14.19
58	5290	14.00	13.96	13.84	13.76	13.63	13.57	13.44	13.35	13.21	13.17
106	5530	15.29	--	--	--	--	--	--	--	--	--
122	5610	17.97	17.86	17.75	17.66	17.52	17.49	17.31	17.26	17.14	17.04
138 (U-NII-2C)	5690	17.72	--	--	--	--	--	--	--	--	--
138 (U-NII-3)	5690	1.52	--	--	--	--	--	--	--	--	--
155	5775	15.76	15.66	15.53	15.42	15.38	15.24	15.19	15.07	14.93	14.86

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
42	5210	--	14.97	15.04	18.02	30	--
58	5290	75.125	14.08	14.00	17.05	24	29.76
106	5530	74.925	15.26	15.29	18.29	24	29.75
122	5610	75.125	17.78	17.97	20.89	24	29.76
138 (U-NII-2C)	5690	72.562	17.79	17.72	20.77	24	29.61
138 (U-NII-3)	5690	--	1.48	1.52	4.51	30	--
155	5775	--	15.73	15.76	18.76	30	--

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth:

Channel 58 (Chain A)

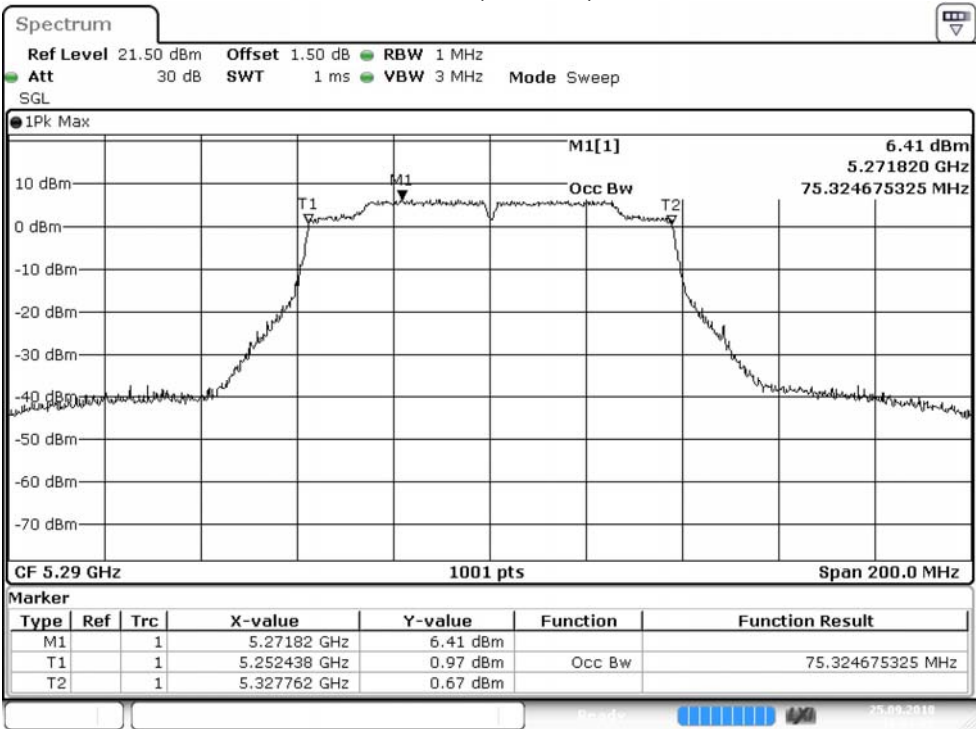


Channel 58 (Chain B)

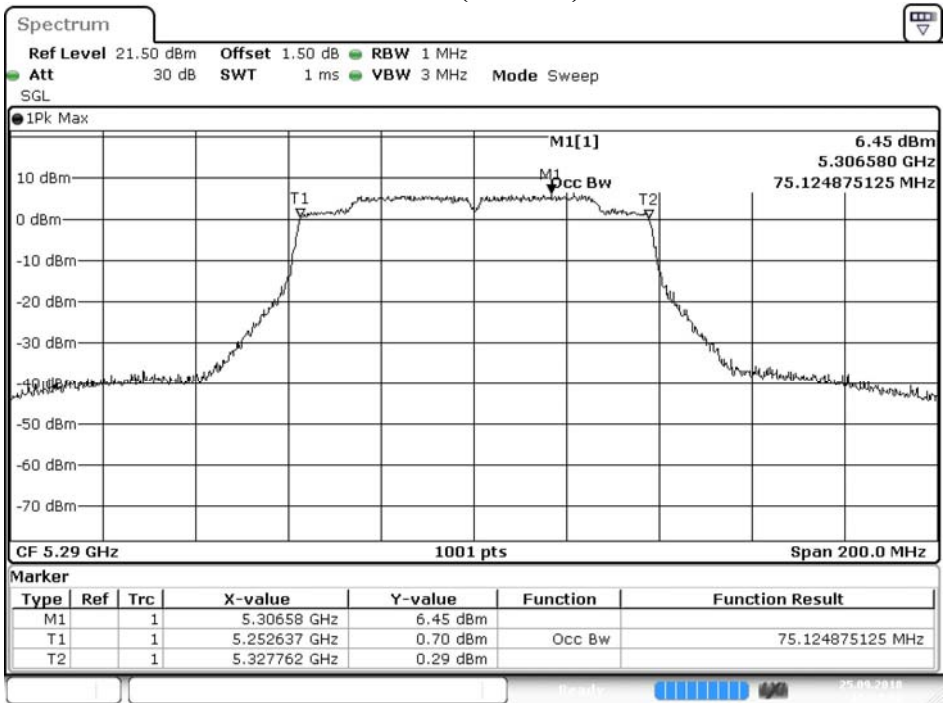


Date: 25.SEP.2018 15:34:07

Channel 106 (Chain A)

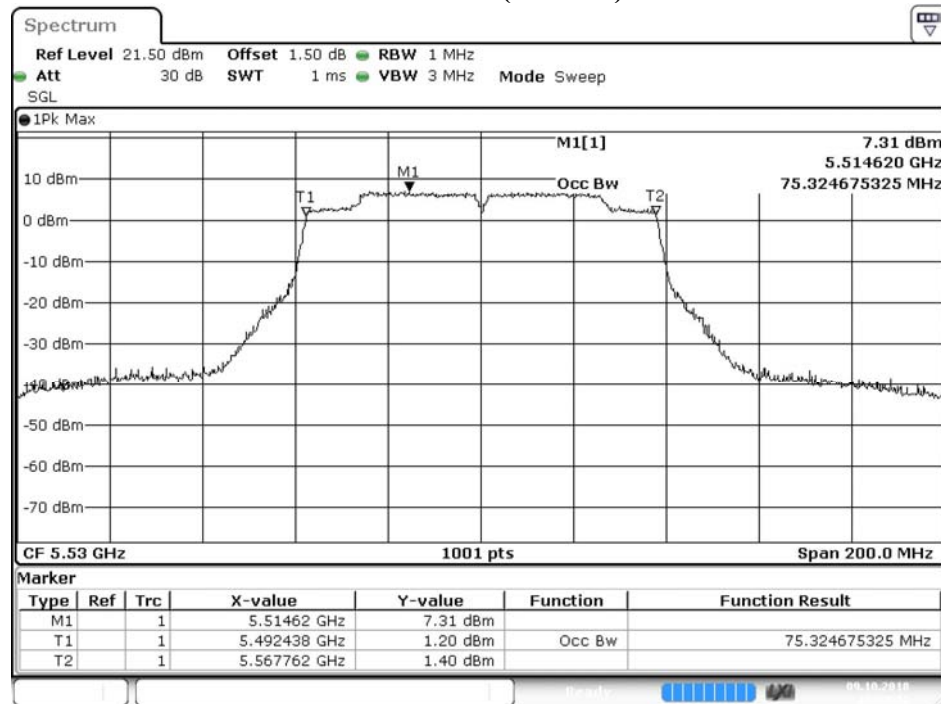


Date: 9.OCT.2018 13:19:42

Channel 106 (Chain B)

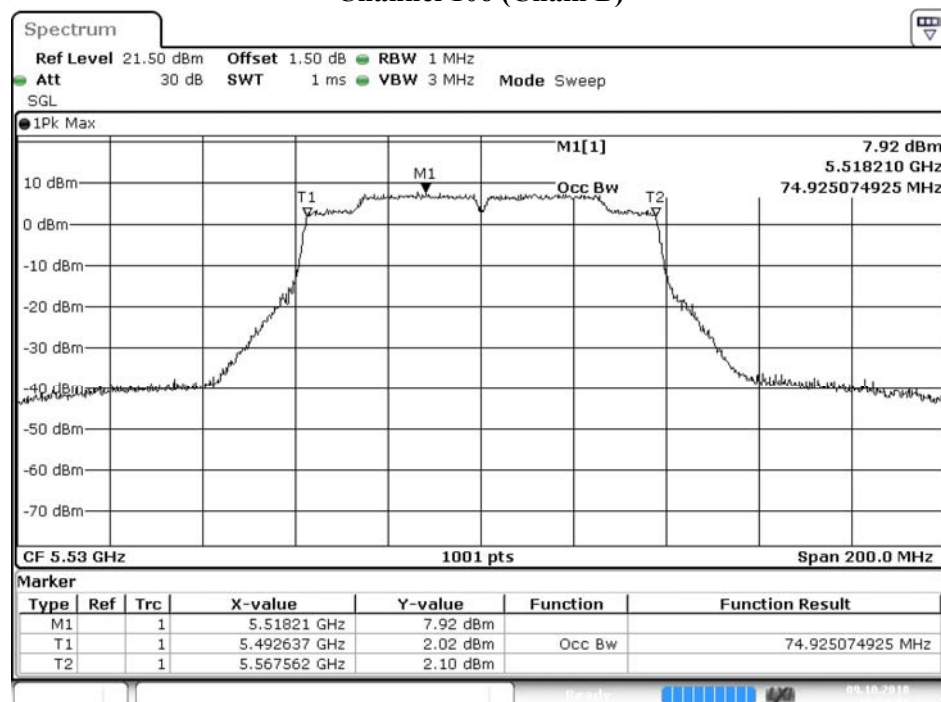


Date: 9.OCT.2018 13:24:31

Channel 122 (Chain A)

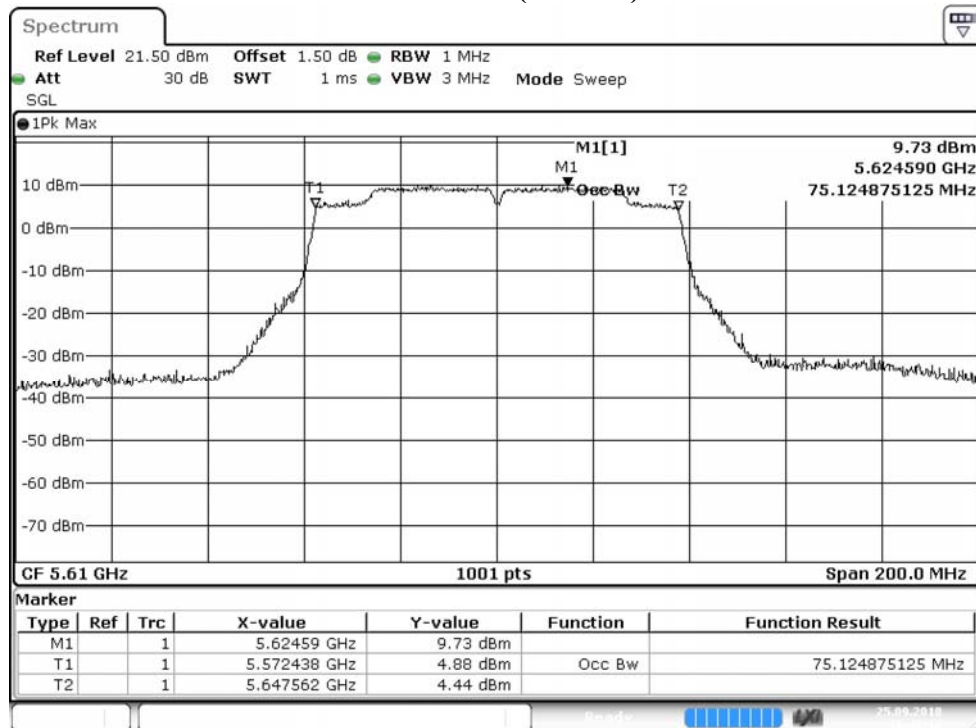


Channel 122 (Chain B)

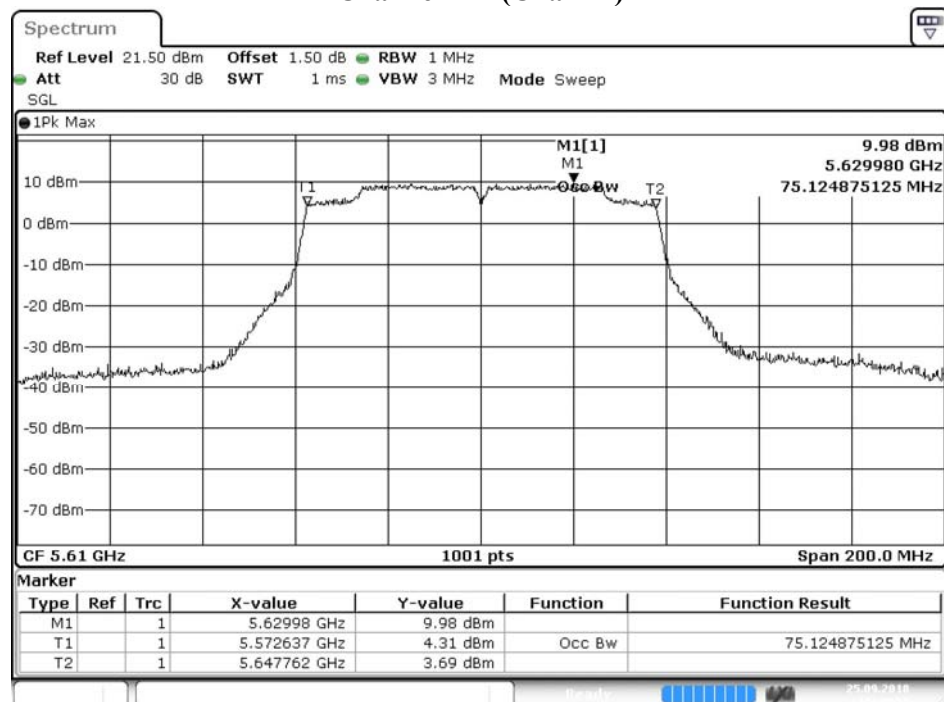


Date: 25.SEP.2018 15:40:55



Channel 138 (Chain A)

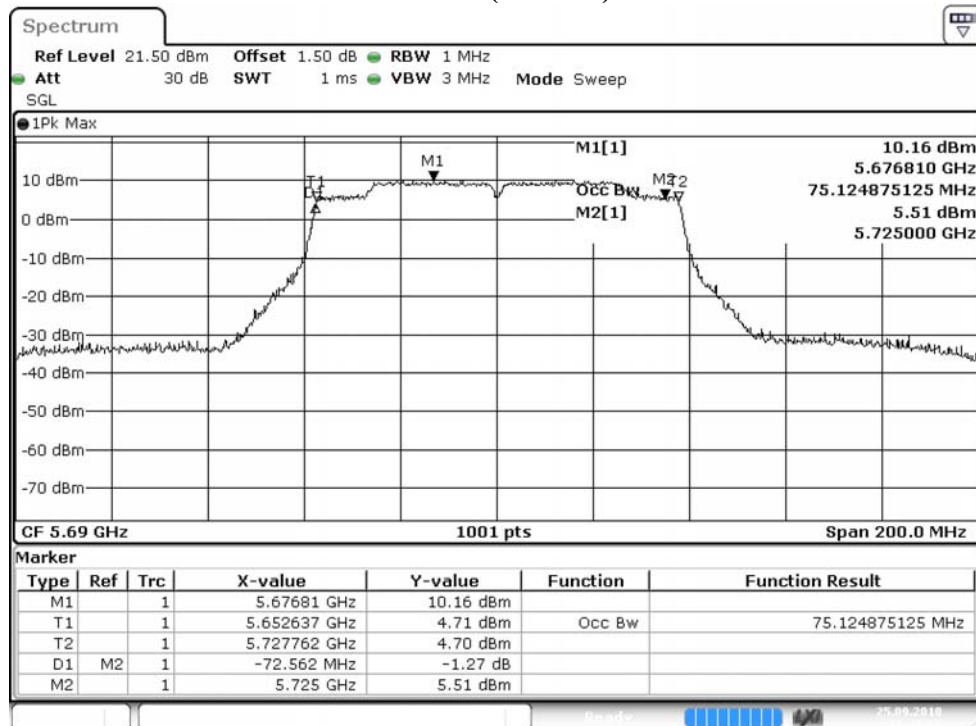

Channel 138 (Chain B)

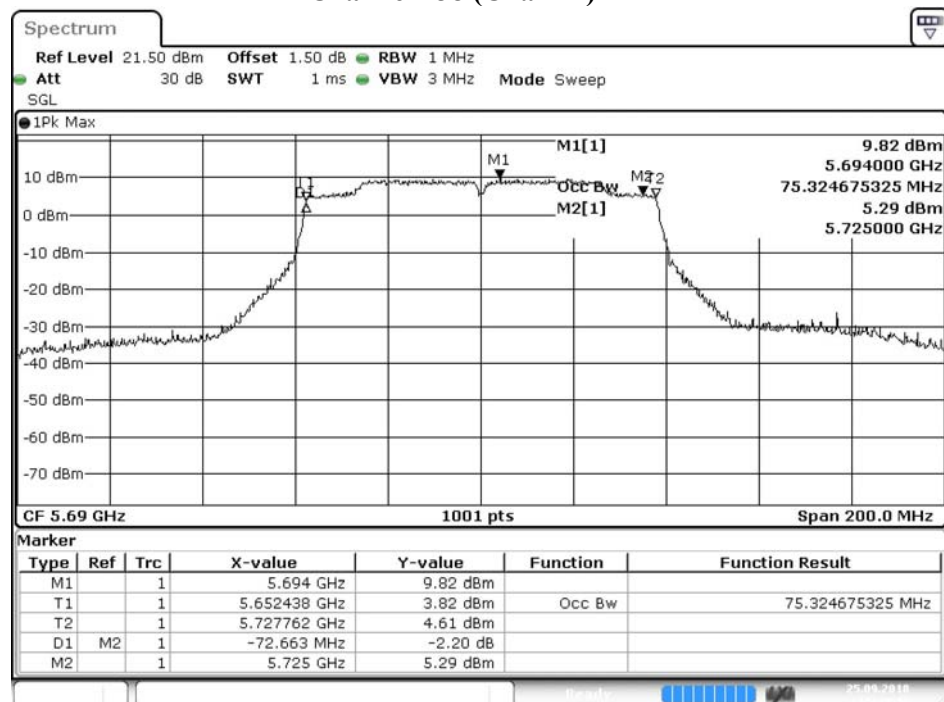


Date: 25.SEP.2018 15:43:47

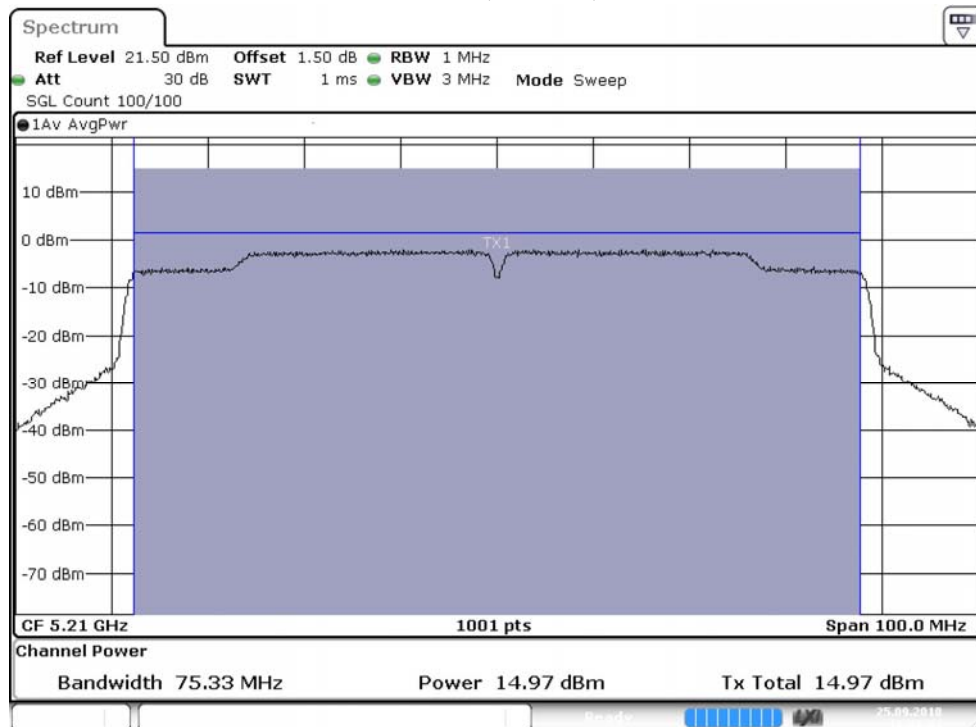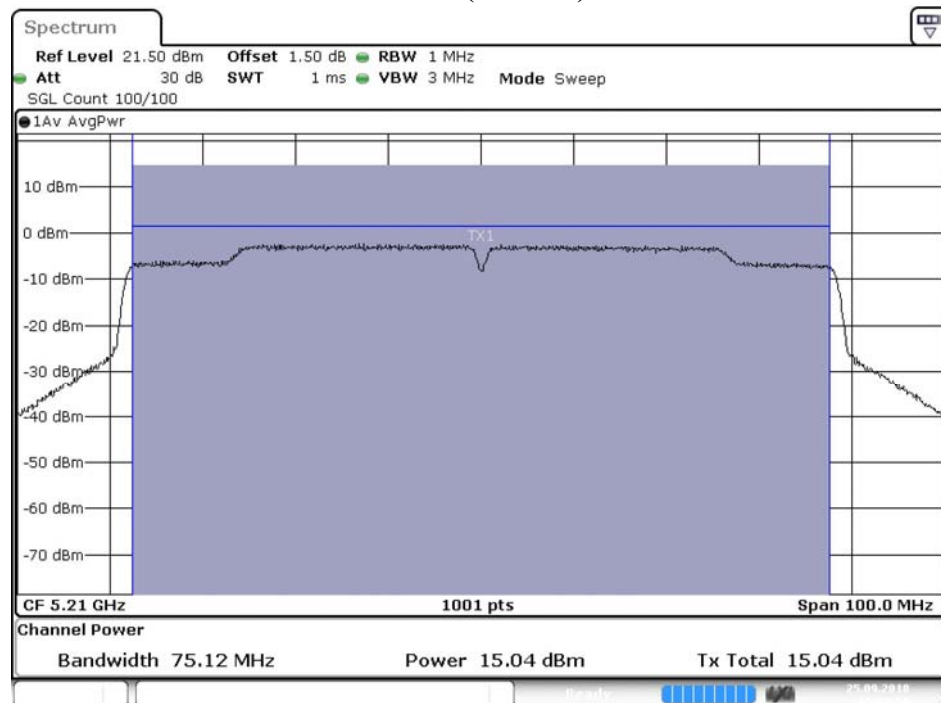
Maximum conducted output power:**Channel 42 (Chain A)****Maximum conducted output power:****Channel 42 (Chain B)**

Date: 25.SEP.2018 15:33:11

Maximum conducted output power:
Channel 58 (Chain A)

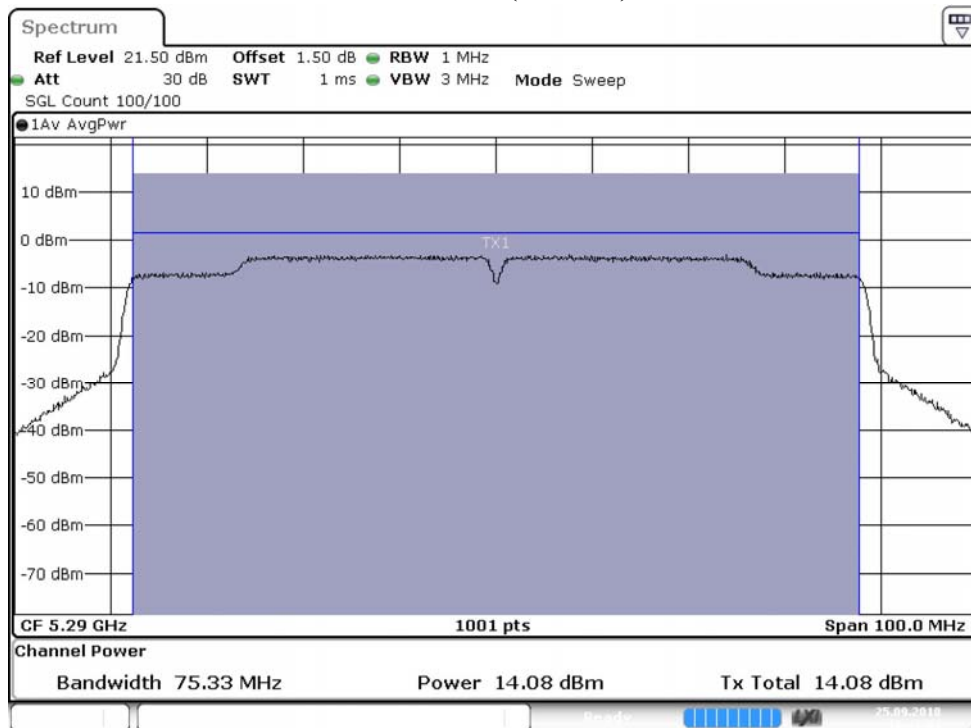


Maximum conducted output power:
Channel 58 (Chain B)

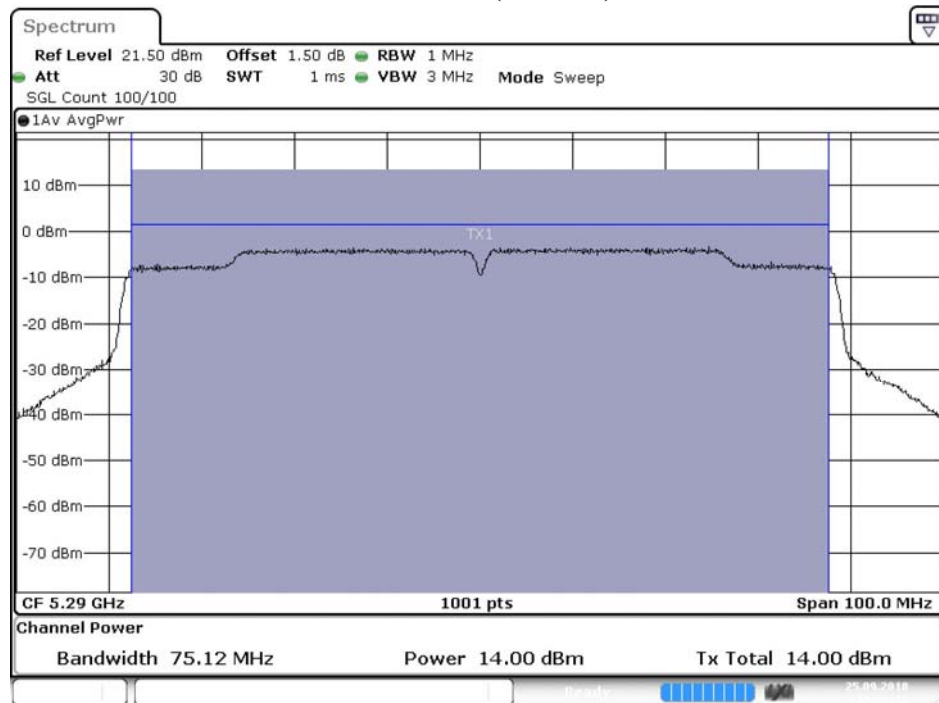


Date: 25.SEP.2018 15:36:11

Maximum conducted output power:
Channel 106 (Chain A)

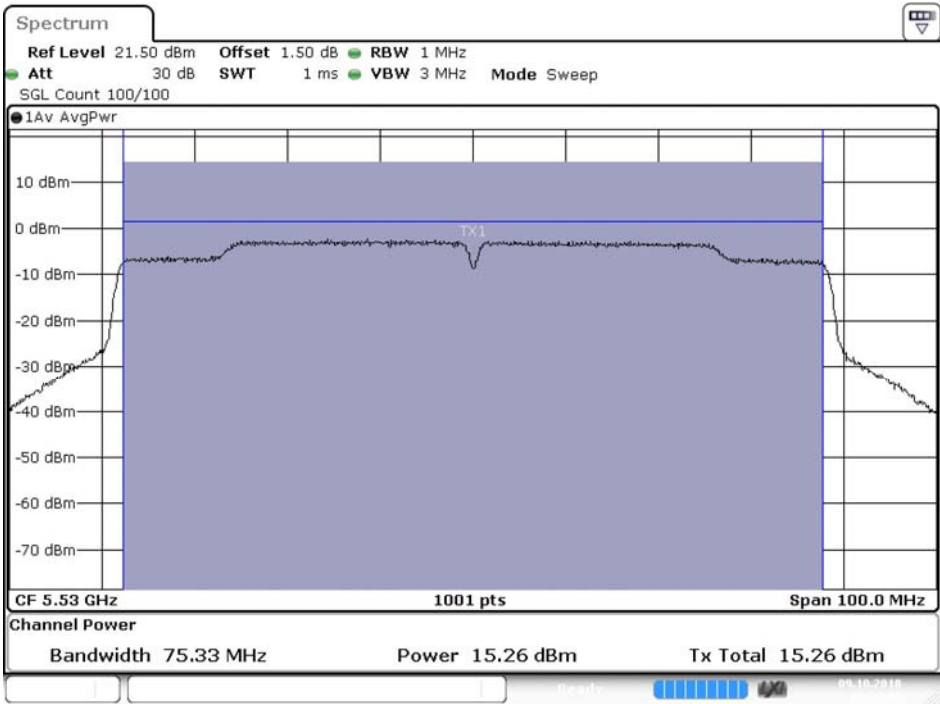


Date: 9.OCT.2018 13:20:04

Maximum conducted output power:
Channel 106 (Chain B)

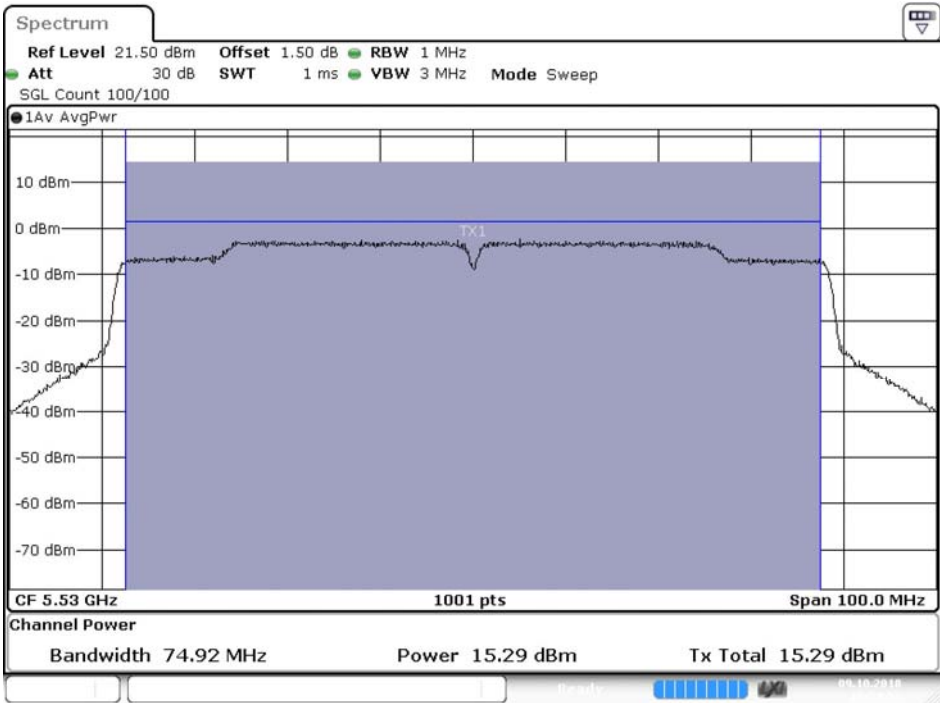


Date: 9.OCT.2018 13:24:54

Maximum conducted output power:
Channel 122 (Chain A)

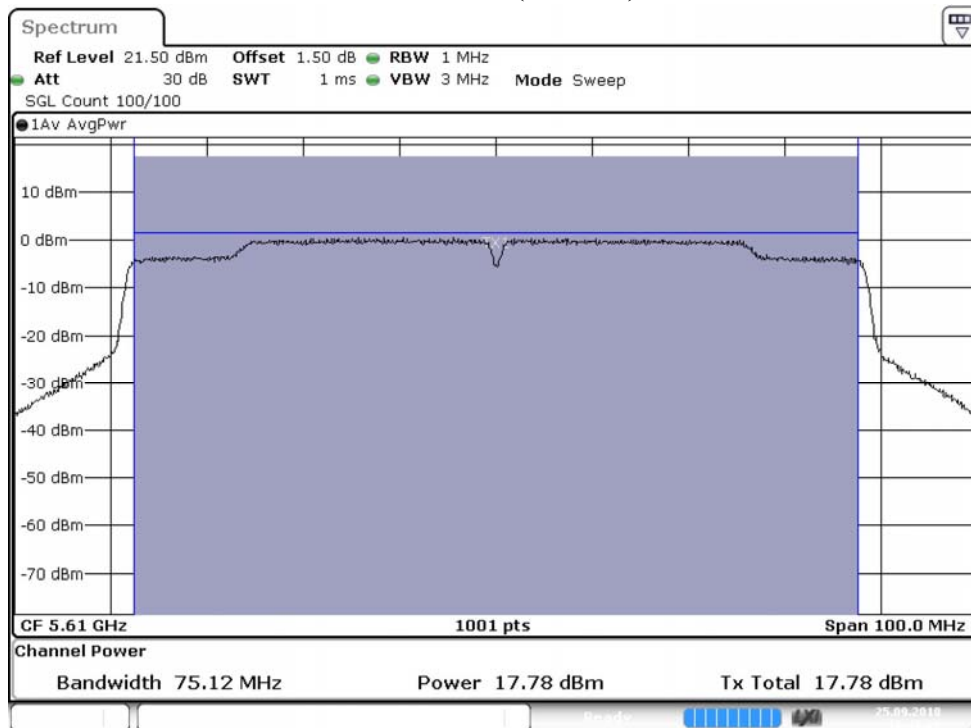


Maximum conducted output power:
Channel 122 (Chain B)

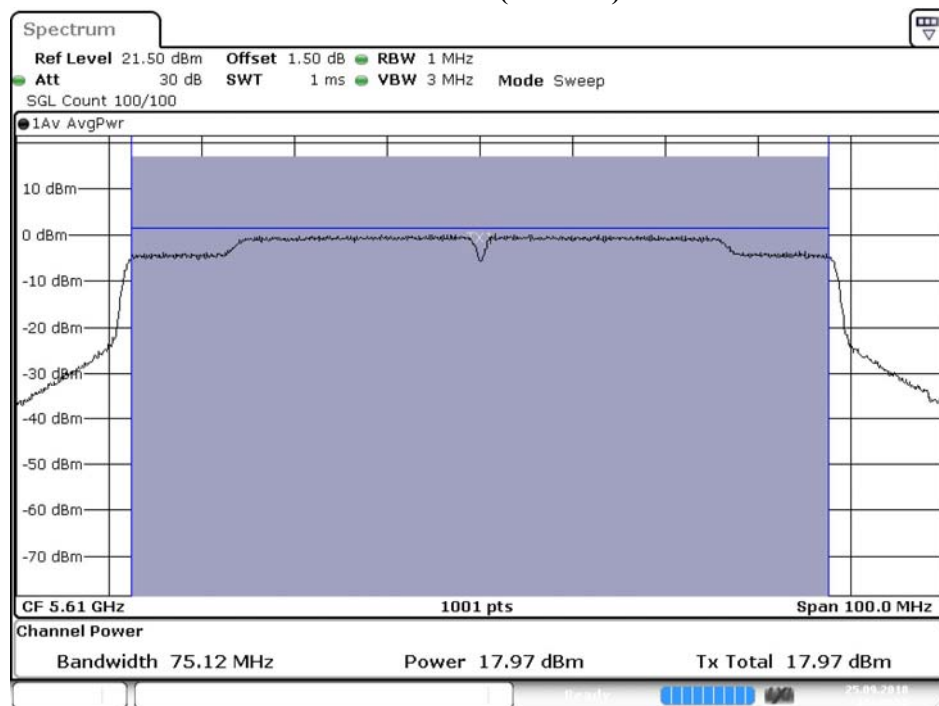




Date: 25.SEP.2018 15:42:58

**Maximum conducted output power:
Channel 138 (U-NII-2C) (Chain A)**

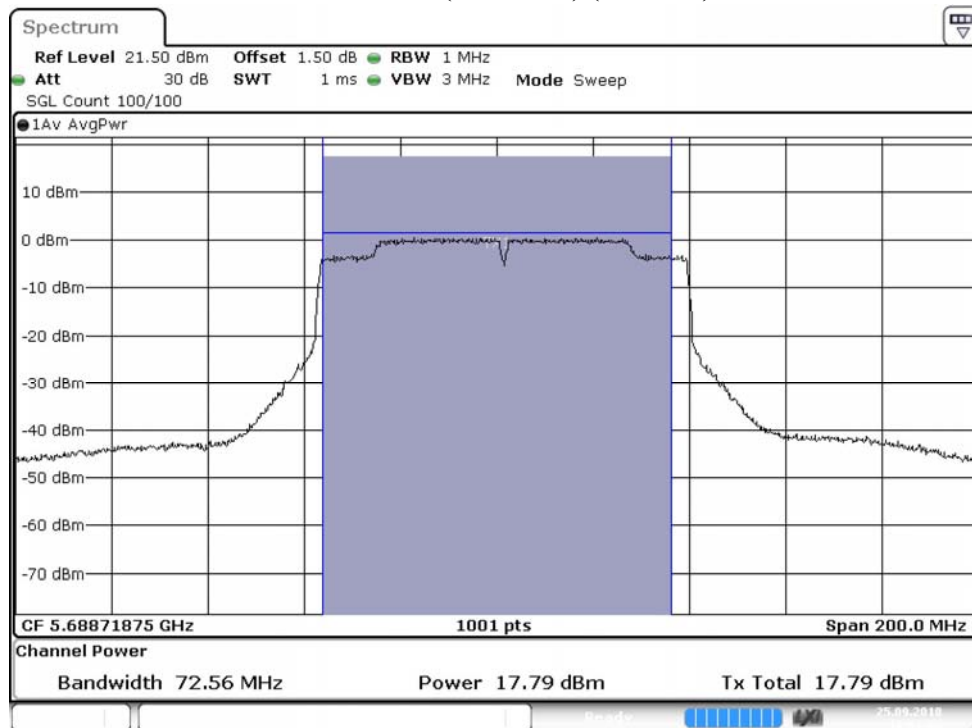


**Maximum conducted output power:
Channel 138 (U-NII-2C) (Chain A)**

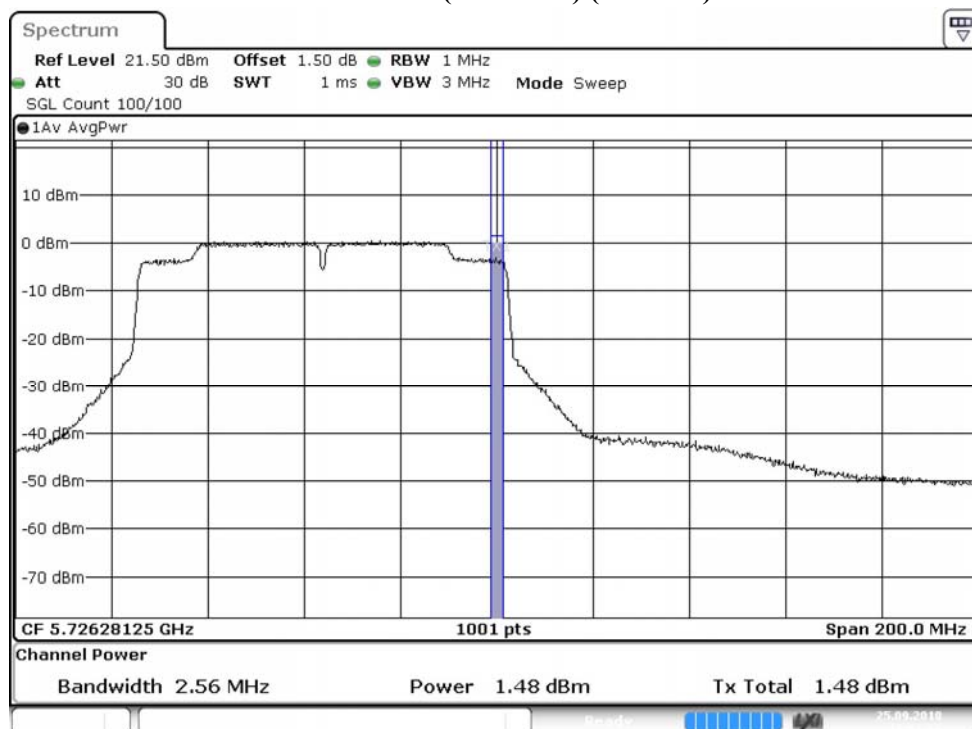

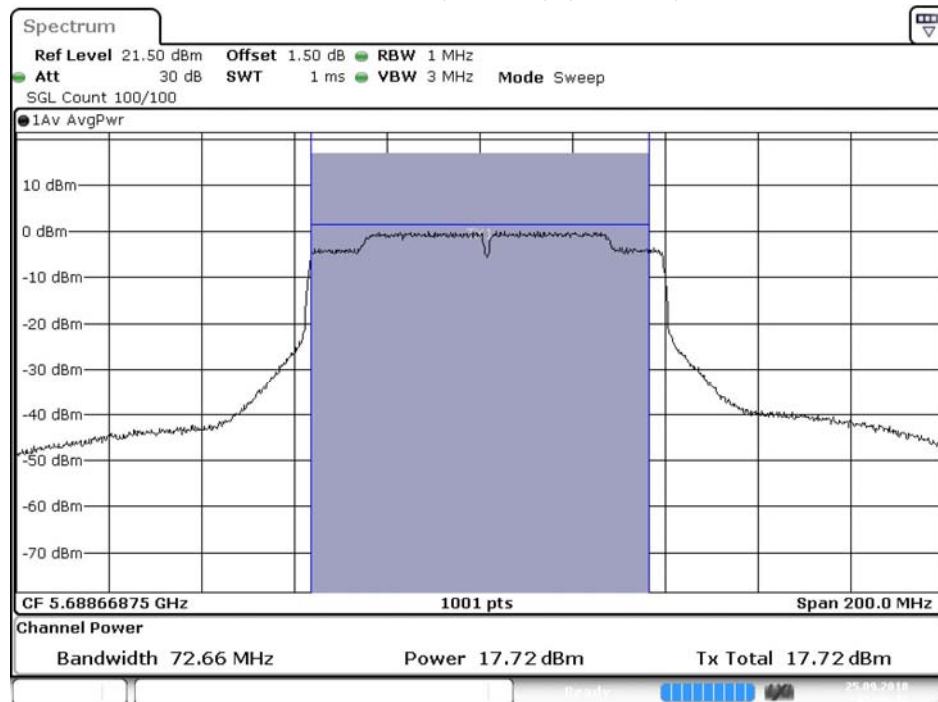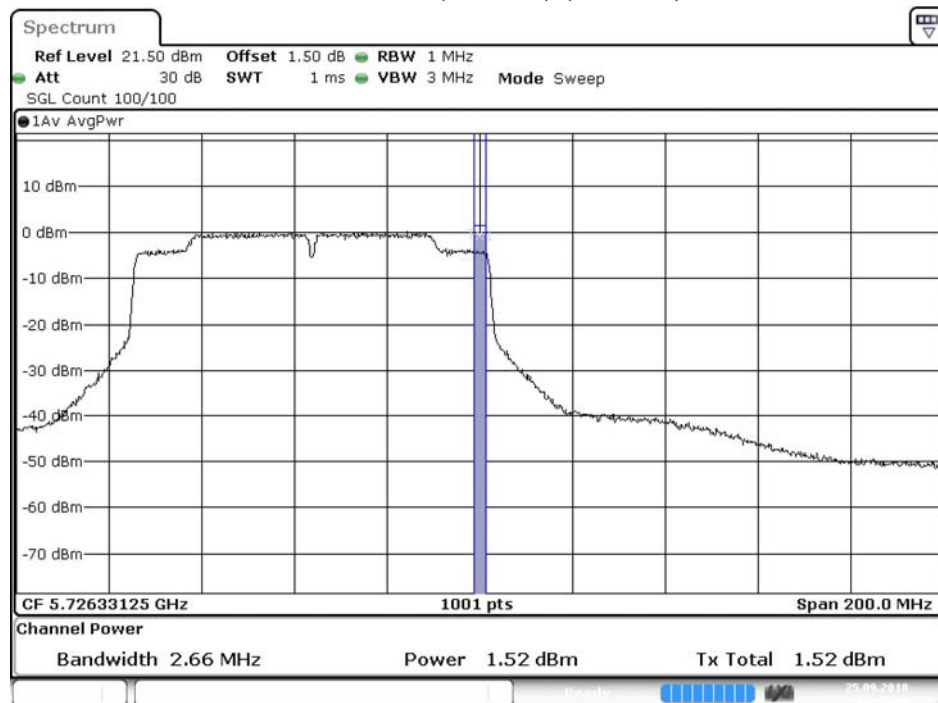Maximum conducted output power:**Channel 138 (U-NII-3) (Chain B)****Maximum conducted output power:****Channel 138 (U-NII-3) (Chain B)**


Maximum conducted output power:

Channel 155 (Chain A)

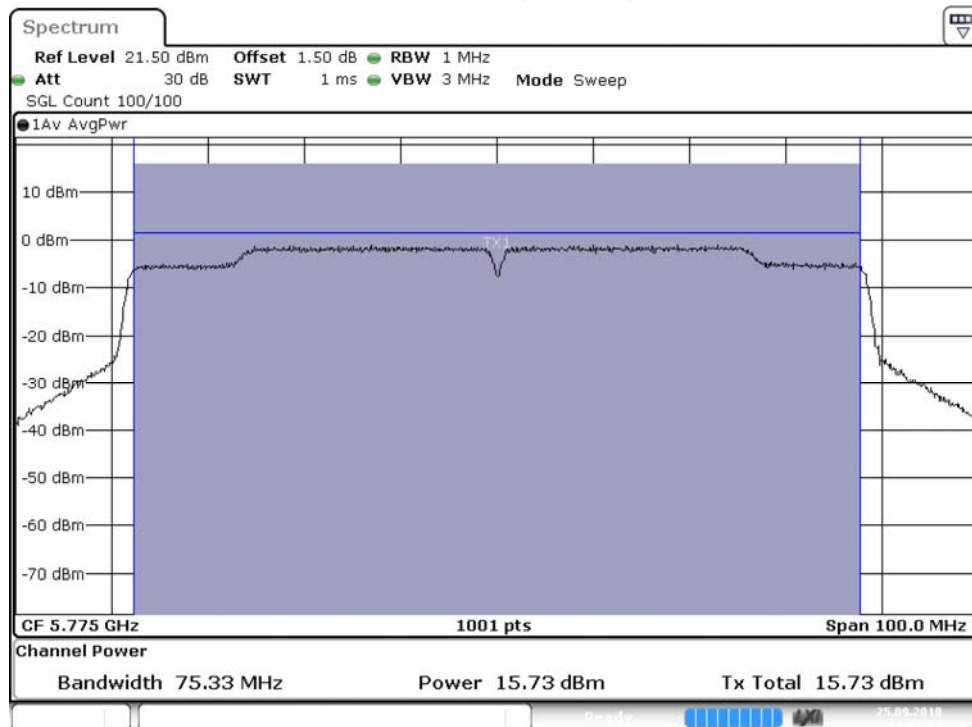

Maximum conducted output power:

Channel 155 (Chain B)

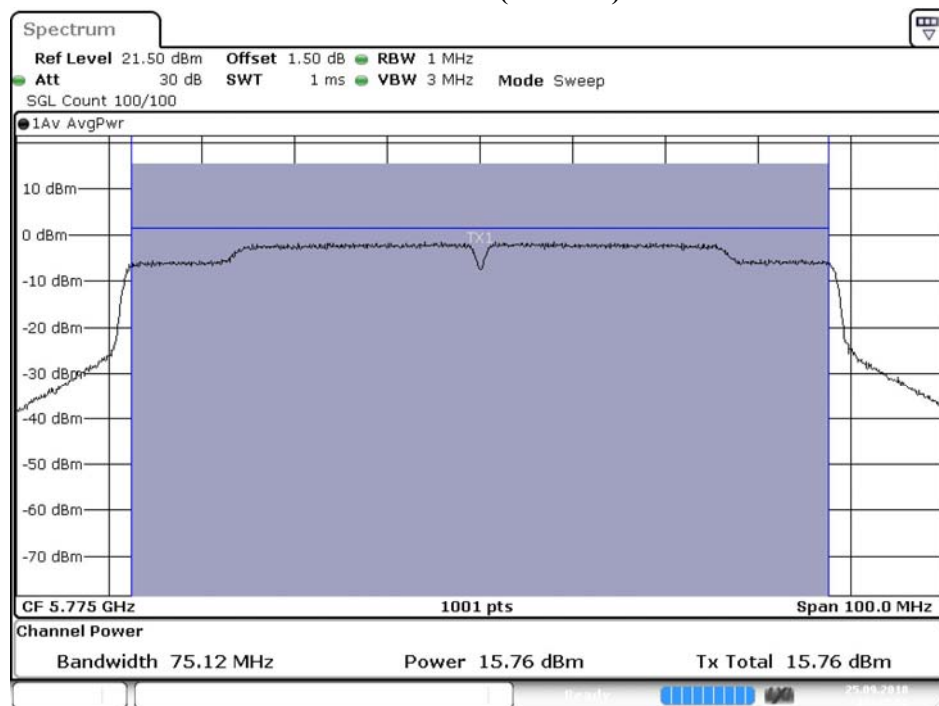

Date: 25.SEP.2018 16:47:02

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 3: MIMO: 發射器 802.11ac-160BW

6 dB 頻寬：1MHz

視頻頻寬：3MHz

檢測器：峰值

環境溫度：21 °C

測試日期：107 年 09 月 25 日

環境濕度：53 %

Chain A

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		130	260	390	520	780	1040	1170	1300	1560	1733.3
50 (U-NII-1)	5250	7.88	7.77	7.69	7.54	7.44	7.32	7.26	7.14	7.05	6.97
50 (U-NII-2A)	5250	7.79	7.64	7.58	7.41	7.39	7.21	7.17	7.07	6.99	6.82
114	5570	10.63	10.59	10.44	10.32	10.28	10.19	10.01	9.93	9.87	9.75

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=1.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		130	260	390	520	780	1040	1170	1300	1560	1733.3
50 (U-NII-1)	5250	7.78	7.63	7.59	7.44	7.32	7.28	7.18	7.08	6.98	6.84
50 (U-NII-2A)	5250	7.77	7.66	7.53	7.47	7.38	7.21	7.14	7.03	6.94	6.89
114	5570	10.73	10.61	10.54	10.43	10.31	10.29	10.11	10.04	9.91	9.83

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
50 (U-NII-1)	5250	--	7.88	7.78	10.84	30	--
50 (U-NII-2A)	5250	76.399	7.79	7.77	10.79	24	29.83
114	5570	152.797	10.63	10.73	13.69	24	32.84


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
- 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

99% Occupied Bandwidth: Channel 50 (Chain A)

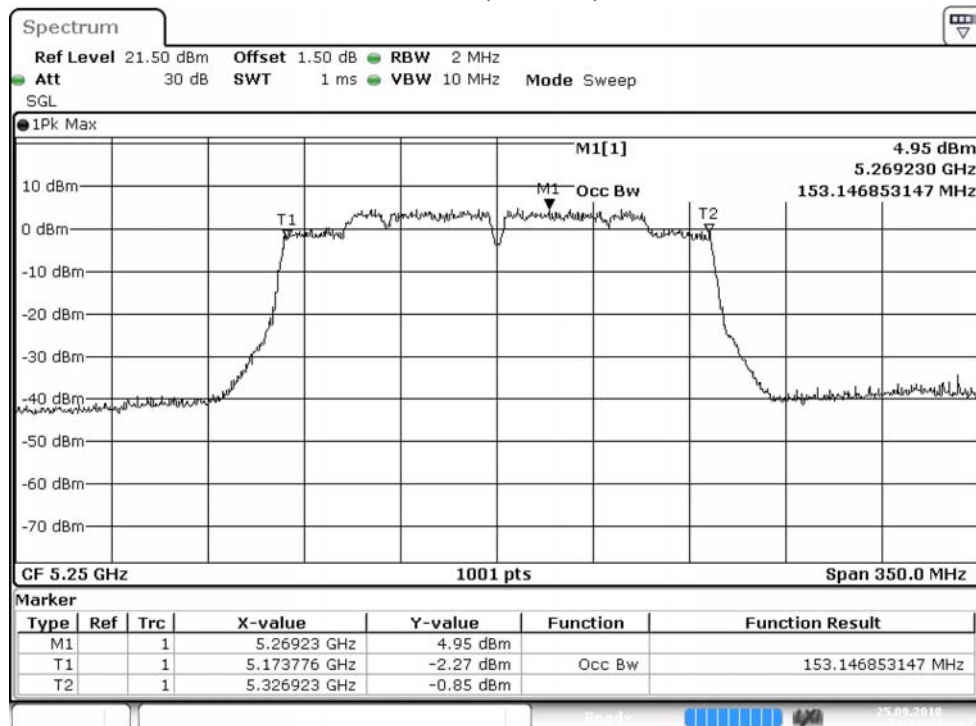


Channel 50 (Chain B)

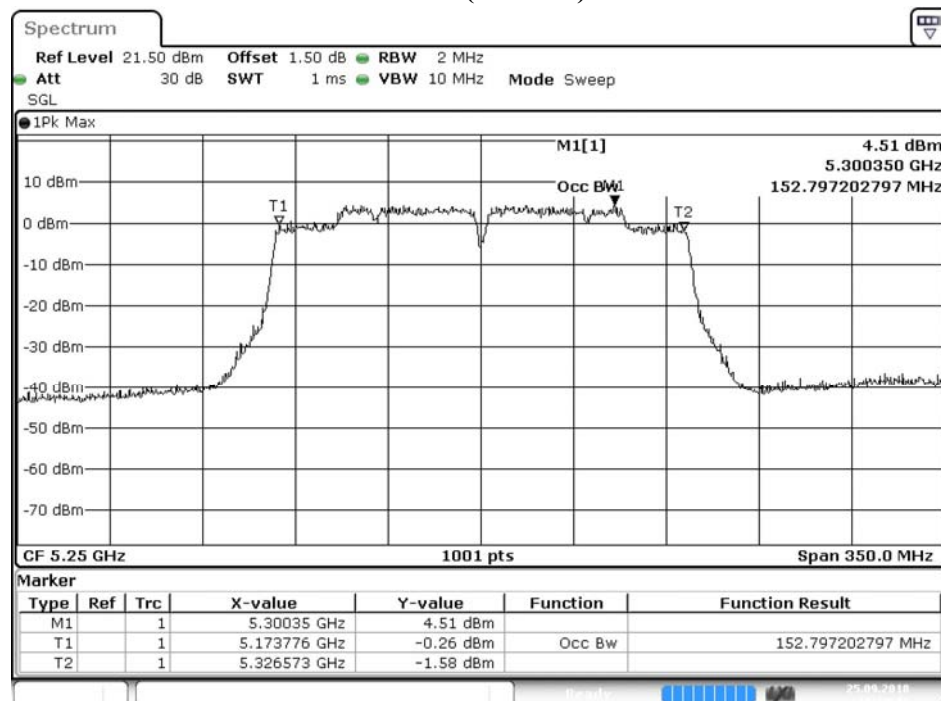


Date: 25.SEP.2018 15:10:43



Channel 114 (Chain A)

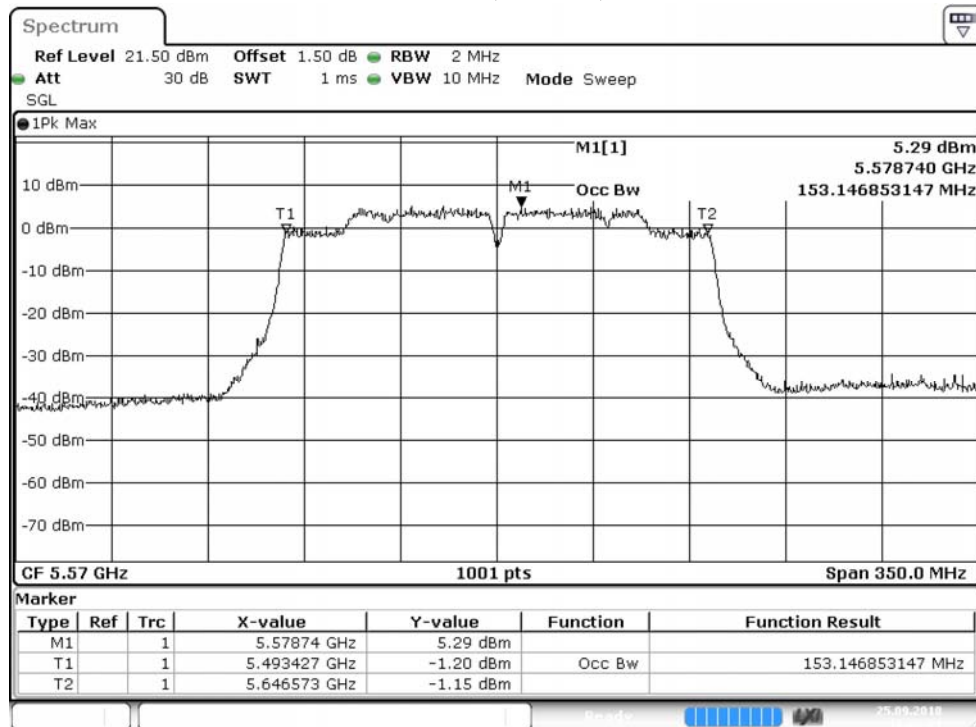


Channel 114 (Chain B)

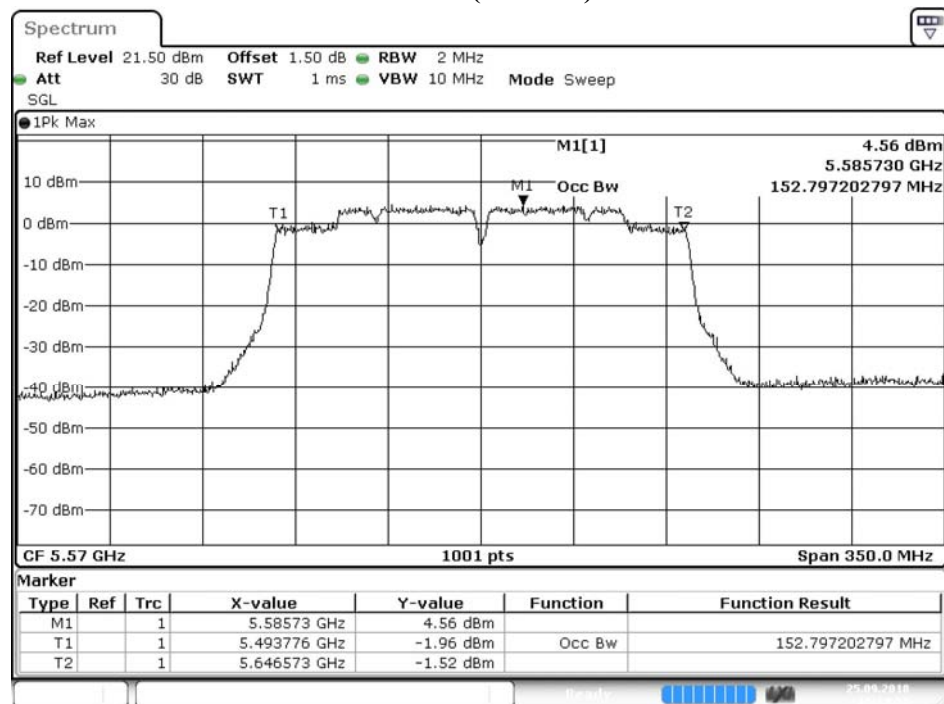

Date: 25.SEP.2018 15:14:59

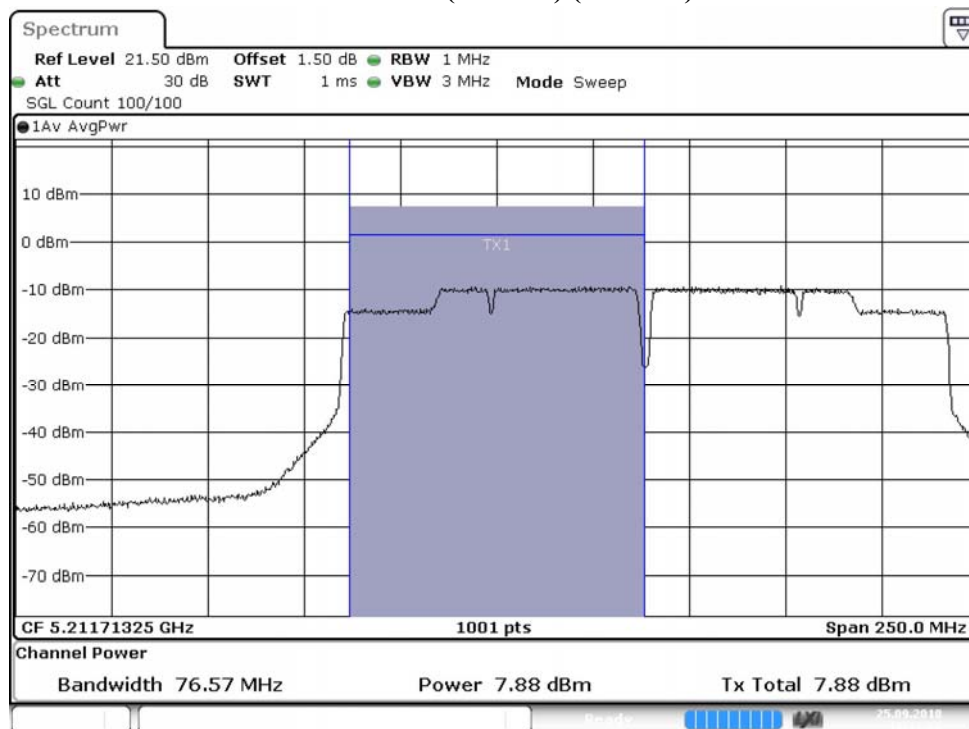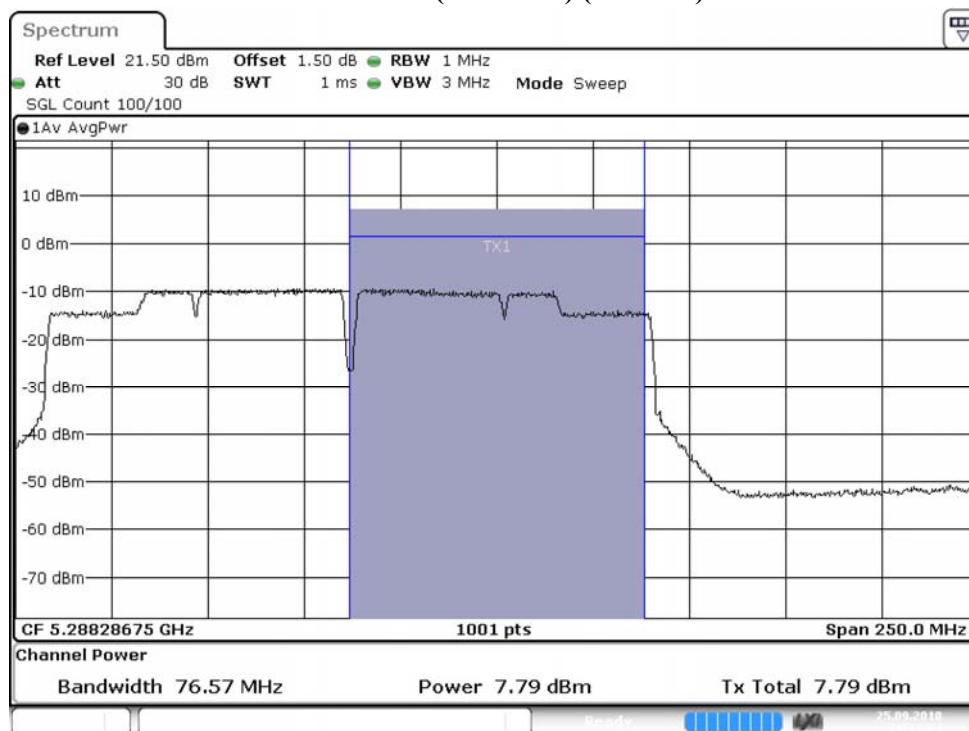
Maximum conducted output power:**Channel 50 (U-NII-1) (Chain A)****Maximum conducted output power:****Channel 50 (U-NII-2A) (Chain A)**

Maximum conducted output power:
Channel 50 (U-NII-1) (Chain B)

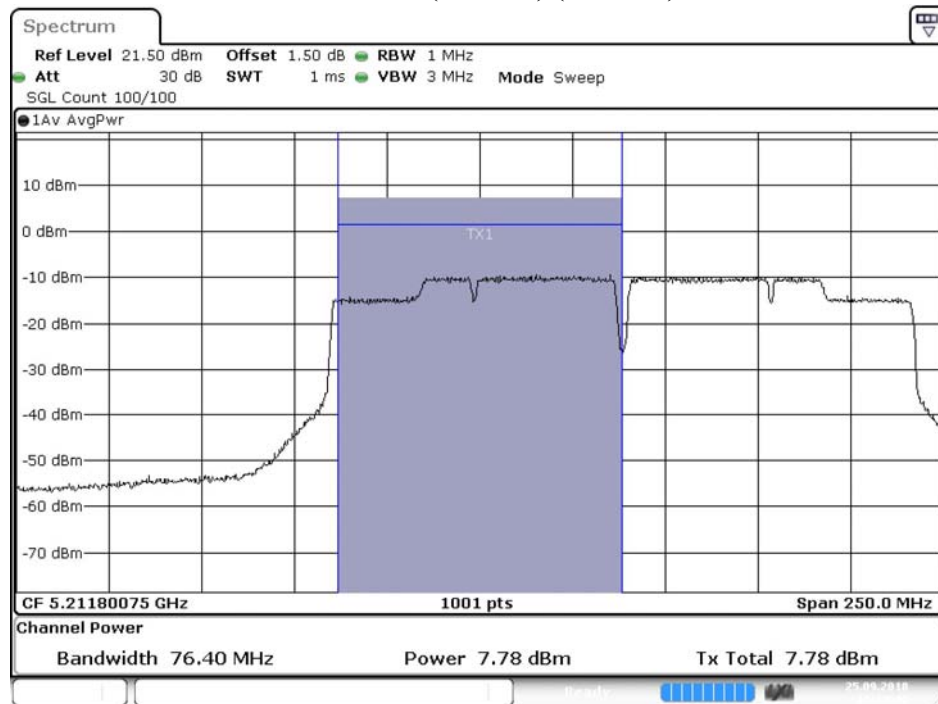


Date: 25.SEP.2018 15:13:40

Maximum conducted output power:
Channel 50 (U-NII-2A) (Chain B)

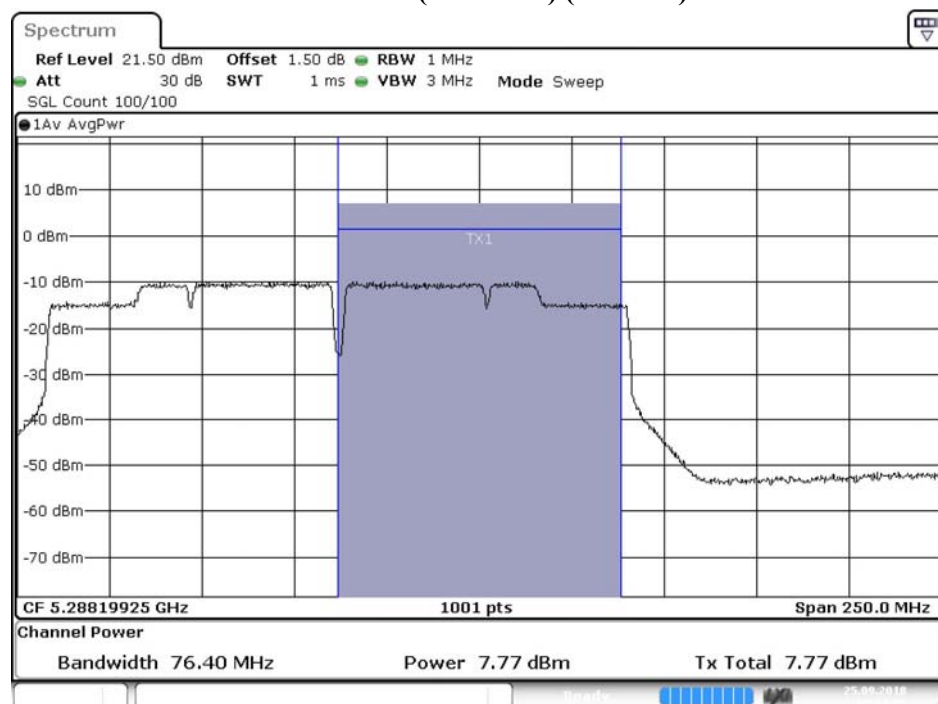


Date: 25.SEP.2018 15:14:03

**Maximum conducted output power:
Channel 114 (Chain A)**

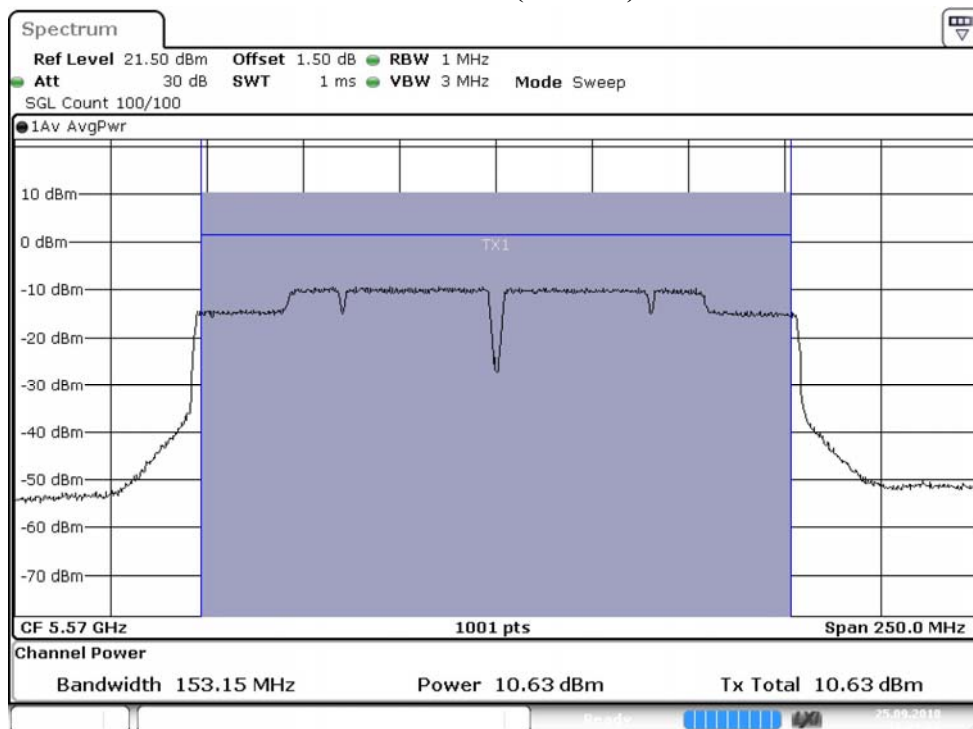

**Maximum conducted output power:
Channel 114 (Chain B)**

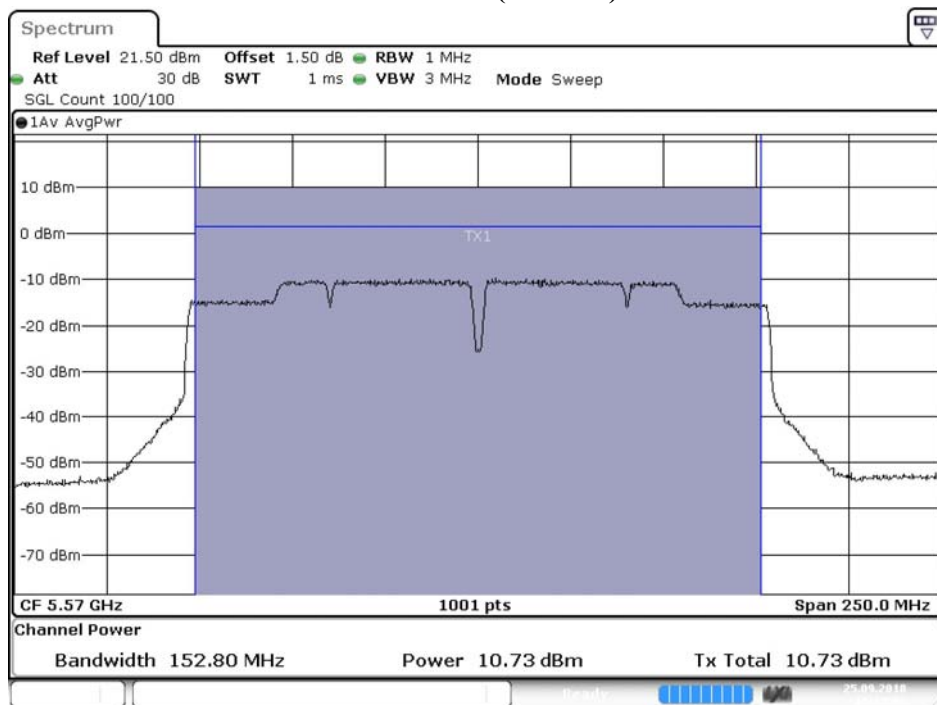

Date: 25.SEP.2018 15:17:03

待測物名稱：Intel® Wi-Fi 6 AX201

待測物型號：AX201D2W

測試項目：峰值發射功率

測試頻道：--

測試模式：Mode 1: SISO A: 發射器 802.11ax-20BW

檢測器：峰值

環境溫度：21 °C

測試日期：107年09月25日

環境濕度：53 %

Cable loss=1.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
36	5180	18.39	--	--	--	--	--	--	--	--	--	--	--
44	5220	20.76	20.65	20.53	20.48	20.37	20.22	20.19	20.05	19.9	19.81	19.75	19.64
48	5240	20.75	--	--	--	--	--	--	--	--	--	--	--
52	5260	20.87	--	--	--	--	--	--	--	--	--	--	--
60	5300	20.88	20.77	20.63	20.51	20.42	20.38	20.22	20.15	20.02	19.96	19.84	19.75
64	5320	17.99	--	--	--	--	--	--	--	--	--	--	--
100	5500	18.29	--	--	--	--	--	--	--	--	--	--	--
116	5580	20.73	20.62	20.53	20.44	20.33	20.25	20.17	20.04	19.92	19.84	19.73	19.62
140	5700	17.27	--	--	--	--	--	--	--	--	--	--	--
144(U-NII-2C)	5720	19.79	19.66	19.51	19.43	19.37	19.26	19.11	19.02	18.98	18.83	18.74	18.66
144(U-NII-3)	5720	14.72	14.65	14.53	14.44	14.32	14.28	14.16	14.07	13.93	13.85	13.79	13.61
149	5745	20.94	--	--	--	--	--	--	--	--	--	--	--
157	5785	20.86	20.73	20.61	20.57	20.42	20.35	20.26	20.19	20.08	19.92	19.87	19.73
165	5825	20.80	--	--	--	--	--	--	--	--	--	--	--


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel Number	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Output Power Limit	
				(dBm)	dBm+10log(BW)
36	5180	--	18.39	30	--
44	5220	--	20.76	30	--
48	5240	--	20.75	30	--
52	5260	19.381	20.87	24	23.87
60	5300	19.181	20.88	24	23.83
64	5320	19.131	17.99	24	23.82
100	5500	19.131	18.29	24	23.82
116	5580	19.281	20.73	24	23.85
140	5700	19.131	17.27	24	23.82
144(U-NII-2C)	5720	14.666	19.79	24	22.66
144(U-NII-3)	5720	--	14.72	30	--
149	5745	--	20.94	30	--
157	5785	--	20.86	30	--
165	5825	--	20.80	30	--

99% Occupied Bandwidth:


Channel 52

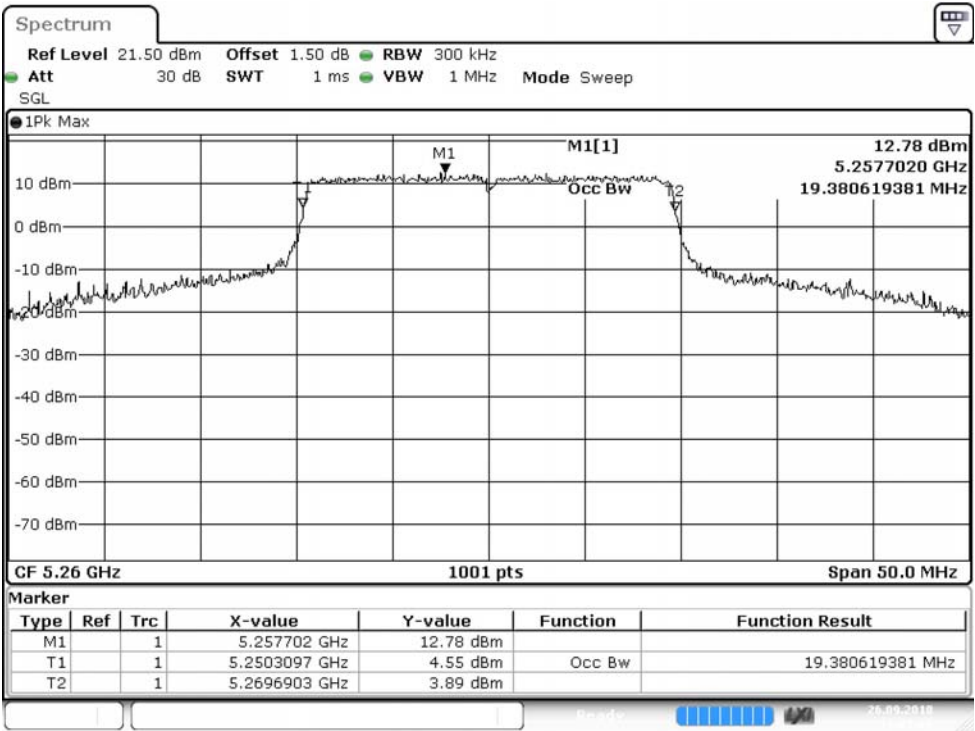


Channel 60

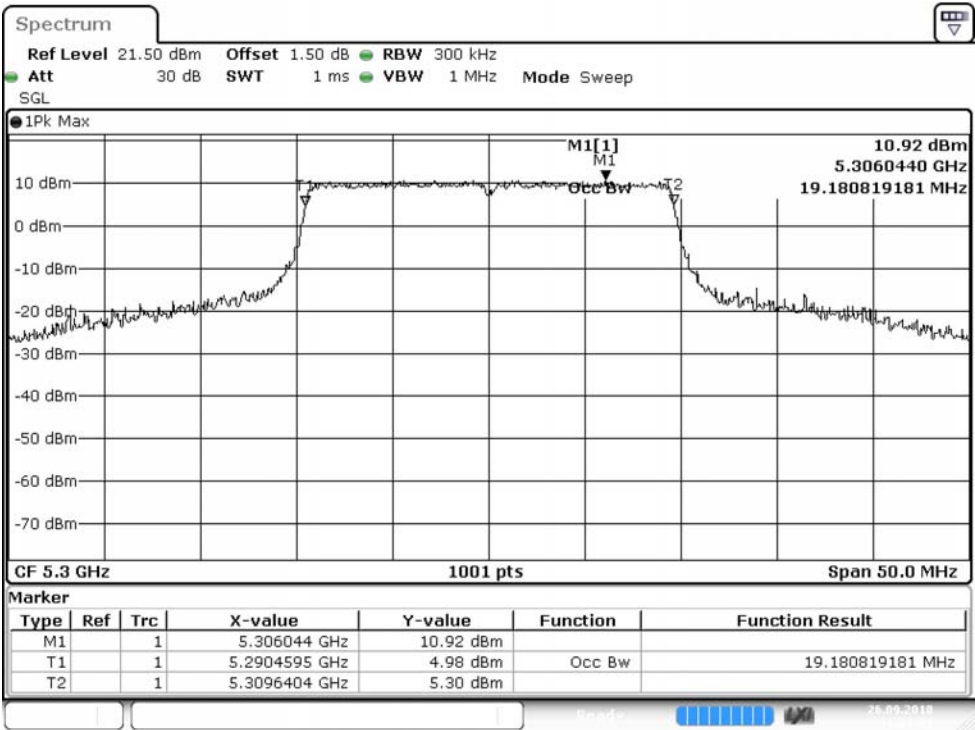


Channel 64

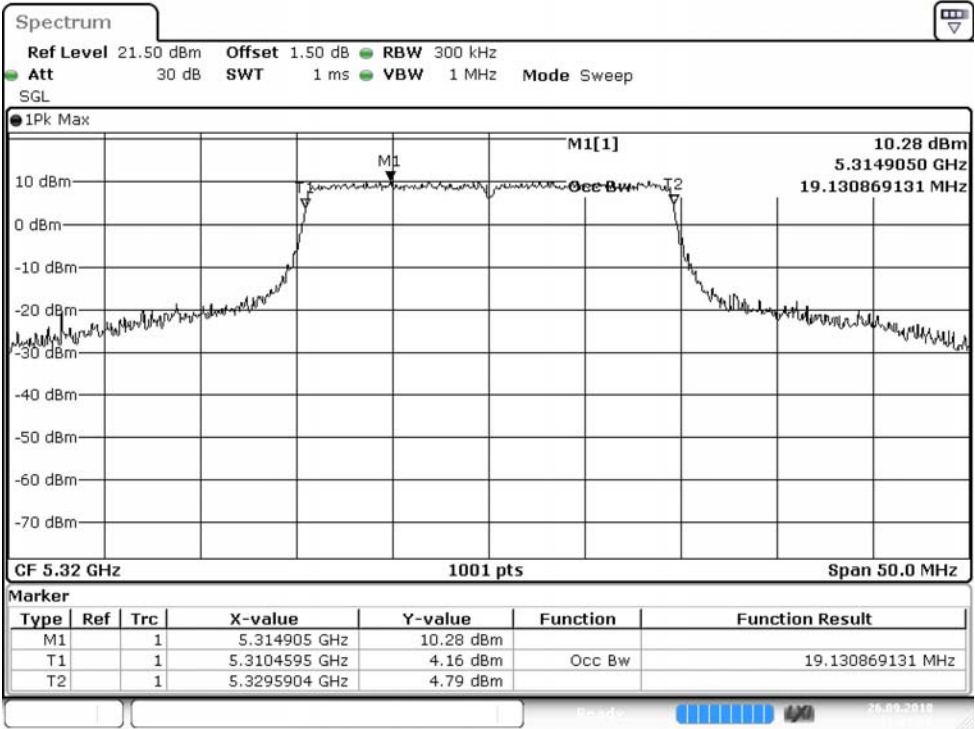

Channel 100

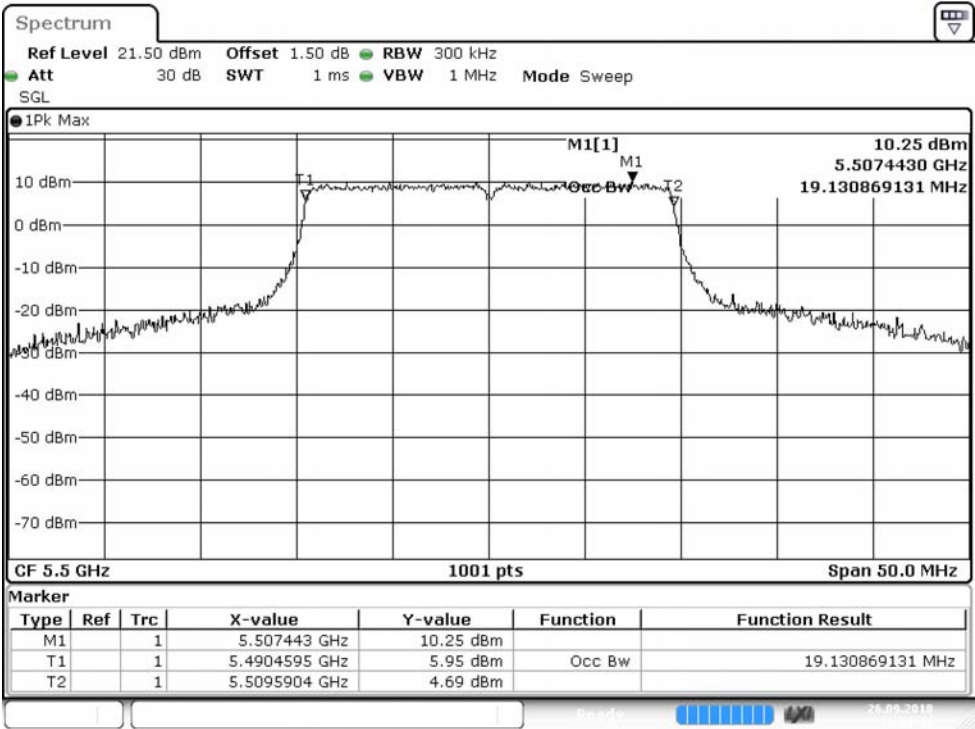

Channel 116

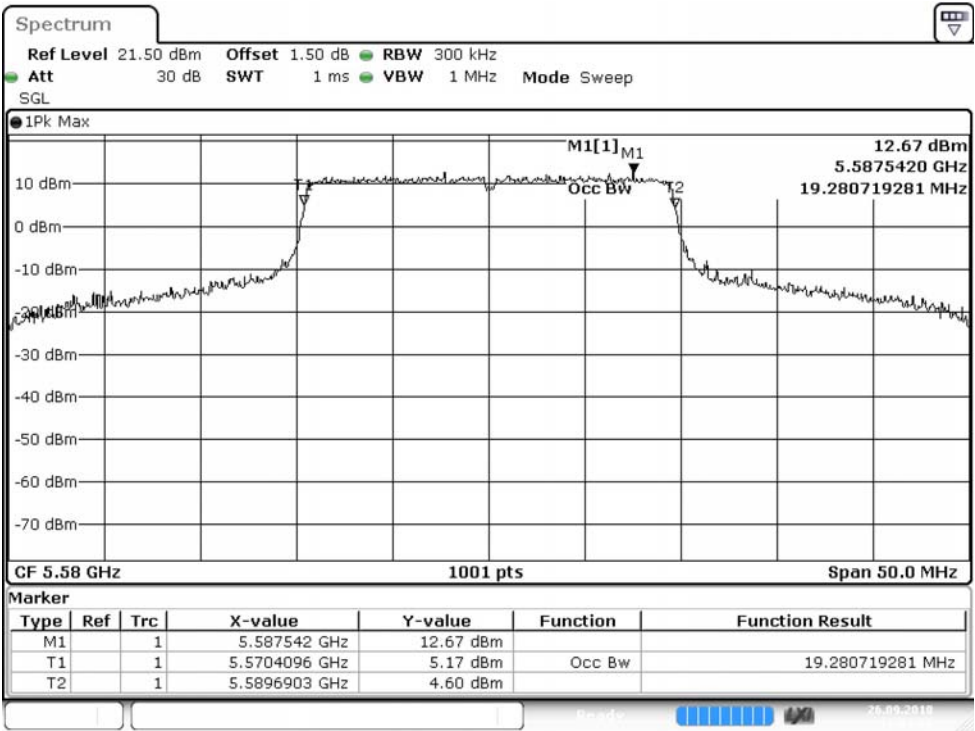

Channel 140

