


Site: AC1	Time: 2019/05/06 - 18:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2422MHz - Ant 0+1	

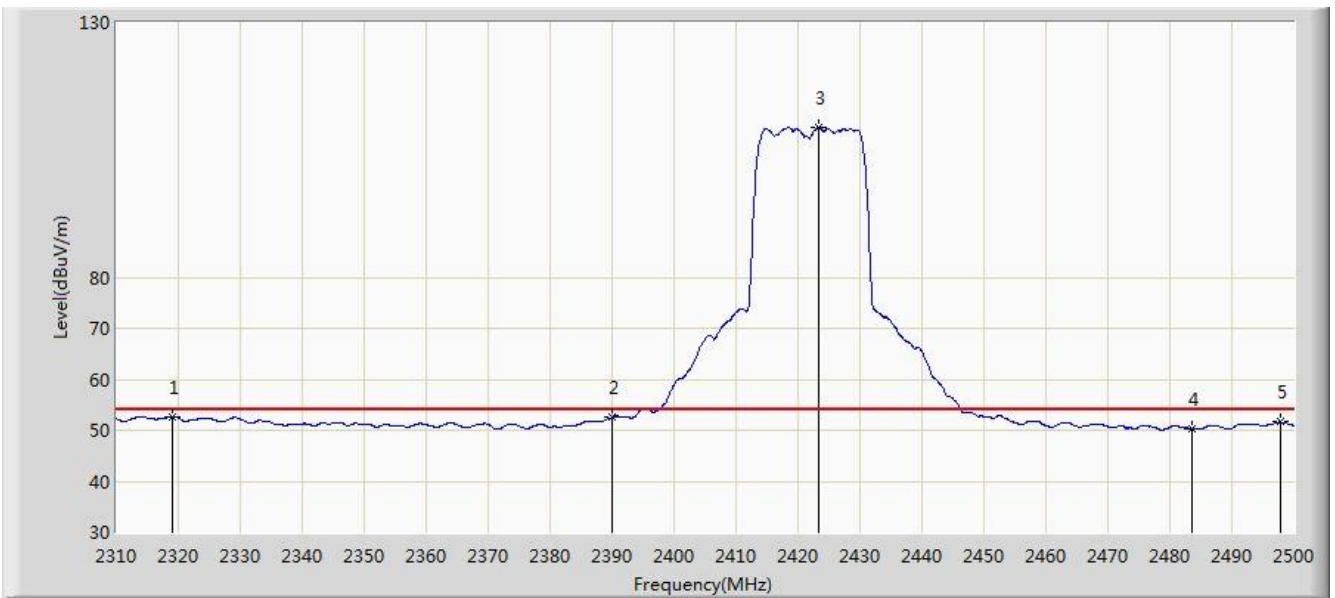


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2319.025	52.707	55.351	-1.293	54.000	-2.644	AV
2			2390.000	52.501	54.861	-1.499	54.000	-2.360	AV
3		*	2423.335	109.420	111.647	N/A	N/A	-2.227	AV
4			2483.500	50.297	52.283	-3.703	54.000	-1.986	AV
5			2497.815	51.603	53.540	-2.397	54.000	-1.937	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2437MHz - Ant 0+1	

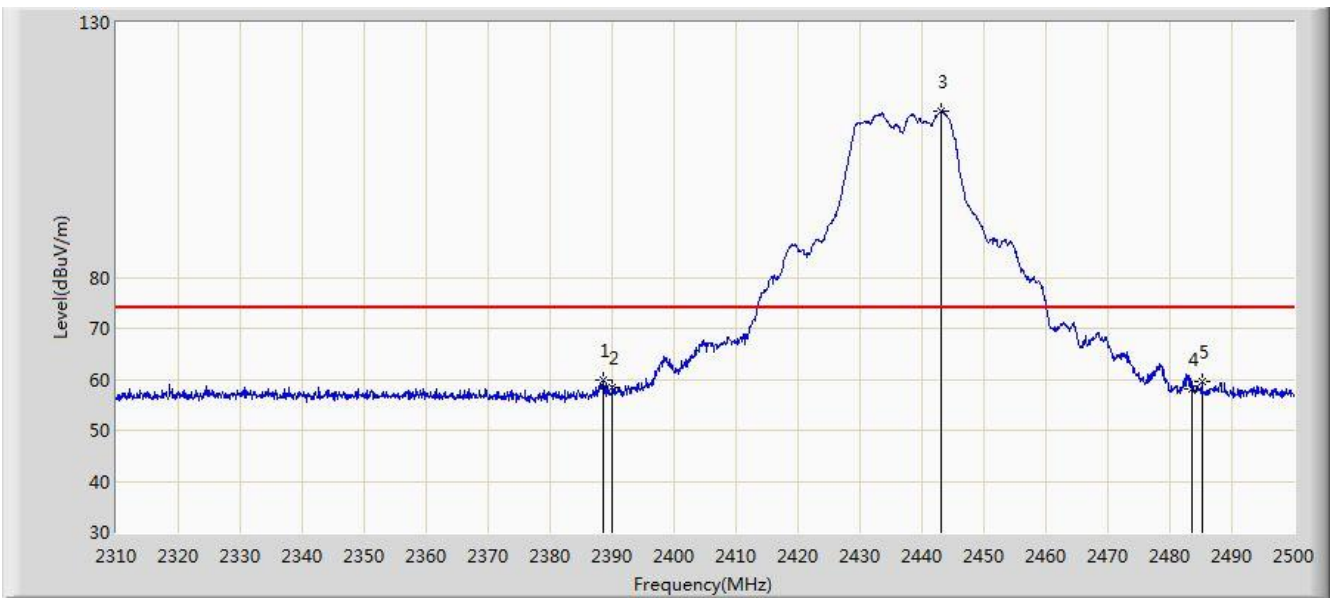


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.470	59.847	62.213	-14.153	74.000	-2.367	PK
2			2390.000	58.544	60.904	-15.456	74.000	-2.360	PK
3		*	2443.000	112.578	114.726	N/A	N/A	-2.148	PK
4			2483.500	58.228	60.214	-15.772	74.000	-1.986	PK
5			2485.180	59.640	61.619	-14.360	74.000	-1.979	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2437MHz - Ant 0+1	

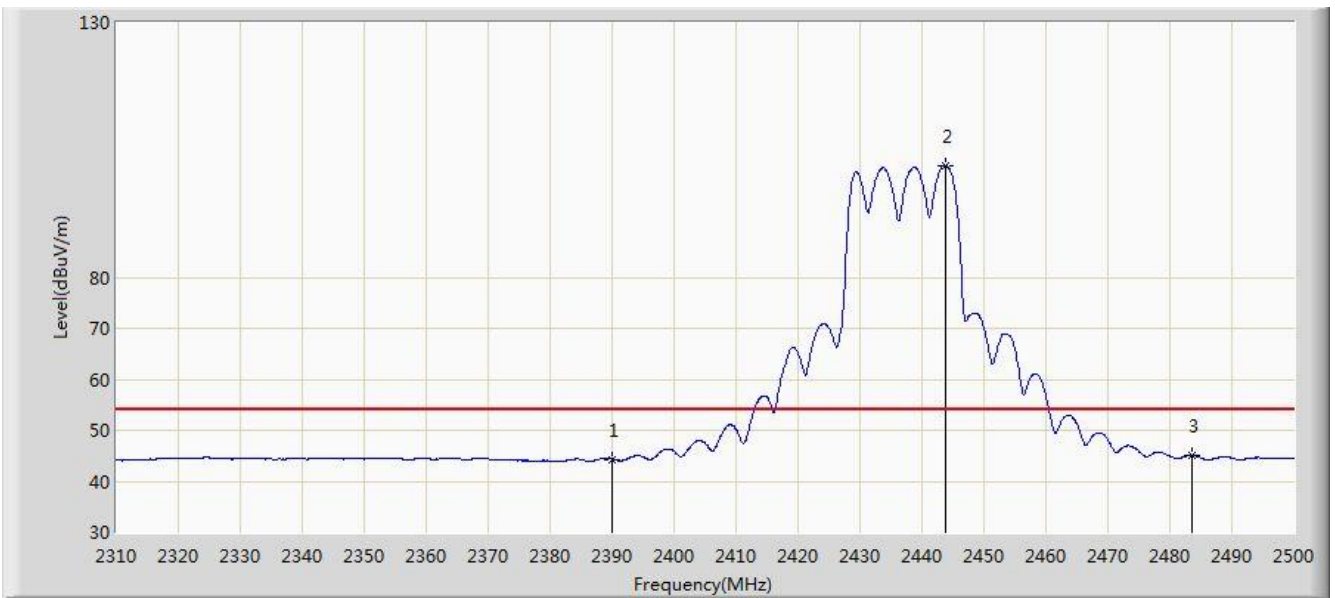


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.334	46.694	-9.666	54.000	-2.360	AV
2		*	2443.760	101.933	104.078	N/A	N/A	-2.145	AV
3			2483.500	45.050	47.036	-8.950	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2437MHz - Ant 0+1	

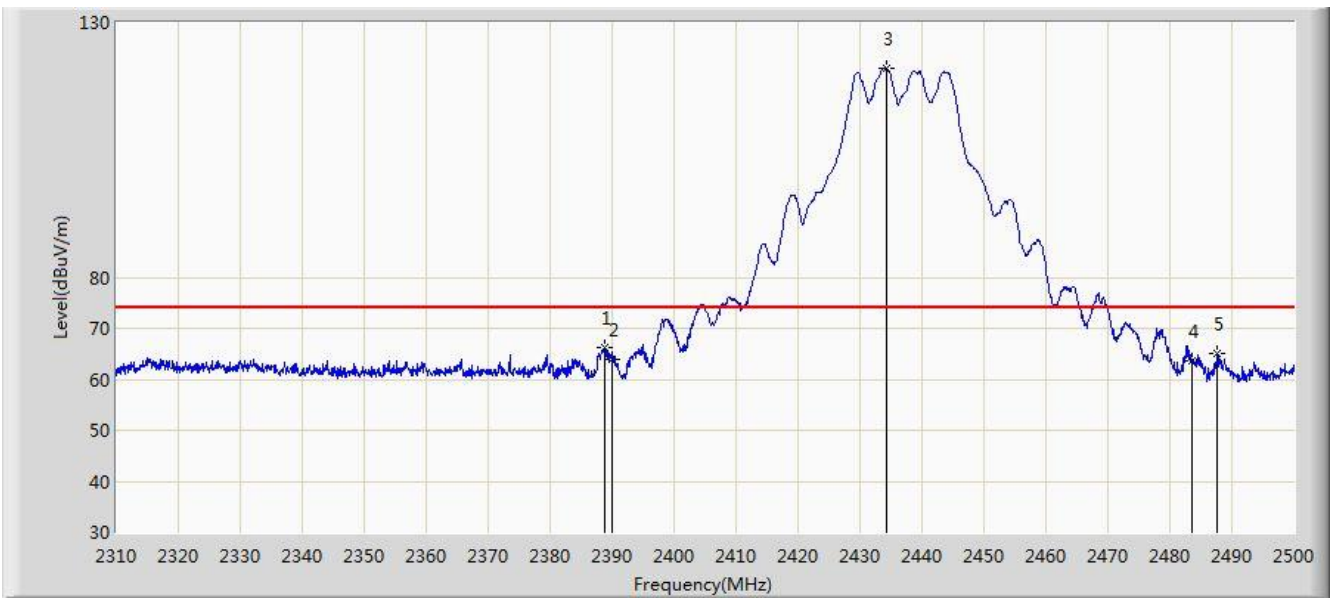


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.755	66.267	68.632	-7.733	74.000	-2.365	PK
2			2390.000	63.971	66.331	-10.029	74.000	-2.360	PK
3		*	2434.260	121.036	123.219	N/A	N/A	-2.183	PK
4			2483.500	63.544	65.530	-10.456	74.000	-1.986	PK
5			2487.650	65.145	67.114	-8.855	74.000	-1.970	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2437MHz - Ant 0+1	

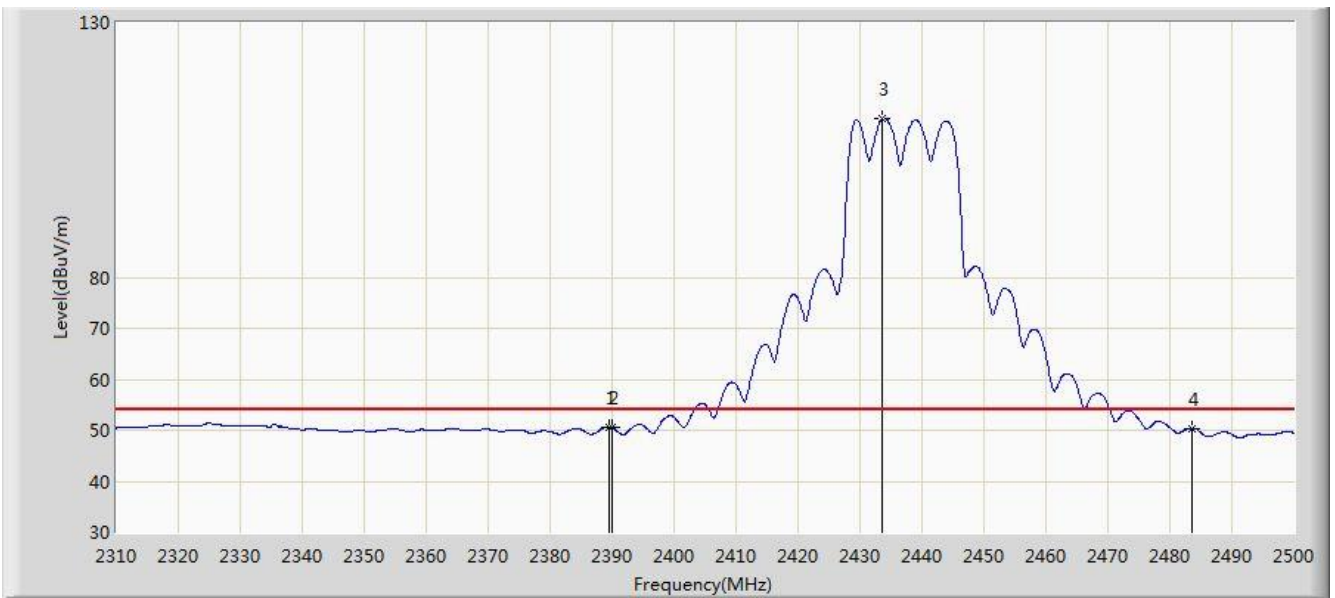


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.420	50.674	53.036	-3.326	54.000	-2.363	AV
2			2390.000	50.456	52.816	-3.544	54.000	-2.360	AV
3		*	2433.690	111.274	113.459	N/A	N/A	-2.185	AV
4			2483.500	50.424	52.410	-3.576	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2452MHz - Ant 0+1	

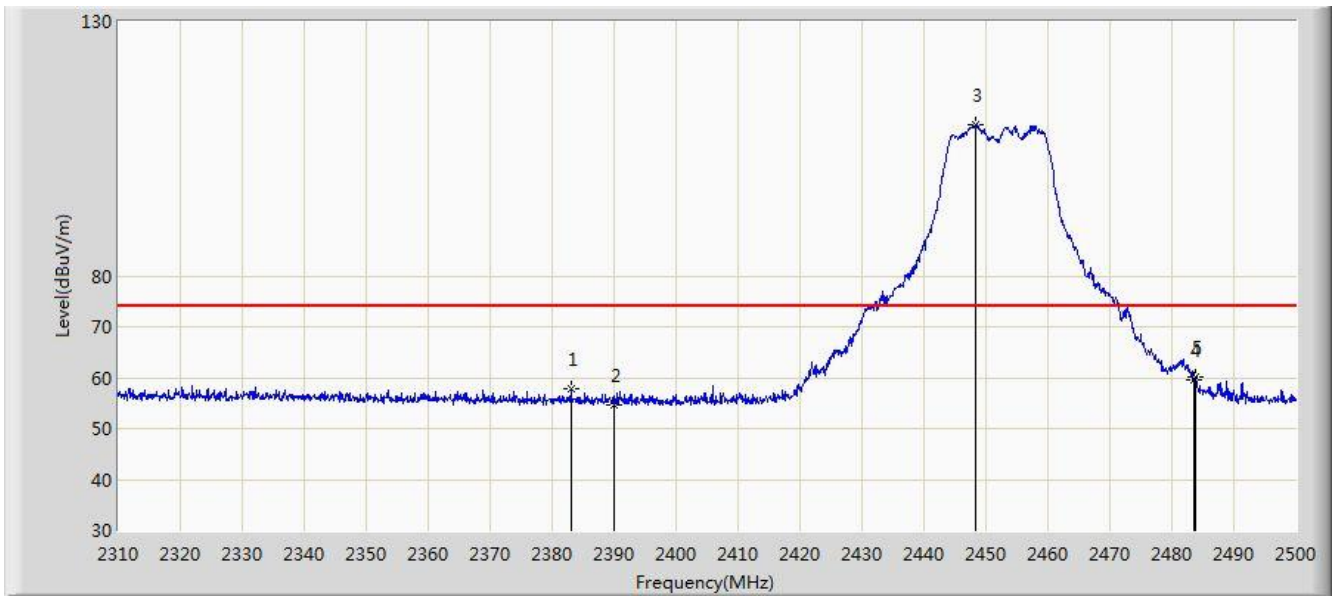

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.055	57.796	60.184	-16.204	74.000	-2.387	PK
2			2390.000	54.760	57.120	-19.240	74.000	-2.360	PK
3		*	2448.320	109.730	111.856	N/A	N/A	-2.127	PK
4			2483.500	59.430	61.416	-14.570	74.000	-1.986	PK
5			2483.850	60.005	61.989	-13.995	74.000	-1.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2452MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2344.770	43.216	45.757	-10.784	54.000	-2.541	AV
2			2390.000	42.863	45.223	-11.137	54.000	-2.360	AV
3		*	2448.795	99.205	101.329	N/A	N/A	-2.125	AV
4			2483.500	44.691	46.677	-9.309	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2452MHz - Ant 0+1	

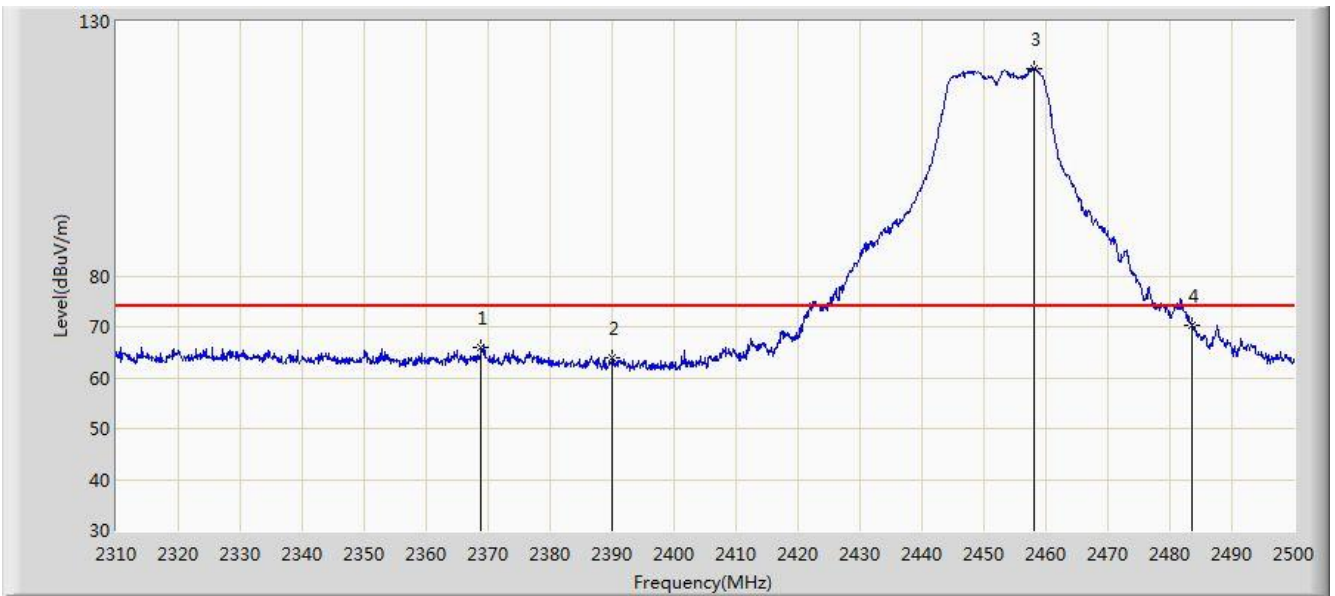


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.900	65.883	68.327	-8.117	74.000	-2.444	PK
2			2390.000	63.889	66.249	-10.111	74.000	-2.360	PK
3		*	2458.200	120.814	122.901	N/A	N/A	-2.086	PK
4			2483.500	70.425	72.411	-3.575	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2452MHz - Ant 0+1	

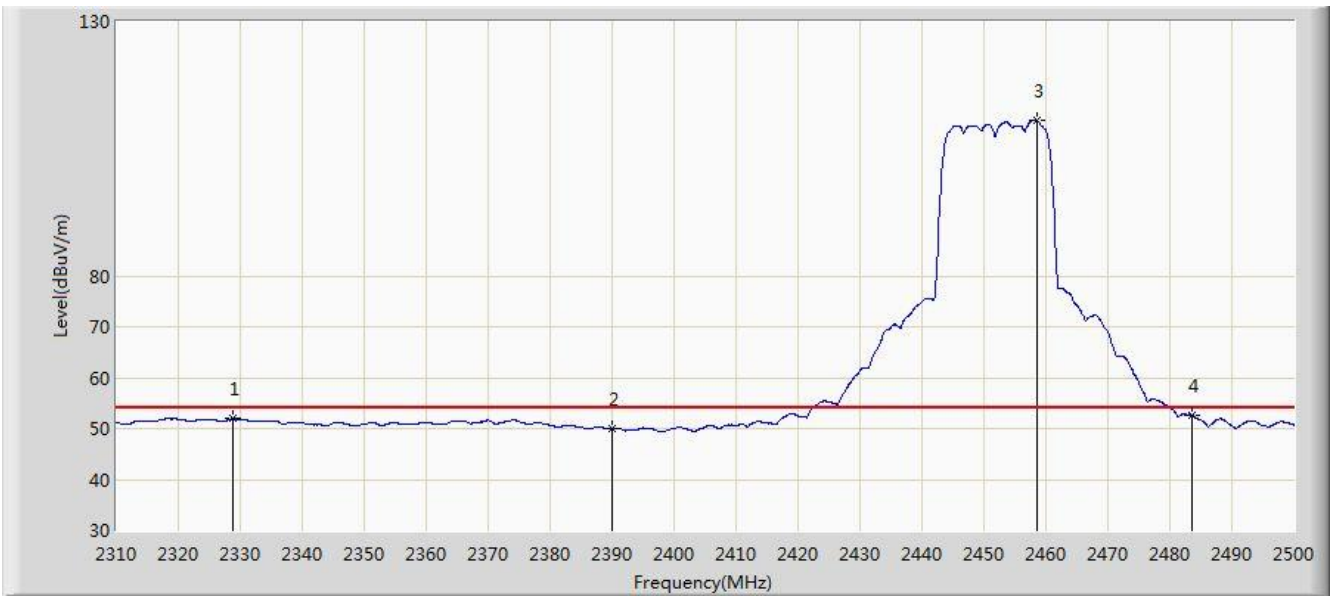


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2328.715	51.897	54.502	-2.103	54.000	-2.606	AV
2			2390.000	49.972	52.332	-4.028	54.000	-2.360	AV
3		*	2458.485	110.555	112.641	N/A	N/A	-2.086	AV
4			2483.500	52.816	54.802	-1.184	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2457MHz - Ant 0+1	

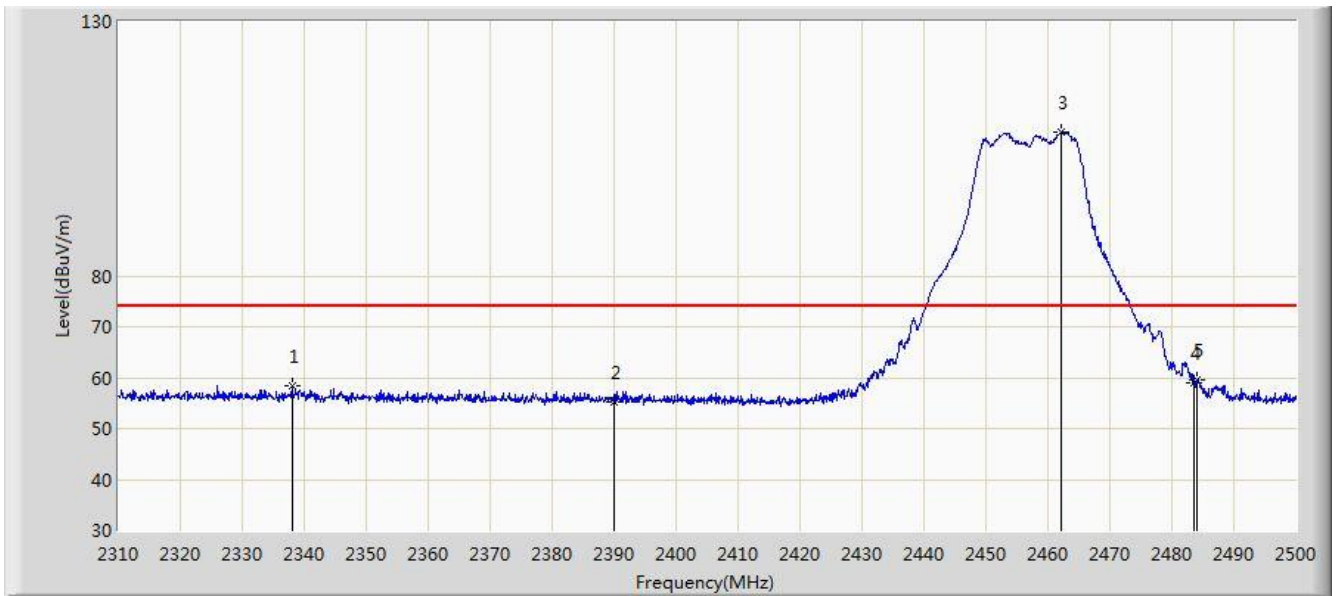

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2338.025	58.425	60.993	-15.575	74.000	-2.568	PK
2			2390.000	55.223	57.583	-18.777	74.000	-2.360	PK
3		*	2462.095	108.224	110.295	N/A	N/A	-2.072	PK
4			2483.500	58.961	60.947	-15.039	74.000	-1.986	PK
5			2484.135	59.699	61.682	-14.301	74.000	-1.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2457MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.300	43.245	45.719	-10.755	54.000	-2.474	AV
2			2390.000	42.856	45.216	-11.144	54.000	-2.360	AV
3		*	2453.545	97.706	99.811	N/A	N/A	-2.106	AV
4			2483.500	44.399	46.385	-9.601	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2457MHz - Ant 0+1	

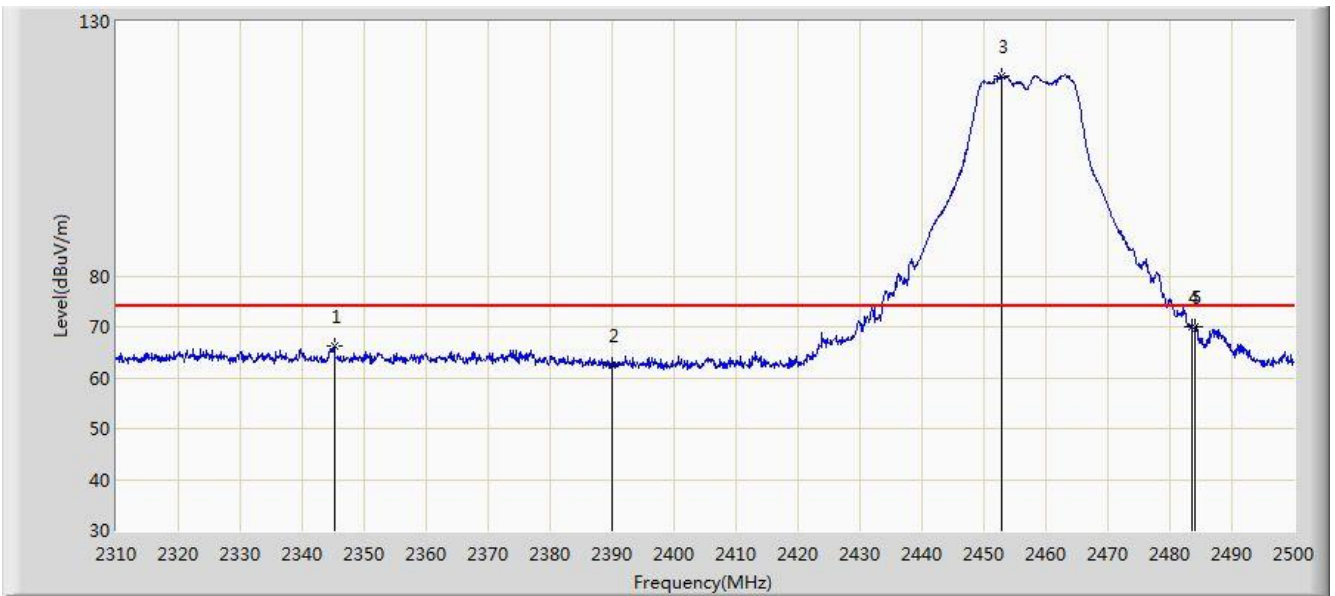


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2345.150	66.308	68.848	-7.692	74.000	-2.540	PK
2			2390.000	62.319	64.679	-11.681	74.000	-2.360	PK
3		*	2452.880	119.350	121.458	N/A	N/A	-2.107	PK
4			2483.500	69.937	71.923	-4.063	74.000	-1.986	PK
5			2484.135	70.046	72.029	-3.954	74.000	-1.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2457MHz - Ant 0+1	

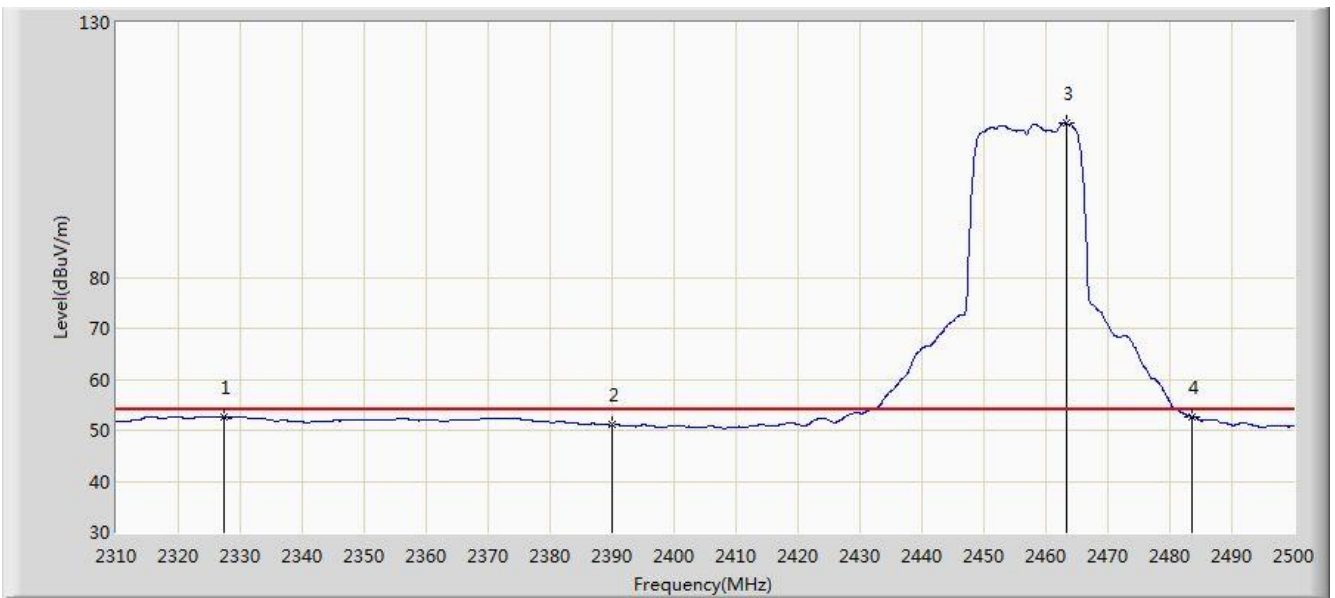


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.290	52.600	55.211	-1.400	54.000	-2.611	AV
2			2390.000	51.037	53.397	-2.963	54.000	-2.360	AV
3		*	2463.235	110.164	112.230	N/A	N/A	-2.066	AV
4			2483.500	52.737	54.723	-1.263	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2462MHz - Ant 0+1	

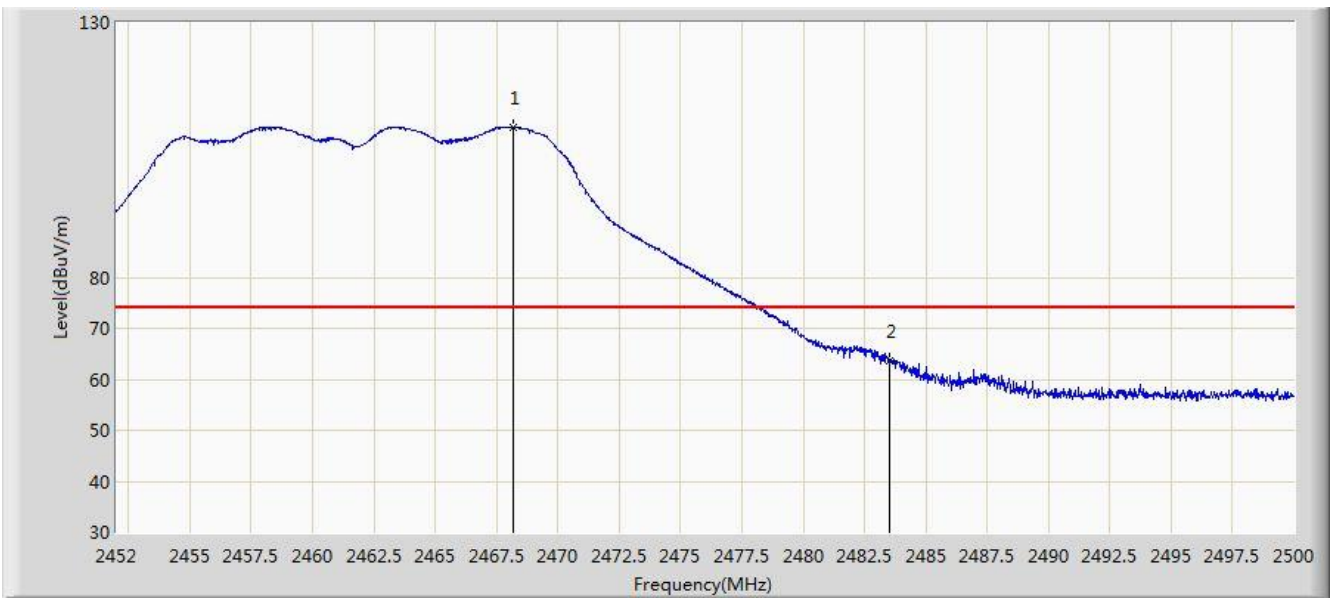


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.176	109.520	111.567	N/A	N/A	-2.046	PK
2			2483.500	63.639	65.625	-10.361	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2462MHz - Ant 0+1	

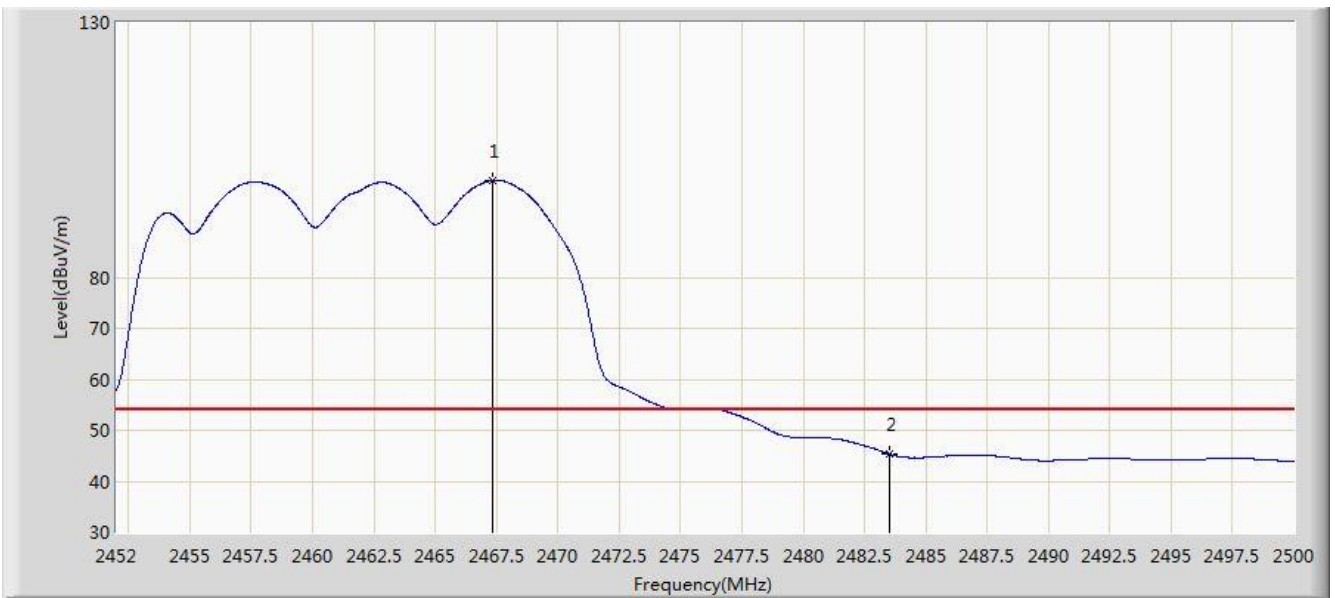


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.360	98.989	101.040	N/A	N/A	-2.050	AV
2			2483.500	45.363	47.349	-8.637	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2462MHz - Ant 0+1	

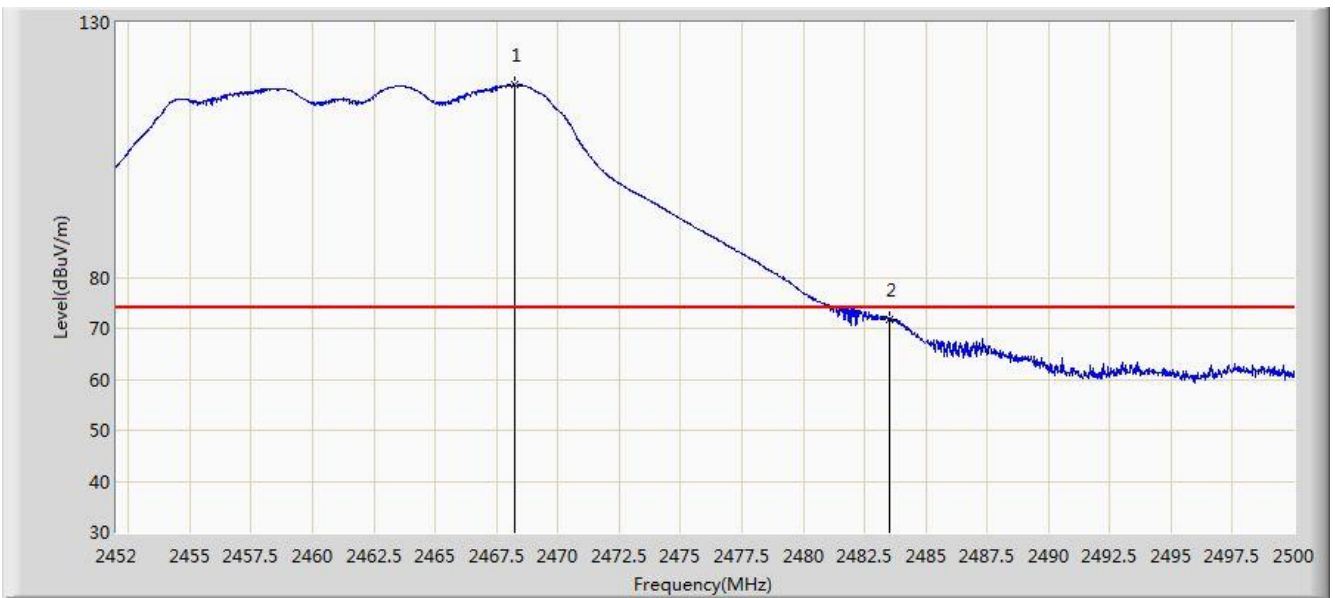


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.248	117.735	119.782	N/A	N/A	-2.046	PK
2			2483.500	71.772	73.758	-2.228	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11g at Channel 2462MHz - Ant 0+1	

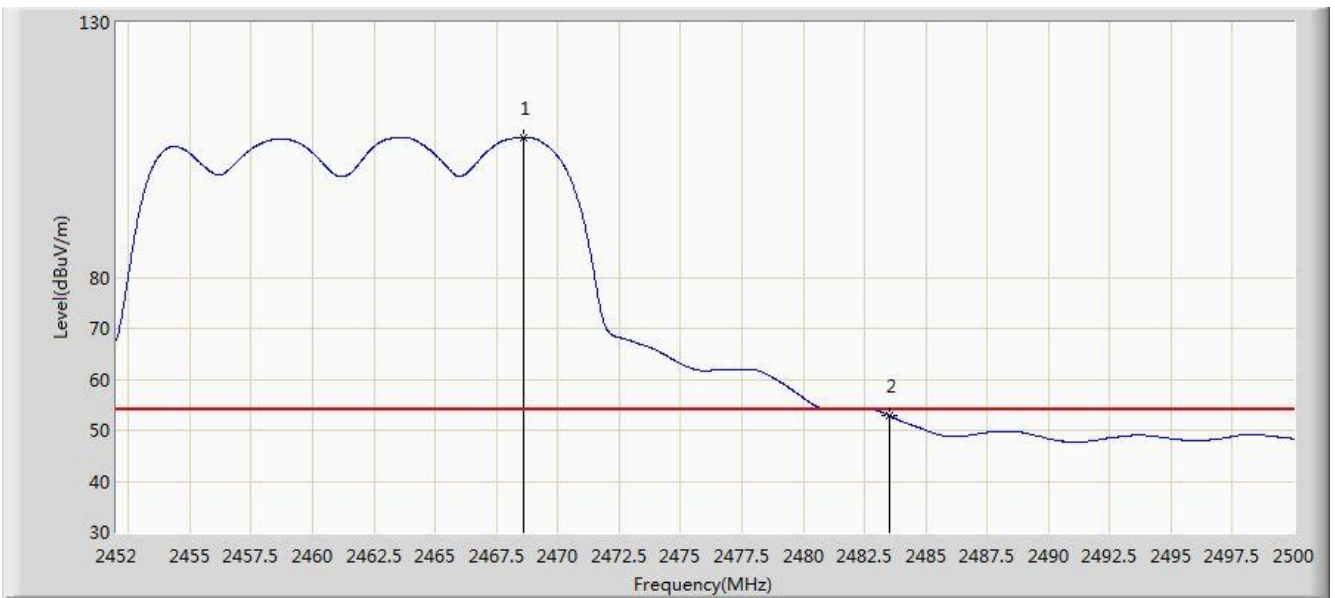


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.584	107.485	109.531	N/A	N/A	-2.046	AV
2			2483.500	52.903	54.889	-1.097	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2412MHz - Ant 0+1	

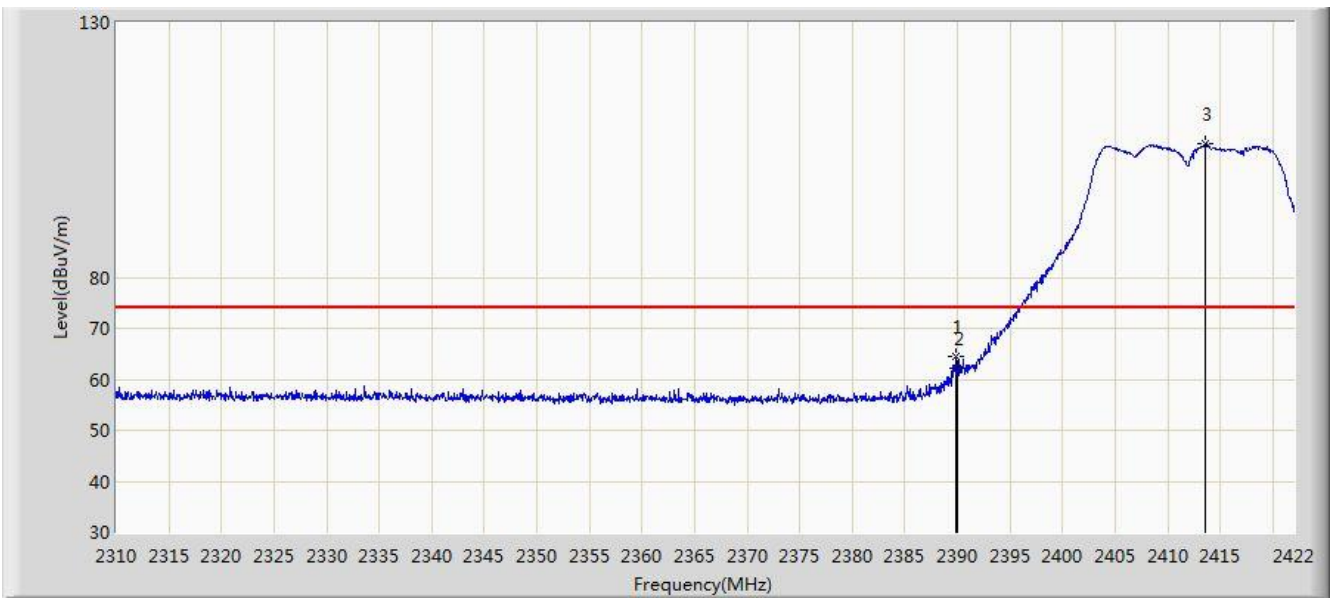


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	64.550	66.911	-9.450	74.000	-2.360	PK
2			2390.000	62.075	64.435	-11.925	74.000	-2.360	PK
3		*	2413.544	106.268	108.534	N/A	N/A	-2.266	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2412MHz - Ant 0+1	

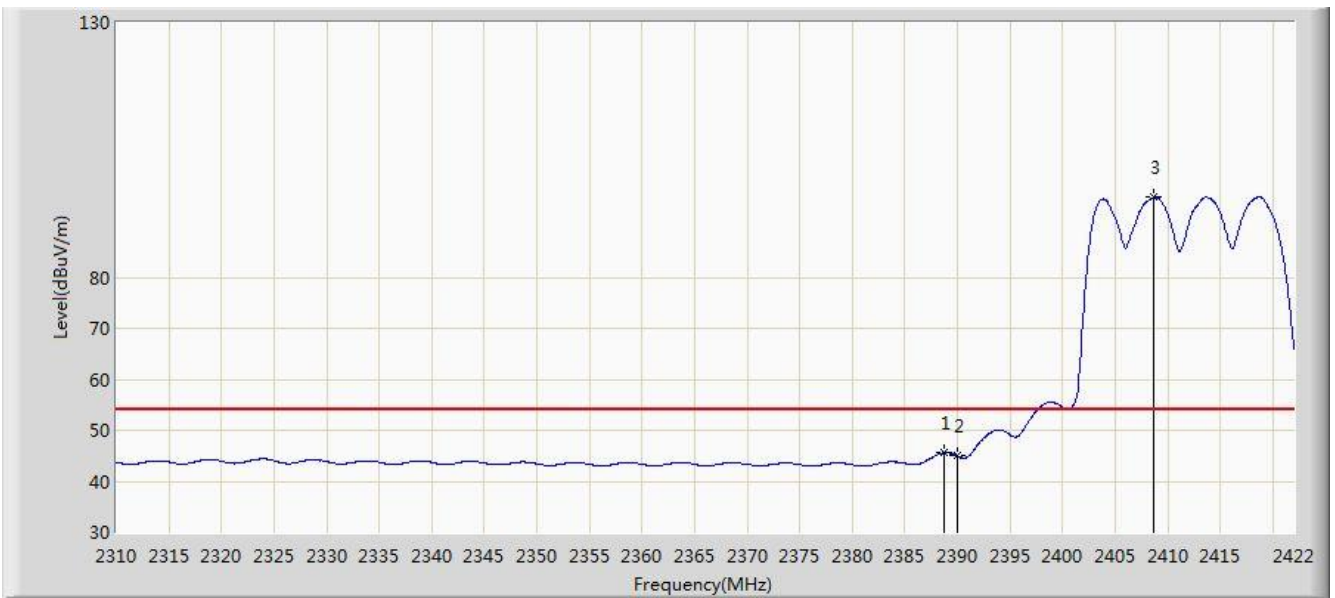


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.680	45.570	47.935	-8.430	54.000	-2.366	AV
2			2390.000	44.968	47.328	-9.032	54.000	-2.360	AV
3		*	2408.728	95.750	98.035	N/A	N/A	-2.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2412MHz - Ant 0+1	

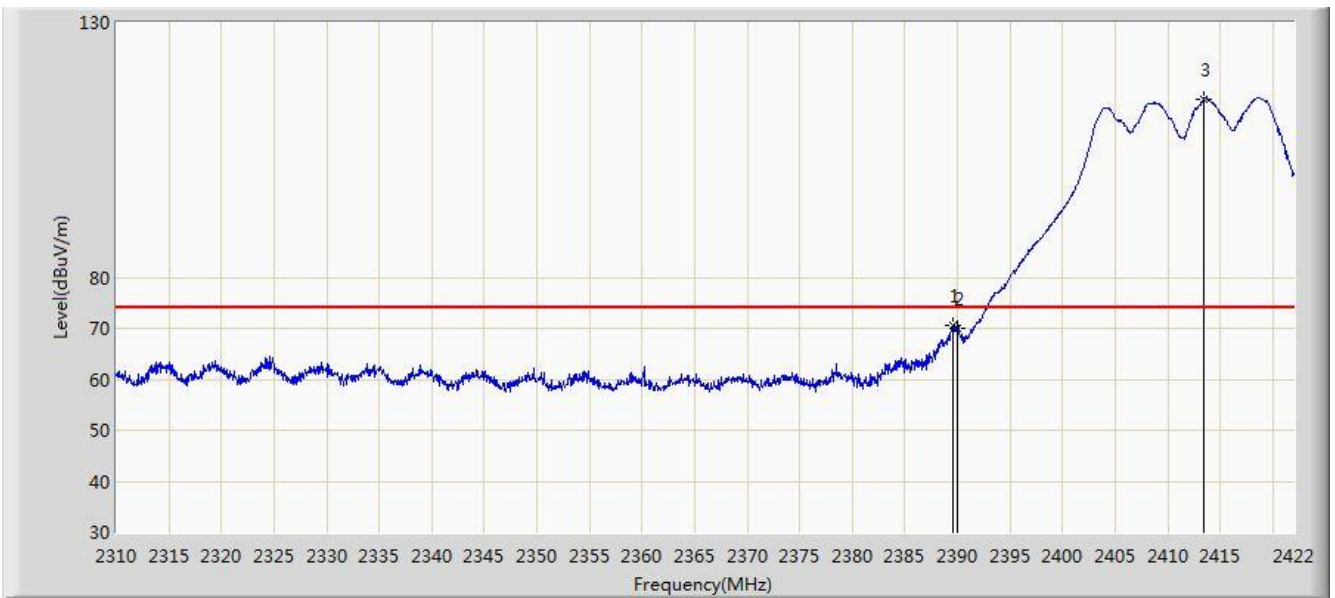


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.576	70.555	72.917	-3.445	74.000	-2.361	PK
2			2390.000	69.863	72.223	-4.137	74.000	-2.360	PK
3		*	2413.432	114.968	117.235	N/A	N/A	-2.267	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2412MHz - Ant 0+1	

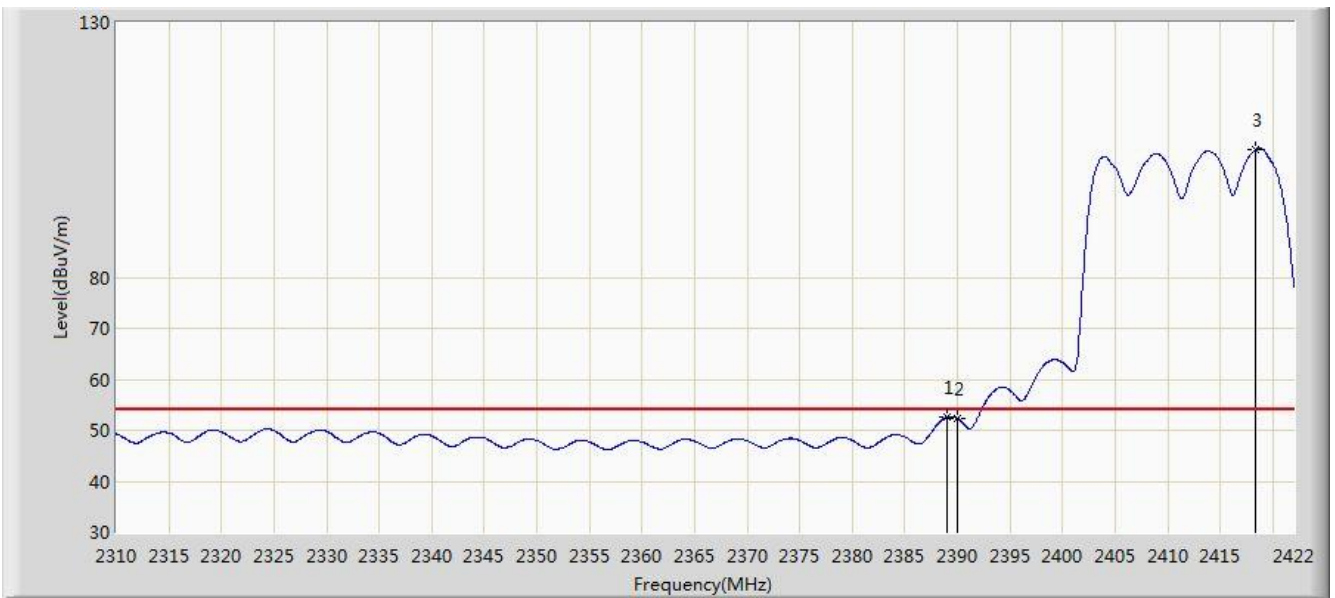


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	52.520	54.884	-1.480	54.000	-2.364	AV
2			2390.000	52.303	54.663	-1.697	54.000	-2.360	AV
3		*	2418.416	105.030	107.277	N/A	N/A	-2.247	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2417MHz - Ant 0+1	

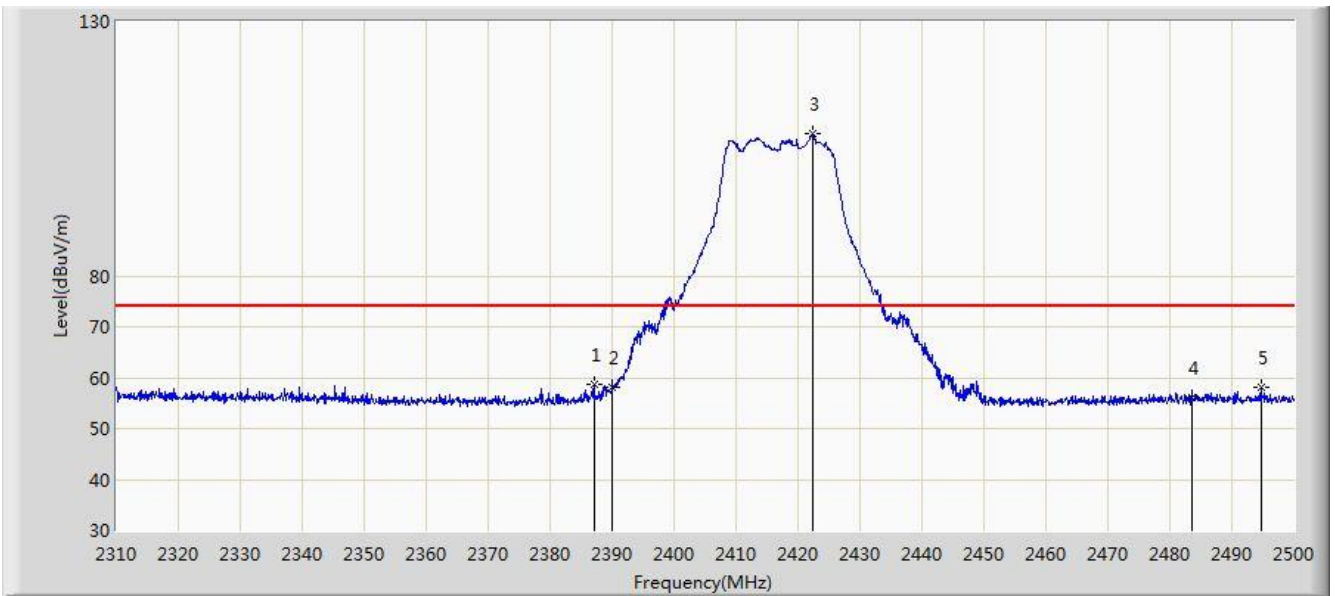


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.045	58.769	61.141	-15.231	74.000	-2.372	PK
2			2390.000	58.228	60.588	-15.772	74.000	-2.360	PK
3		*	2422.290	108.041	110.272	N/A	N/A	-2.231	PK
4			2483.500	55.984	57.970	-18.016	74.000	-1.986	PK
5			2494.680	58.022	59.963	-15.978	74.000	-1.942	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2417MHz - Ant 0+1	

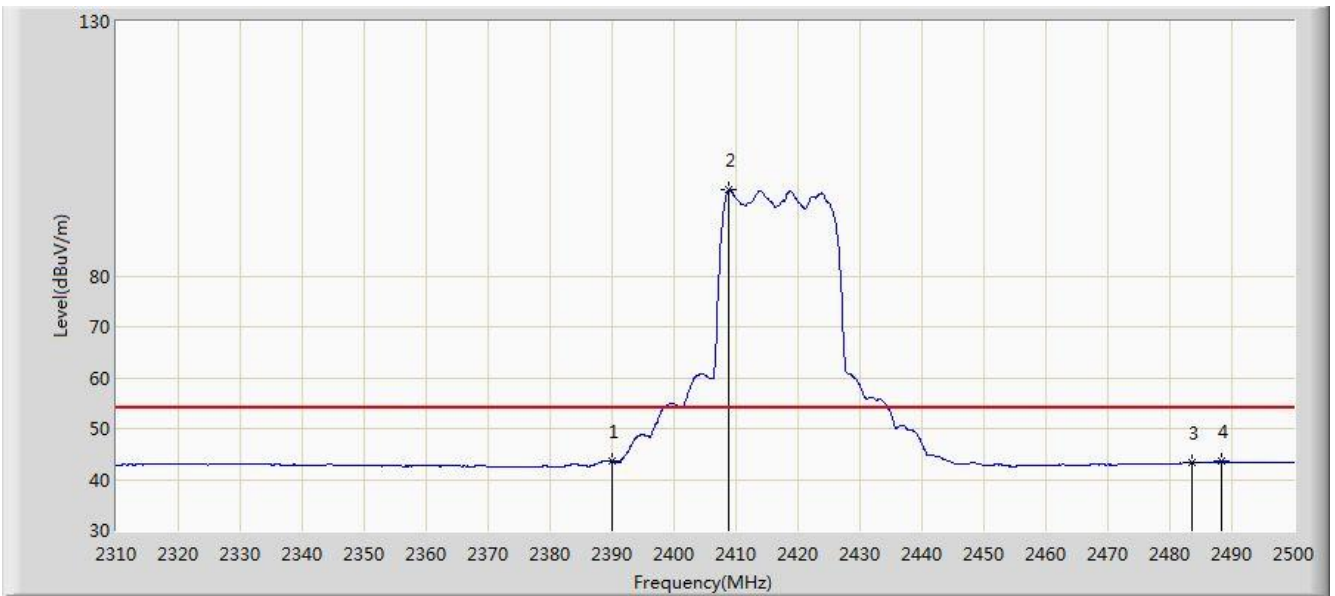


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.562	45.922	-10.438	54.000	-2.360	AV
2		*	2408.895	97.003	99.288	N/A	N/A	-2.285	AV
3			2483.500	43.289	45.275	-10.711	54.000	-1.986	AV
4			2488.410	43.543	45.509	-10.457	54.000	-1.967	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 18:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2417MHz - Ant 0+1	

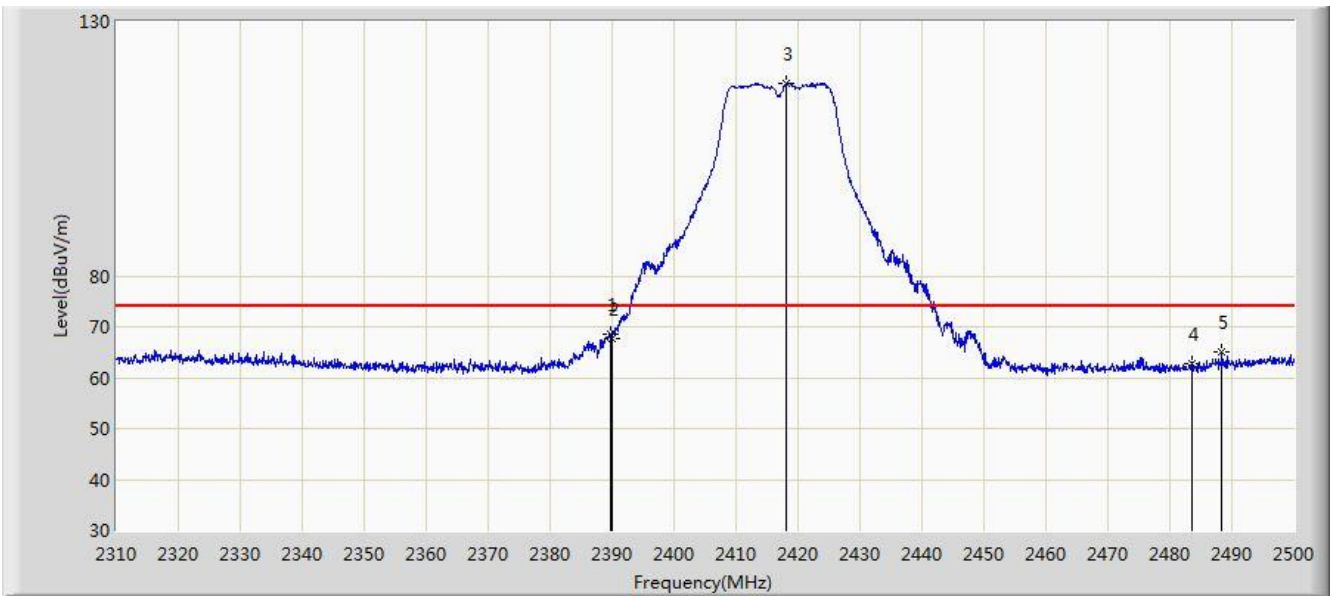


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	68.567	70.928	-5.433	74.000	-2.361	PK
2			2390.000	67.795	70.155	-6.205	74.000	-2.360	PK
3		*	2418.205	117.775	120.023	N/A	N/A	-2.247	PK
4			2483.500	62.731	64.717	-11.269	74.000	-1.986	PK
5			2488.410	65.214	67.180	-8.786	74.000	-1.967	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Engineer: Flag Yang	
Site: AC1	Time: 2019/05/06 - 18:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2417MHz - Ant 0+1	

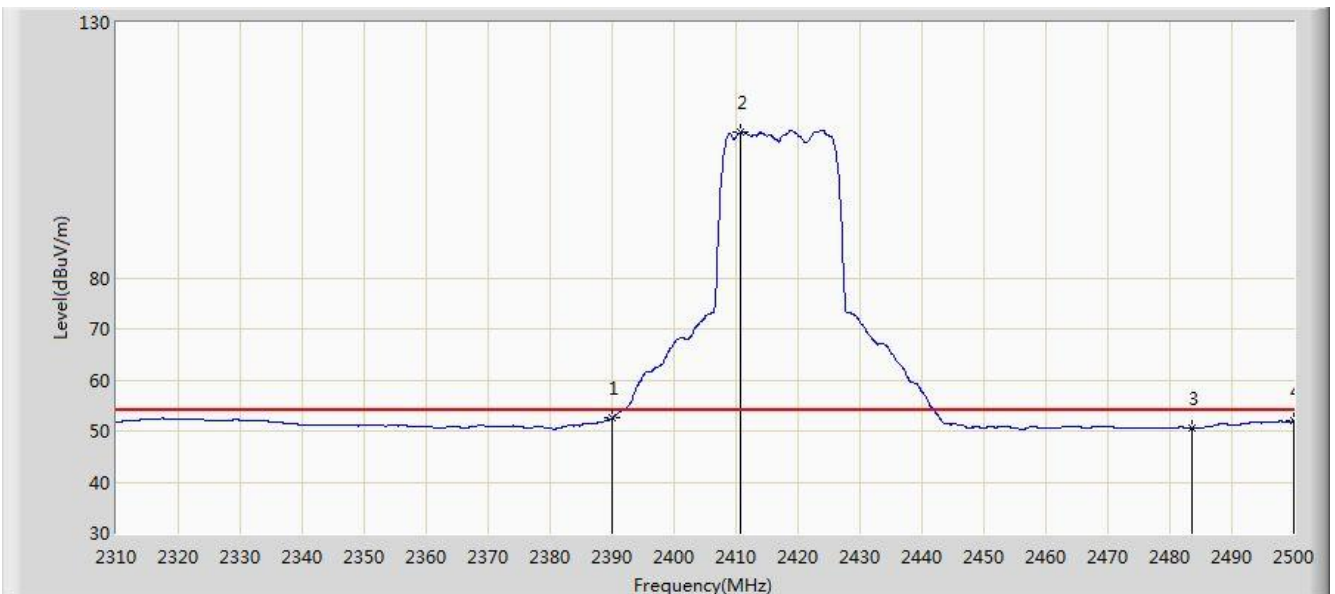


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.512	54.872	-1.488	54.000	-2.360	AV
2		*	2410.700	108.475	110.752	N/A	N/A	-2.278	AV
3			2483.500	50.638	52.624	-3.362	54.000	-1.986	AV
4			2500.000	51.912	53.850	-2.088	54.000	-1.937	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2422MHz - Ant 0+1	

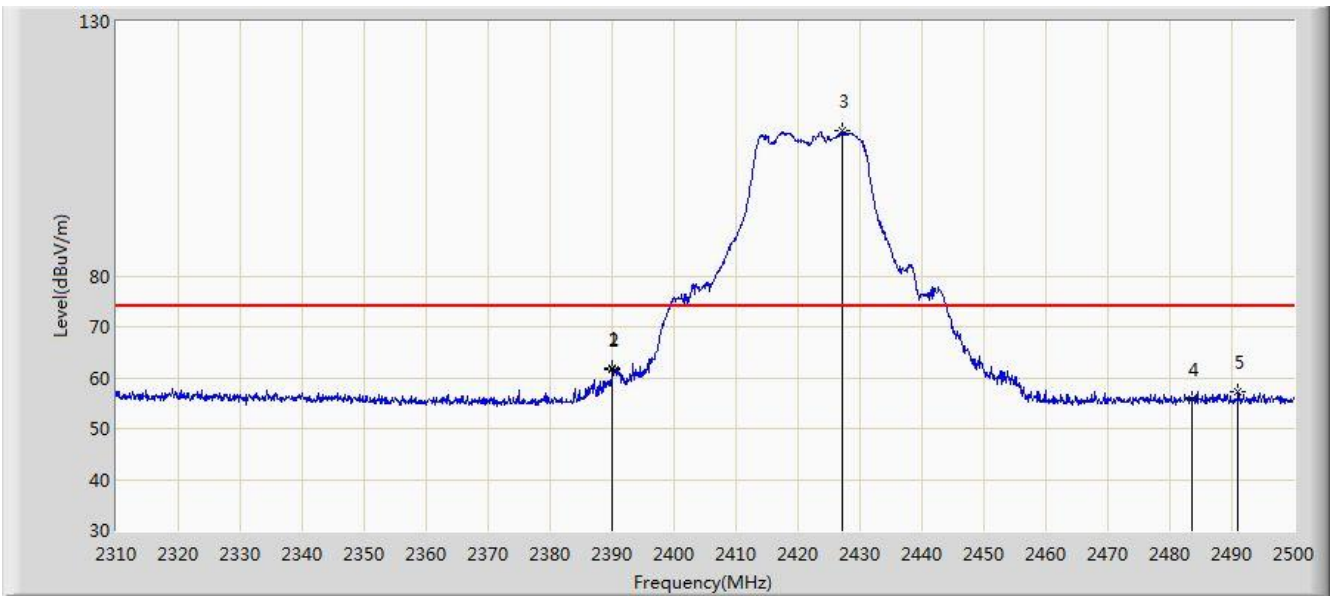


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.990	61.822	64.182	-12.178	74.000	-2.360	PK
2			2390.000	61.701	64.061	-12.299	74.000	-2.360	PK
3		*	2427.135	108.532	110.744	N/A	N/A	-2.213	PK
4			2483.500	55.712	57.698	-18.288	74.000	-1.986	PK
5			2490.975	57.205	59.161	-16.795	74.000	-1.956	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2422MHz - Ant 0+1	

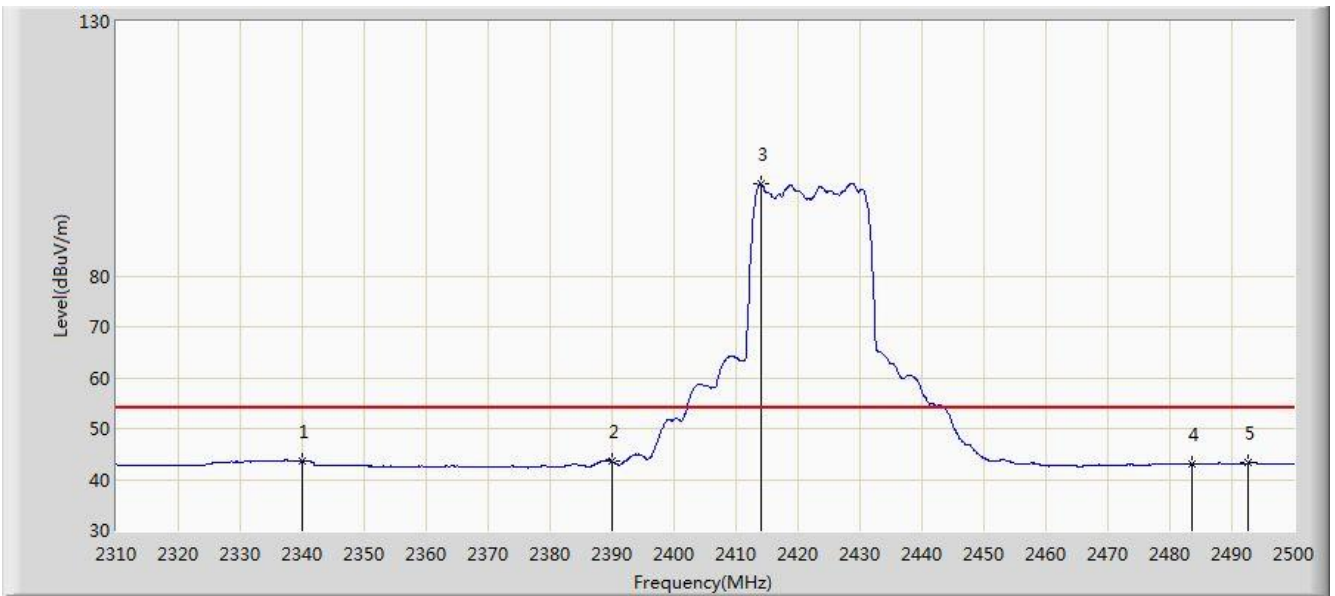


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2340.020	43.685	46.245	-10.315	54.000	-2.560	AV
2			2390.000	43.485	45.845	-10.515	54.000	-2.360	AV
3		*	2413.930	98.007	100.272	N/A	N/A	-2.265	AV
4			2483.500	43.137	45.123	-10.863	54.000	-1.986	AV
5			2492.685	43.202	45.151	-10.798	54.000	-1.949	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2422MHz - Ant 0+1	

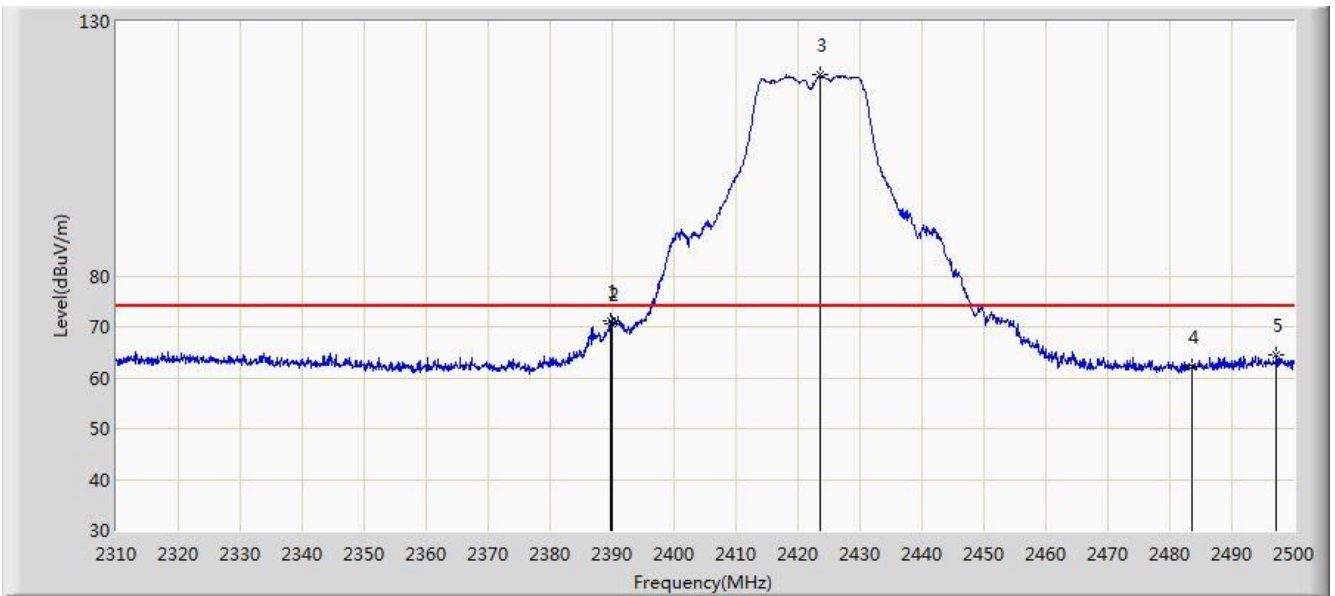


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	71.118	73.479	-2.882	74.000	-2.361	PK
2			2390.000	70.658	73.018	-3.342	74.000	-2.360	PK
3		*	2423.620	119.540	121.766	N/A	N/A	-2.226	PK
4			2483.500	62.148	64.134	-11.852	74.000	-1.986	PK
5			2497.245	64.442	66.379	-9.558	74.000	-1.937	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2422MHz - Ant 0+1	

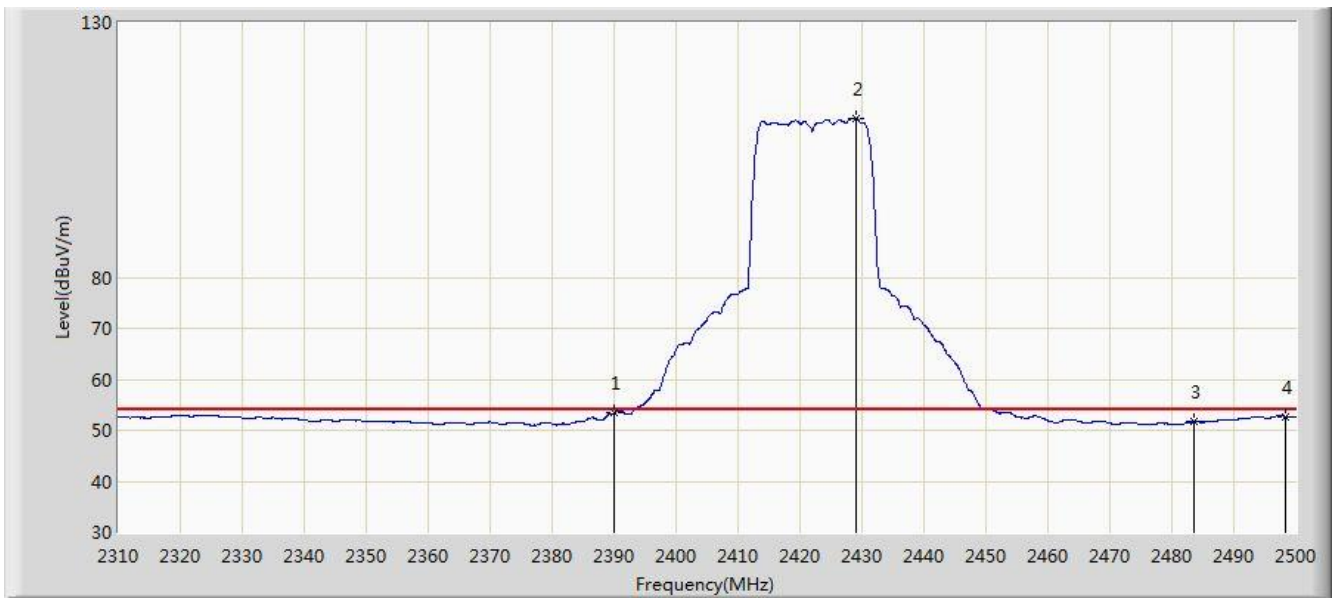


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.436	55.796	-0.564	54.000	-2.360	AV
2		*	2428.940	111.080	113.284	N/A	N/A	-2.204	AV
3			2483.500	51.665	53.651	-2.335	54.000	-1.986	AV
4			2498.385	52.708	54.645	-1.292	54.000	-1.937	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2437MHz - Ant 0+1	

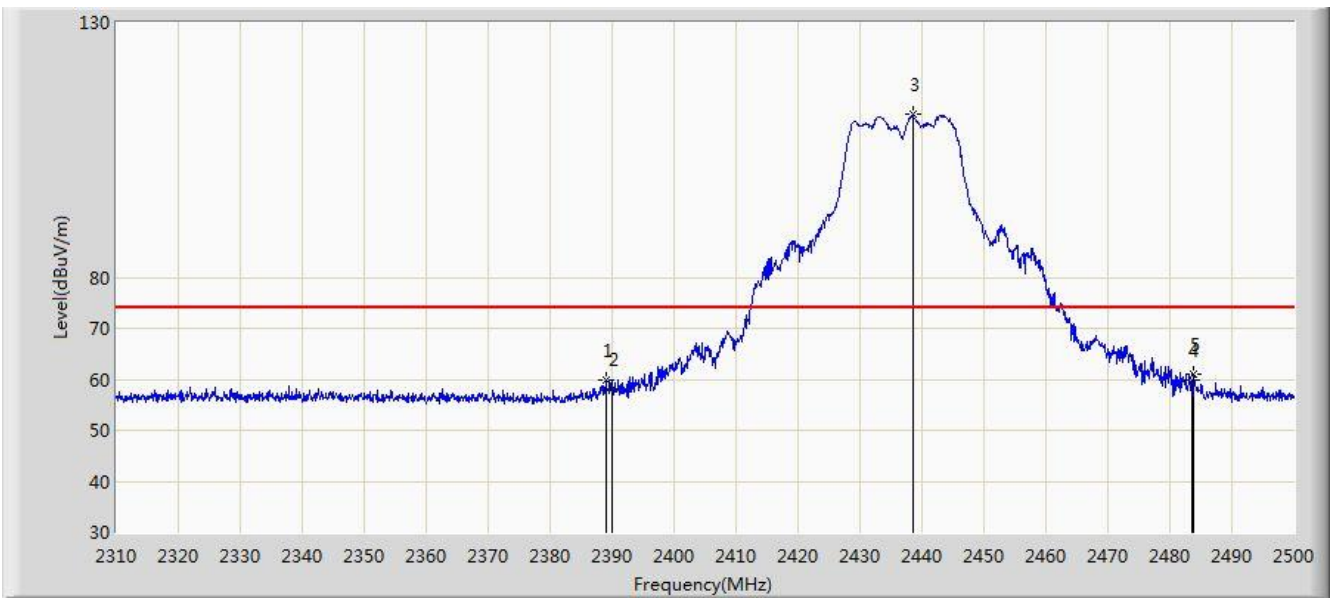


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.945	59.797	62.161	-14.203	74.000	-2.364	PK
2			2390.000	58.189	60.549	-15.811	74.000	-2.360	PK
3		*	2438.535	111.900	114.066	N/A	N/A	-2.166	PK
4			2483.500	59.844	61.830	-14.156	74.000	-1.986	PK
5			2483.850	61.092	63.076	-12.908	74.000	-1.984	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2437MHz - Ant 0+1	

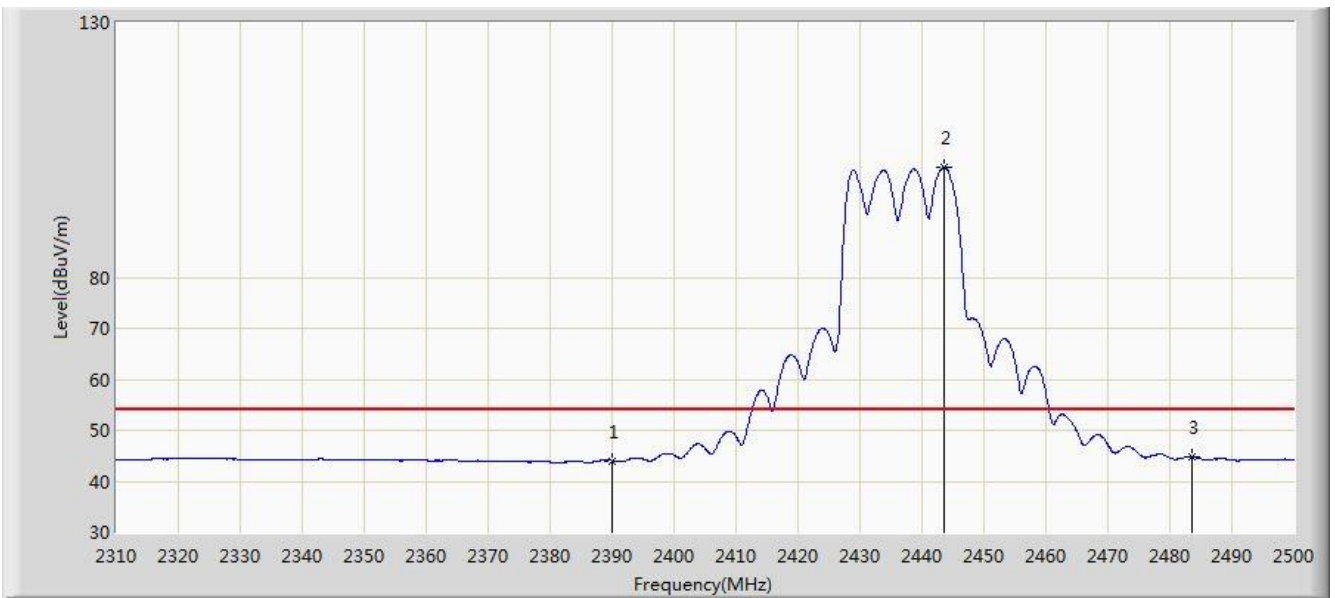


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.010	46.370	-9.990	54.000	-2.360	AV
2		*	2443.570	101.619	103.764	N/A	N/A	-2.145	AV
3			2483.500	44.863	46.849	-9.137	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2437MHz - Ant 0+1	

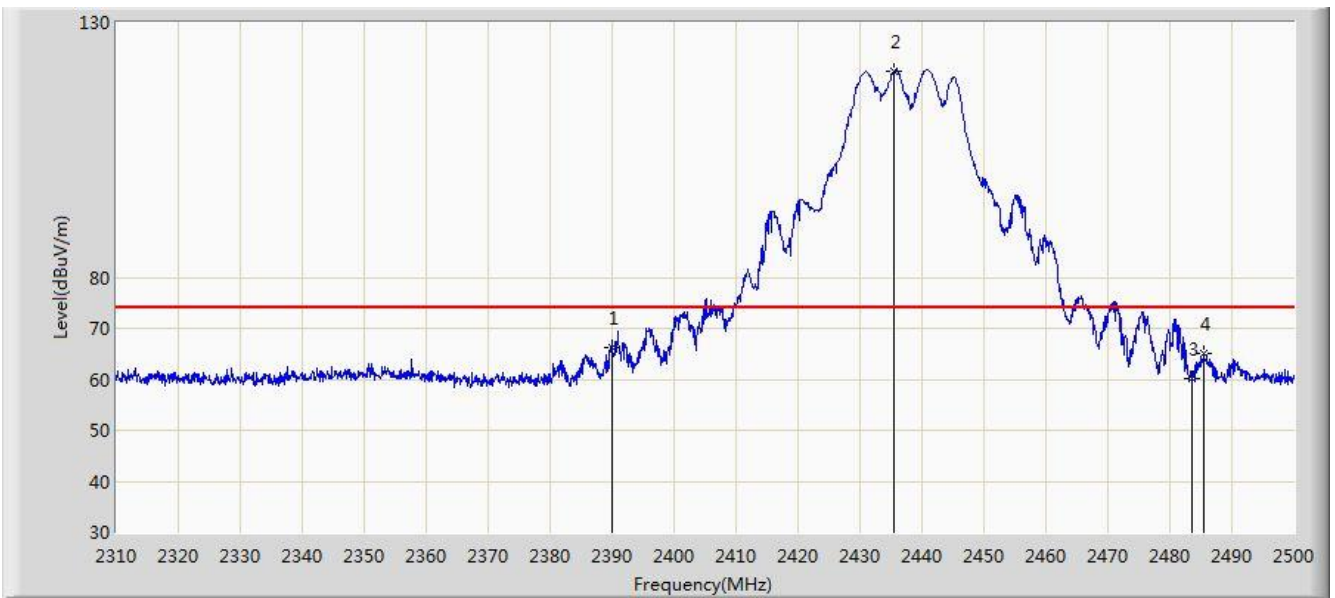


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.276	68.636	-7.724	74.000	-2.360	PK
2		*	2435.590	120.573	122.751	N/A	N/A	-2.177	PK
3			2483.500	60.241	62.227	-13.759	74.000	-1.986	PK
4			2485.465	65.216	67.194	-8.784	74.000	-1.978	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2437MHz - Ant 0+1	

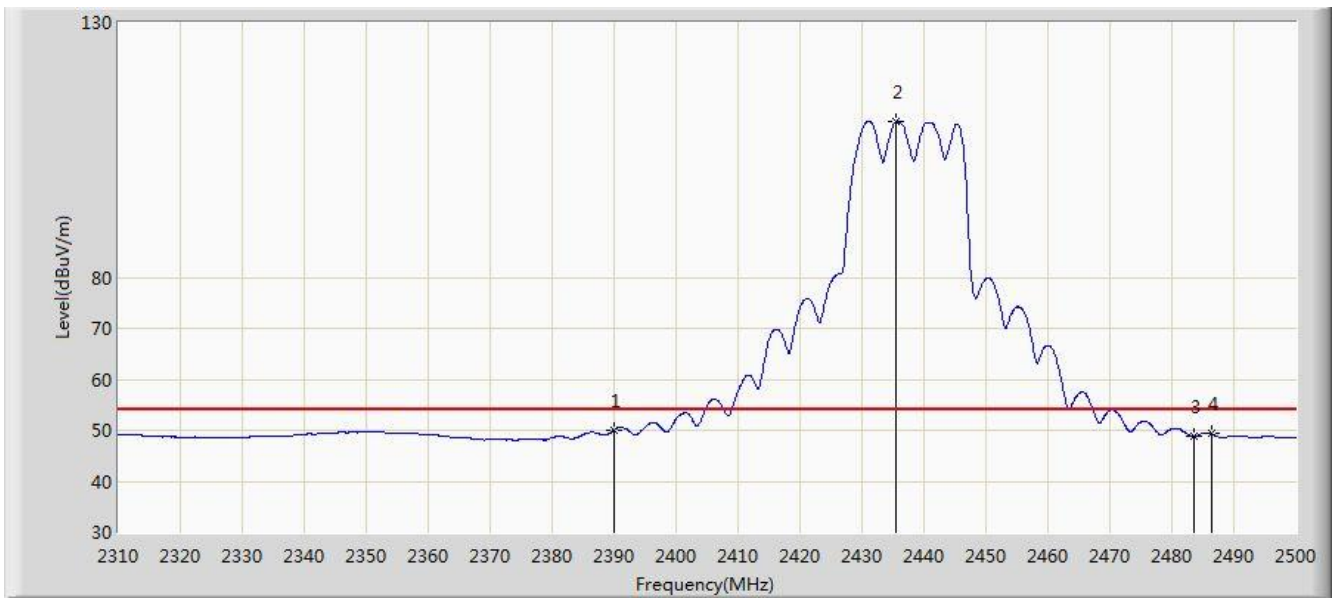

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.048	52.408	-3.952	54.000	-2.360	AV
2		*	2435.495	110.663	112.841	N/A	N/A	-2.178	AV
3			2483.500	48.794	50.780	-5.206	54.000	-1.986	AV
4			2486.320	49.442	51.417	-4.558	54.000	-1.974	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2452MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2325.105	57.299	59.919	-16.701	74.000	-2.620	PK
2			2390.000	56.016	58.376	-17.984	74.000	-2.360	PK
3		*	2453.830	111.219	113.323	37.219	74.000	-2.105	PK
4			2483.500	64.534	66.520	-9.466	74.000	-1.986	PK
5			2484.230	65.292	67.275	-8.708	74.000	-1.983	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2452MHz - Ant 0+1	

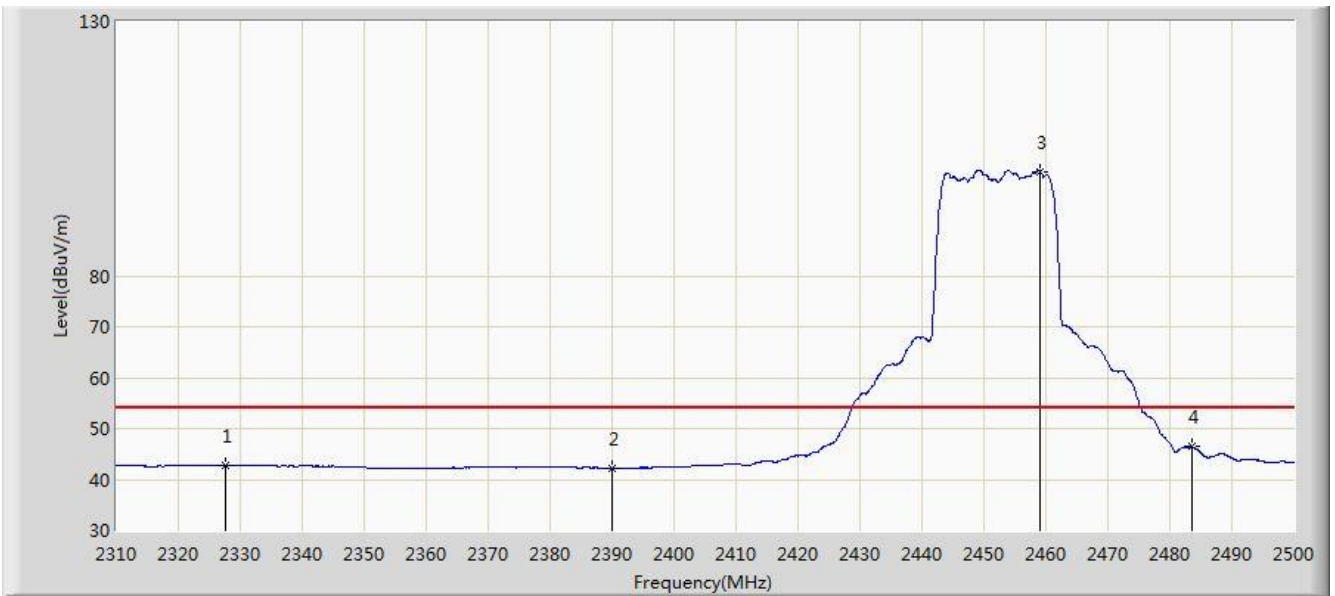

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.670	42.850	45.459	-11.150	54.000	-2.609	AV
2			2390.000	42.231	44.591	-11.769	54.000	-2.360	AV
3		*	2459.150	100.430	102.513	N/A	N/A	-2.083	AV
4			2483.500	46.404	48.390	-7.596	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2452MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2313.990	65.870	68.534	-8.130	74.000	-2.664	PK
2			2390.000	62.066	64.426	-11.934	74.000	-2.360	PK
3		*	2458.295	120.888	122.974	N/A	N/A	-2.086	PK
4			2483.500	73.198	75.184	-0.802	74.000	-1.986	PK
5			2483.945	73.587	75.571	-0.413	74.000	-1.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2452MHz - Ant 0+1	

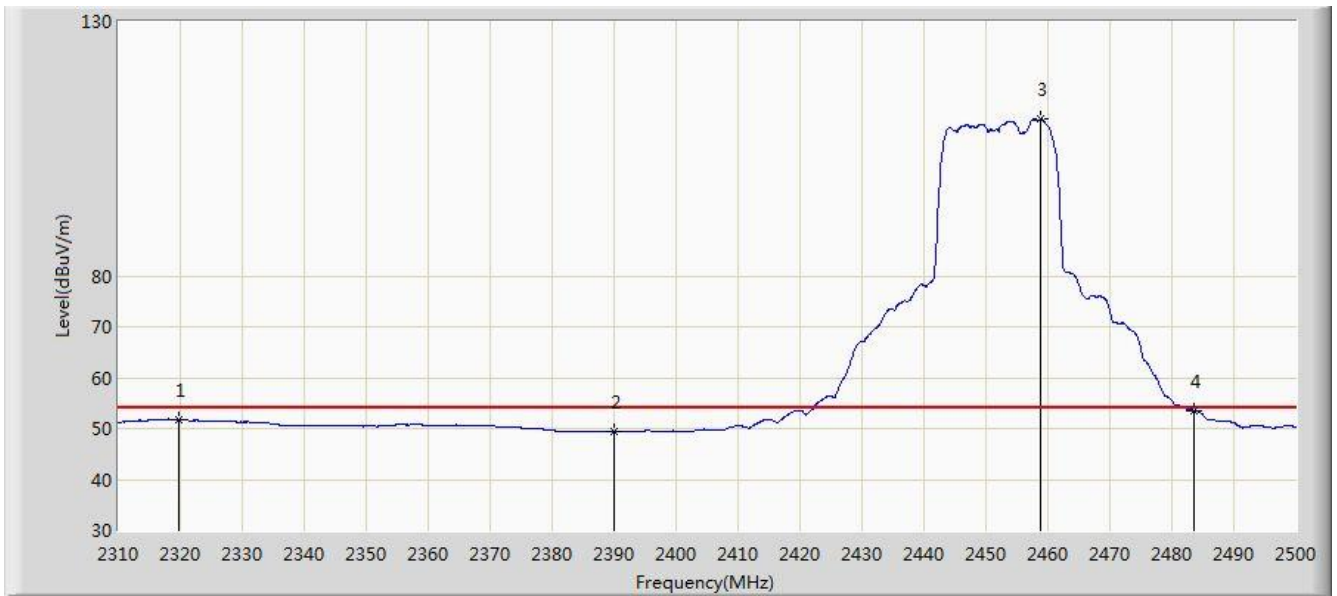


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2319.690	51.714	54.356	-2.286	54.000	-2.642	AV
2			2390.000	49.431	51.791	-4.569	54.000	-2.360	AV
3		*	2458.865	110.791	112.875	N/A	N/A	-2.083	AV
4			2483.500	53.512	55.498	-0.488	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2457MHz - Ant 0+1	

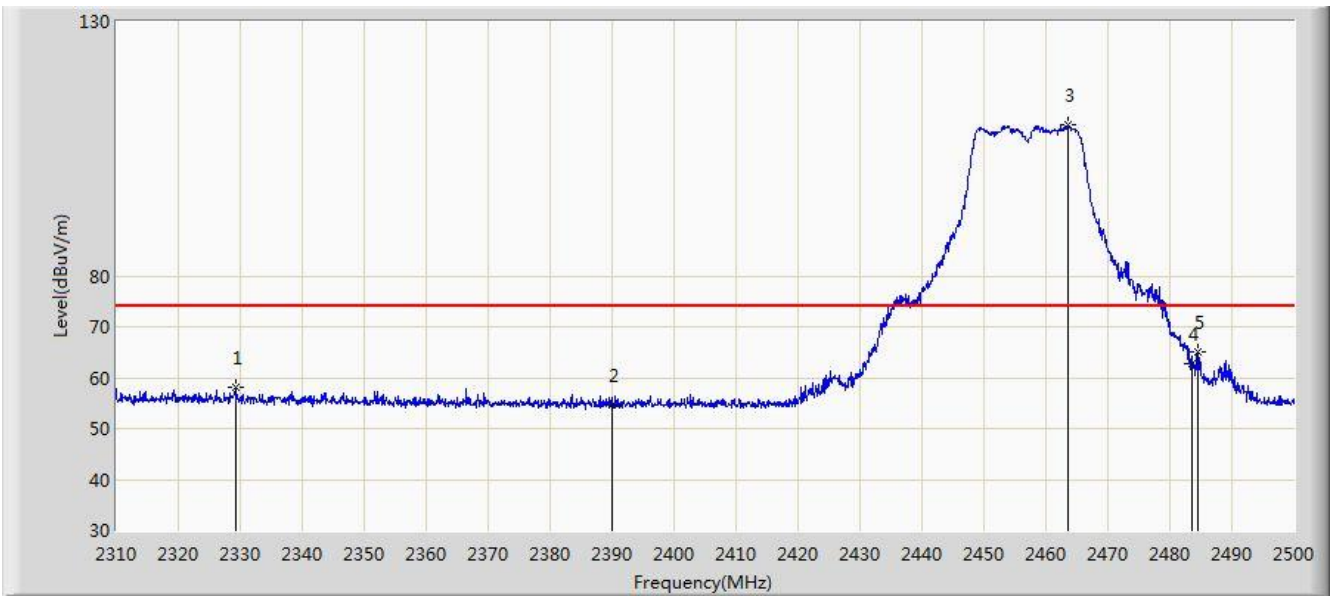


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.190	58.109	60.712	-15.891	74.000	-2.603	PK
2			2390.000	54.512	56.872	-19.488	74.000	-2.360	PK
3		*	2463.520	109.734	111.800	N/A	N/A	-2.065	PK
4			2483.500	62.694	64.680	-11.306	74.000	-1.986	PK
5			2484.420	65.027	67.009	-8.973	74.000	-1.983	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2457MHz - Ant 0+1	

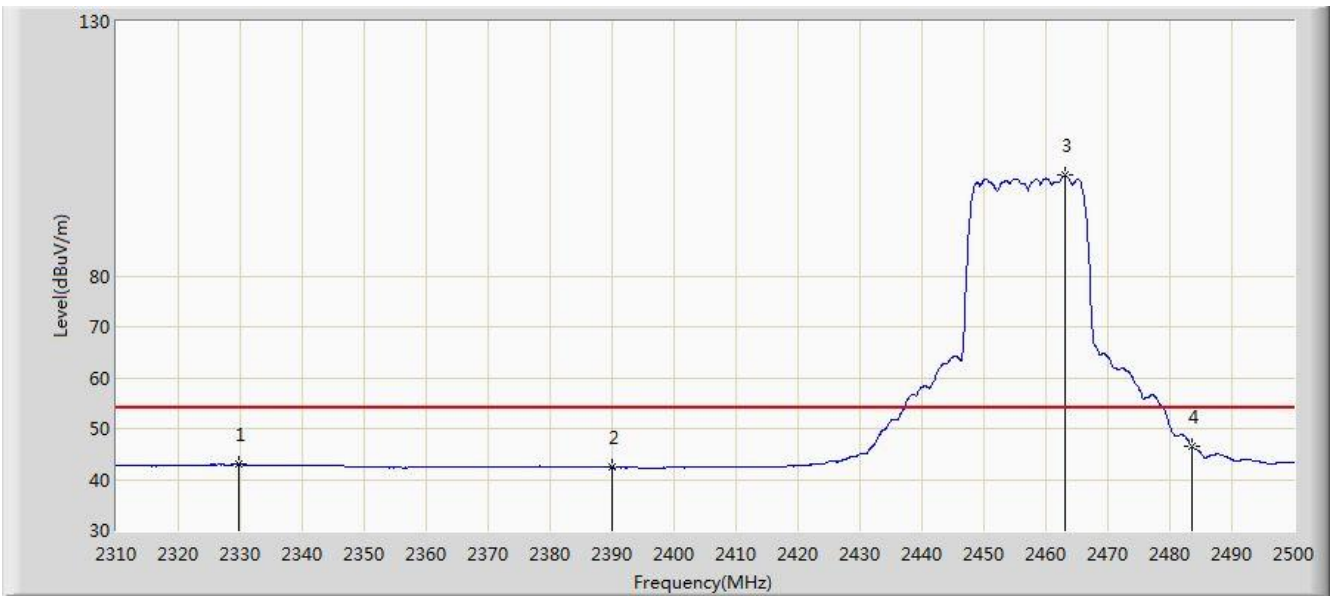


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.665	42.932	45.534	-11.068	54.000	-2.602	AV
2			2390.000	42.380	44.740	-11.620	54.000	-2.360	AV
3		*	2463.045	99.722	101.790	N/A	N/A	-2.067	AV
4			2483.500	46.499	48.485	-7.501	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2457MHz - Ant 0+1	

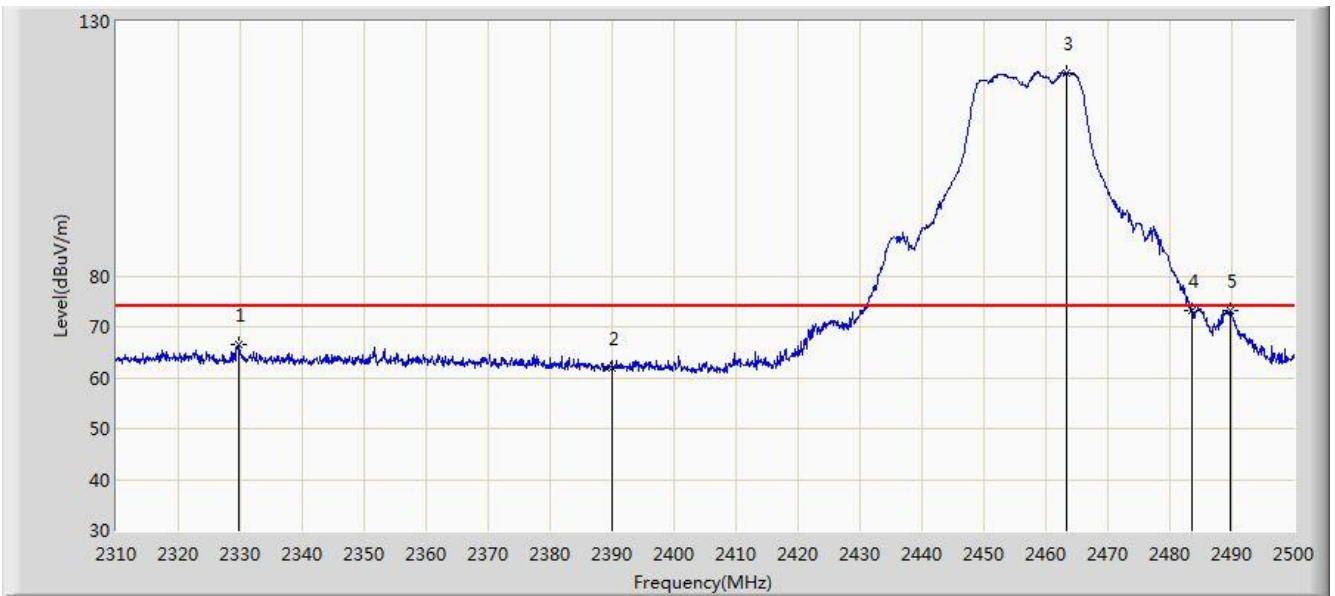

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.665	66.383	68.985	-7.617	74.000	-2.602	PK
2			2390.000	62.018	64.378	-11.982	74.000	-2.360	PK
3		*	2463.330	119.930	121.996	N/A	N/A	-2.066	PK
4			2483.500	73.291	75.277	-0.709	74.000	-1.986	PK
5			2489.645	73.176	75.137	-0.824	74.000	-1.961	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 19:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2457MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2320.545	51.708	54.346	-2.292	54.000	-2.638	AV
2			2390.000	49.333	51.693	-4.667	54.000	-2.360	AV
3		*	2463.805	110.052	112.117	N/A	N/A	-2.065	AV
4			2483.500	53.707	55.693	-0.293	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 03:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2462MHz - Ant 0+1	

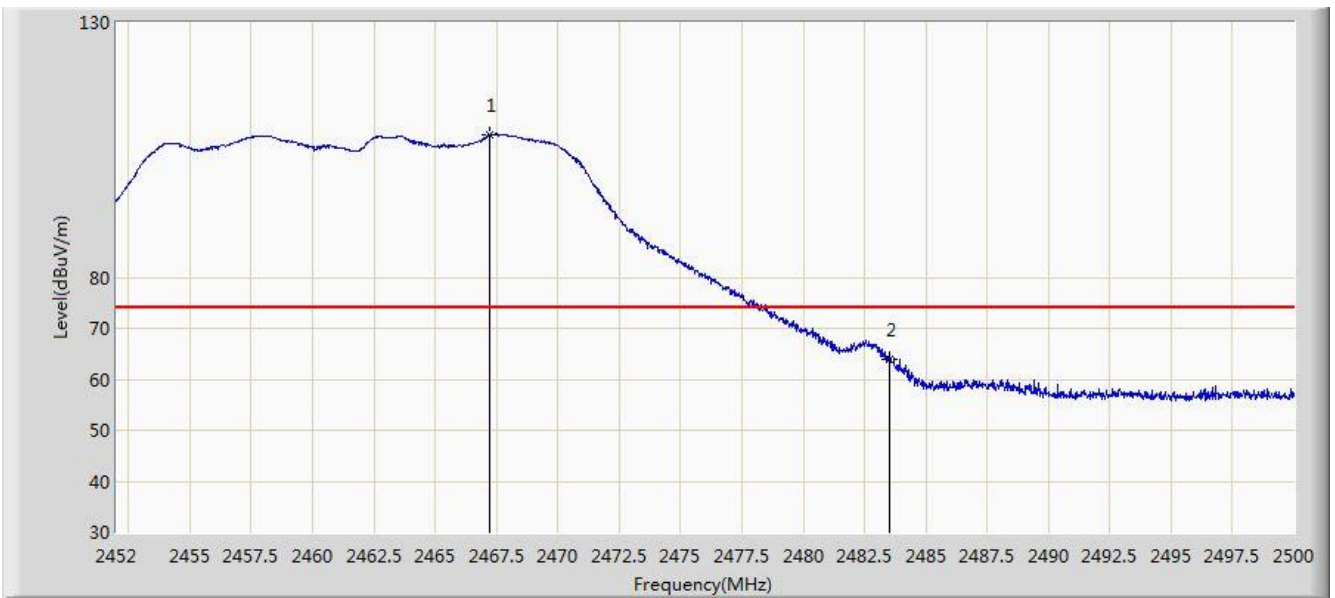


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.216	108.108	110.159	N/A	N/A	-2.051	PK
2			2483.500	63.929	65.915	-10.071	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 03:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2462MHz - Ant 0+1	

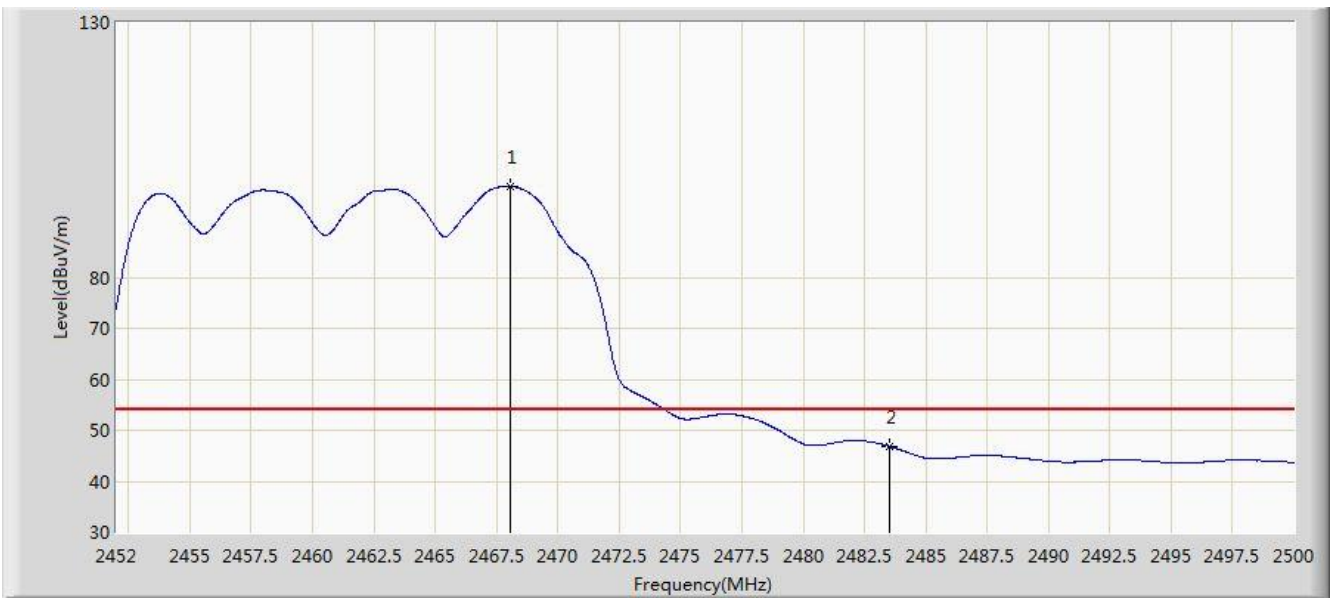


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.032	97.864	99.912	N/A	N/A	-2.048	AV
2			2483.500	46.877	48.863	-7.123	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 03:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2462MHz - Ant 0+1	

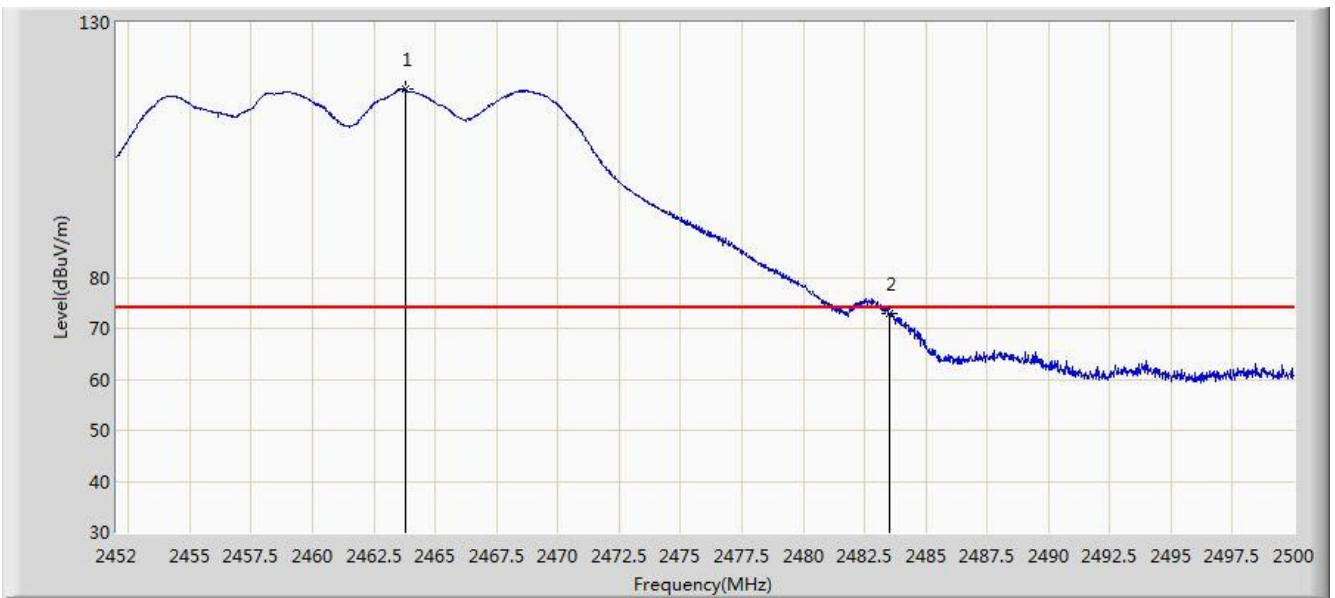


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.760	116.836	118.901	N/A	N/A	-2.065	PK
2			2483.500	72.895	74.881	-1.105	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 02:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 2462MHz - Ant 0+1	

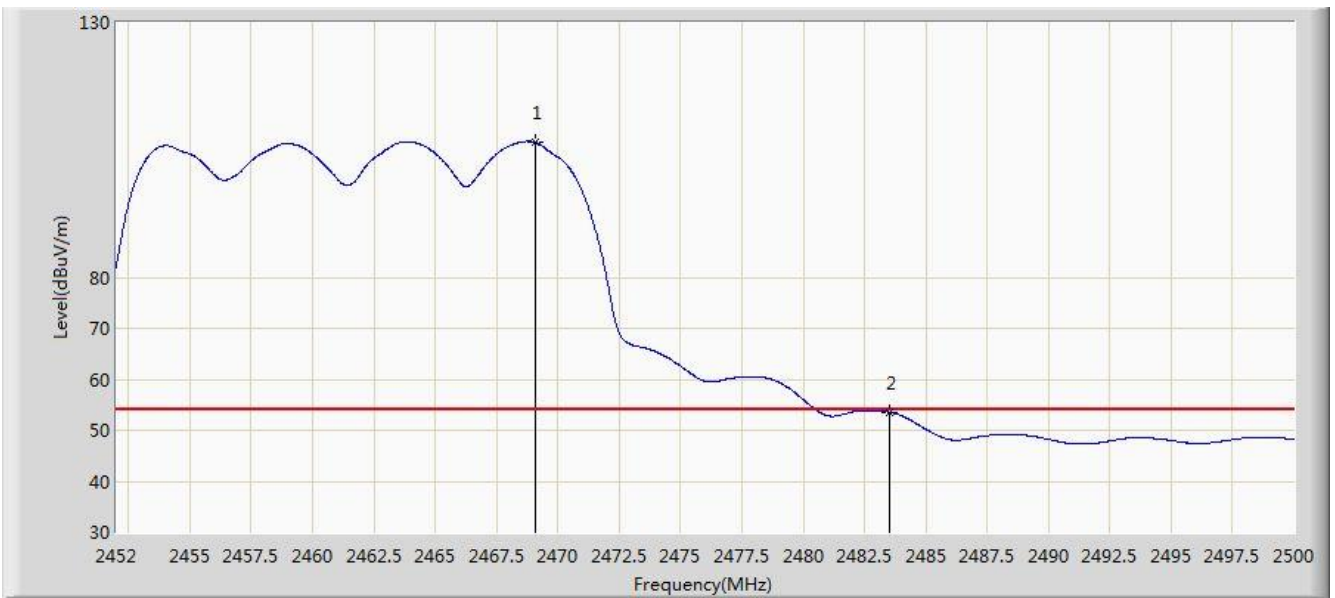


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.064	106.554	108.598	N/A	N/A	-2.044	AV
2			2483.500	53.573	55.559	-0.427	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2422MHz - Ant 0+1	

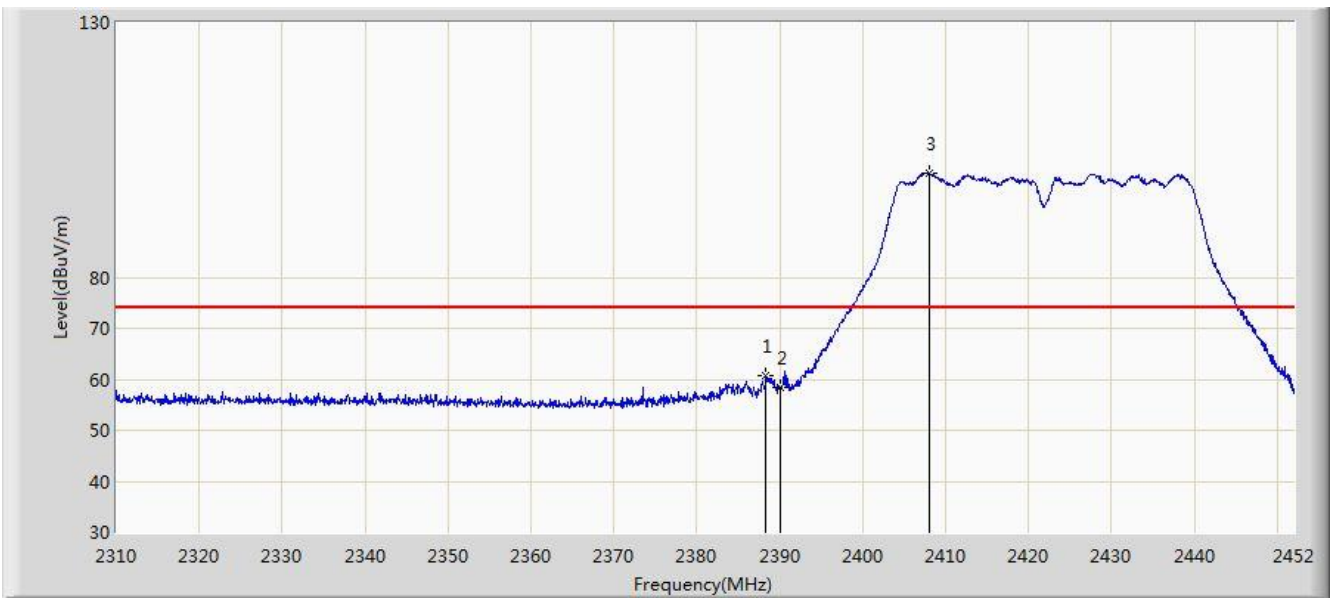


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.384	60.608	62.974	-13.392	74.000	-2.367	PK
2			2390.000	58.416	60.776	N/A	N/A	-2.360	PK
3		*	2407.980	100.390	102.678	26.390	74.000	-2.288	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 11:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2422MHz - Ant 0+1	

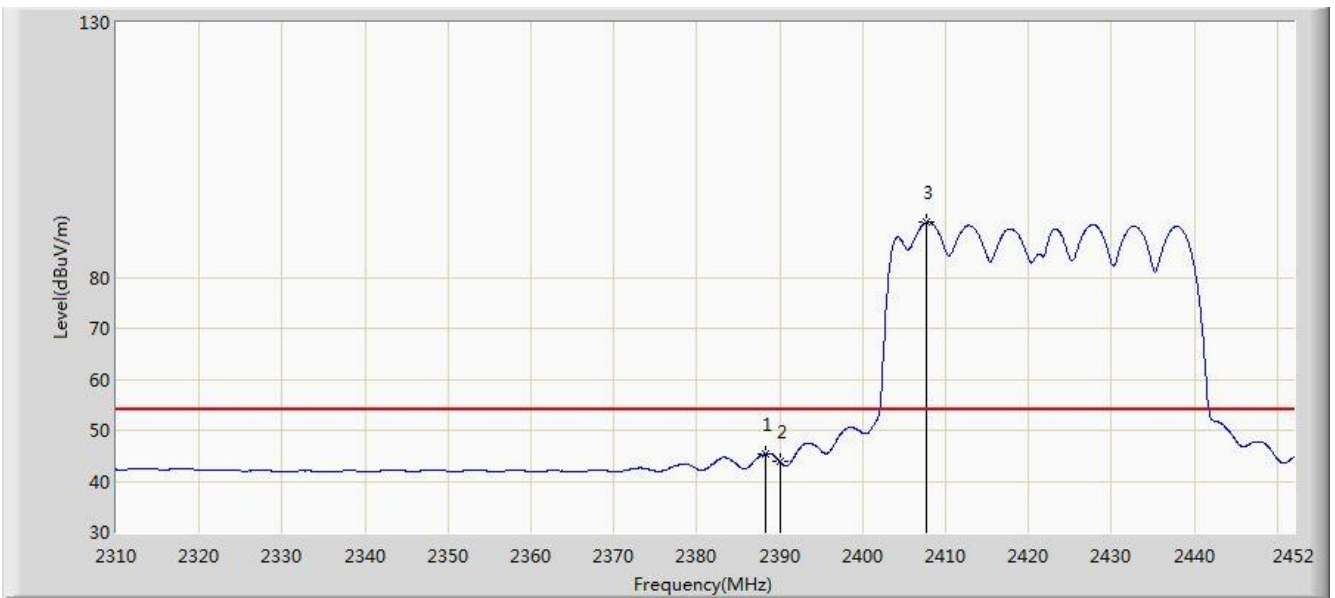


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.242	45.385	47.752	-8.615	54.000	-2.367	AV
2			2390.000	43.867	46.227	-10.133	54.000	-2.360	AV
3		*	2407.767	90.830	93.119	N/A	N/A	-2.289	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 11:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2422MHz - Ant 0+1	

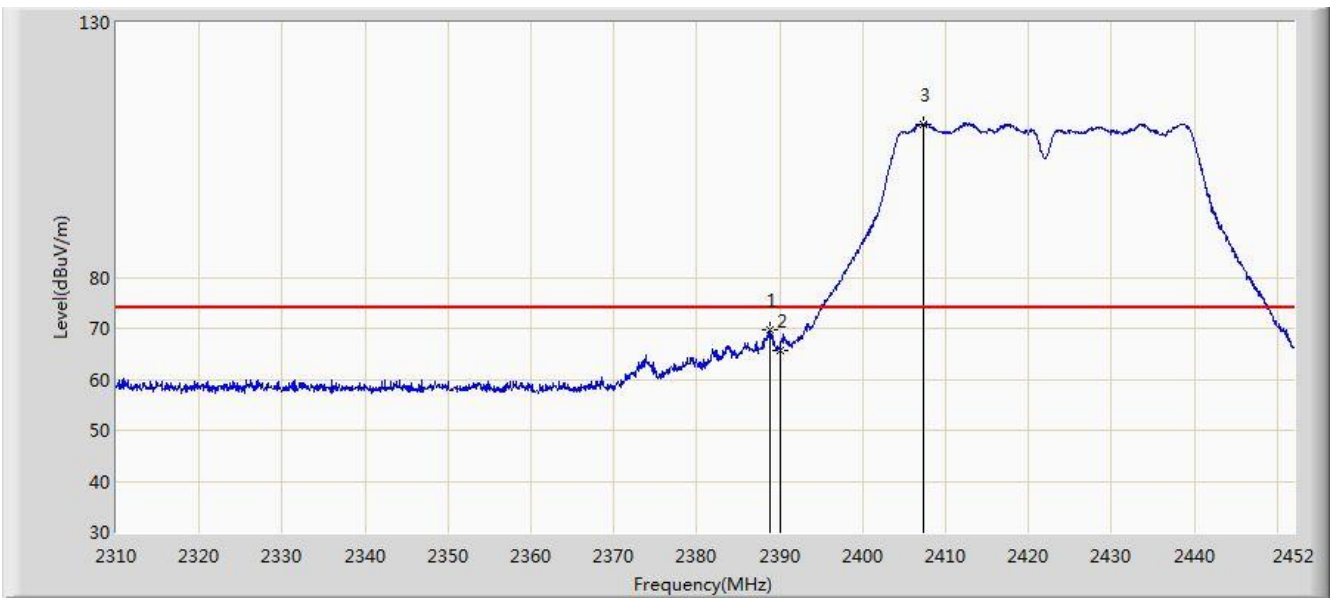


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.810	69.765	72.130	-4.235	74.000	-2.365	PK
2			2390.000	65.769	68.129	-8.231	74.000	-2.360	PK
3		*	2407.412	110.109	112.399	N/A	N/A	-2.290	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2422MHz - Ant 0+1	

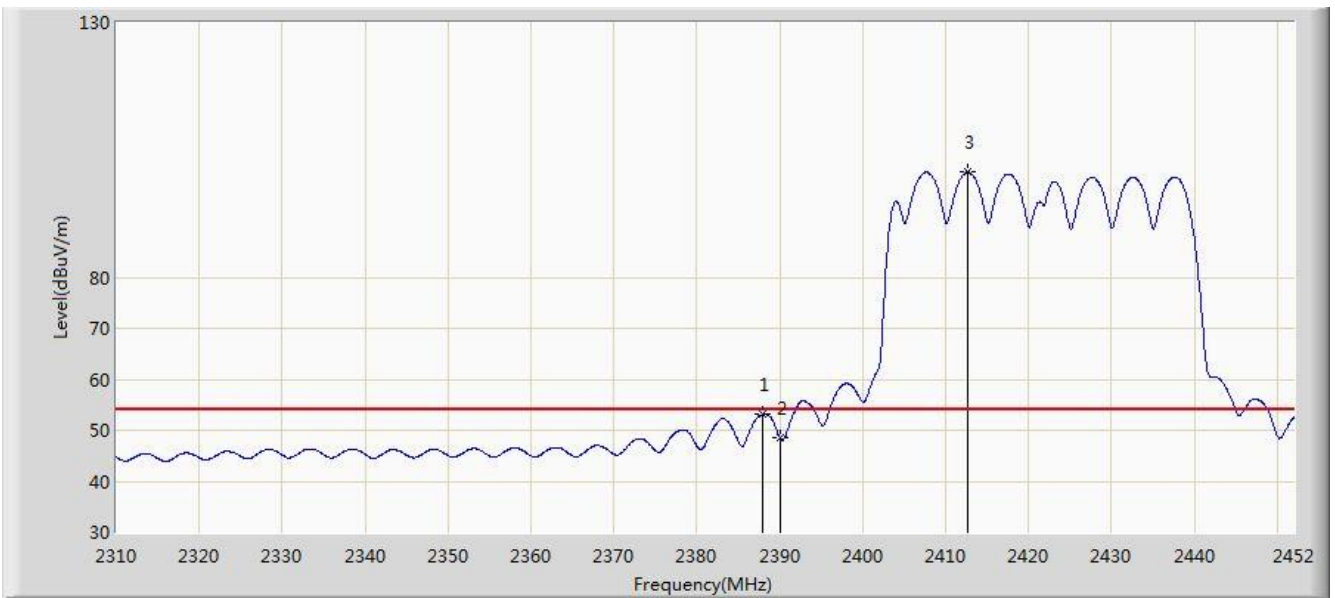


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.887	53.066	55.434	-0.934	54.000	-2.368	AV
2			2390.000	48.528	50.888	-5.472	54.000	-2.360	AV
3		*	2412.595	100.655	102.925	N/A	N/A	-2.269	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2427MHz - Ant 0+1	

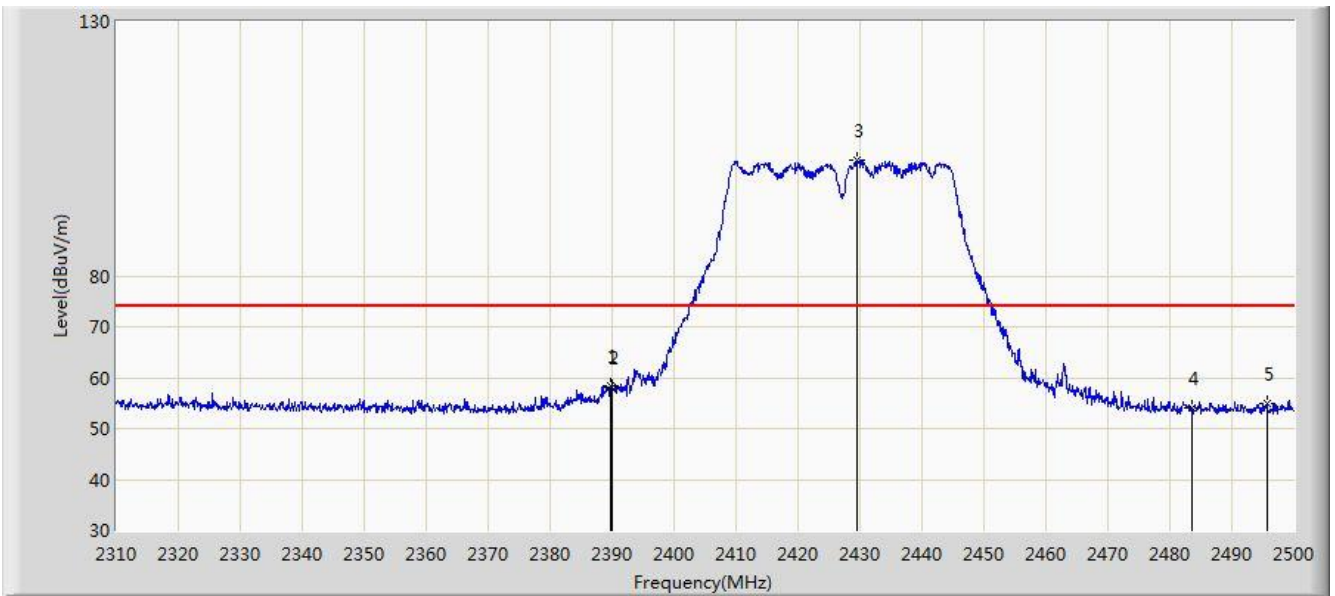


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	58.501	60.862	-15.499	74.000	-2.361	PK
2			2390.000	58.157	60.517	-15.843	74.000	-2.360	PK
3		*	2429.510	102.617	104.819	N/A	N/A	-2.202	PK
4			2483.500	53.950	55.936	-20.050	74.000	-1.986	PK
5			2495.630	55.013	56.950	-18.987	74.000	-1.937	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2427MHz - Ant 0+1	

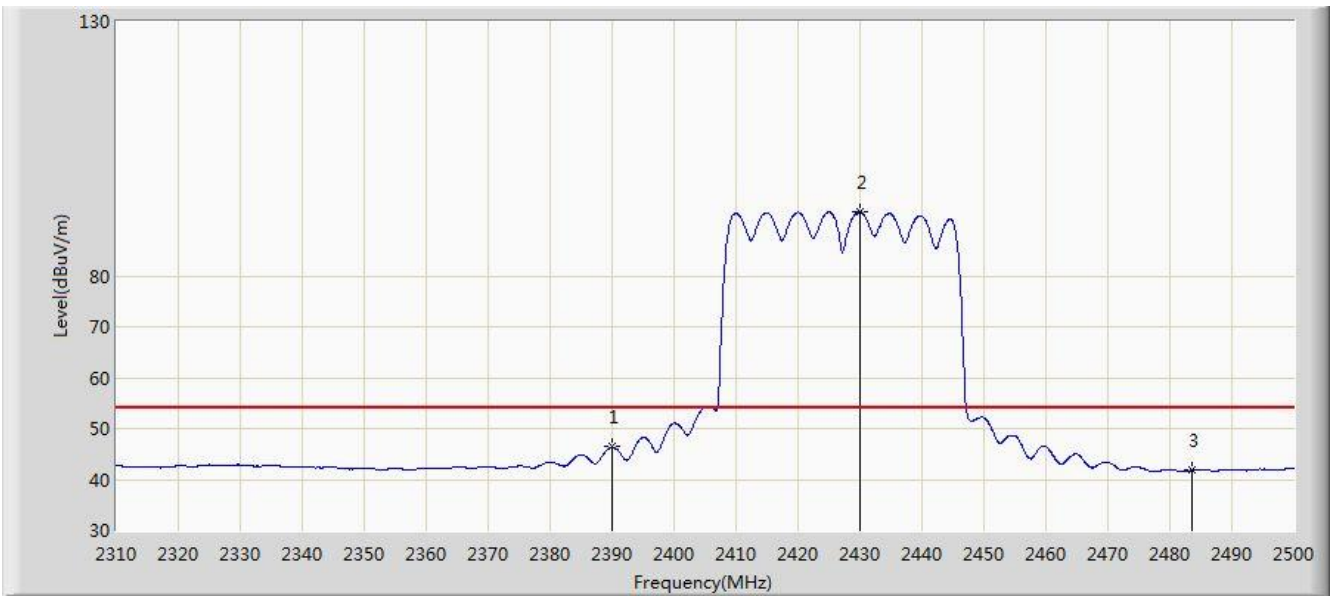


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.382	48.742	-7.618	54.000	-2.360	AV
2		*	2429.890	92.596	94.797	N/A	N/A	-2.200	AV
3			2483.500	41.772	43.758	-12.228	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2427MHz - Ant 0+1	

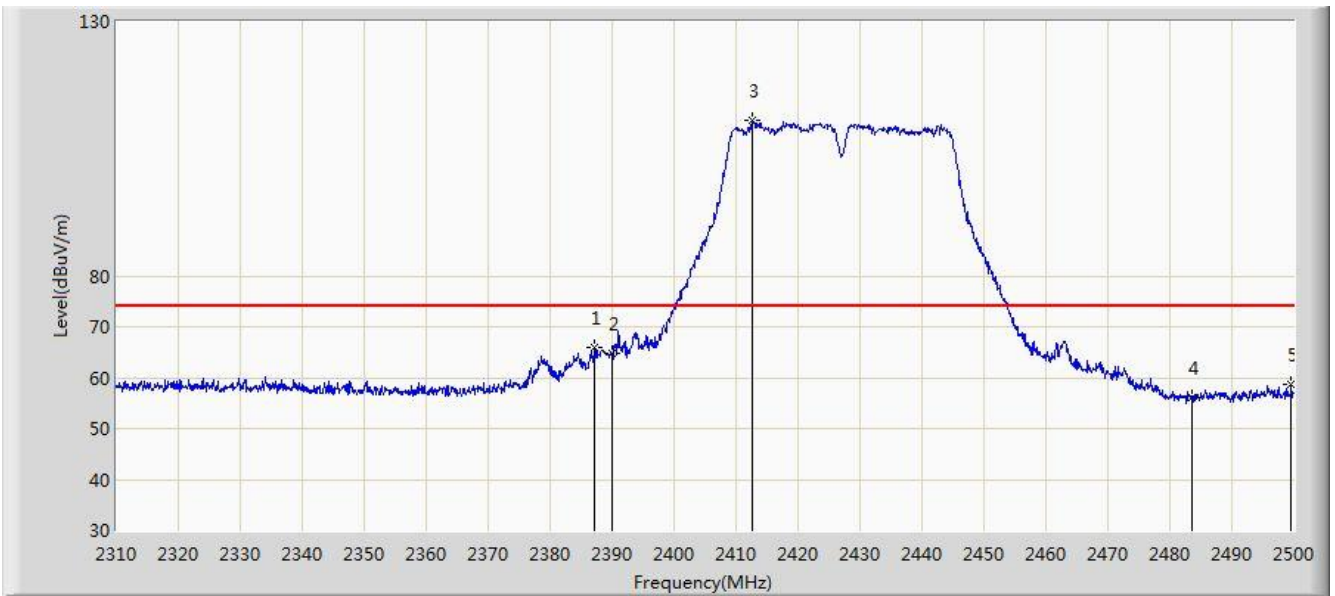


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.140	65.920	68.291	-8.080	74.000	-2.371	PK
2			2390.000	64.739	67.099	-9.261	74.000	-2.360	PK
3		*	2412.695	110.458	112.727	N/A	N/A	-2.269	PK
4			2483.500	56.165	58.151	-17.835	74.000	-1.986	PK
5			2499.620	58.620	60.558	-15.380	74.000	-1.938	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 16:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2427MHz - Ant 0+1	

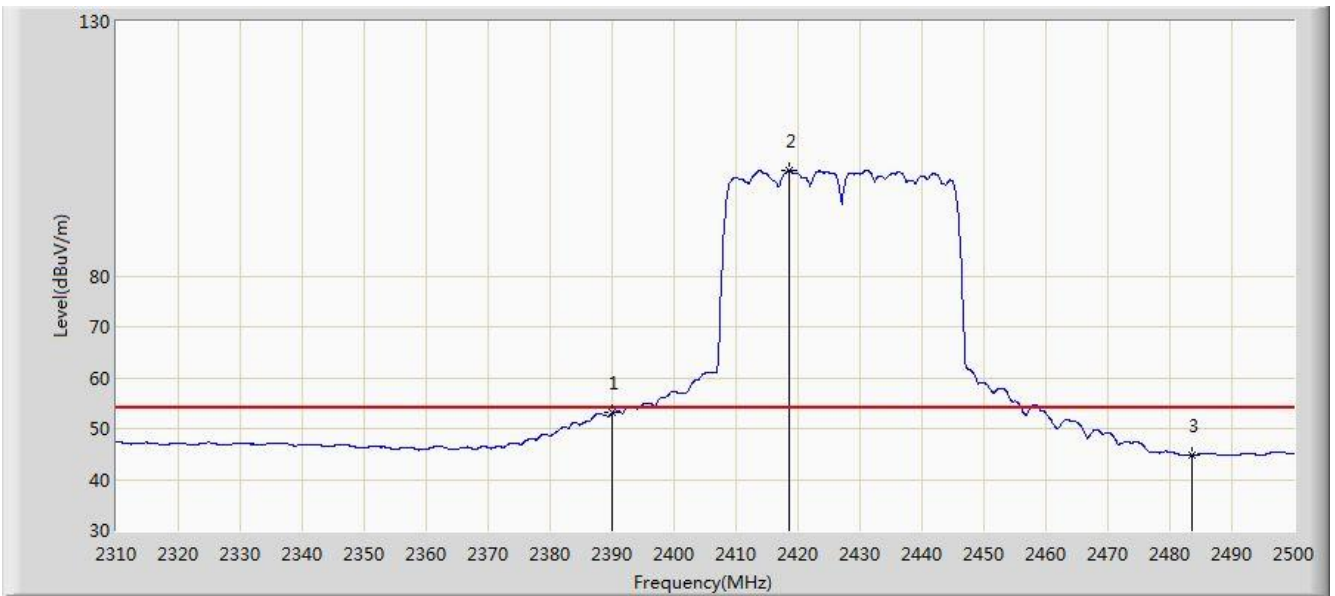


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.094	55.454	-0.906	54.000	-2.360	AV
2		*	2418.490	100.695	102.941	N/A	N/A	-2.247	AV
3			2483.500	44.685	46.671	-9.315	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 13:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2437MHz - Ant 0+1	

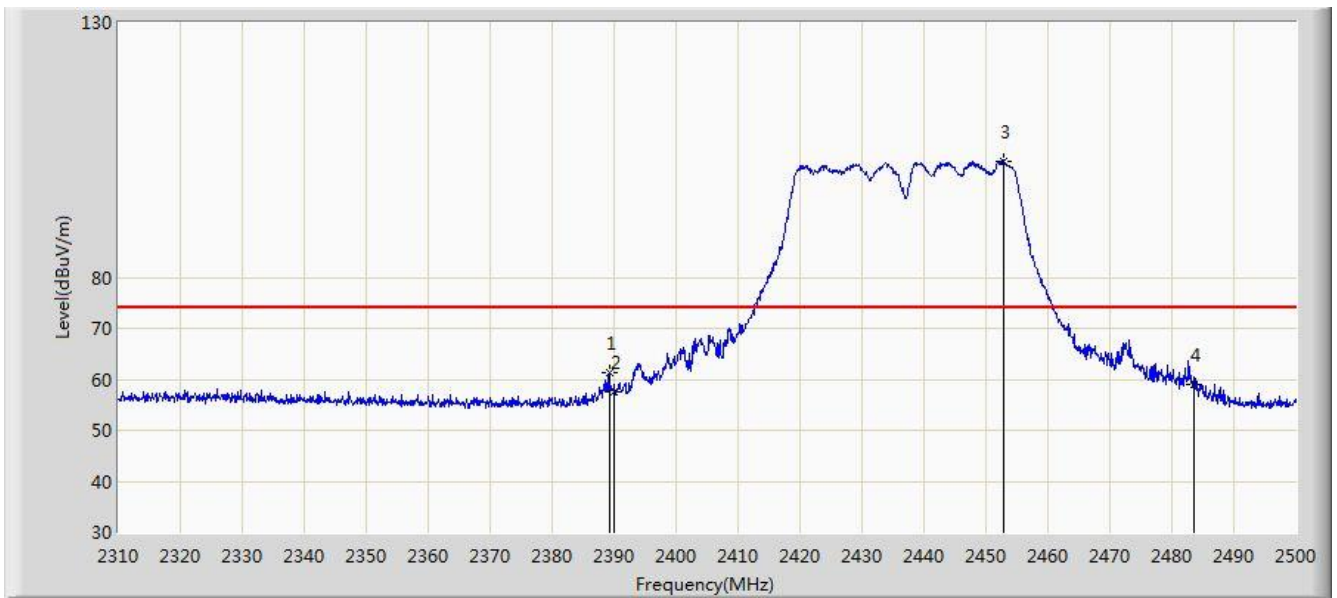


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	61.212	63.575	-12.788	74.000	-2.363	PK
2			2390.000	57.669	60.029	-16.331	74.000	-2.360	PK
3		*	2452.880	102.867	104.975	N/A	N/A	-2.107	PK
4			2483.500	59.106	61.092	-14.894	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 13:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2437MHz - Ant 0+1	

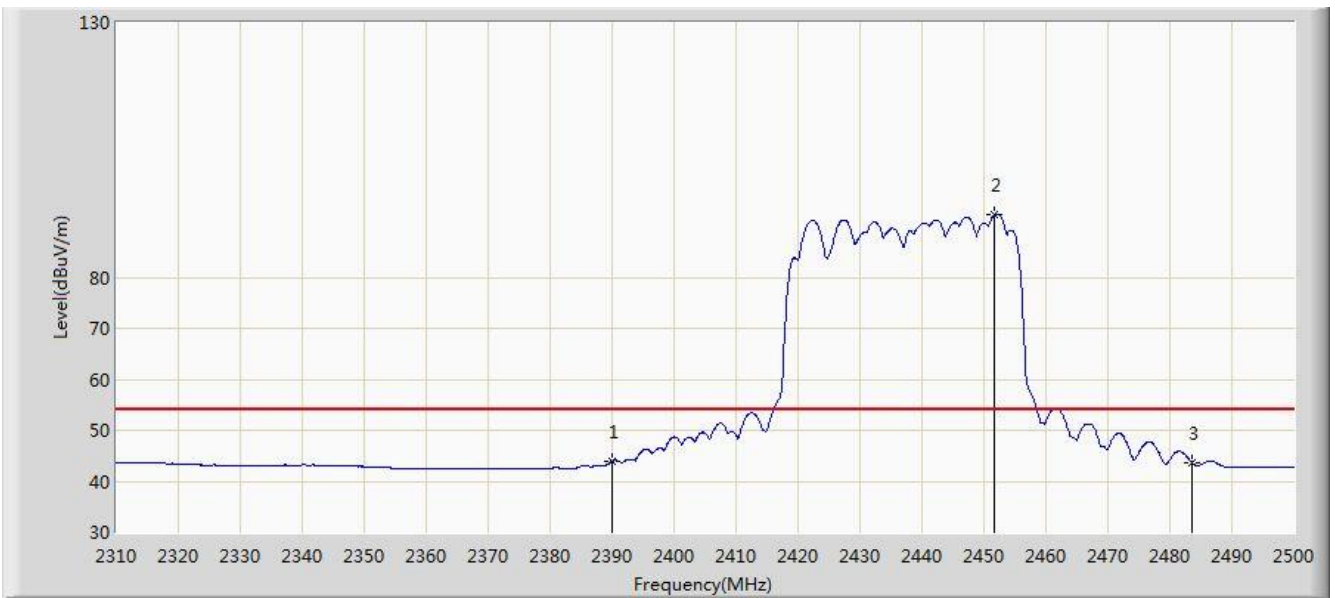

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.907	46.267	-10.093	54.000	-2.360	AV
2		*	2451.740	92.275	94.388	N/A	N/A	-2.113	AV
3			2483.500	43.734	45.720	-10.266	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 13:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2437MHz - Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.945	70.434	72.798	-3.566	74.000	-2.364	PK
2			2390.000	66.544	68.904	-7.456	74.000	-2.360	PK
3		*	2433.690	113.448	115.633	N/A	N/A	-2.185	PK
4			2483.500	69.743	71.729	-4.257	74.000	-1.986	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 13:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2437MHz - Ant 0+1	

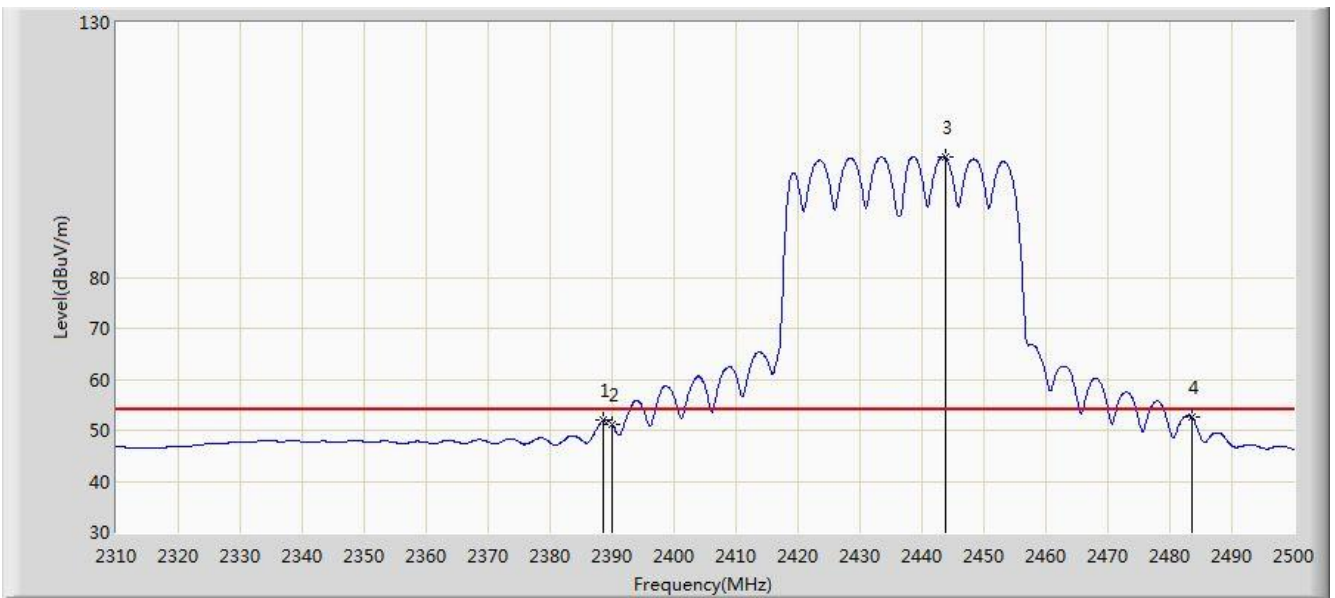


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.565	51.923	54.289	-2.077	54.000	-2.366	AV
2			2390.000	51.039	53.399	-2.961	54.000	-2.360	AV
3		*	2443.760	103.490	105.635	N/A	N/A	-2.145	AV
4			2483.500	52.549	54.535	-1.451	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 22:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2447MHz - Ant 0+1	

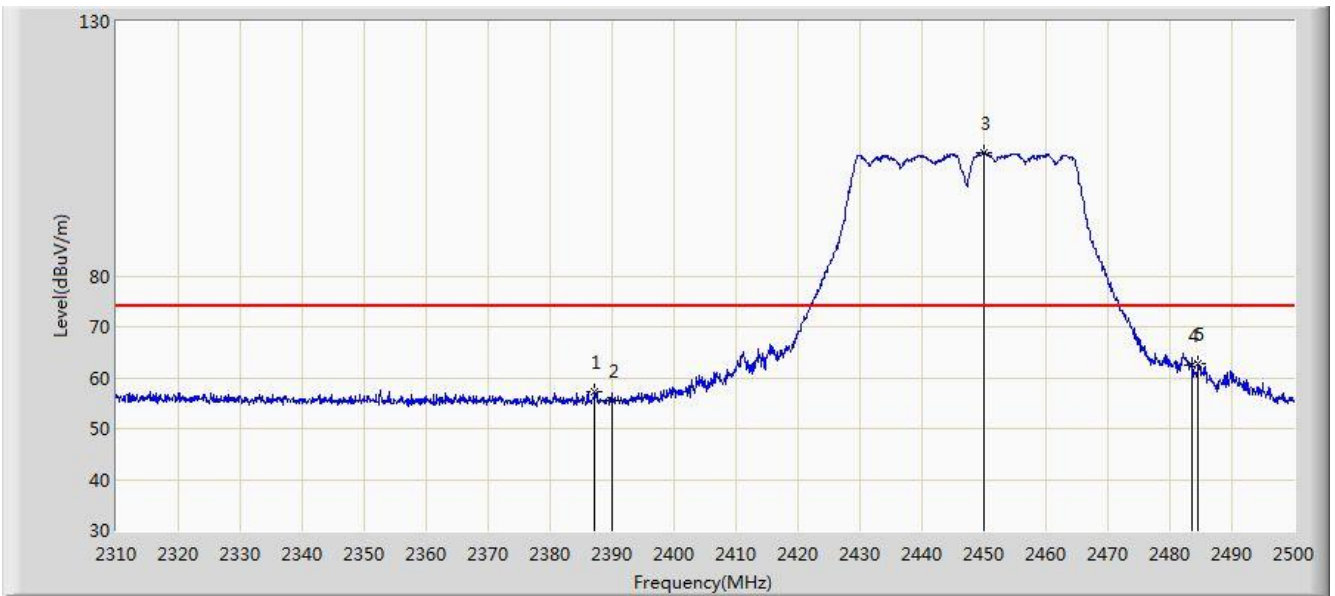


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.235	57.305	59.676	-16.695	74.000	-2.370	PK
2			2390.000	55.406	57.766	-18.594	74.000	-2.360	PK
3		*	2449.935	104.177	106.297	N/A	N/A	-2.120	PK
4			2483.500	62.401	64.387	-11.599	74.000	-1.986	PK
5			2484.515	62.644	64.626	-11.356	74.000	-1.981	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 22:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2447MHz - Ant 0+1	

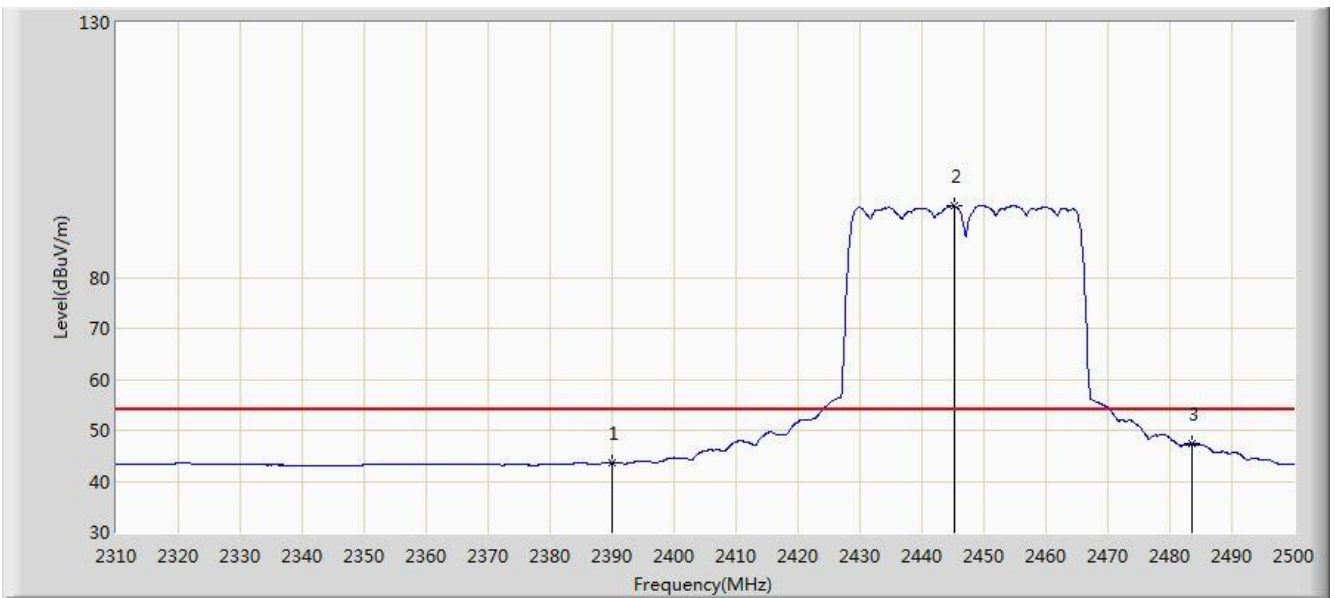


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.690	46.050	-10.310	54.000	-2.360	AV
2			2445.280	93.947	96.086	N/A	N/A	-2.138	AV
3		*	2483.500	47.371	49.357	-6.629	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 22:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2447MHz - Ant 0+1	

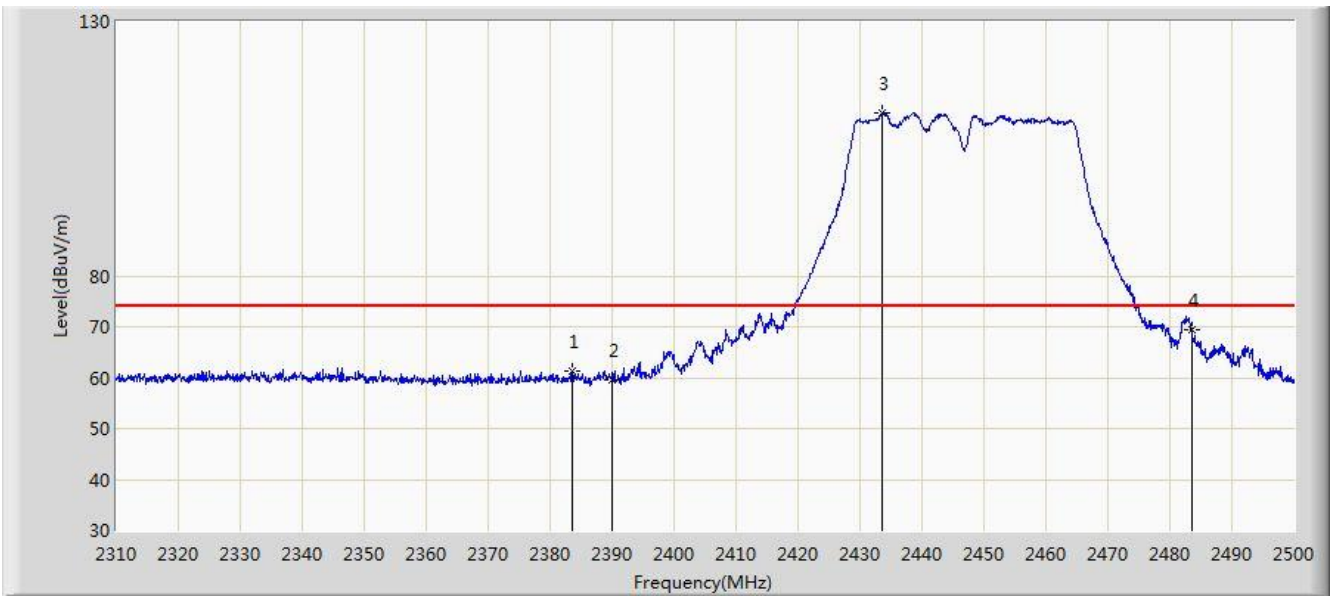


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.530	61.390	63.776	-12.610	74.000	-2.386	PK
2			2390.000	59.618	61.978	-14.382	74.000	-2.360	PK
3		*	2433.690	111.958	114.143	N/A	N/A	-2.185	PK
4			2483.500	69.462	71.448	-4.538	74.000	-1.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/22 - 22:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2447MHz - Ant 0+1	

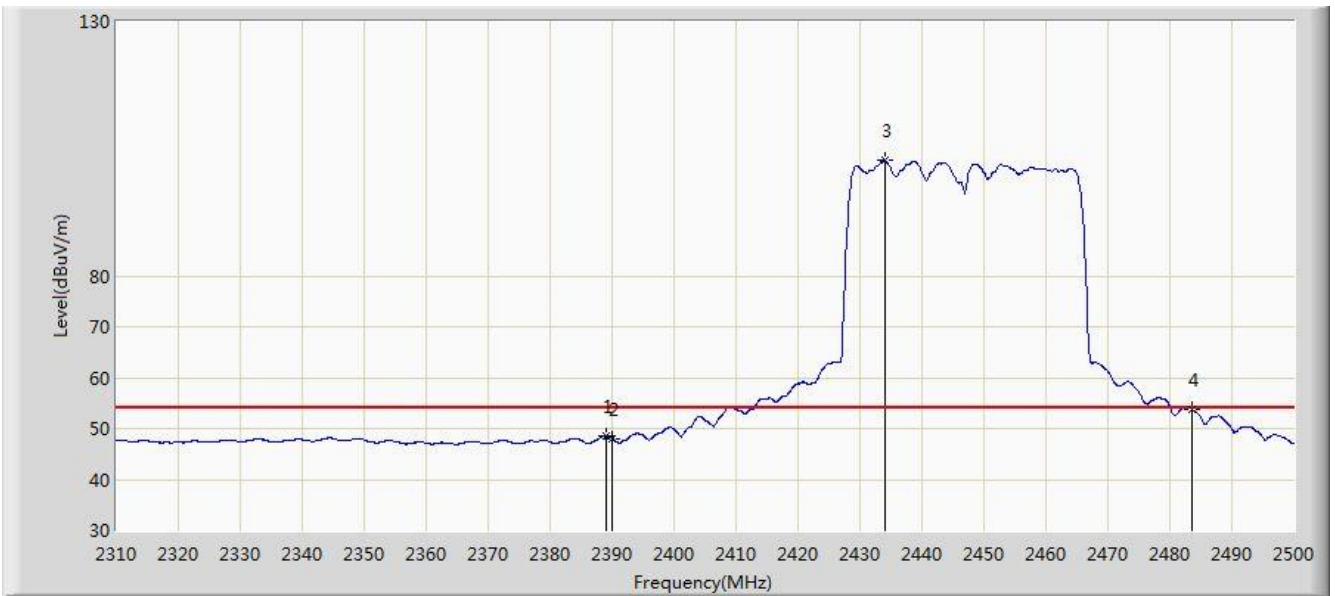


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.135	48.504	50.867	-5.496	54.000	-2.364	AV
2			2390.000	48.038	50.398	N/A	N/A	-2.360	AV
3		*	2433.975	102.663	104.847	48.663	54.000	-2.184	AV
4			2483.500	53.879	55.865	-0.121	54.000	-1.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 12:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2452MHz - Ant 0+1	

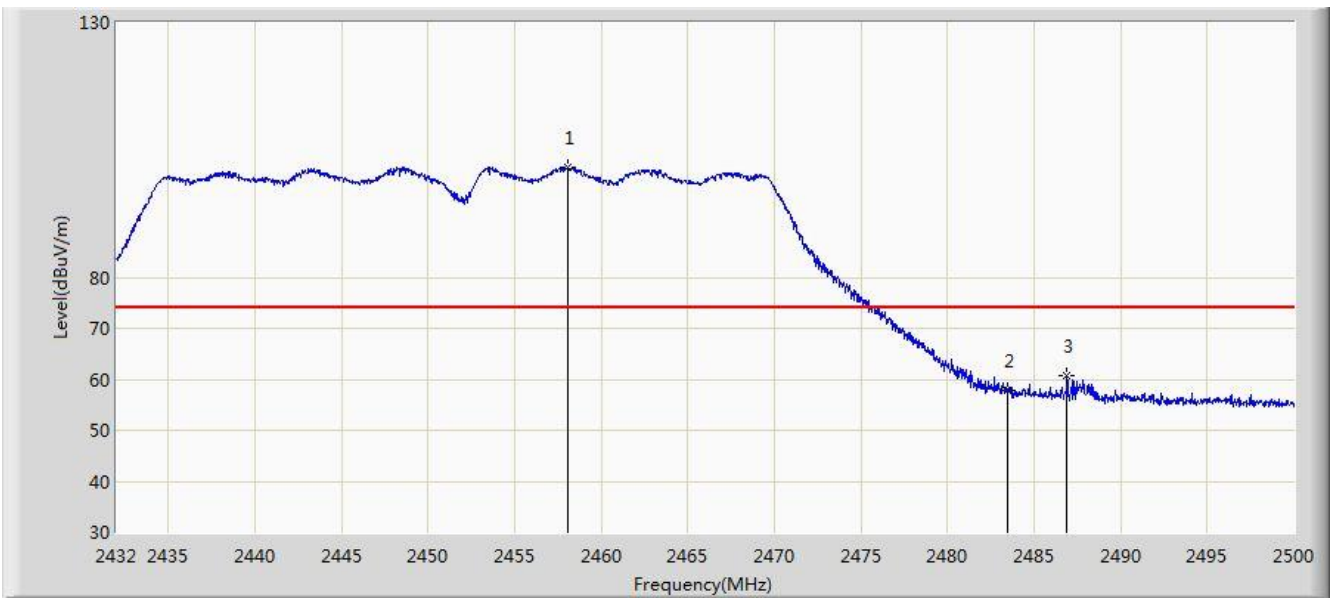


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.078	101.596	103.683	N/A	N/A	-2.087	PK
2			2483.500	57.869	59.855	-16.131	74.000	-1.986	PK
3			2486.910	60.635	62.607	-13.365	74.000	-1.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 12:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2452MHz - Ant 0+1	

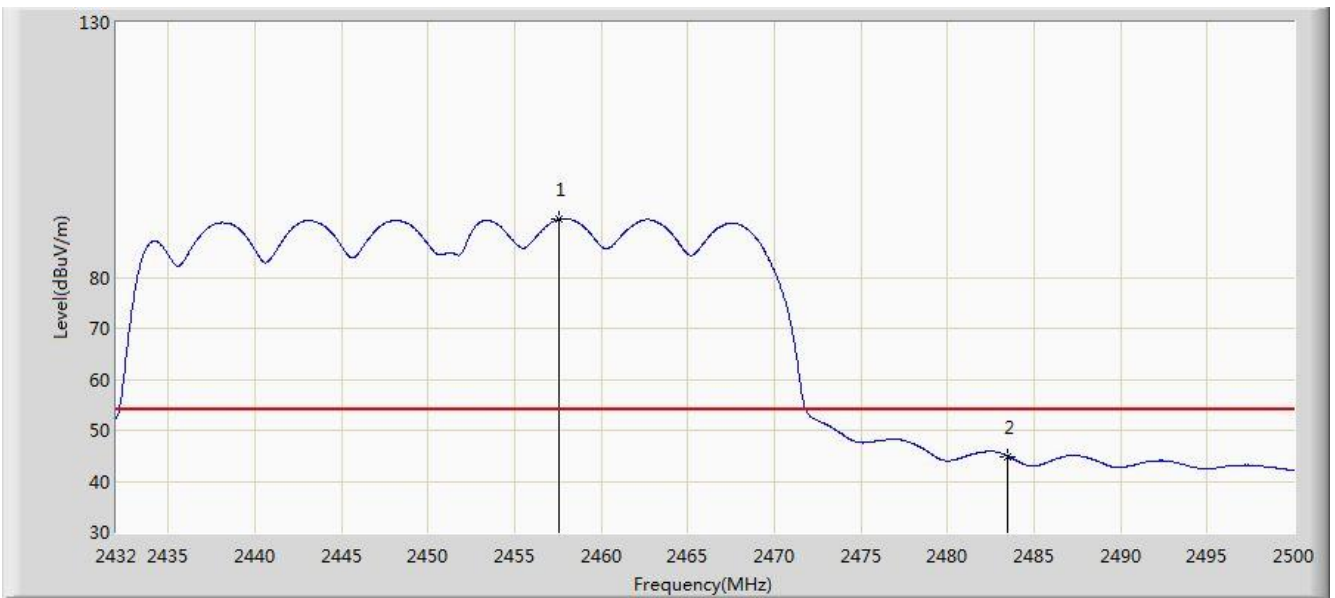


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.534	91.377	93.466	N/A	N/A	-2.089	AV
2			2483.500	44.917	46.903	-9.083	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 12:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2452MHz - Ant 0+1	

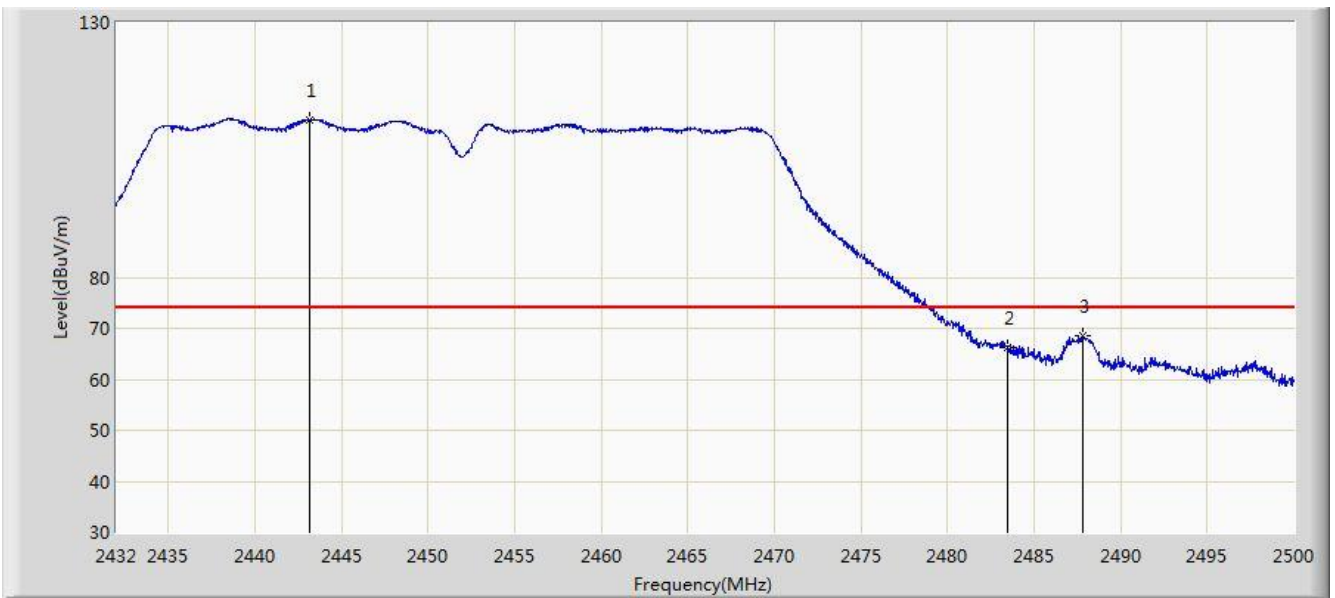


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.186	110.964	113.111	N/A	N/A	-2.147	PK
2			2483.500	66.350	68.336	-7.650	74.000	-1.986	PK
3			2487.794	68.584	70.553	-5.416	74.000	-1.970	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/19 - 11:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 2452MHz - Ant 0+1	

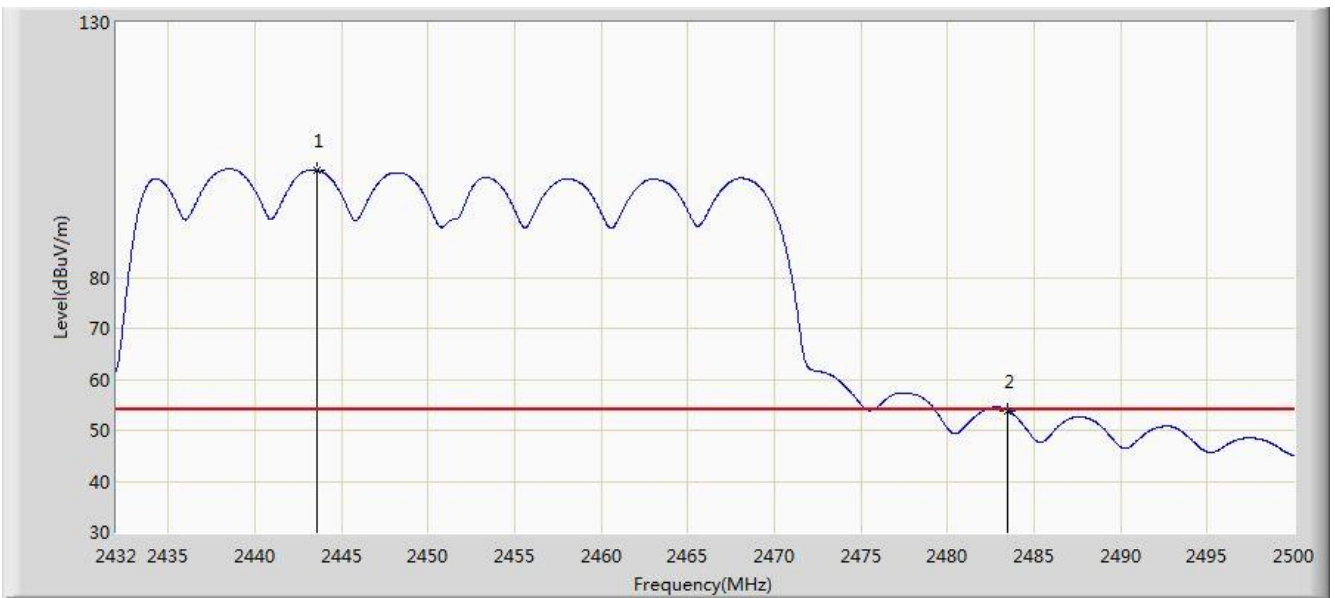


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.594	100.980	103.125	N/A	N/A	-2.145	AV
2			2483.500	53.904	55.890	-0.096	54.000	-1.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz - Ant 0+1	

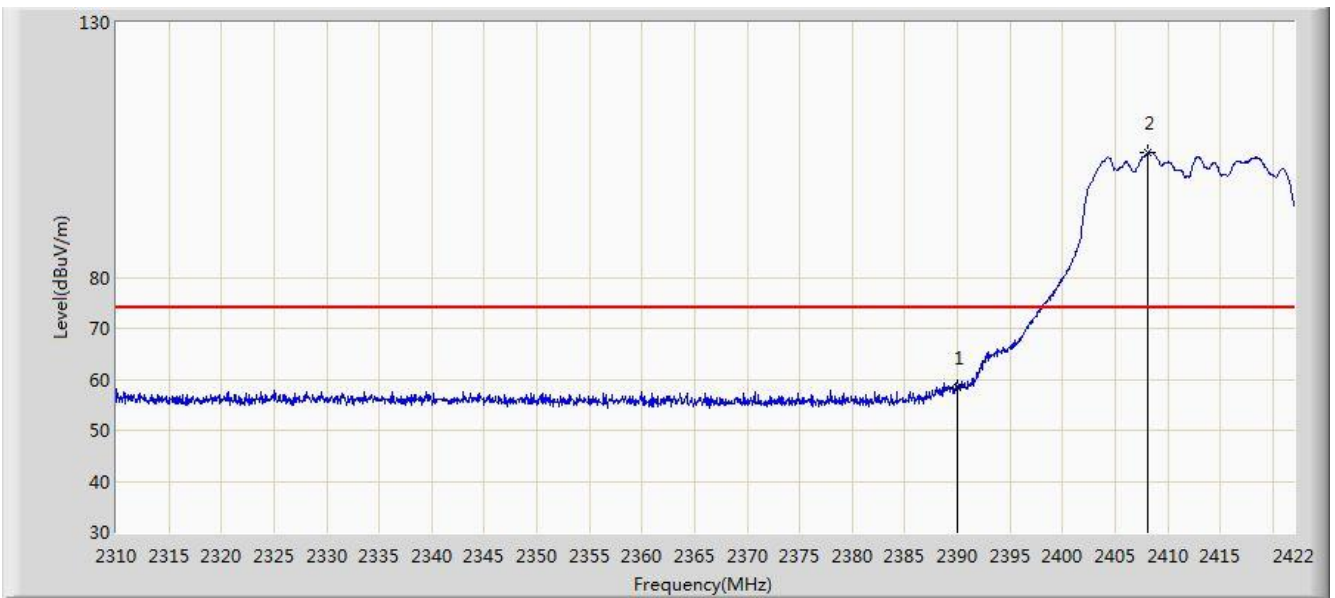


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.515	60.875	-15.485	74.000	-2.360	PK
2		*	2408.168	104.390	106.677	N/A	N/A	-2.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 04:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz - Ant 0+1	

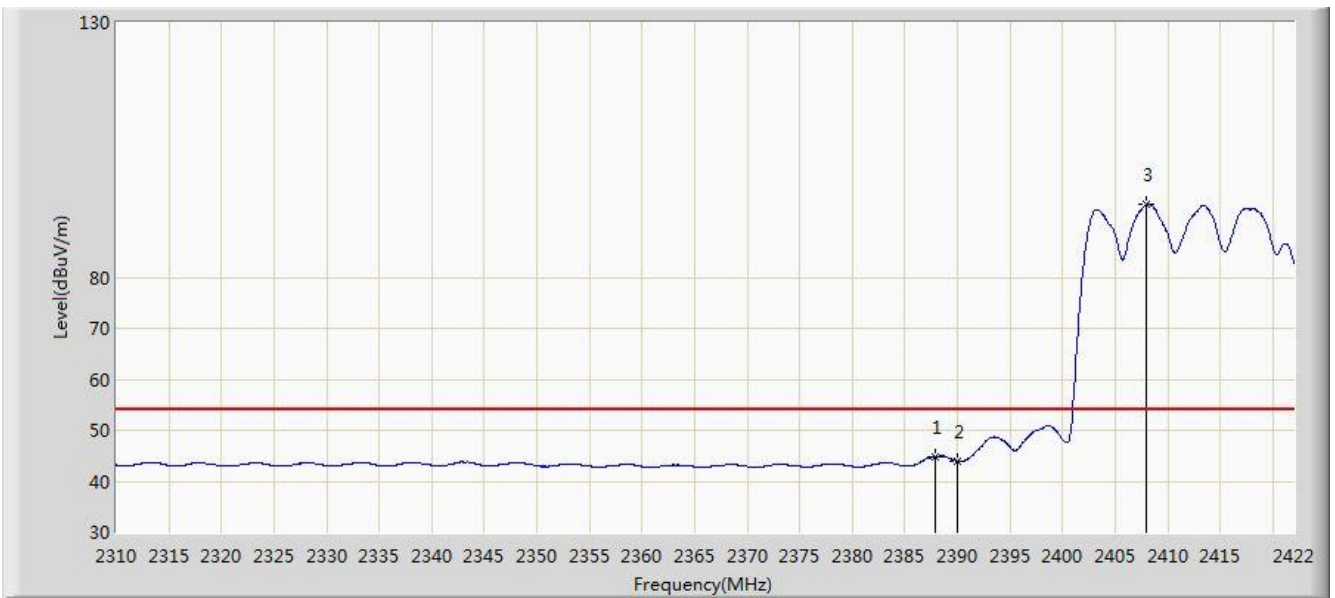


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.840	44.759	47.128	-9.241	54.000	-2.369	AV
2			2390.000	43.913	46.273	-10.087	54.000	-2.360	AV
3		*	2408.000	94.208	96.496	N/A	N/A	-2.288	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz - Ant 0+1	

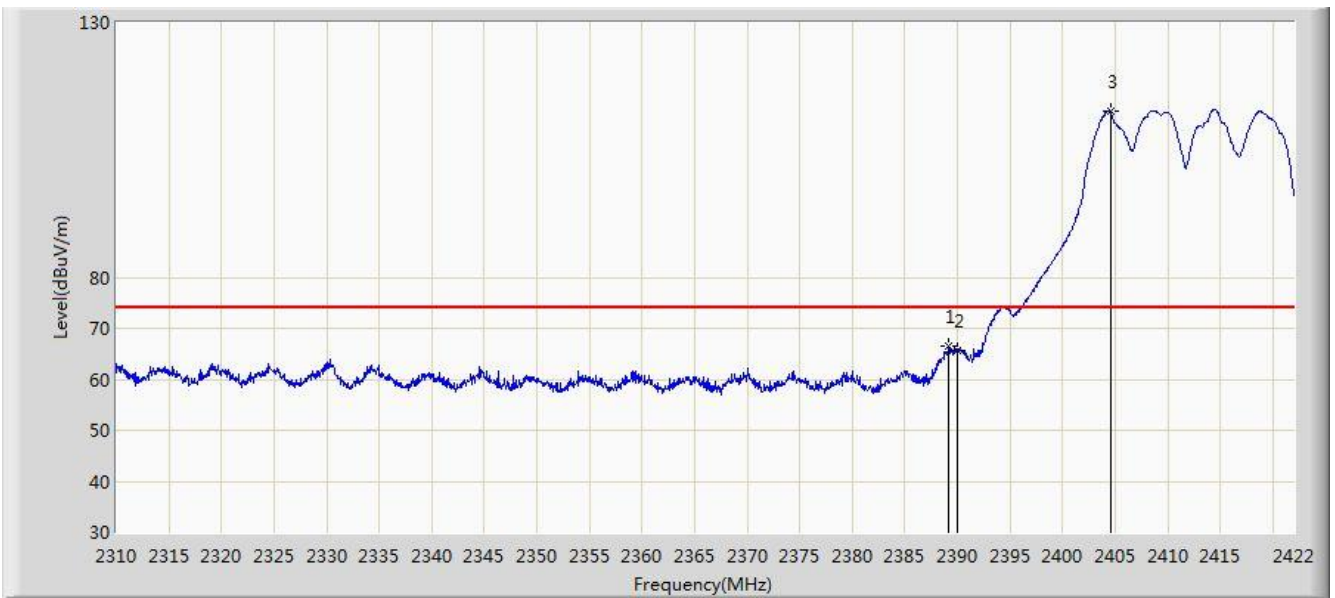


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.184	66.565	68.928	-7.435	74.000	-2.363	PK
2			2390.000	65.684	68.044	-8.316	74.000	-2.360	PK
3		*	2404.528	112.469	114.771	N/A	N/A	-2.302	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/04/30 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2412MHz - Ant 0+1	

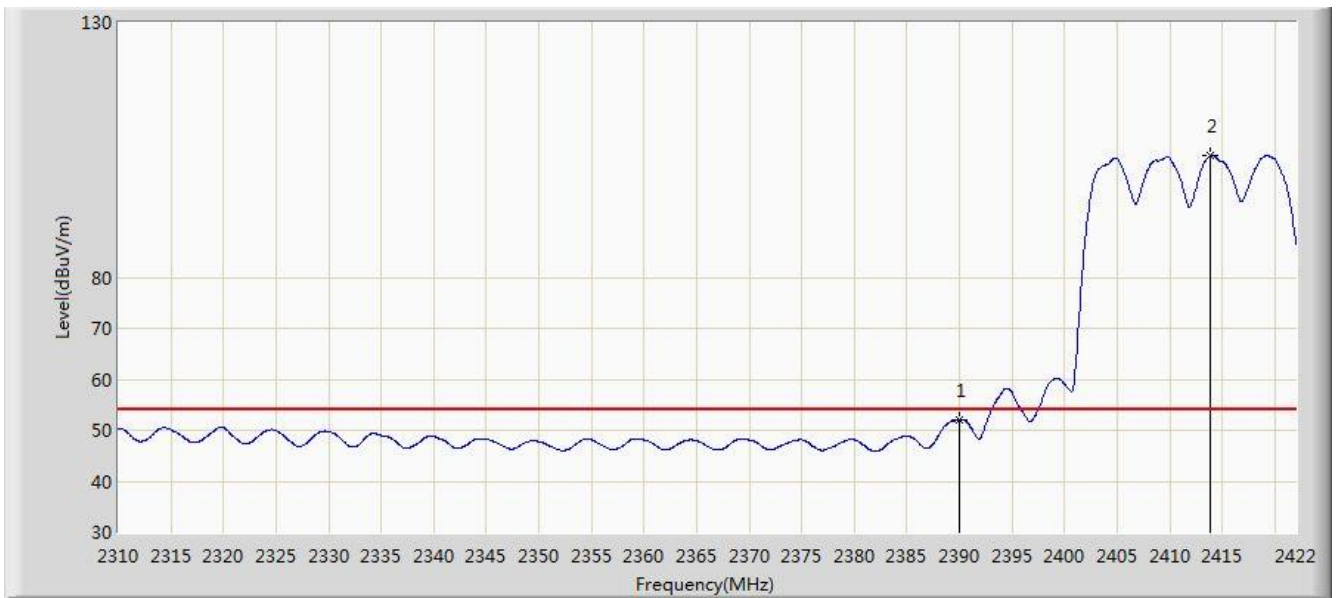


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.137	54.497	-1.863	54.000	-2.360	AV
2		*	2413.880	103.780	106.045	N/A	N/A	-2.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz - Ant 0+1	

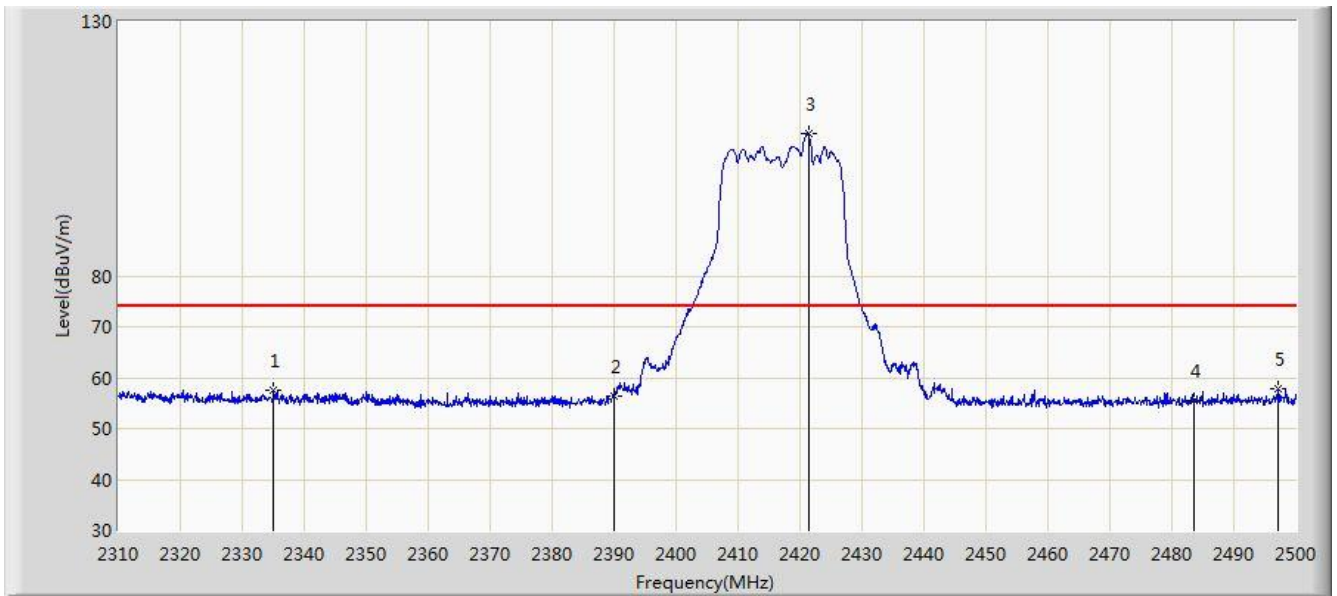


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2334.985	57.643	60.223	-16.357	74.000	-2.580	PK
2			2390.000	56.306	58.666	-17.694	74.000	-2.360	PK
3		*	2421.340	107.903	110.138	N/A	N/A	-2.235	PK
4			2483.500	55.497	57.483	-18.503	74.000	-1.986	PK
5			2497.245	57.691	59.628	-16.309	74.000	-1.937	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz - Ant 0+1	

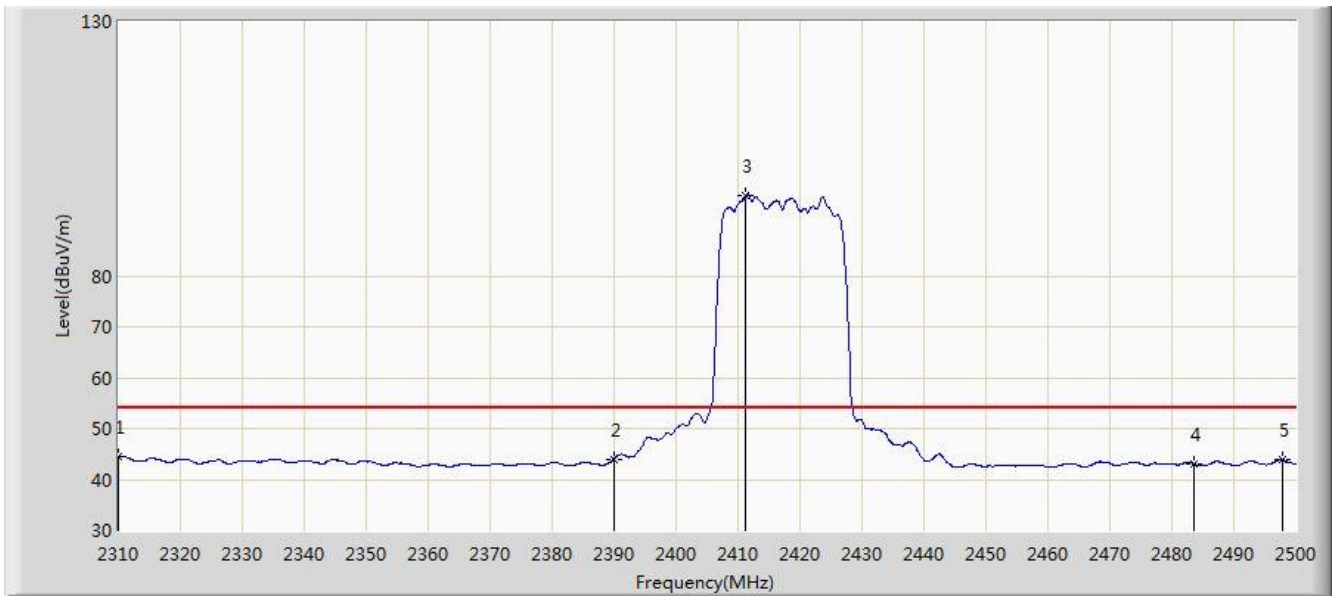


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2310.000	44.483	47.163	-9.517	54.000	-2.680	AV
2			2390.000	44.006	46.366	-9.994	54.000	-2.360	AV
3		*	2411.270	95.810	98.085	N/A	N/A	-2.275	AV
4			2483.500	43.036	45.022	-10.964	54.000	-1.986	AV
5			2497.815	43.943	45.880	-10.057	54.000	-1.937	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz - Ant 0+1	

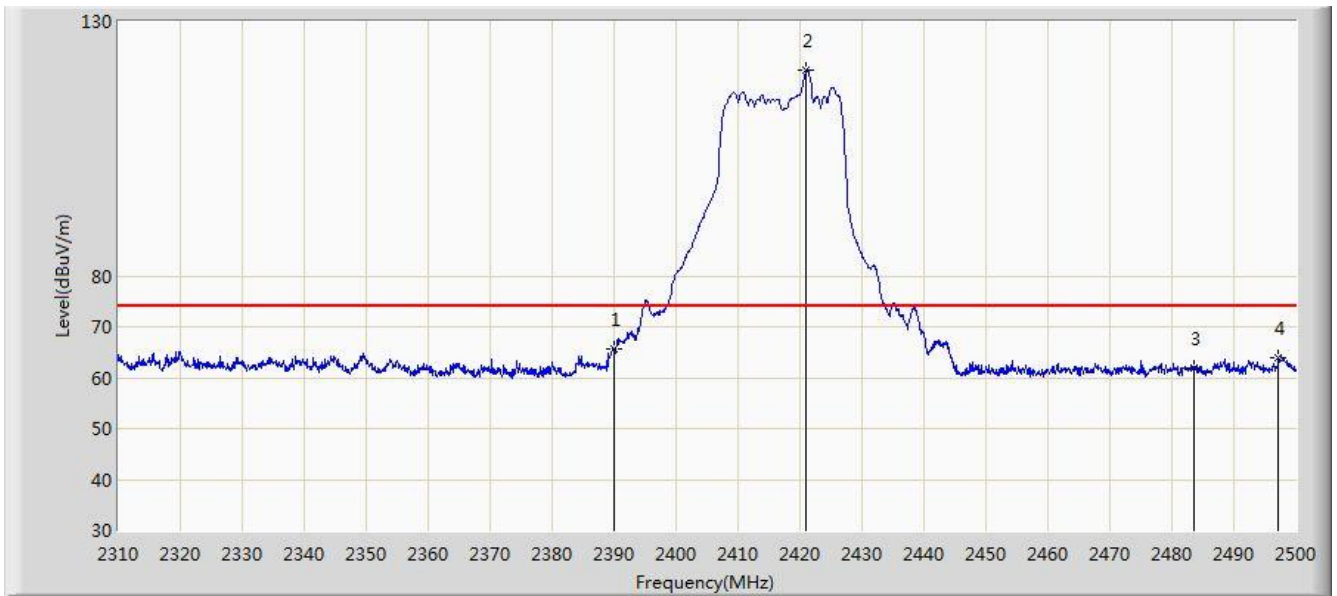


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.711	68.071	-8.289	74.000	-2.360	PK
2		*	2421.055	120.399	122.635	N/A	N/A	-2.236	PK
3			2483.500	61.794	63.780	-12.206	74.000	-1.986	PK
4			2497.245	64.043	65.980	-9.957	74.000	-1.937	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2417MHz - Ant 0+1	

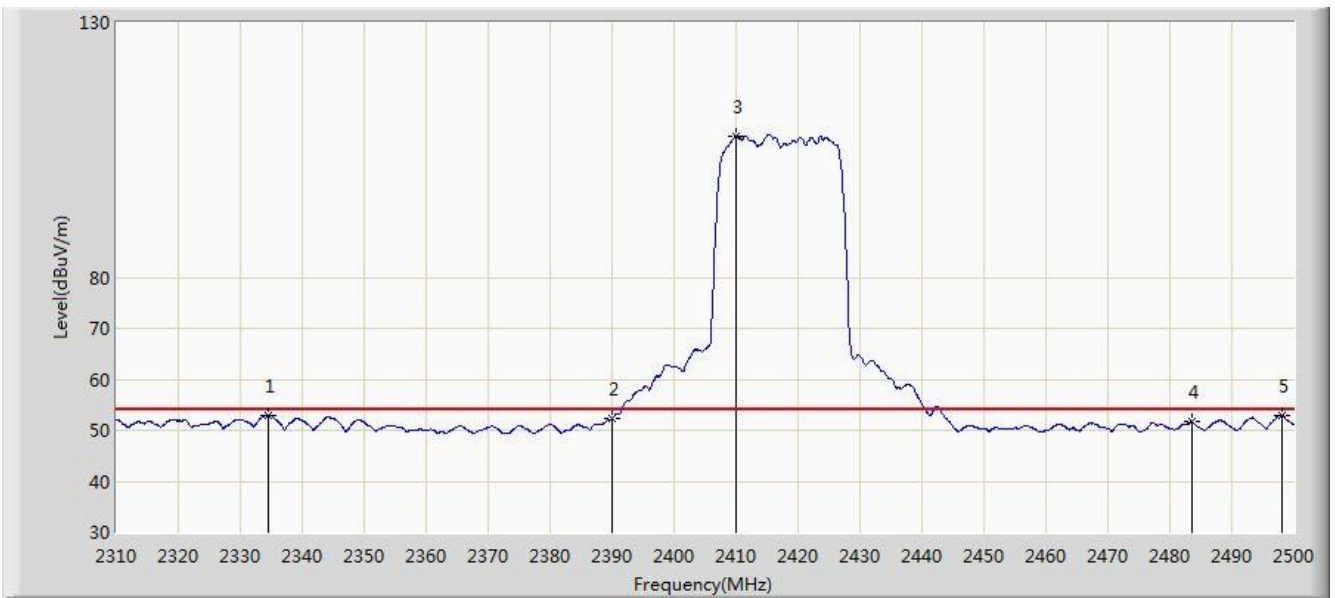


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2334.510	52.901	55.483	-1.099	54.000	-2.582	AV
2			2390.000	52.259	54.619	-1.741	54.000	-2.360	AV
3		*	2410.035	107.660	109.940	N/A	N/A	-2.280	AV
4			2483.500	51.604	53.590	-2.396	54.000	-1.986	AV
5			2498.100	52.901	54.839	-1.099	54.000	-1.938	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2422MHz - Ant 0+1	

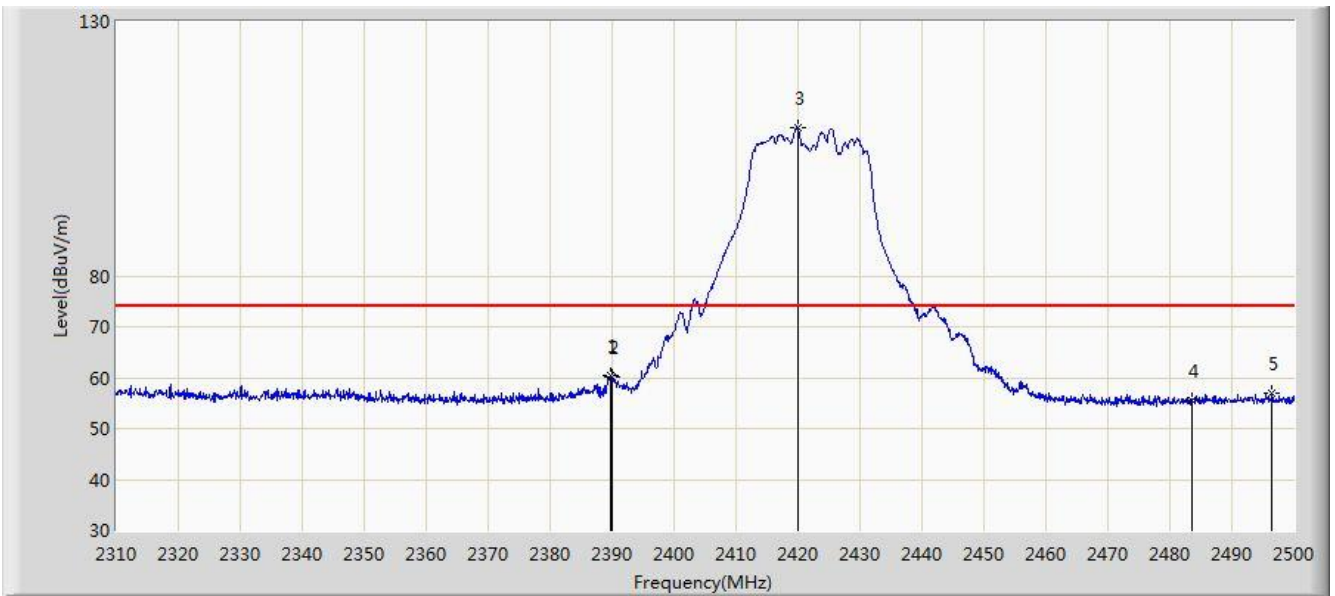


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	60.367	62.480	-13.633	74.000	-2.113	PK
2			2390.000	60.124	62.237	-13.876	74.000	-2.113	PK
3		*	2419.915	109.088	111.265	N/A	N/A	-2.177	PK
4			2483.500	55.624	57.715	-18.376	74.000	-2.090	PK
5			2496.485	57.034	59.108	-16.966	74.000	-2.074	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/05/06 - 20:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX3000 Gigabit Wi-Fi 6 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 2422MHz - Ant 0+1	

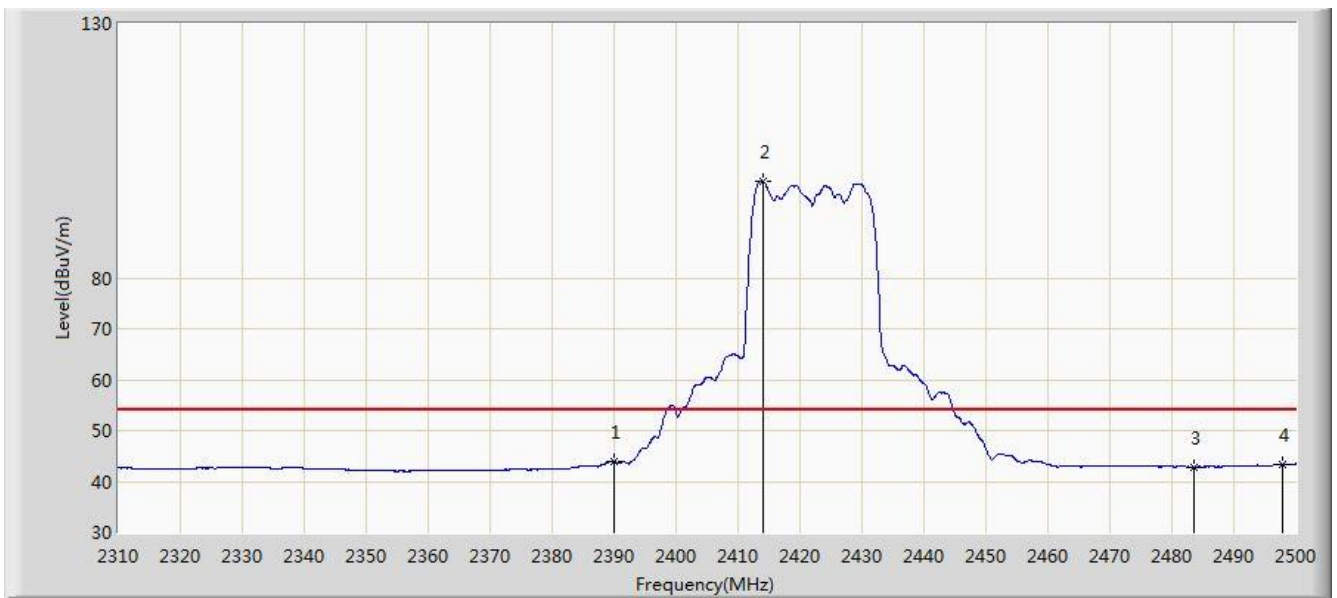

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.992	46.352	-10.008	54.000	-2.360	AV
2		*	2413.930	98.962	101.227	N/A	N/A	-2.265	AV
3			2483.500	42.878	44.864	-11.122	54.000	-1.986	AV
4			2497.815	43.297	45.234	-10.703	54.000	-1.937	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).