FCC Test Report

Applicant	:	**Dinsafer Innovation Co., Ltd.**
Address	:	**Area A,6/F,Factory Building B,Changfang Lighting, Industrial Area,No. 2 Planning Road 5,Zhukeng, Community,Longtian Street,Pingshan, Shenzhen, 518052, China**
Product Name	:	**Sloar Security Camera**
Report Date	:	**May 17, 2023**

Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information 6
1.1. Client Information 6
1.2. Description of Device (EUT) 6
1.3. Auxiliary Equipment Used During Test 7
1.4. Description of Test Configuration 7
1.5. Description Of Test Setup 8
1.6. Test Equipment List 9
1.7. Measurement Uncertainty 10
1.8. Description of Test Facility 10
2. Summary of Test Results 11
3. Conducted Emission Test 12
3.1. Test Standard and Limit 12
3.2. Test Setup 12
3.3. Test Procedure 12
3.4. Test Data 12
4. Radiation Spurious Emission and Band Edge 15
4.1. Test Standard and Limit 15
4.2. Test Setup 15
4.3. Test Procedure 16
4.4. Test Data 17
5. Maximum Peak Output Power Test 25
5.1. Test Standard and Limit 25
5.2. Test Setup 25
5.3. Test Procedure 25
5.4. Test Data 25
6. 6dB Occupy Bandwidth Test 26
6.1. Test Standard and Limit 26
6.2. Test Setup 26
6.3. Test Procedure 26
6.4. Test Data 26
7. Power Spectral Density Test 27
7.1. Test Standard and Limit 27
7.2. Test Setup 27
7.3. Test Procedure 27
7.4. Test Data 27
8. 100kHz Bandwidth of Frequency Band Edge Requirement 28
8.1. Test Standard and Limit 28

8.2. Test Setup 28
8.3. Test Procedure 28
8.4. Test Data 28
9. Antenna Requirement 29
9.1. Test Standard and Requirement 29
9.2. Antenna Connected Construction 29
APPENDIX I -- TEST SETUP PHOTOGRAPH 30
APPENDIX II -- EXTERNAL PHOTOGRAPH 30
APPENDIX III -- INTERNAL PHOTOGRAPH 30

TEST REPORT

Applicant	:	Dinsafer Innovation Co., Ltd.
Manufacturer	:	Dinsafer Innovation Co., Ltd.
Product Name	:	Sloar Security Camera
Model No.	:	DBC02, AAA00, *AA00(*=A-Z), A*A00(*=A-Z), AA*00(*=A-Z), AAA*0(*=0-9), AAA0*(*=0-9)
Trade Mark	:	N/A
Rating(s)	:	Input: 5V⎓ 2A(with DC 3.7V, 5200mAh battery inside)

Test Standard(s)	:	**FCC Part15 Subpart C, Section 15.247**
Test Method(s)	:	**ANSI C63.10: 2020, KDB 558074 D01 15.247 Meas Guidance v05r02**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt	Oct. 18, 2022
Date of Test	Oct. 18, 2022 ~ May 09, 2023
Prepared By	Nian xiu Chen (Nianxiu Chen)
Approved & Authorized Signer	Kingkong Jin (Kingkong Jin)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	May 17, 2023

Address:1/F.,Building D,Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 0755-26066440 Fax:(86) 0755-26014772 Email:service@anbotek.com
Hotline 400-003-0500
www.anbotek.com.cn

1. General Information

1.1. Client Information

Applicant	:	Dinsafer Innovation Co., Ltd.
Address	:	Area A,6/F,Factory Building B,Changfang Lighting, Industrial Area,No. 2 Planning Road 5,Zhukeng, Community,Longtian Street,Pingshan, Shenzhen, 518052, China
Manufacturer	:	Dinsafer Innovation Co., Ltd.
Address	:	Area A,6/F,Factory Building B,Changfang Lighting, Industrial Area,No. 2 Planning Road 5,Zhukeng, Community,Longtian Street,Pingshan, Shenzhen, 518052, China
Factory	:	Dinsafer Innovation Co., Ltd.
Address	:	Area A,6/F,Factory Building B,Changfang Lighting, Industrial Area,No. 2 Planning Road 5,Zhukeng, Community,Longtian Street,Pingshan, Shenzhen, 518052, China

1.2. Description of Device (EUT)

Product Name	:	Sloar Security Camera
Model No.	:	DBC02, AAA00, *AA00(*=A-Z), A*A00(*=A-Z), AA*00(*=A-Z), AAA*0(*=0-9), AAA0*(*=0-9) (Note: All samples are the same except the model number and appearance, so we prepare "DBC02" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	☒ BT BLE
Support Rate	:	☒ 1Mbps ☐ 2Mbps
Operation Frequency	:	2402~2480MHz
Number of Channel	:	40 Channels
Modulation Type	:	GFSK
Antenna Type	:	Ceramic Antenna
Antenna Gain(Peak)	:	2.73dBi (Provided by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Adapter	M/N: A2023 Input: AC 100-240V, 0.7A, 50-60Hz USB1 Output: DC 5V, 2.4A USB2 Output: DC 5V, 2.4A

1.4. Description of Test Configuration

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	**2402**	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	**19**	**2440**	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	**39**	**2480**
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with channel 0, 19 and 39.

1.5. Description Of Test Setup

CE

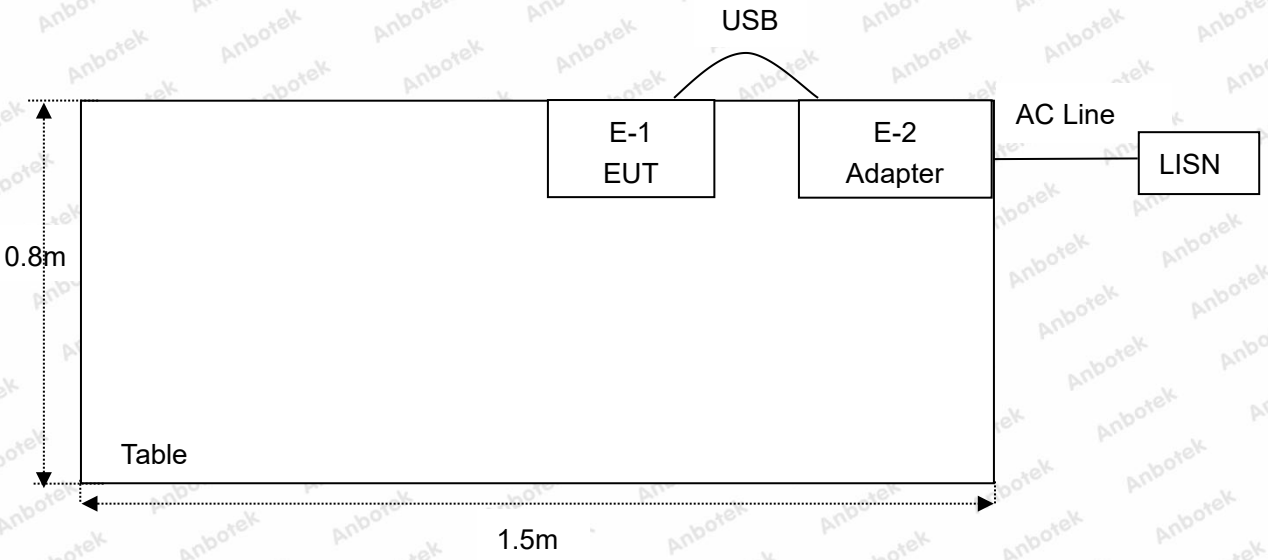

RE

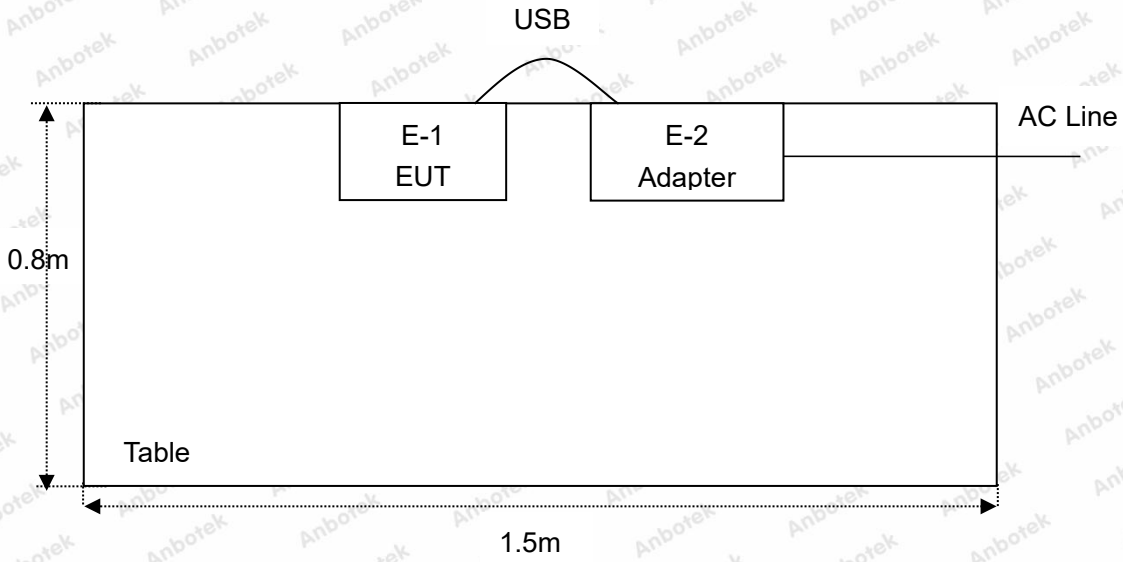

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 19, 2022	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct.26, 2022	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark:(1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

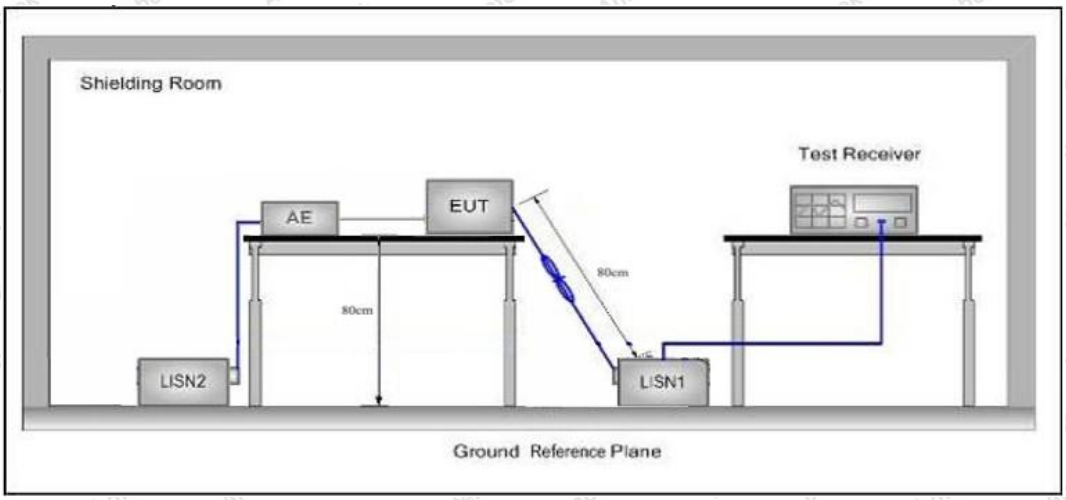

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.

Conducted Emission Test Data

Test Site:	1# Shielded Room
Operating Condition:	2402MHz
Test Specification:	AC 120V, 60Hz for Adapter
Comment:	Live Line
Temp.(℃)/Hum.(%RH):	24.9℃/43%RH

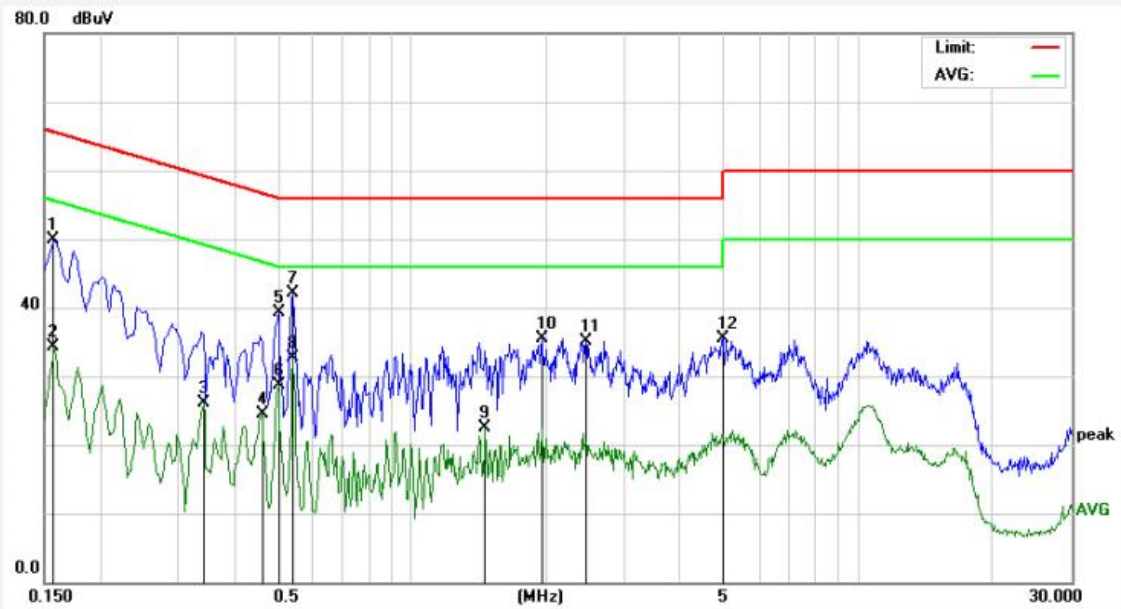

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	40.17	9.70	49.87	65.56	-15.69	QP	
2	0.1580	24.57	9.70	34.27	55.56	-21.29	AVG	
3	0.3420	16.38	9.72	26.10	49.15	-23.05	AVG	
4	0.4620	14.84	9.74	24.58	46.66	-22.08	AVG	
5	0.5020	29.59	9.76	39.35	56.00	-16.65	QP	
6	0.5020	18.87	9.76	28.63	46.00	-17.37	AVG	
7	0.5420	32.39	9.76	42.15	56.00	-13.85	QP	
8	0.5420	22.93	9.76	32.69	46.00	-13.31	AVG	
9	1.4620	12.70	9.73	22.43	46.00	-23.57	AVG	
10	1.9540	25.87	9.72	35.59	56.00	-20.41	QP	
11	2.4539	25.42	9.72	35.14	56.00	-20.86	QP	
12	4.9939	25.76	9.74	35.50	56.00	-20.50	QP	

Conducted Emission Test Data

Test Site:	1# Shielded Room
Operating Condition:	2402MHz
Test Specification:	AC 120V, 60Hz for Adapter
Comment:	Neutral Line
Temp.(℃)/Hum.(%RH):	24.9℃/43%RH

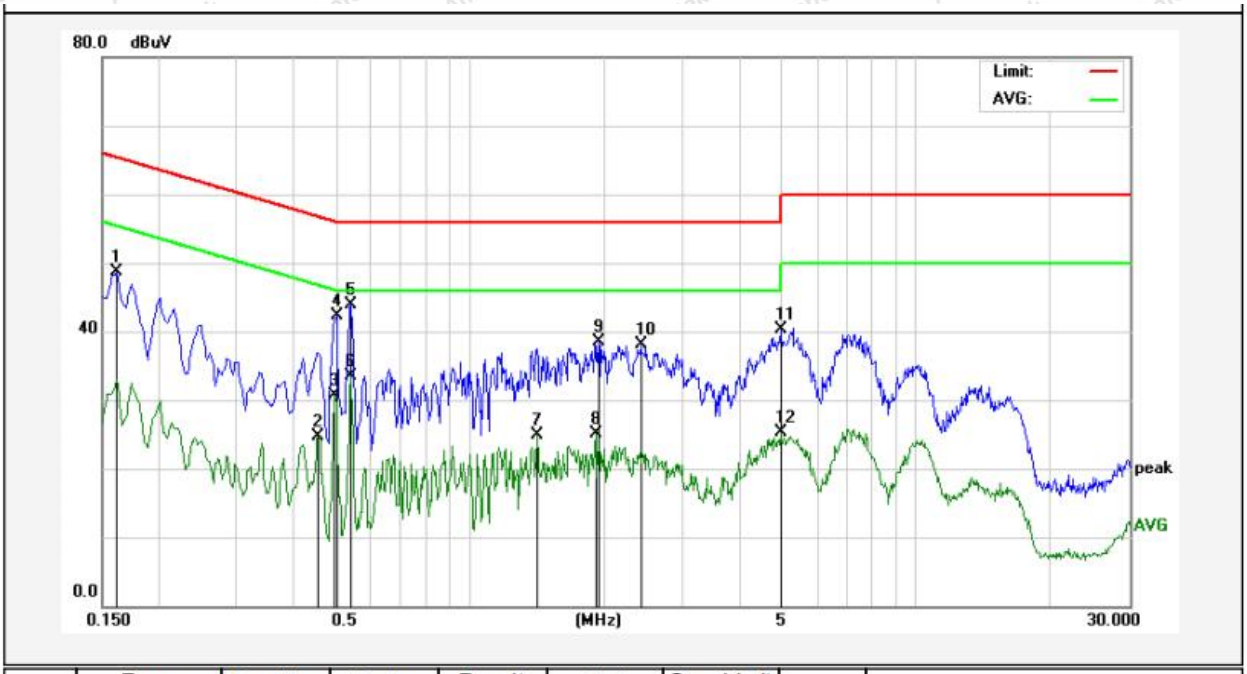

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	38.95	9.70	48.65	65.36	-16.71	QP	
2	0.4580	14.96	9.74	24.70	46.73	-22.03	AVG	
3	0.4980	20.95	9.76	30.71	46.03	-15.32	AVG	
4	0.5020	32.51	9.76	42.27	56.00	-13.73	QP	
5	0.5420	34.19	9.76	43.95	56.00	-12.05	QP	
6	0.5420	23.69	9.76	33.45	46.00	-12.55	AVG	
7	1.4140	15.09	9.73	24.82	46.00	-21.18	AVG	
8	1.9140	15.32	9.72	25.04	46.00	-20.96	AVG	
9	1.9460	28.73	9.72	38.45	56.00	-17.55	QP	
10	2.4140	28.35	9.72	38.07	56.00	-17.93	QP	
11	4.9540	30.53	9.74	40.27	56.00	-15.73	QP	
12	4.9540	15.49	9.74	25.23	46.00	-20.77	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:
(1)The lower limit shall apply at the transition frequency.
(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

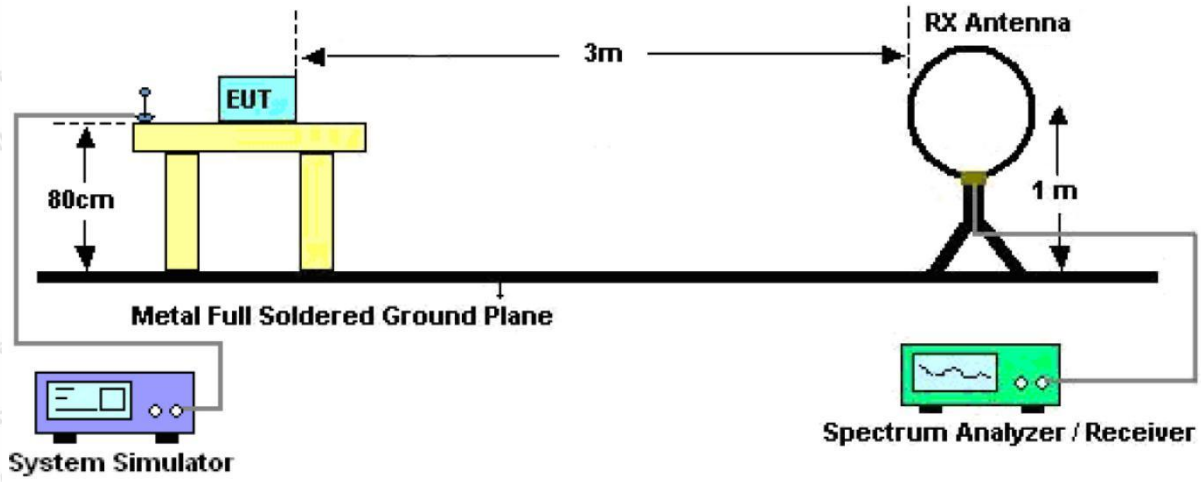

Figure 1. Below 30MHz

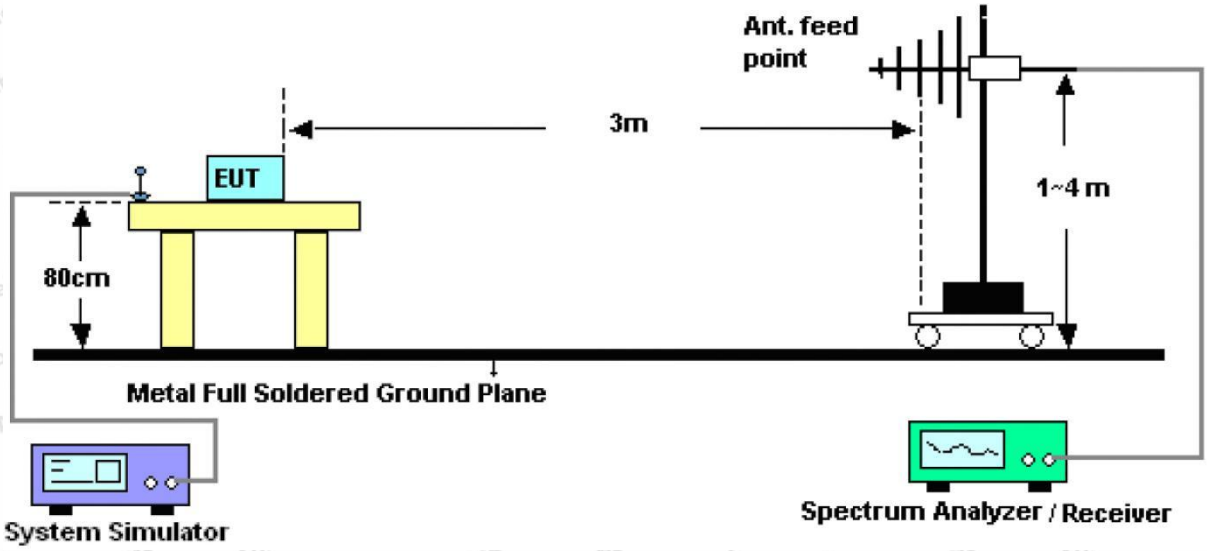

Figure 2. 30MHz to 1GHz

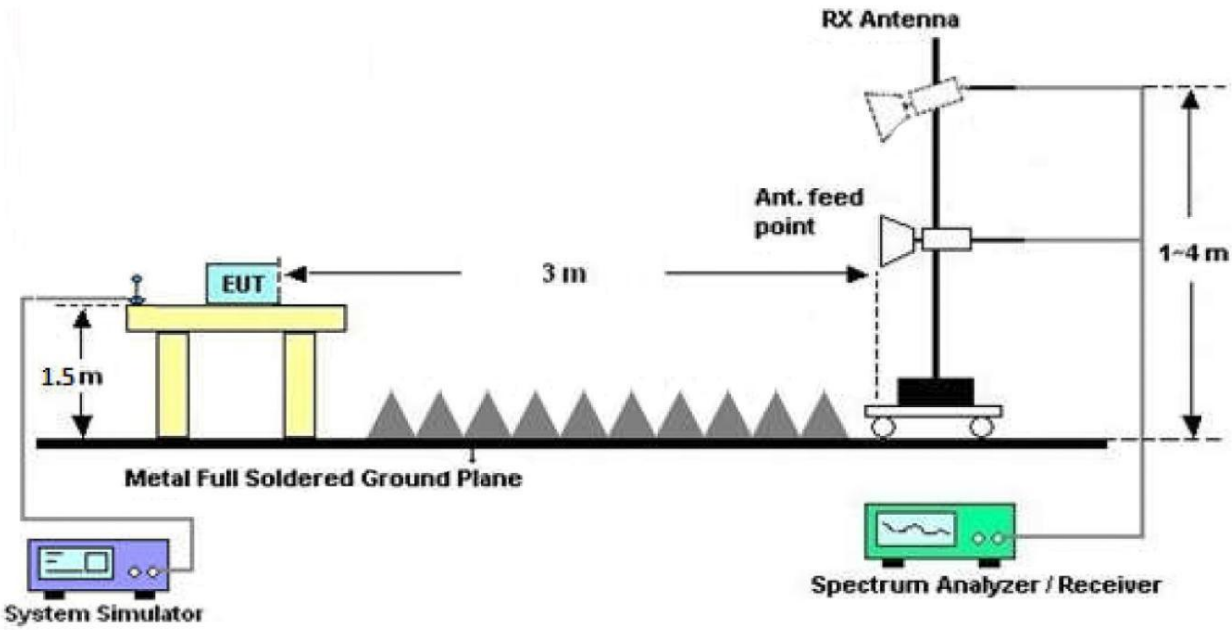

Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz,Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

–VBW=10Hz, When duty cycle is no less than 98 percent

–VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.

Test Results (30~1000MHz)

Test Mode: 2402MHz

Power Source: AC 120V, 60Hz for Adapter

Polarization: Horizontal

Temp.(℃)/Hum.(%RH): 23.5℃/49%RH

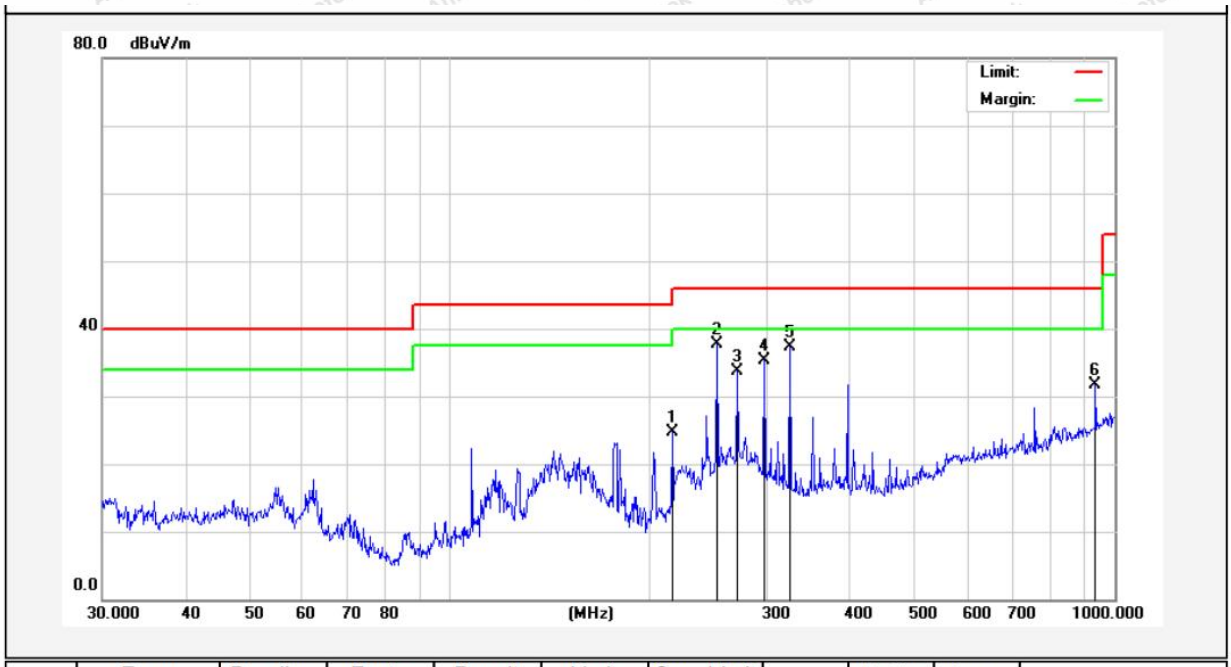

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	216.0240	46.81	-22.07	24.74	46.00	-21.26	QP			
2	252.0627	59.06	-21.31	37.75	46.00	-8.25	QP			
3	270.3747	53.49	-19.72	33.77	46.00	-12.23	QP			
4	297.2241	52.66	-17.40	35.26	46.00	-10.74	QP			
5	324.4560	53.81	-16.59	37.22	46.00	-8.78	QP			
6	935.5461	37.42	-5.81	31.61	46.00	-14.39	QP			

Test Results (30~1000MHz)

Test Mode: 2402MHz

Power Source: AC 120V, 60Hz for Adapter

Polarization: Vertical

Temp.(℃)/Hum.(%RH): 23.5℃/49%RH

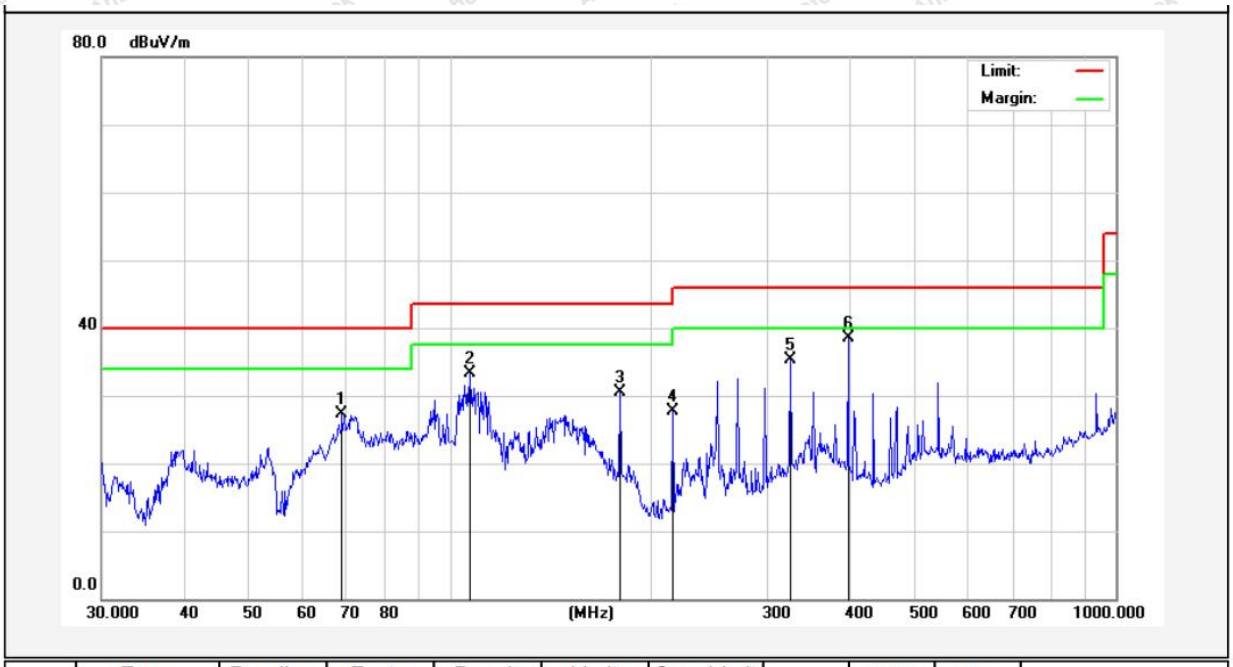

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	68.8721	47.03	-19.82	27.21	40.00	-12.79	QP			
2	107.1337	51.04	-17.73	33.31	43.50	-10.19	QP			
3	180.0165	51.10	-20.60	30.50	43.50	-13.00	QP			
4	216.0240	46.87	-19.11	27.76	46.00	-18.24	QP			
5	324.4560	50.91	-15.64	35.27	46.00	-10.73	QP			
6	396.2412	53.06	-14.48	38.58	46.00	-7.42	QP			

Test Results (1GHz-25GHz)

Test Mode: CH00			Test channel: Lowest			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	27.98	15.27	43.25	74.00	-30.75	Vertical
7206.00	28.13	18.09	46.22	74.00	-27.78	Vertical
9608.00	28.81	23.76	52.57	74.00	-21.43	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	27.69	15.27	42.96	74.00	-31.04	Horizontal
7206.00	28.48	18.09	46.57	74.00	-27.43	Horizontal
9608.00	27.91	23.76	51.67	74.00	-22.33	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	16.25	15.27	31.52	54.00	-22.48	Vertical
7206.00	17.18	18.09	35.27	54.00	-18.73	Vertical
9608.00	18.28	23.76	42.04	54.00	-11.96	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	16.02	15.27	31.29	54.00	-22.71	Horizontal
7206.00	17.51	18.09	35.60	54.00	-18.40	Horizontal
9608.00	17.42	23.76	41.18	54.00	-12.82	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test Mode: CH19			Test channel: Middle			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	27.53	15.42	42.95	74.00	-31.05	Vertical
7320.00	28.10	18.02	46.12	74.00	-27.88	Vertical
9760.00	28.31	23.80	52.11	74.00	-21.89	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	27.50	15.42	42.92	74.00	-31.08	Horizontal
7320.00	28.35	18.02	46.37	74.00	-27.63	Horizontal
9760.00	27.63	23.80	51.43	74.00	-22.57	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	16.34	15.42	31.76	54.00	-22.24	polarization
7320.00	17.04	18.02	35.06	54.00	-18.94	Vertical
9760.00	18.13	23.80	41.93	54.00	-12.07	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	16.13	15.42	31.55	54.00	-22.45	Vertical
7320.00	17.86	18.02	35.88	54.00	-18.12	Horizontal
9760.00	17.72	23.80	41.52	54.00	-12.48	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test Mode: CH39			Test channel: Highest			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	27.66	15.58	43.24	74.00	-30.76	Vertical
7440.00	28.26	17.93	46.19	74.00	-27.81	Vertical
9920.00	29.01	23.83	52.84	74.00	-21.16	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	27.64	15.58	43.22	74.00	-30.78	Horizontal
7440.00	28.56	17.93	46.49	74.00	-27.51	Horizontal
9920.00	28.01	23.83	51.84	74.00	-22.16	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	17.46	15.58	33.04	54.00	-20.96	Vertical
7440.00	18.31	17.93	36.24	54.00	-17.76	Vertical
9920.00	18.78	23.83	42.61	54.00	-11.39	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	17.31	15.58	32.89	54.00	-21.11	Horizontal
7440.00	18.66	17.93	36.59	54.00	-17.41	Horizontal
9920.00	17.87	23.83	41.70	54.00	-12.30	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

1.Result =Reading + Factor

2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Test Mode: CH00	Test channel: Lowest
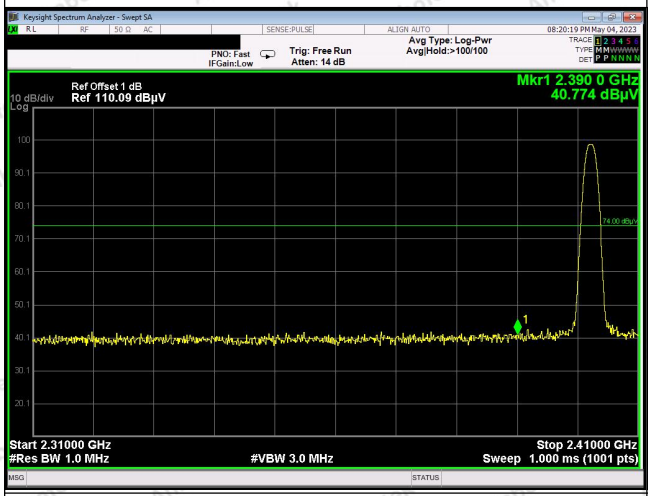	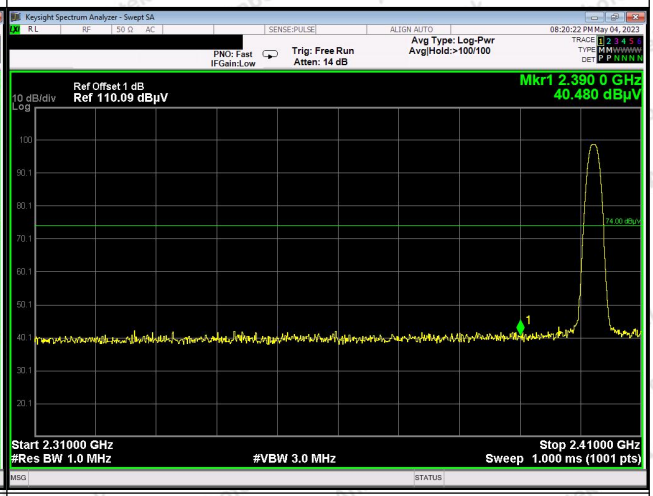
Peak Value(Vertical)	Peak Value(Horizontal)
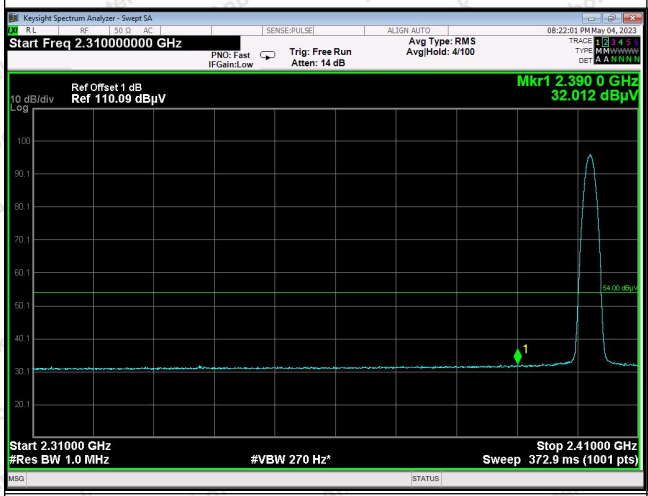	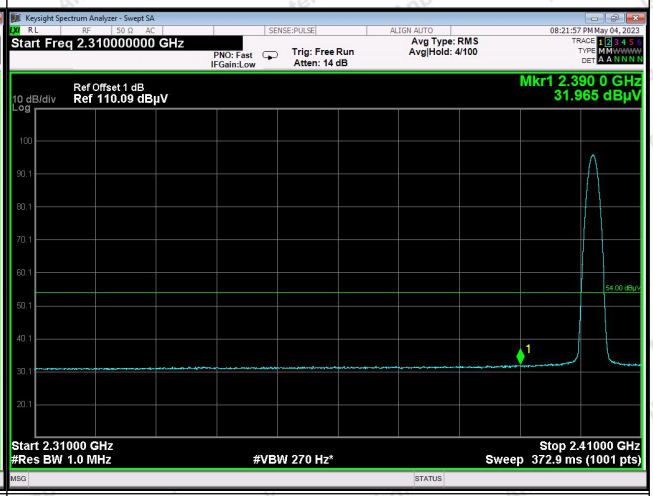
Average Value(Vertical)	Average Value(Horizontal)

Test Mode: CH39	Test channel: Highest
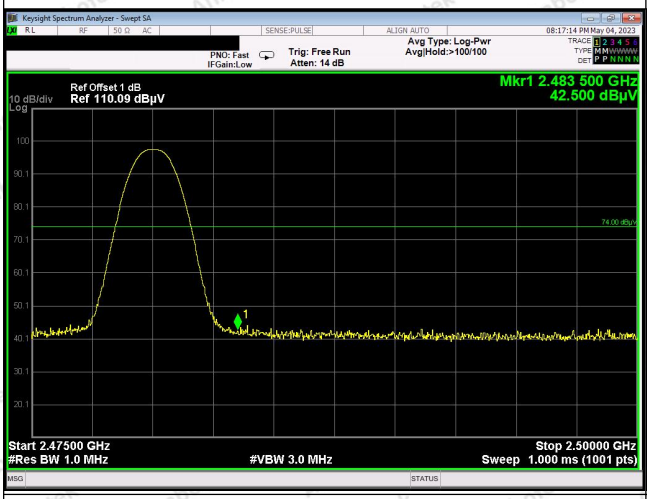	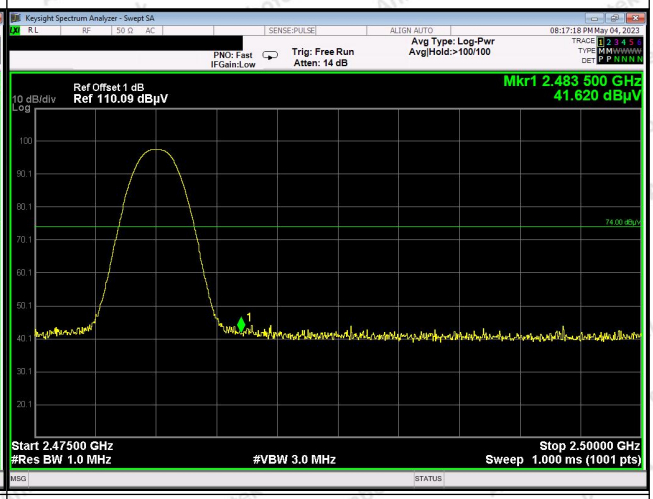
Peak Value(Vertical)	Peak Value(Horizontal)
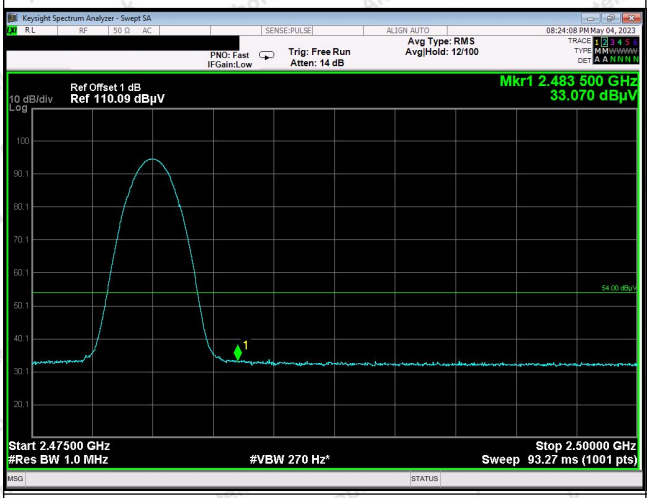	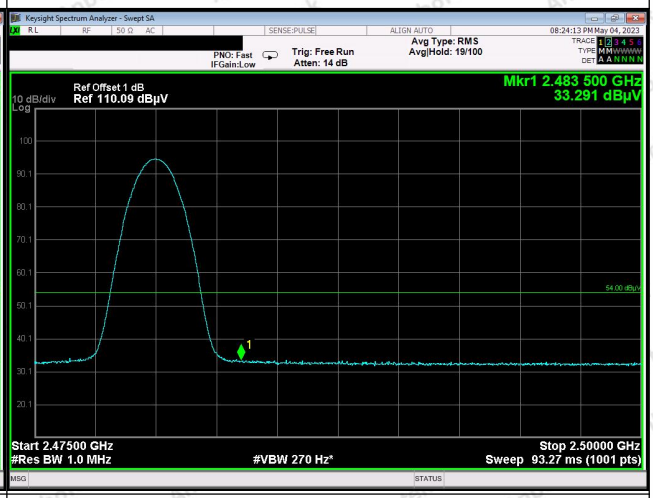
Average Value(Vertical)	Average Value(Horizontal)

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W (30dBm)

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW ≥DTS bandwidth.
2. Set the VBW≥3*RBW.
3. Set the span≥ 3*RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Additional test for duty cycle.

Please refer to Appendix G of the Appendix Test Data.

6. 6dB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	≥500kHz

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
   RBW = 100kHz, VBW≥3*RBW
   Detector= Peak
   Trace mode= Max hold.
   Sweep- auto couple.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3kHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW ≥ 3*RBW, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix E & Appendix F of the Appendix Test Data.

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The antenna is a Ceramic Antenna which permanently attached, and the best case gain of the antenna is 2.73dBi . It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

---------- End of Report ----------