TEST REPORT

Applicant Name:	Inrico Technologies Co.,Ltd
Address:	A1703, Shenzhen National Engineering Laboratory Building, No. 20 Gaoxin South 7th Road,Shenzhen,China
Report Number:	2401W89040E-RF-00A
FCC ID:	2AIV6-S300PLUS

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type:	Rugged Smart Device
Model No.:	S300 Plus
Multiple Model(s) No.:	N/A
Trade Mark:	Inrico
Date Received:	2024-08-08
Issue Date:	2025-04-15

Test Result:	Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Wills Yu
RF Engineer

Approved By:

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **3**
GENERAL INFORMATION **4**
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
OBJECTIVE 4
TEST METHODOLOGY 4
MEASUREMENT UNCERTAINTY 5
TEST FACILITY 5
SYSTEM TEST CONFIGURATION **6**
SUMMARY OF TEST RESULTS **9**
TEST EQUIPMENT LIST **10**
REQUIREMENTS AND TEST PROCEDURES **12**
AC LINE CONDUCTED EMISSIONS 12
SPURIOUS EMISSIONS 14
6 DB EMISSION BANDWIDTH 17
MAXIMUM CONDUCTED OUTPUT POWER 18
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 19
POWER SPECTRAL DENSITY 20
DUTY CYCLE 21
ANTENNA REQUIREMENT **22**
TEST DATA AND RESULTS **23**
AC LINE CONDUCTED EMISSIONS 23
SPURIOUS EMISSIONS 26
6DB EMISSION BANDWIDTH 75
99% OCCUPIED BANDWIDTH 79
MAXIMUM CONDUCTED OUTPUT POWER 83
POWER SPECTRAL DENSITY 85
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 89
DUTY CYCLE 91
RF EXPOSURE EVALUATION **93**
EUT PHOTOGRAPHS **94**
TEST SETUP PHOTOGRAPHS **95**

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401W89040E-RF-00A	Original Report	2025-04-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	2412~2462MHz
Maximum Conducted Output Peak Power	15.16dBm
Modulation Technique	DSSS, OFDM
Antenna Specification#	1.23dBi
Voltage Range	DC 3.8V from battery or DC 5V from Adapter
Sample serial number	2PIE-6 for Conducted and Radiated Emissions Test 2PIE-5 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: HJ-0503000-US Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 3.0A, 15.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1℃
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

EUT Exercise Software

Exercise Software#		Engineering Mode		
Mode	Data rate	Power Level#		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	11	11	11
802.11n20	MCS0	11	11	11
Note: The worst-case data rates are determined to be as follows for each mode based upon inverstigation by measuring the power and PSD across all data rates bandwidths, and modulations.				

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter
Un-shielded Un-detachable AC Cable	1.2	Receptacle	LISN/AC Mains

Block Diagram of Test Setup

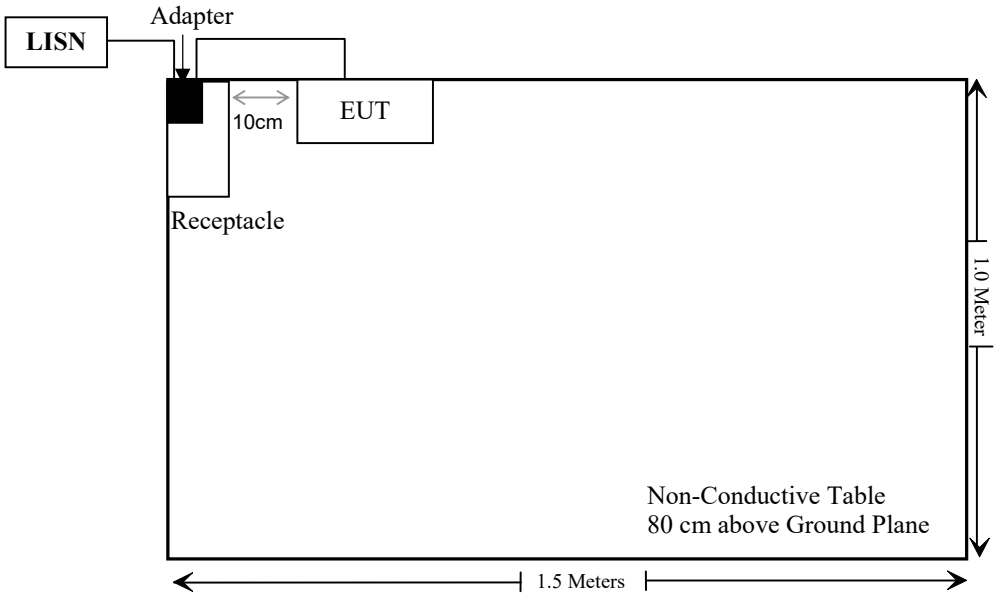

For Radiated Emissions below 1GHz:

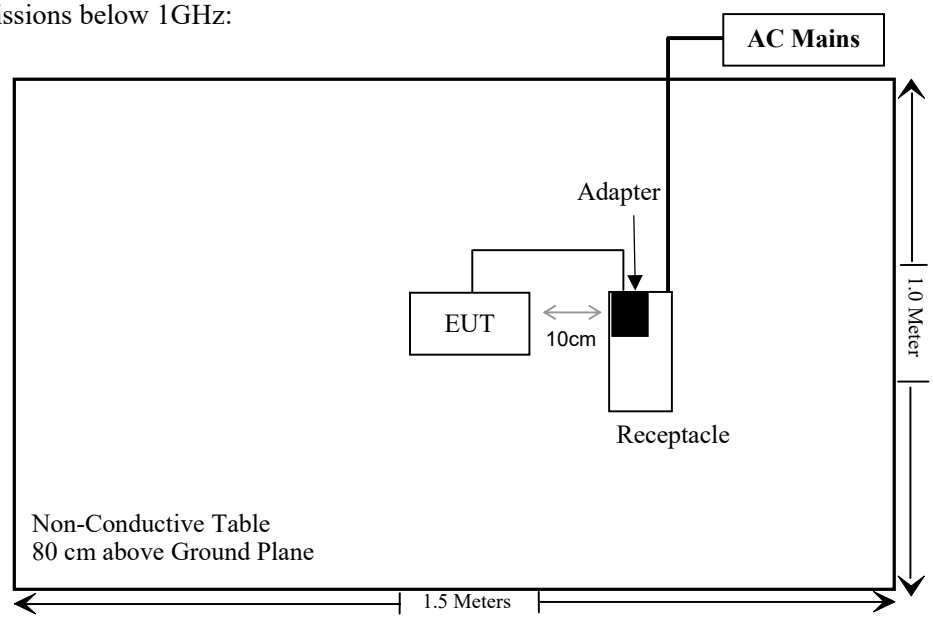

For Radiated Emissions above 1GHz:

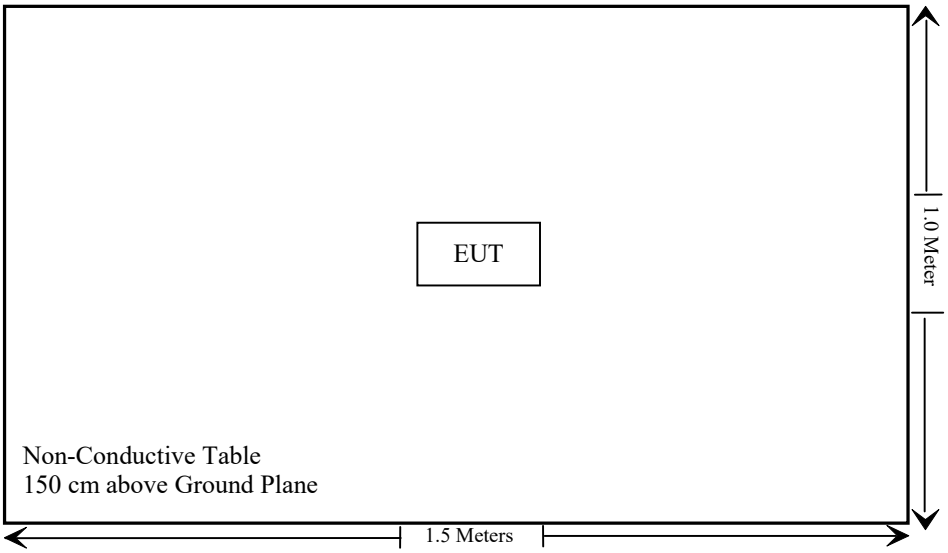

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 & 2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101942	2024/09/20	2025/09/19
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC§15.207

EUT Setup

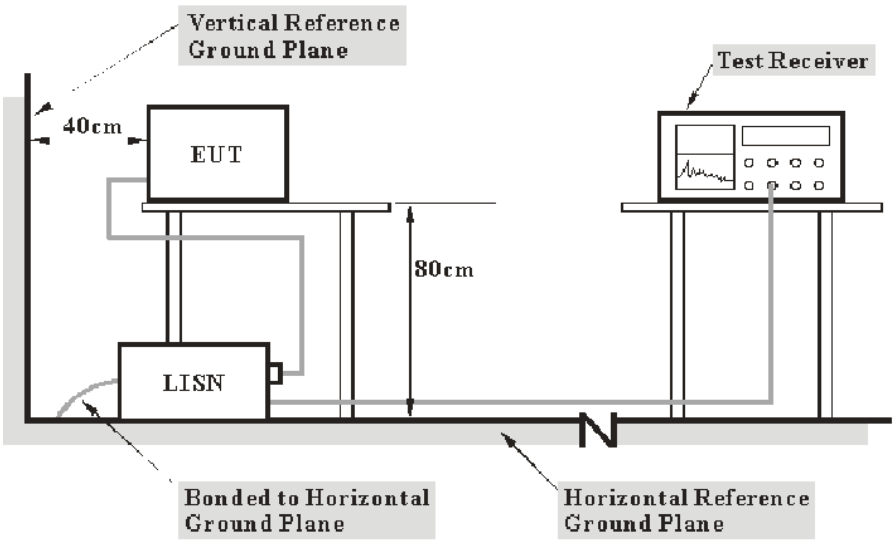

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

Factor = LISN VDF + Cable Loss

The "**Over Limit**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Over Limit = level – Limit
Level= reading level+ Factor

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Spurious Emissions

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

EUT Setup

9 kHz-30MHz:

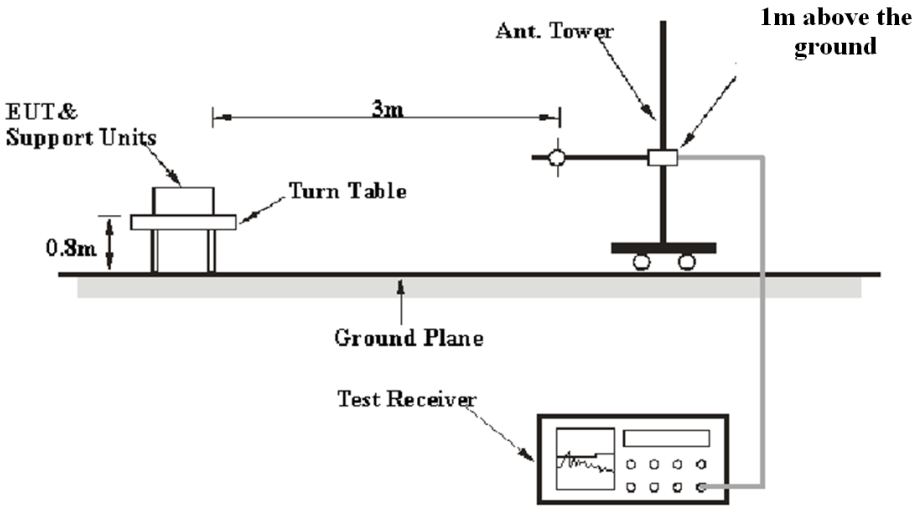

30MHz-1GHz:

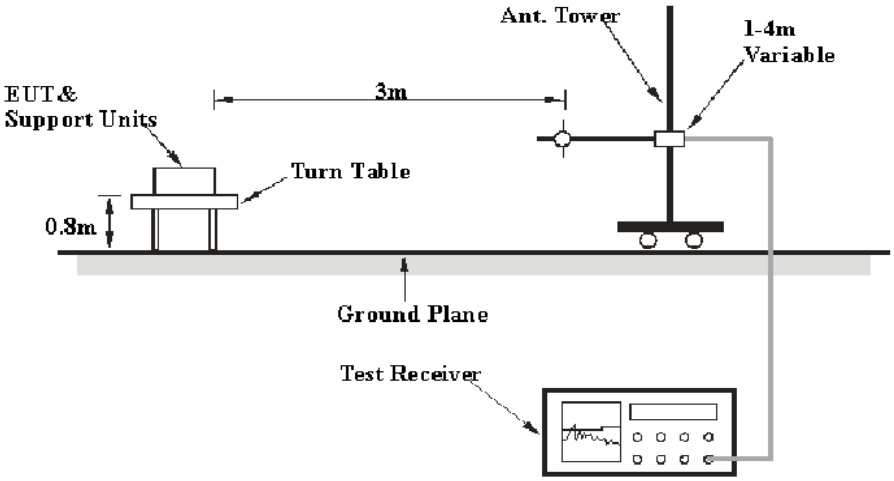

Above 1GHz:

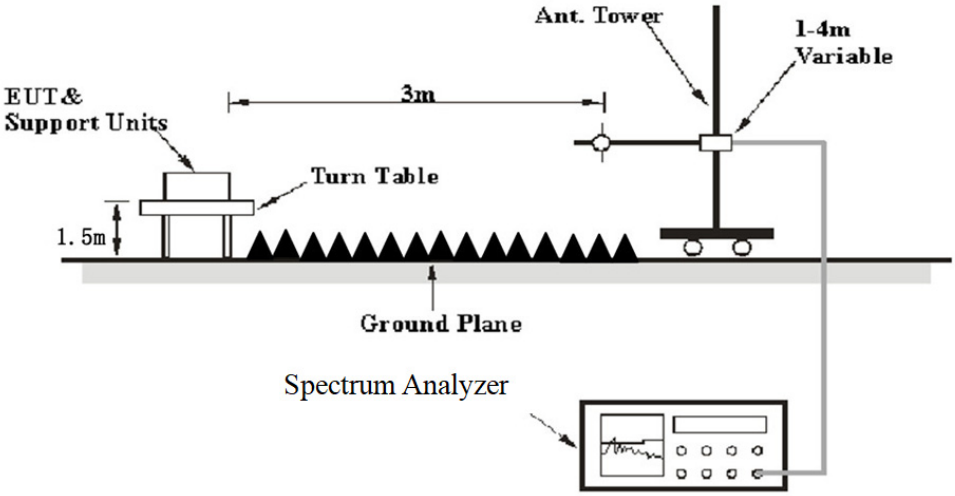

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-25GHz:
Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over Limit/Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level/Corrected Amplitude – Limit
Level / Corrected Amplitude = Read Level + Factor

6 dB Emission Bandwidth

Applicable Standard

According to FCC §15.247(a) (2)
Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1

a) Set RBW = 100 kHz.
b) Set the VBW ⩾ [3 × RBW].
c) Detector = peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW (for RSS rules, VBW shall not be smaller than three times the RBW, unless otherwise specified by the applicable requirement).
c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
d. Step a) through step c) might require iteration to adjust within the specified range.
e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data maybe reported in addition to the plot(s).

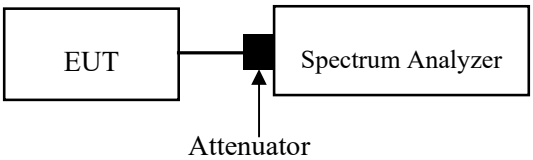

Maximum Conducted Output Power

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test method: ANSI C63.10-2013 clause 11.9.1.3 for peak power method or clause 11.9.2.3.2 for average power method.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

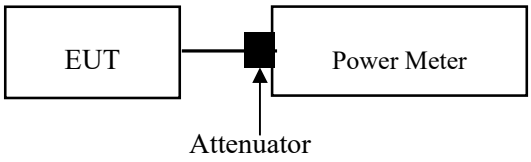

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW ≥ 3×RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.
   Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.
   Report the three highest emissions relative to the limit.

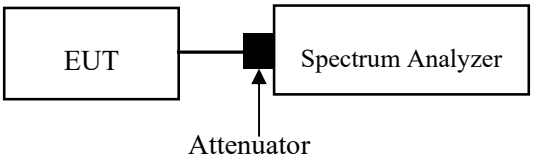

Power Spectral Density

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: 3kHz≤ RBW≤100 kHz.
2. Set the VBW ≥ 3×RBW.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

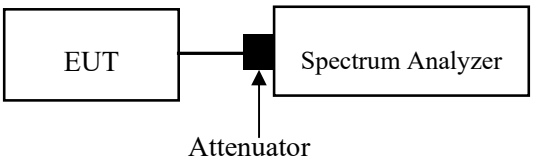

Note: A short RF cable with low cable loss connected to the EUT antenna port,which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

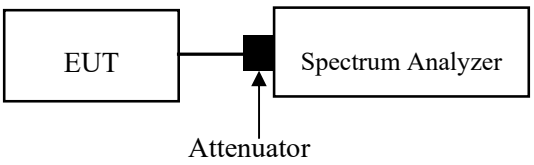

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain# is 1.23dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant

TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	26	**Relative Humidity (%)**	46
ATM Pressure (kPa)	101	**Test engineer**	Macy shi
Test date	2025.2.14		
EUT operation mode	Transmitting (Maximum output power mode, 802.11b Middle Channel)		

AC 120V 60 Hz, Line

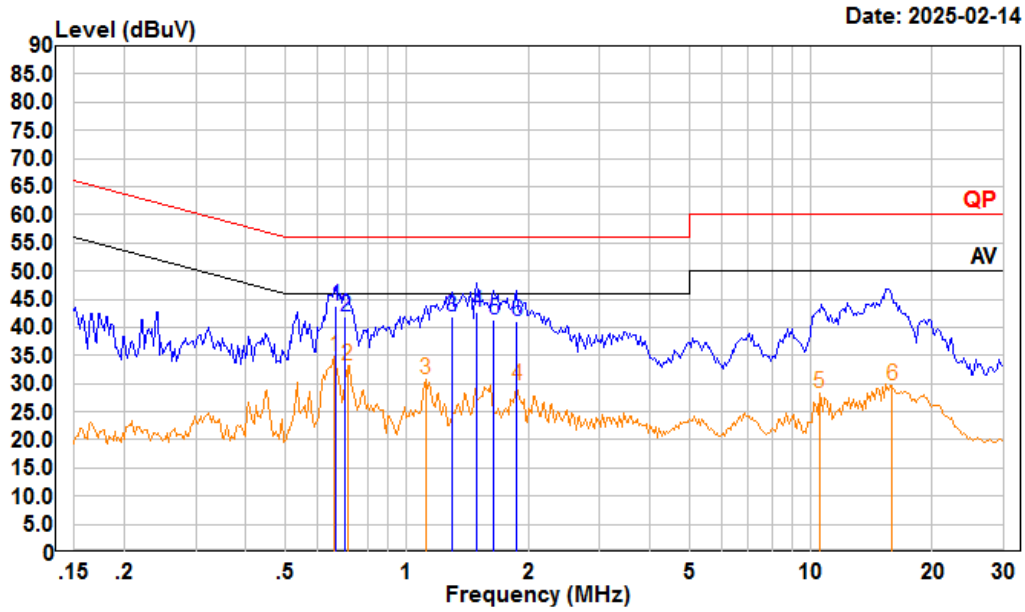

Trace: 1

Condition: Line
Project : 2401W89040E-RF
tester : Macy.shi Note:Transmitting
Setting : RBW:9kHz VBW:30KHz Detector Peak/AV

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.668	22.91	43.89	10.84	10.14	56.00	-12.11	QP
2	0.705	20.80	41.84	10.89	10.15	56.00	-14.16	QP
3	1.289	20.90	41.83	10.78	10.15	56.00	-14.17	QP
4	1.495	21.60	42.65	10.89	10.16	56.00	-13.35	QP
5	1.645	20.10	41.23	10.96	10.17	56.00	-14.77	QP
6	1.868	19.80	41.03	11.05	10.18	56.00	-14.97	QP

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.661	13.78	34.75	10.83	10.14	46.00	-11.25	Average
2	0.712	12.09	33.13	10.89	10.15	46.00	-12.87	Average
3	1.111	9.98	30.79	10.68	10.13	46.00	-15.21	Average
4	1.868	8.32	29.55	11.05	10.18	46.00	-16.45	Average
5	10.508	7.73	28.24	10.30	10.21	50.00	-21.76	Average
6	15.885	8.99	29.64	10.44	10.21	50.00	-20.36	Average

AC 120V 60 Hz, Neutral

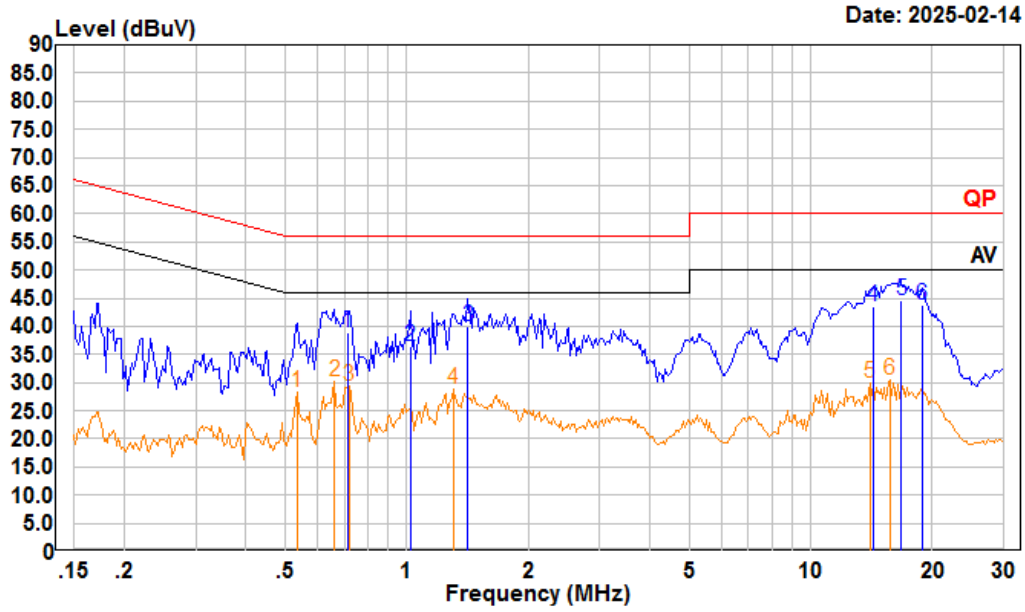

Trace: 1

Condition: Neutral
Project : 2401W89040E-RF
tester : Macy.shi Note:Transmitting
Setting : RBW:9kHz VBW:30KHz Detector Peak/AV

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.712	18.10	38.86	10.61	10.15	56.00	-17.14	QP
2	1.021	15.60	36.51	10.80	10.11	56.00	-19.49	QP
3	1.418	19.20	40.10	10.75	10.15	56.00	-15.90	QP
4	14.288	23.10	43.64	10.32	10.22	60.00	-16.36	QP
5	16.750	23.89	44.70	10.61	10.20	60.00	-15.30	QP
6	18.820	22.74	43.85	10.93	10.18	60.00	-16.15	QP

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.535	7.56	28.21	10.52	10.13	46.00	-17.79	Average
2	0.661	9.37	30.09	10.58	10.14	46.00	-15.91	Average
3	0.720	8.61	29.37	10.62	10.14	46.00	-16.63	Average
4	1.303	7.91	28.82	10.76	10.15	46.00	-17.18	Average
5	13.989	9.50	30.05	10.33	10.22	50.00	-19.95	Average
6	15.718	9.75	30.39	10.43	10.21	50.00	-19.61	Average

Spurious Emissions

Environmental Conditions

Temperature (°C)	25.2&24.2	**Relative Humidity (%)**	45&50.1
ATM Pressure (kPa):	101.3	**Test engineer:**	Jack Liu&Zenos Qiao
Test date:	2025.01.15~2025.1.26		
EUT operation mode:	Below 1GHz: Transmitting (Maximum output power mode, 802.11b Middle Channel) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:

9kHz-150kHz

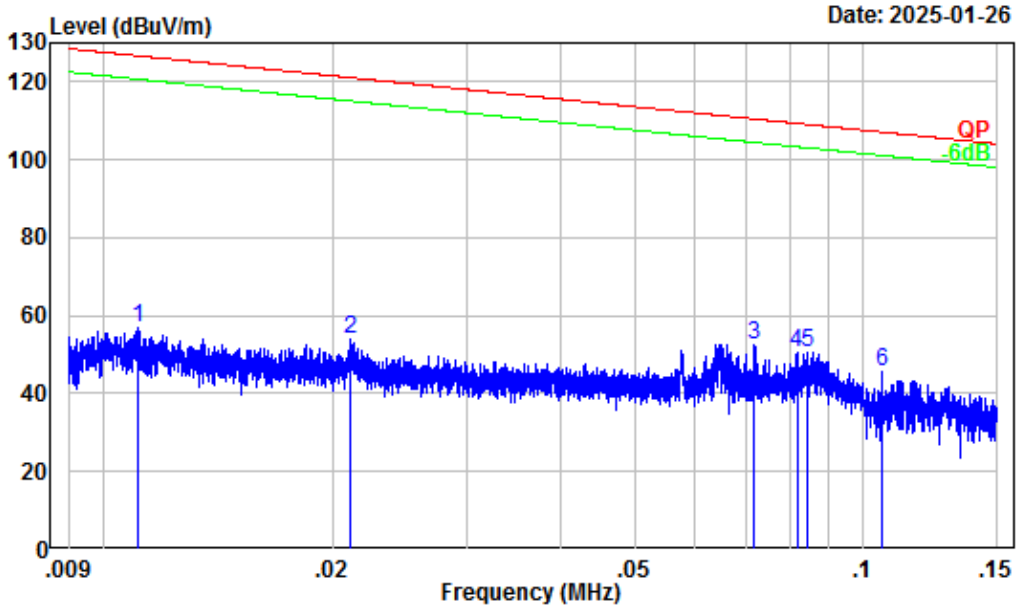

Site : Chamber A
Condition : 3m
Project Number : 2401W89040E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.09	25.00	57.09	126.68	-69.59	Peak
2	0.02	30.18	23.93	54.11	121.09	-66.98	Peak
3	0.07	24.22	28.30	52.52	110.48	-57.96	Peak
4	0.08	23.28	27.41	50.69	109.35	-58.66	Peak
5	0.08	23.10	27.43	50.53	109.09	-58.56	Peak
6	0.11	21.65	24.07	45.72	107.11	-61.39	Peak

150kHz-30MHz

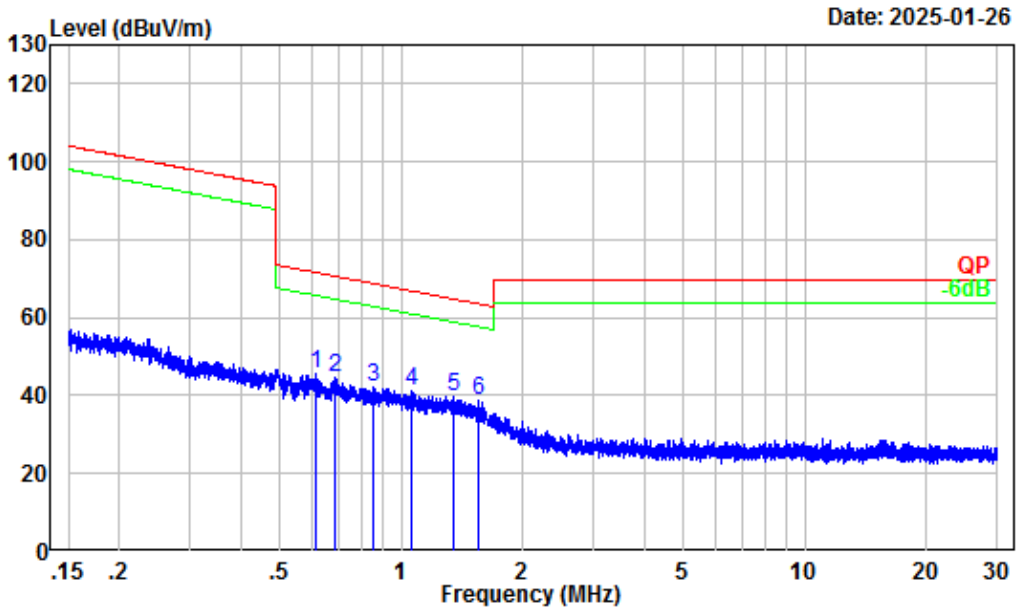

Site : Chamber A
Condition : 3m
Project Number : 2401W89040E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.62	4.95	40.44	45.39	71.75	-26.36	Peak
2	0.69	4.09	40.39	44.48	70.80	-26.32	Peak
3	0.86	2.28	39.76	42.04	68.85	-26.81	Peak
4	1.07	1.01	40.10	41.11	66.90	-25.79	Peak
5	1.34	0.24	39.67	39.91	64.86	-24.95	Peak
6	1.56	-0.37	39.21	38.84	63.52	-24.68	Peak

30MHz-1GHz_Horizontal

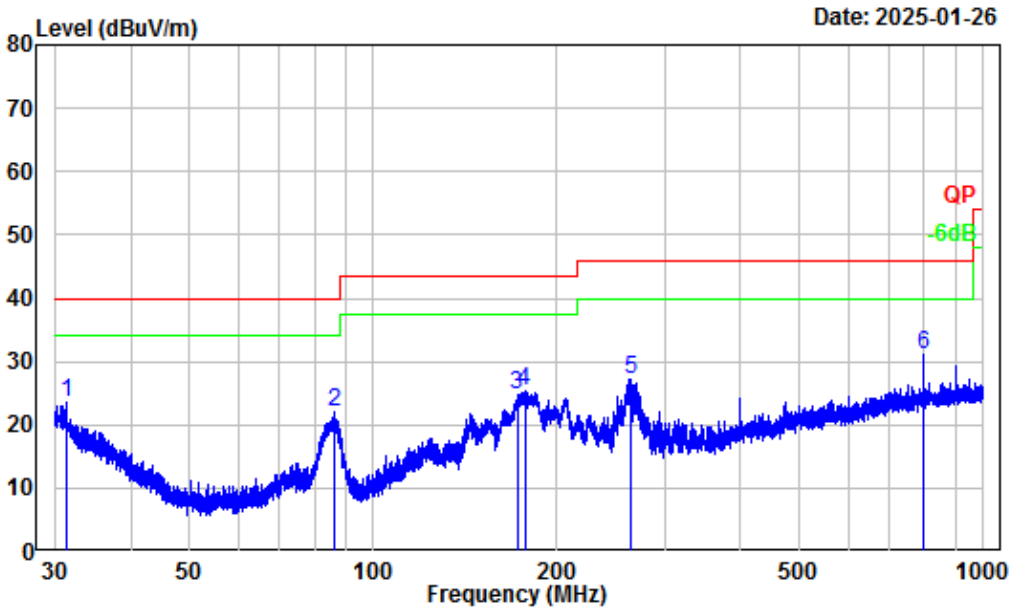

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401W89040E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.30	-6.65	30.14	23.49	40.00	-16.51	Peak
2	86.16	-18.08	40.12	22.04	40.00	-17.96	Peak
3	171.99	-13.19	38.09	24.90	43.50	-18.60	Peak
4	177.04	-13.46	38.79	25.33	43.50	-18.17	Peak
5	264.51	-12.31	39.60	27.29	46.00	-18.71	Peak
6	800.03	-2.14	33.25	31.11	46.00	-14.89	Peak

30MHz-1GHz_Vertical

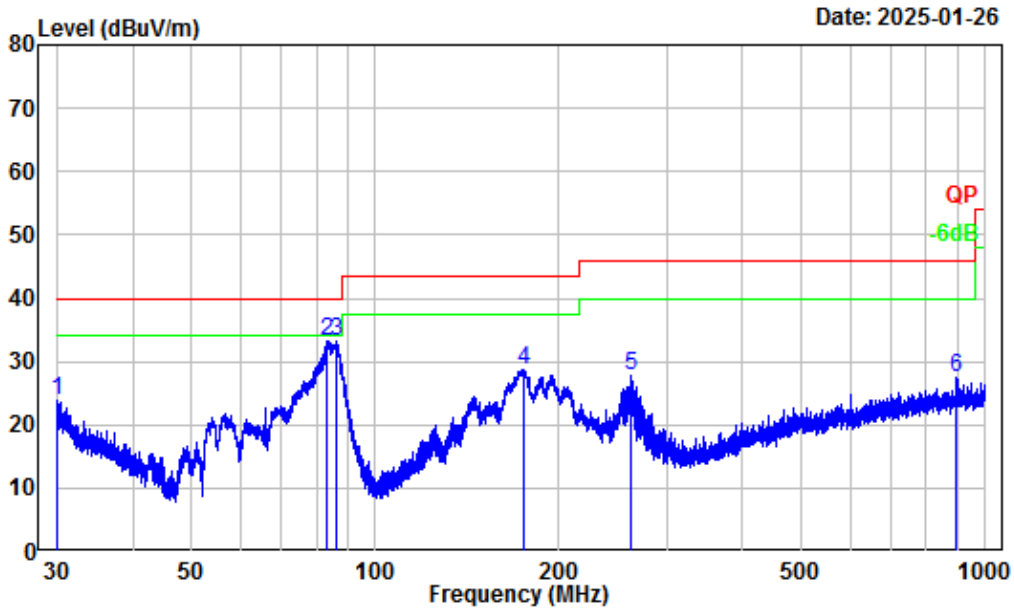

Site : Chamber A
Condition : 3m Vertical
Project Number : 2401W89040E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.07	-5.99	29.76	23.77	40.00	-16.23	Peak
2	83.34	-18.09	51.43	33.34	40.00	-6.66	Peak
3	86.24	-18.08	51.19	33.11	40.00	-6.89	Peak
4	174.96	-13.38	42.13	28.75	43.50	-14.75	Peak
5	261.86	-12.58	40.41	27.83	46.00	-18.17	Peak
6	898.57	-1.31	28.74	27.43	46.00	-18.57	Peak

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/Ave					
802.11b							
Low Channel							
4824	59.42	PK	H	-7.75	51.67	74	-22.33
4824	57.03	AV	H	-7.75	49.28	54	-4.72
4824	60.97	PK	V	-7.75	53.22	74	-20.78
4824	57.86	AV	V	-7.75	50.11	54	-3.89
Middle Channel							
4874	60.38	PK	H	-7.61	52.77	74	-21.23
4874	57.54	AV	H	-7.61	49.93	54	-4.07
4874	61.87	PK	V	-7.61	54.26	74	-19.74
4874	58.32	AV	V	-7.61	50.71	54	-3.29
High Channel							
4924	58.51	PK	H	-7.57	50.94	74	-23.06
4924	56.15	AV	H	-7.57	48.58	54	-5.42
4924	59.89	PK	V	-7.57	52.32	74	-21.68
4924	56.96	AV	V	-7.57	49.39	54	-4.61
802.11g							
Low Channel							
4824	54.54	PK	H	-7.75	46.79	74	-27.21
4824	41.12	AV	H	-7.75	33.37	54	-20.63
4824	55.78	PK	V	-7.75	48.03	74	-25.97
4824	41.8	AV	V	-7.75	34.05	54	-19.95
Middle Channel							
4874	55.71	PK	H	-7.61	48.1	74	-25.9
4874	41.87	AV	H	-7.61	34.26	54	-19.74
4874	56.96	PK	V	-7.61	49.35	74	-24.65
4874	42.54	AV	V	-7.61	34.93	54	-19.07
High Channel							
4924	53.53	PK	H	-7.57	45.96	74	-28.04
4924	40.04	AV	H	-7.57	32.47	54	-21.53
4924	54.75	PK	V	-7.57	47.18	74	-26.82
4924	40.69	AV	V	-7.57	33.12	54	-20.88

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/Ave					
802.11n20							
Low Channel							
4824	54.15	PK	H	-7.75	46.4	74	-27.6
4824	40.57	AV	H	-7.75	32.82	54	-21.18
4824	55.36	PK	V	-7.75	47.61	74	-26.39
4824	41.22	AV	V	-7.75	33.47	54	-20.53
Middle Channel							
4874	55.38	PK	H	-7.61	47.77	74	-26.23
4874	41.63	AV	H	-7.61	34.02	54	-19.98
4874	56.59	PK	V	-7.61	48.98	74	-25.02
4874	42.25	AV	V	-7.61	34.64	54	-19.36
High Channel							
4924	53.4	PK	H	-7.57	45.83	74	-28.17
4924	39.91	AV	H	-7.57	32.34	54	-21.66
4924	54.62	PK	V	-7.57	47.05	74	-26.95
4924	40.54	AV	V	-7.57	32.97	54	-21.03

Note:
Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Corrected. Amplitude - Limit
The other spurious emission which is in the noise floor level was not recorded.

Test plots

Left Band edge_Horizontal 2.4G Wi-Fi-b-2412MHz

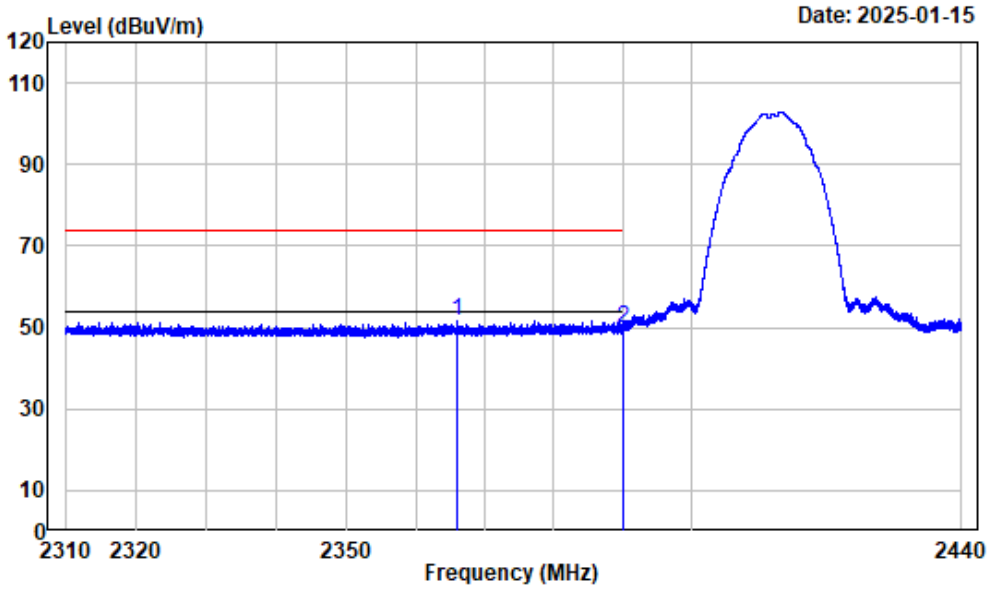


```
Condition        : Horizontal
Project No.      : 2401W89040E-RF
Tester           : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note             : 2.4GWiFi-b-2412
```

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2366.021	-10.92	62.43	51.51	74.00	-22.49	Peak
2	2390.000	-10.98	60.98	50.00	74.00	-24.00	Peak

Left Band edge_Vertical 2.4G Wi-Fi-b-2412MHz

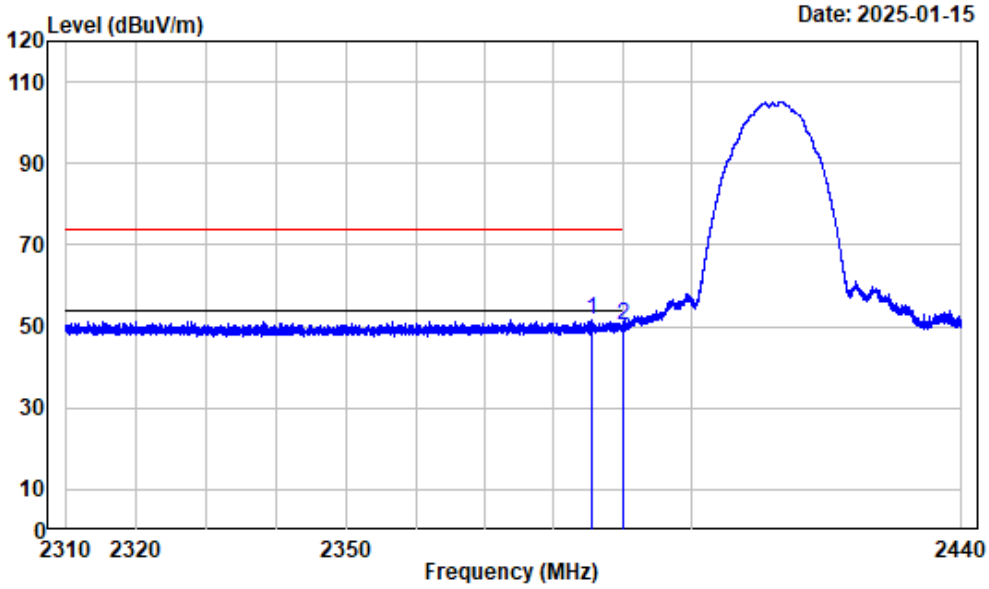

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2385.637	-10.97	62.49	51.52	74.00	-22.48	Peak
2	2390.000	-10.98	61.09	50.11	74.00	-23.89	Peak

Right Band edge_Horizontal _Peak 2.4G Wi-Fi-b-2462MHz

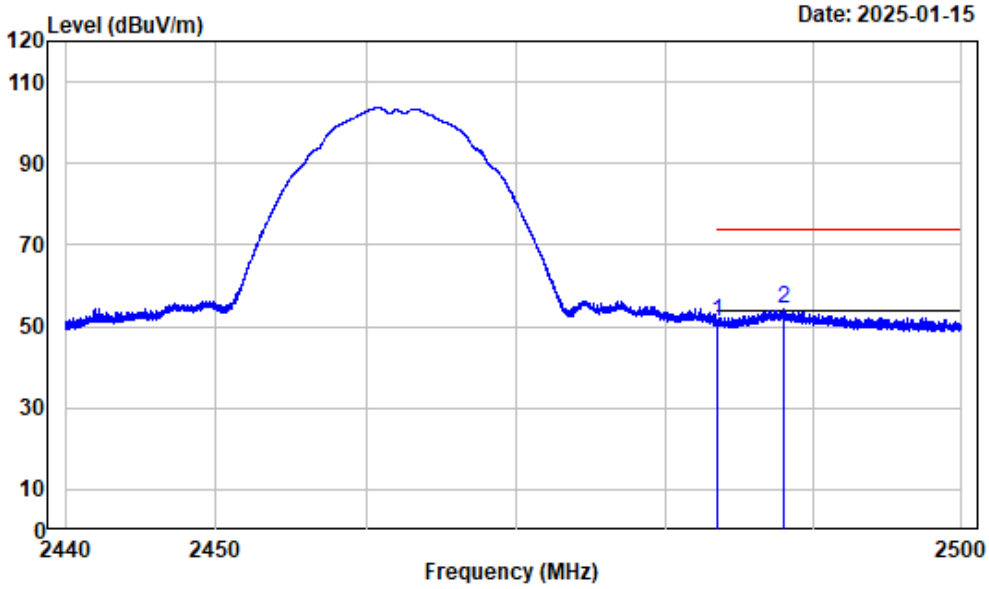

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	62.07	51.10	74.00	-22.90	Peak
2	2487.976	-10.98	65.34	54.36	74.00	-19.64	Peak

Right Band edge_Horizontal_Average 2.4G Wi-Fi-b-2462MHz

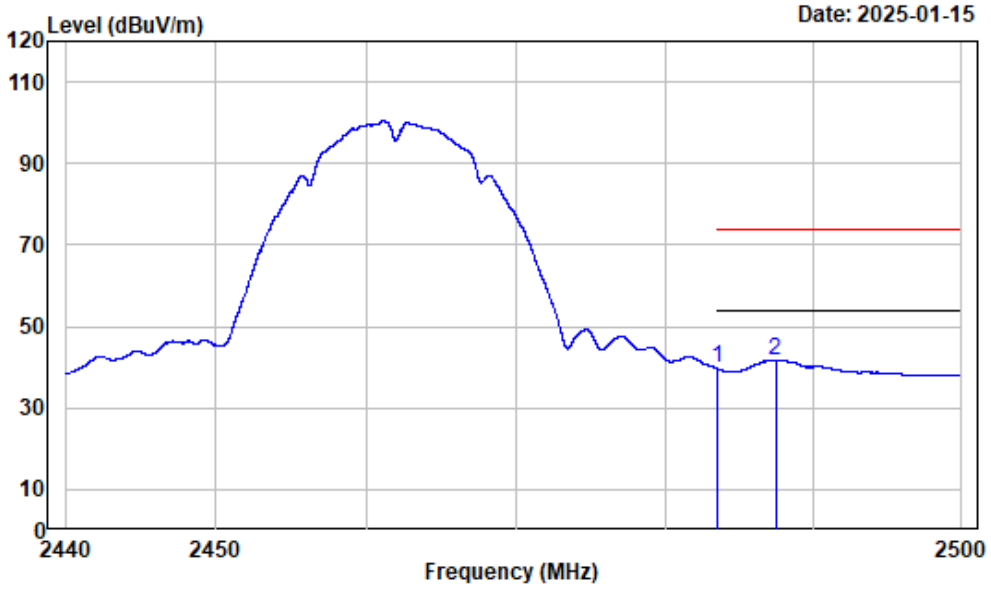

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	50.60	39.63	54.00	-14.37	Average
2	2487.428	-10.97	52.76	41.79	54.00	-12.21	Average

Right Band edge_Vertical 2.4G Wi-Fi-b-2462MHz

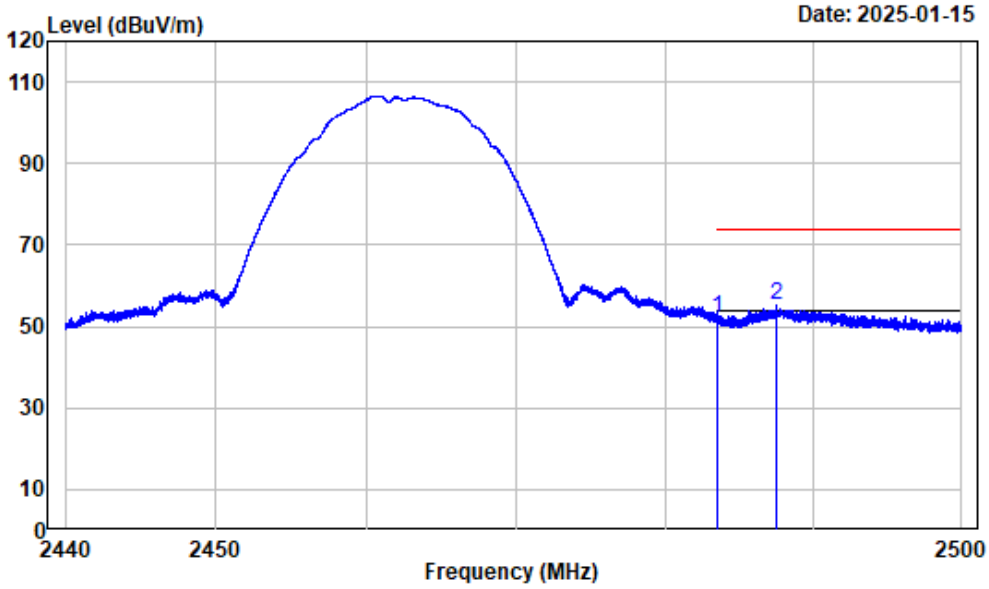

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	63.06	52.09	74.00	-21.91	Peak
2	2487.443	-10.97	66.30	55.33	74.00	-18.67	Peak

Right Band edge_Vertical_Average2.4G Wi-Fi-b-2462MHz

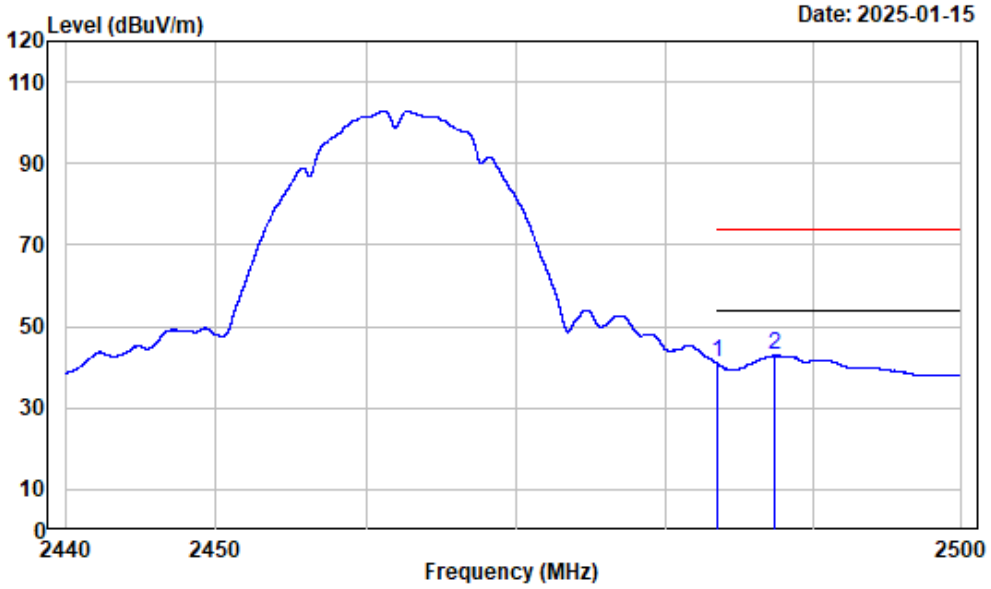

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	51.96	40.99	54.00	-13.01	Average
2	2487.384	-10.97	53.78	42.81	54.00	-11.19	Average

Left Band edge_Horizontal 2.4G Wi-Fi-g-2412MHz

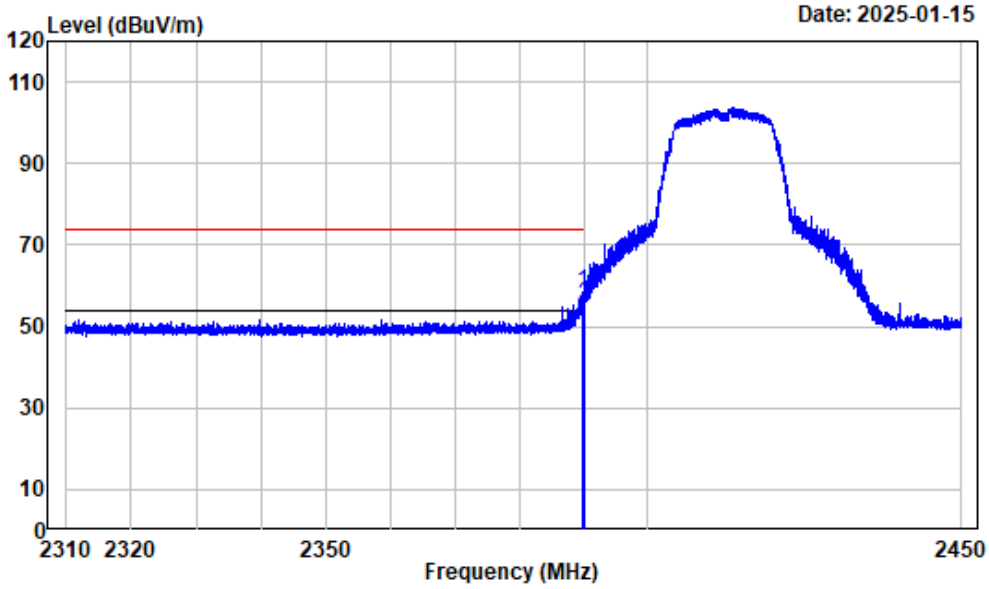

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.775	-10.98	69.47	58.49	74.00	-15.51	Peak
2	2390.000	-10.98	66.30	55.32	74.00	-18.68	Peak

Left Band edge_Horizontal_Average 2.4G Wi-Fi-g-2412MHz

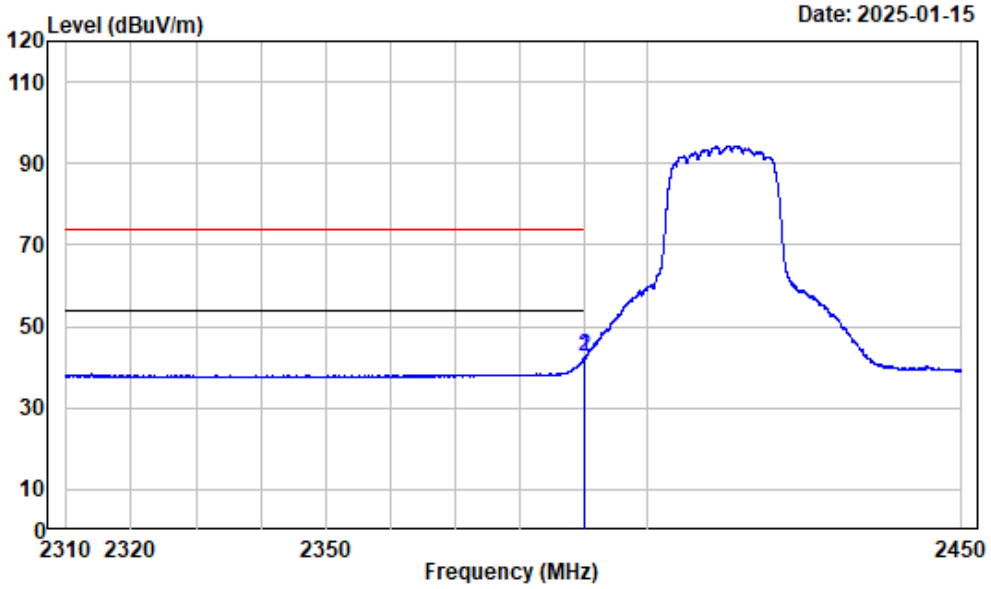

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.985	-10.98	53.48	42.50	54.00	-11.50	Average
2	2390.000	-10.98	53.36	42.38	54.00	-11.62	Average

Left Band edge_Vertical 2.4G Wi-Fi-g-2412MHz

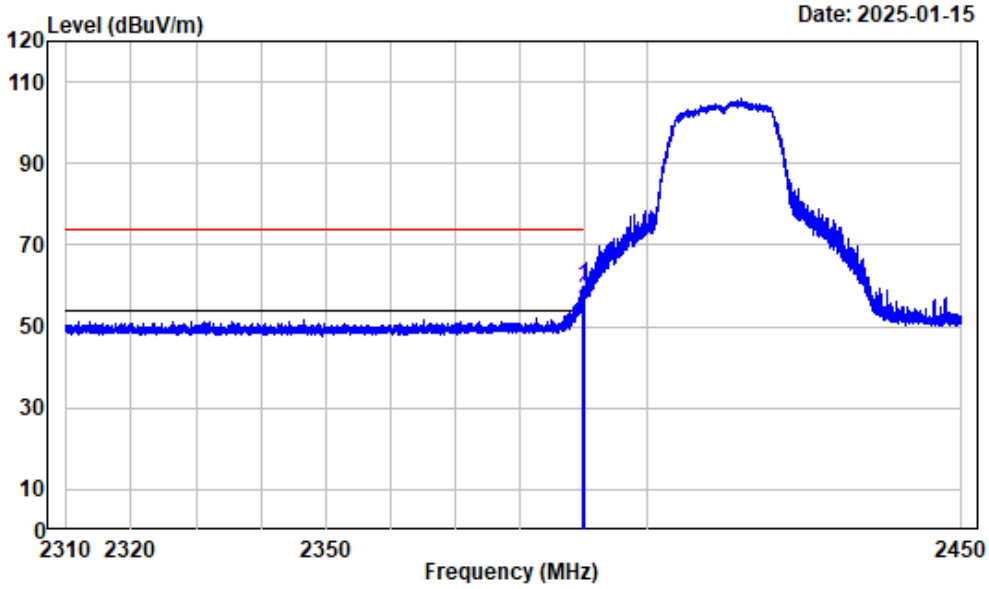

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.880	-10.98	70.85	59.87	74.00	-14.13	Peak
2	2390.000	-10.98	67.77	56.79	74.00	-17.21	Peak

Left Band edge_Vertical_Average2.4G Wi-Fi-g-2412MHz

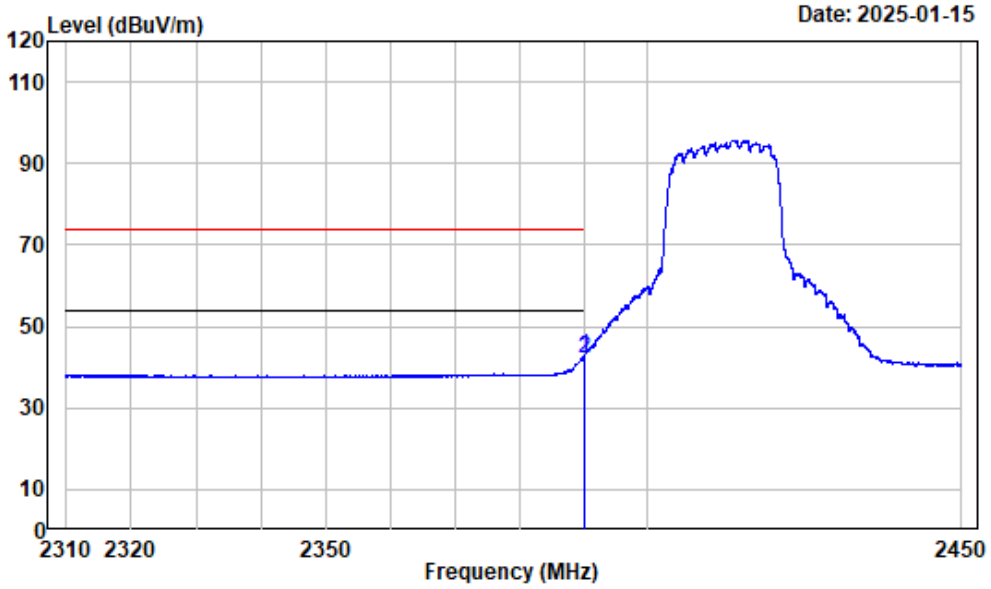

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	-10.98	53.47	42.49	54.00	-11.51	Average
2	2390.000	-10.98	53.26	42.28	54.00	-11.72	Average

Right Band edge_Horizontal _Peak 2.4G Wi-Fi-g-2462MHz

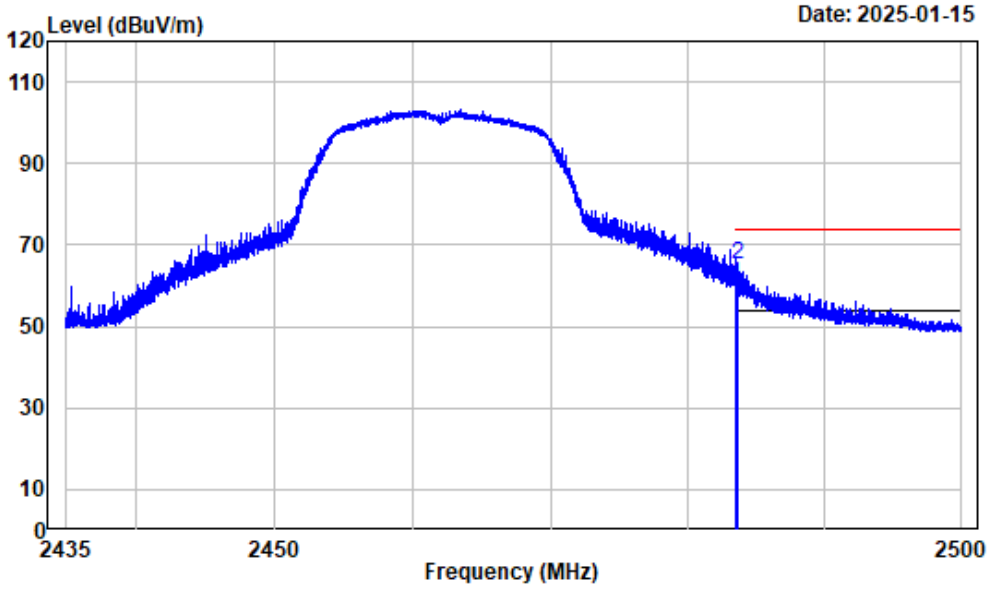

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	71.40	60.43	74.00	-13.57	Peak
2	2483.553	-10.97	76.35	65.38	74.00	-8.62	Peak

Right Band edge_Horizontal_Average 2.4G Wi-Fi-g-2462MHz

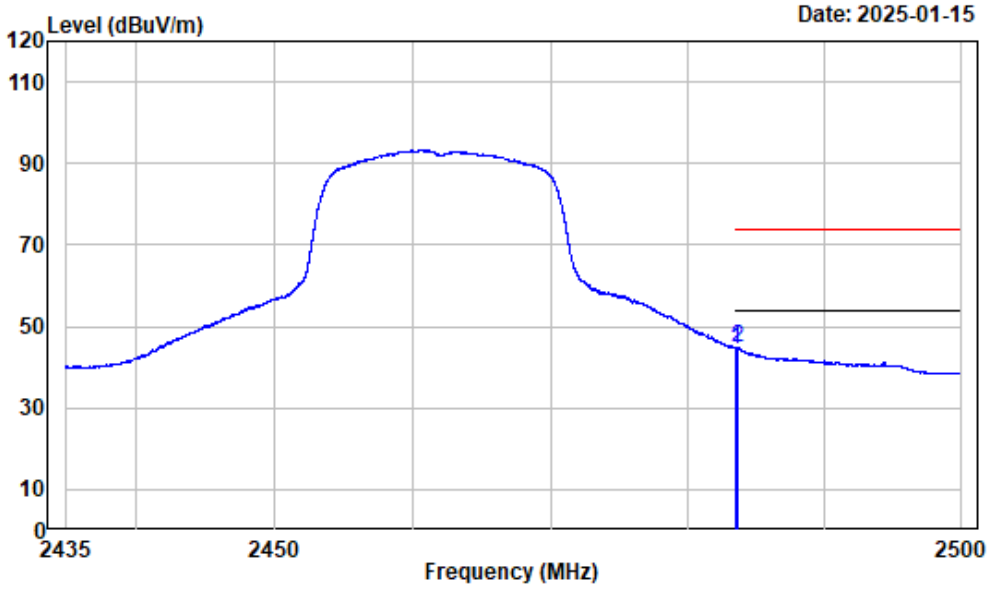

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	55.31	44.34	54.00	-9.66	Average
2	2483.553	-10.97	55.66	44.69	54.00	-9.31	Average

Right Band edge_Vertical 2.4G Wi-Fi-g-2462MHz

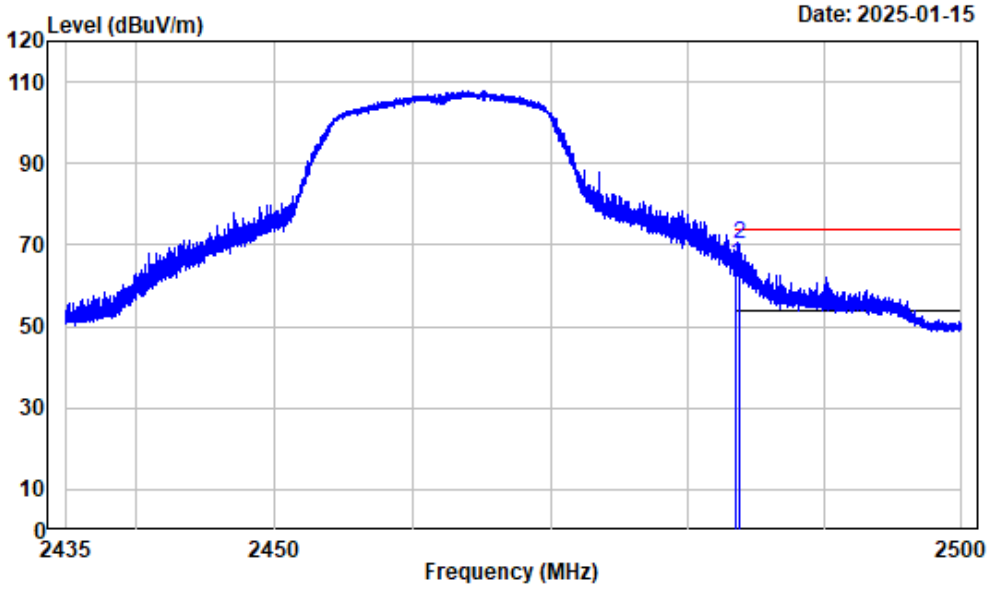

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	76.40	65.43	74.00	-8.57	Peak
2	2483.707	-10.97	81.14	70.17	74.00	-3.83	Peak

Right Band edge_Vertical_Average 2.4G Wi-Fi-g-2462MHz

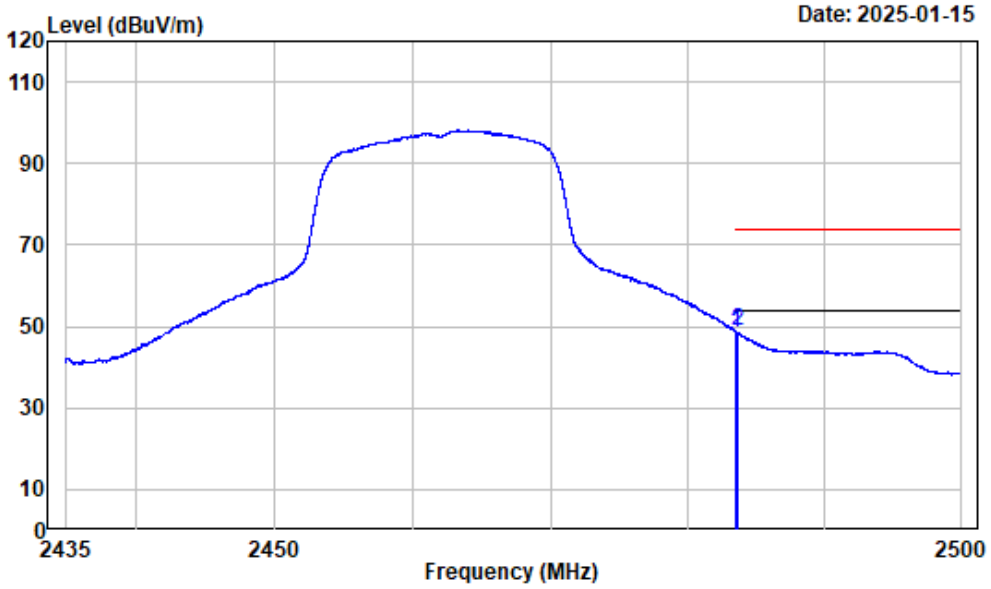

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	59.58	48.61	54.00	-5.39	Average
2	2483.626	-10.97	59.99	49.02	54.00	-4.98	Average

Left Band edge_Horizontal 2.4G Wi-Fi-n20-2412MHz

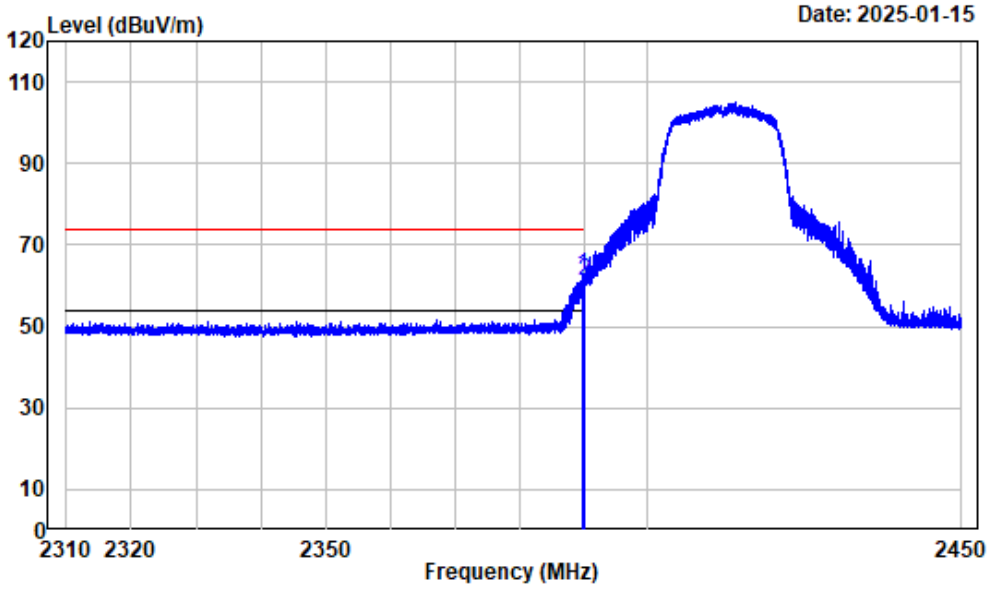

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.950	-10.98	73.34	62.36	74.00	-11.64	Peak
2	2390.000	-10.98	72.31	61.33	74.00	-12.67	Peak

Left Band edge_Horizontal_Average 2.4G Wi-Fi-n20-2412MHz

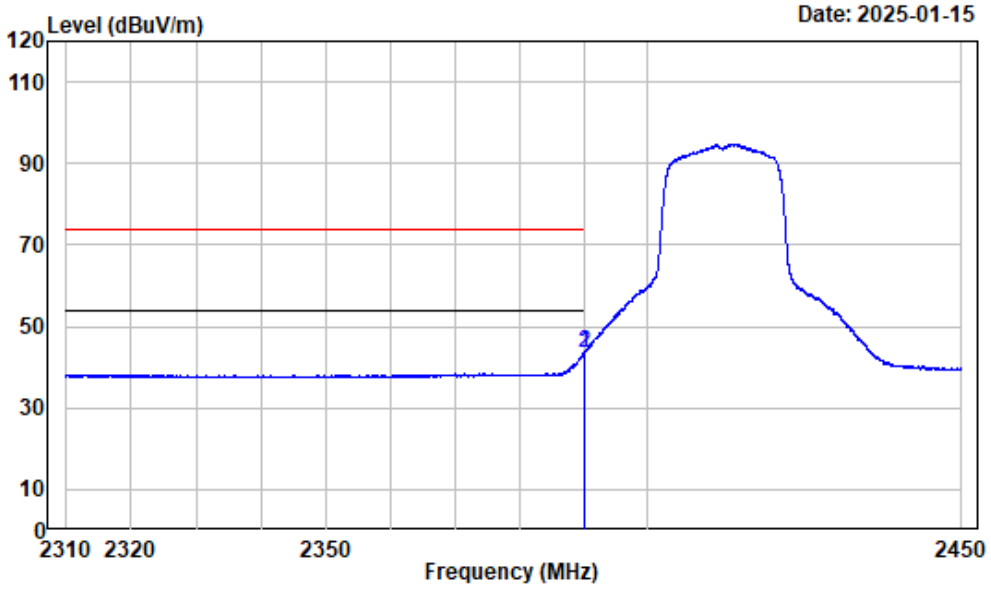

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.985	-10.98	54.54	43.56	54.00	-10.44	Average
2	2390.000	-10.98	54.43	43.45	54.00	-10.55	Average

Left Band edge_Vertical2.4G Wi-Fi-n20-2412MHz

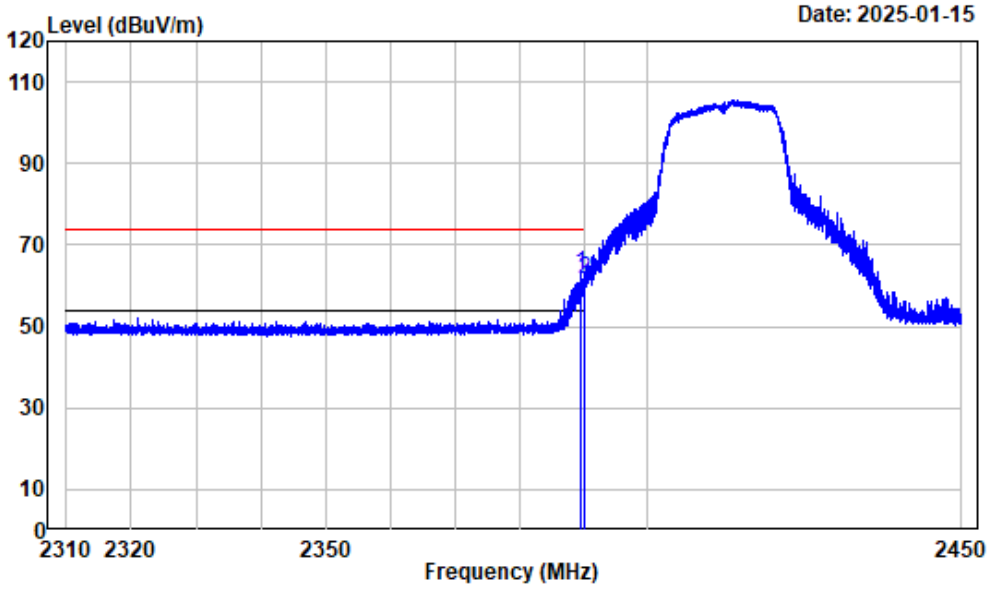

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.547	-10.98	74.08	63.10	74.00	-10.90	Peak
2	2390.000	-10.98	72.67	61.69	74.00	-12.31	Peak

Left Band edge_Vertical_Average2.4G Wi-Fi-n20-2412MHz

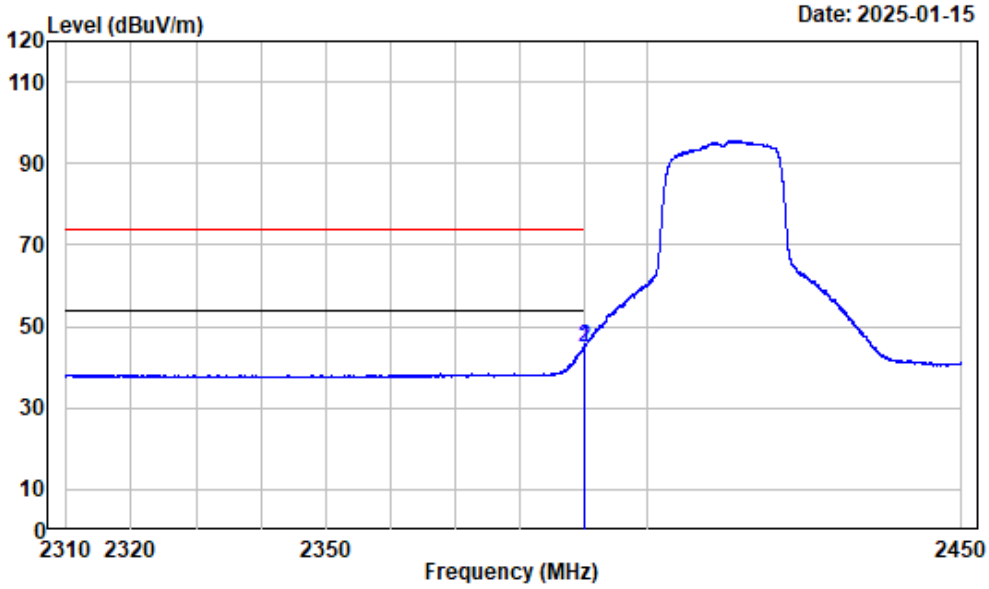

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.985	-10.98	55.81	44.83	54.00	-9.17	Average
2	2390.000	-10.98	55.66	44.68	54.00	-9.32	Average

Right Band edge_Horizontal _Peak 2.4G Wi-Fi-n20-2462MHz

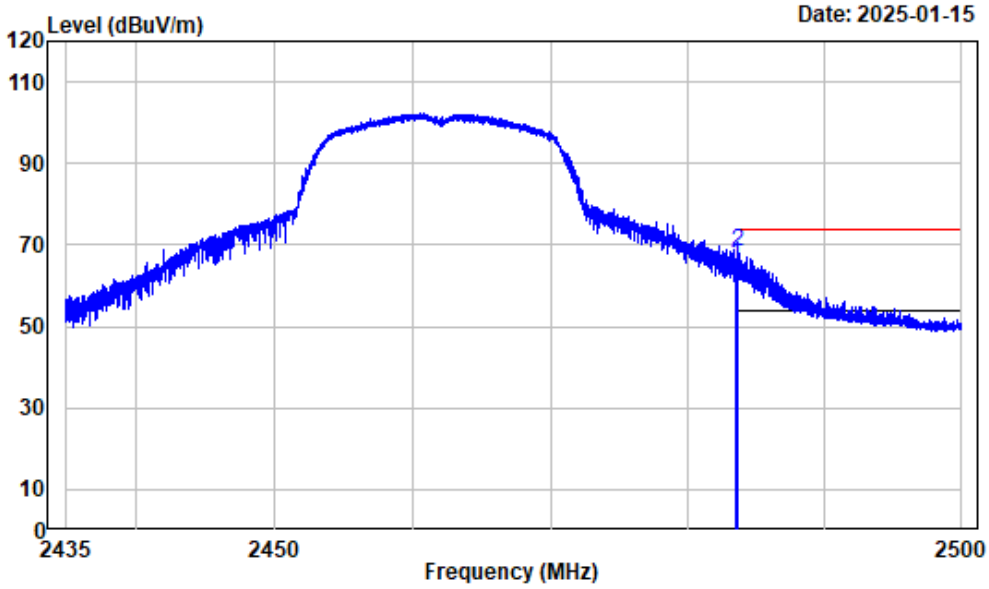

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	76.39	65.42	74.00	-8.58	Peak
2	2483.642	-10.97	79.43	68.46	74.00	-5.54	Peak

Right Band edge_Horizontal_Average 2.4G Wi-Fi-n20-2462MHz

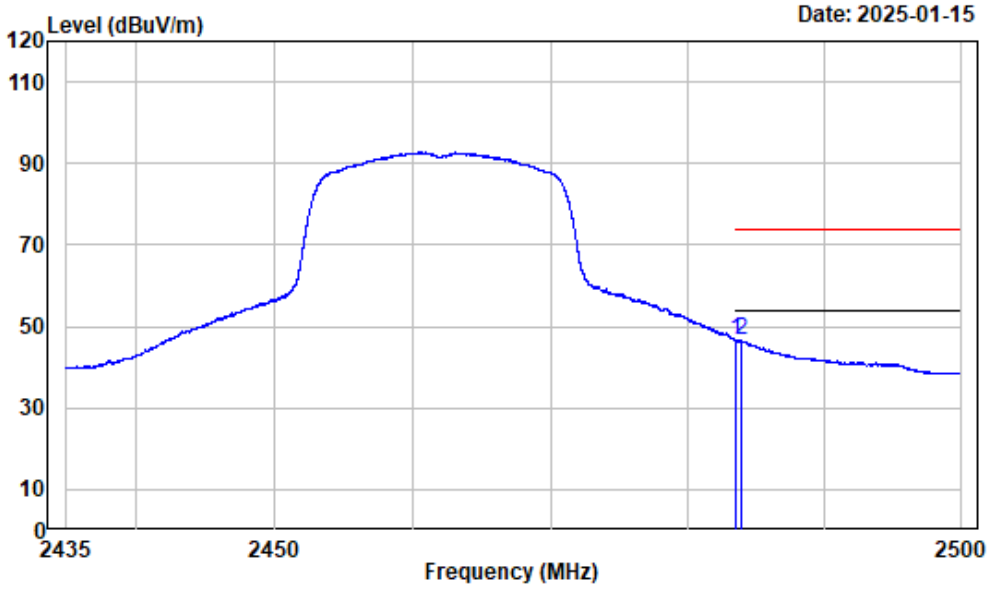

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	57.50	46.53	54.00	-7.47	Average
2	2483.886	-10.97	57.65	46.68	54.00	-7.32	Average

Right Band edge_Vertical 2.4G Wi-Fi-n20-2462MHz

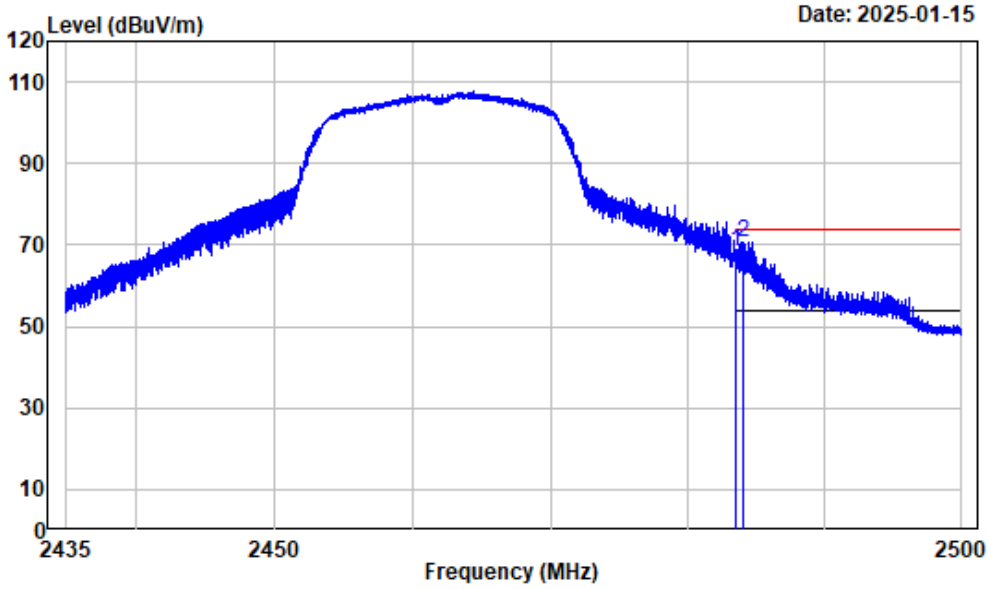

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	79.47	68.50	74.00	-5.50	Peak
2	2483.992	-10.97	81.76	70.79	74.00	-3.21	Peak

Right Band edge_Vertical_Average 2.4G Wi-Fi-n20-2462MHz

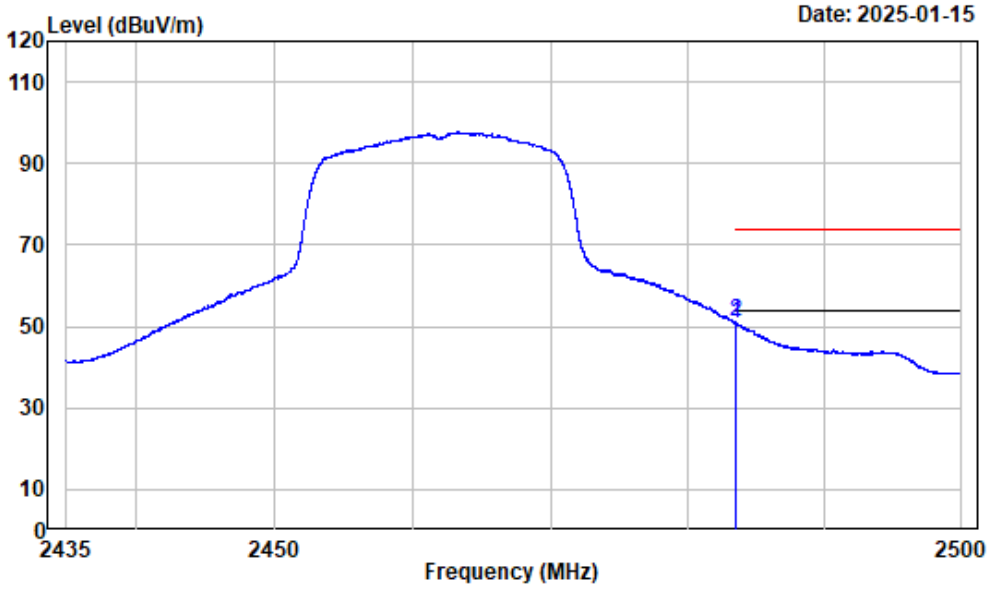

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	61.76	50.79	54.00	-3.21	Average
2	2483.524	-10.97	61.95	50.98	54.00	-3.02	Average

1-18GHz (Listed with the worst harmonic margin test plot)

1-4GHz_Horizontal 2.4G Wi-Fi-b-2437MHz

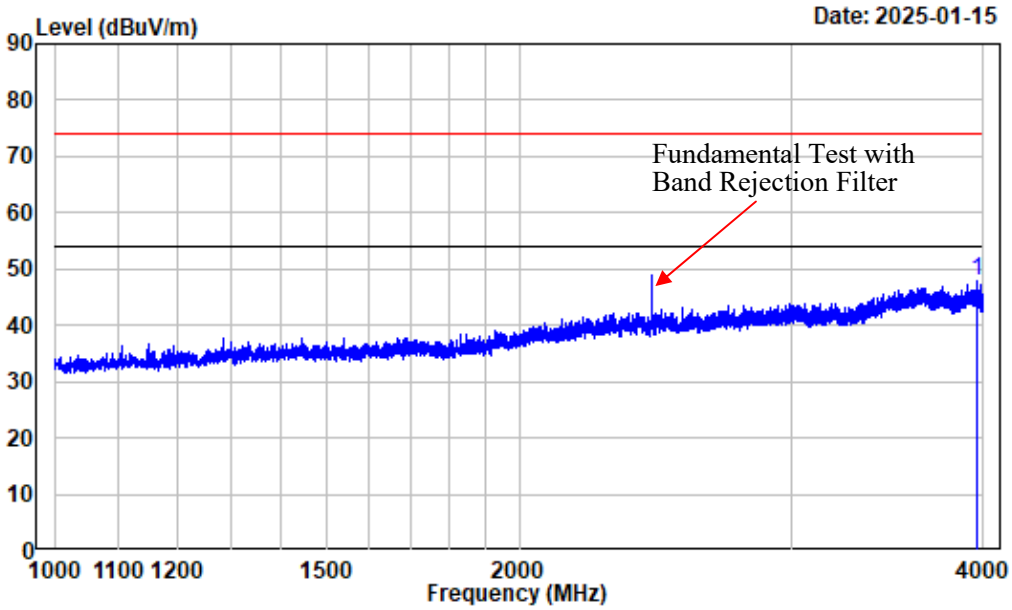

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3965.496	-9.30	57.03	47.73	74.00	-26.27	Peak

1-4GHz_Vertical 2.4G Wi-Fi-b-2437MHz

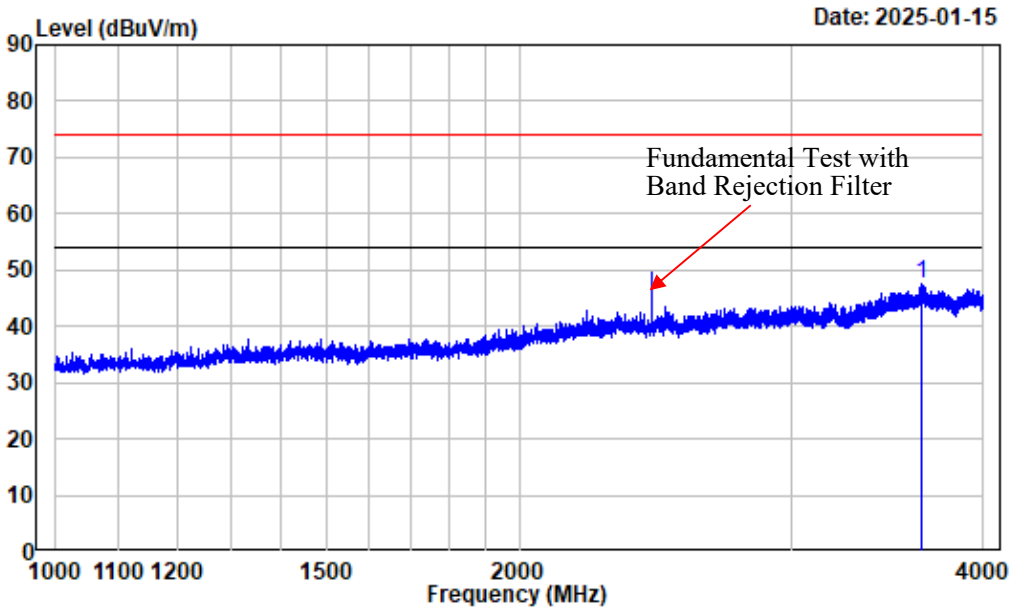

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3652.332	-9.76	57.35	47.59	74.00	-26.41	Peak

4-18GHz_Horizontal_Peak 2.4G Wi-Fi-b-2437MHz

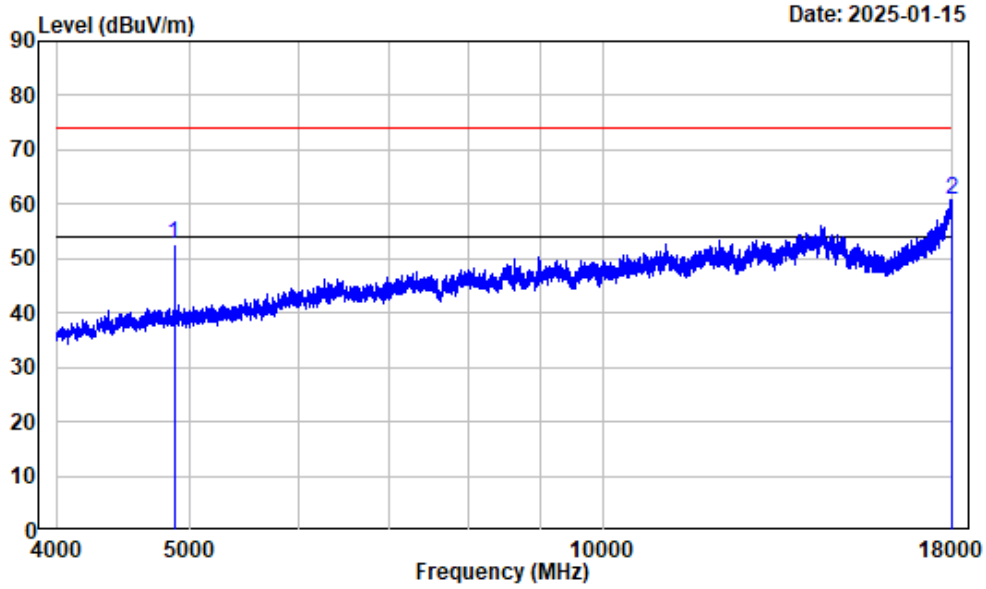

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	60.38	52.77	74.00	-21.23	Peak
2	17994.750	13.17	47.60	60.77	74.00	-13.23	Peak

4-18GHz_Horizontal_Average 2.4G Wi-Fi-b-2437MHz

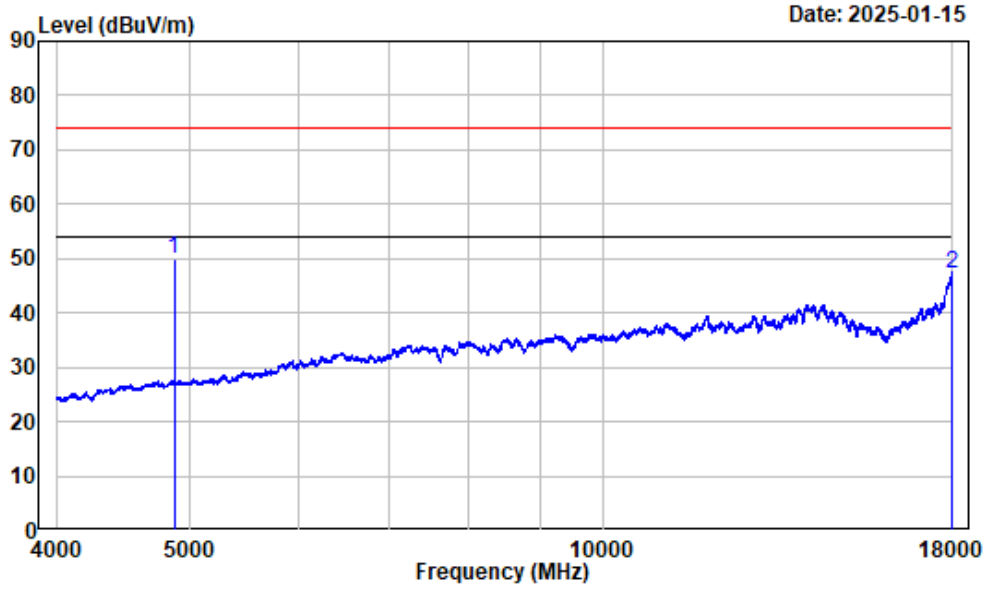

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	57.54	49.93	54.00	-4.07	Average
2	17996.500	13.19	34.07	47.26	54.00	-6.74	Average

4-18GHz_Vertical_Peak 2.4G Wi-Fi-b-2437MHz

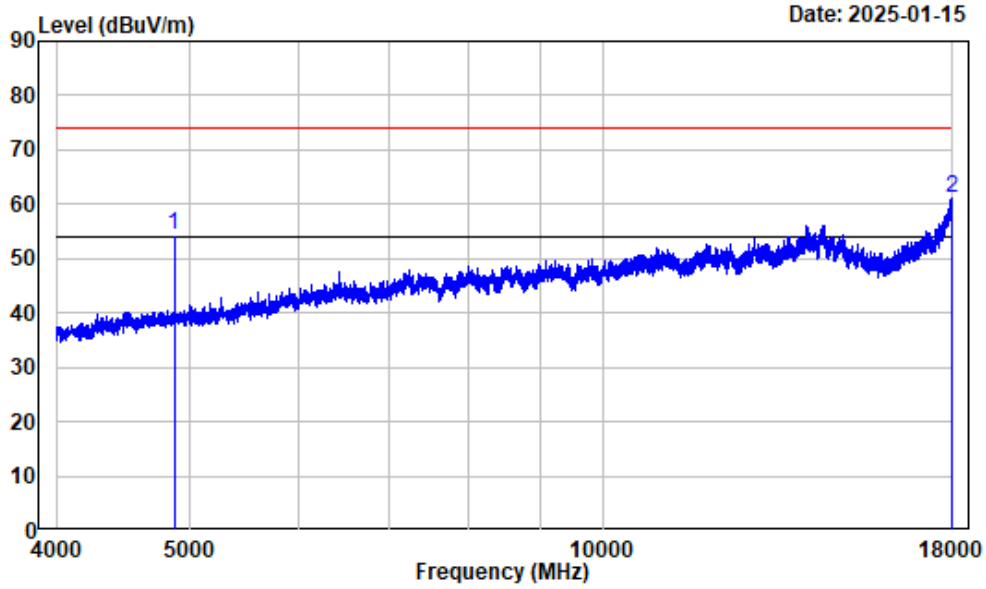

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	61.87	54.26	74.00	-19.74	Peak
2	17993.000	13.17	48.03	61.20	74.00	-12.80	Peak

4-18GHz_Vertical_Average2.4G Wi-Fi-b-2437MHz

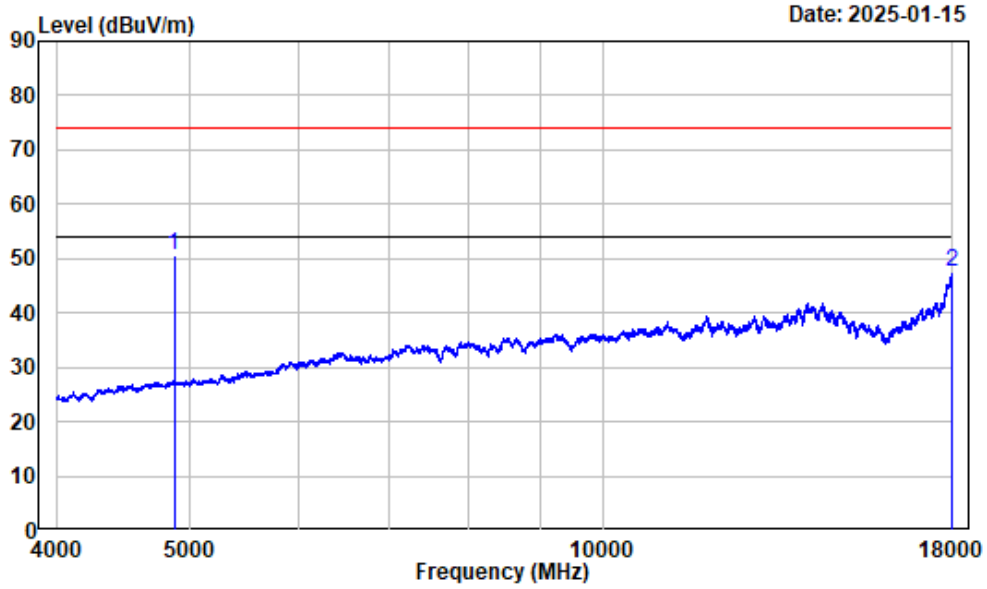

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	58.32	50.71	54.00	-3.29	Average
2	17993.000	13.17	34.25	47.42	54.00	-6.58	Average

1-4GHz_Horizontal 2.4G Wi-Fi-g-2437MHz

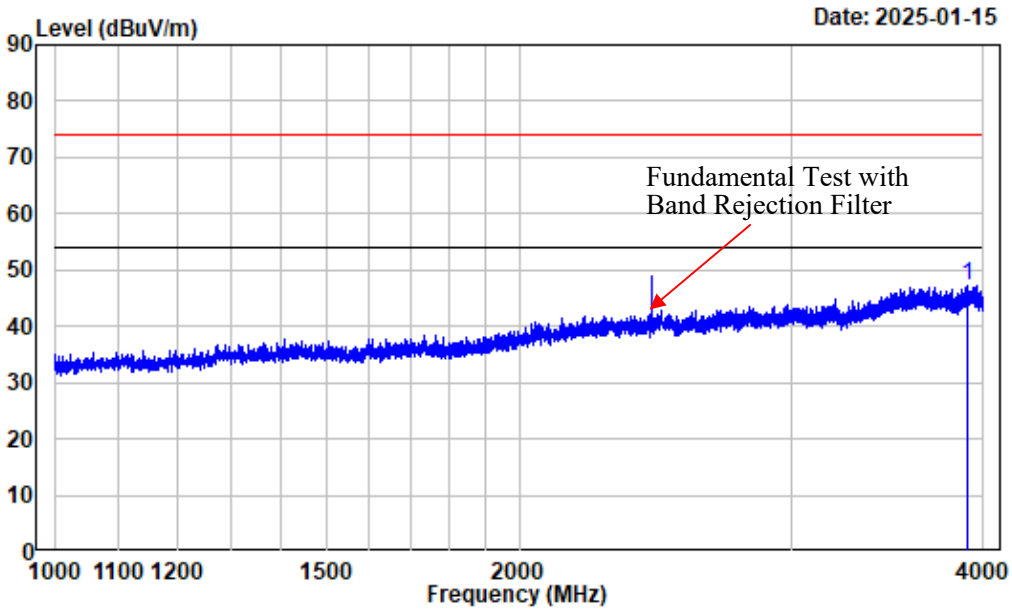

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3909.989	-9.73	56.96	47.23	74.00	-26.77	Peak

1-4GHz_Vertical 2.4G Wi-Fi-g-2437MHz

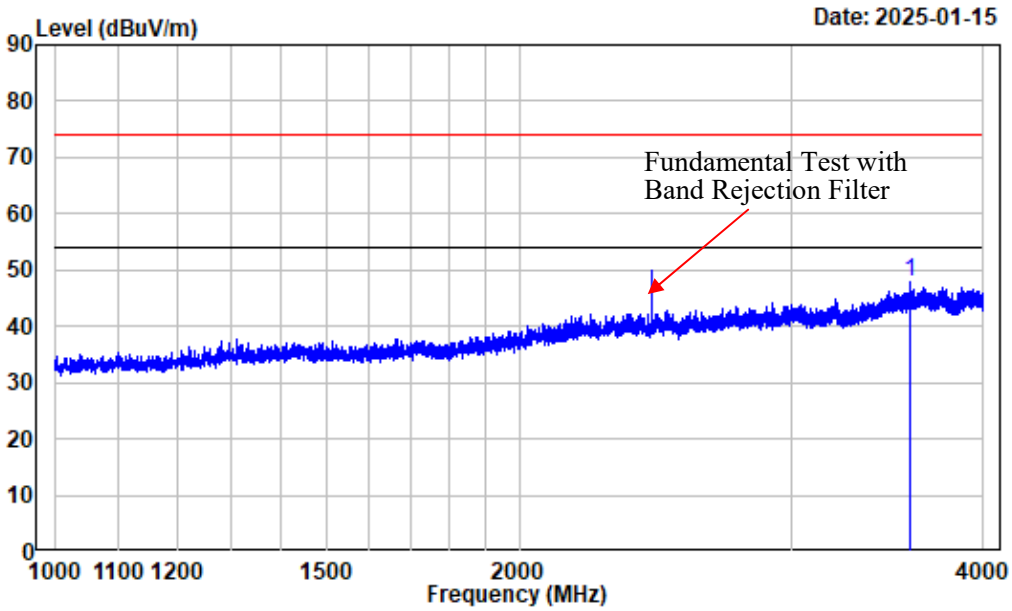

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3582.573	-10.02	58.03	48.01	74.00	-25.99	Peak

4-18GHz_Horizontal_Peak 2.4G Wi-Fi-g-2437MHz

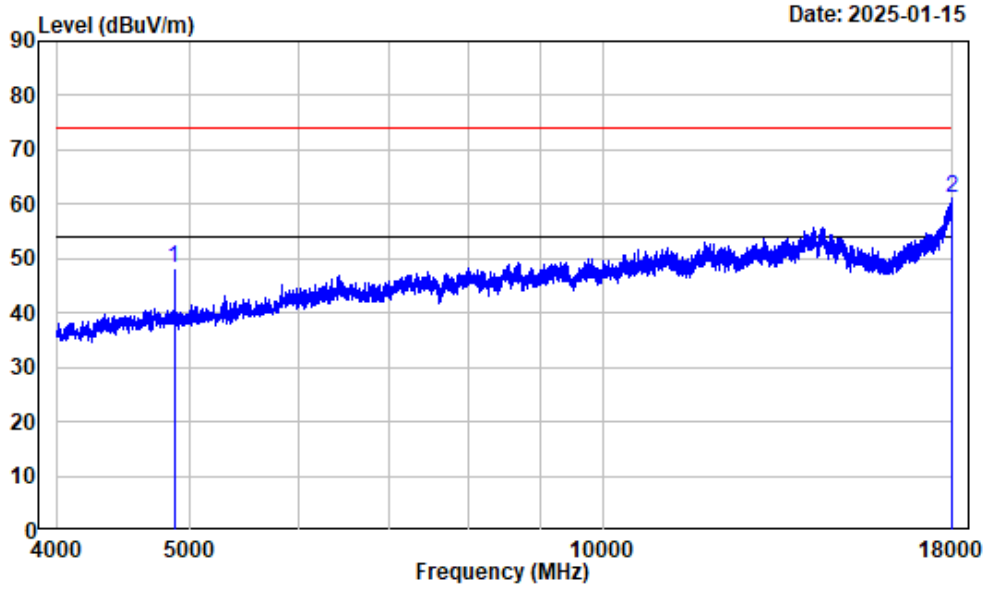

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	55.71	48.10	74.00	-25.90	Peak
2	17998.250	13.19	47.84	61.03	74.00	-12.97	Peak

4-18GHz_Horizontal_Average 2.4G Wi-Fi-g-2437MHz

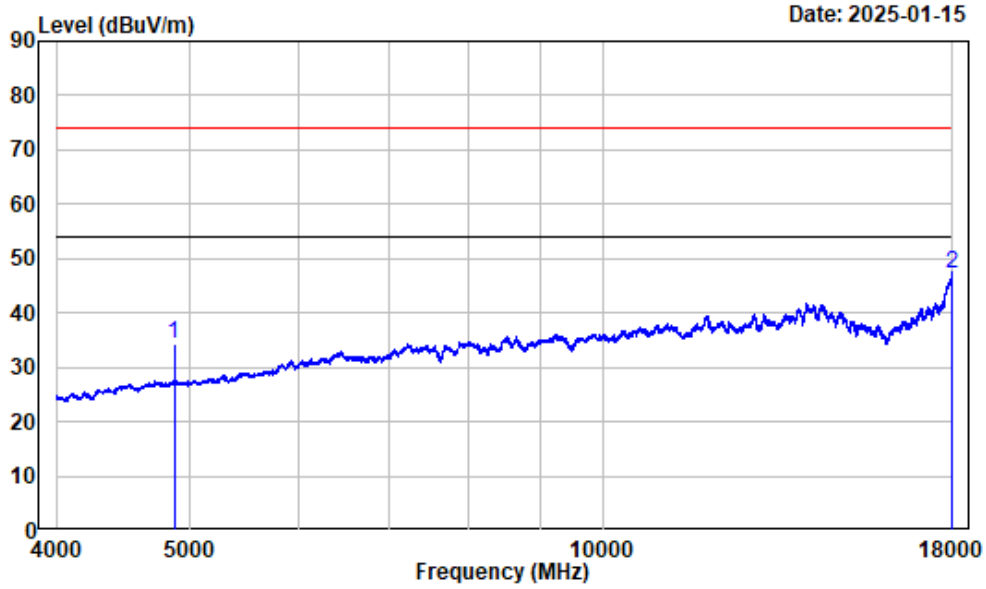

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	41.87	34.26	54.00	-19.74	Average
2	17994.750	13.17	34.16	47.33	54.00	-6.67	Average

4-18GHz_Vertical_Peak 2.4G Wi-Fi-g-2437MHz

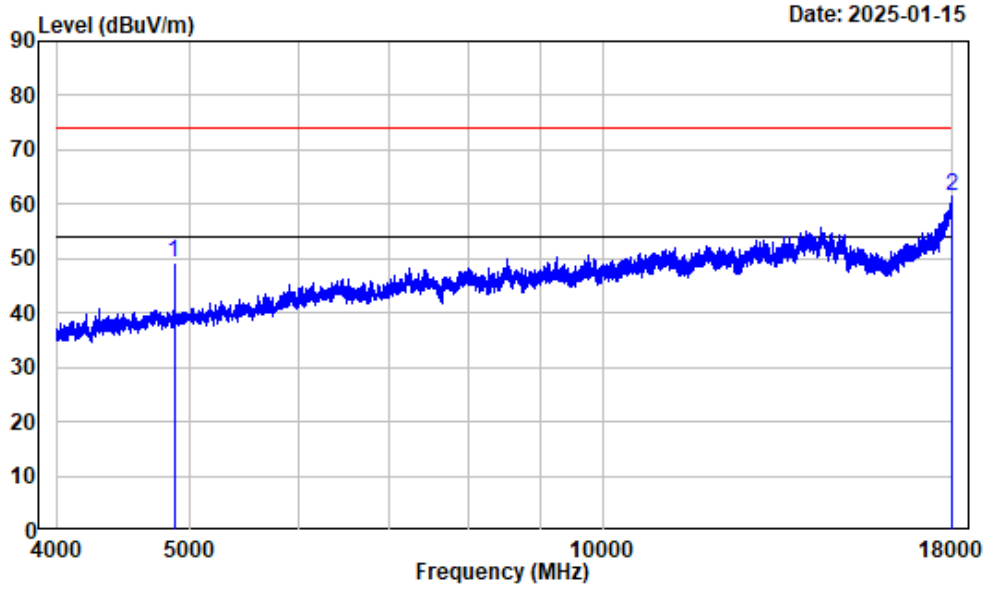

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	56.96	49.35	74.00	-24.65	Peak
2	17968.500	13.05	48.33	61.38	74.00	-12.62	Peak

4-18GHz_Vertical_Average2.4G Wi-Fi-g-2437MHz

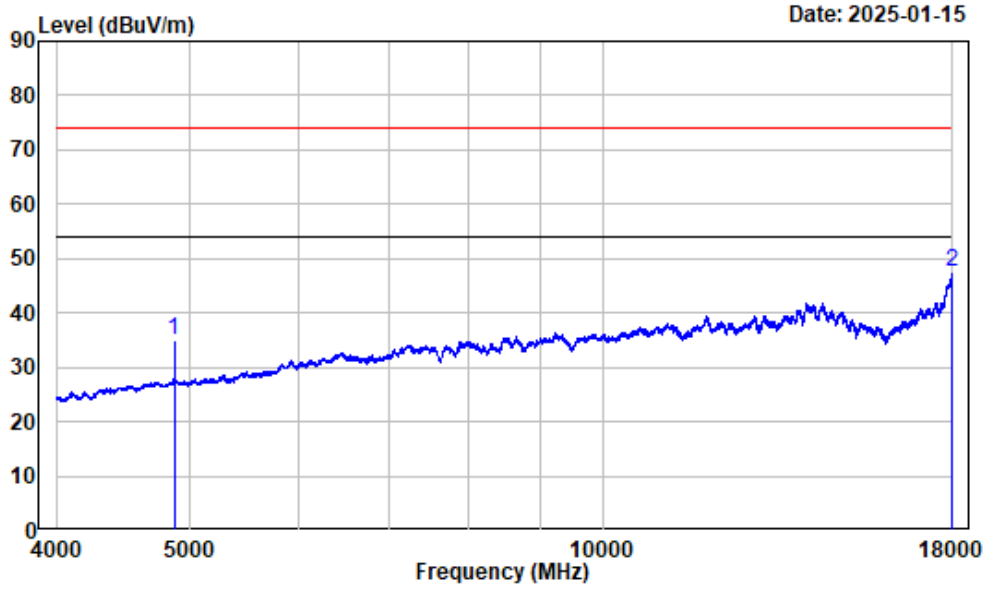

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-g-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	42.54	34.93	54.00	-19.07	Average
2	17987.750	13.13	34.33	47.46	54.00	-6.54	Average

1-4GHz_Vertical 2.4G Wi-Fi-n20-2437MHz

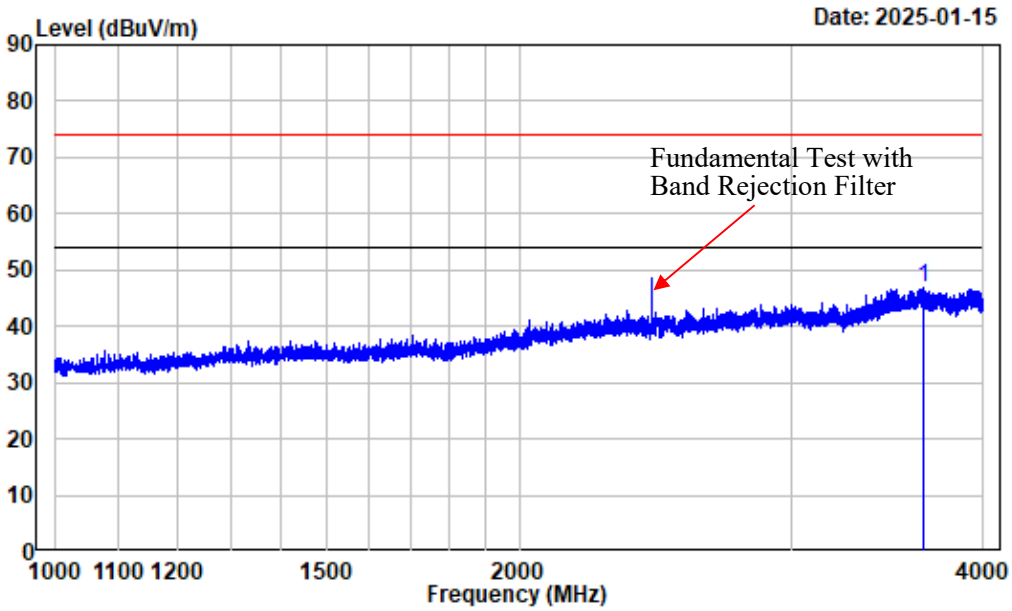

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3662.458	-9.71	56.48	46.77	74.00	-27.23	Peak

1-4GHz_Vertical 2.4G Wi-Fi-n20-2437MHz

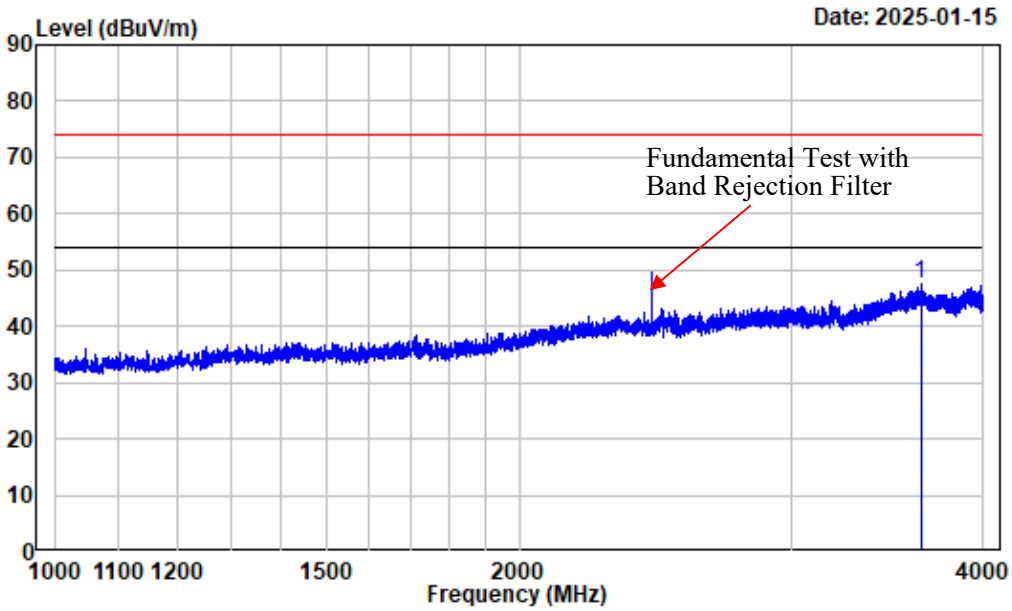

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3642.955	-9.83	57.51	47.68	74.00	-26.32	Peak

4-18GHz_Horizontal_Peak 2.4G Wi-Fi-n20-2437MHz

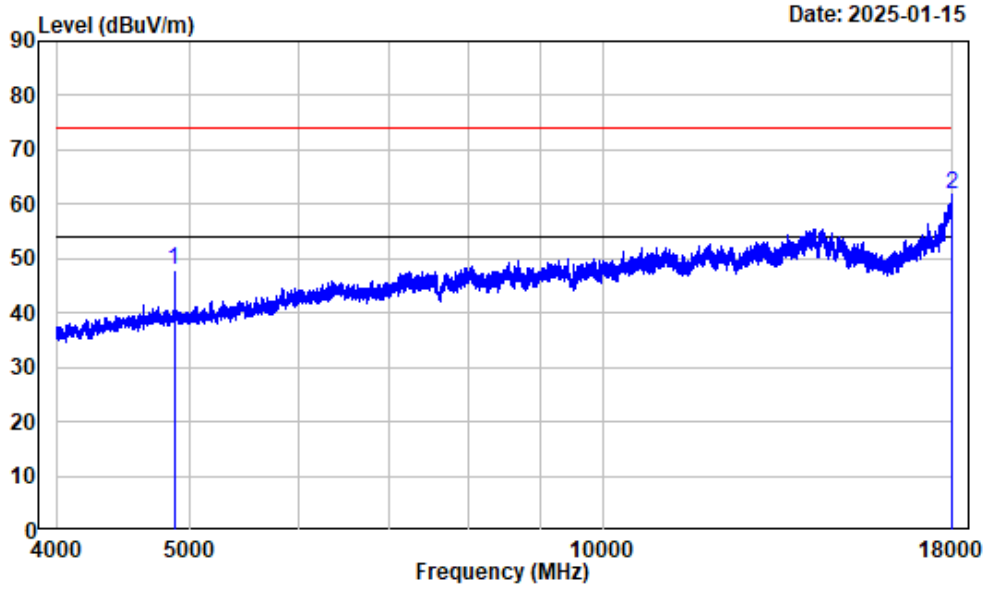

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	55.38	47.77	74.00	-26.23	Peak
2	17986.000	13.13	48.60	61.73	74.00	-12.27	Peak

4-18GHz_Horizontal_Average 2.4G Wi-Fi-n20-2437MHz

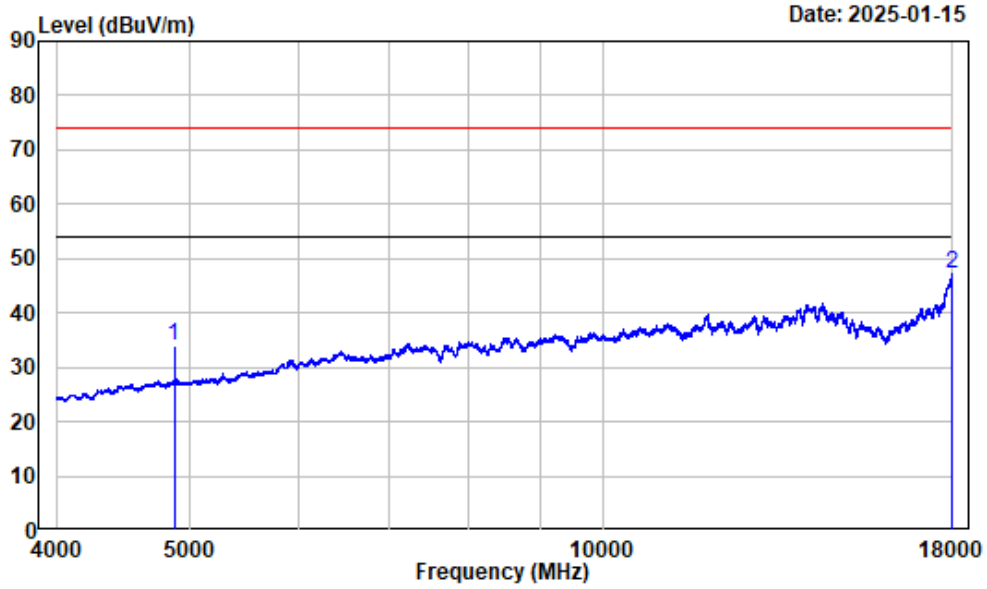

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	41.63	34.02	54.00	-19.98	Average
2	17998.630	13.20	34.01	47.21	54.00	-6.79	Average

4-18GHz_Vertical_Peak 2.4G Wi-Fi-n20-2437MHz

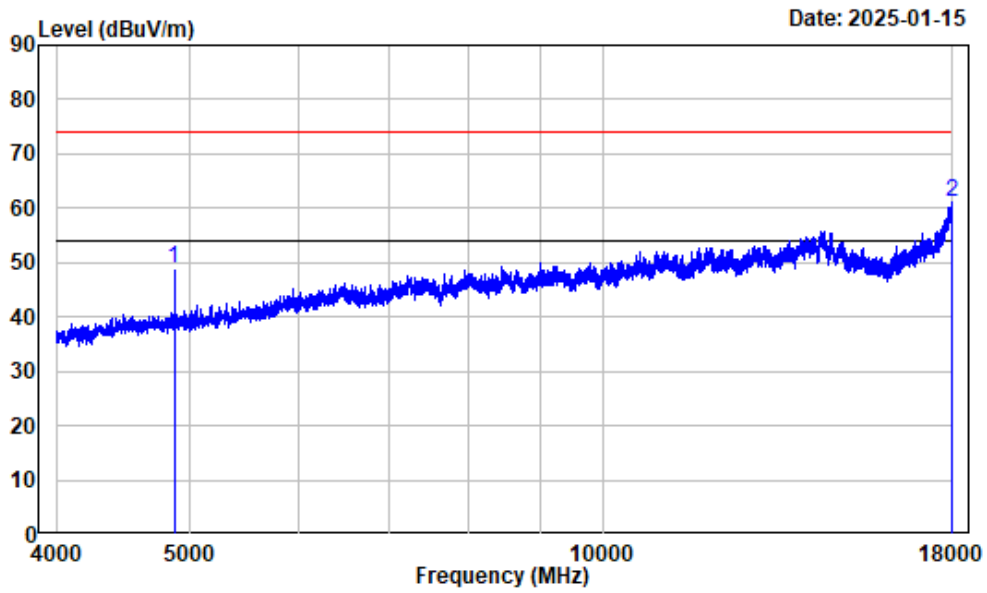

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	56.59	48.98	74.00	-25.02	Peak
2	17994.750	13.17	48.12	61.29	74.00	-12.71	Peak

4-18GHz_Vertical_Average2.4G Wi-Fi-n20-2437MHz

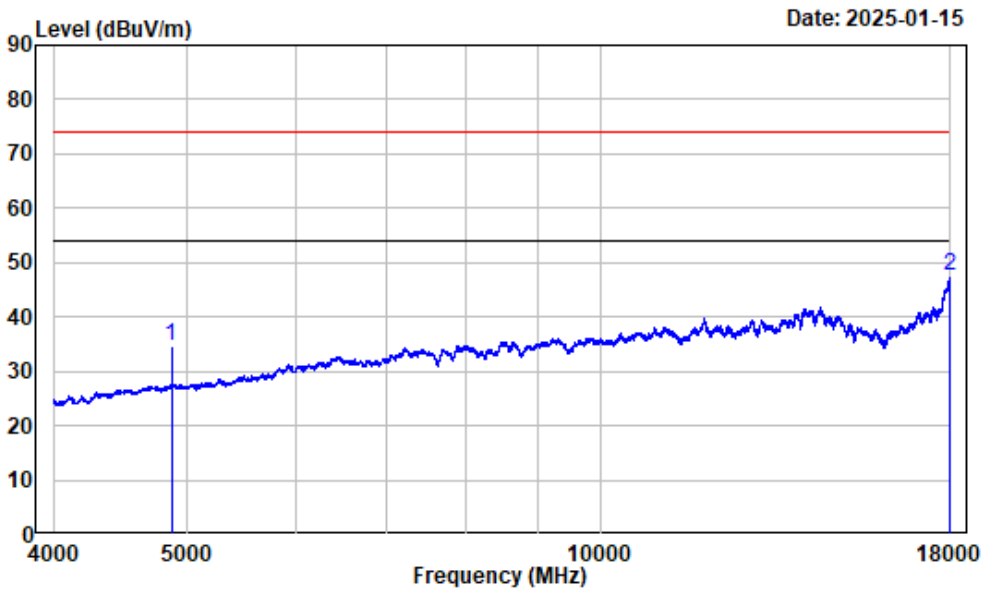

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi-n20-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.61	42.25	34.64	54.00	-19.36	Average
2	17996.500	13.19	34.29	47.48	54.00	-6.52	Average

18-25GHz (*Only with worst case margin mode plot***):**

18-25GHz_Horizontal 2.4G Wi-Fi-b-2437MHz

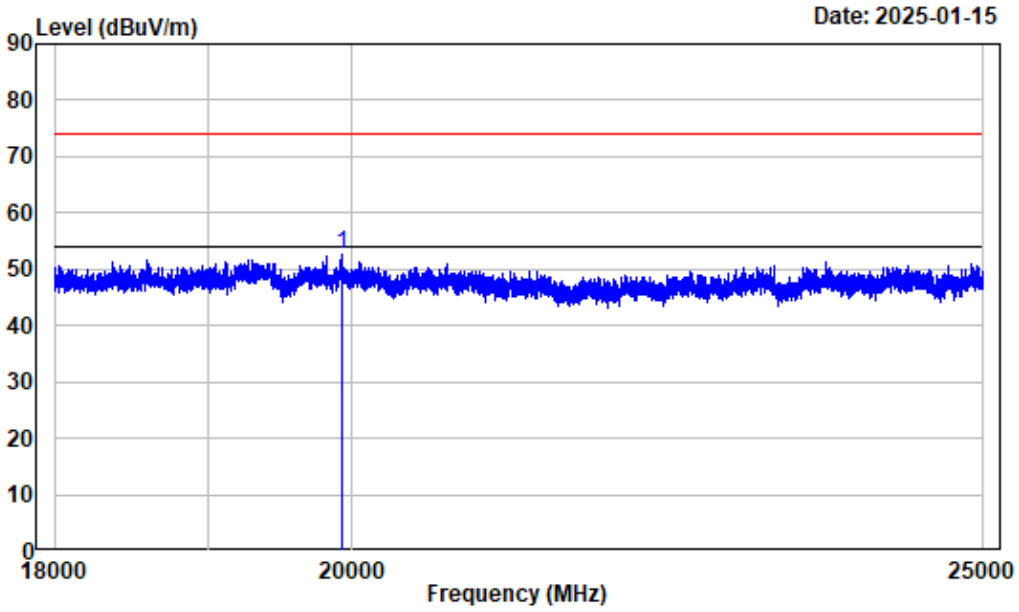

Condition : Horizontal
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19927.870	15.42	37.36	52.78	74.00	-21.22	Peak

18-25GHz_Vertical 2.4G Wi-Fi-b-2437MHz

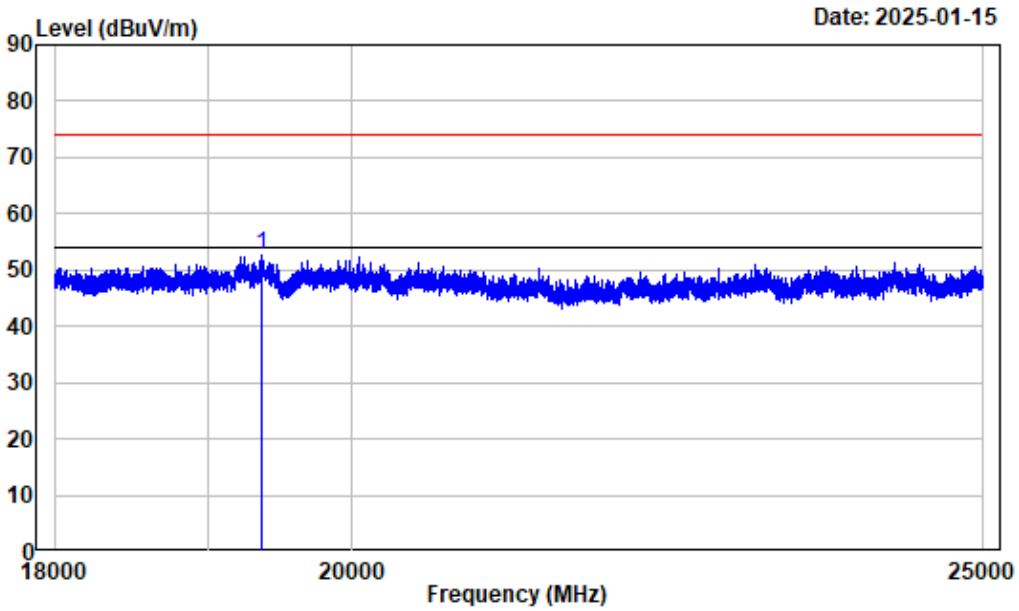

Condition : Vertical
Project No. : 2401W89040E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi-b-2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19372.170	15.11	37.48	52.59	74.00	-21.41	Peak

6dB Emission Bandwidth

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/15~2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	22.1-23.9	**Relative Humidity: (%)**	41-52	**ATM Pressure: (kPa)**	101.1

Test Data:

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11b	2412	7.127	≥0.5	Pass
	2437	8.128	≥0.5	Pass
	2462	7.127	≥0.5	Pass
802.11g	2412	13.894	≥0.5	Pass
	2437	16.497	≥0.5	Pass
	2462	13.333	≥0.5	Pass
802.11n20	2412	15.536	≥0.5	Pass
	2437	**17.698**	≥0.5	Pass
	2462	13.614	≥0.5	Pass

802.11b_2412MHz

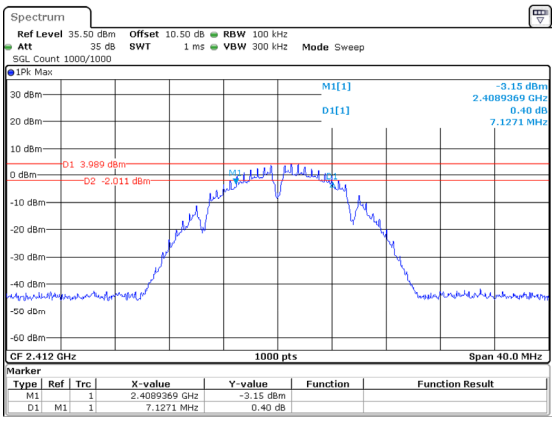

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 15.FEB.2025 11:38:08

802.11b_2437MHz

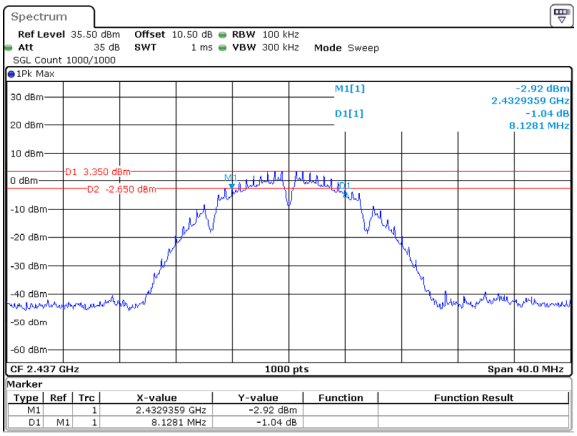

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 26.FEB.2025 17:26:40

802.11b_2462MHz

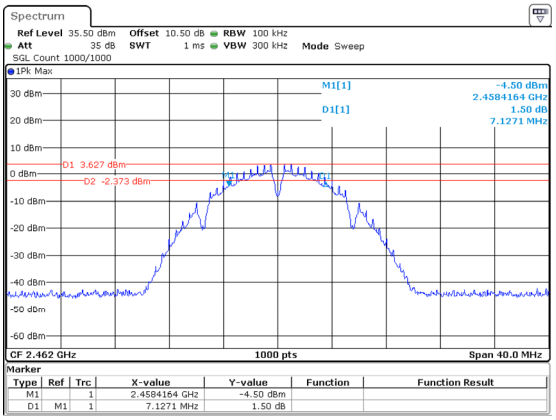

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 15.FEB.2025 11:45:43

802.11g_2412MHz

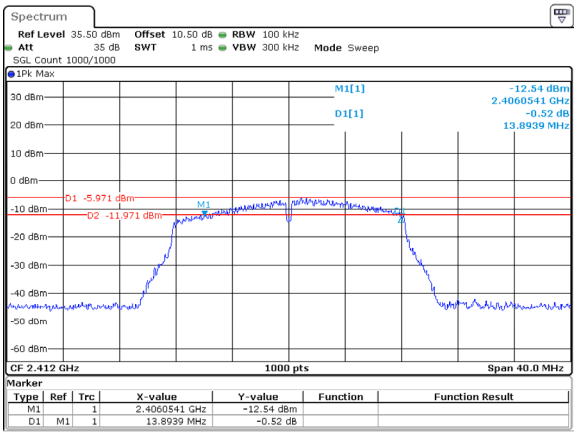

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 26.FEB.2025 17:30:14

802.11g_2437MHz

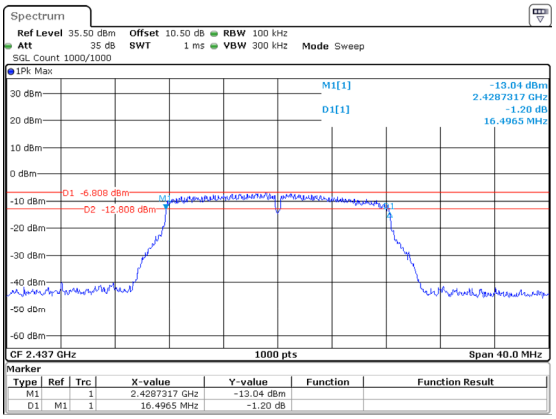

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 15.FEB.2025 13:05:27

802.11g_2462MHz

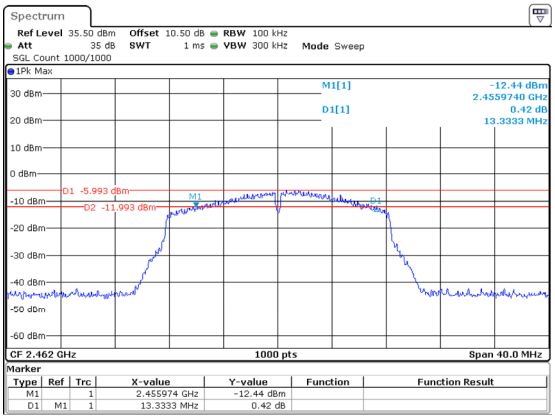

ProjectNo.:2401W89040E-RF Tester:Rainbow Zhu
Date: 15.FEB.2025 13:08:14

802.11n20_2412MHz

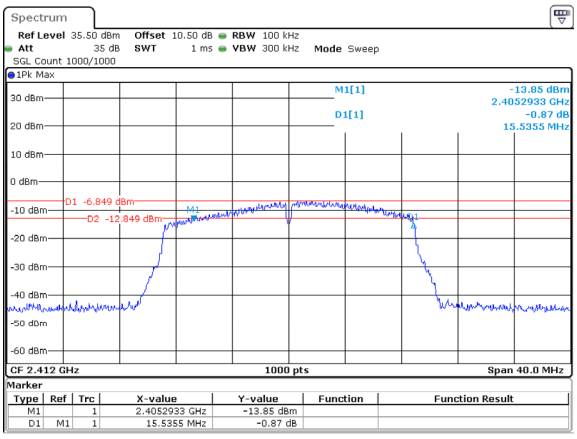

802.11n20_2437MHz

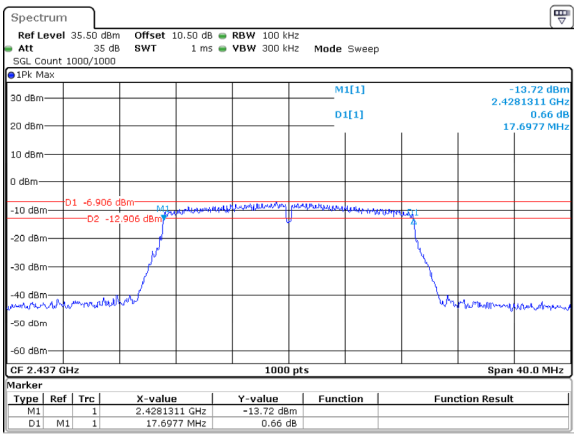

802.11n20_2462MHz

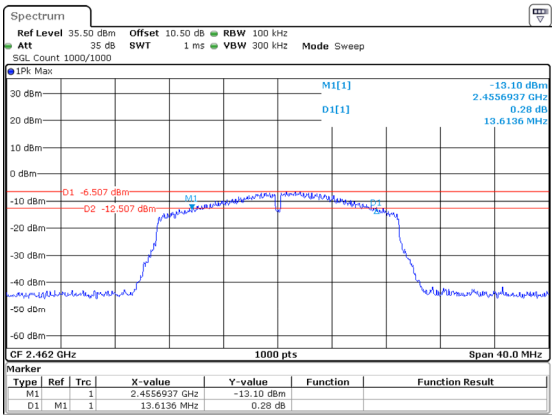

99% Occupied Bandwidth

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	22.1	**Relative Humidity: (%)**	52	**ATM Pressure: (kPa)**	101.1

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11b	2412	12.320
	2437	13
	2462	12.040
802.11g	2412	16.240
	2437	16.560
	2462	16.120
802.11n20	2412	17.360
	2437	**17.680**
	2462	17.240

2412~2462

802.11b_2412MHz

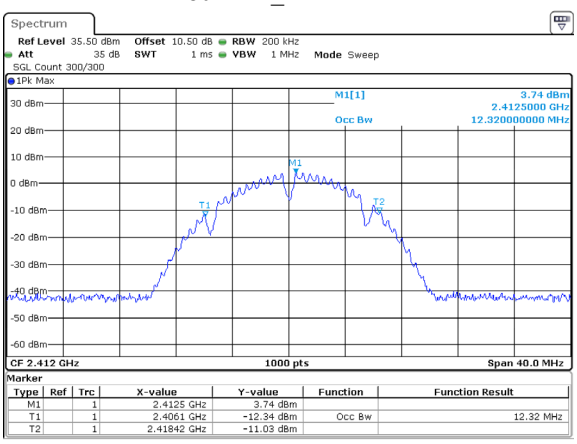

802.11b_2437MHz

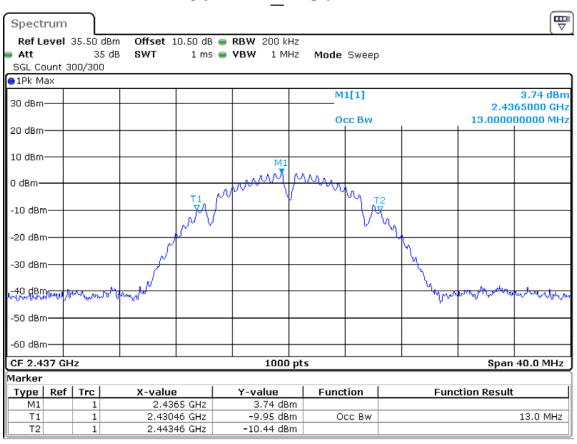

802.11b_2462MHz

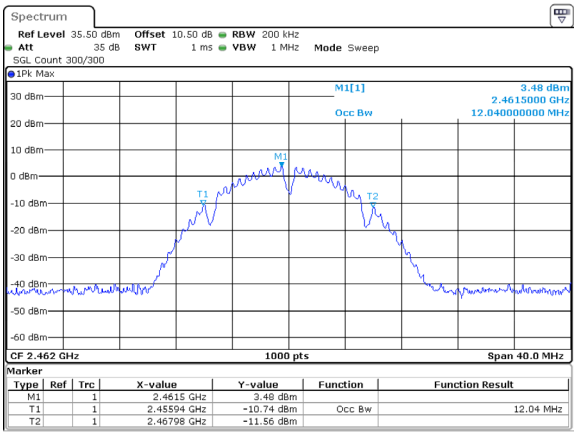

802.11g_2412MHz

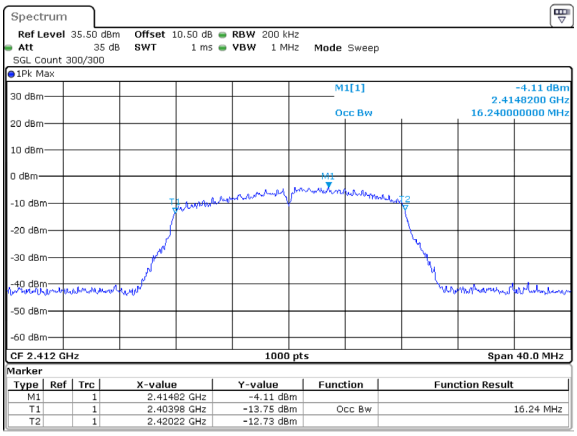

802.11g_2437MHz

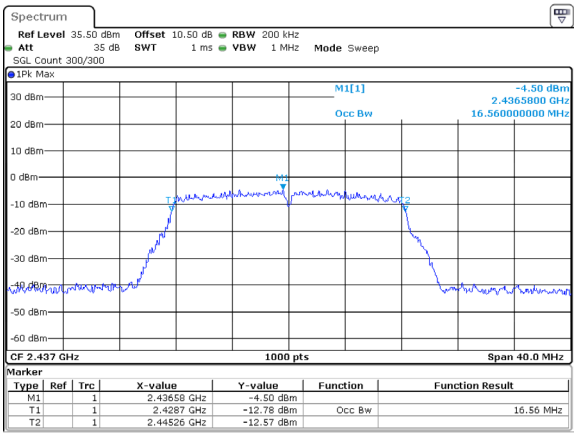

802.11g_2462MHz

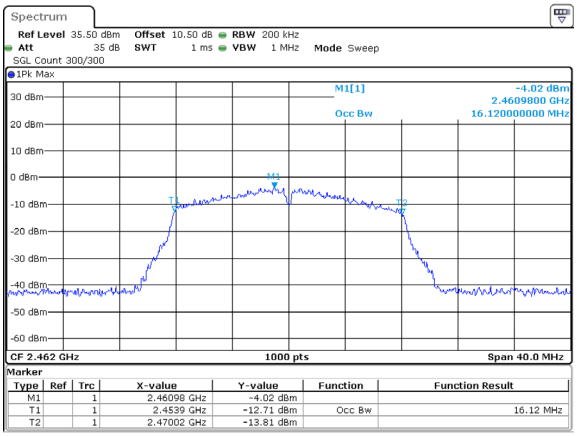

802.11n20_2412MHz

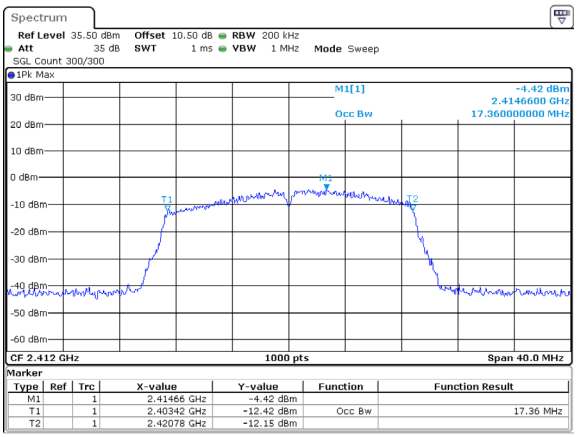

802.11n20_2437MHz

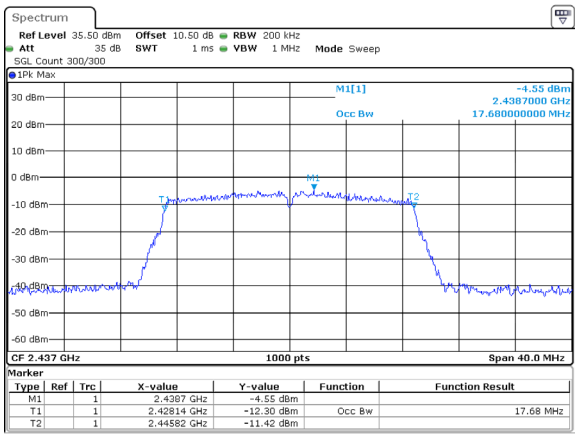

802.11n20_2462MHz

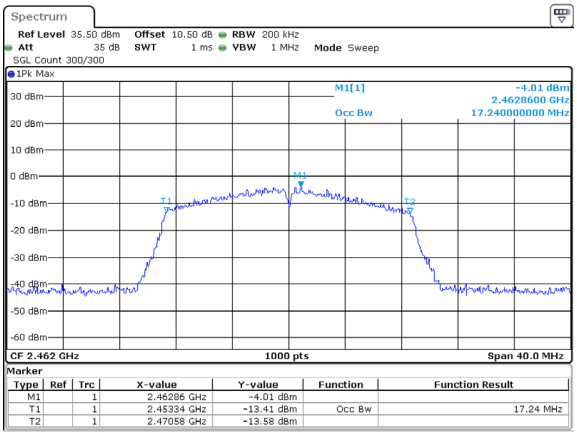

Maximum Conducted Output Power

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/15
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.9	**Relative Humidity: (%)**	41	**ATM Pressure: (kPa)**	101.1

Test Data:

Mode	Test Frequency (MHz)	Peak Output Power(dBm)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11b	2412	14.92	11.80	30	Pass
	2437	**15.16**	12.16	30	Pass
	2462	14.47	11.51	30	Pass
802.11g	2412	13.76	6.46	30	Pass
	2437	13.85	6.45	30	Pass
	2462	13.23	5.97	30	Pass
802.11n20	2412	13.47	6.06	30	Pass
	2437	13.69	6.45	30	Pass
	2462	13.01	5.73	30	Pass

Power Spectral Density

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	22.1	**Relative Humidity: (%)**	52	**ATM Pressure: (kPa)**	101.1

Test Data:

Mode	Test Frequency (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	2412	-9.69	8	Pass
	2437	**-9.59**	8	Pass
	2462	-10.43	8	Pass
802.11g	2412	-17.30	8	Pass
	2437	-18.02	8	Pass
	2462	-16.89	8	Pass
802.11n20	2412	-17.07	8	Pass
	2437	-18.57	8	Pass
	2462	-16.60	8	Pass

802.11b_2412MHz

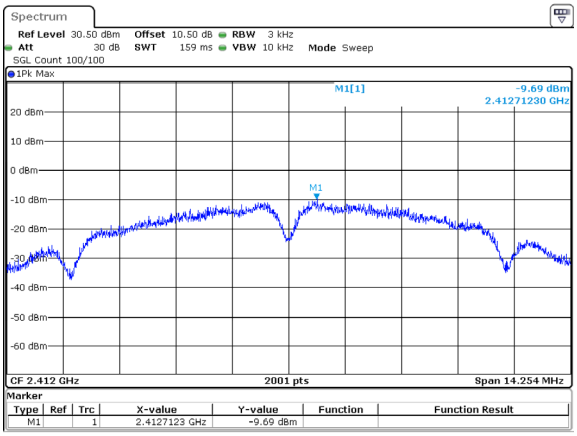

802.11b_2437MHz

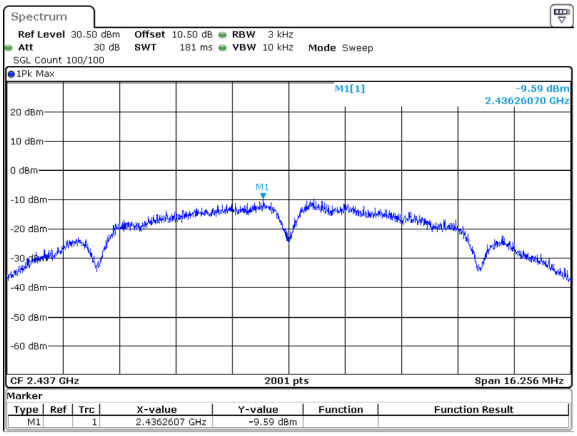

802.11b_2462MHz

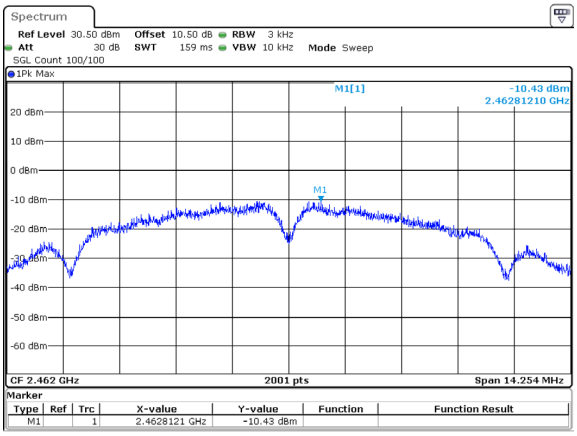

802.11g_2412MHz

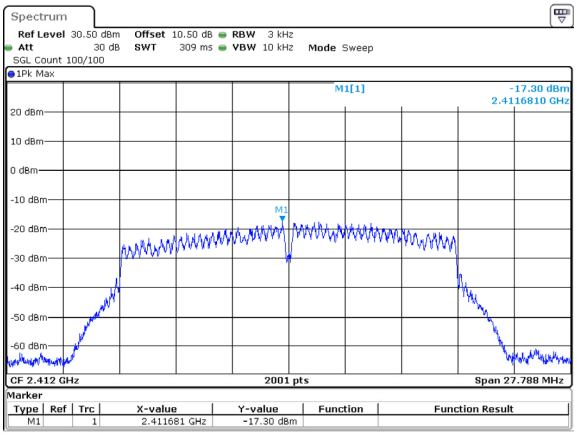

802.11g_2437MHz

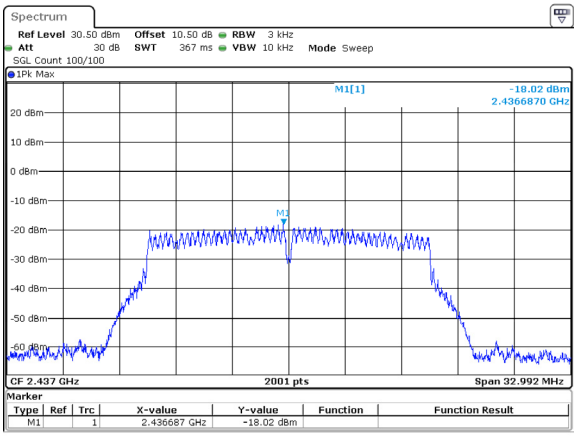

802.11g_2462MHz

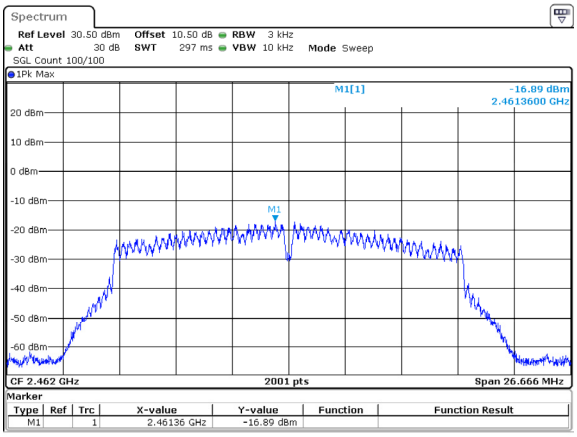

802.11n20_2412MHz

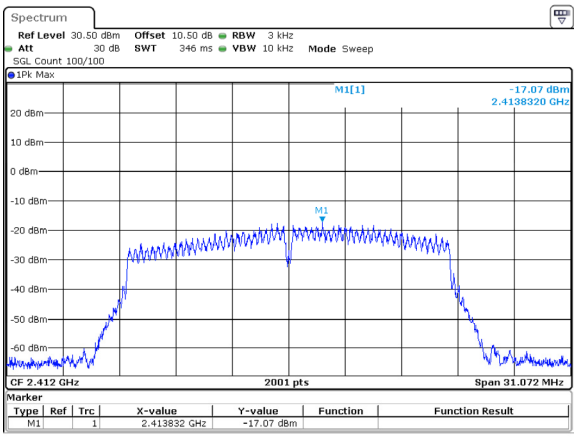

802.11n20_2437MHz

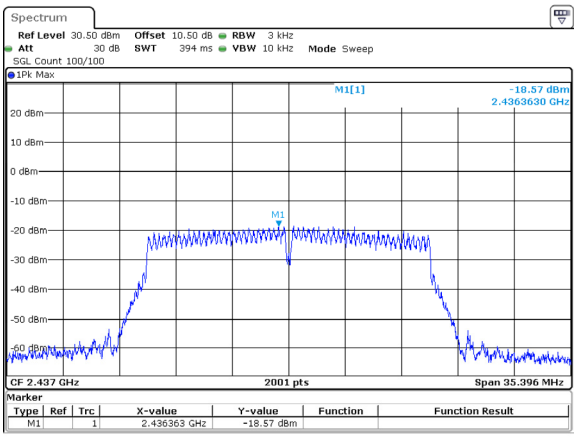

802.11n20_2462MHz

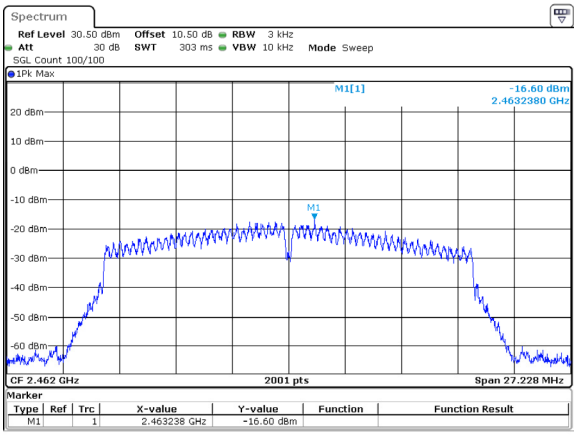

100 kHz Bandwidth of Frequency Band Edge

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/15
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.9	**Relative Humidity: (%)**	41	**ATM Pressure: (kPa)**	101.1

802.11b_2412MHz

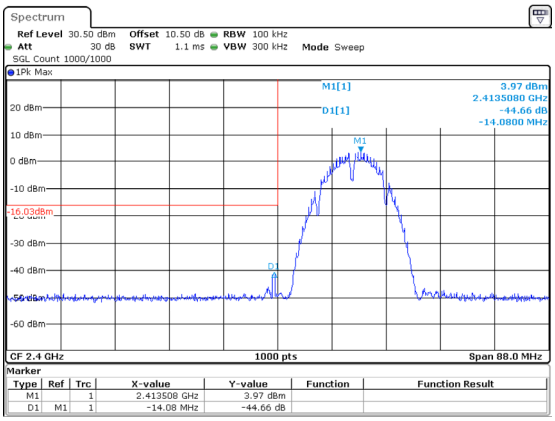

802.11b_2462MHz

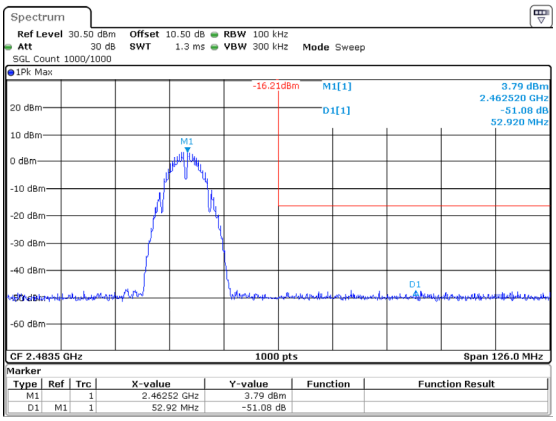

802.11g_2412MHz

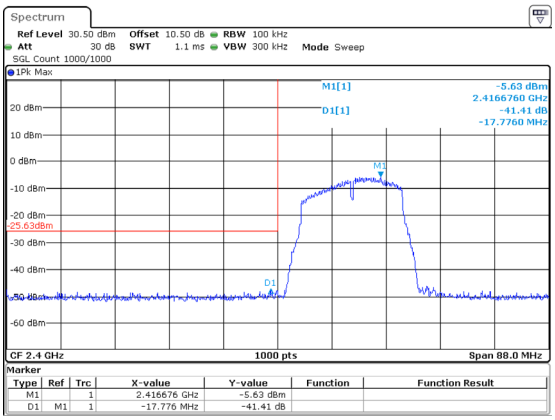

802.11g_2462MHz

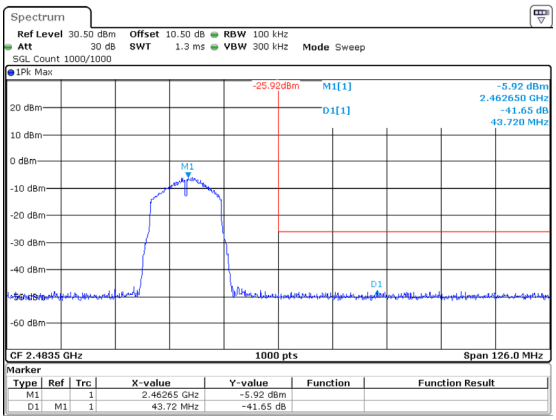

802.11n20_2412MHz

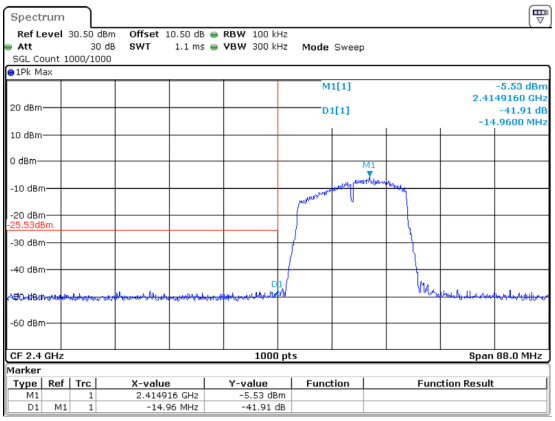

802.11n20_2462MHz

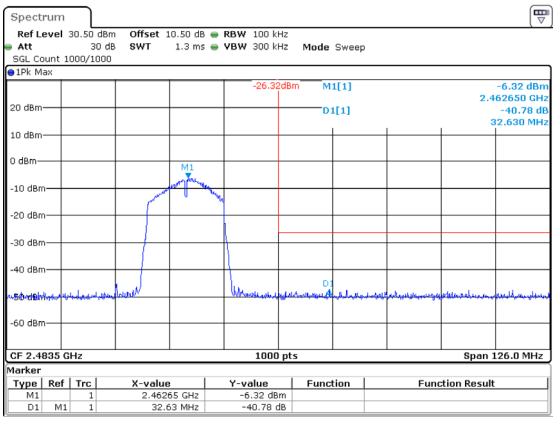

Duty Cycle

Test Information:

Sample No.:	2PIE-5	**Test Date:**	2025/02/15
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Rainbow Zhu	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.9	**Relative Humidity: (%)**	41	**ATM Pressure: (kPa)**	101.1

Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11b	2437	**100**	100	100	NA	NA	0.010
802.11g	2437	**100**	100	100	NA	NA	0.010
802.11n20	2437	**100**	100	100	NA	NA	0.010

Duty Cycle = Ton/(Ton+Toff)*100%

802.11b_2437MHz

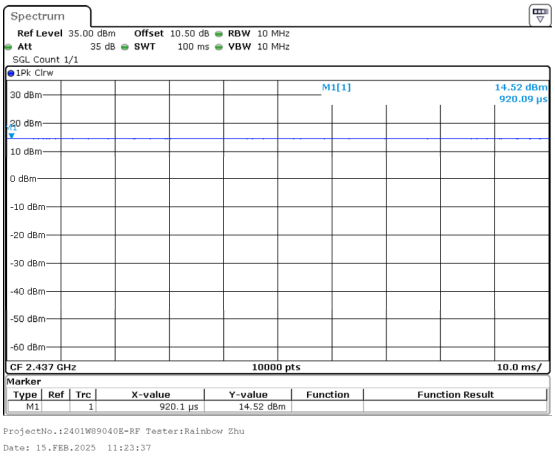

802.11g_2437MHz

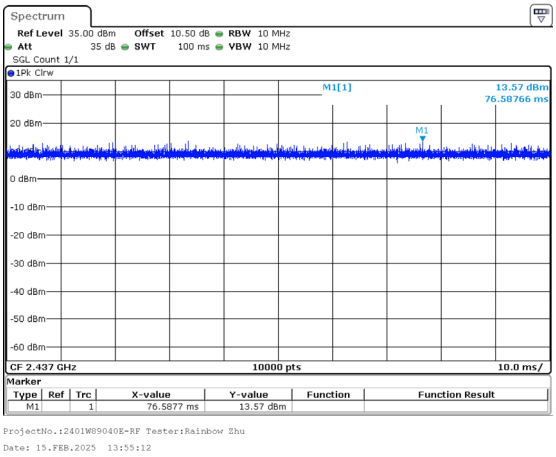

802.11n20_2437MHz

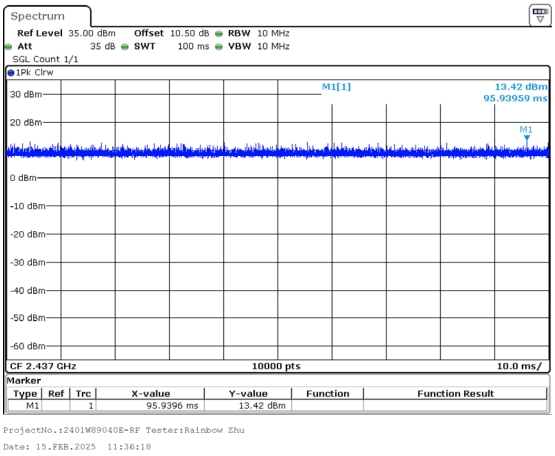

RF EXPOSURE EVALUATION

RF EXPOSURE

Applicable Standard

FCC§1.1307 and §2.1093.

Test Result

Compliant, please refer to the SAR report: 2403W89043E-20#, issued on 2025-02-17 by China Certification ICT Co., Ltd (Dongguan).

EUT PHOTOGRAPHS

Please refer to the attachment 2401W89040E-RF External photo and 2401W89040E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401W89040E-RFA Test Setup photo.

******* END OF REPORT *******