RF Test Data for Bluetooth (BR+EDR) (Conducted Measurements)

General Description of EUT	
EUT Name:	**Portable Gaming Computer(Tablet computer)**
Model:	**AYANEO Pocket S2**
Sample ID:	**HC-C-202412-0244-01-03-2#**
Test Standard:	**FCC Part 15.247**
Environmental Conditions	
Ambient Temperature:	**25℃**
Ambient Humidity:	**45%RH**
Test Power Supply:	**DC 7.74V**
Test Engineer:	**Rick. chen**
Note: For a more detailed features description, please refer to the report TBR-C-202412-0244-9	

Contents

1: 20dB Emission Bandwidth 3
1.1 Test Result 3
1.2 Test Graphs 4
2: Occupied Channel Bandwidth 6
2.1 Test Result 6
2.2 Test Graphs 7
3: Maximum conducted output power 9
3.1 Test Result Peak 9
3.2 Test Graphs 10
4: Carrier frequency separation 12
4.1 Test Result 12
4.2 Test Graphs 13
5: Time of occupancy 14
5.1 Test Result 14
5.2 Test Graphs 15
6: Number of hopping channels 18
6.1 Test Result 18
6.2 Test Graphs 19
7: Band edge measurements 20
7.1 Test Result 20
7.2 Test Graphs 21
8: Conducted Spurious Emission 23
8.1 Test Result 23
8.2 Test Graphs 24
9: Duty Cycle 29
9.1 Test Result 29
9.2 Test Graphs 30
10: Emissions in Restricted Bands 32
10.1 Test Result 32
10.2 Test Graphs 33

1: 20dB Emission Bandwidth

1.1 Test Result

Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.52	2402.47	---	---
DH5	Ant1	2441	0.95	2440.52	2441.47	---	---
DH5	Ant1	2480	0.95	2479.52	2480.47	---	---
2DH5	Ant1	2402	1.36	2401.31	2402.67	---	---
2DH5	Ant1	2441	1.33	2440.32	2441.65	---	---
2DH5	Ant1	2480	1.36	2479.31	2480.67	---	---
3DH5	Ant1	2402	1.33	2401.32	2402.65	---	---
3DH5	Ant1	2441	1.33	2440.32	2441.65	---	---
3DH5	Ant1	2480	1.31	2479.33	2480.65	---	---

1.2 Test Graphs

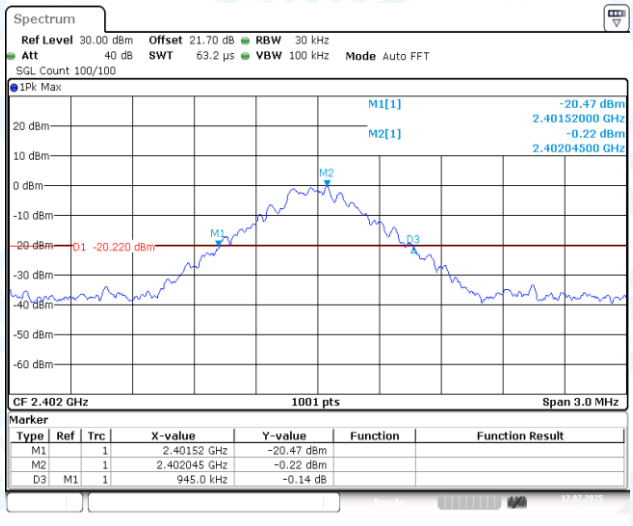

DH5-Ant1-2402

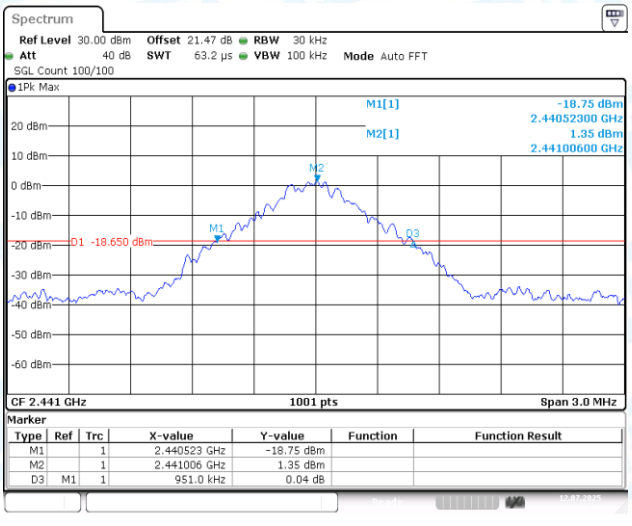

DH5-Ant1-2441

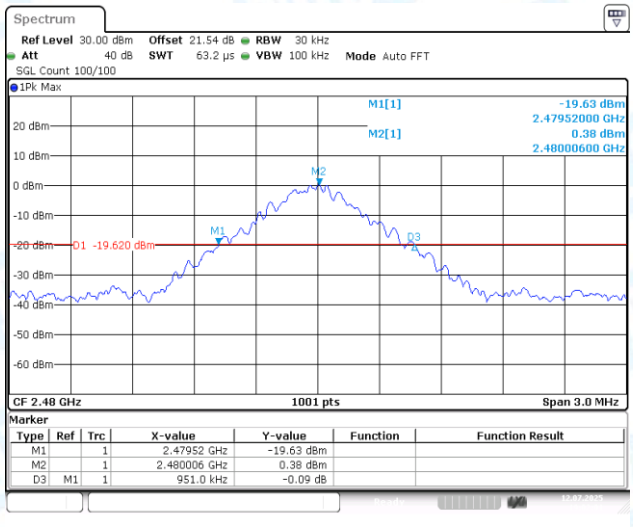

DH5-Ant1-2480

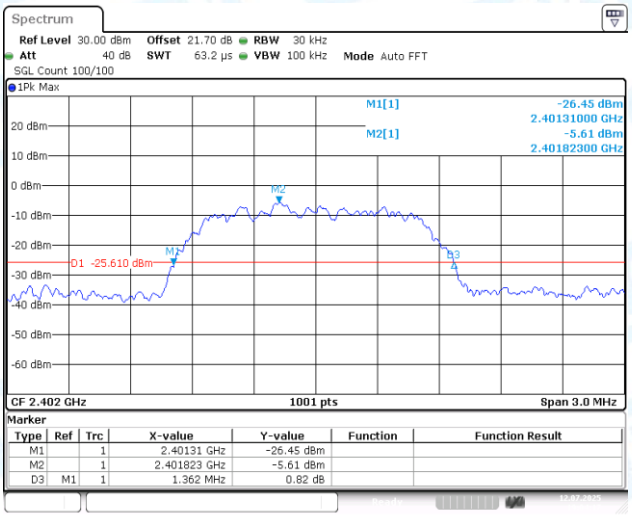

2DH5-Ant1-2402

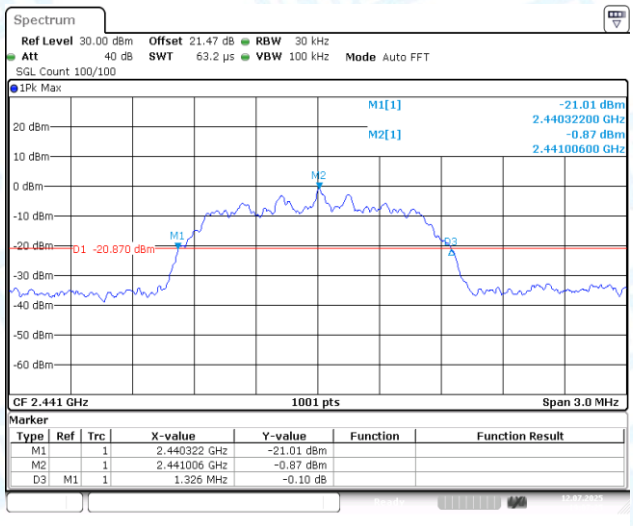

2DH5-Ant1-2441

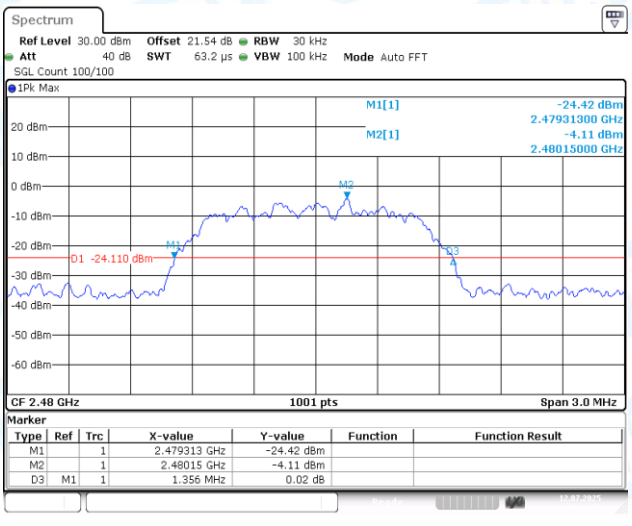

2DH5-Ant1-2480

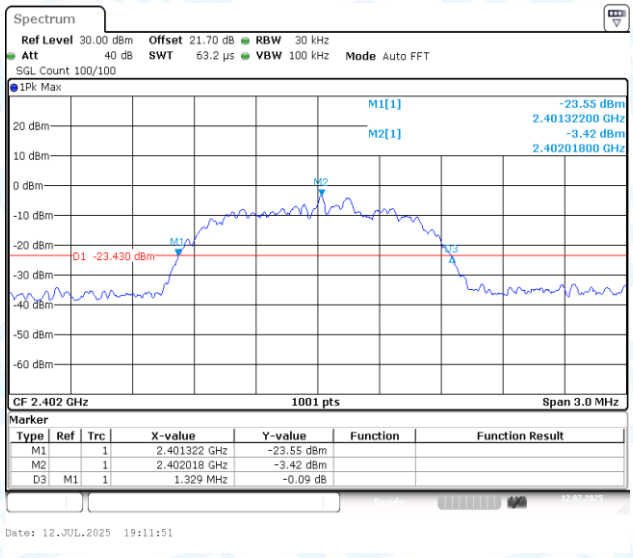

3DH5-Ant1-2402

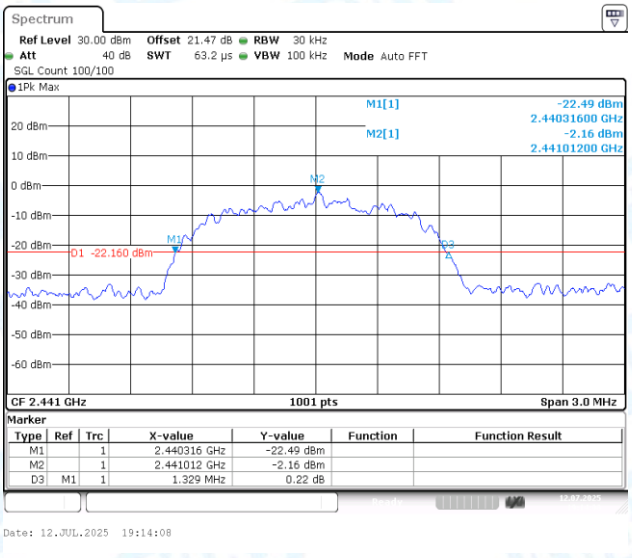

3DH5-Ant1-2441

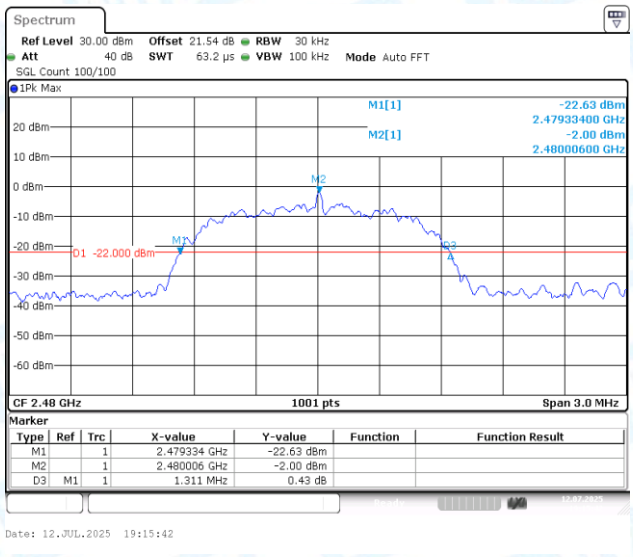

3DH5-Ant1-2480

2: Occupied Channel Bandwidth

2.1 Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.89011	2401.5445	2402.4346	---	---
DH5	Ant1	2441	0.88412	2440.5475	2441.4316	---	---
DH5	Ant1	2480	0.87812	2479.5475	2480.4256	---	---
2DH5	Ant1	2402	1.2198	2401.3826	2402.6024	---	---
2DH5	Ant1	2441	1.2108	2440.3856	2441.5964	---	---
2DH5	Ant1	2480	1.2288	2479.3736	2480.6024	---	---
3DH5	Ant1	2402	1.2258	2401.3706	2402.5964	---	---
3DH5	Ant1	2441	1.2228	2440.3736	2441.5964	---	---
3DH5	Ant1	2480	1.2258	2479.3676	2480.5934	---	---

2.2 Test Graphs

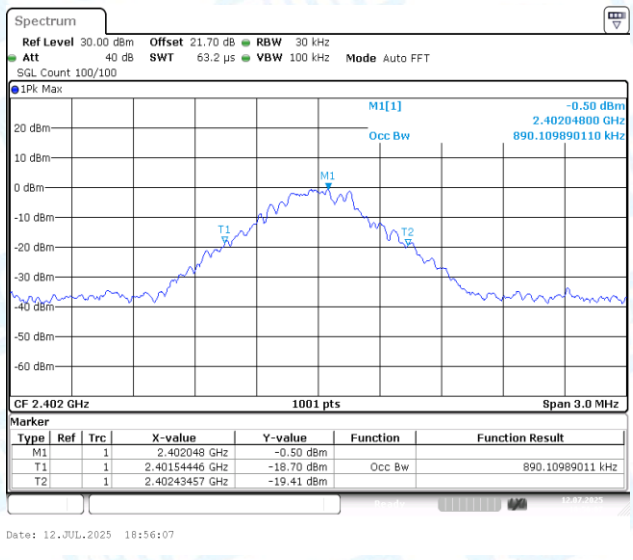

DH5-Ant1-2402

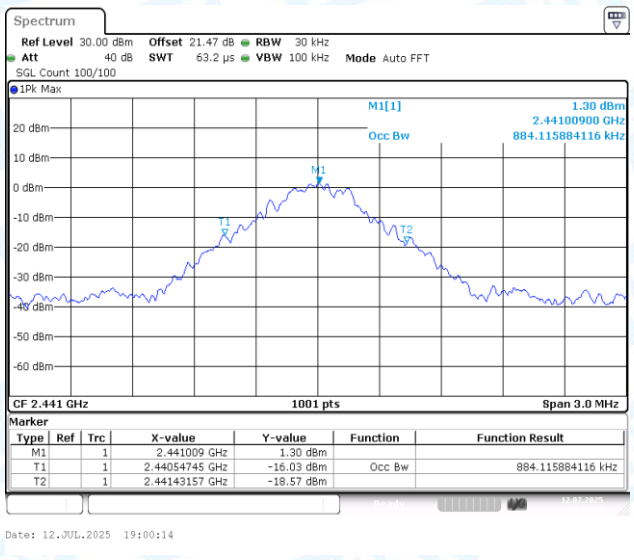

DH5-Ant1-2441

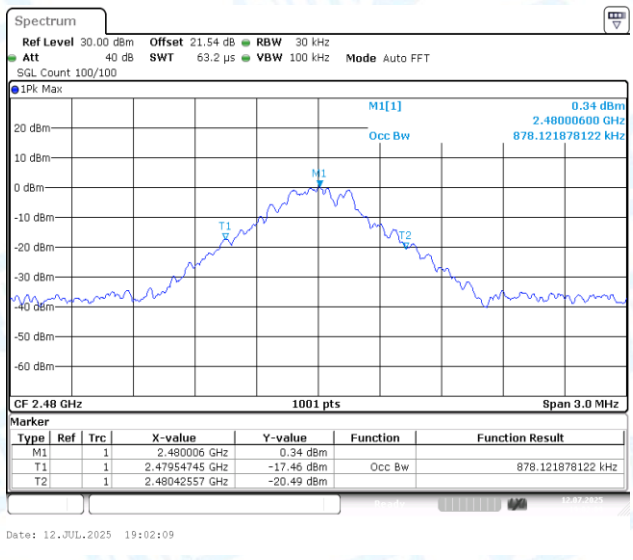

DH5-Ant1-2480

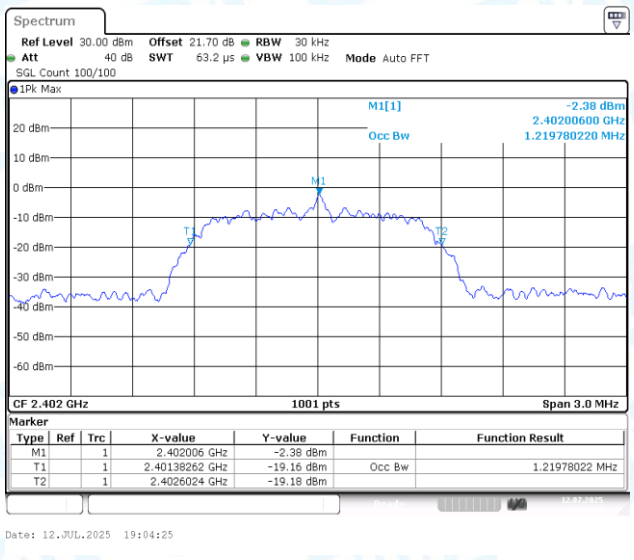

2DH5-Ant1-2402

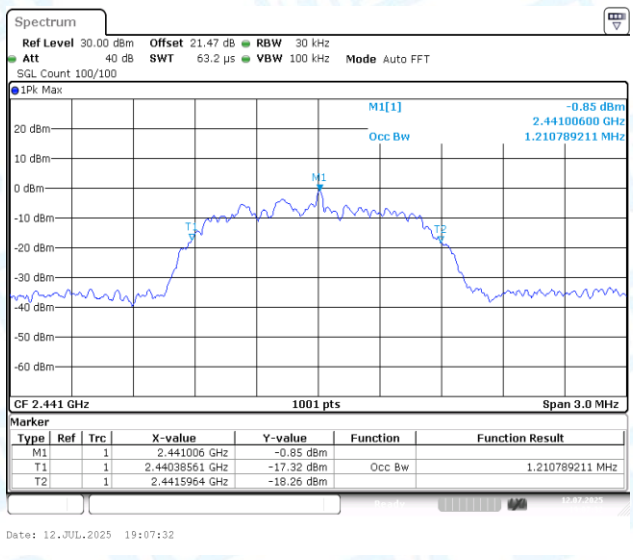

2DH5-Ant1-2441

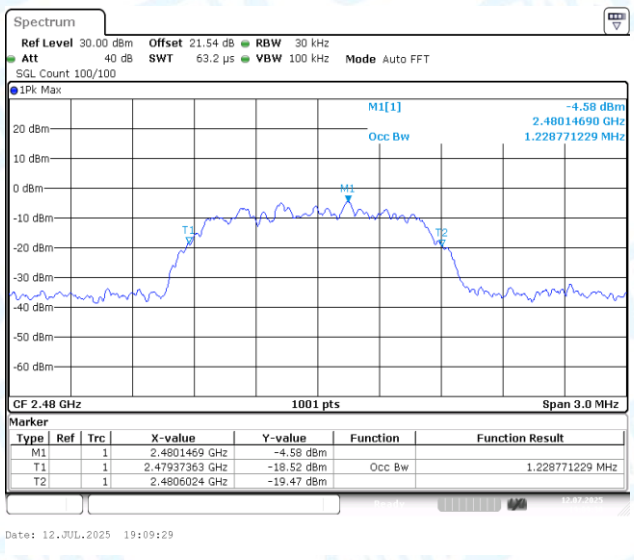

2DH5-Ant1-2480

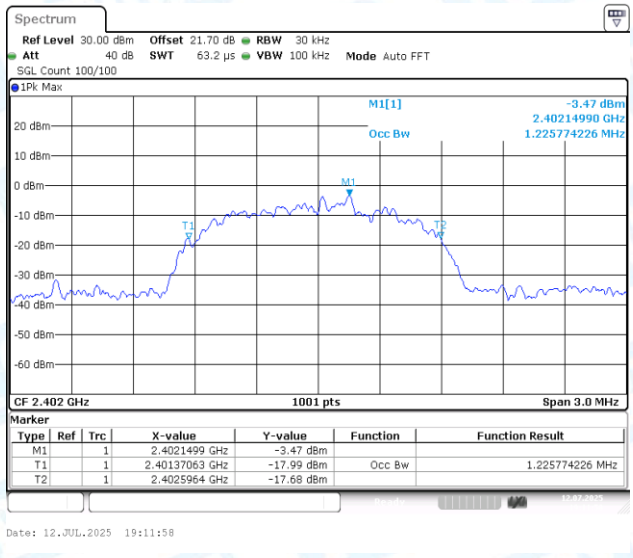

3DH5-Ant1-2402

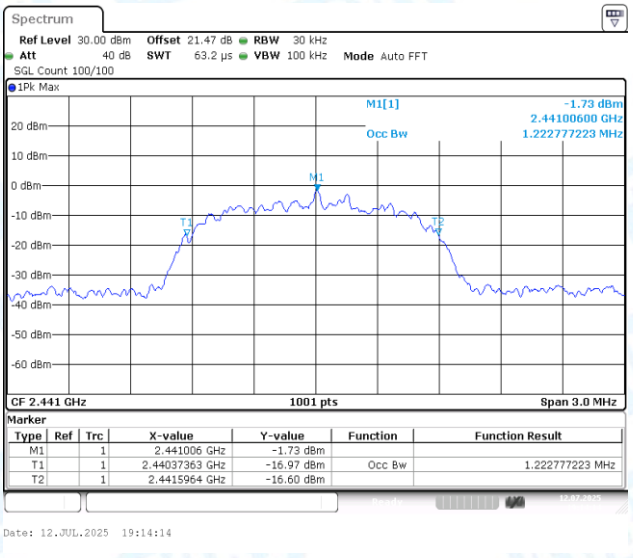

3DH5-Ant1-2441

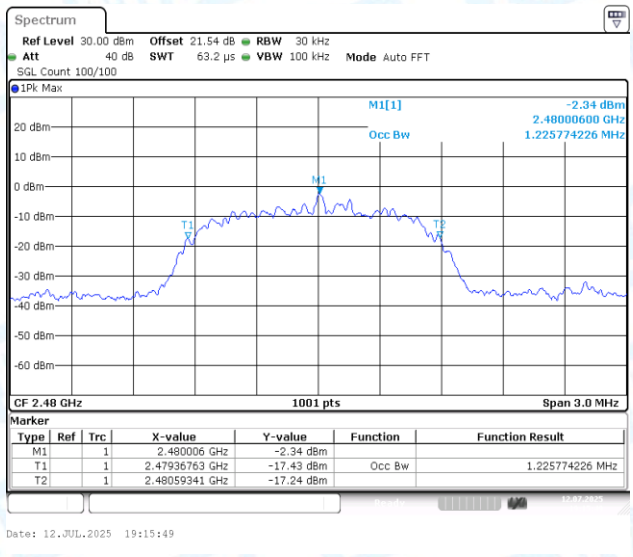

3DH5-Ant1-2480

3: Maximum conducted output power

3.1 Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	3.50	≤21	PASS
DH5	Ant1	2441	4.64	≤21	PASS
DH5	Ant1	2480	3.69	≤21	PASS
2DH5	Ant1	2402	2.25	≤21	PASS
2DH5	Ant1	2441	3.39	≤21	PASS
2DH5	Ant1	2480	2.71	≤21	PASS
3DH5	Ant1	2402	2.32	≤21	PASS
3DH5	Ant1	2441	3.55	≤21	PASS
3DH5	Ant1	2480	2.72	≤21	PASS

3.2 Test Graphs

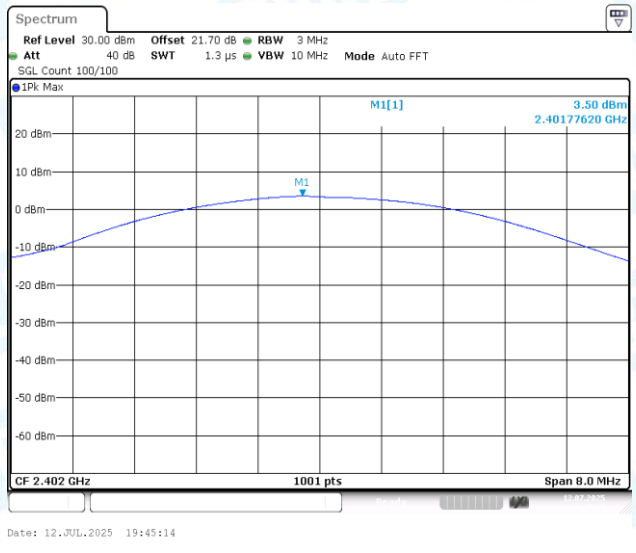

DH5-Ant1-2402-PASS

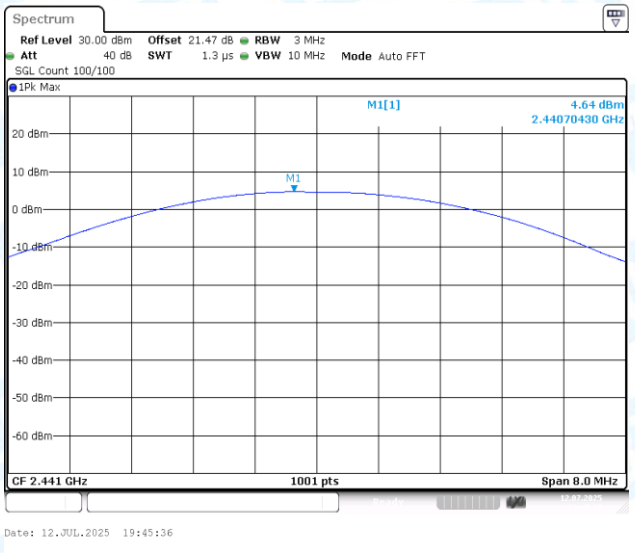

DH5-Ant1-2441-PASS

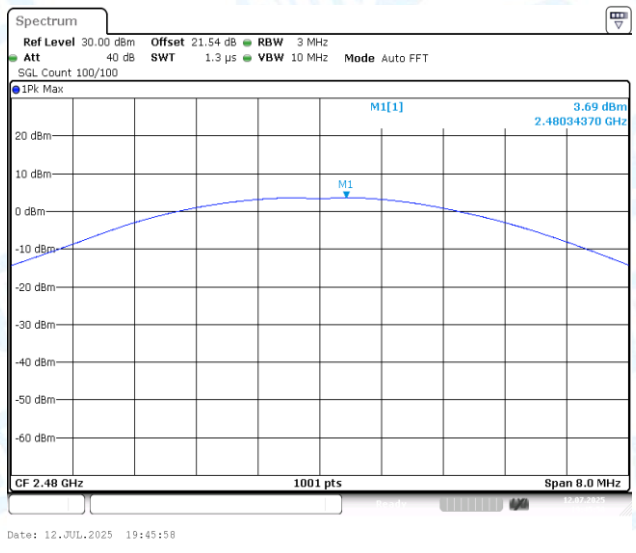

DH5-Ant1-2480-PASS

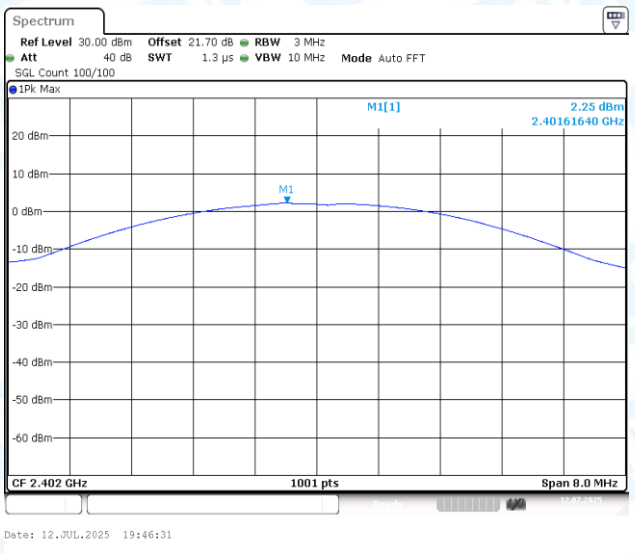

2DH5-Ant1-2402-PASS

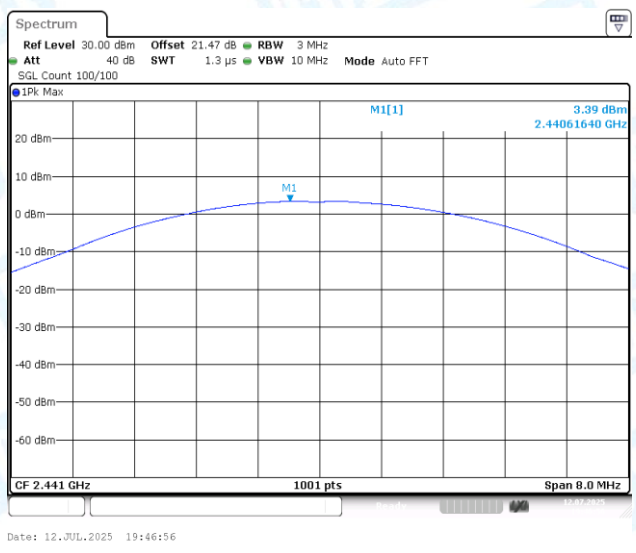

2DH5-Ant1-2441-PASS

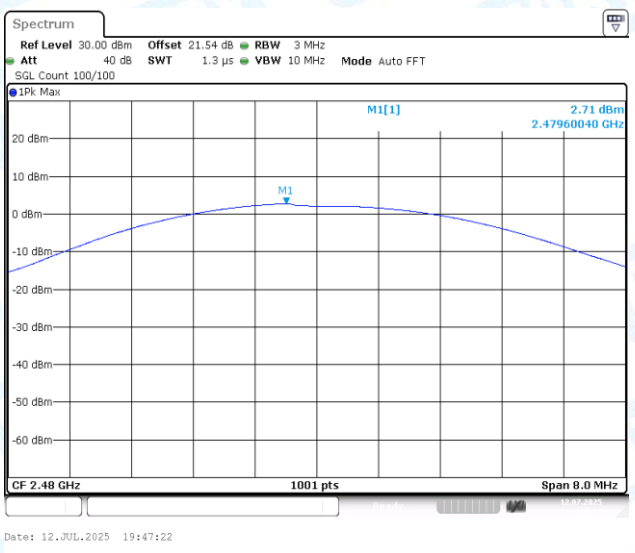

2DH5-Ant1-2480-PASS

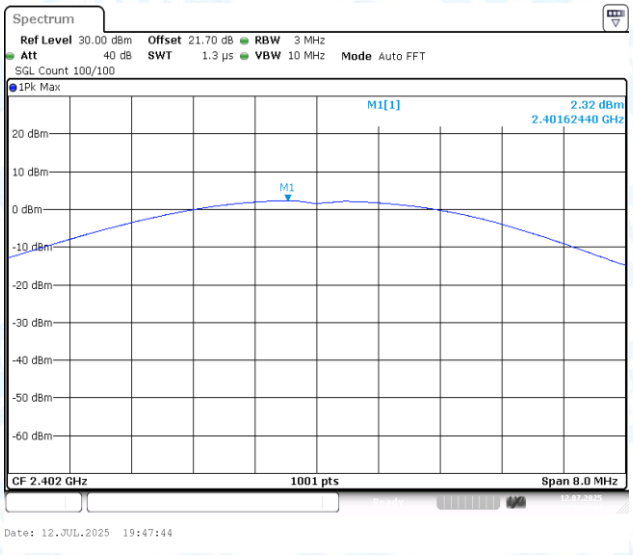

3DH5-Ant1-2402-PASS

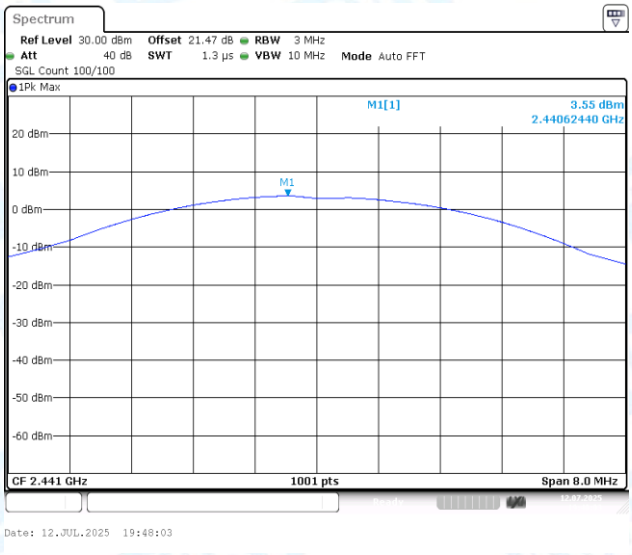

3DH5-Ant1-2441-PASS

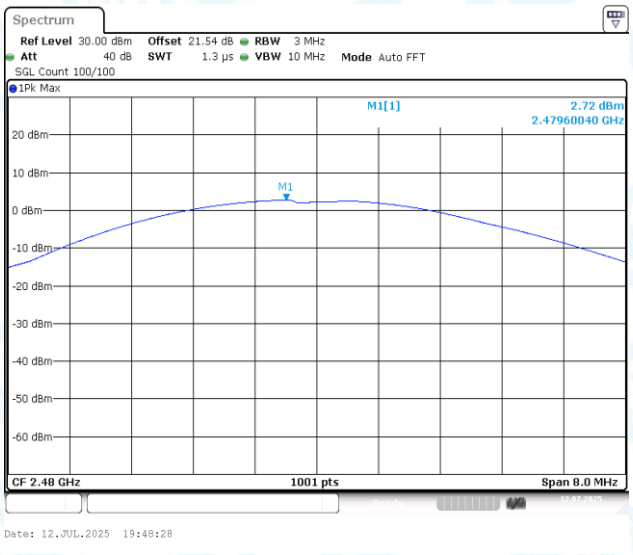

3DH5-Ant1-2480-PASS

4: Carrier frequency separation

4.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.319	≥0.950	PASS
2DH5	Ant1	Hop	1.252	≥0.907	PASS
3DH5	Ant1	Hop	1.264	≥0.887	PASS

4.2 Test Graphs

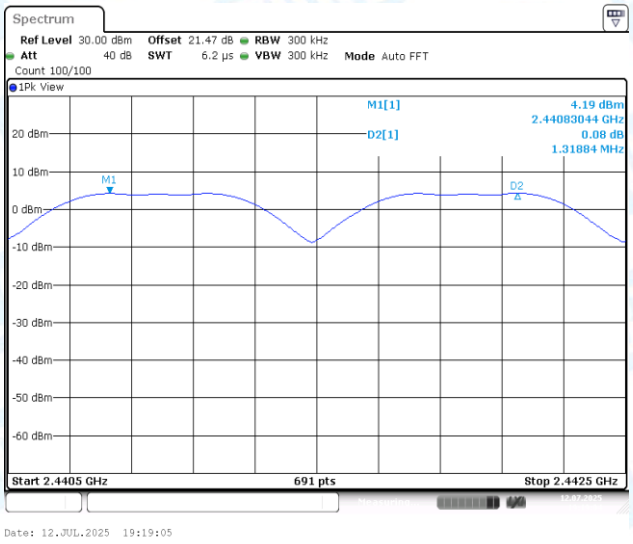

DH5-Ant1-Hop-PASS

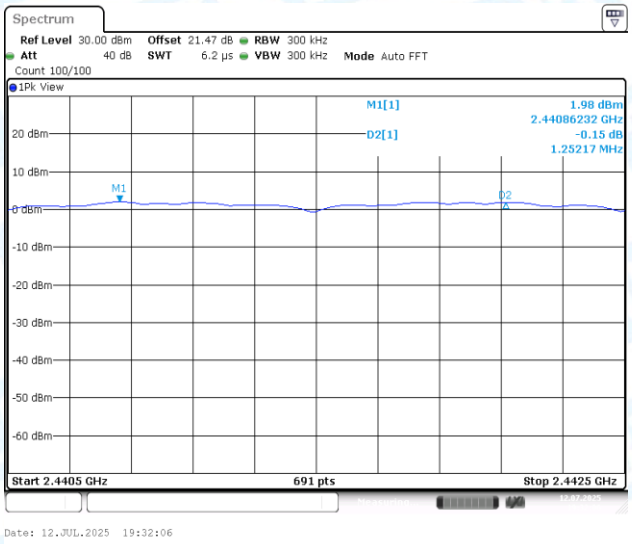

2DH5-Ant1-Hop-PASS

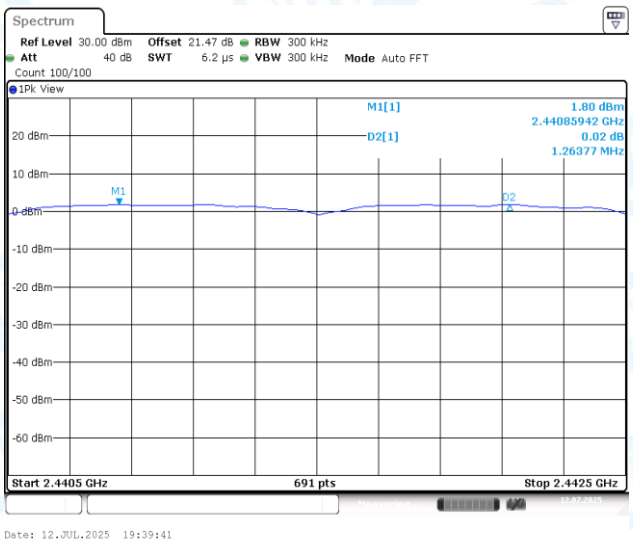

3DH5-Ant1-Hop-PASS

5: Time of occupancy

5.1 Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	-1.824	330	-0.602	≤0.4	PASS
DH3	Ant1	Hop	-1.841	160	-0.295	≤0.4	PASS
DH5	Ant1	Hop	-1.909	80	-0.153	≤0.4	PASS
2DH1	Ant1	Hop	-1.841	330	-0.608	≤0.4	PASS
2DH3	Ant1	Hop	-1.743	160	-0.279	≤0.4	PASS
2DH5	Ant1	Hop	-1.963	120	-0.236	≤0.4	PASS
3DH1	Ant1	Hop	-1.759	330	-0.58	≤0.4	PASS
3DH3	Ant1	Hop	-1.738	150	-0.261	≤0.4	PASS
3DH5	Ant1	Hop	-1.615	70	-0.113	≤0.4	PASS

5.2 Test Graphs

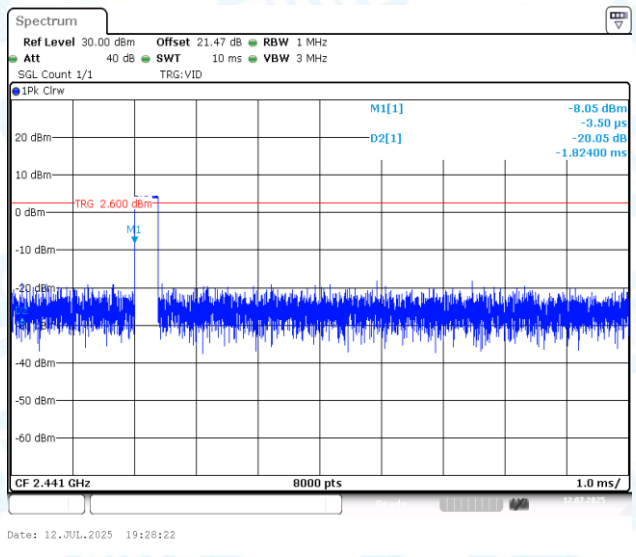

DH1-Ant1-Hop-PASS

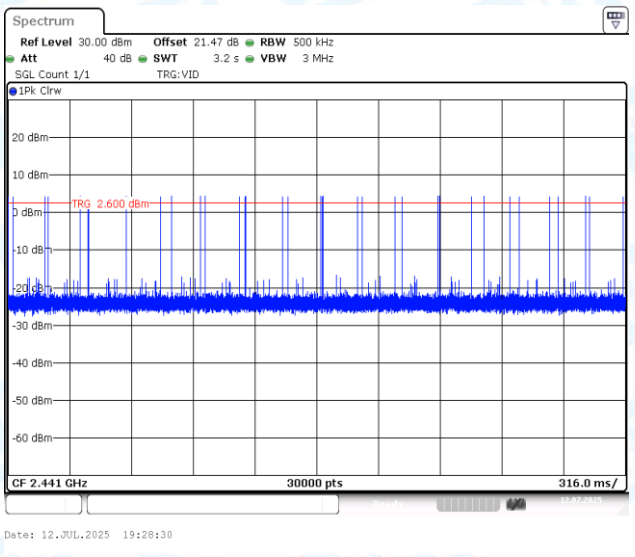

DH1-Ant1-Hop-PASS

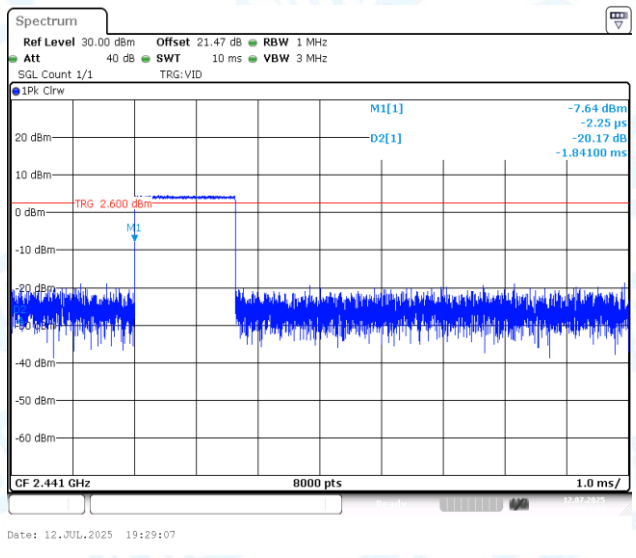

DH3-Ant1-Hop-PASS

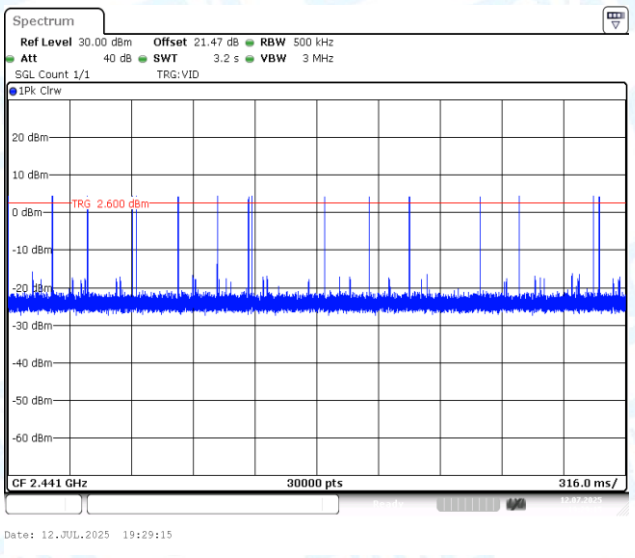

DH3-Ant1-Hop-PASS

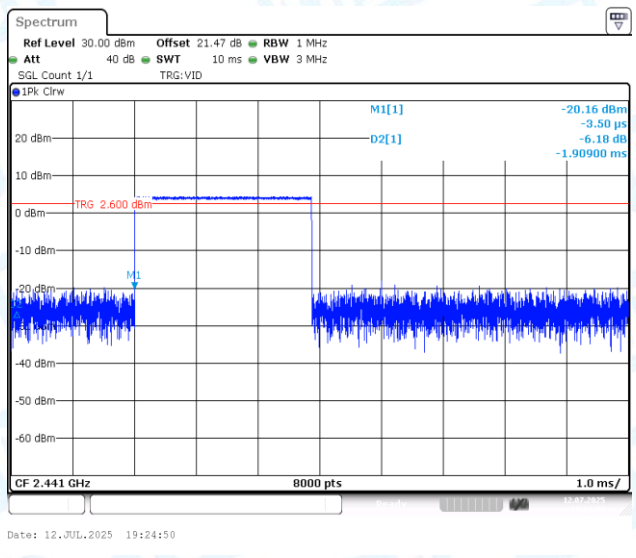

DH5-Ant1-Hop-PASS

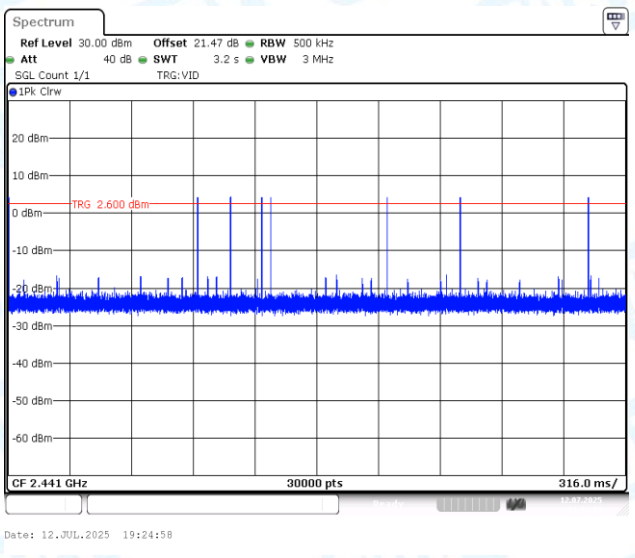

DH5-Ant1-Hop-PASS

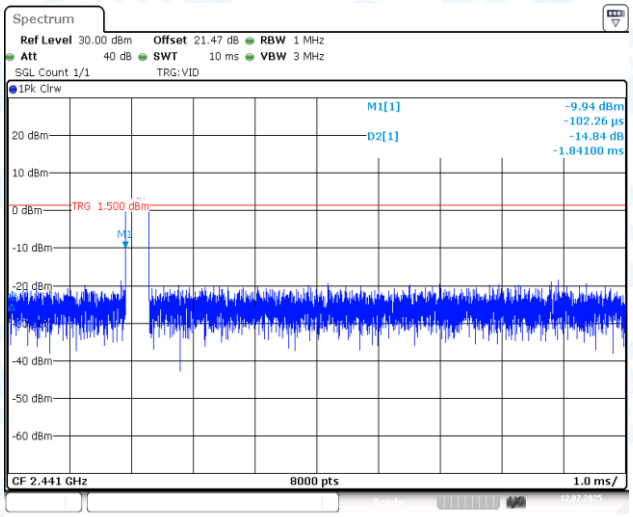

2DH1-Ant1-Hop-PASS

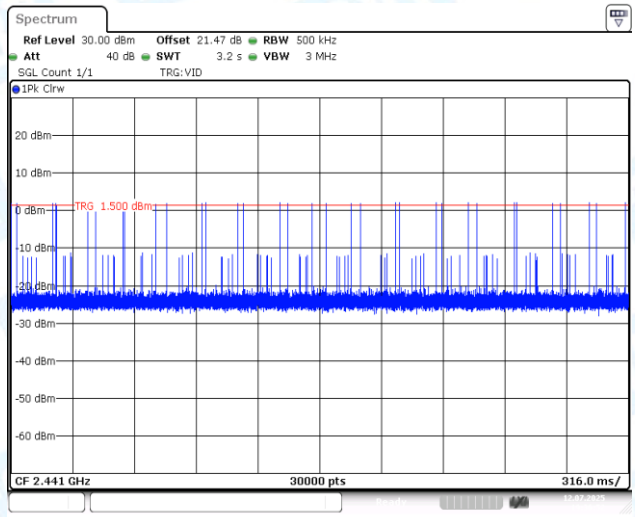

2DH1-Ant1-Hop-PASS

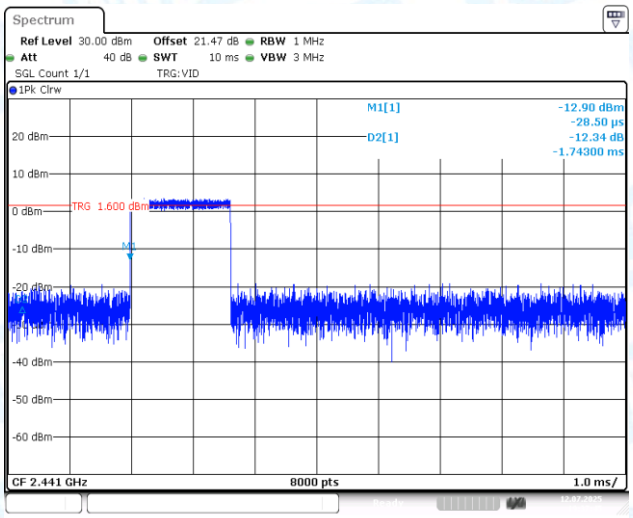

2DH3-Ant1-Hop-PASS

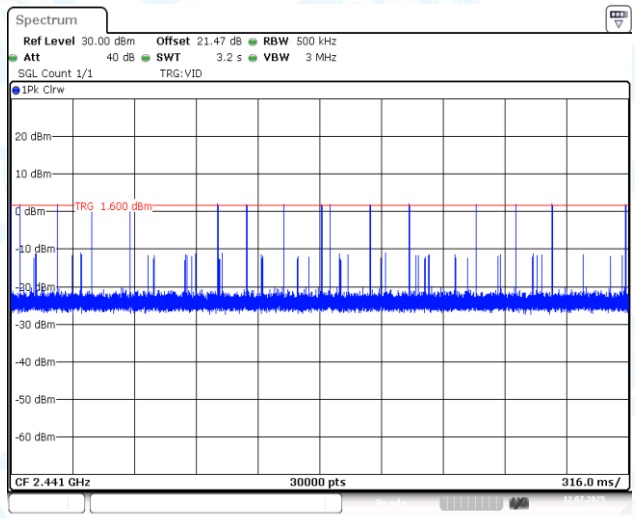

2DH3-Ant1-Hop-PASS

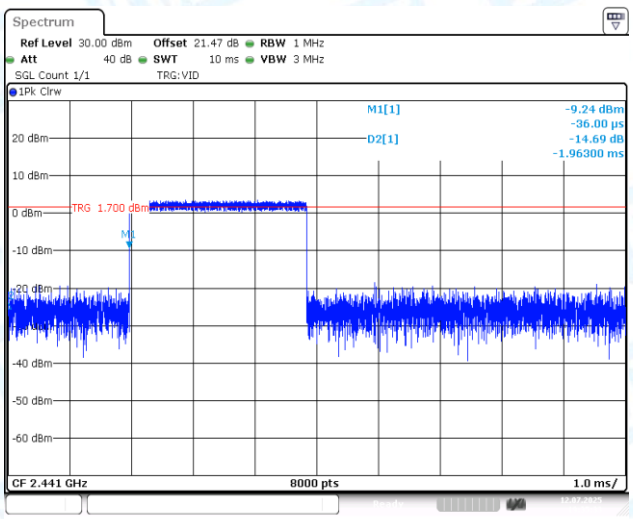

2DH5-Ant1-Hop-PASS

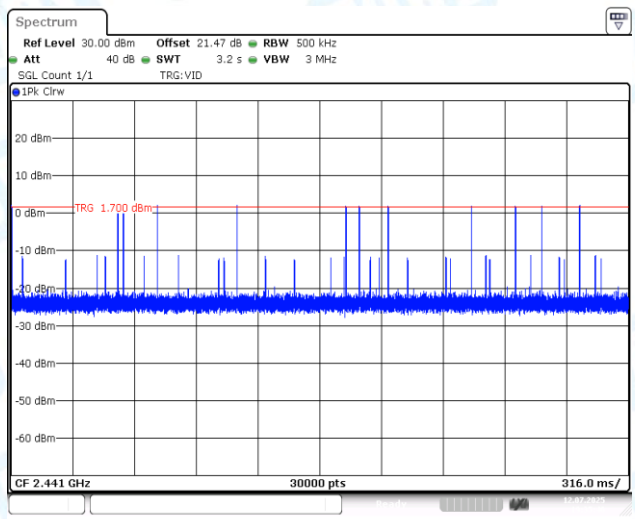

2DH5-Ant1-Hop-PASS

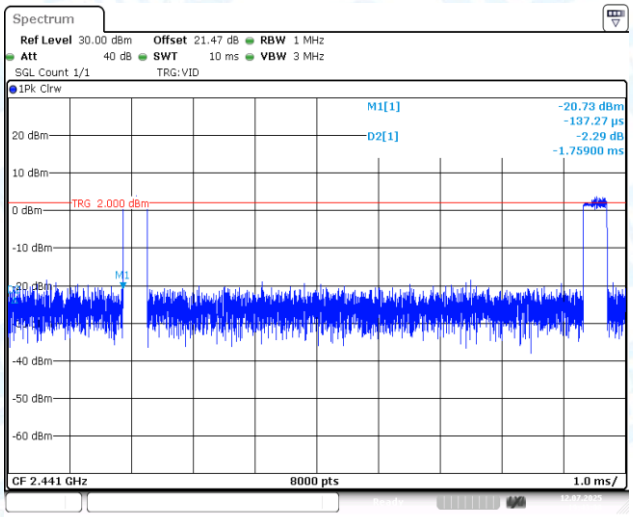

3DH1-Ant1-Hop-PASS

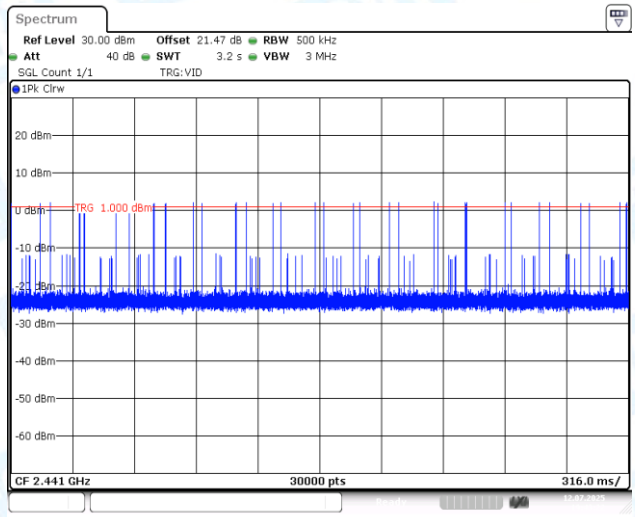

3DH1-Ant1-Hop-PASS

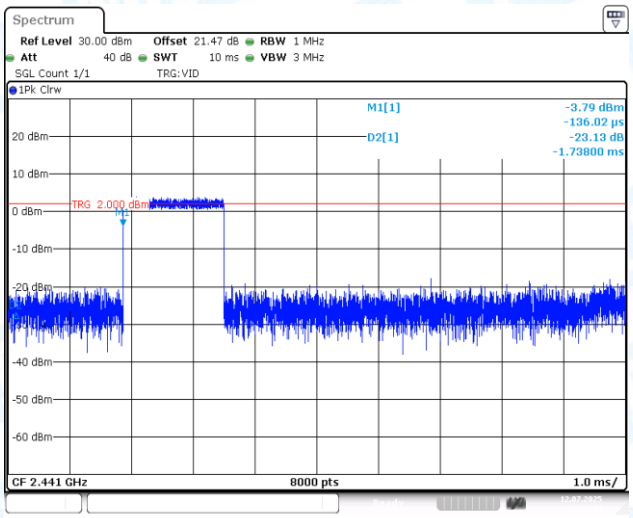

3DH3-Ant1-Hop-PASS

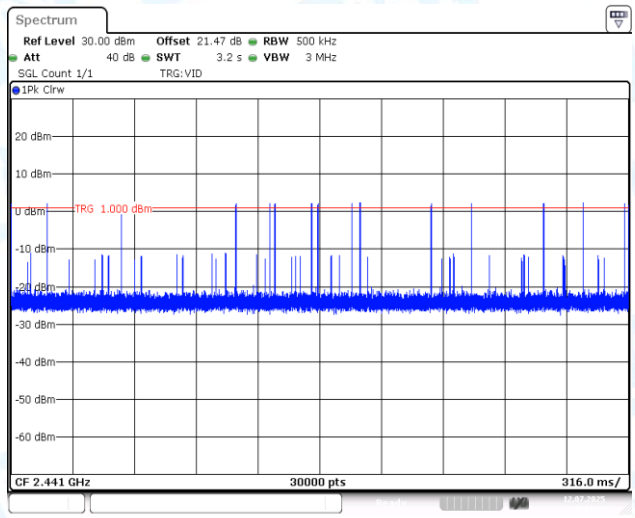

3DH3-Ant1-Hop-PASS

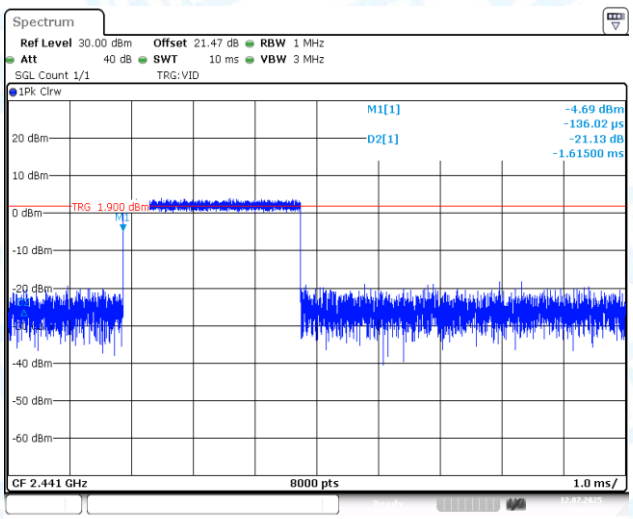

3DH5-Ant1-Hop-PASS

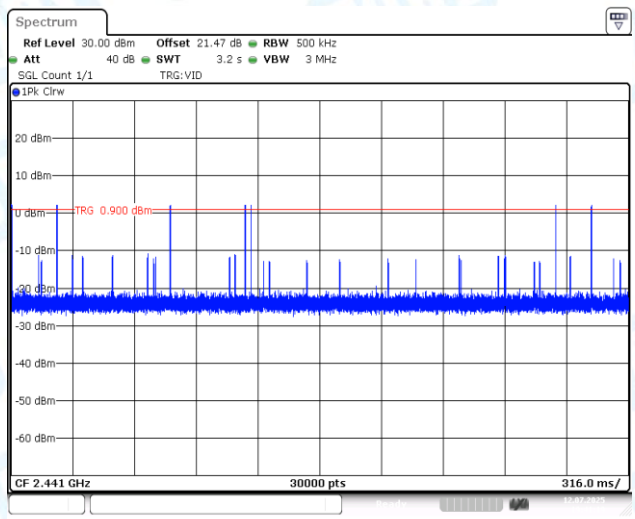

3DH5-Ant1-Hop-PASS

6: Number of hopping channels

6.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

6.2 Test Graphs

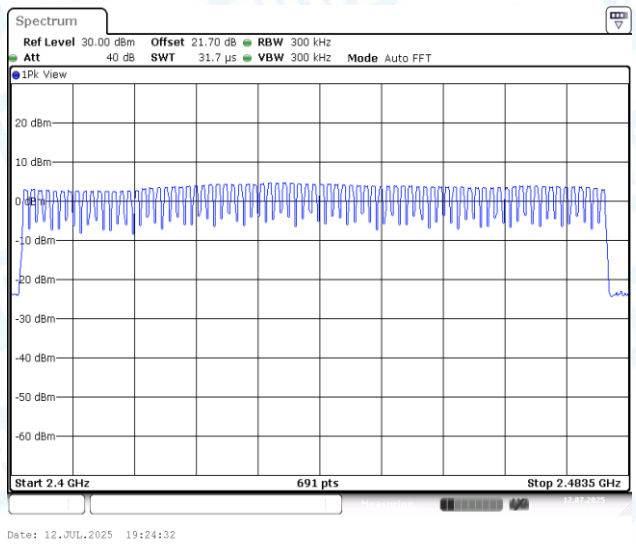

DH5-Ant1-Hop-PASS

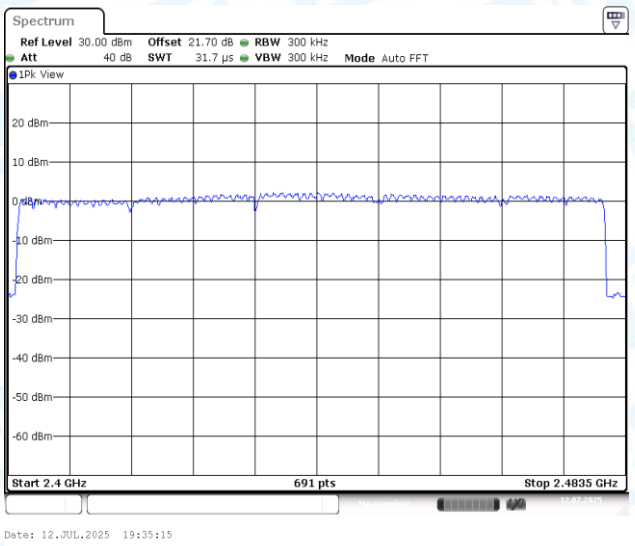

2DH5-Ant1-Hop-PASS

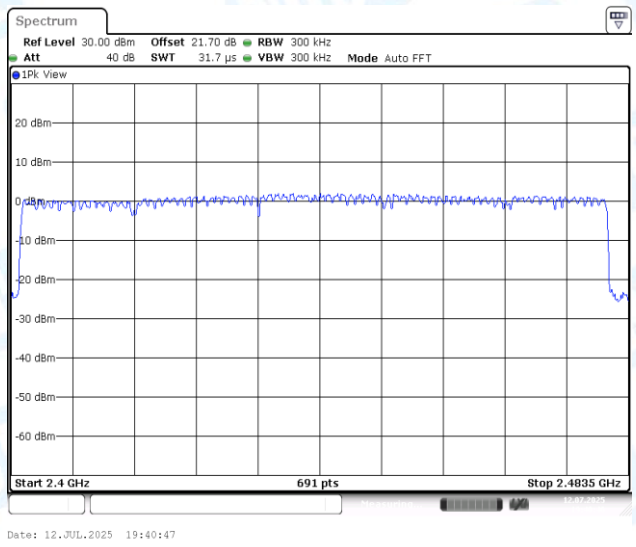

3DH5-Ant1-Hop-PASS

7: Band edge measurements

7.1 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	2.61	-38.45	≤-17.39	PASS
DH5	Ant1	High	2480	2.39	-36.62	≤-17.61	PASS
DH5	Ant1	Low	Hop_2402	1.91	-36.98	≤-18.09	PASS
DH5	Ant1	High	Hop_2480	2.86	-35.51	≤-17.14	PASS
2DH5	Ant1	Low	2402	-0.32	-36.25	≤-20.32	PASS
2DH5	Ant1	High	2480	-0.24	-36.01	≤-20.24	PASS
2DH5	Ant1	Low	Hop_2402	-1.62	-37.9	≤-21.62	PASS
2DH5	Ant1	High	Hop_2480	-0.14	-35.45	≤-20.14	PASS
3DH5	Ant1	Low	2402	-1.83	-38.59	≤-21.83	PASS
3DH5	Ant1	High	2480	0.09	-35.8	≤-19.91	PASS
3DH5	Ant1	Low	Hop_2402	-3.12	-37.59	≤-23.12	PASS
3DH5	Ant1	High	Hop_2480	-1.41	-36.36	≤-21.41	PASS

7.2 Test Graphs

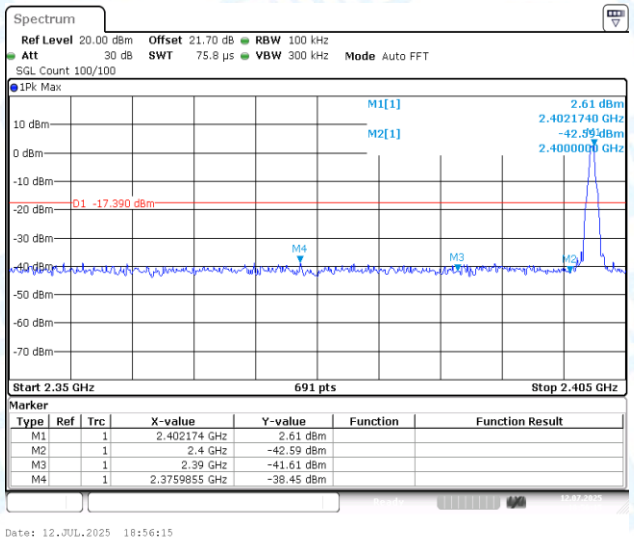

DH5-Ant1-2402-PASS

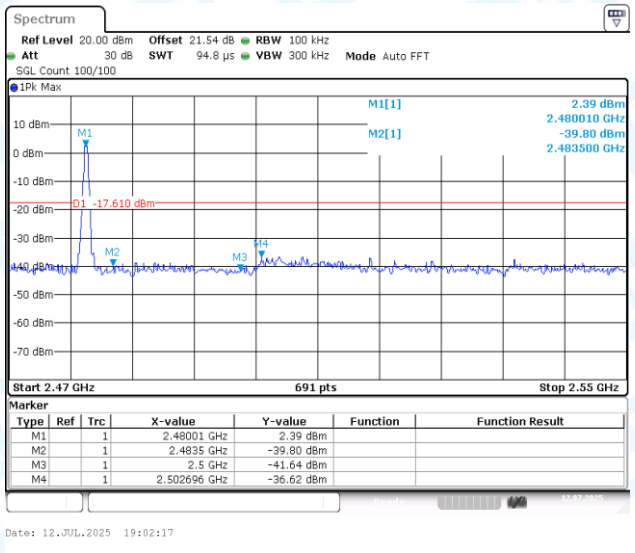

DH5-Ant1-2480-PASS

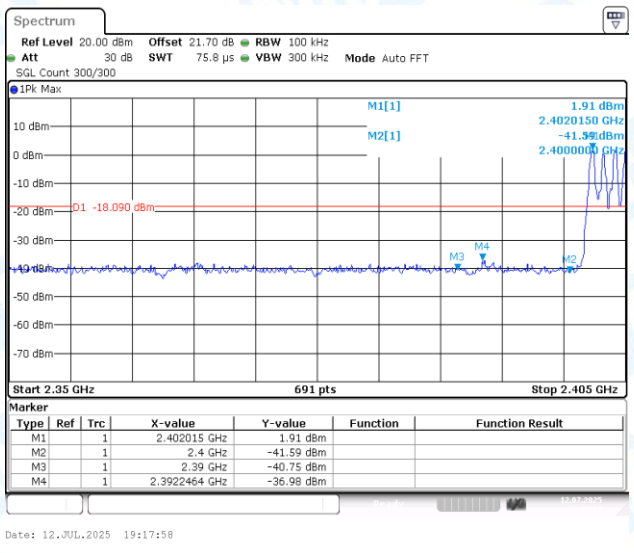

DH5-Ant1-Hop_2402-PASS

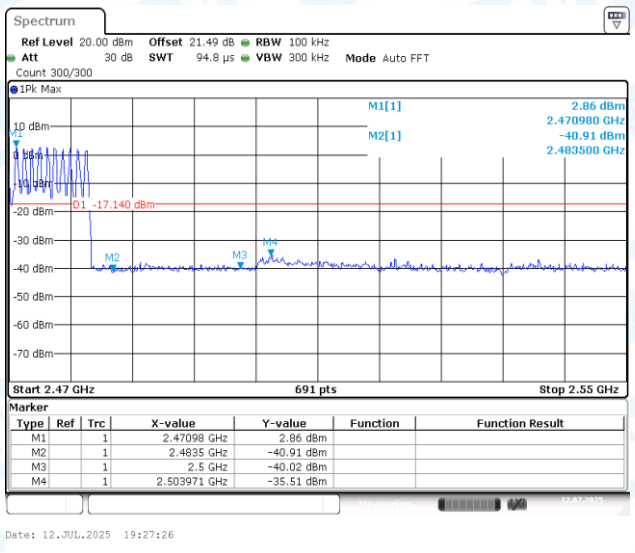

DH5-Ant1-Hop_2480-PASS

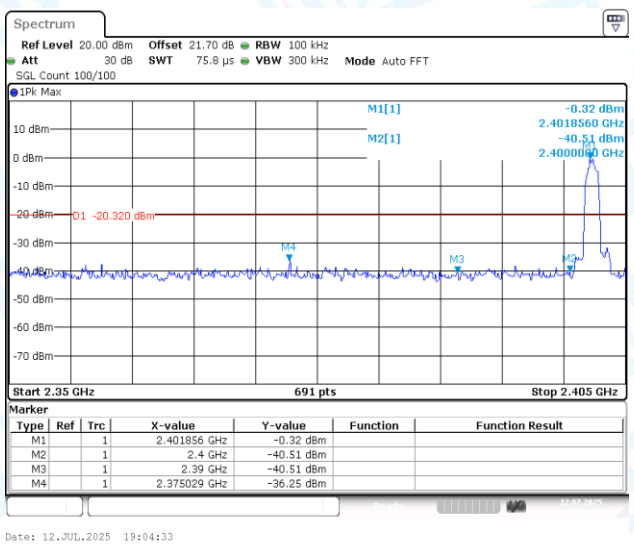

2DH5-Ant1-2402-PASS

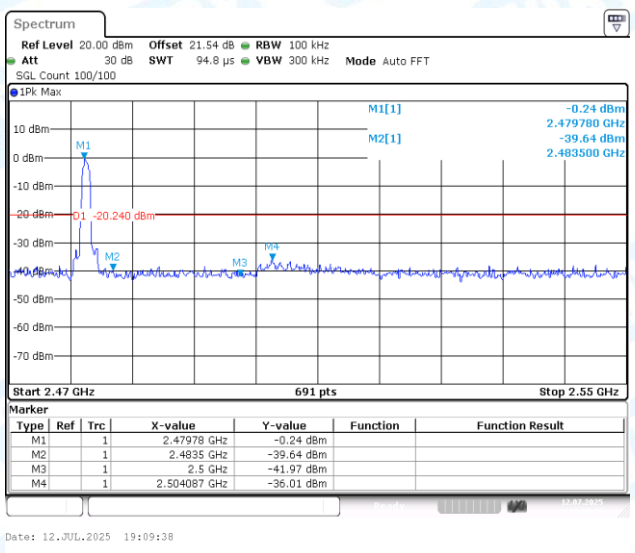

2DH5-Ant1-2480-PASS

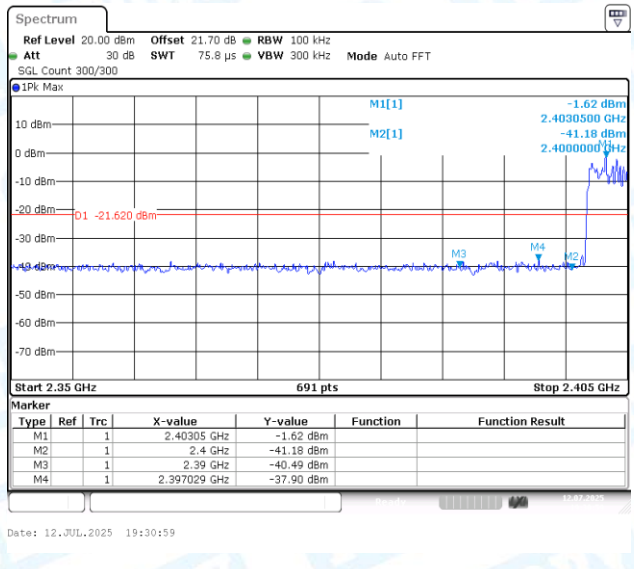

2DH5-Ant1-Hop_2402-PASS

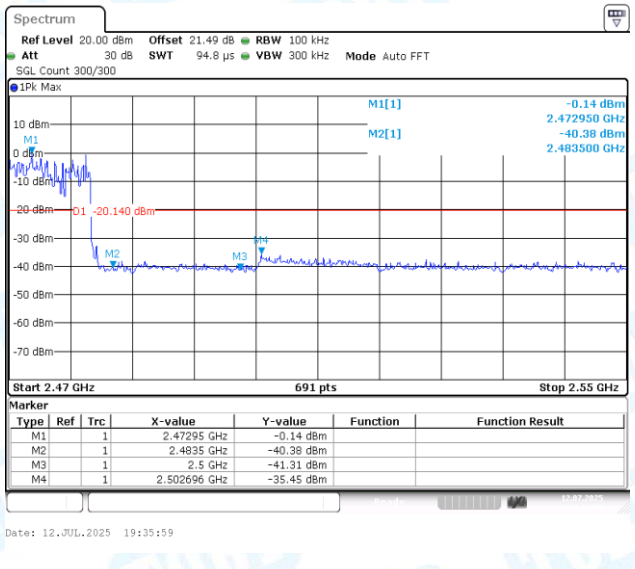

2DH5-Ant1-Hop_2480-PASS

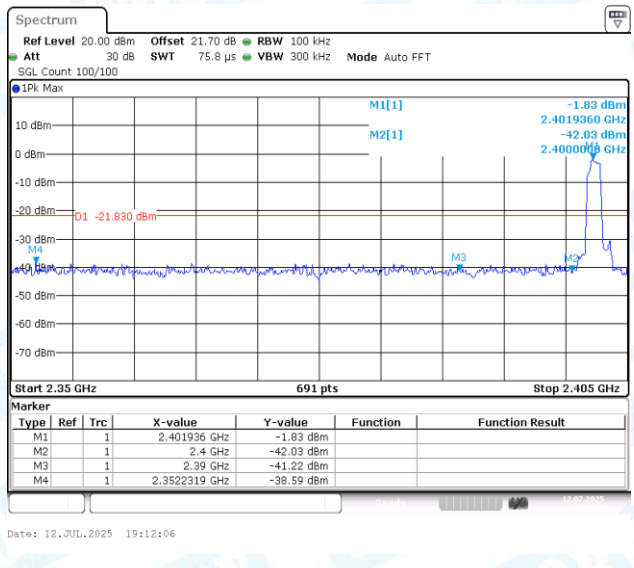

3DH5-Ant1-2402-PASS

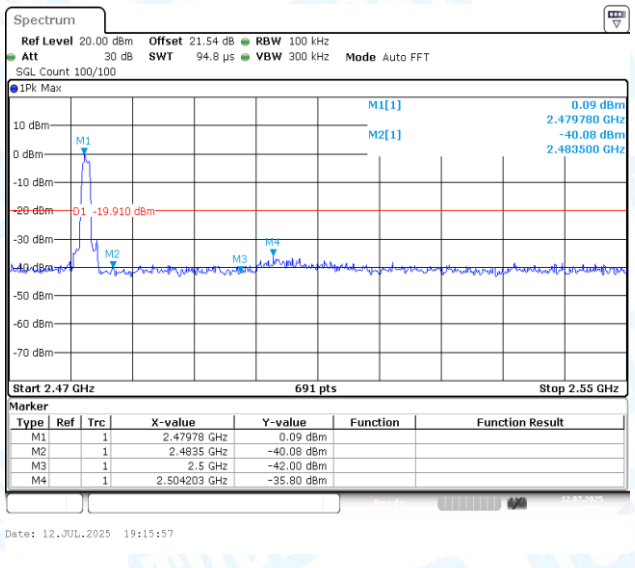

3DH5-Ant1-2480-PASS

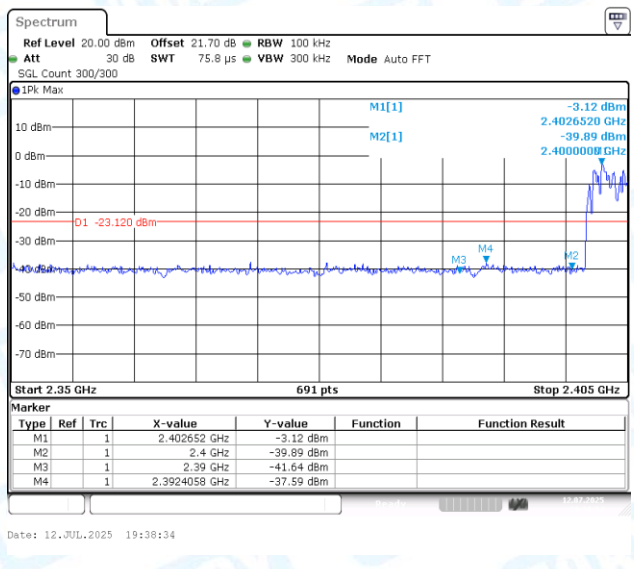

3DH5-Ant1-Hop_2402-PASS

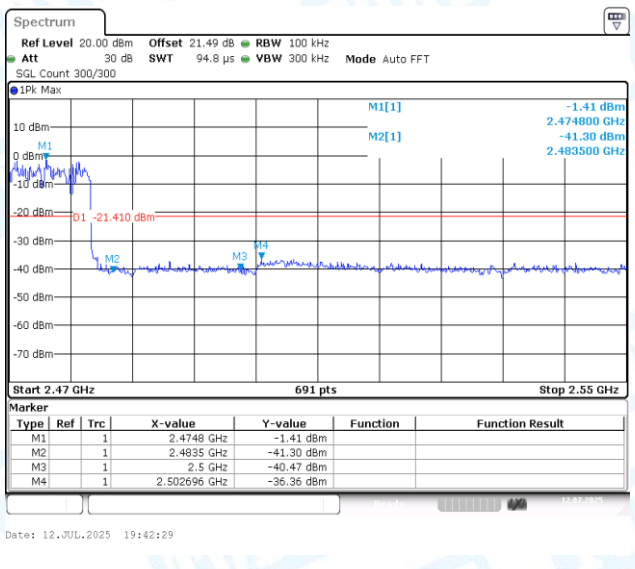

3DH5-Ant1-Hop_2480-PASS

8: Conducted Spurious Emission

8.1 Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	1.40	1.40	---	PASS
DH5	Ant1	2402	30~1000	1.40	-56.56	≤-18.6	PASS
DH5	Ant1	2402	1000~26500	1.40	-50.21	≤-18.6	PASS
DH5	Ant1	2441	0~Reference	2.85	2.85	---	PASS
DH5	Ant1	2441	30~1000	2.85	-56.04	≤-17.15	PASS
DH5	Ant1	2441	1000~26500	2.85	-50.62	≤-17.15	PASS
DH5	Ant1	2480	0~Reference	2.07	2.07	---	PASS
DH5	Ant1	2480	30~1000	2.07	-55.19	≤-17.93	PASS
DH5	Ant1	2480	1000~26500	2.07	-49.92	≤-17.93	PASS
2DH5	Ant1	2402	0~Reference	-1.51	-1.51	---	PASS
2DH5	Ant1	2402	30~1000	-1.51	-55.59	≤-21.51	PASS
2DH5	Ant1	2402	1000~26500	-1.51	-49.85	≤-21.51	PASS
2DH5	Ant1	2441	0~Reference	-1.42	-1.42	---	PASS
2DH5	Ant1	2441	30~1000	-1.42	-56.91	≤-21.42	PASS
2DH5	Ant1	2441	1000~26500	-1.42	-49.95	≤-21.42	PASS
2DH5	Ant1	2480	0~Reference	-1.79	-1.79	---	PASS
2DH5	Ant1	2480	30~1000	-1.79	-54.23	≤-21.79	PASS
2DH5	Ant1	2480	1000~26500	-1.79	-49.4	≤-21.79	PASS
3DH5	Ant1	2402	0~Reference	-2.53	-2.53	---	PASS
3DH5	Ant1	2402	30~1000	-2.53	-55.71	≤-22.53	PASS
3DH5	Ant1	2402	1000~26500	-2.53	-49.54	≤-22.53	PASS
3DH5	Ant1	2441	0~Reference	1.61	1.61	---	PASS
3DH5	Ant1	2441	30~1000	1.61	-55.8	≤-18.39	PASS
3DH5	Ant1	2441	1000~26500	1.61	-49.97	≤-18.39	PASS
3DH5	Ant1	2480	0~Reference	-1.39	-1.39	---	PASS
3DH5	Ant1	2480	30~1000	-1.39	-56.47	≤-21.39	PASS
3DH5	Ant1	2480	1000~26500	-1.39	-50.47	≤-21.39	PASS

8.2 Test Graphs

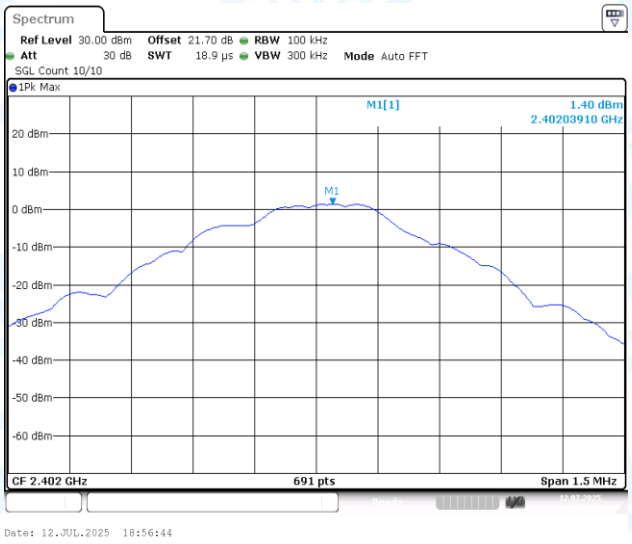

DH5-Ant1-2402-0~Reference-PASS

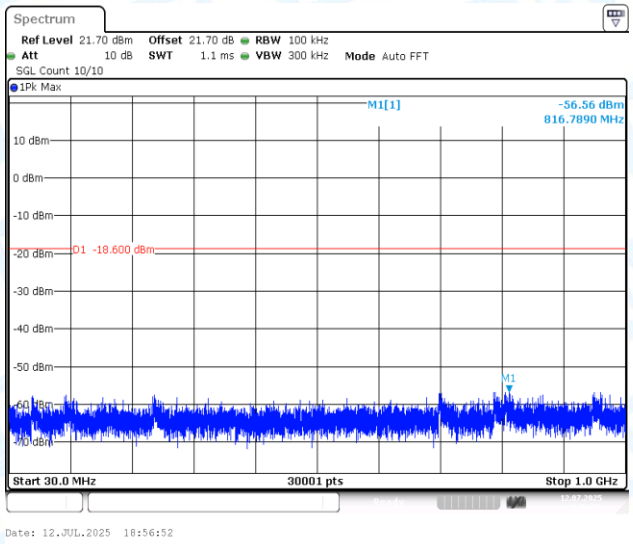

DH5-Ant1-2402-30~1000-PASS

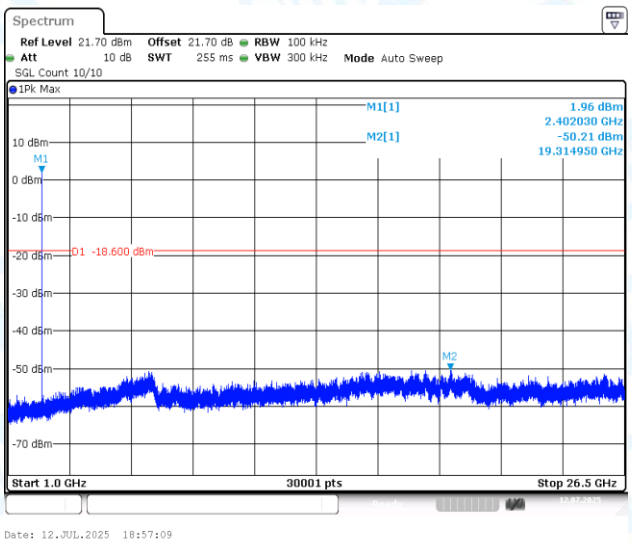

DH5-Ant1-2402-1000~26500-PASS

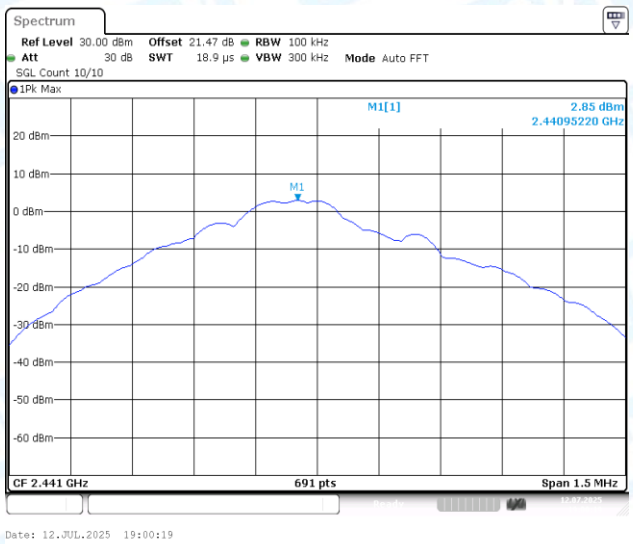

DH5-Ant1-2441-0~Reference-PASS

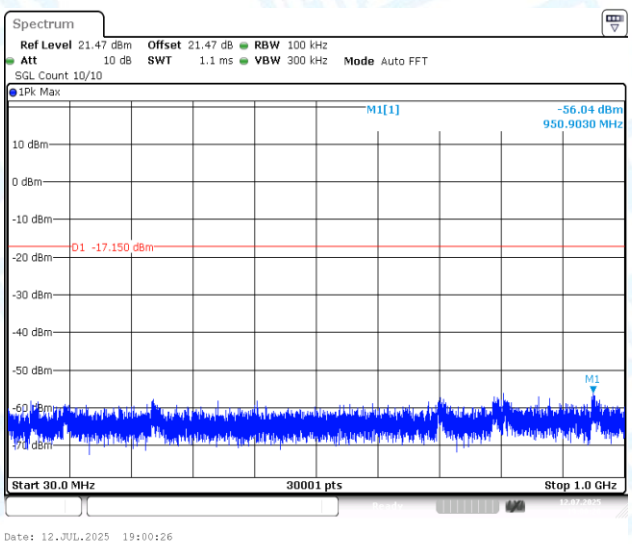

DH5-Ant1-2441-30~1000-PASS

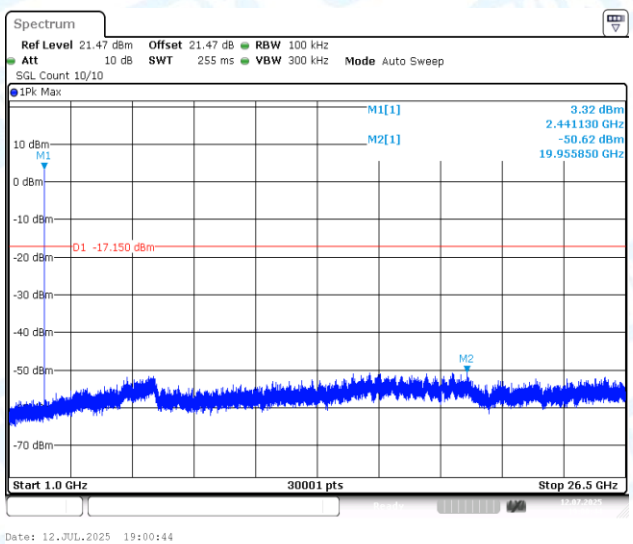

DH5-Ant1-2441-1000~26500-PASS

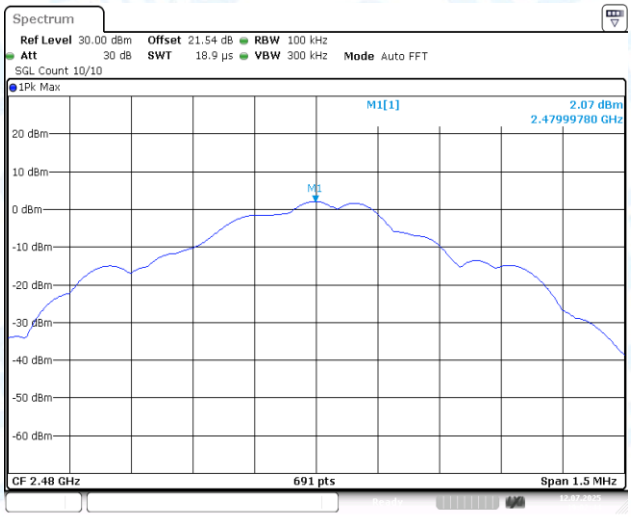

DH5-Ant1-2480-0~Reference-PASS

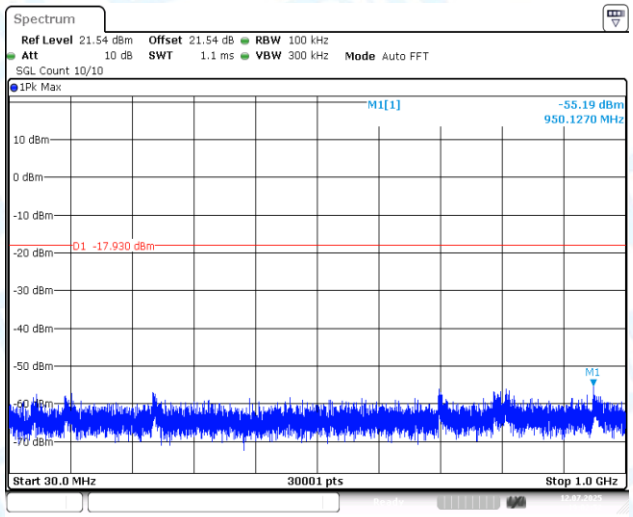

DH5-Ant1-2480-30~1000-PASS

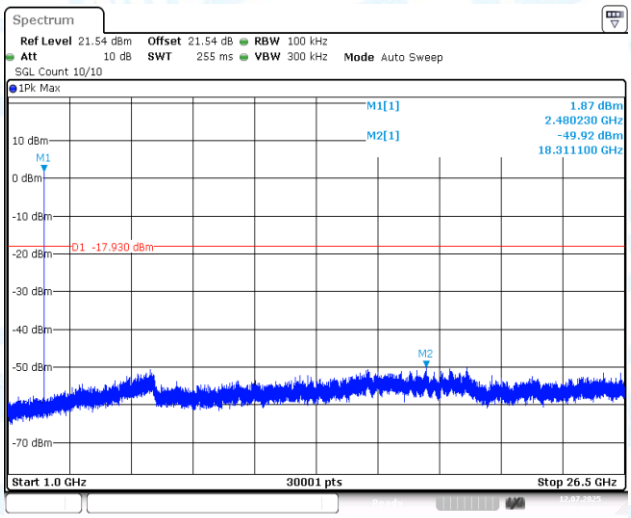

DH5-Ant1-2480-1000~26500-PASS

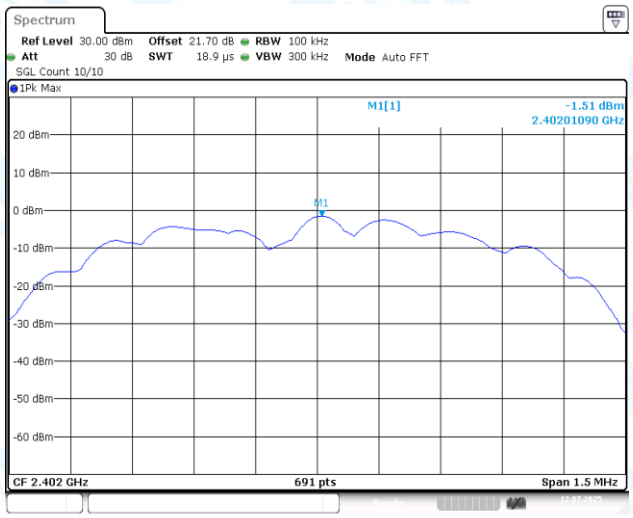

2DH5-Ant1-2402-0~Reference-PASS

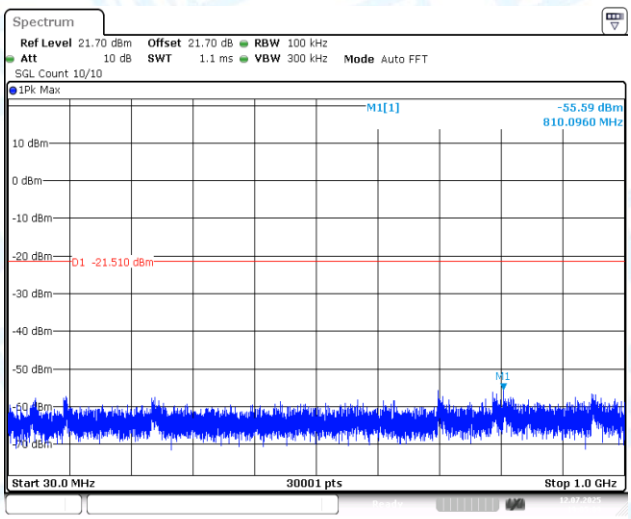

2DH5-Ant1-2402-30~1000-PASS

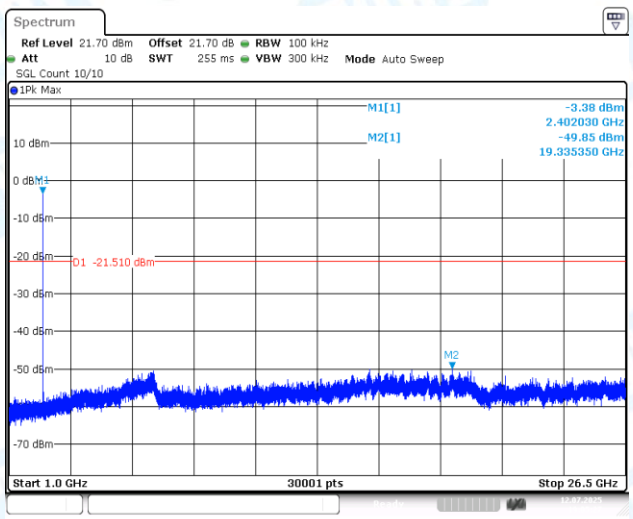

2DH5-Ant1-2402-1000~26500-PASS

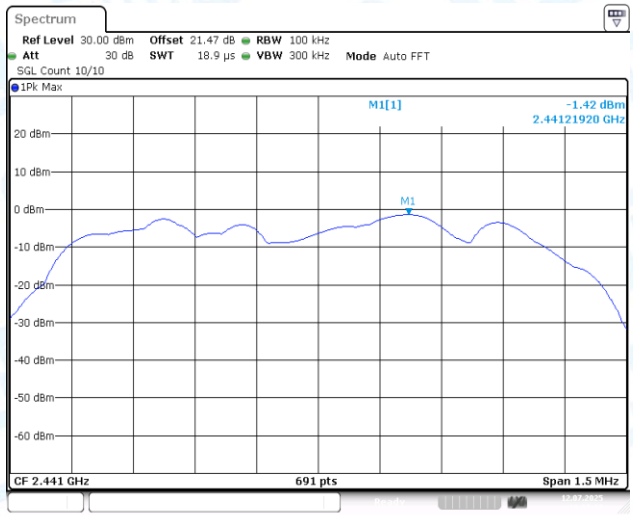

2DH5-Ant1-2441-0~Reference-PASS

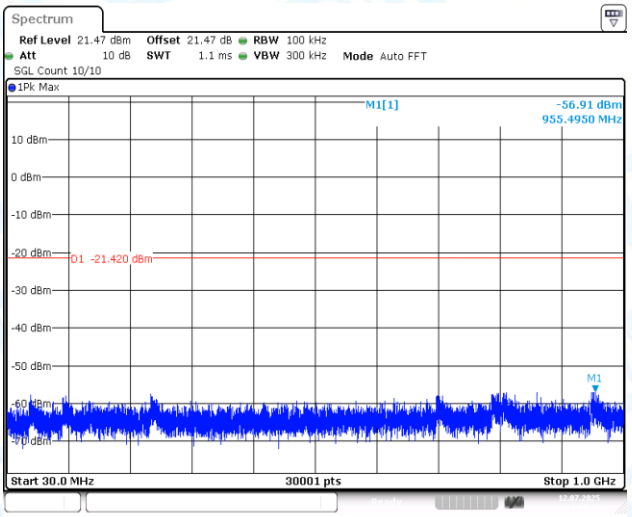

2DH5-Ant1-2441-30~1000-PASS

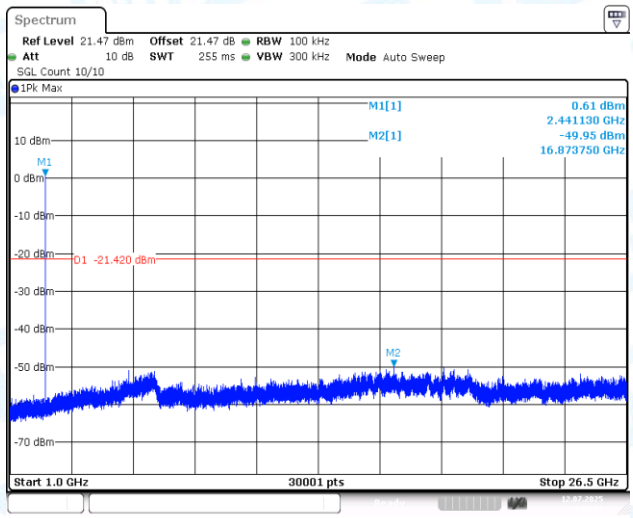

2DH5-Ant1-2441-1000~26500-PASS

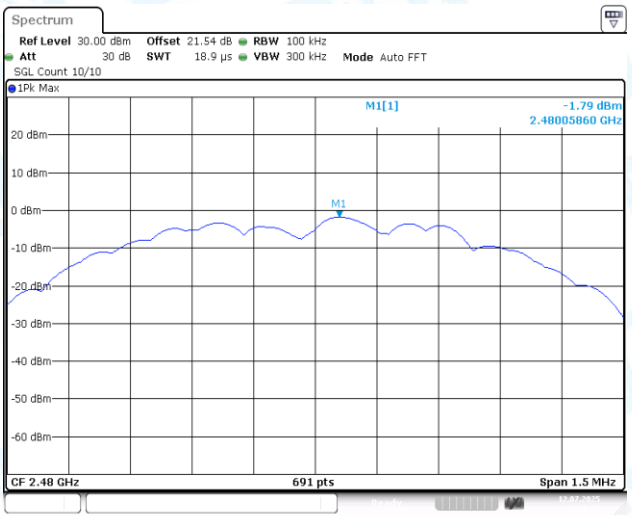

2DH5-Ant1-2480-0~Reference-PASS

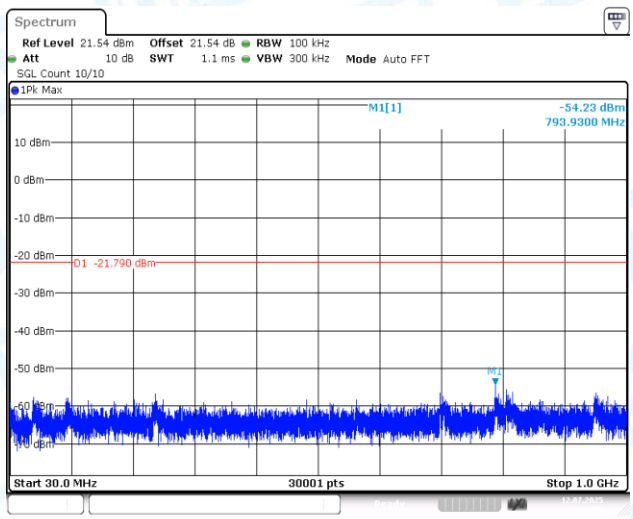

2DH5-Ant1-2480-30~1000-PASS

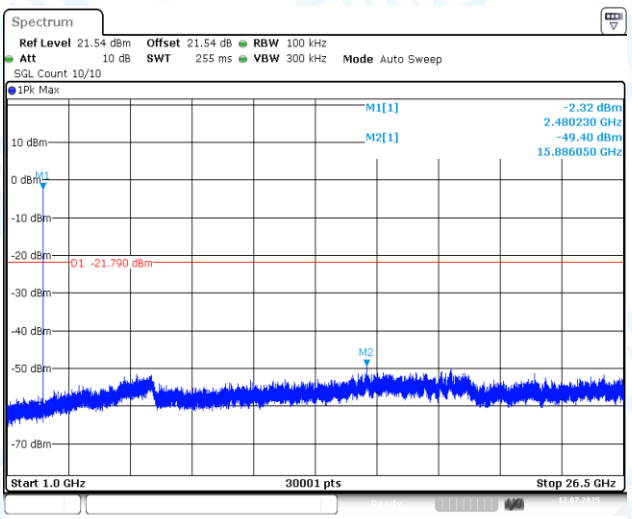

2DH5-Ant1-2480-1000~26500-PASS

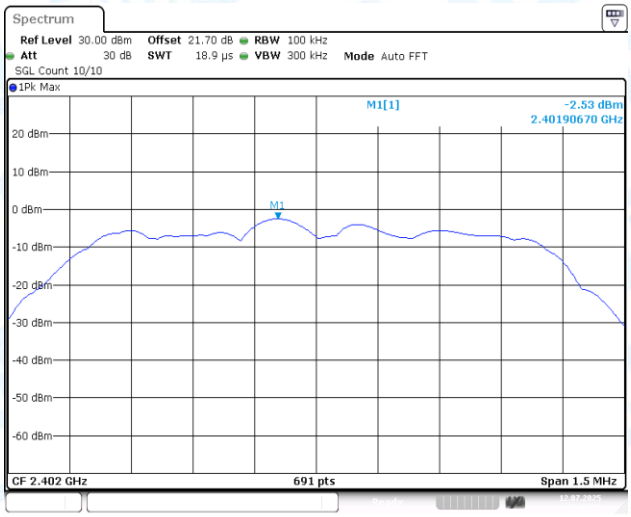

3DH5-Ant1-2402-0~Reference-PASS

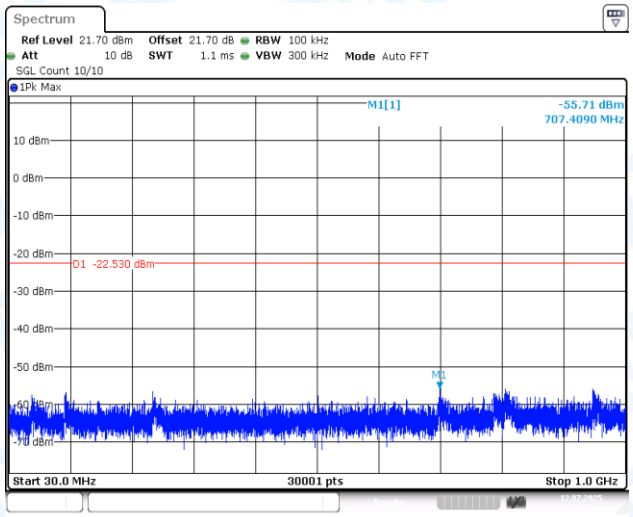

3DH5-Ant1-2402-30~1000-PASS

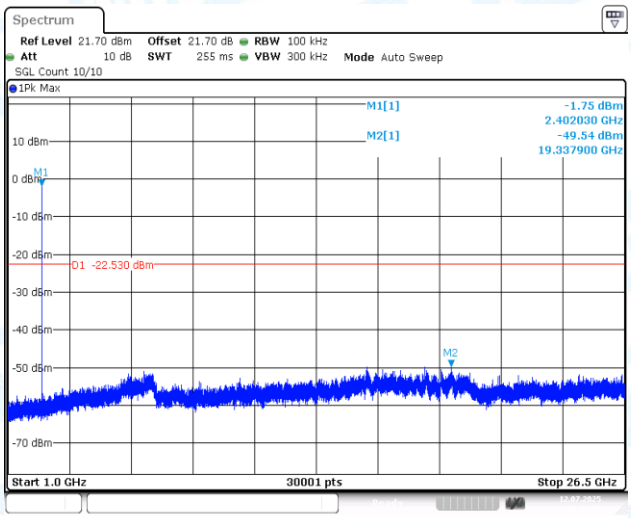

3DH5-Ant1-2402-1000~26500-PASS

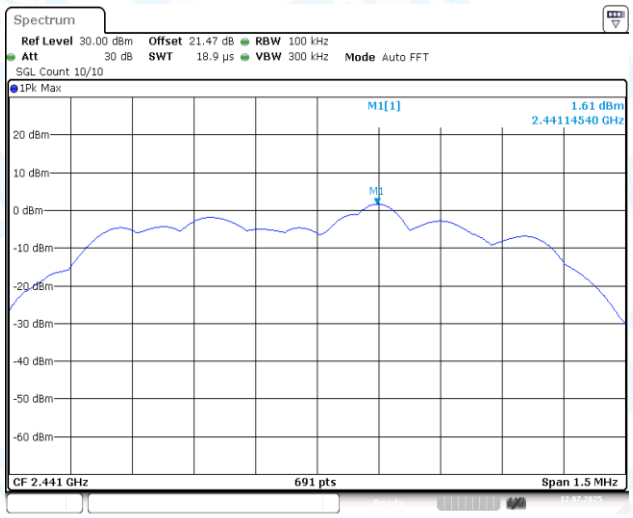

3DH5-Ant1-2441-0~Reference-PASS

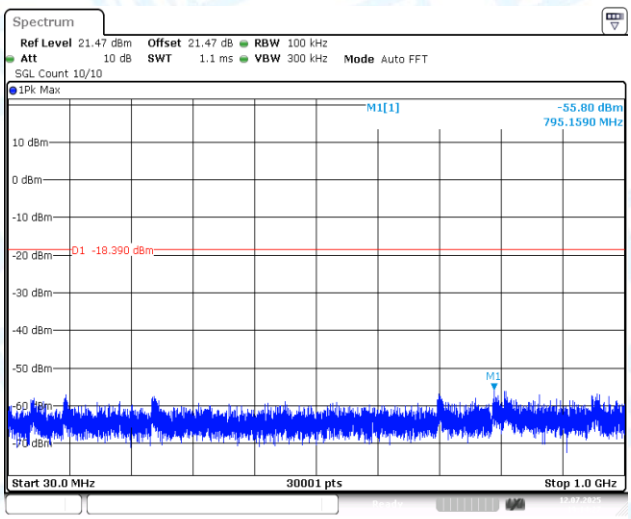

3DH5-Ant1-2441-30~1000-PASS

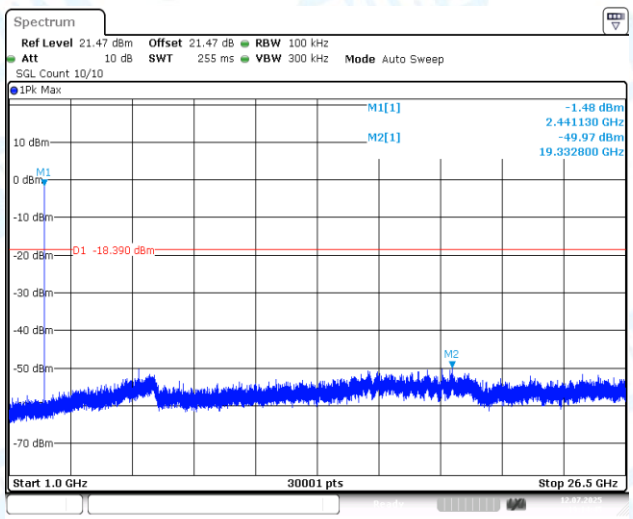

3DH5-Ant1-2441-1000~26500-PASS

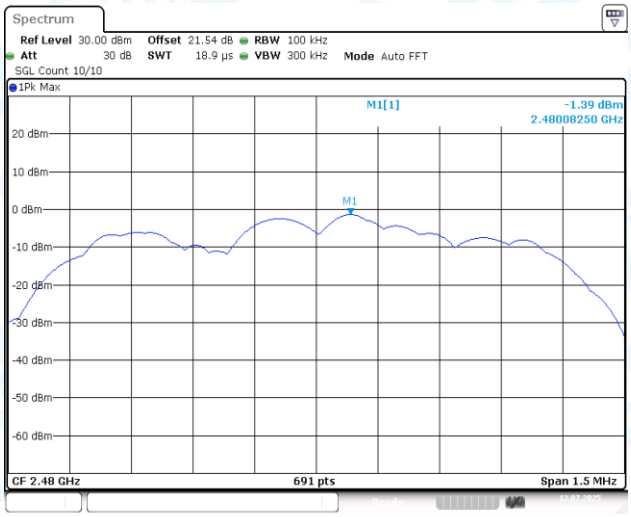

3DH5-Ant1-2480-0~Reference-PASS

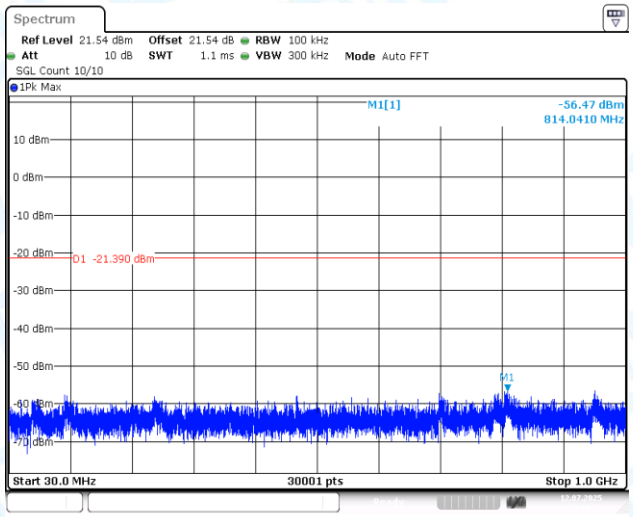

3DH5-Ant1-2480-30~1000-PASS

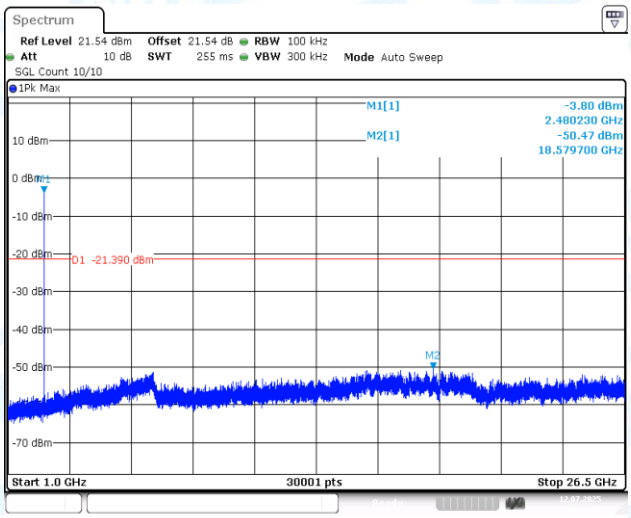

3DH5-Ant1-2480-1000~26500-PASS

9: Duty Cycle

9.1 Test Result

TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factory	1/T [kHz]
DH5	Ant1	2402	2.89	3.75	77.07	1.13	0.35
DH5	Ant1	2441	2.89	3.75	77.07	1.13	0.35
DH5	Ant1	2480	2.89	3.76	76.86	1.14	0.35
2DH5	Ant1	2402	2.89	3.75	77.07	1.13	0.35
2DH5	Ant1	2441	2.89	3.75	77.07	1.13	0.35
2DH5	Ant1	2480	2.89	3.76	76.86	1.14	0.35
3DH5	Ant1	2402	2.89	3.75	77.07	1.13	0.35
3DH5	Ant1	2441	2.89	3.75	77.07	1.13	0.35
3DH5	Ant1	2480	2.89	3.75	77.07	1.13	0.35

Note: 1, Duty Cycle= Transmission Duration/ Transmission Period

2, DC Factory=$10*Log_{10}(1/\text{Duty Cycle})$

3, 1/T=1/ Transmission Duration

9.2 Test Graphs

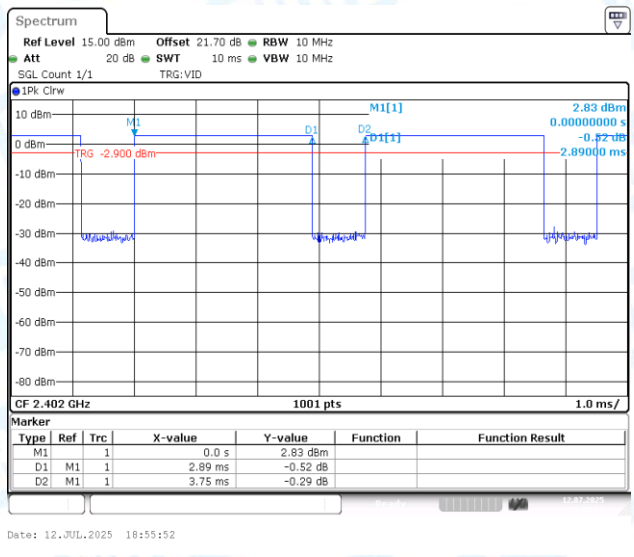

NTNV-DH5-Ant1-2402

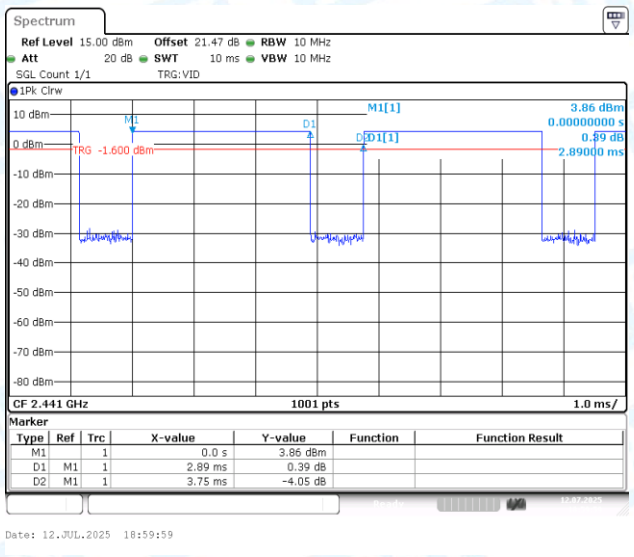

NTNV-DH5-Ant1-2441

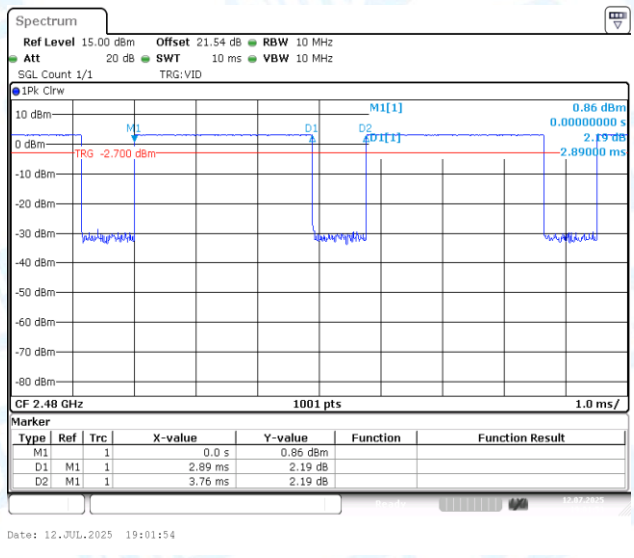

NTNV-DH5-Ant1-2480

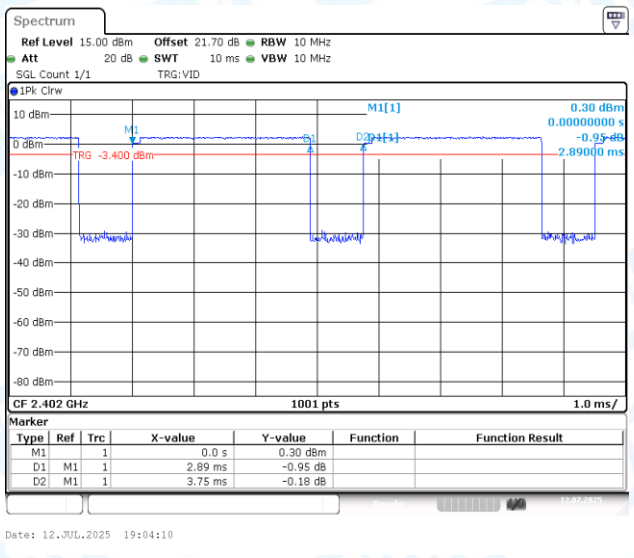

NTNV-2DH5-Ant1-2402

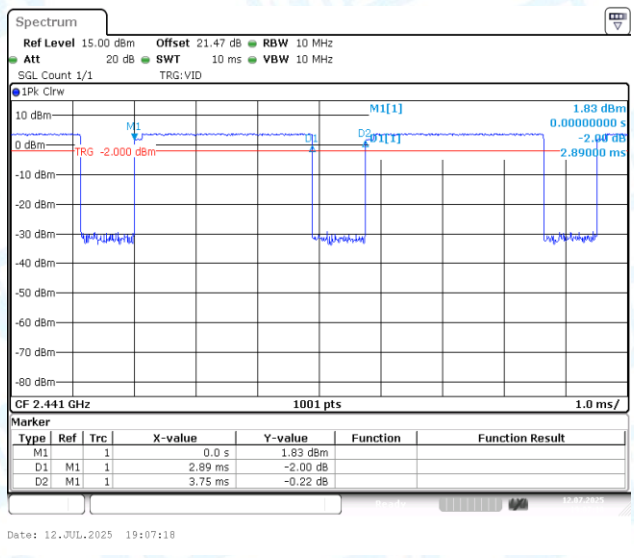

NTNV-2DH5-Ant1-2441

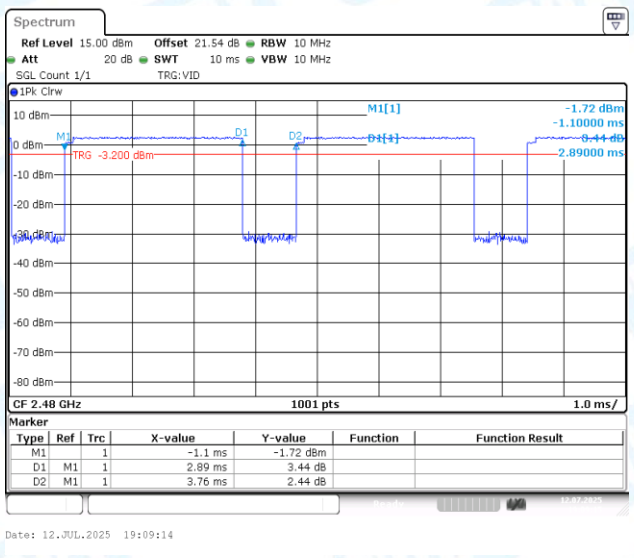

NTNV-2DH5-Ant1-2480

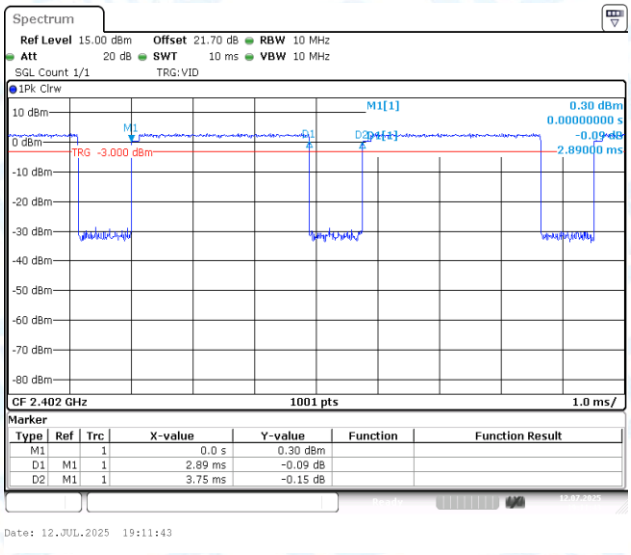

NTNV-3DH5-Ant1-2402

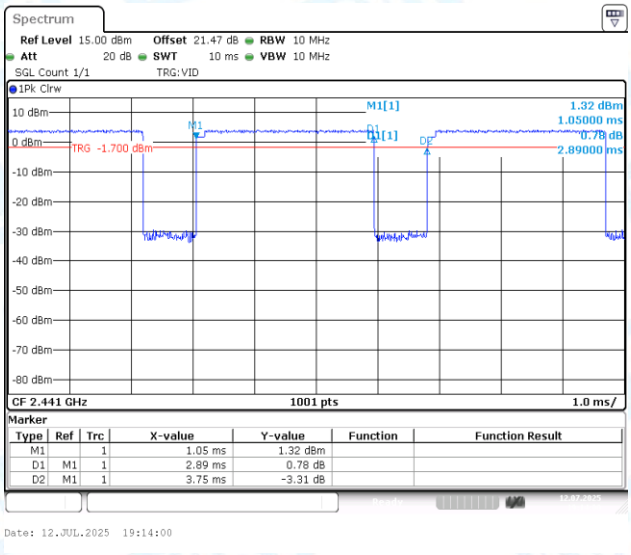

NTNV-3DH5-Ant1-2441

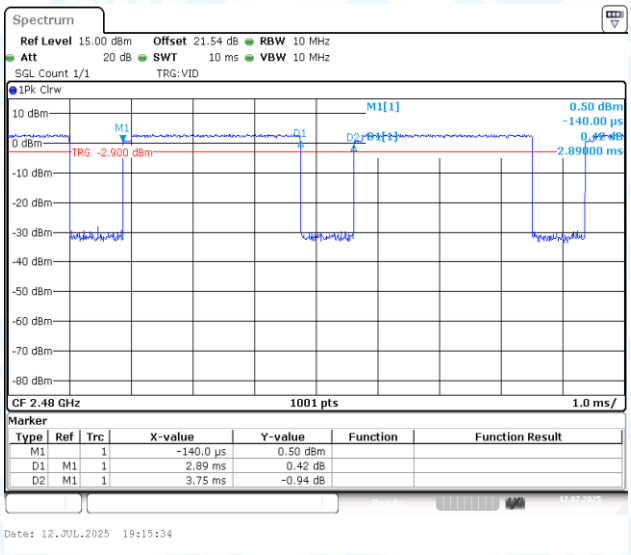

NTNV-3DH5-Ant1-2480

10: Emissions in Restricted Bands

10.1 Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
DH5	Ant1	Low	2402	Peak	2390.000	-40.34	≤-21.20	54.86	≤74	PASS
DH5	Ant1	Low	2402	Peak	2310.000	-39.78	≤-21.20	55.42	≤74	PASS
DH5	Ant1	Low	2402	Peak	2349.304	-36.54	≤-21.20	58.66	≤74	PASS
DH5	Ant1	Low	2402	AV	2390.000	-46.73	≤-41.20	48.47	≤54	PASS
DH5	Ant1	Low	2402	AV	2310.000	-46.25	≤-41.20	48.95	≤54	PASS
DH5	Ant1	Low	2402	AV	2341.543	-44.65	≤-41.20	50.55	≤54	PASS
DH5	Ant1	High	2480	Peak	2483.500	-41.57	≤-21.20	53.63	≤74	PASS
DH5	Ant1	High	2480	Peak	2500.000	-38.17	≤-21.20	57.03	≤74	PASS
DH5	Ant1	High	2480	Peak	2492.841	-37.99	≤-21.20	57.21	≤74	PASS
DH5	Ant1	High	2480	AV	2483.500	-46.75	≤-41.20	48.45	≤54	PASS
DH5	Ant1	High	2480	AV	2500.000	-47.11	≤-41.20	48.09	≤54	PASS
DH5	Ant1	High	2480	AV	2498.174	-46.25	≤-41.20	48.95	≤54	PASS
2DH5	Ant1	Low	2402	Peak	2390.000	-39.26	≤-21.20	55.94	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2310.000	-41.66	≤-21.20	53.54	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2339.870	-36.13	≤-21.20	59.07	≤74	PASS
2DH5	Ant1	Low	2402	AV	2390.000	-47.04	≤-41.20	48.16	≤54	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-47.05	≤-41.20	48.15	≤54	PASS
2DH5	Ant1	Low	2402	AV	2340.022	-44.31	≤-41.20	50.89	≤54	PASS
2DH5	Ant1	High	2480	Peak	2483.500	-41.52	≤-21.20	53.68	≤74	PASS
2DH5	Ant1	High	2480	Peak	2500.000	-40.43	≤-21.20	54.77	≤74	PASS
2DH5	Ant1	High	2480	Peak	2484.377	-36.68	≤-21.20	58.52	≤74	PASS
2DH5	Ant1	High	2480	AV	2483.500	-47.23	≤-41.20	47.97	≤54	PASS
2DH5	Ant1	High	2480	AV	2500.000	-46.87	≤-41.20	48.33	≤54	PASS
2DH5	Ant1	High	2480	AV	2489.942	-45.66	≤-41.20	49.54	≤54	PASS
3DH5	Ant1	Low	2402	Peak	2390.000	-40.9	≤-21.20	54.30	≤74	PASS
3DH5	Ant1	Low	2402	Peak	2310.000	-39.29	≤-21.20	55.91	≤74	PASS
3DH5	Ant1	Low	2402	Peak	2341.087	-36.23	≤-21.20	58.97	≤74	PASS
3DH5	Ant1	Low	2402	AV	2390.000	-47.13	≤-41.20	48.07	≤54	PASS
3DH5	Ant1	Low	2402	AV	2310.000	-46.28	≤-41.20	48.92	≤54	PASS
3DH5	Ant1	Low	2402	AV	2340.022	-43.84	≤-41.20	51.36	≤54	PASS
3DH5	Ant1	High	2480	Peak	2483.500	-41.94	≤-21.20	53.26	≤74	PASS
3DH5	Ant1	High	2480	Peak	2500.000	-40.2	≤-21.20	55.00	≤74	PASS
3DH5	Ant1	High	2480	Peak	2499.101	-37.72	≤-21.20	57.48	≤74	PASS
3DH5	Ant1	High	2480	AV	2483.500	-46.19	≤-41.20	49.01	≤54	PASS
3DH5	Ant1	High	2480	AV	2500.000	-46.69	≤-41.20	48.51	≤54	PASS
3DH5	Ant1	High	2480	AV	2483.913	-45.07	≤-41.20	50.13	≤54	PASS

Note：

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

10.2 Test Graphs

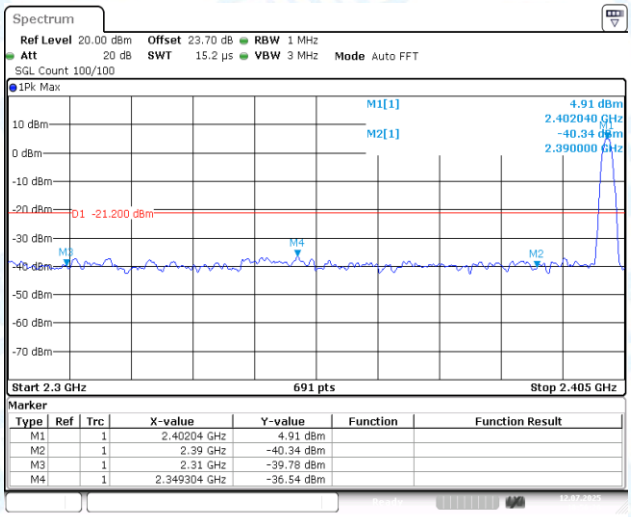

DH5-Ant1-2402-PASS

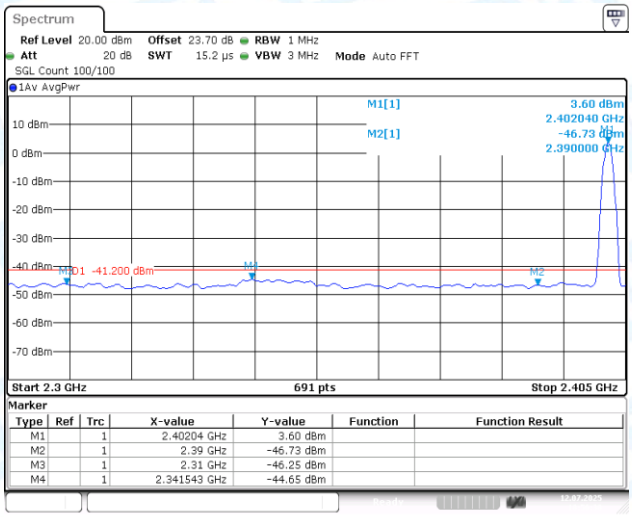

DH5-Ant1-2402-PASS

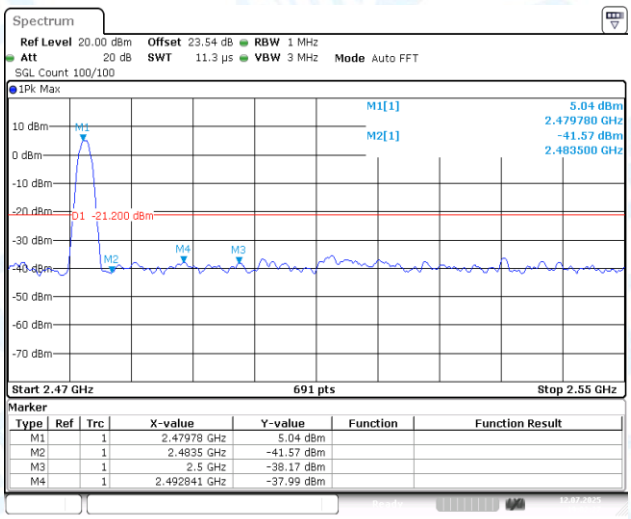

DH5-Ant1-2480-PASS

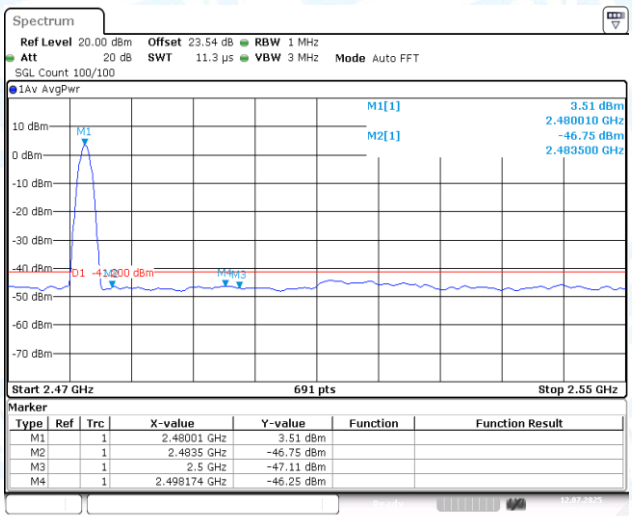

DH5-Ant1-2480-PASS

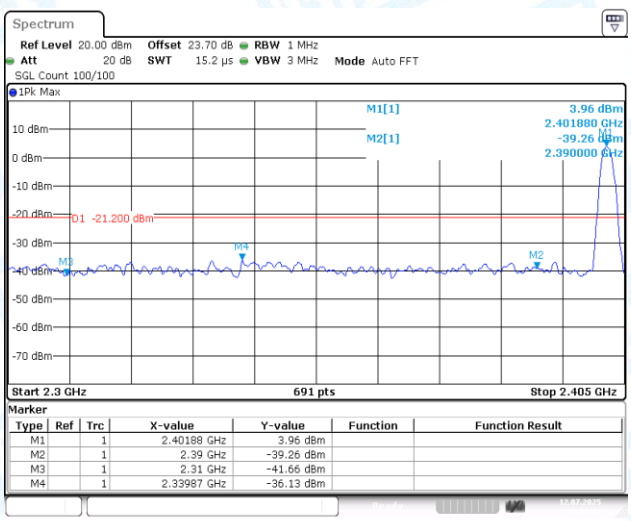

2DH5-Ant1-2402-PASS

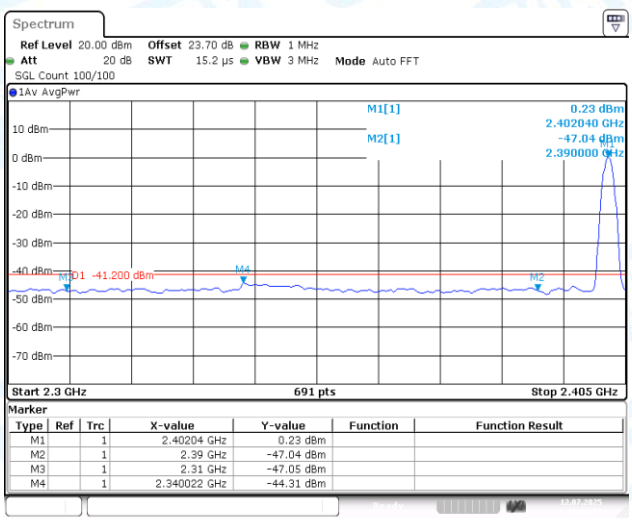

2DH5-Ant1-2402-PASS

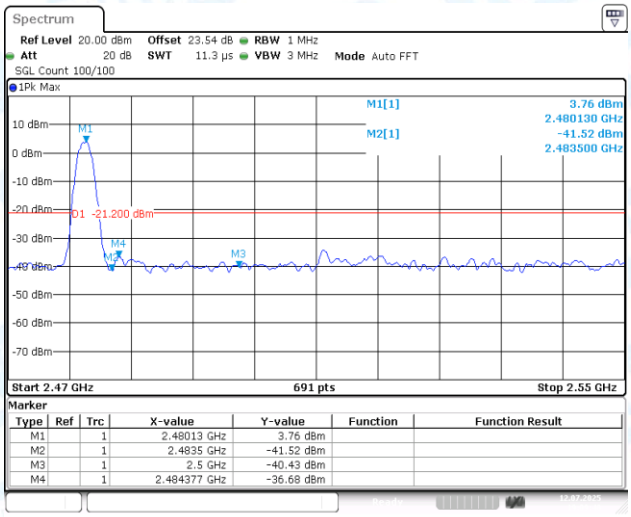

2DH5-Ant1-2480-PASS

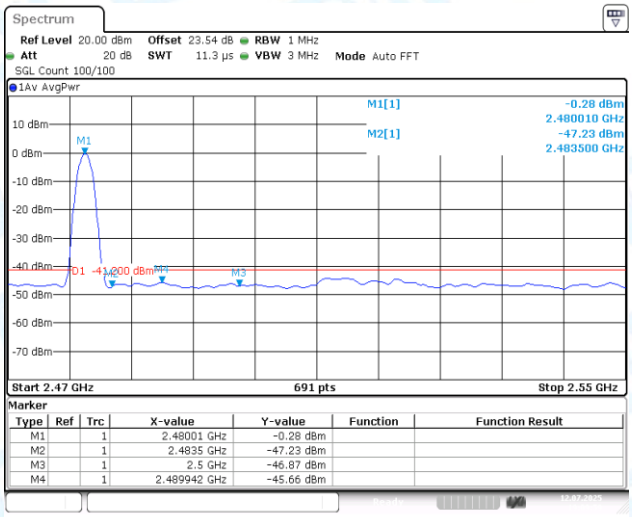

2DH5-Ant1-2480-PASS

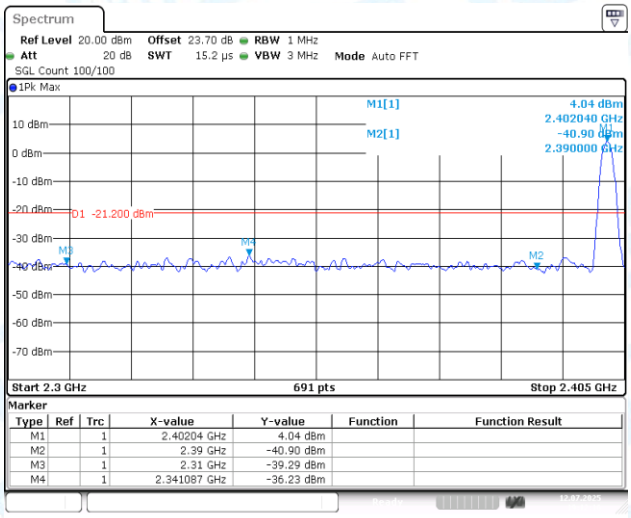

3DH5-Ant1-2402-PASS

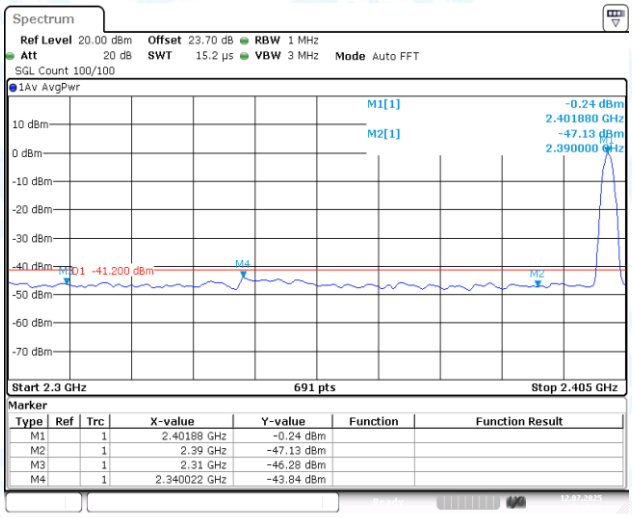

3DH5-Ant1-2402-PASS

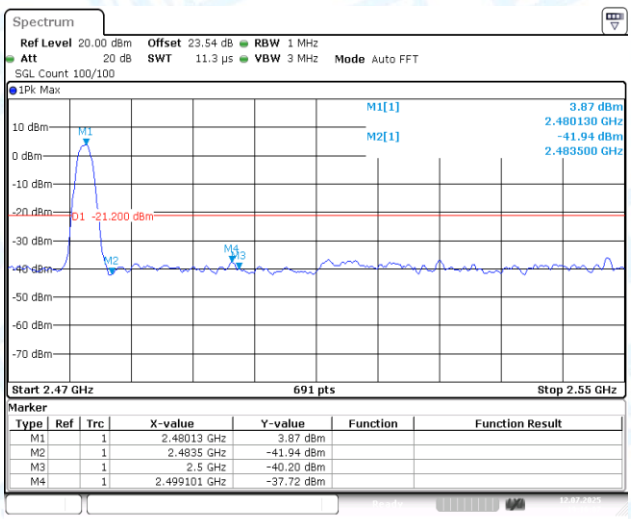

3DH5-Ant1-2480-PASS

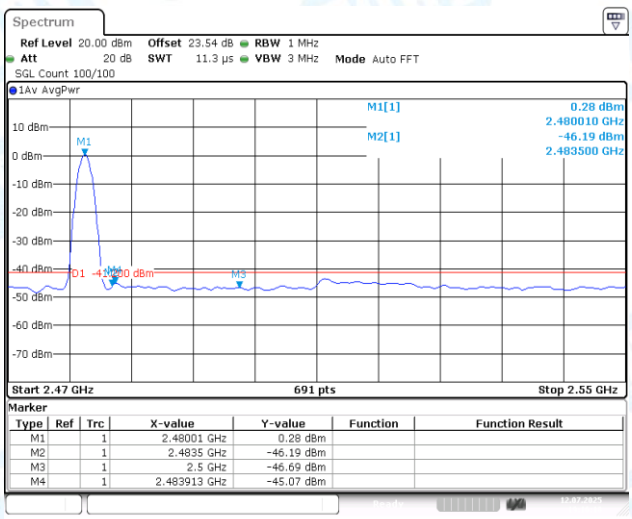

3DH5-Ant1-2480-PASS

-----END OF THE REPORT-----