



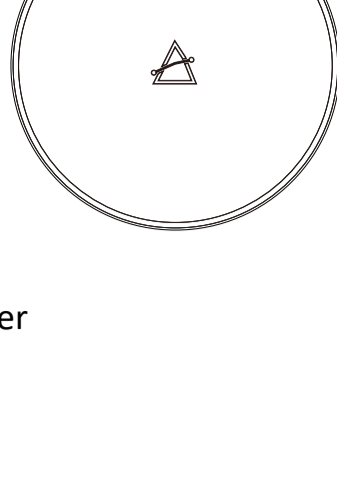


# Quick Start Guide



Wi-Fi 6 AX3000 Dual-Radio Indoor Router  
Model: MI14


## Your AP

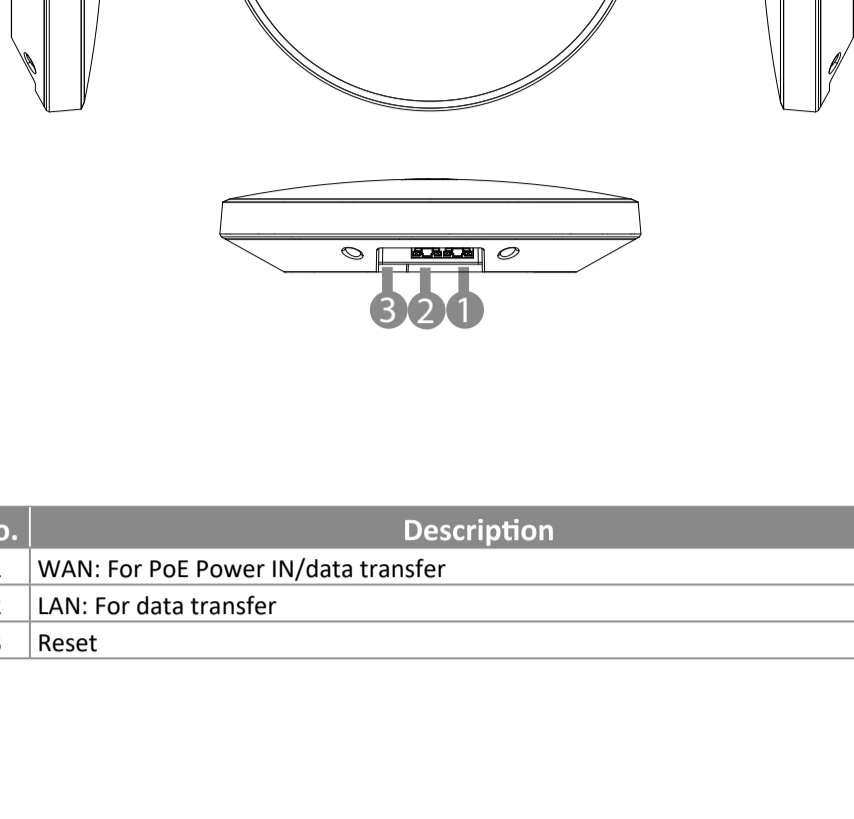

No.	Description
1	WAN: For PoE Power IN/data transfer
2	LAN: For data transfer
3	Reset


LED Status	Definition
Flash Green / Off every second	The device is booting up
Flash Red / Off every second	The device has lost network connectivity
Steady Green	The device is operated in standalong mode
Flash Blue / Off every second	The device is connecting to PrismX
Steady Blue	The device is operated in cloud mode
Flash Green / Red every second	FW upgrading

## Accessories

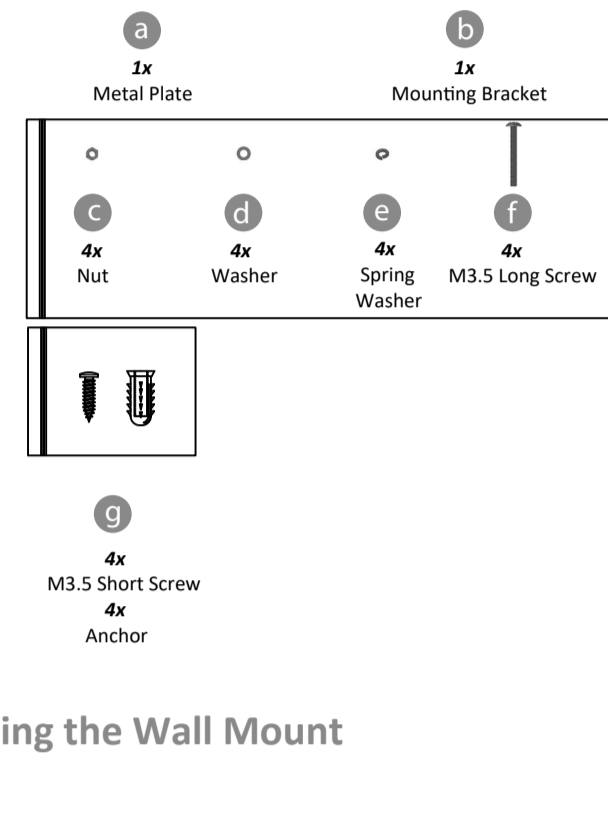


## Installing the Wall Mount

- Measure and secure the mounting bracket to the wall with 4 anchors & short screws.
- Insert RJ45 cables to WAN/LAN port of MI14.

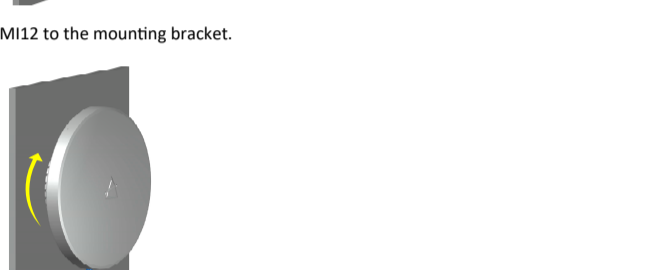

- Turn and secure MI14 to the mounting bracket.




## Installing the Ceiling Mount with Metal Plate

- Measure and drill 4 Ø6mm holes according to the mounting bracket and attach 4 long screws (not yet fastened for now).
- Fasten the mounting bracket with metal plate. Make sure to apply washers, spring washers, and nuts in order, as below.




- Insert RJ45 cables to WAN/LAN port of MI14 then turn and secure MI14 to the mounting bracket.



## Accessing the AP's Settings Menu


### Via Wi-Fi

- Configure your PC's IP setting to DHCP to automatically retrieve an IP address.
- Connect your PC's Wi-Fi to the SSID printed on the rear of the AP that corresponds to the frequency of the connection (2.4G / 5G) using the password "passphrase"
- Enter the IP address 192.168.2.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism

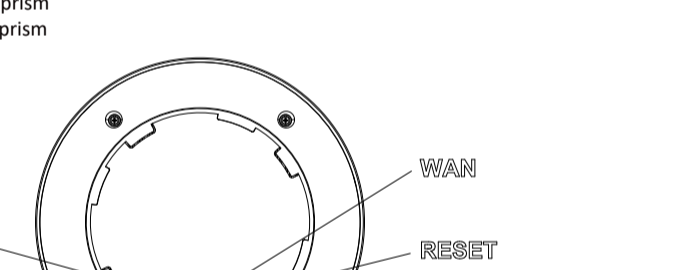

### Via WAN (RJ-45)

- Configure your PC's IP setting to static and then set the IP address to any address from 192.168.19.2 to 192.168.19.250.
- Connect your PC's network port to the WAN port on the AP.
- Enter the IP address 192.168.19.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism

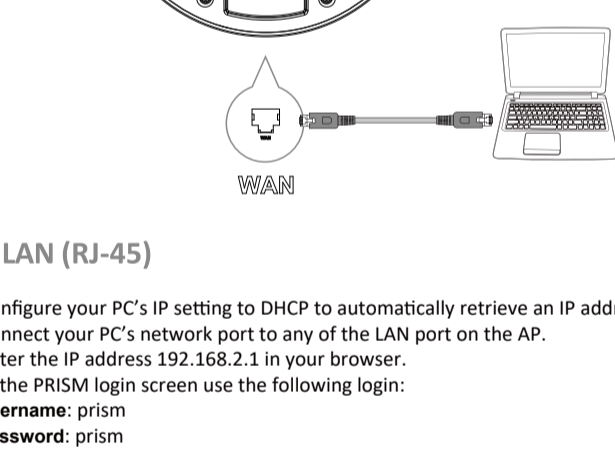

### Via LAN (RJ-45)

- Configure your PC's IP setting to DHCP to automatically retrieve an IP address.
- Connect your PC's network port to any of the LAN port on the AP.
- Enter the IP address 192.168.2.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism



## Contact Us

Worldwide Enterprise Support: +886-3-6006899  
 Email: sales@prismwifi.com  
 Manufacturer: Zhonghua Communication Inc.  
 Add.: No.15-1 Zhonghua Road, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, 30352  
 Tel. : +886-3-5972970

## Regulatory Statements

### IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Selon les règlements d'Industrie Canada, cet émetteur radio ne peut fonctionner qu'à l'aide d'une antenne d'un type et d'un gain maximal (ou moindre) approuvé pour l'émetteur par Industrie Canada. Pour réduire les interférences radioélectriques potentielles avec d'autres utilisateurs, le type d'antenne et son gain doivent être choisis de telle sorte que la puissance équivalente rayonnée (p.i.r.e.) ne soit pas supérieure à celle nécessaire pour une communication réussie.

### STATEMENT OF RADIATION EXPOSURE:

This equipment complies with the limites of exposure to IC radiation established for an uncontrolled environment. This equipment must be installed and used with a minimum of 20cm distance between the radiation source and your body.

### DÉCLARATION D'EXPOSITION AUX RADIATIONS:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

This device complies with CAN ICES-3 (B)/NMB-3(B).

### FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.

Note : This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to the radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
 —Reorient or relocate the receiving antenna.  
 —Increase the separation between the equipment and receiver.  
 —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
 —Consult the dealer or an experienced radio/TV technician for help

### Declaration of the Presence Condition of the Restricted Substances Marking

Equipment name: Wi-Fi 6 AX3000 Dual-Radio Indoor Router Type designation (Type): MI14						
Unit	Restricted substances and its chemical symbols					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr <sup>6+</sup> )	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCBA	O	O	O	O	O	O
Housing	O	O	O	O	O	O
Package	O	O	O	O	O	O
Accessories	O	O	O	O	O	O

Note 1 : "Exceeding 0.1 wt %" and "exceeding 0.01 wt %" indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.  
 Note 2 : "O" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.  
 Note 3 : The "-" indicates that the restricted substance corresponds to the exemption.