FCC Test Report

Report No: FCS202311038W01

Issued for

Applicant:	Shenzhen Nan Piao Chen Industrial Co., Ltd.
Address:	25H Building 6,Unit 2,Phase 2,Zhenye Luanshan Valley Garden,Baoheluo Road,Longgang St, Longgang District; Shenzhen City, 518000 China
Product Name:	Mosquito repellent
Brand Name:	WiHoo /homelifairy
Model Name:	D2
Series Model:	N/A
FCC ID:	2BA7E-D2

Issued By: Flux Compliance Service Laboratory
Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com

TEST RESULT CERTIFICATION

Applicant's Name..... :	Shenzhen Nan Piao Chen Industrial Co., Ltd.
Address..... :	25H Building 6,Unit 2,Phase 2,Zhenye Luanshan Valley Garden,Baoheluo Road,Longgang St, Longgang District; Shenzhen City, 518000 China
Manufacture's Name..... :	Shenzhen Nan Piao Chen Industrial Co., Ltd.
Address..... :	25H Building 6,Unit 2,Phase 2,Zhenye Luanshan Valley Garden,Baoheluo Road,Longgang St, Longgang District; Shenzhen City, 518000 China

Product Description

Product Name..... :	Mosquito repellent
Brand Name.....:	WiHoo /homelifairy
Model Name..... :	D2
Series Model.....:	N/A
Test Standards..... :	FCC Rules and Regulations Part 15 Subpart C, Section 247
Test Procedure..... :	ANSI C63.10:2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test..... :

Date (s) of performance of tests. :	Nov. 09, 2023~Nov. 15, 2023
Date of Issue.....:	Nov. 15, 2023
Test Result.....:	Pass

Tested by : Scott Shen

(Scott Shen)

Reviewed by : Duke Qian

(Duke Qian)

Approved by : Jack Wang

(Jack Wang)

Table of Contents Page

1. SUMMARY OF TEST RESULTS 6
1.1 TEST FACTORY 7
1.2 MEASUREMENT UNCERTAINTY 7
2. GENERAL INFORMATION 8
2.1 GENERAL DESCRIPTION OF THE EUT 8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS 11
2.4 EQUIPMENTS LIST 12
3 CONDUCTED EMISSION MEASUREMENT 13
3.1 LIMIT 13
3.2 TEST PROCEDURE 13
3.3 TEST SETUP 14
3.4 TEST RESULTS 15
4. 6 DB BANDWIDTH 17
4.1 Limit 17
4.2 Test Procedure 17
4.3 Test setup 17
4.4 Test results 17
4.5 Original Test Data 18
5. CONDUCTED OUTPUT POWER 20
5.1 LIMIT 20
5.2 TEST PROCEDURE 20
5.3 TEST SETUP 20
5.4 TEST RESULTS 20
6. BAND EDGE AND SPURIOUS(CONDUCTED) 21
6.1 LIMIT 21
6.2 TEST PROCEDURE 21
6.3 TEST SETUP 21
6.4 TEST RESULTS 22
6.5 Original test data 22
7. RADIATED EMISSION MEASUREMENT 26

Table of Contents **Page**

7.1 RADIATED EMISSION LIMITS 26
7.2 TEST PROCEDURE 27
7.3 TESTSETUP 28
7.4. TEST RESULTS 30
7.5 (30MHZ-1000MHZ) 31
7.6 RADIATED BAND EDGE DATA 36
8. POWER SPECTRAL DENSITY 37
8.1 LIMIT 37
8.2 TEST PROCEDURE 37
8.3 TEST SETUP 37
8.4 TEST RESULTS 37
8.5 original test data 38
9. ANTENNA REQUIREMENT 40
9.1 STANDARD REQUIREMENT 40
9.2 RESULT 40

Revision History

Rev.	Issue Date	Effect Page	Contents
00	Nov. 15, 2023	N/A	N/A

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.247(a)(2)	6dB Bandwidth 99% Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
Laboray Accreditations	
FCC Test Firm Registration Number: 514908 CNAS Number： L15566 Designation number：CN0127 A2LA accreditation number：5545.01 ISED Number：25801	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y ±U**, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	±0.71dB
2	Unwanted Emissions, conducted	±2.988 dB
3	Conducted Emission (9KHz-150KHz)	±4.13 dB
4	All emissions radiated (9KHz -30MHz)	±3.1 dB
5	Conducted Emission (150KHz-30MHz)	±4.74 dB
6	All emissions,radiated(<1G) 30MHz-1000MHz	±5.2 dB
7	All emissions,radiated 1GHz -18GHz	±4.66 dB
8	All emissions,radiated 18GHz -40GHz	±4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Mosquito repellent
Trade Name	WiHoo /homelifairy
Model Name	D2
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Operation frequency	2402MHz-2480MHz
Modulation:	GFSK
Channel number	40 CH
Transmitter rate:	1MHz
Power Supply	AC 110-220V
Battery	N/A
Report number	FCS202311038W01
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User's Manual.

2.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	DBAM50-V1	PCB antenna	N/A	2.0	Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the

The test softeware was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model descrption
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.
4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

(1) The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in『Length』column.

(3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2023.08.29	2024.08.28
Signal Analyzer	R&S	FSV40-N	FCS-E012	2023.08.29	2024.08.28
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2023.08.29	2024.08.28
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2023.08.29	2024.08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2023.08.29	2024.08.28
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2023.08.29	2024.08.28
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2023.08.29	2024.08.28
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2023.08.29	2024.08.28
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E005	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2023.08.29	2024.08.28
LISN	R&S	ENV216	FCS-E007	2023.08.29	2024.08.28
LISN	ETS	3810/2NM	FCS-E009	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E008	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2023.08.29	2024.08.28
Spectrum Analyzer	Agilent	E4447A	MY50180039	2023.08.29	2024.08.28
Spectrum Analyzer	R&S	FSV-40	101499	2023.08.29	2024.08.28
Power Sensor	Agilent	UX2021XA	FCS-E021	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

3 CONDUCTED EMISSION MEASUREMENT

3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

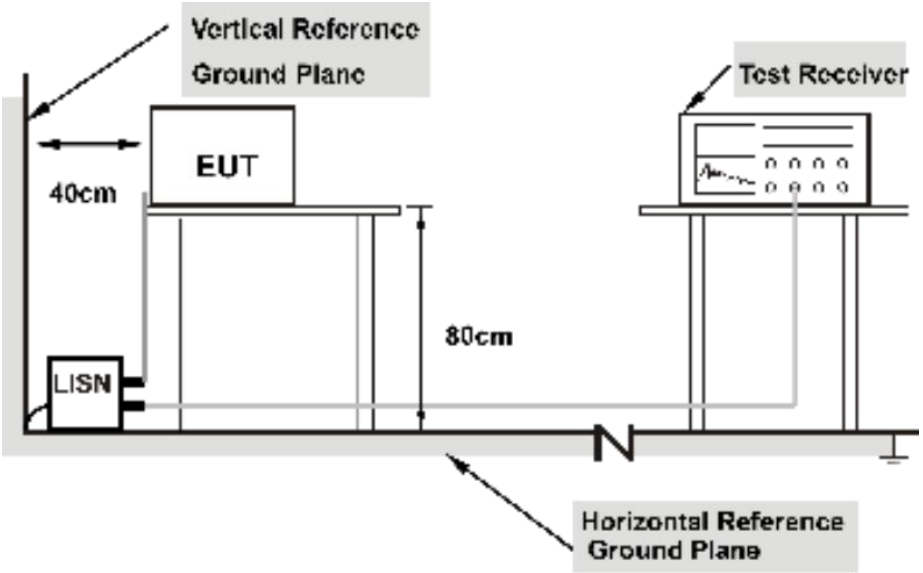

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST RESULTS

Temperature:	25℃	Relative Humidity:	50%
Test Mode:	GFSK(worst mode)	Test Voltage:	AC 120V/50Hz
Result:	L	Result:	Pass

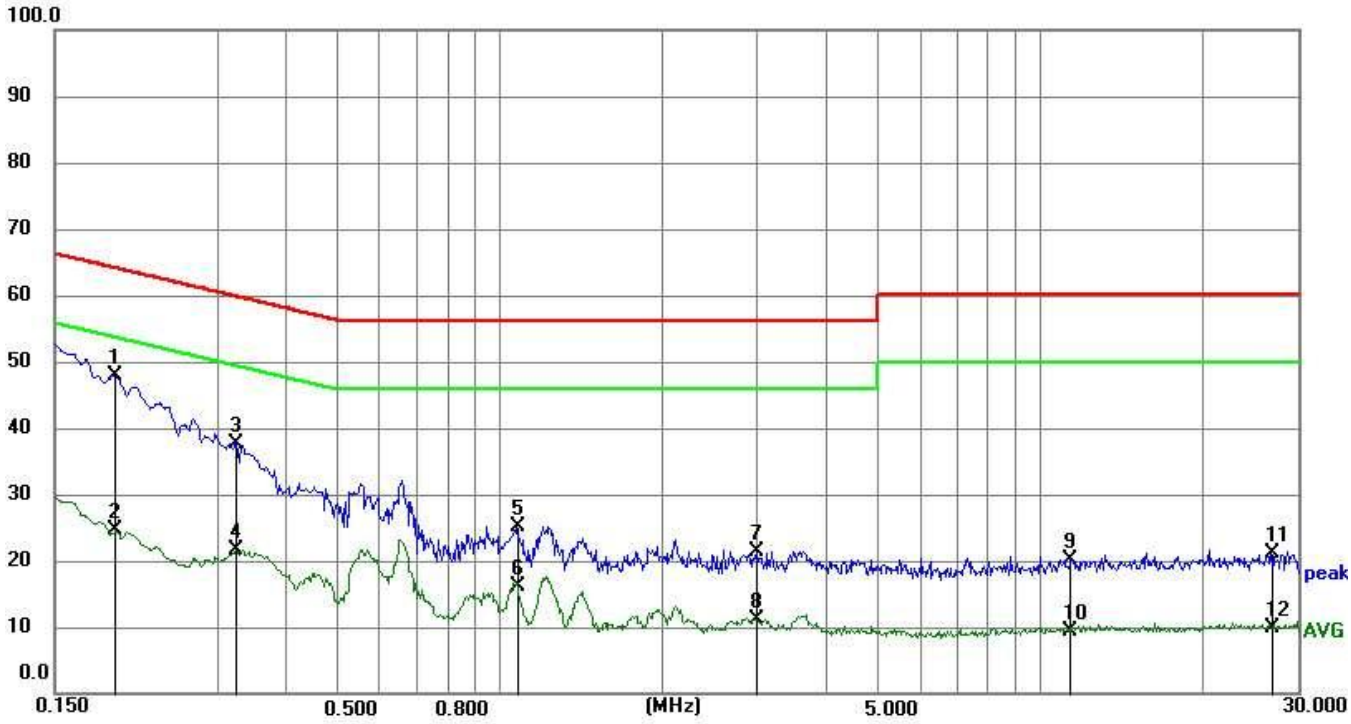

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1949	37.77	10.09	47.86	63.83	15.97	QP
2	0.1949	14.51	10.09	24.60	53.83	29.23	AVG
3	0.3255	27.73	10.02	37.75	59.57	21.82	QP
4	0.3255	11.49	10.02	21.51	49.57	28.06	AVG
5	1.0725	15.10	10.00	25.10	56.00	30.90	QP
6	1.0725	6.07	10.00	16.07	46.00	29.93	AVG
7	3.0030	11.45	9.94	21.39	56.00	34.61	QP
8	3.0030	1.17	9.94	11.11	46.00	34.89	AVG
9	11.4045	10.44	9.80	20.24	60.00	39.76	QP
10	11.4045	-0.41	9.80	9.39	50.00	40.61	AVG
11	26.7675	11.27	9.90	21.17	60.00	38.83	QP
12	26.7675	-0.06	9.90	9.84	50.00	40.16	AVG

Temperature:	25℃	Relative Humidity:	50%
Test Mode:	GFSK(worst mode)	Test Voltage:	AC 120V/50Hz
Result:	N	Result:	Pass

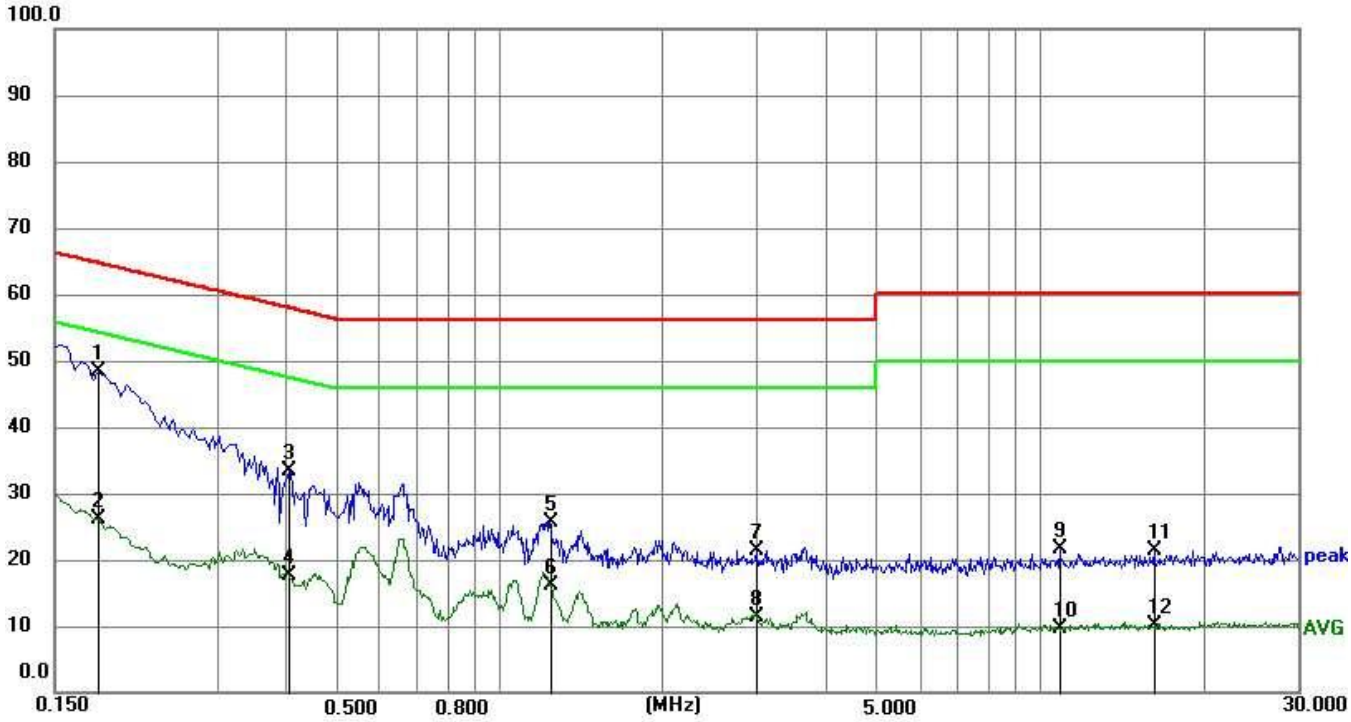

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1815	38.25	10.06	48.31	64.42	16.11	QP
2	0.1815	16.03	10.06	26.09	54.42	28.33	AVG
3	0.4065	23.45	10.00	33.45	57.72	24.27	QP
4	0.4065	7.60	10.00	17.60	47.72	30.12	AVG
5	1.2390	15.68	9.98	25.66	56.00	30.34	QP
6	1.2390	6.23	9.98	16.21	46.00	29.79	AVG
7	2.9805	11.55	9.94	21.49	56.00	34.51	QP
8	2.9805	1.44	9.94	11.38	46.00	34.62	AVG
9	10.8825	11.77	9.81	21.58	60.00	38.42	QP
10	10.8825	-0.25	9.81	9.56	50.00	40.44	AVG
11	16.2420	11.46	9.86	21.32	60.00	38.68	QP
12	16.2420	0.16	9.86	10.02	50.00	39.98	AVG

Remark:

1. All readings are Quasi-Peak and Average values

4. 6 DB BANDWIDTH

4.1 Limit

FCC Part 15.247,Subpart C RSS-Gen Clause 6.7				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	6dB Bandwidth	>= 500KHz	2400-2483.5	PASS
RSS-Gen Clause 6.7	99% Bandwidth	For reporting purposes only.	2400-2483.5	PASS

4.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows

RBW: 100 kHz

VBW: 300 kHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3 Test setup

4.4 Test results

TestMode	Channel (MHz)	6dB Bandwidth (MHz)	Verdict
Lowest	2402MHz	0.7664	Pass
Middle	2440MHz	0.8870	Pass
Highest	2480MHz	0.7901	Pass

4.5 Original Test Data

Low

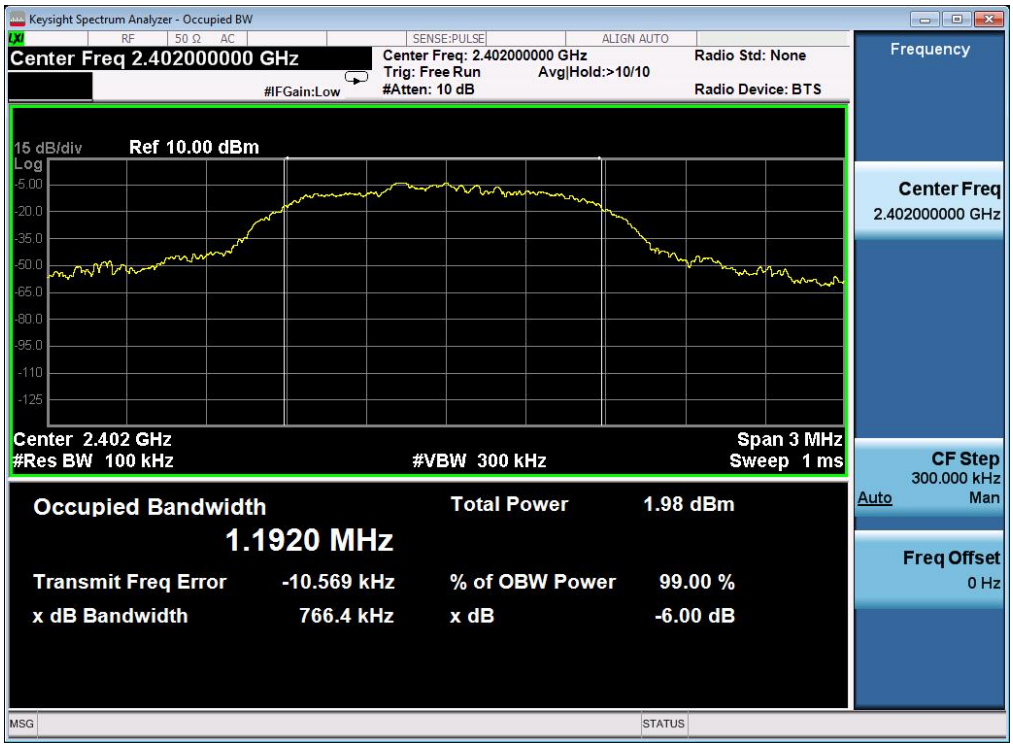

Middle

High

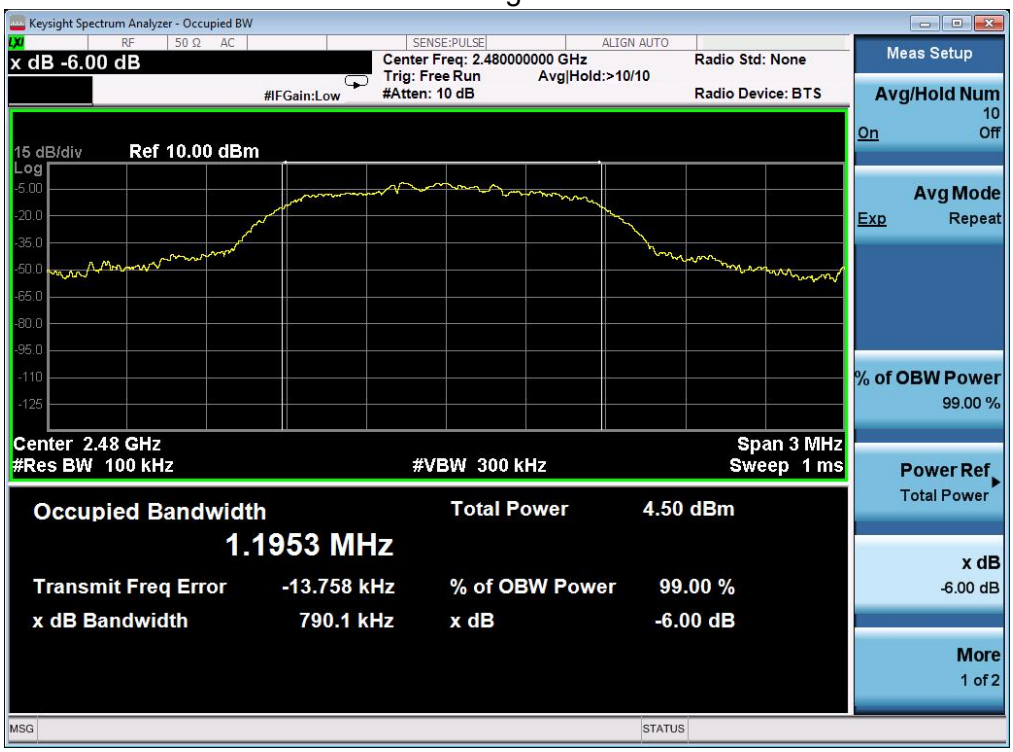
Keysight Spectrum Analyzer - Occupied BW
x dB -6.00 dB
Center Freq: 2.480000000 GHz
Trig: Free Run
Avg|Hold:>10/10
#Atten: 10 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
15 dB/div
Ref 10.00 dBm
Center 2.48 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 3 MHz
Sweep 1 ms
Occupied Bandwidth
1.1953 MHz
Total Power 4.50 dBm
Transmit Freq Error -13.758 kHz
% of OBW Power 99.00 %
x dB Bandwidth 790.1 kHz
x dB -6.00 dB
Meas Setup
Avg/Hold Num
10
On Off
Avg Mode
Exp Repeat
% of OBW Power
99.00 %
Power Ref
Total Power
x dB
-6.00 dB
More
1 of 2

5. CONDUCTED OUTPUT POWER

5.1 LIMIT

FCC Part 15 Subpart C			
Section	Test Item	Limit	Frequency Range
15.247(b)(3)	Peak output power	Power <1W(30dBm)	2400-2483.5

5.2 TEST PROCEDURE

(1) The EUT was directly connected to the Power sensor and antenna output port as show in The block diagram adove.

(2) The EUT was set to continuously transmitting in the max power during the test.

5.3 TEST SETUP

5.4 TEST RESULTS

TestMode	Channel (MHz)	Result（dBm）	Limit（dBm）	Verdict
Lowest	2402MHz	3.713	30	Pass
Middle	2440MHz	3.975	30	Pass
Highest	2480MHz	3.828	30	Pass

6. BAND EDGE AND SPURIOUS(CONDUCTED)

6.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

6.3 TEST SETUP

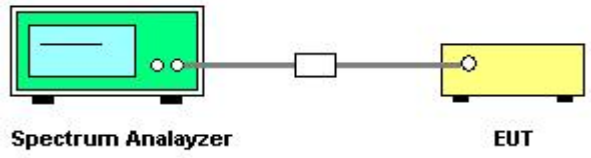

6.4 TEST RESULTS

Eut set mode	CH or Frequency	Result
GFSK	CH1	Pass
	CH40	Pass

6.5 Original test data

CH1 2402MHZ

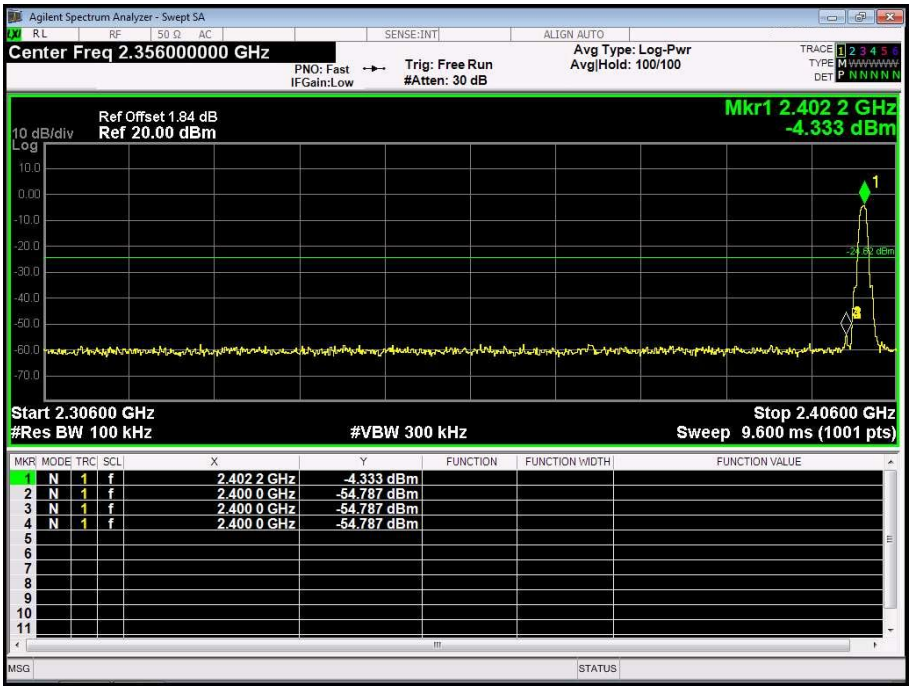

CH40 2480MHZ

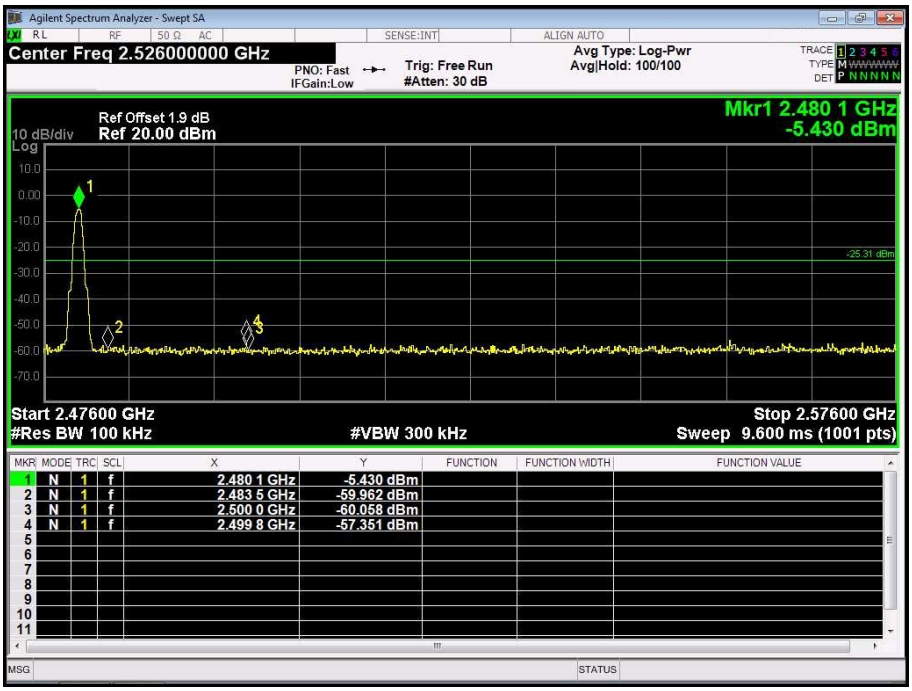

Spurious emissions

Low 2402MHz

30MHz-26.5GHz

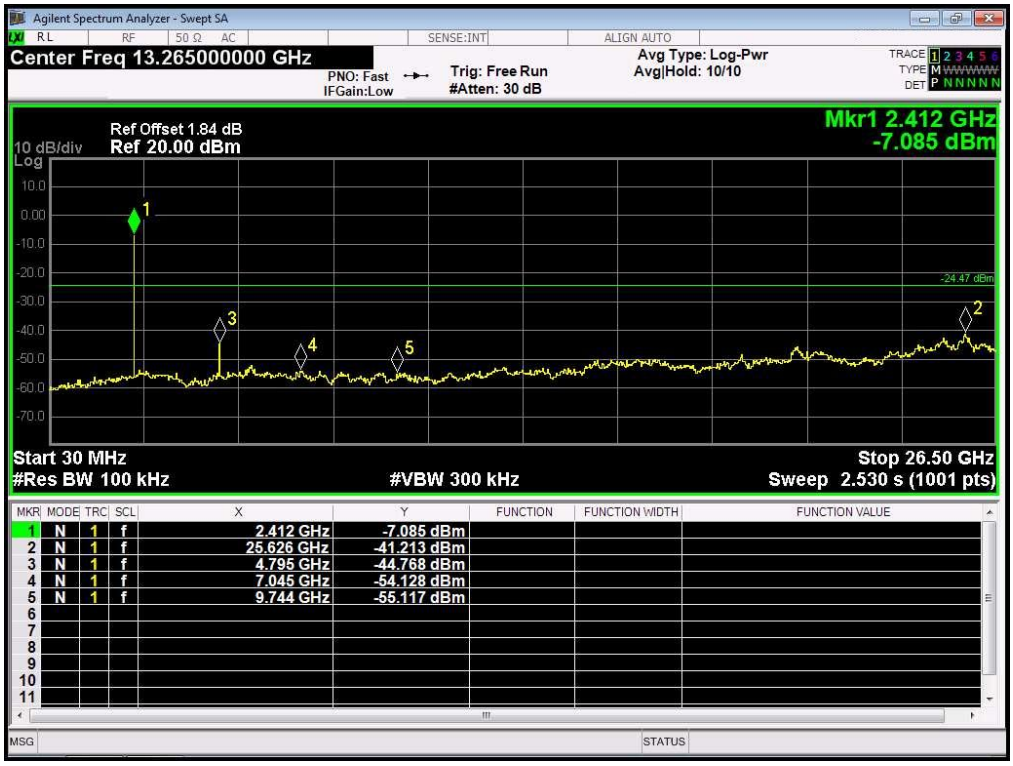

Middle 2440MHz

30MHz-26.5GHz

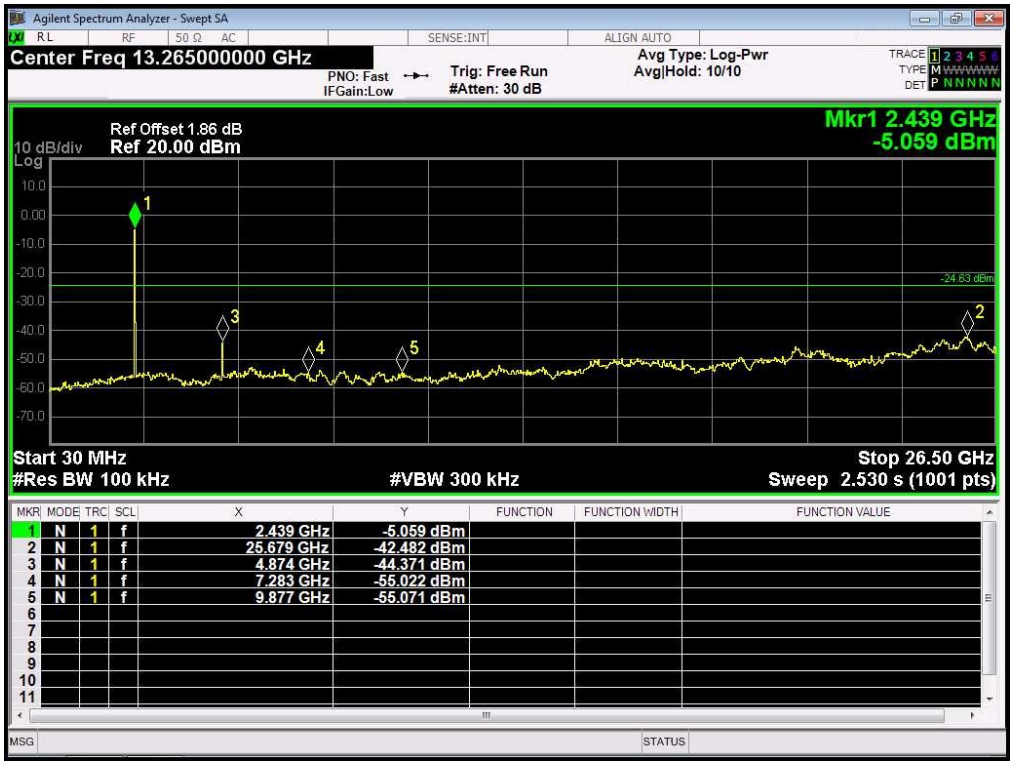

High 2480MHz

30MHz-26.5Hz

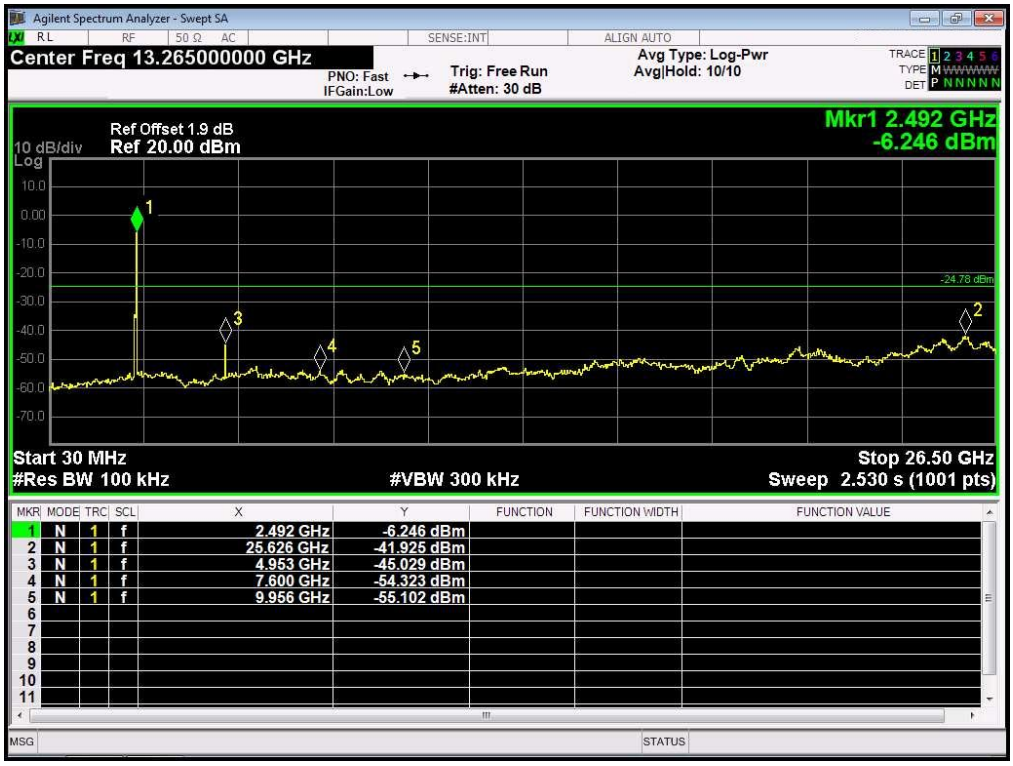

7. RADIATED EMISSION MEASUREMENT

7.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	**Setting**
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.2 TEST PROCEDURE

a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz,and above 1GHz.
b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

7.3 TESTSETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

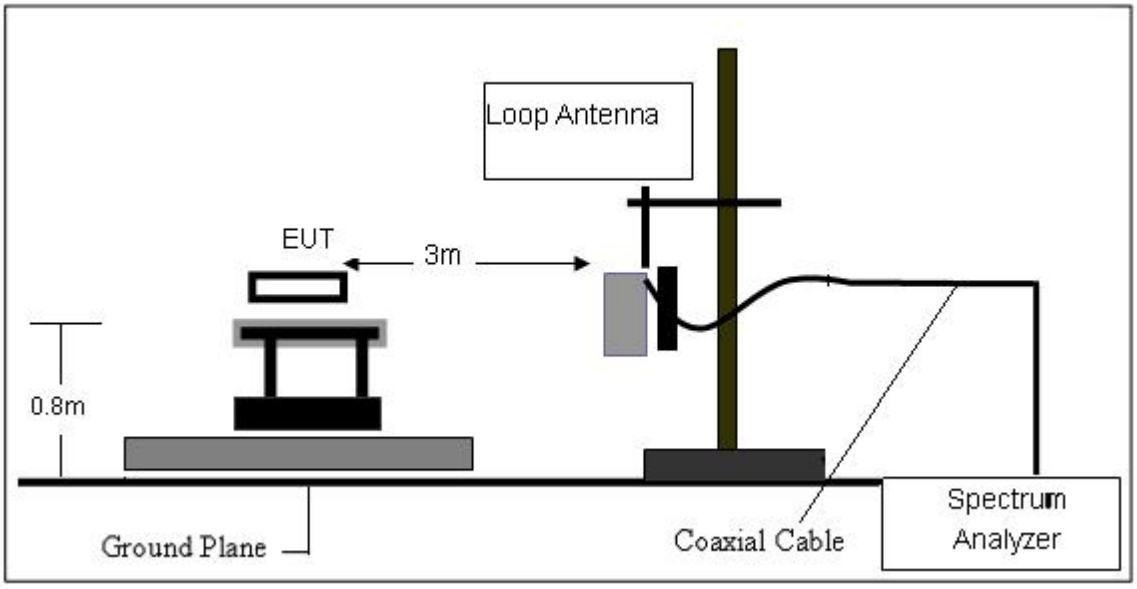

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

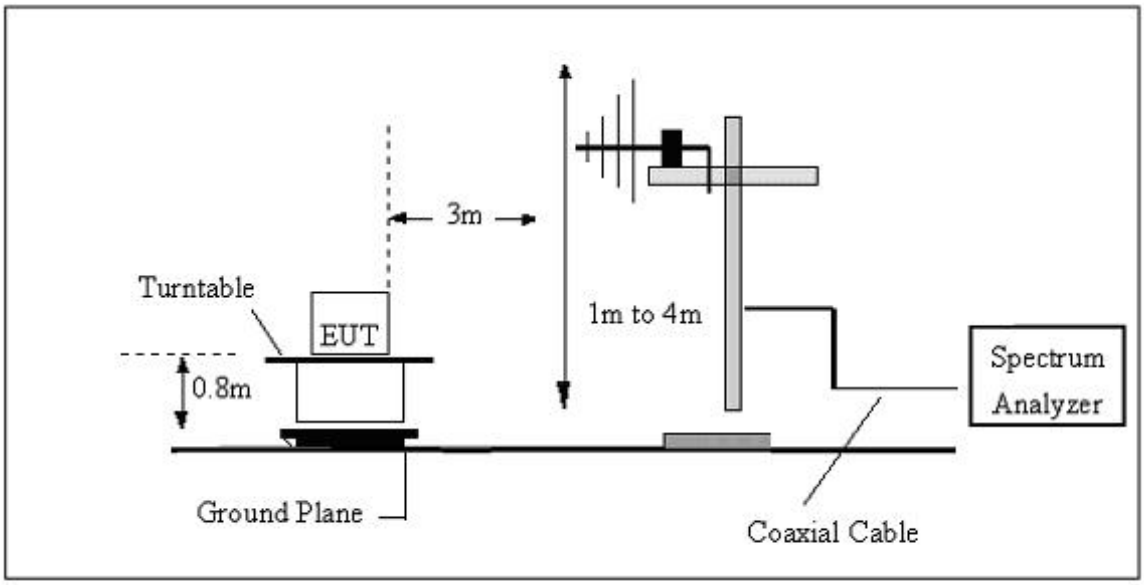

（C）Radiated Emission Test-Up Frequency Above 1GHz

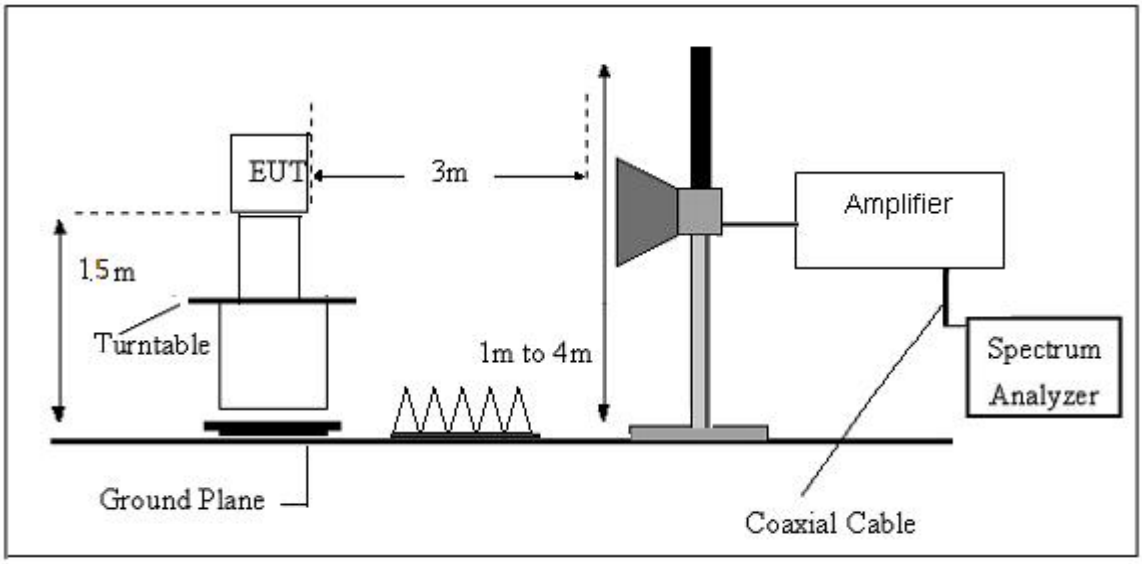

7.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7℃	Relative Humidity:	61%
Test Voltage:	AC 120V/50Hz	Test Mode:	GFSK

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:
The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
Distance extrapolation factor =40 log (specific distance/test distance)(dB);
Limit line = specific limits (dBuv) + distance extrapolation factor.

7.5 (30MHZ-1000MHZ)

Temperature:	24.7℃	Relative Humidity:	61%
Test Voltage:	AC 120V/50Hz	Phase:	Horizontal
Test Mode:	GFSK		

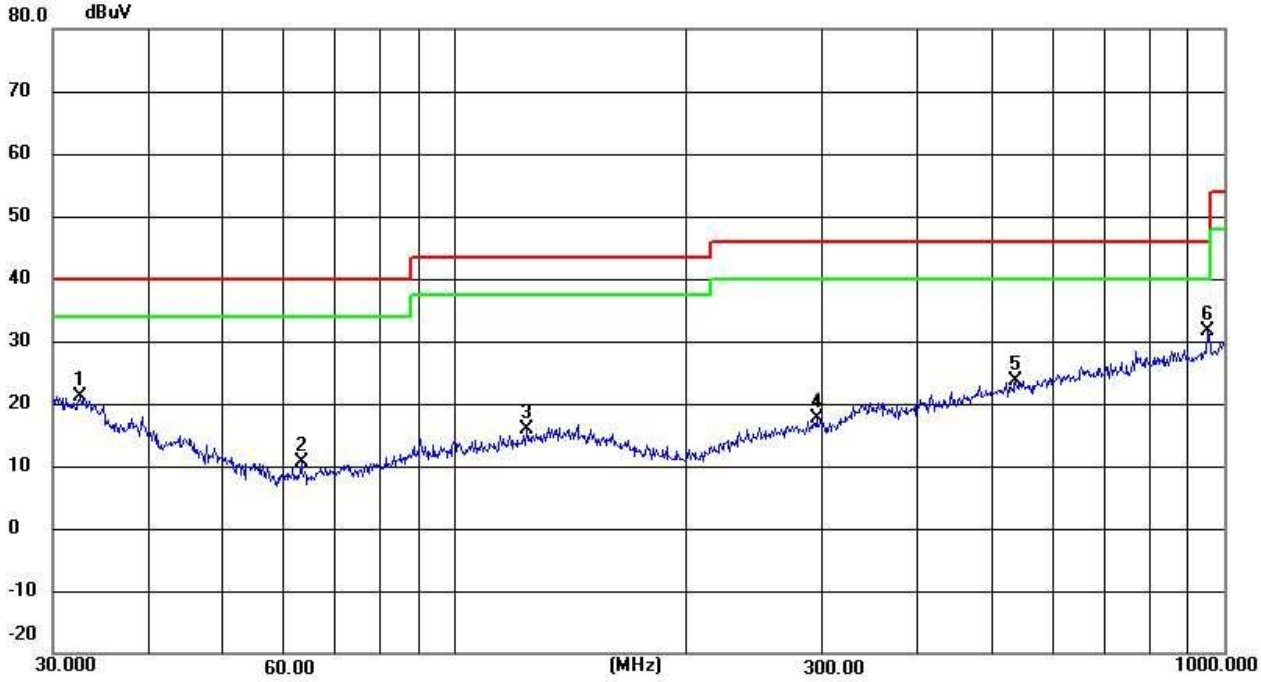

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.5198	30.09	-8.87	21.22	40.00	-18.78	QP
2	63.0916	31.55	-20.87	10.68	40.00	-29.32	QP
3	124.1330	47.92	-32.16	15.76	43.50	-27.74	QP
4	295.1469	49.51	-31.91	17.60	46.00	-28.40	QP
5	535.7073	54.95	-31.24	23.71	46.00	-22.29	QP
6	952.0937	62.39	-30.65	31.74	46.00	-14.26	QP

Note: 1. Margin = Result (Result =Reading + Factor)–Limit
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7℃	Relative Humidity:	61%
Test Voltage:	AC 120V/50Hz	Phase:	Vertical
Test Mode:	GFSK		

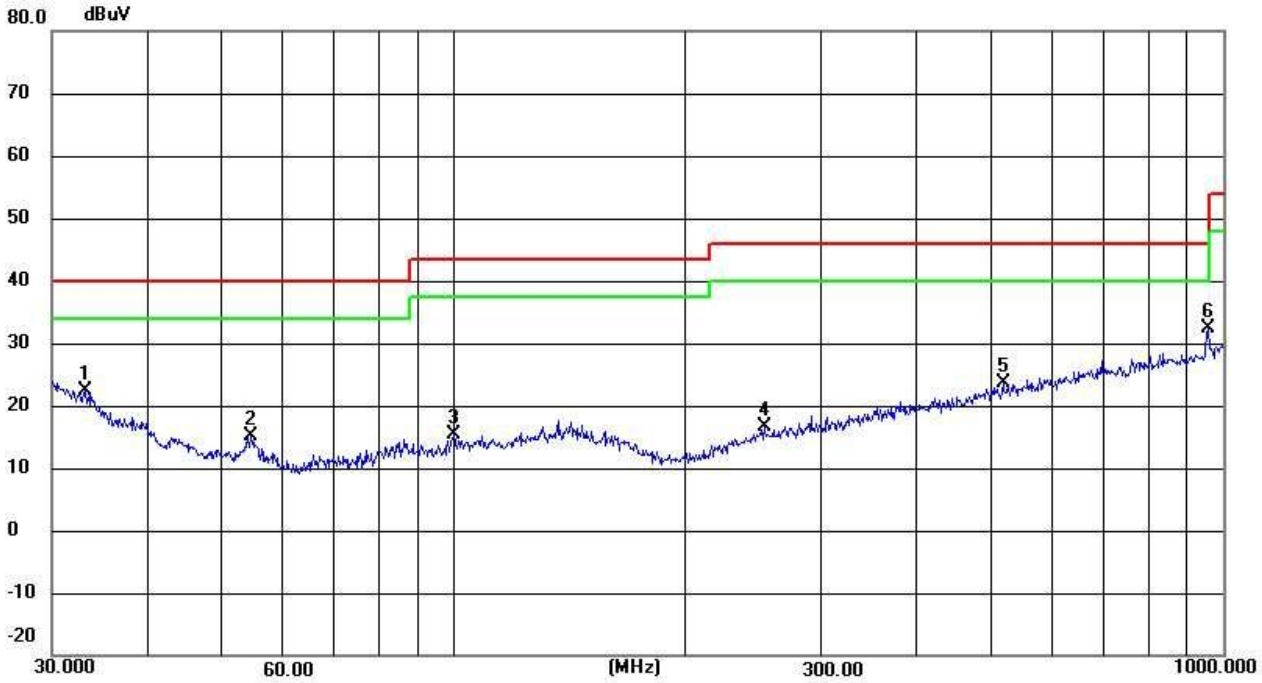

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.0950	31.69	-9.26	22.43	40.00	-17.57	QP
2	54.4516	34.50	-19.44	15.06	40.00	-24.94	QP
3	99.8777	47.60	-32.20	15.40	43.50	-28.10	QP
4	252.9482	48.57	-31.97	16.60	46.00	-29.40	QP
5	517.2480	54.94	-31.27	23.67	46.00	-22.33	QP
6	955.4381	63.06	-30.64	32.42	46.00	-13.58	QP

Note: 1. Margin = Result (Result =Reading + Factor)–Limit
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

ABOVE 1GHZ
LOW CH(GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.41	31.78	8.60	32.09	46.70	74.00	-27.30	Vertical
7206.00	32.56	36.15	11.65	32.00	48.36	74.00	-25.64	Vertical
9608.00	32.12	37.95	14.14	31.62	52.59	74.00	-21.41	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	42.92	31.78	8.60	32.09	51.21	74.00	-22.79	Horizontal
7206.00	34.42	36.15	11.65	32.00	50.22	74.00	-23.78	Horizontal
9608.00	31.65	37.95	14.14	31.62	52.12	74.00	-21.88	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	27.01	31.78	8.60	32.09	35.30	54.00	-18.70	Vertical
7206.00	21.12	36.15	11.65	32.00	36.92	54.00	-17.08	Vertical
9608.00	20.13	37.95	14.14	31.62	40.60	54.00	-13.40	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	31.37	31.78	8.60	32.09	39.66	54.00	-14.34	Horizontal
7206.00	23.37	36.15	11.65	32.00	39.17	54.00	-14.83	Horizontal
9608.00	19.95	37.95	14.14	31.62	40.42	54.00	-13.58	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

MIDDLE CH(GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	35.91	31.85	8.67	32.12	44.31	74.00	-29.69	Vertical
7320.00	30.90	36.37	11.72	31.89	47.10	74.00	-26.90	Vertical
9760.00	30.64	38.35	14.25	31.62	51.62	74.00	-22.38	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	39.91	31.85	8.67	32.12	48.31	74.00	-25.69	Horizontal
7320.00	32.54	36.37	11.72	31.89	48.74	74.00	-25.26	Horizontal
9760.00	29.93	38.35	14.25	31.62	50.91	74.00	-23.09	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.99	31.85	8.67	32.12	33.39	54.00	-20.61	Vertical
7320.00	19.75	36.37	11.72	31.89	35.95	54.00	-18.05	Vertical
9760.00	18.92	38.35	14.25	31.62	39.90	54.00	-14.10	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	29.07	31.85	8.67	32.12	37.47	54.00	-16.53	Horizontal
7320.00	21.83	36.37	11.72	31.89	38.03	54.00	-15.97	Horizontal
9760.00	18.53	38.35	14.25	31.62	39.51	54.00	-14.49	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

HIGH CH(GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	39.09	31.93	8.73	32.16	47.59	74.00	-26.41	Vertical
7440.00	33.01	36.59	11.79	31.78	49.61	74.00	-24.39	Vertical
9920.00	32.52	38.81	14.38	31.88	53.83	74.00	-20.17	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	43.74	31.93	8.73	32.16	52.24	74.00	-21.76	Horizontal
7440.00	34.92	36.59	11.79	31.78	51.52	74.00	-22.48	Horizontal
9920.00	32.11	38.81	14.38	31.88	53.42	74.00	-20.58	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	27.71	31.93	8.73	32.16	36.21	54.00	-17.79	Vertical
7440.00	21.59	36.59	11.79	31.78	38.19	54.00	-15.81	Vertical
9920.00	20.55	38.81	14.38	31.88	41.86	54.00	-12.14	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	32.15	31.93	8.73	32.16	40.65	54.00	-13.35	Horizontal
7440.00	23.90	36.59	11.79	31.78	40.50	54.00	-13.50	Horizontal
9920.00	20.44	38.81	14.38	31.88	41.75	54.00	-12.25	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.6 RADIATED BAND EDGE DATA

Remark: All restriction band have been tested, and only the worst case is shown in report

Low CH (GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	44.21	27.91	5.30	24.64	52.78	74.00	-21.22	Horizontal
2390.00	48.45	27.59	5.38	24.71	56.71	74.00	-17.29	Horizontal
2400.00	49.04	27.41	5.39	24.72	57.12	74.00	-16.88	Horizontal
2310.00	45.23	27.91	5.30	24.64	53.80	74.00	-20.20	Vertical
2390.00	48.71	27.59	5.38	24.71	56.97	74.00	-17.03	Vertical
2400.00	49.47	27.41	5.39	24.72	57.55	74.00	-16.45	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	34.74	27.91	5.30	24.64	43.31	54.00	-10.69	Horizontal
2390.00	36.18	27.59	5.38	24.71	44.44	54.00	-9.56	Horizontal
2400.00	36.57	27.41	5.39	24.72	44.65	54.00	-9.35	Horizontal
2310.00	34.72	27.91	5.30	24.64	43.29	54.00	-10.71	Vertical
2390.00	36.66	27.59	5.38	24.71	44.92	54.00	-9.08	Vertical
2400.00	37.83	27.41	5.39	24.72	45.91	54.00	-8.09	Vertical

High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.61	27.53	5.47	29.93	44.68	74.00	-29.32	Horizontal
2500.00	41.36	27.55	5.49	29.93	44.47	74.00	-29.53	Horizontal
2483.50	41.95	27.53	5.47	29.93	45.02	74.00	-28.98	Vertical
2500.00	42.07	27.55	5.49	29.93	45.18	74.00	-28.82	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.89	27.53	5.47	29.93	36.96	54.00	-17.04	Horizontal
2500.00	32.32	27.55	5.49	29.93	35.43	54.00	-18.57	Horizontal
2483.50	34.85	27.53	5.47	29.93	37.92	54.00	-16.08	Vertical
2500.00	31.99	27.55	5.49	29.93	35.10	54.00	-18.90	Vertical

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

8. POWER SPECTRAL DENSITY

8.1 LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

8.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	3 kHz ≤ RBW ≤ 100 kHz
VBW:	≥ 3RBW
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.3 TEST SETUP

8.4 TEST RESULTS

TestMode	Channel (MHz)	Result (dBm/3KHz)	Limit (dBm/3KHz)	Verdict
GFSK	2402MHz	-17.297	8	Pass
GFSK	2440MHz	-16.754	8	Pass
GFSK	2480MHz	-14.750	8	Pass

8.5 original test data

GFSK-2402MHz

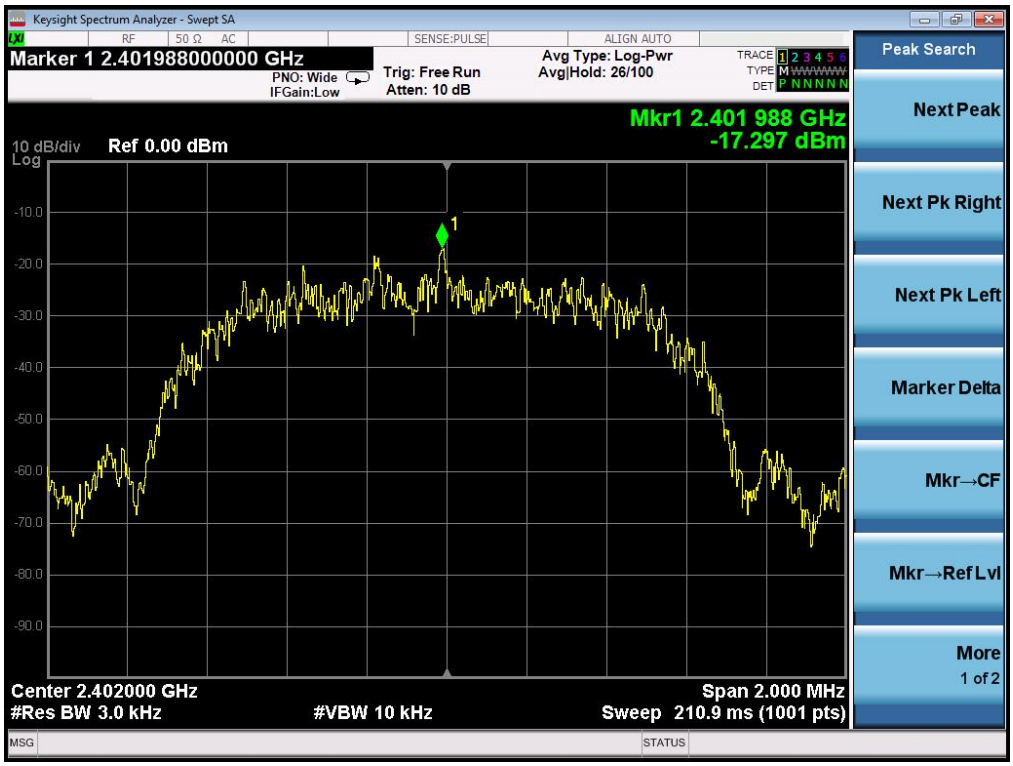

GFSK-2440MHz

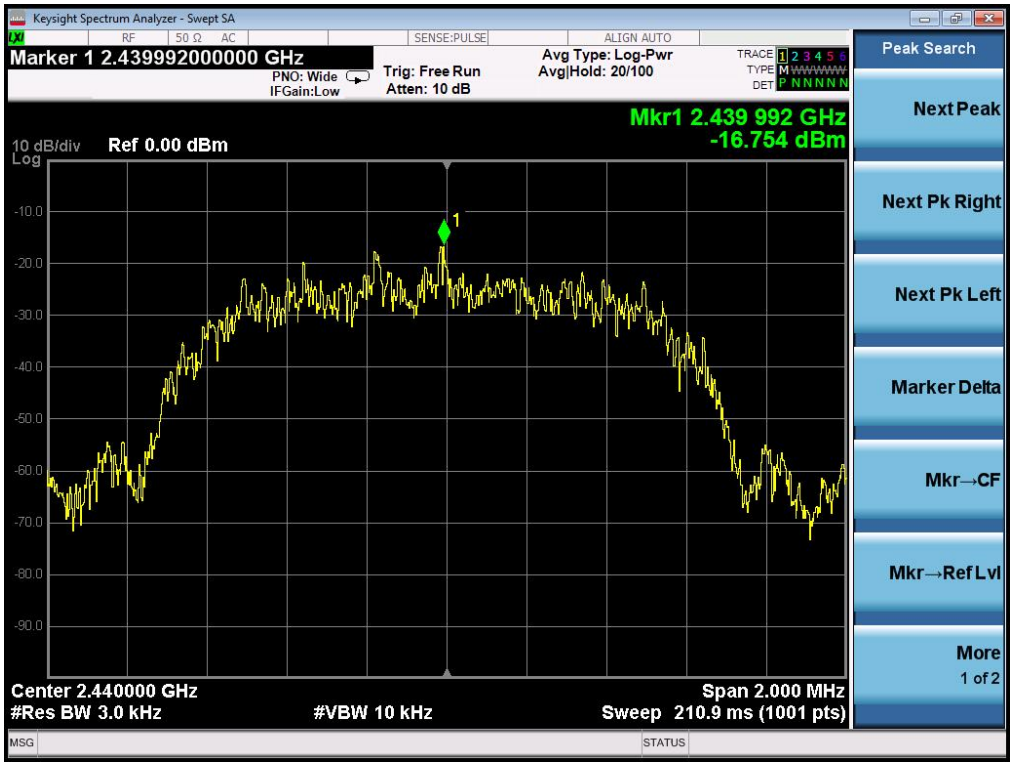

GFSK-2480MHz

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 RESULT

The antennas used for this product are PCB Antenna and no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.0dBi.

※※※※※END OF THE REPORT※※※※※