




X9RBBLLMKEYSG,TK52S

Wireless Keyboard

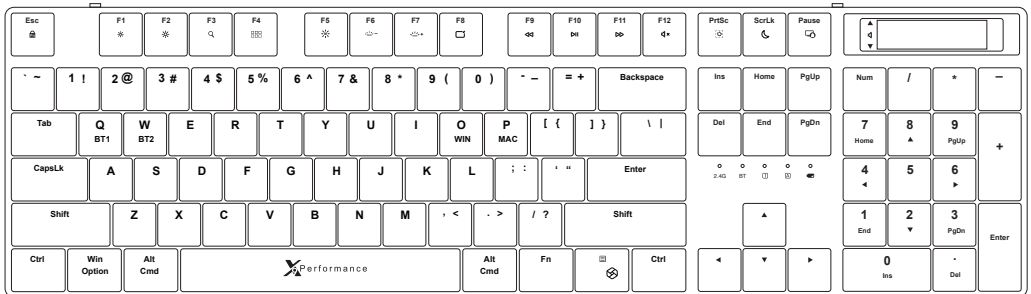

Back-Lit Low Profile Mechanical Keyboard



Welcome to the X9 Performance family and thank you for purchasing the X9RBBLLMKEYSG seeries.

Our mission is to deliver aesthetically pleasing, high-quality and affordable peripherals and accessories to satisfied customers. We do that by creating products that are both innovative and practical but most important easy-to-use.

If you have any questions, feedback, or just want to say hi, please reach out to us at techsupport@X9Performance.com.

With Love From Southern California,
X9 Performance

PACKAGE CONTENTS


- Keyboard
- RF dongle (In the front of the keyboard)
- USB-A to C Cable
- User's Guide

SYSTEM REQUIREMENTS

- BT Wireless-enabled computer and laptop.
- Computer or laptop with a free USB-A port for wireless RF dongle usage.

HARDWARE BASICS

Keyboard

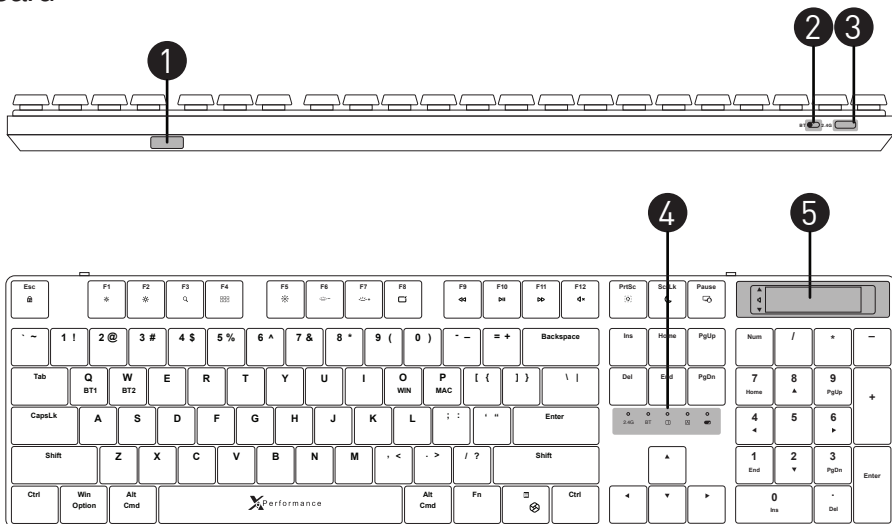


- 1.RF Dongle/Receiver Compartment
- 2.Mode Switch (Switch facing the computer)
 - a.BT – Switch to the far right
 - b.Wired – Switch to the middle
 - c.RF – Switch to the far left
- 3.USB-C port
 - a.For Charging
 - b.For Wired Mode
- 4.LED Lights
 - a.2.4G
 - i.Blinking White – Searching RF Dongle/Receiver
 - ii.Solid White then Off - Connected
 - b.BT
 - i.(BT1) Flashing Green – Searching for a connection
 - ii.(BT1) Solid Green then Off – Paired
 - iii.(BT2) Flashing Blue – Searching for a connection
 - iv.(BT2) Solid Blue then Off – Paired
 - c.Num Lock
 - i.Solid White – Active
 - ii.Off – Not active or you are on a Mac
 - d.Caps Lock
 - i.Solid White – Active
 - ii.Off – Not Active
 - e.Battery Icon
 - i.Red – Charging
 - ii.White – Fully Charged
- 5.Volume Control
 - a.Scroll Up – Volume Up
 - b.Scroll Down – Volume Down

INSTALLATION INSTRUCTIONS FOR WIRED AND RF

Wired


1. Using the mode switch, move the switch to the middle.

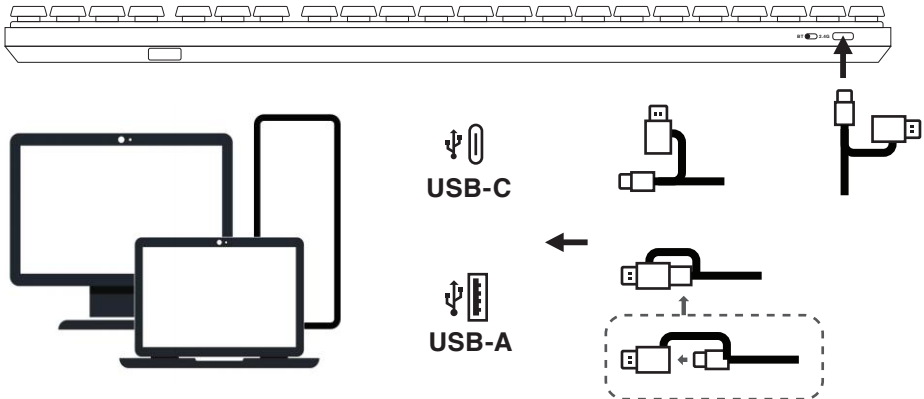

2. Insert the USB-C part of the cable into the keyboard. Then, plug the other end into your computer using a USB-A or USB-C port.

RF

1. Using the mode switch, move the switch to the left.

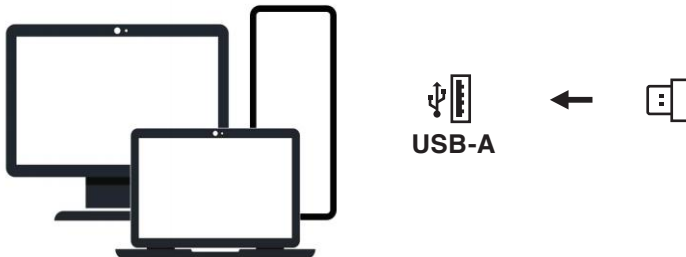

2. Plug the RF Dongle/Receiver into your computer.

RESYNCING INSTRUCTIONS FOR RF


1. Using the mode switch, move the switch to the far left.
2. While holding the 'FN' key, press the 'E' key for three seconds.
3. The white LED light on the 2.4G LED will blink rapidly.
4. Immediately plug the RF Dongle/Receiver into a USB port.

BT Wireless INSTRUCTIONS – PC

NOTE

We will use BT1 as an example.

1. Using the mode switch, move the switch to the far right.
2. After clicking on settings, click on BT Wireless.
3. Click on Devices, then click on Add BT Wireless or other Devices

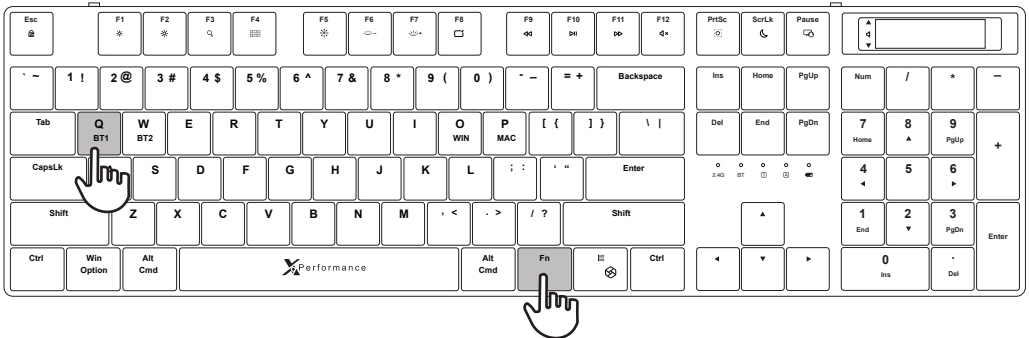


4. While holding 'FN', press the 'Q' for three seconds. The green light located on the BT indicator will blink. Note: BT2 LED light will be Blue.
5. Click connect, then exit out of Add a Device.

BT Wireless INSTRUCTIONS – MAC

NOTE

We will use BT1 as an example.

1. Using the mode switch, move the switch to the right.
2. After clicking on system settings, click on BT Wireless.

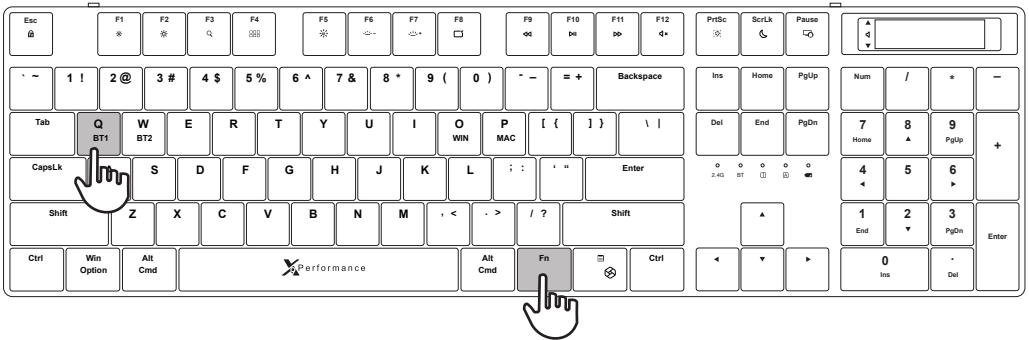


3. While holding 'FN', press the 'Q' for three seconds. The green light located on the BT indicator will blink. Note: BT2 LED light will be Blue.
4. Click on Connect.

Keyboard Setup Assistance (Mac User's)


Once pairing is done, a "keyboard setup assistance" screen may pop up, asking you to help identify your new keyboard. This is a built-in Apple procedure that helps the OS identify the current layout of your new keyboard. When prompted, do the following:

1. Click continue.
2. Press and release the z key.
3. Press and release the ? key.
4. Select ANSI at the end (US users).


STEP1: Press the Z key

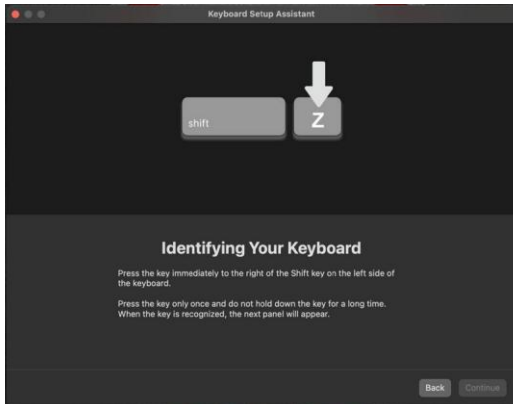

STEP2: Press the ? key

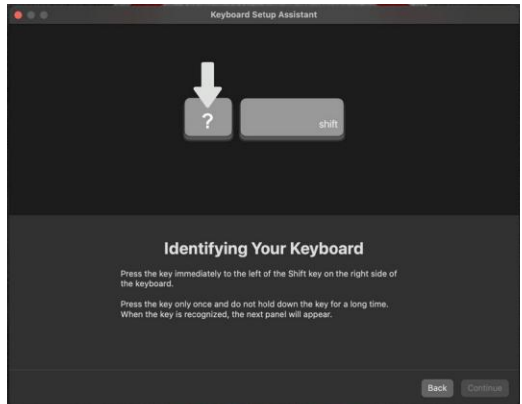

STEP2: Select your keyboard type (ANSI)

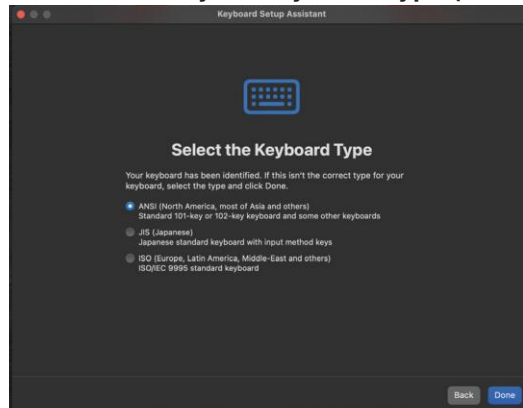

TOP F-ROW SHORTCUTS

The keyboard's top F-row is defaulted (green LED light under the ESC key) to boot up under function mode. To utilize a shortcut, hold the FN key followed by the shortcut you want to perform.

NOTE

*You can switch the F-row from function to shortcuts at any time by pressing **fn+esc**. When switched, you can still utilize the function keys by holding down the **fn** key followed by the function key (F1-F12) you would like to execute.*

NOTE

*When you change OS by executing these keys (**FN+O** or **FN+P**), this will change the keyboard behavior.*

Below is a table of what each shortcut does.

Shortcut description

Esc 	Switches the keyboard from shortcut mode to function mode as described in the above note.
	Decreases the brightness level on the screen. Please note that not all external monitors support this function.
	Increases the brightness level on the screen. Please note that not all external monitors support this function.
	PC: Search Mac: Spotlight Search
	PC: Dashboard Mac: Dashboard
	Change back light patterns
	Decrease the keyboard brightness.
	Increase the keyboard brightness.
	PC: Minimize all screens Mac:
	Previous Track
	Play/Pause
	Next Track
	Mute
	Choose an area screenshot
	PC: Lock Screen (No Password) Mac: Do not disturb
	PC: Lock Screen (With Password) Mac: Lock Screen

NOTE

All standard function keys (F1-F12) have a special function defined by the operating system or by a currently running program.

KEYS NEEDING 'FN'


These keys require you to hold 'FN' to ensure this works properly.

FN+Q	Channel BT1
FN+W	Channel BT2
FN+O	OS: Windows
FN+P	OS: Mac
FN+ICON to the right of FN	PC: Co-pilot MAC: Siri

HOW TO MAKE DO NOT DISTURB WORK (MAC)

This is how you activate Do not Disturb (Scroll lock) for Mac.

- 1.Go to Settings
- 2.Make sure your keyboard is on Mac mode (FN+P).
- 3.Click on Keyboard then click on Keyboard shortcuts.
- 4.Select Mission Control.

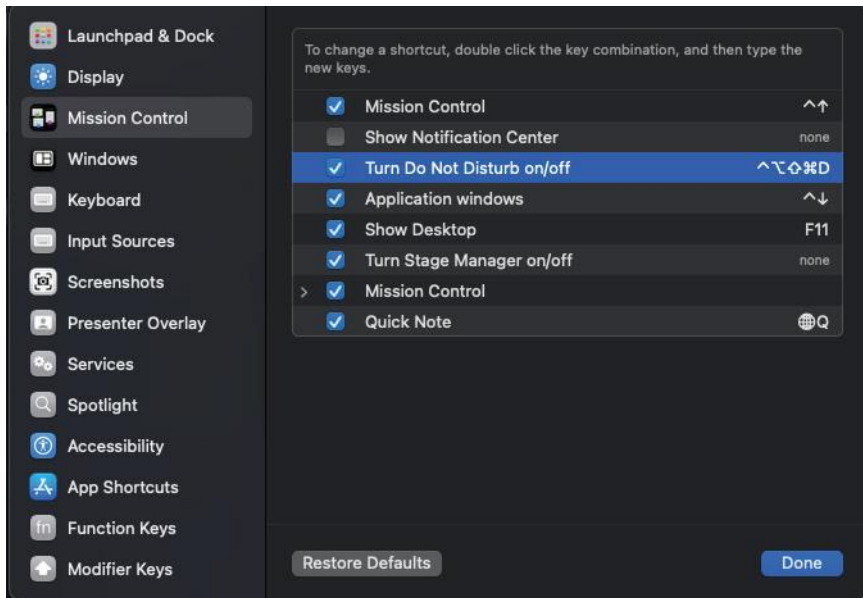

5. Make sure Turn Do Not Disturb on/off is checked, then double click the right side where the shortcuts are located.

6. Press SCRLK, then click on Done.


HOW TO MAKE SIRI WORK (MAC)

1. Go to Settings

2. Make sure your keyboard is in Mac mode (FN+P).

3. Type Siri in the search bar, then click on Siri.

4. Click on Siri Settings.

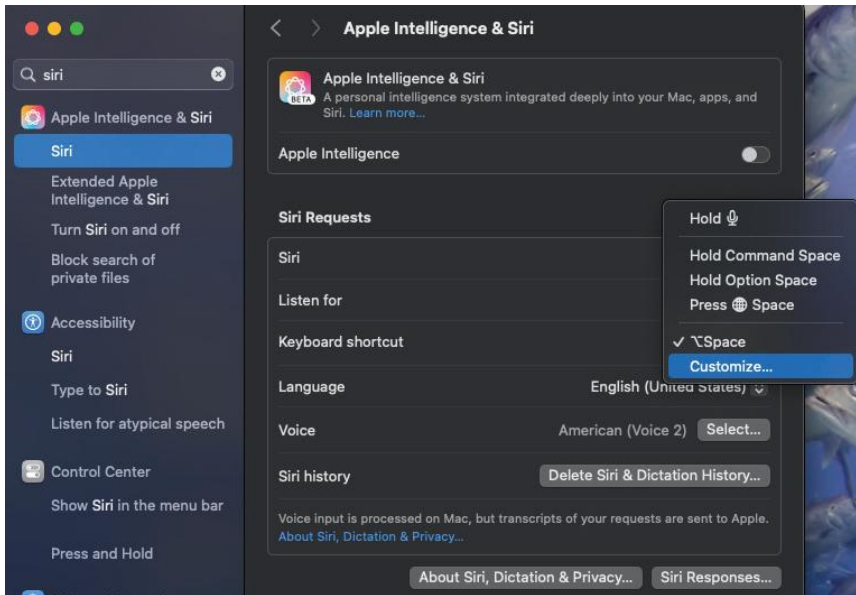

5. Click on Customize then press the key to the right of the FN key.

KEYPAD TROUBLESHOOTING TIPS

Windows Computers

1. Press Num lock (Full-sized keyboard)
2. Press Windows + R > Type On-screen keyboard > Click Options > Check turn on Numeric Keypad > Click Num lock > Close all windows
3. Settings > Accessibility > Keyboard > Disable Mouse Keys
4. Settings > Ease of Accessibility > Mouse > Disable Mouse Keys (Windows 11)
5. Settings > Control Panel > Ease of Access > Make the mouse easier to use > Ensure mouse keys are not checked.
6. Settings > Control Panel > Ease of Access > Make the keyboard easier to use > Ensure mouse keys are not checked.

Mac Computers

- 1.System Settings > Accessibility > Pointer Control > Find alternate control methods > Disable mouse keys
- 2.Shift + Clear

SAFETY INSTRUCTIONS

Please read the following carefully. Incorrect use of this product may result in reduced performance, permanent damage, and void your warranty.

- Keep this device away from liquid, humidity, and moisture.
- Operate this device only within the specific temperature range of 0°C (32° F) to 5°C to 40°C (104° F)
- Please refrain from taking the device apart. Doing so will void your warranty.
- Do not dispose of this product in the garbage. Take it to your local recycling center.

SPECIFICATIONS

Number of keys	107
Switches	Mechanical
Keycap brightness levels	3
Keyboard interface	USB-A to C, RF, and BT

Tech support

Tech support hours are from 9:00 AM to 5:00 PM Monday through Friday (PST).

- E-Mail: techsupport@macally.com
- Phone: (909) 230-6888

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: *This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: .*

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warranty

X9 Performance warrants that this product will be free from defects in title, materials and manufacturing workmanship for one year in North America from the date of the purchase. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, X9 Performance will repair or replace the product. This warranty is exclusive and is limited to the product that this user's guide came with. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, or any condition other than what can be considered normal use. The liability of X9 Performance arising from this warranty and sale shall be limited to a refund of the purchase price. In no event shall X9 Performance be liable for costs of procurement of substitute products or services, or for any lost profits, or for any consequential, incidental, direct or indirect damages, however caused and on any theory of liability, arising from this warranty and sale. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy.