Annex A.5 Spurious Emission at Antenna Terminals

1. LTE_Band2

1.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:18607, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.027	-73.46	-13	Pass	401
0.15	30	0.01	RMS	14.22	-69.42	-13	Pass	2986
30	1000	0.1	RMS	913.243	-59.52	-13	Pass	9701
1000	1840	1	RMS	1840	-48.72	-13	Pass	841
1840	1920	1	RMS	1850.2	22.49	60	Pass	401
1920	3000	1	RMS	2962	-46.27	-13	Pass	1081
3000	12000	1	RMS	10397	-35.86	-13	Pass	9002
12000	20000	1	RMS	19821	-28.64	-13	Pass	8001

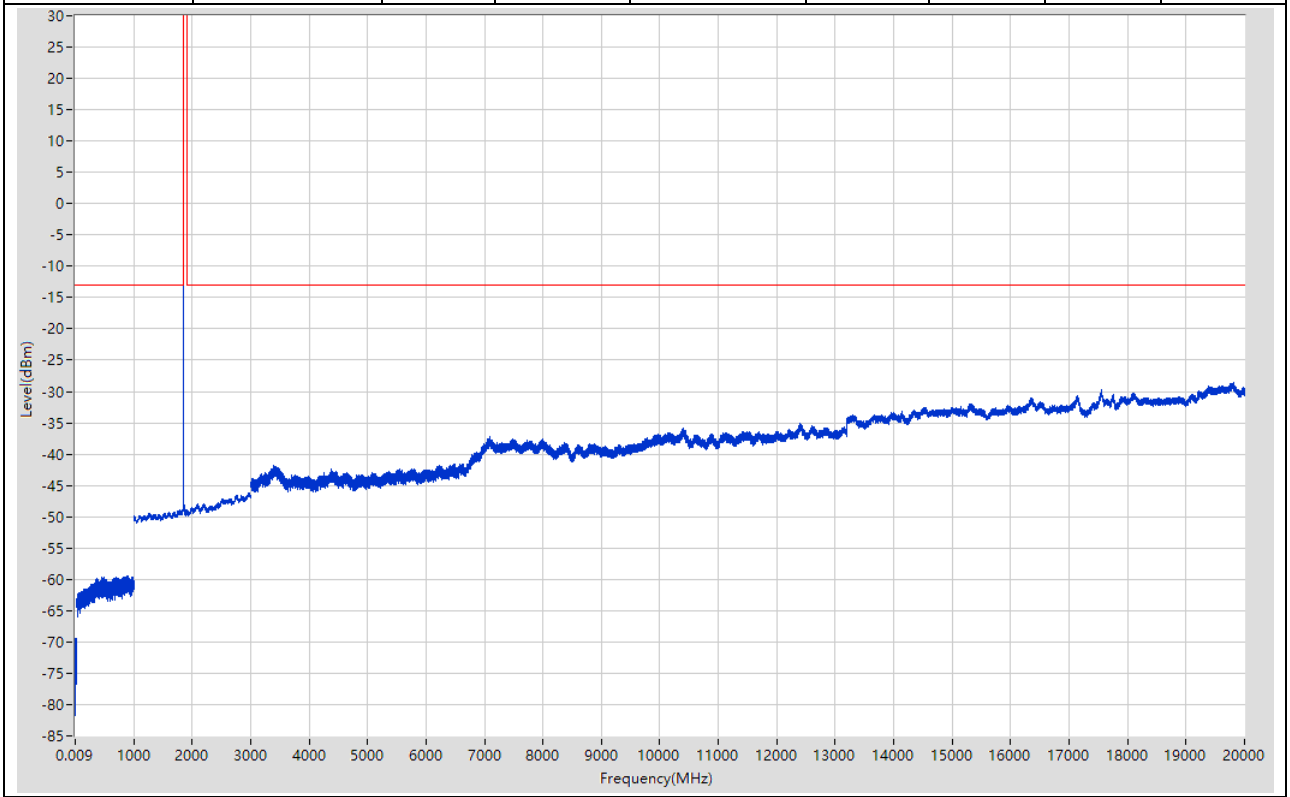

1.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:18607, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-73.3	-13	Pass	401
0.15	30	0.01	RMS	26.49	-68.7	-13	Pass	2986
30	1000	0.1	RMS	861.508	-59.29	-13	Pass	9701
1000	1840	1	RMS	1820	-48.77	-13	Pass	841
1840	1920	1	RMS	1850.2	21.61	60	Pass	401
1920	3000	1	RMS	2972	-46.26	-13	Pass	1081
3000	12000	1	RMS	10404	-35.89	-13	Pass	9002
12000	20000	1	RMS	19796	-28.58	-13	Pass	8001

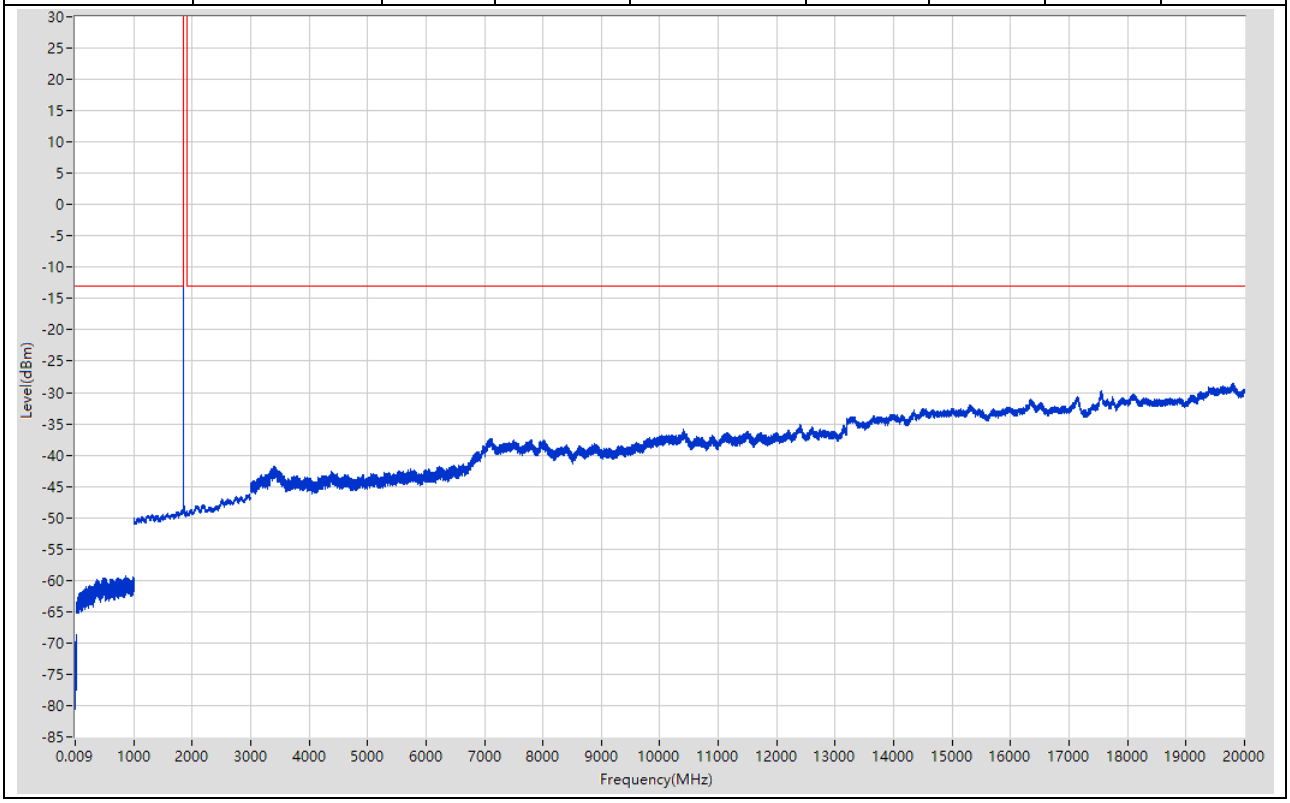

1.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:18900, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.076	-73.73	-13	Pass	401
0.15	30	0.01	RMS	0.19	-68.44	-13	Pass	2986
30	1000	0.1	RMS	822	-59.37	-13	Pass	9701
1000	1840	1	RMS	1817	-48.82	-13	Pass	841
1840	1920	1	RMS	1879.4	22.45	60	Pass	401
1920	3000	1	RMS	2969	-46.17	-13	Pass	1081
3000	12000	1	RMS	10418	-36.18	-13	Pass	9002
12000	20000	1	RMS	19797	-28.33	-13	Pass	8001

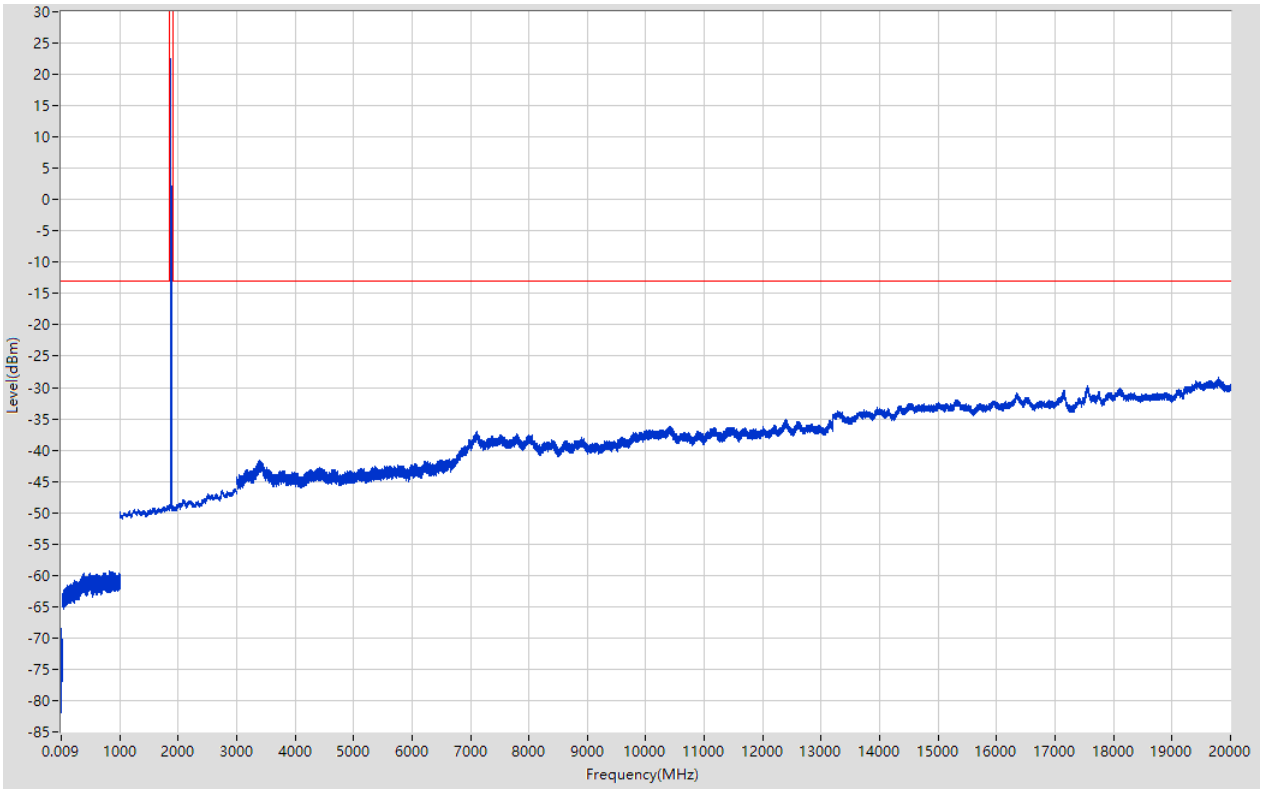

1.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:18900, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-71.9	-13	Pass	401
0.15	30	0.01	RMS	23.82	-69.6	-13	Pass	2986
30	1000	0.1	RMS	987.091	-59.53	-13	Pass	9701
1000	1840	1	RMS	1836	-48.83	-13	Pass	841
1840	1920	1	RMS	1879.4	21.58	60	Pass	401
1920	3000	1	RMS	2975	-46.11	-13	Pass	1081
3000	12000	1	RMS	11455	-36.07	-13	Pass	9002
12000	20000	1	RMS	19793	-28.37	-13	Pass	8001

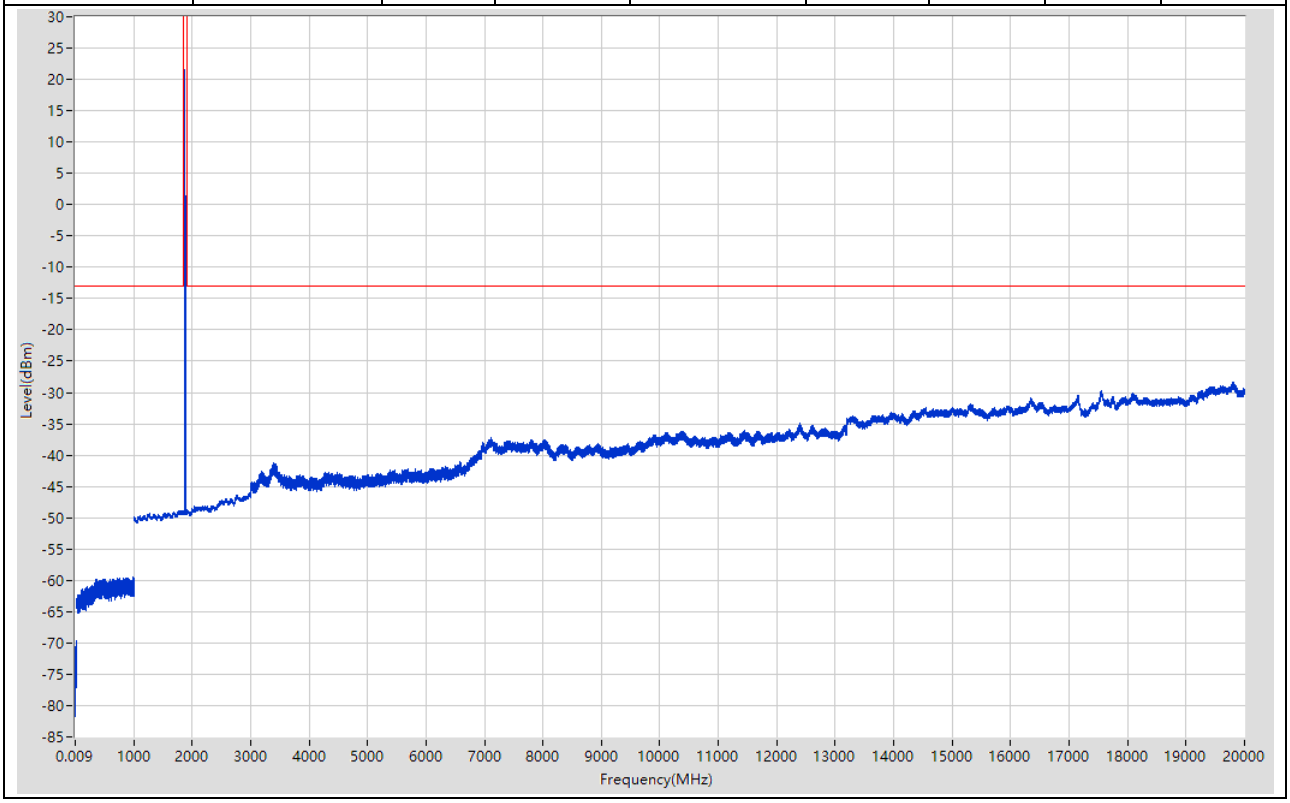

1.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:19193, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.35	-13	Pass	401
0.15	30	0.01	RMS	0.16	-68.76	-13	Pass	2986
30	1000	0.1	RMS	985.29	-58.56	-13	Pass	9701
1000	1840	1	RMS	1800	-48.77	-13	Pass	841
1840	1920	1	RMS	1908.8	22.21	60	Pass	401
1920	3000	1	RMS	2972	-46.09	-13	Pass	1081
3000	12000	1	RMS	11675	-36.12	-13	Pass	9002
12000	20000	1	RMS	19784	-28.48	-13	Pass	8001

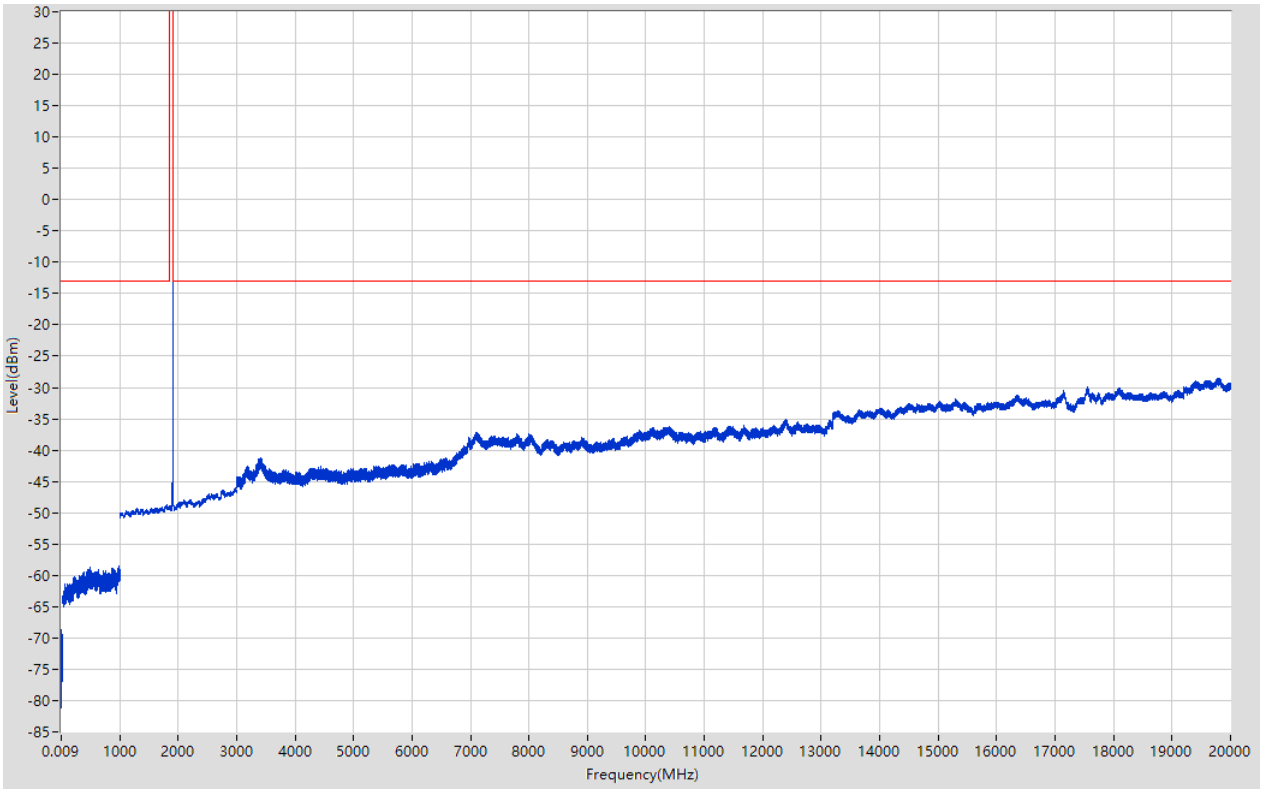

1.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:19193, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.96	-13	Pass	401
0.15	30	0.01	RMS	4.56	-69.6	-13	Pass	2986
30	1000	0.1	RMS	855.004	-58.72	-13	Pass	9701
1000	1840	1	RMS	1779	-48.77	-13	Pass	841
1840	1920	1	RMS	1908.8	21.44	60	Pass	401
1920	3000	1	RMS	2974	-46.1	-13	Pass	1081
3000	12000	1	RMS	10399	-35.91	-13	Pass	9002
12000	20000	1	RMS	19784	-28.4	-13	Pass	8001

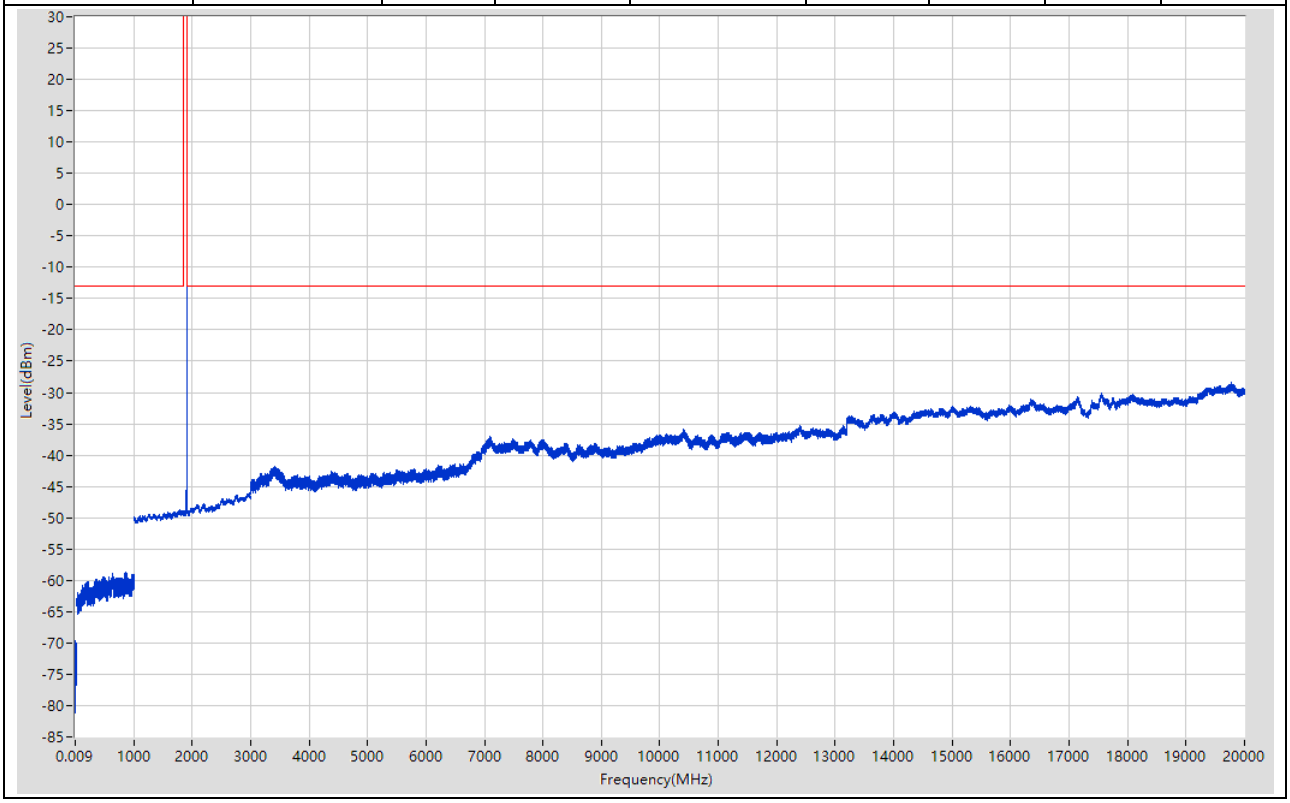

1.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:18615, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.77	-13	Pass	401
0.15	30	0.01	RMS	0.89	-69.49	-13	Pass	2986
30	1000	0.1	RMS	993.396	-59.46	-13	Pass	9701
1000	1840	1	RMS	1840	-48.74	-13	Pass	841
1840	1920	1	RMS	1850.2	22.43	60	Pass	401
1920	3000	1	RMS	2973	-46.2	-13	Pass	1081
3000	12000	1	RMS	10394	-36.01	-13	Pass	9002
12000	20000	1	RMS	19795	-28.65	-13	Pass	8001

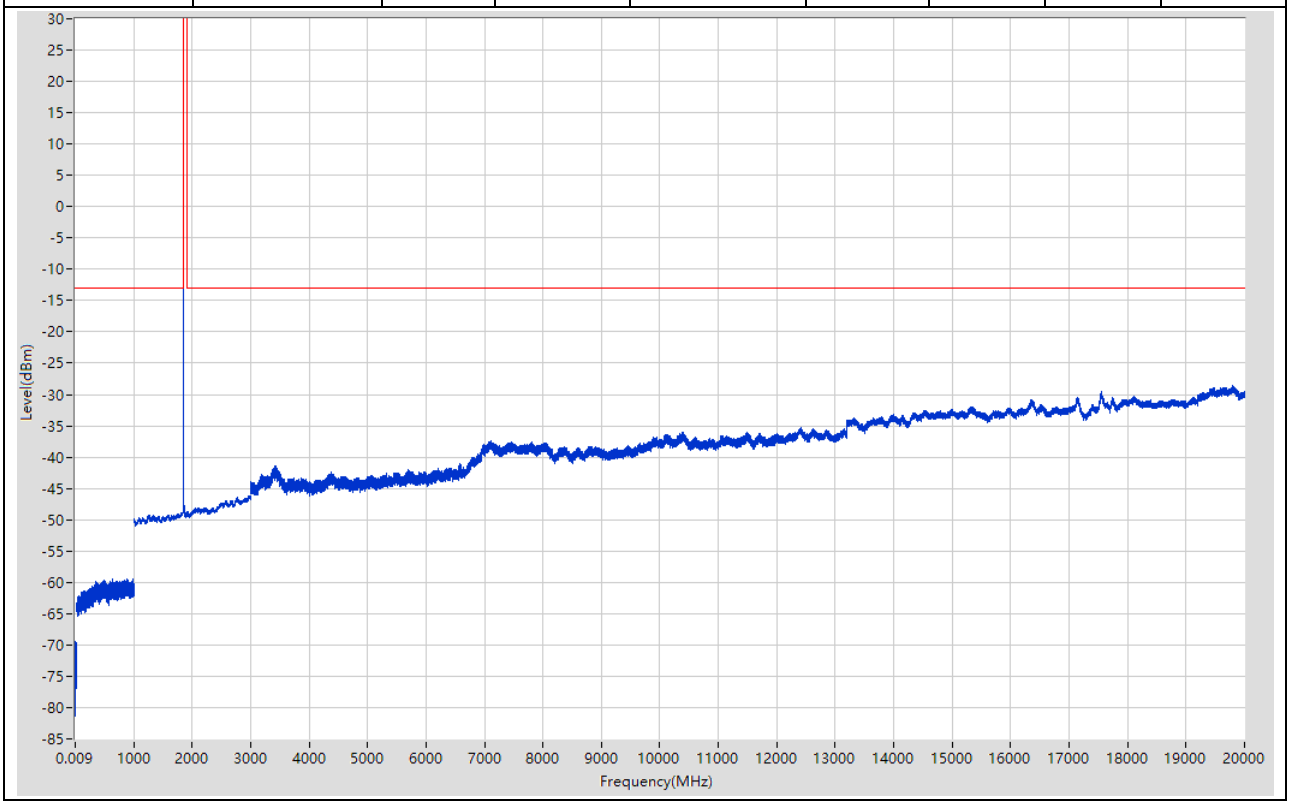

1.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:18615, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.016	-72.32	-13	Pass	401
0.15	30	0.01	RMS	0.18	-69.69	-13	Pass	2986
30	1000	0.1	RMS	895.531	-59.53	-13	Pass	9701
1000	1840	1	RMS	1825	-48.74	-13	Pass	841
1840	1920	1	RMS	1850.2	21.65	60	Pass	401
1920	3000	1	RMS	2957	-46.16	-13	Pass	1081
3000	12000	1	RMS	10397	-35.95	-13	Pass	9002
12000	20000	1	RMS	19801	-28.53	-13	Pass	8001

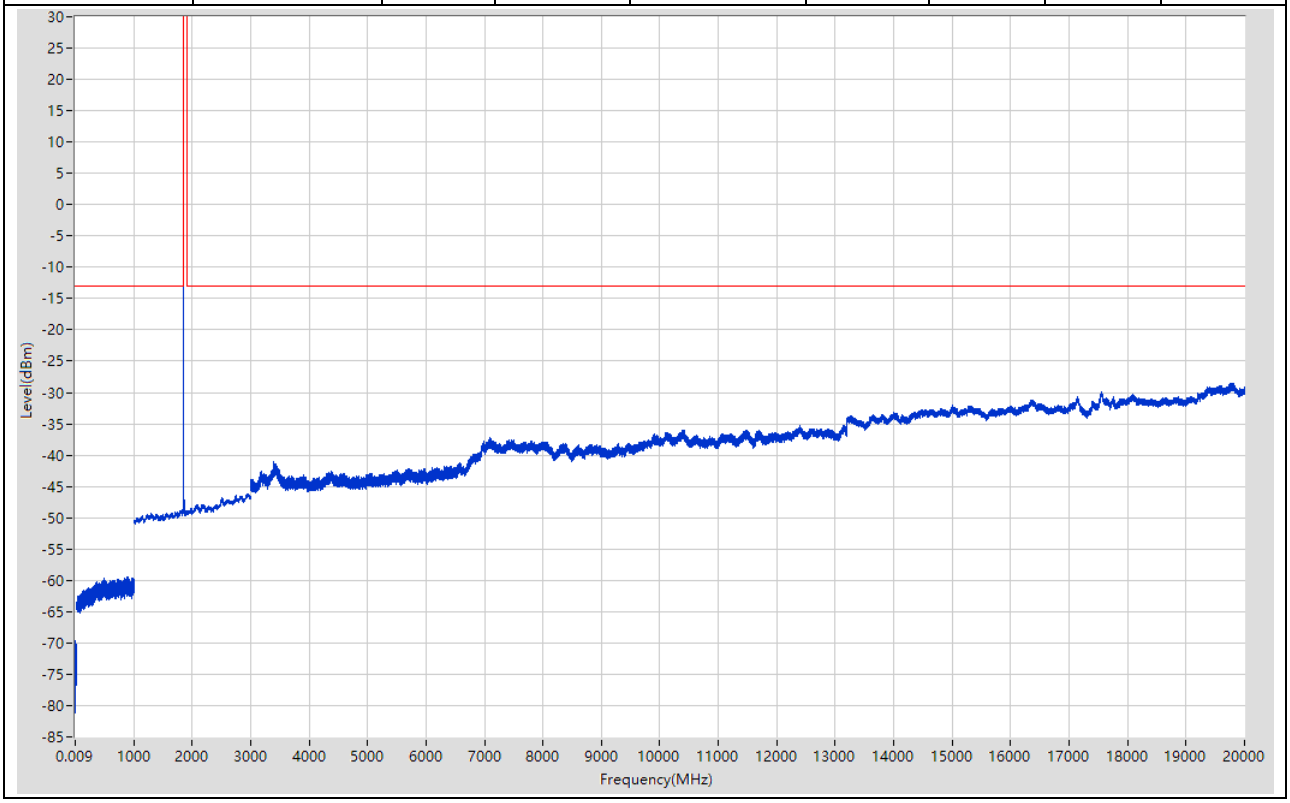

1.9. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:9, Channel:18900, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.47	-13	Pass	401
0.15	30	0.01	RMS	14.85	-69.94	-13	Pass	2986
30	1000	0.1	RMS	480.6	-59.41	-13	Pass	9701
1000	1840	1	RMS	1815	-48.76	-13	Pass	841
1840	1920	1	RMS	1878.6	22.42	60	Pass	401
1920	3000	1	RMS	2956	-46.18	-13	Pass	1081
3000	12000	1	RMS	11700	-35.98	-13	Pass	9002
12000	20000	1	RMS	19769	-28.83	-13	Pass	8001

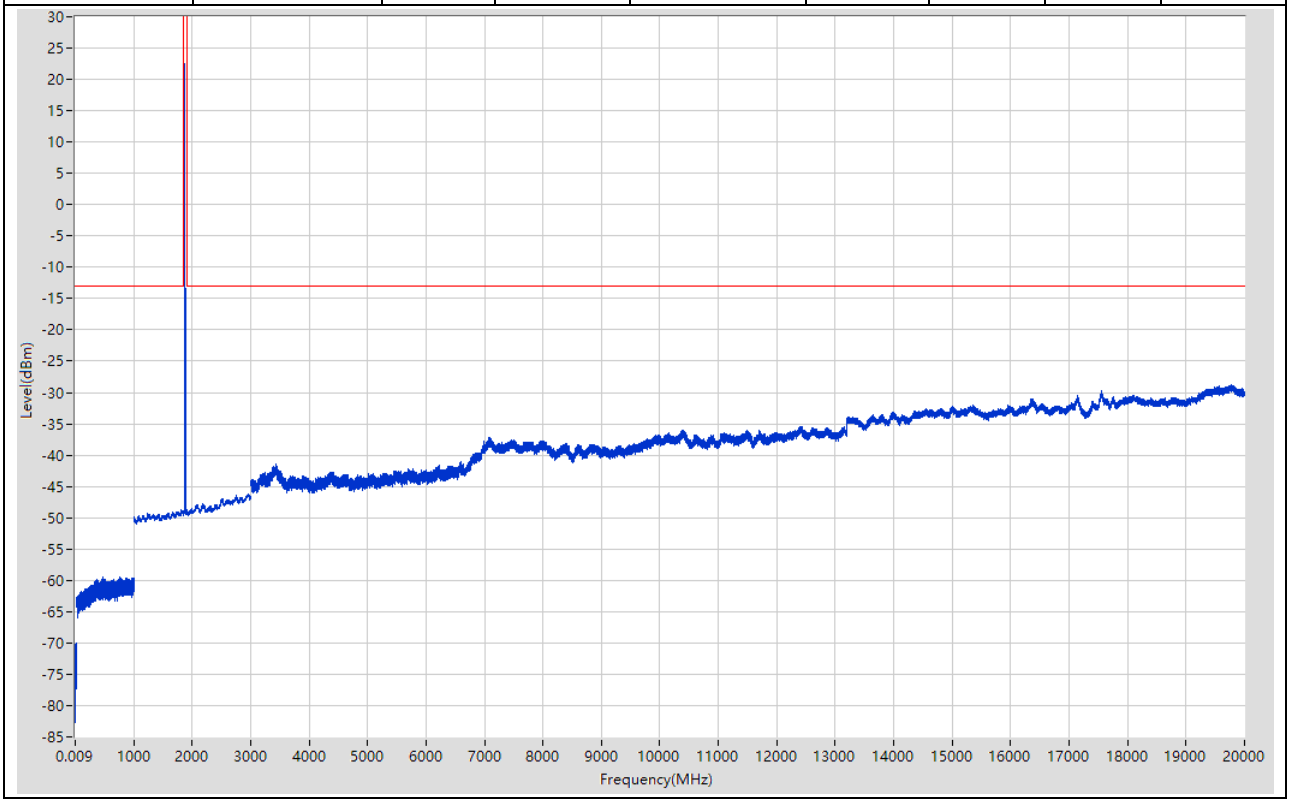

1.10. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:10, Channel:18900, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.88	-13	Pass	401
0.15	30	0.01	RMS	23.8	-69.19	-13	Pass	2986
30	1000	0.1	RMS	491.8	-59.38	-13	Pass	9701
1000	1840	1	RMS	1816	-48.8	-13	Pass	841
1840	1920	1	RMS	1878.6	21.56	60	Pass	401
1920	3000	1	RMS	2953	-46.18	-13	Pass	1081
3000	12000	1	RMS	10412	-35.93	-13	Pass	9002
12000	20000	1	RMS	19757	-28.66	-13	Pass	8001

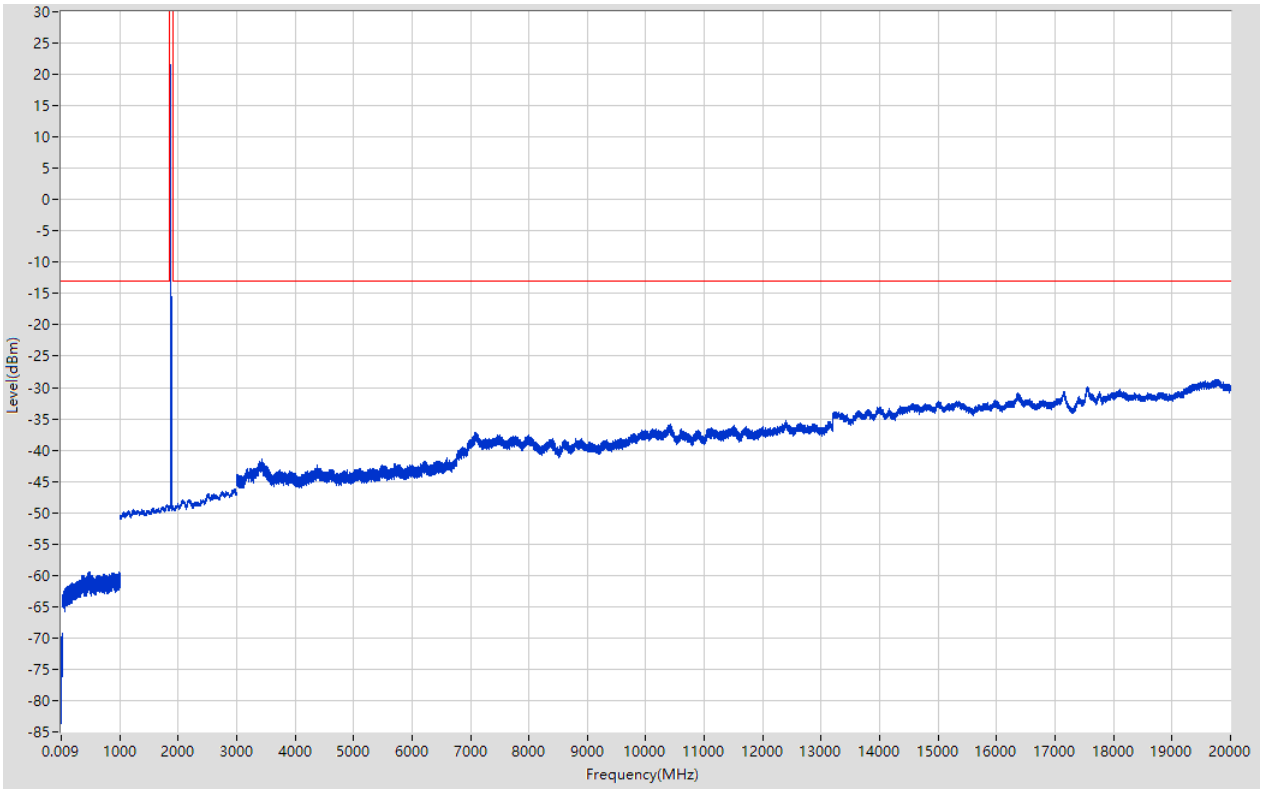

1.11. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:11, Channel:19185, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.26	-13	Pass	401
0.15	30	0.01	RMS	22.06	-69.5	-13	Pass	2986
30	1000	0.1	RMS	475.4	-59.37	-13	Pass	9701
1000	1840	1	RMS	1812	-48.77	-13	Pass	841
1840	1920	1	RMS	1907.2	22.26	60	Pass	401
1920	3000	1	RMS	2921	-46.34	-13	Pass	1081
3000	12000	1	RMS	11985	-36.12	-13	Pass	9002
12000	20000	1	RMS	19787	-28.61	-13	Pass	8001

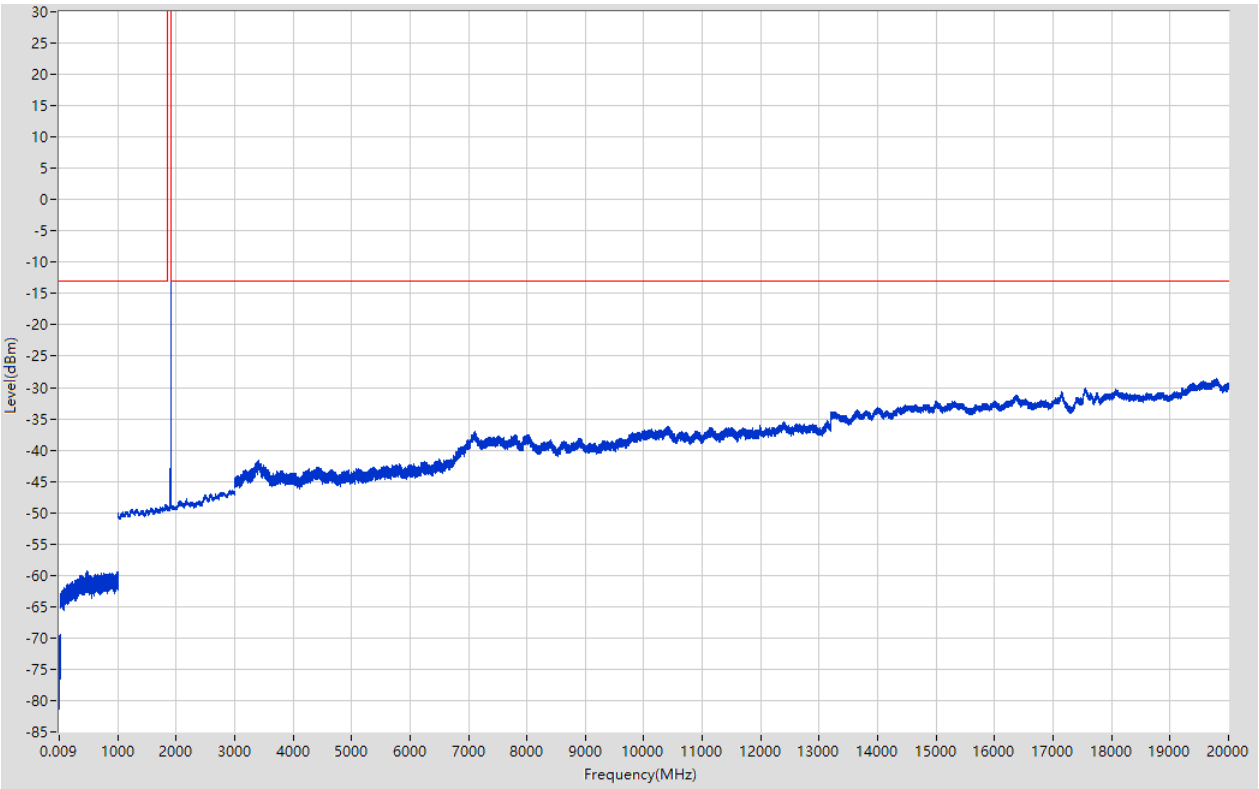

1.12. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:12, Channel:19185, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.015	-73.85	-13	Pass	401
0.15	30	0.01	RMS	22.37	-69.7	-13	Pass	2986
30	1000	0.1	RMS	505.2	-59.54	-13	Pass	9701
1000	1840	1	RMS	1808	-48.83	-13	Pass	841
1840	1920	1	RMS	1907.2	21.49	60	Pass	401
1920	3000	1	RMS	2925	-46.42	-13	Pass	1081
3000	12000	1	RMS	10395	-35.94	-13	Pass	9002
12000	20000	1	RMS	19807	-28.84	-13	Pass	8001

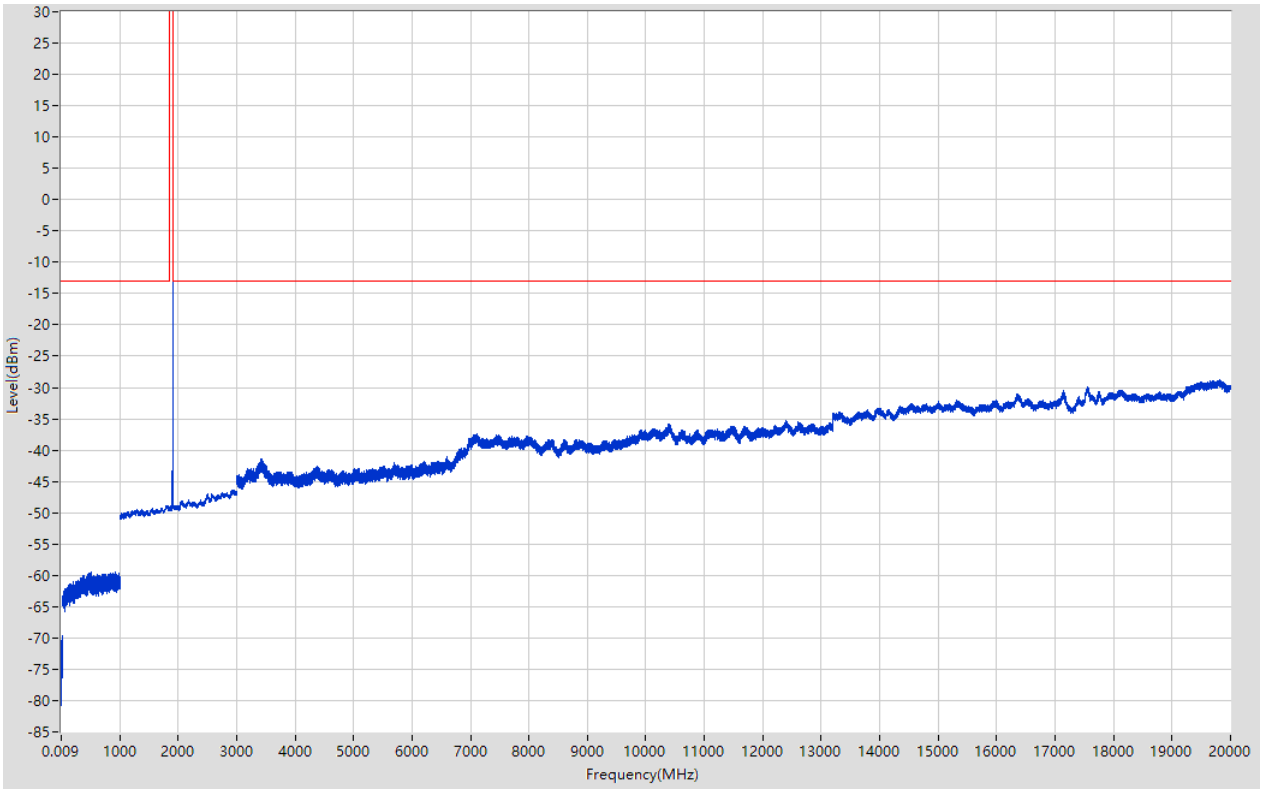

1.13. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:13, Channel:18625, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.81	-13	Pass	401
0.15	30	0.01	RMS	0.32	-69.16	-13	Pass	2986
30	1000	0.1	RMS	914.844	-59.45	-13	Pass	9701
1000	1840	1	RMS	1840	-48.73	-13	Pass	841
1840	1920	1	RMS	1850.2	22.59	60	Pass	401
1920	3000	1	RMS	2959	-46.28	-13	Pass	1081
3000	12000	1	RMS	10395	-36.05	-13	Pass	9002
12000	20000	1	RMS	19767	-28.67	-13	Pass	8001

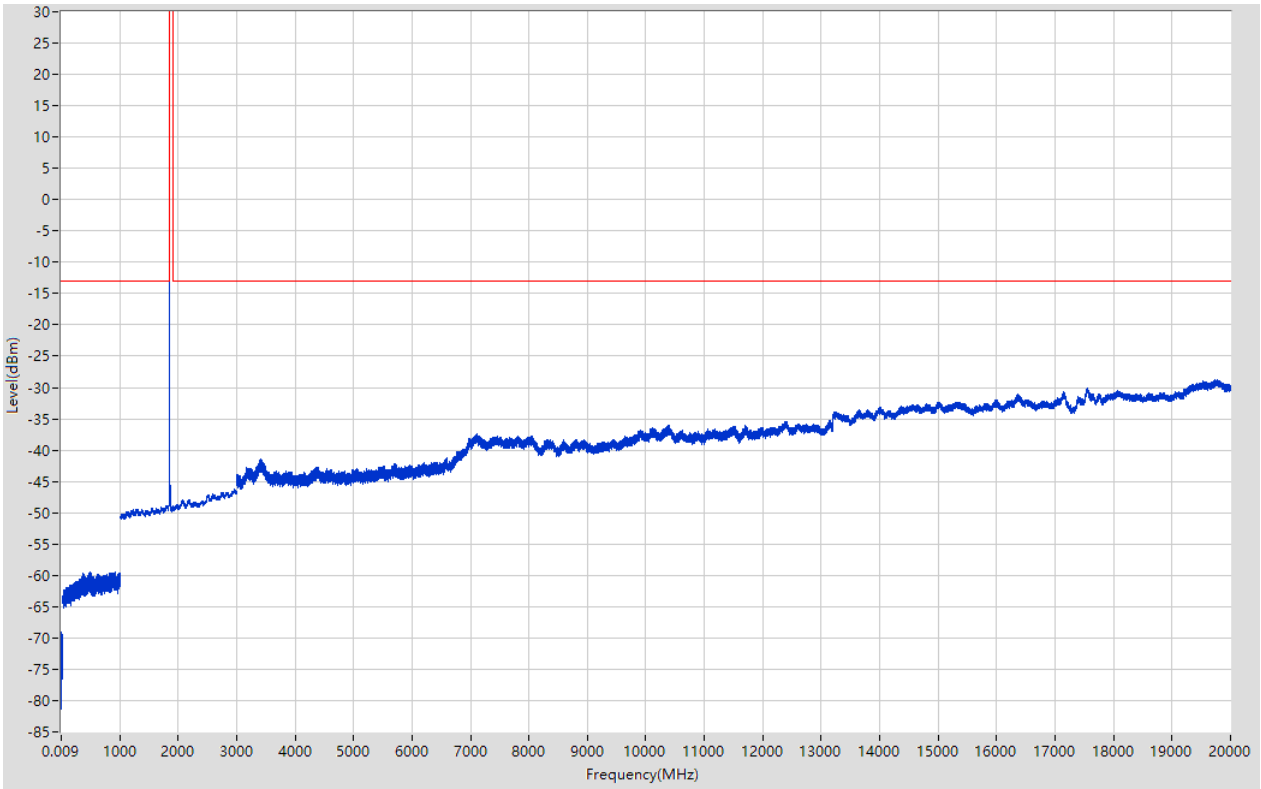

1.14. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:14, Channel:18625, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.22	-13	Pass	401
0.15	30	0.01	RMS	1.22	-69.56	-13	Pass	2986
30	1000	0.1	RMS	480.8	-59.58	-13	Pass	9701
1000	1840	1	RMS	1840	-48.57	-13	Pass	841
1840	1920	1	RMS	1850.2	21.61	60	Pass	401
1920	3000	1	RMS	2970	-46.14	-13	Pass	1081
3000	12000	1	RMS	10408	-36.06	-13	Pass	9002
12000	20000	1	RMS	19764	-28.64	-13	Pass	8001

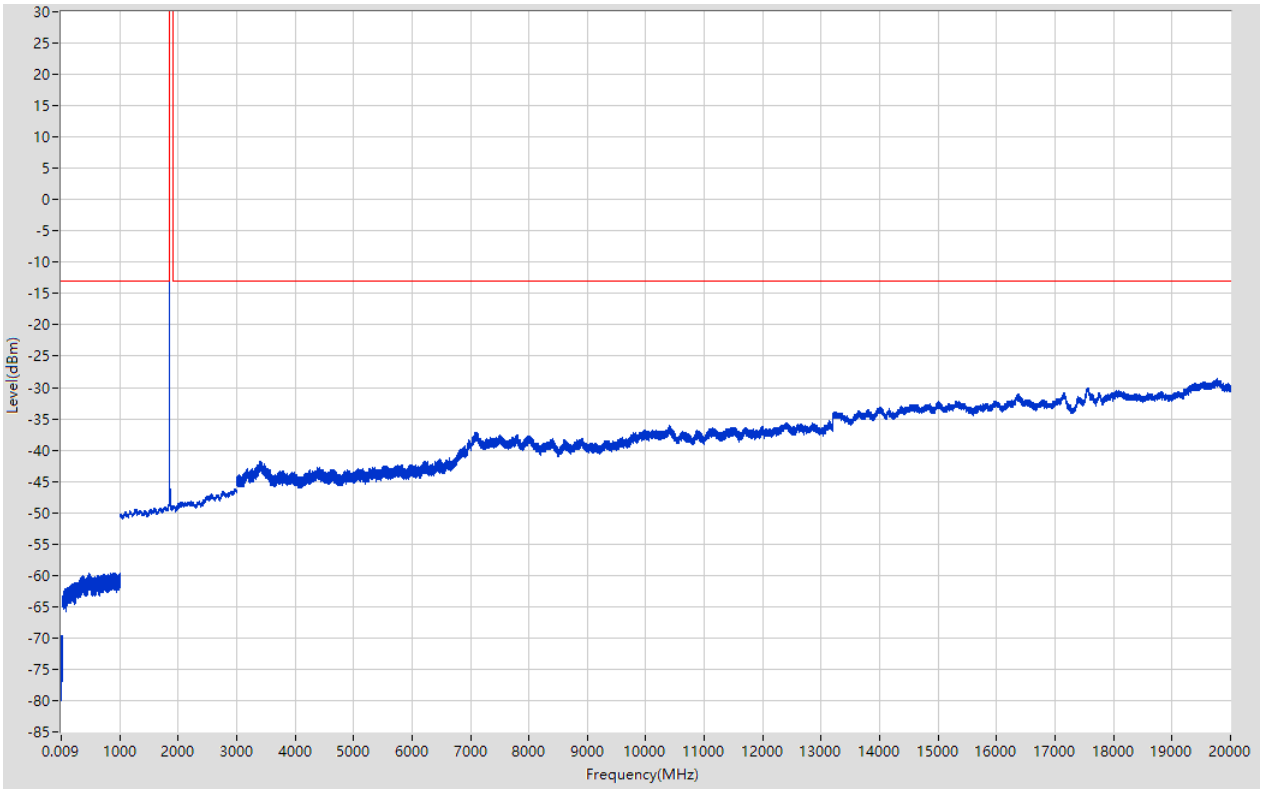

1.15. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:15, Channel:18900, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.66	-13	Pass	401
0.15	30	0.01	RMS	7.78	-69.44	-13	Pass	2986
30	1000	0.1	RMS	868.313	-59.56	-13	Pass	9701
1000	1840	1	RMS	1786	-48.9	-13	Pass	841
1840	1920	1	RMS	1877.8	22.45	60	Pass	401
1920	3000	1	RMS	2968	-46.18	-13	Pass	1081
3000	12000	1	RMS	10403	-35.99	-13	Pass	9002
12000	20000	1	RMS	19797	-28.53	-13	Pass	8001

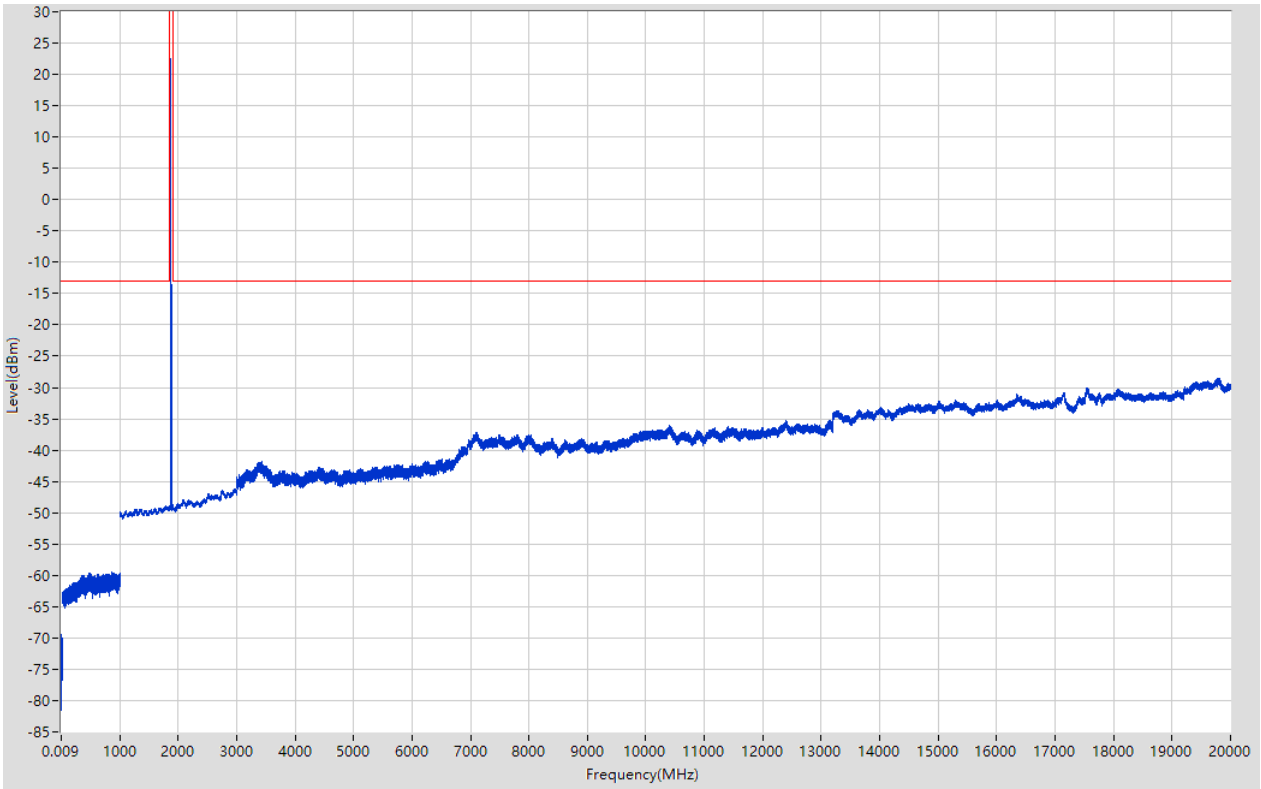

1.16. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:16, Channel:18900, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.87	-13	Pass	401
0.15	30	0.01	RMS	0.17	-69.44	-13	Pass	2986
30	1000	0.1	RMS	900.834	-59.48	-13	Pass	9701
1000	1840	1	RMS	1797	-48.75	-13	Pass	841
1840	1920	1	RMS	1877.8	21.72	60	Pass	401
1920	3000	1	RMS	2967	-46.11	-13	Pass	1081
3000	12000	1	RMS	10392	-35.89	-13	Pass	9002
12000	20000	1	RMS	19808	-28.6	-13	Pass	8001

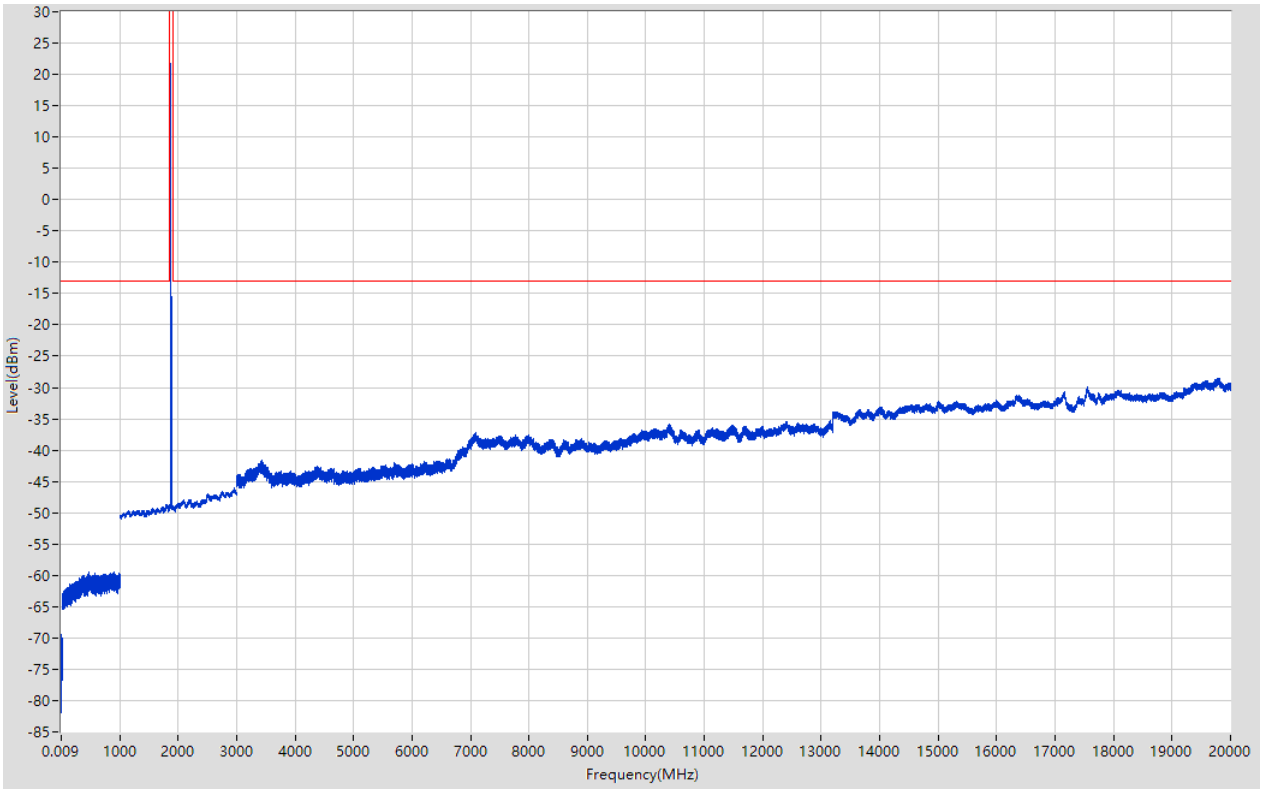

1.17. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:17, Channel:19175, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-71.73	-13	Pass	401
0.15	30	0.01	RMS	25.03	-69.32	-13	Pass	2986
30	1000	0.1	RMS	912.242	-59.51	-13	Pass	9701
1000	1840	1	RMS	1781	-48.95	-13	Pass	841
1840	1920	1	RMS	1905.2	22.26	60	Pass	401
1920	3000	1	RMS	2982	-46.22	-13	Pass	1081
3000	12000	1	RMS	10387	-36	-13	Pass	9002
12000	20000	1	RMS	19790	-28.48	-13	Pass	8001

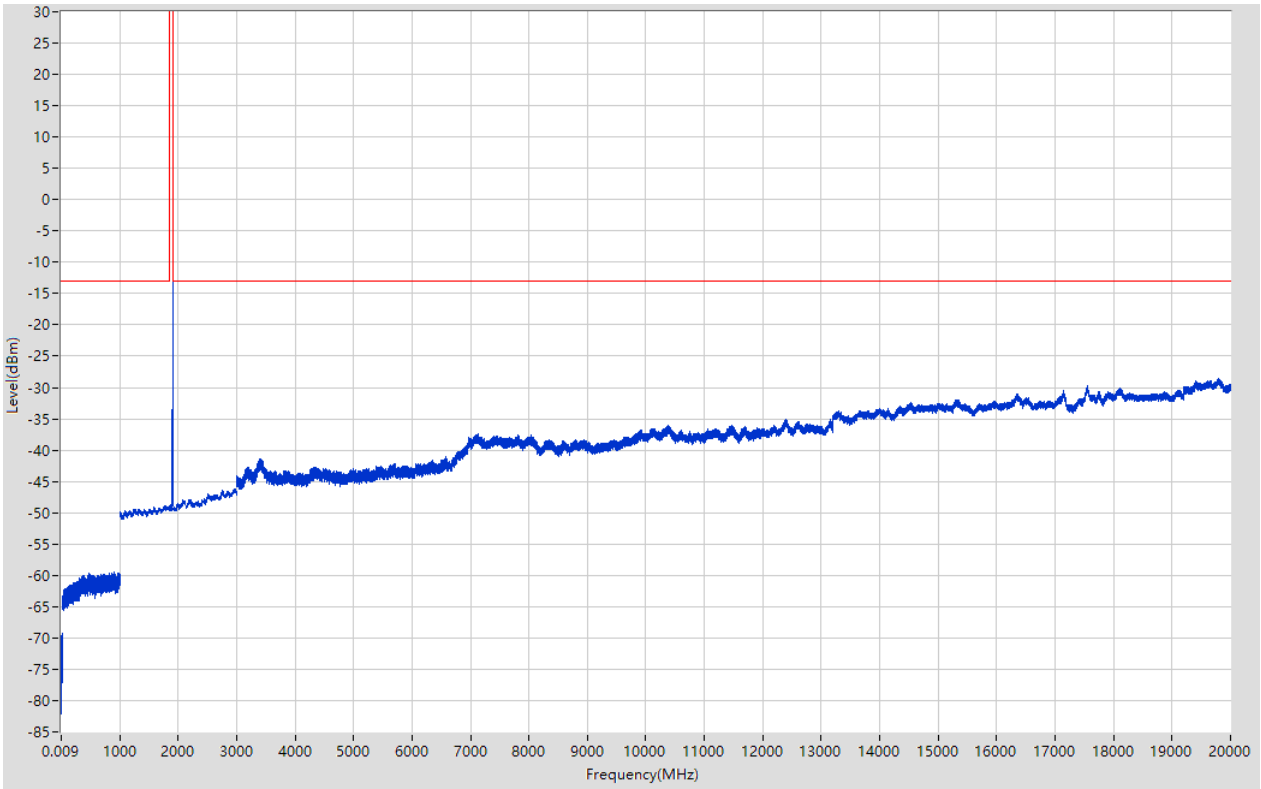

1.18. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:18, Channel:19175, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.018	-72.2	-13	Pass	401
0.15	30	0.01	RMS	21.65	-69.67	-13	Pass	2986
30	1000	0.1	RMS	873.916	-59.36	-13	Pass	9701
1000	1840	1	RMS	1783	-48.92	-13	Pass	841
1840	1920	1	RMS	1905.2	21.69	60	Pass	401
1920	3000	1	RMS	2957	-46.18	-13	Pass	1081
3000	12000	1	RMS	10404	-36.23	-13	Pass	9002
12000	20000	1	RMS	19803	-28.53	-13	Pass	8001

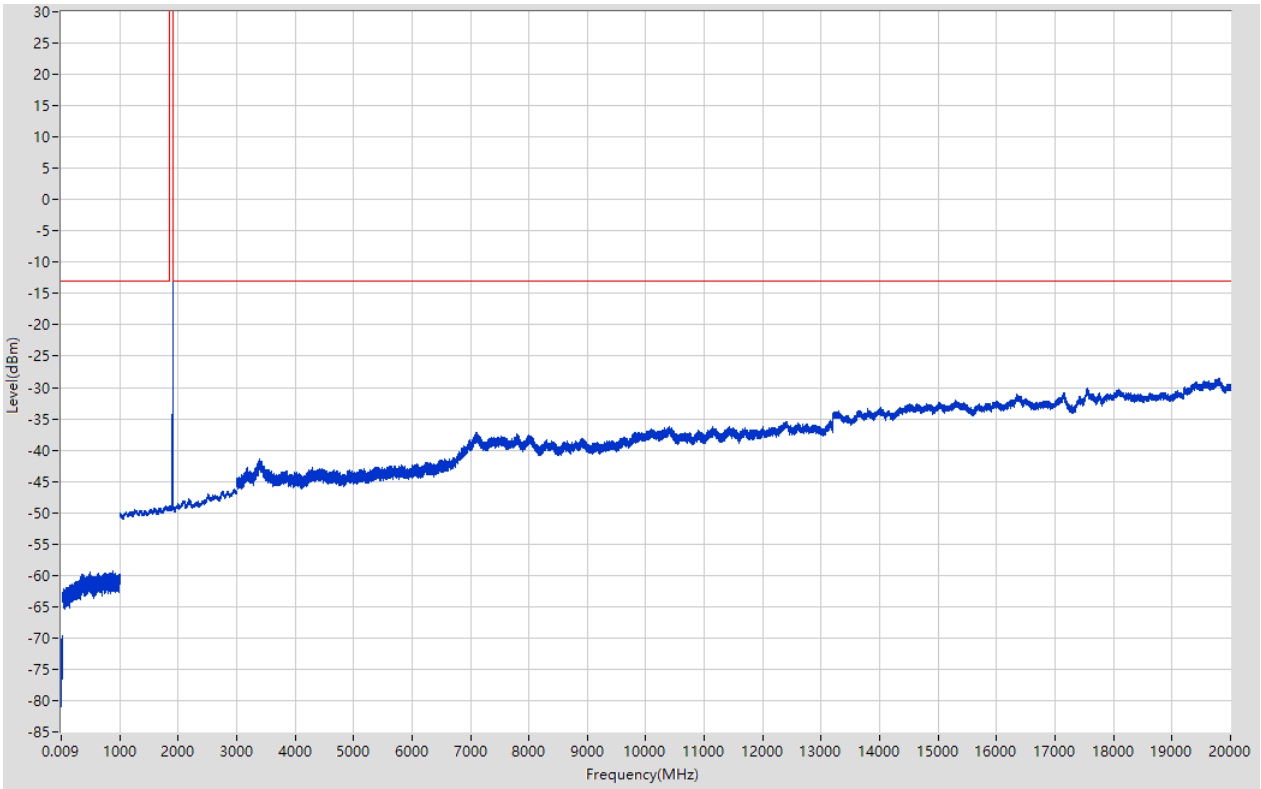

1.19. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:19, Channel:18650, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.59	-13	Pass	401
0.15	30	0.01	RMS	27.04	-69.34	-13	Pass	2986
30	1000	0.1	RMS	906.238	-59.53	-13	Pass	9701
1000	1840	1	RMS	1794	-48.85	-13	Pass	841
1840	1920	1	RMS	1850.4	22.47	60	Pass	401
1920	3000	1	RMS	2972	-46.18	-13	Pass	1081
3000	12000	1	RMS	10404	-36	-13	Pass	9002
12000	20000	1	RMS	19807	-28.52	-13	Pass	8001

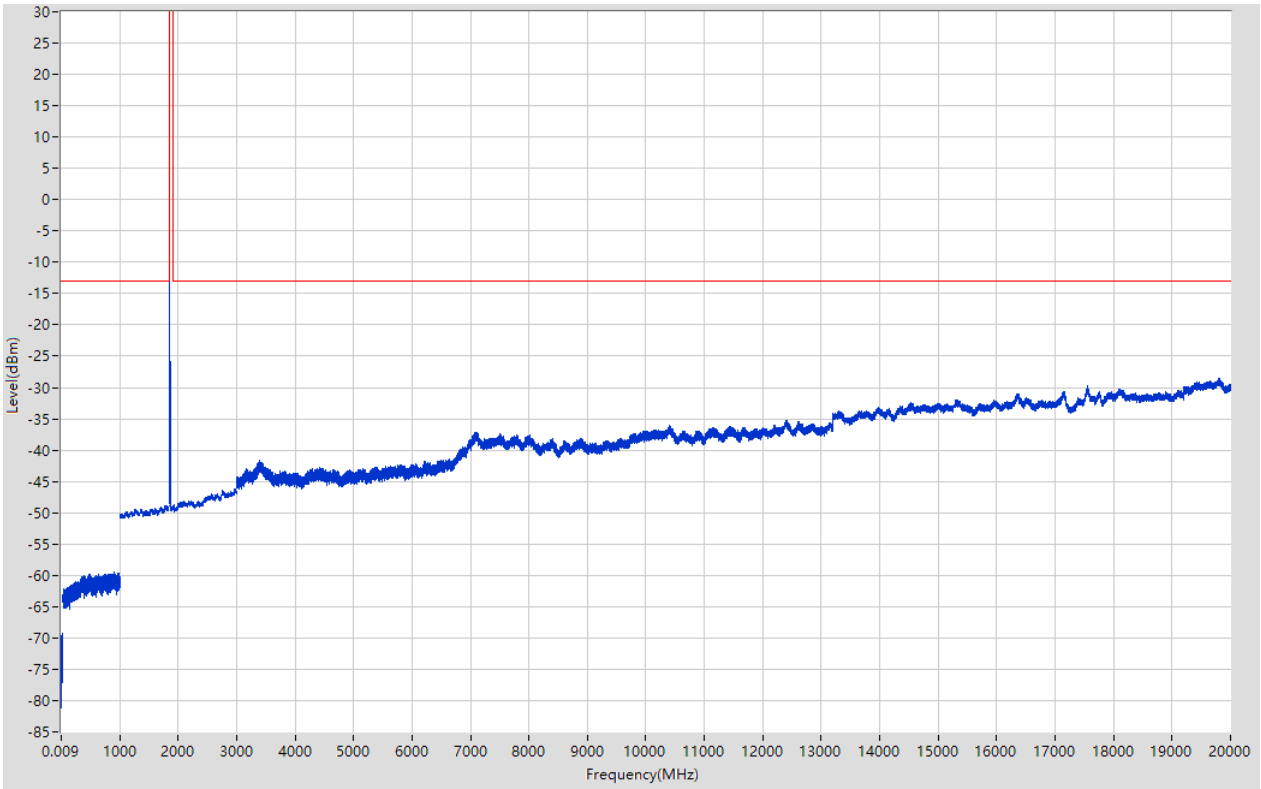

1.20. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:20, Channel:18650, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.62	-13	Pass	401
0.15	30	0.01	RMS	4.58	-68.85	-13	Pass	2986
30	1000	0.1	RMS	859.107	-59.42	-13	Pass	9701
1000	1840	1	RMS	1840	-48.66	-13	Pass	841
1840	1920	1	RMS	1850.6	21.58	60	Pass	401
1920	3000	1	RMS	2962	-46.22	-13	Pass	1081
3000	12000	1	RMS	10402	-35.94	-13	Pass	9002
12000	20000	1	RMS	19805	-28.52	-13	Pass	8001

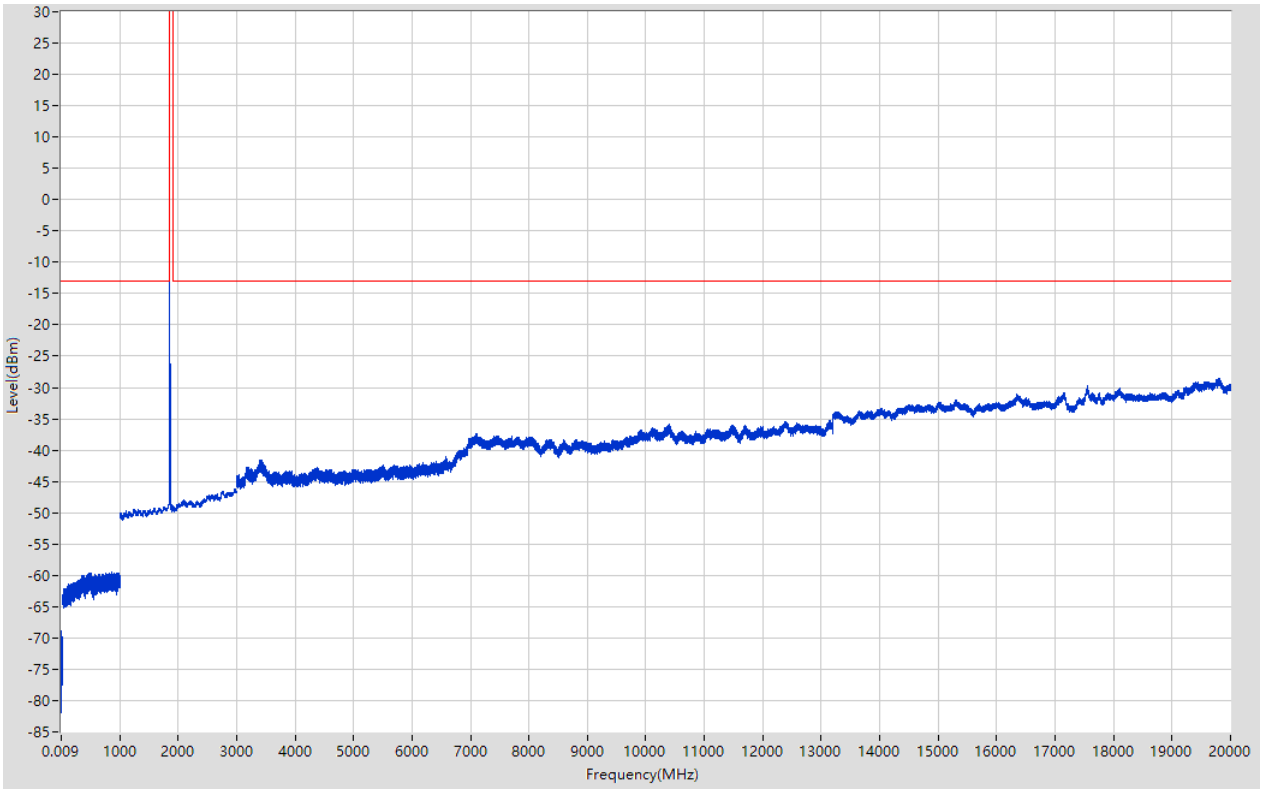

1.21. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:21, Channel:18900, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.78	-13	Pass	401
0.15	30	0.01	RMS	15.91	-69.6	-13	Pass	2986
30	1000	0.1	RMS	993.996	-59.37	-13	Pass	9701
1000	1840	1	RMS	1805	-48.78	-13	Pass	841
1840	1920	1	RMS	1875.4	22.34	60	Pass	401
1920	3000	1	RMS	2984	-46.39	-13	Pass	1081
3000	12000	1	RMS	10403	-36.22	-13	Pass	9002
12000	20000	1	RMS	19825	-28.76	-13	Pass	8001

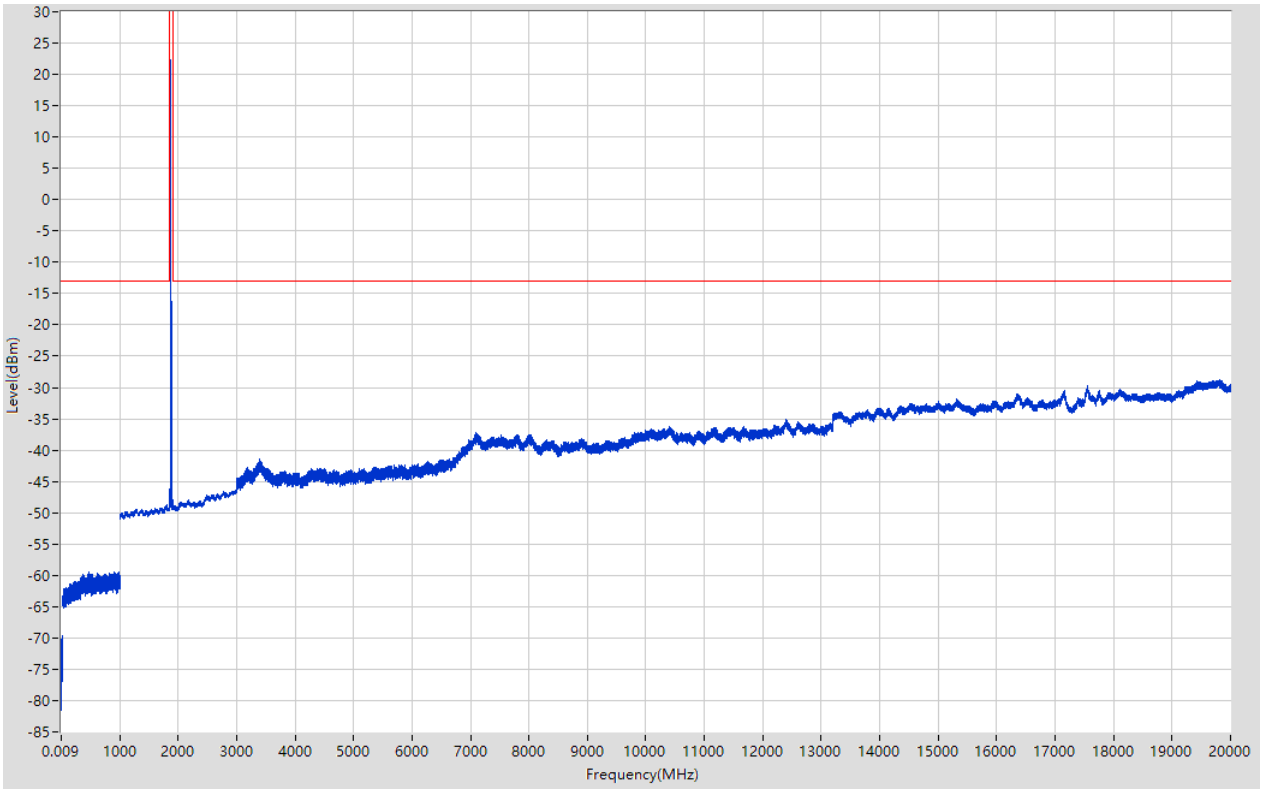

1.22. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:22, Channel:18900, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.5	-13	Pass	401
0.15	30	0.01	RMS	14.78	-69.68	-13	Pass	2986
30	1000	0.1	RMS	885.924	-59.62	-13	Pass	9701
1000	1840	1	RMS	1821	-49.01	-13	Pass	841
1840	1920	1	RMS	1875.4	21.5	60	Pass	401
1920	3000	1	RMS	2992	-46.28	-13	Pass	1081
3000	12000	1	RMS	11692	-36.11	-13	Pass	9002
12000	20000	1	RMS	19786	-28.71	-13	Pass	8001

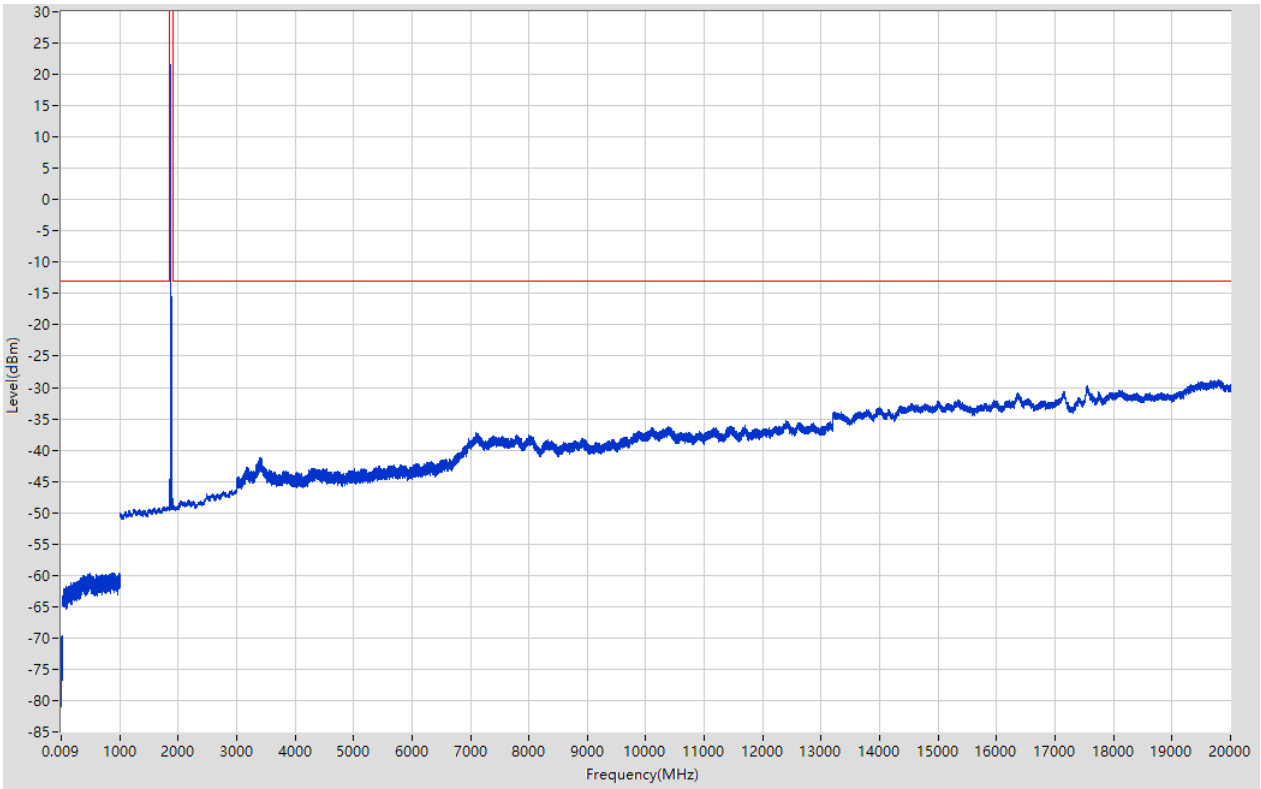

1.23. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:23, Channel:19150, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.66	-13	Pass	401
0.15	30	0.01	RMS	12.1	-69.03	-13	Pass	2986
30	1000	0.1	RMS	902.736	-59.36	-13	Pass	9701
1000	1840	1	RMS	1786	-49.01	-13	Pass	841
1840	1920	1	RMS	1900.4	22.15	60	Pass	401
1920	3000	1	RMS	2929	-46.41	-13	Pass	1081
3000	12000	1	RMS	11693	-36.05	-13	Pass	9002
12000	20000	1	RMS	19784	-28.51	-13	Pass	8001

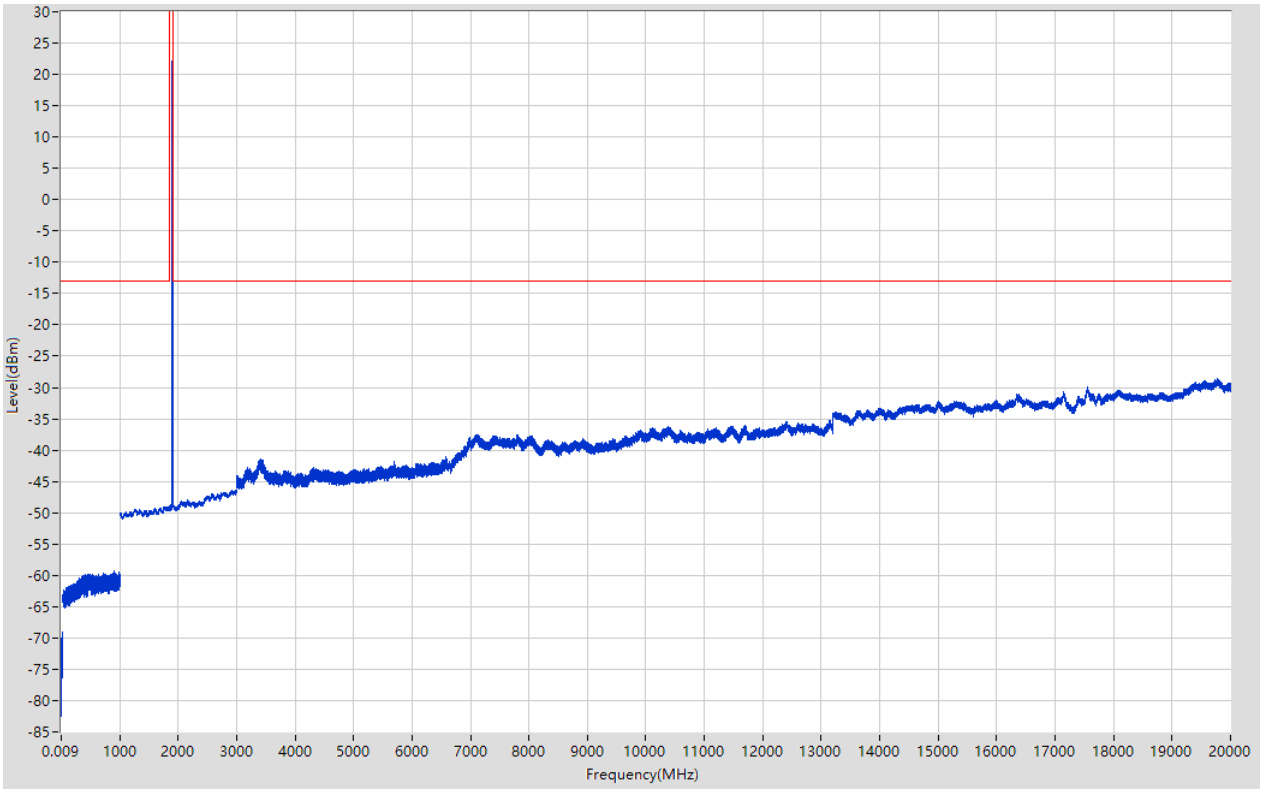

1.24. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:24, Channel:19150, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-71.86	-13	Pass	401
0.15	30	0.01	RMS	0.42	-68.78	-13	Pass	2986
30	1000	0.1	RMS	876.318	-59.55	-13	Pass	9701
1000	1840	1	RMS	1827	-48.79	-13	Pass	841
1840	1920	1	RMS	1900.4	21.37	60	Pass	401
1920	3000	1	RMS	2964	-46.25	-13	Pass	1081
3000	12000	1	RMS	11696	-36.18	-13	Pass	9002
12000	20000	1	RMS	19783	-28.61	-13	Pass	8001

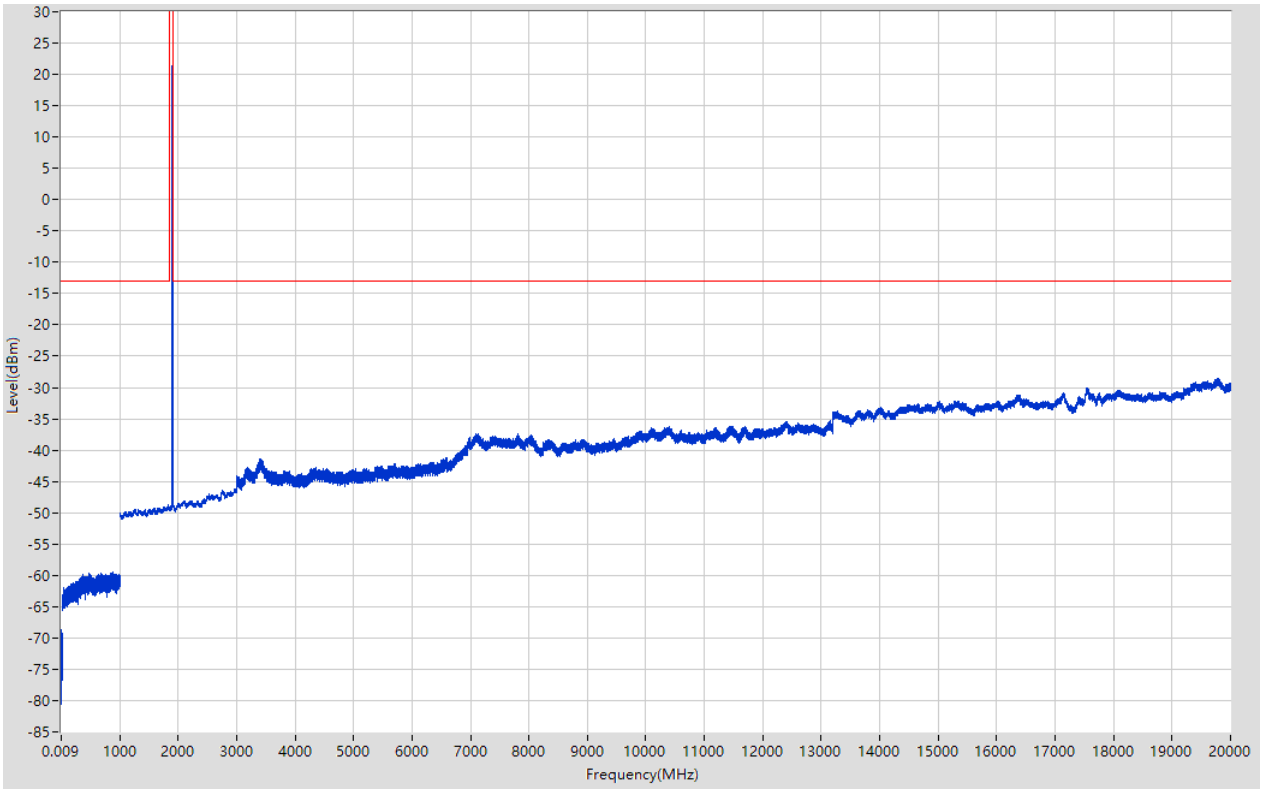

1.25. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:25, Channel:18675, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.59	-13	Pass	401
0.15	30	0.01	RMS	29.26	-69.36	-13	Pass	2986
30	1000	0.1	RMS	858.706	-59.25	-13	Pass	9701
1000	1840	1	RMS	1838	-46.21	-13	Pass	841
1840	1920	1	RMS	1850.8	22.47	60	Pass	401
1920	3000	1	RMS	2967	-46.43	-13	Pass	1081
3000	12000	1	RMS	10398	-35.79	-13	Pass	9002
12000	20000	1	RMS	19792	-28.62	-13	Pass	8001

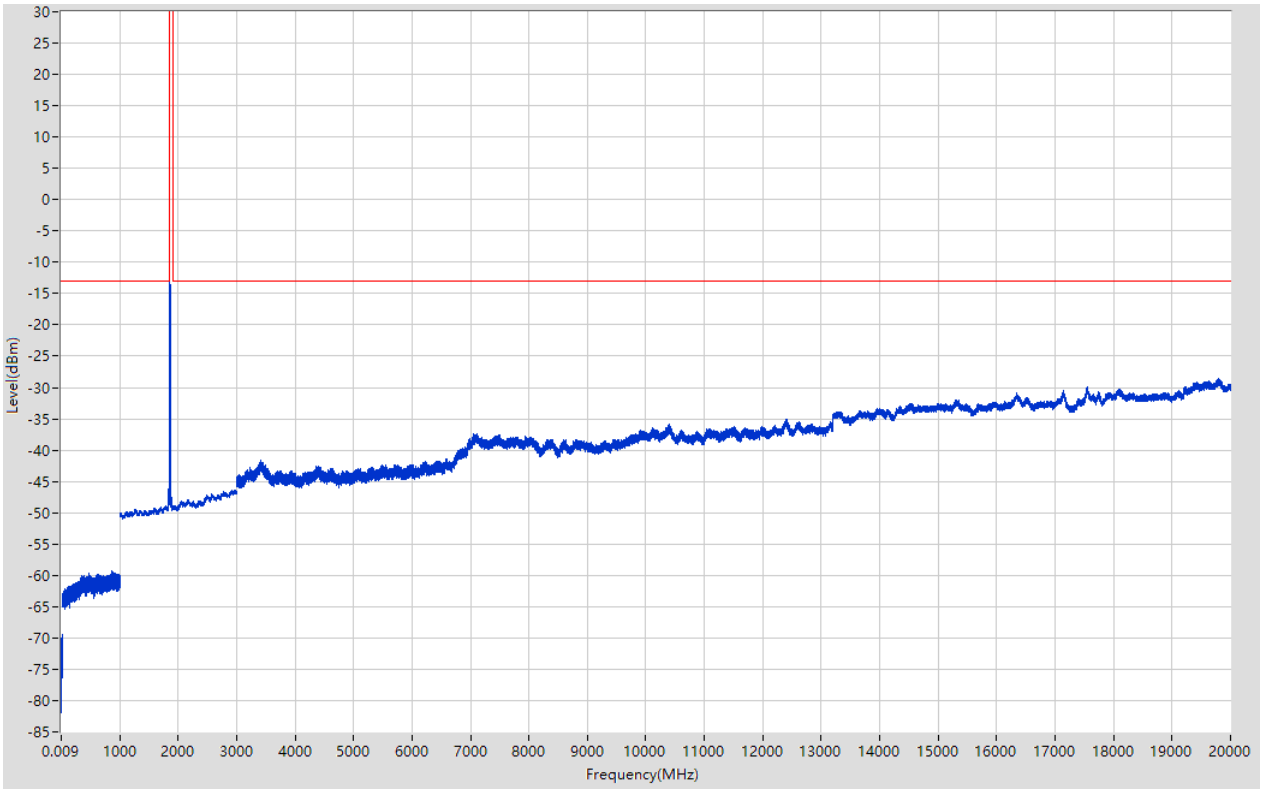

1.26. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:26, Channel:18675, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-72.22	-13	Pass	401
0.15	30	0.01	RMS	0.45	-68.56	-13	Pass	2986
30	1000	0.1	RMS	990.494	-59.58	-13	Pass	9701
1000	1840	1	RMS	1838	-47.4	-13	Pass	841
1840	1920	1	RMS	1850.8	21.69	60	Pass	401
1920	3000	1	RMS	2955	-46.33	-13	Pass	1081
3000	12000	1	RMS	11411	-36.27	-13	Pass	9002
12000	20000	1	RMS	19735	-28.77	-13	Pass	8001

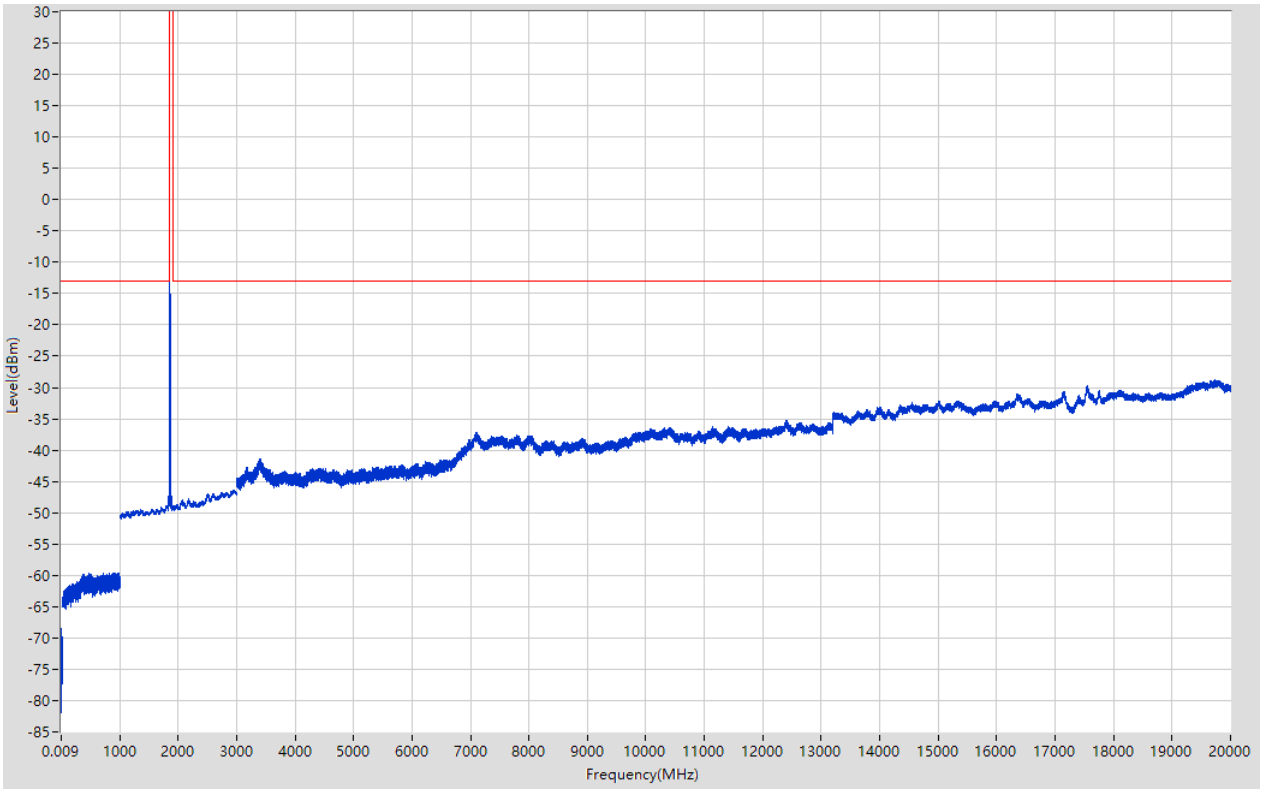

1.27. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:27, Channel:18900, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.68	-13	Pass	401
0.15	30	0.01	RMS	17.77	-68.84	-13	Pass	2986
30	1000	0.1	RMS	911.341	-59.37	-13	Pass	9701
1000	1840	1	RMS	1821	-48.73	-13	Pass	841
1840	1920	1	RMS	1873.2	22.42	60	Pass	401
1920	3000	1	RMS	2976	-46.18	-13	Pass	1081
3000	12000	1	RMS	11445	-36.14	-13	Pass	9002
12000	20000	1	RMS	19774	-28.58	-13	Pass	8001

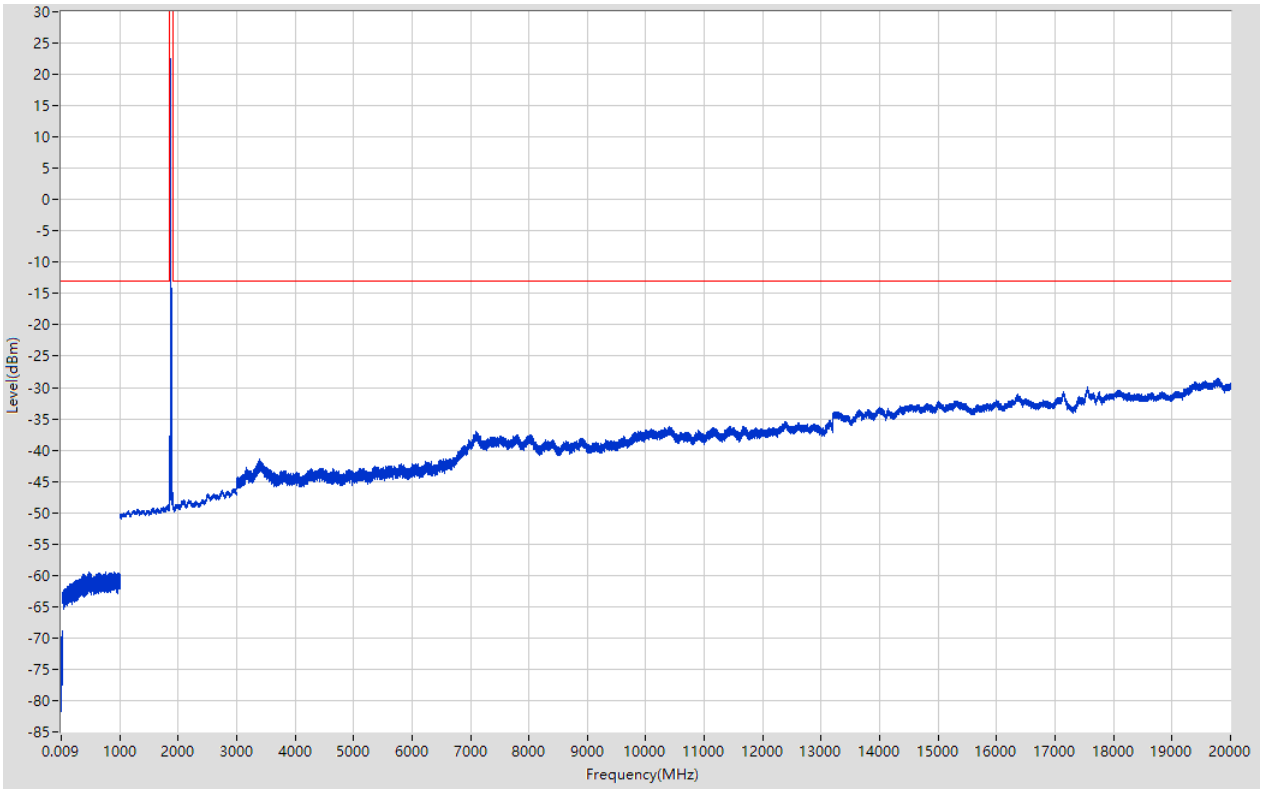

1.28. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:28, Channel:18900, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.019	-73.33	-13	Pass	401
0.15	30	0.01	RMS	0.27	-69.96	-13	Pass	2986
30	1000	0.1	RMS	928.953	-59.37	-13	Pass	9701
1000	1840	1	RMS	1820	-48.84	-13	Pass	841
1840	1920	1	RMS	1873.2	21.5	60	Pass	401
1920	3000	1	RMS	2978	-46.22	-13	Pass	1081
3000	12000	1	RMS	11682	-36.11	-13	Pass	9002
12000	20000	1	RMS	19793	-28.73	-13	Pass	8001

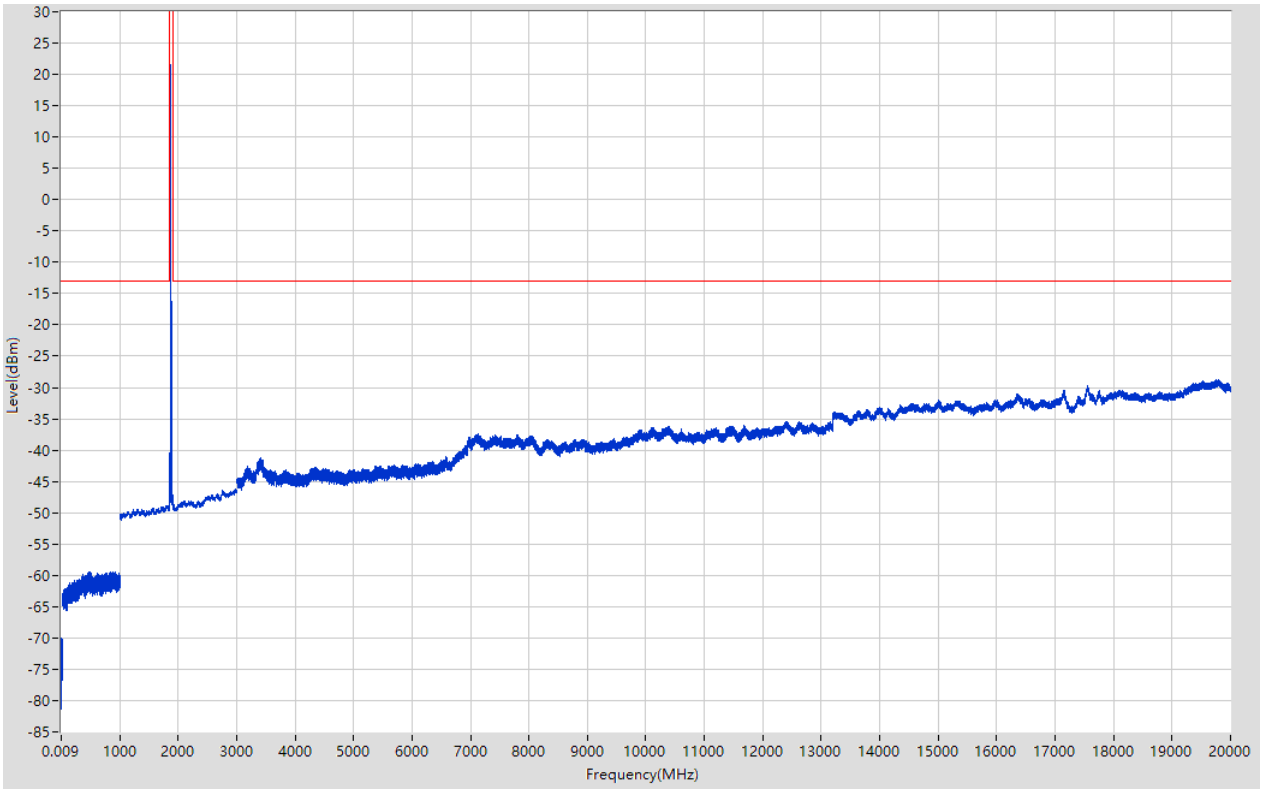

1.29. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:29, Channel:19125, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72	-13	Pass	401
0.15	30	0.01	RMS	23.19	-69.16	-13	Pass	2986
30	1000	0.1	RMS	475	-59.14	-13	Pass	9701
1000	1840	1	RMS	1789	-48.89	-13	Pass	841
1840	1920	1	RMS	1895.8	22.06	60	Pass	401
1920	3000	1	RMS	2968	-46.16	-13	Pass	1081
3000	12000	1	RMS	10405	-36.27	-13	Pass	9002
12000	20000	1	RMS	19802	-28.58	-13	Pass	8001

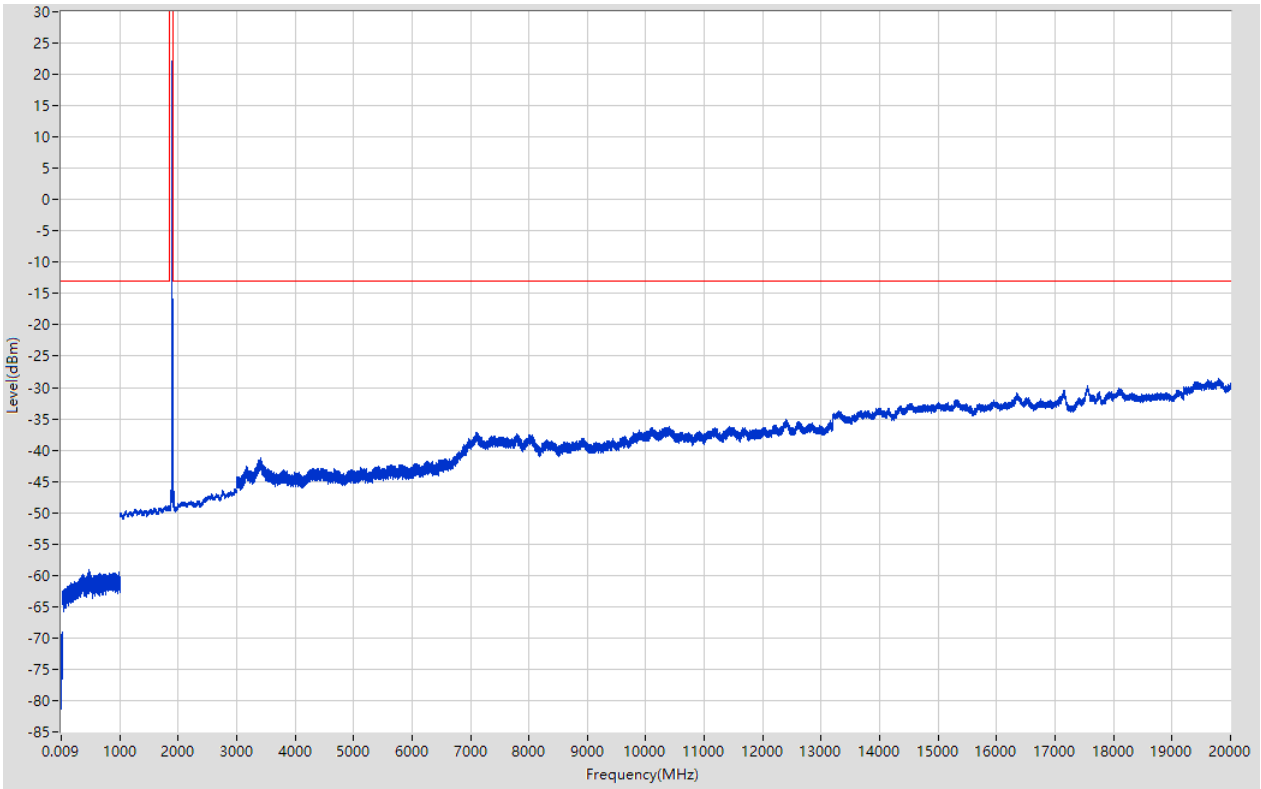

1.30. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:30, Channel:19125, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.34	-13	Pass	401
0.15	30	0.01	RMS	28.89	-69.65	-13	Pass	2986
30	1000	0.1	RMS	995.697	-59.53	-13	Pass	9701
1000	1840	1	RMS	1821	-48.74	-13	Pass	841
1840	1920	1	RMS	1895.8	21.39	60	Pass	401
1920	3000	1	RMS	2990	-46.26	-13	Pass	1081
3000	12000	1	RMS	10392	-36.02	-13	Pass	9002
12000	20000	1	RMS	19810	-28.62	-13	Pass	8001

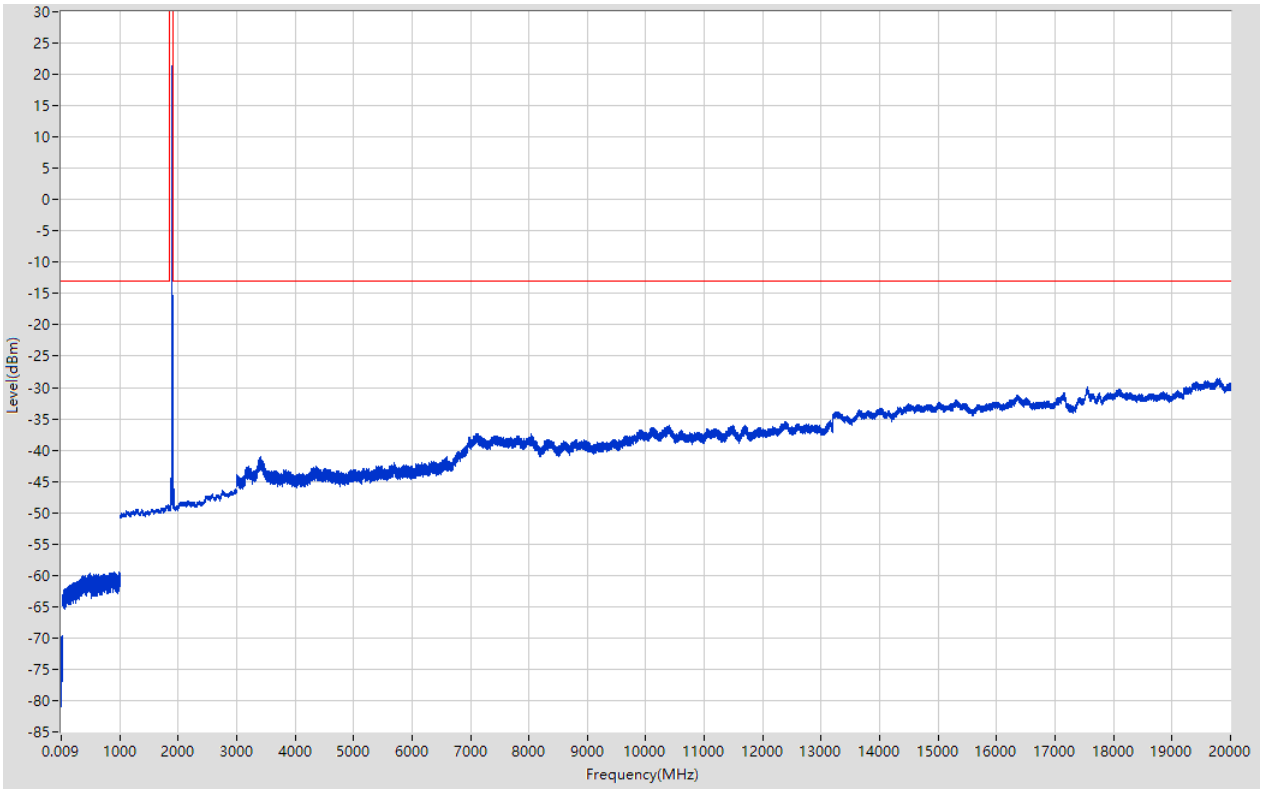

1.31. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:31, Channel:18700, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.092	-73.9	-13	Pass	401
0.15	30	0.01	RMS	0.3	-69.74	-13	Pass	2986
30	1000	0.1	RMS	487.6	-59.18	-13	Pass	9701
1000	1840	1	RMS	1833	-45.86	-13	Pass	841
1840	1920	1	RMS	1851	22.48	60	Pass	401
1920	3000	1	RMS	2967	-46.15	-13	Pass	1081
3000	12000	1	RMS	11468	-36.06	-13	Pass	9002
12000	20000	1	RMS	19786	-28.63	-13	Pass	8001

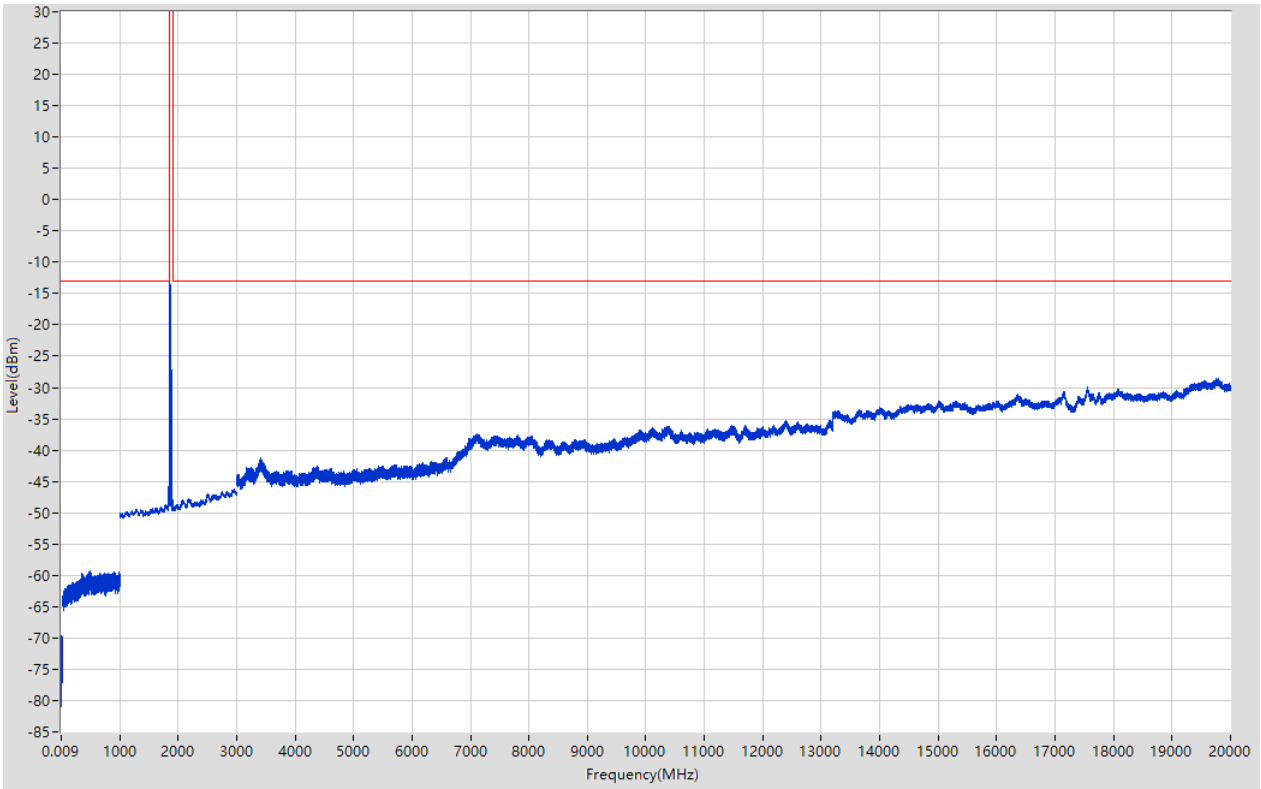

1.32. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:32, Channel:18700, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.02	-13	Pass	401
0.15	30	0.01	RMS	12.8	-69.21	-13	Pass	2986
30	1000	0.1	RMS	891.728	-59.47	-13	Pass	9701
1000	1840	1	RMS	1833	-47.06	-13	Pass	841
1840	1920	1	RMS	1851	21.6	60	Pass	401
1920	3000	1	RMS	2970	-46.16	-13	Pass	1081
3000	12000	1	RMS	11478	-35.99	-13	Pass	9002
12000	20000	1	RMS	19747	-28.81	-13	Pass	8001

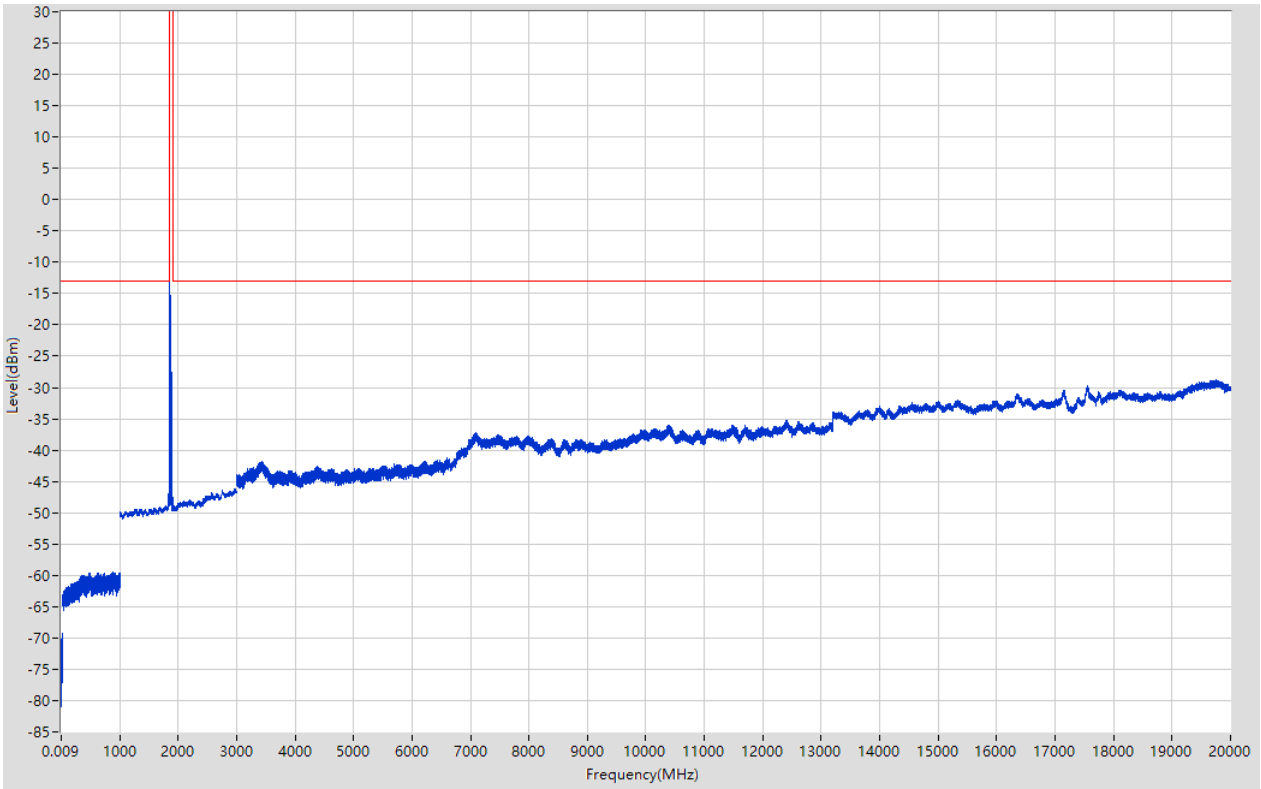

1.33. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:33, Channel:18900, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.09	-13	Pass	401
0.15	30	0.01	RMS	0.43	-69.16	-13	Pass	2986
30	1000	0.1	RMS	927.552	-59.37	-13	Pass	9701
1000	1840	1	RMS	1805	-48.83	-13	Pass	841
1840	1920	1	RMS	1871	22.27	60	Pass	401
1920	3000	1	RMS	2924	-46.39	-13	Pass	1081
3000	12000	1	RMS	10396	-35.89	-13	Pass	9002
12000	20000	1	RMS	19798	-28.43	-13	Pass	8001

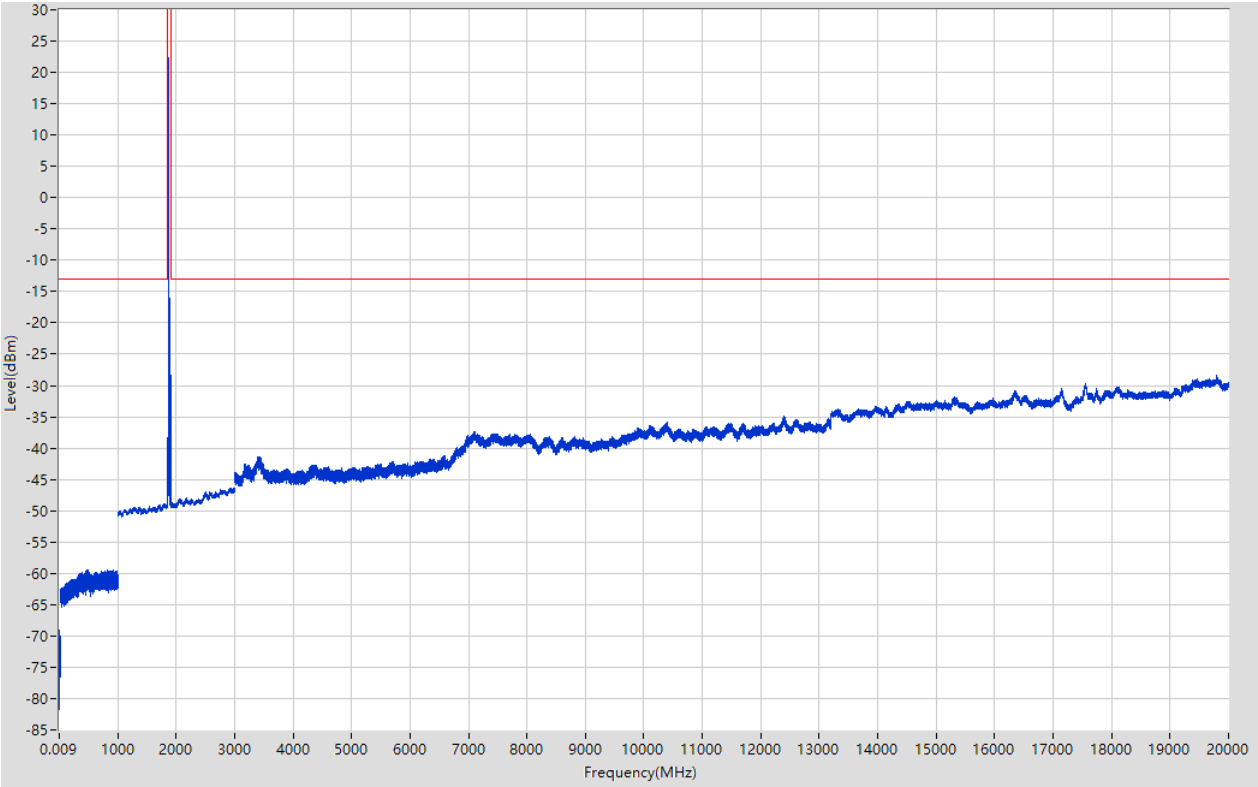

1.34. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:34, Channel:18900, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-72.75	-13	Pass	401
0.15	30	0.01	RMS	2.78	-69.3	-13	Pass	2986
30	1000	0.1	RMS	982.288	-59.35	-13	Pass	9701
1000	1840	1	RMS	1803	-48.79	-13	Pass	841
1840	1920	1	RMS	1871	21.47	60	Pass	401
1920	3000	1	RMS	2976	-46.35	-13	Pass	1081
3000	12000	1	RMS	10400	-35.78	-13	Pass	9002
12000	20000	1	RMS	19801	-28.37	-13	Pass	8001

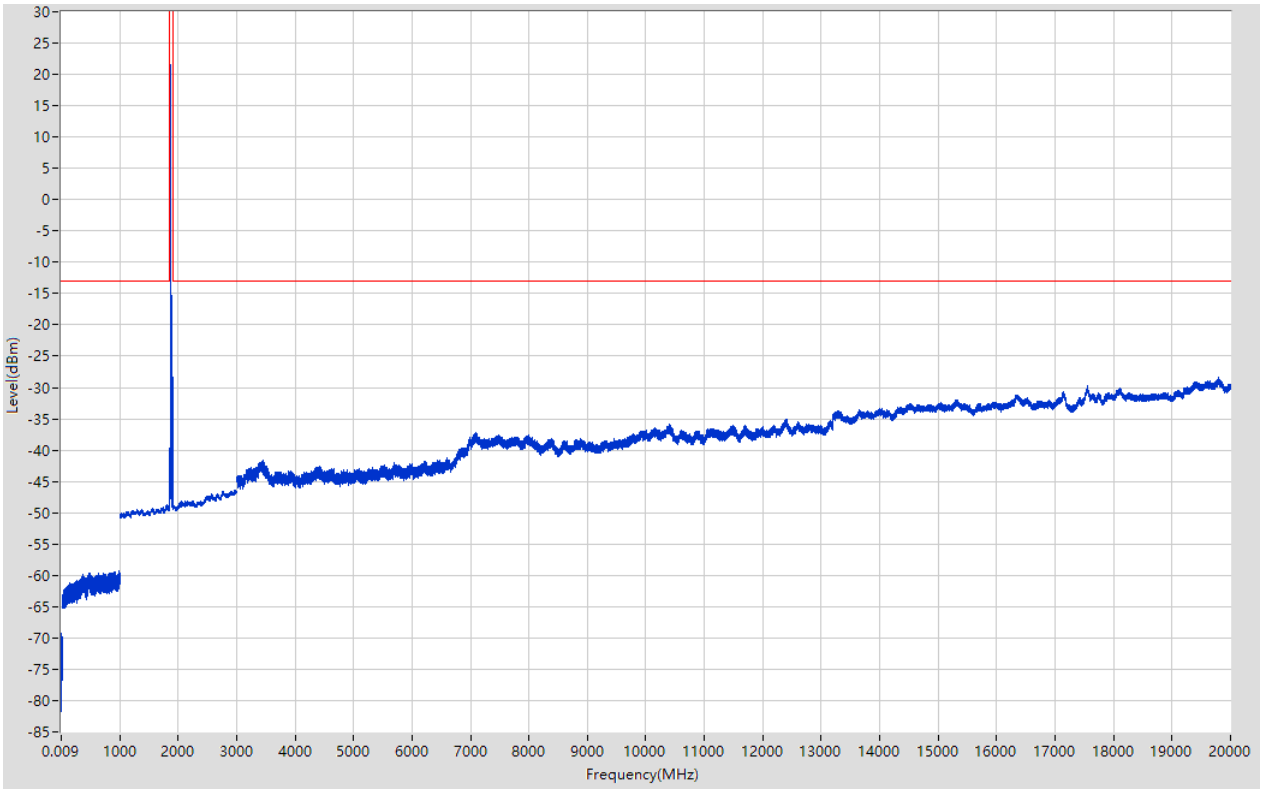

1.35. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:35, Channel:19100, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.07	-13	Pass	401
0.15	30	0.01	RMS	14.05	-69.11	-13	Pass	2986
30	1000	0.1	RMS	876.818	-59.39	-13	Pass	9701
1000	1840	1	RMS	1793	-48.98	-13	Pass	841
1840	1920	1	RMS	1891	22.06	60	Pass	401
1920	3000	1	RMS	2972	-46.16	-13	Pass	1081
3000	12000	1	RMS	11479	-36.1	-13	Pass	9002
12000	20000	1	RMS	19771	-28.78	-13	Pass	8001

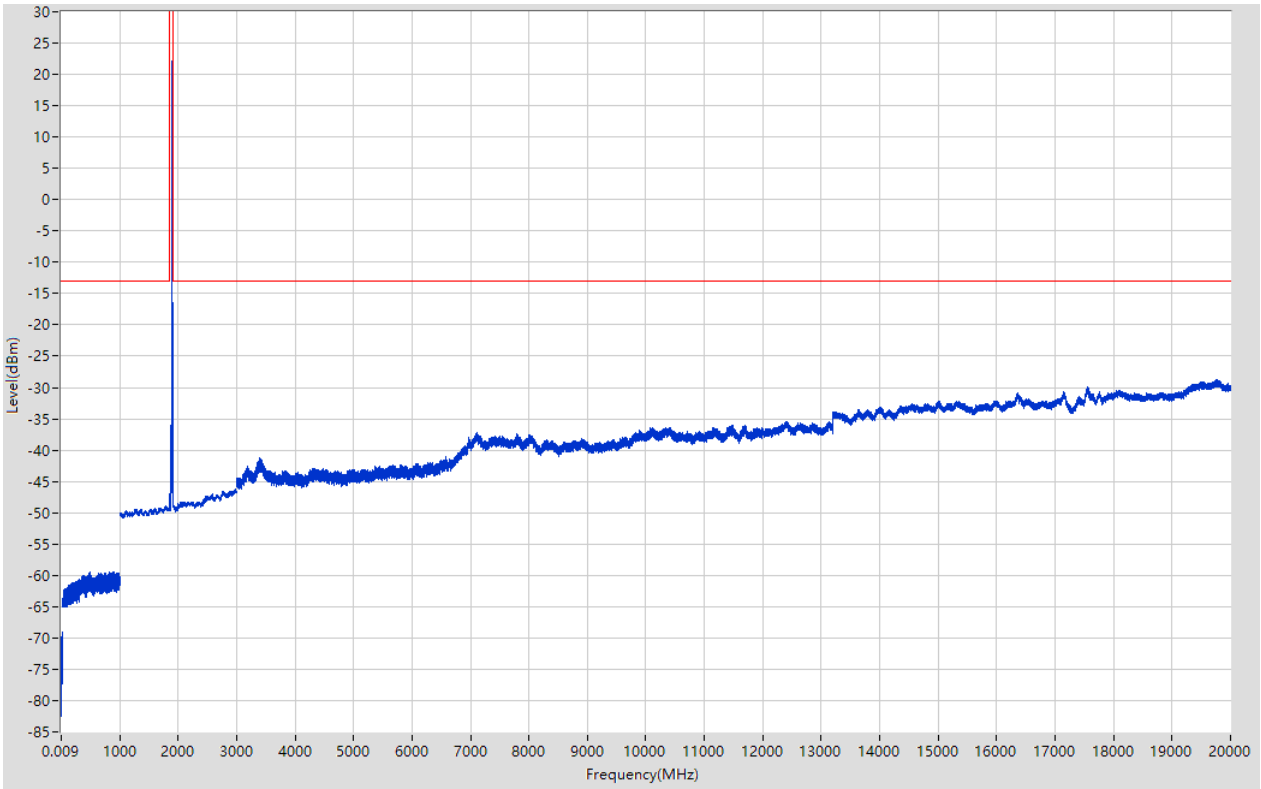

1.36. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:36, Channel:19100, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.68	-13	Pass	401
0.15	30	0.01	RMS	20	-70	-13	Pass	2986
30	1000	0.1	RMS	887.826	-59.46	-13	Pass	9701
1000	1840	1	RMS	1825	-48.92	-13	Pass	841
1840	1920	1	RMS	1891	21.2	60	Pass	401
1920	3000	1	RMS	2945	-46.32	-13	Pass	1081
3000	12000	1	RMS	10396	-35.8	-13	Pass	9002
12000	20000	1	RMS	19819	-28.77	-13	Pass	8001

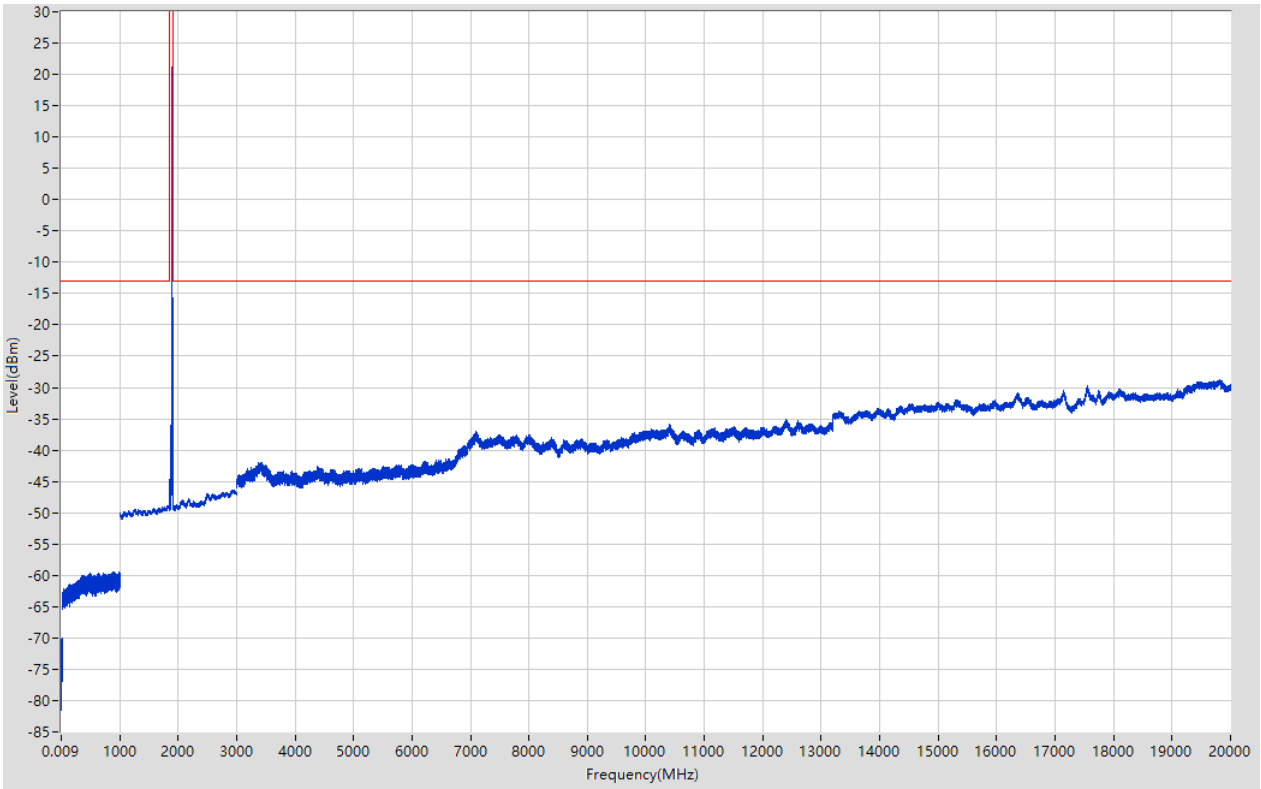

2. LTE_Band4

2.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:19957, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.22	-13	Pass	401
0.15	30	0.01	RMS	7.69	-68.79	-13	Pass	2986
30	1000	0.1	RMS	673.4	-58.89	-13	Pass	9701
1000	1700	1	RMS	1700	-48.46	-13	Pass	701
1700	1765	1	RMS	1710.238	22.42	60	Pass	401
1765	3000	1	RMS	2970	-46.06	-13	Pass	1236
3000	12000	1	RMS	10399	-35.8	-13	Pass	9002
12000	20000	1	RMS	19798	-28.8	-13	Pass	8001

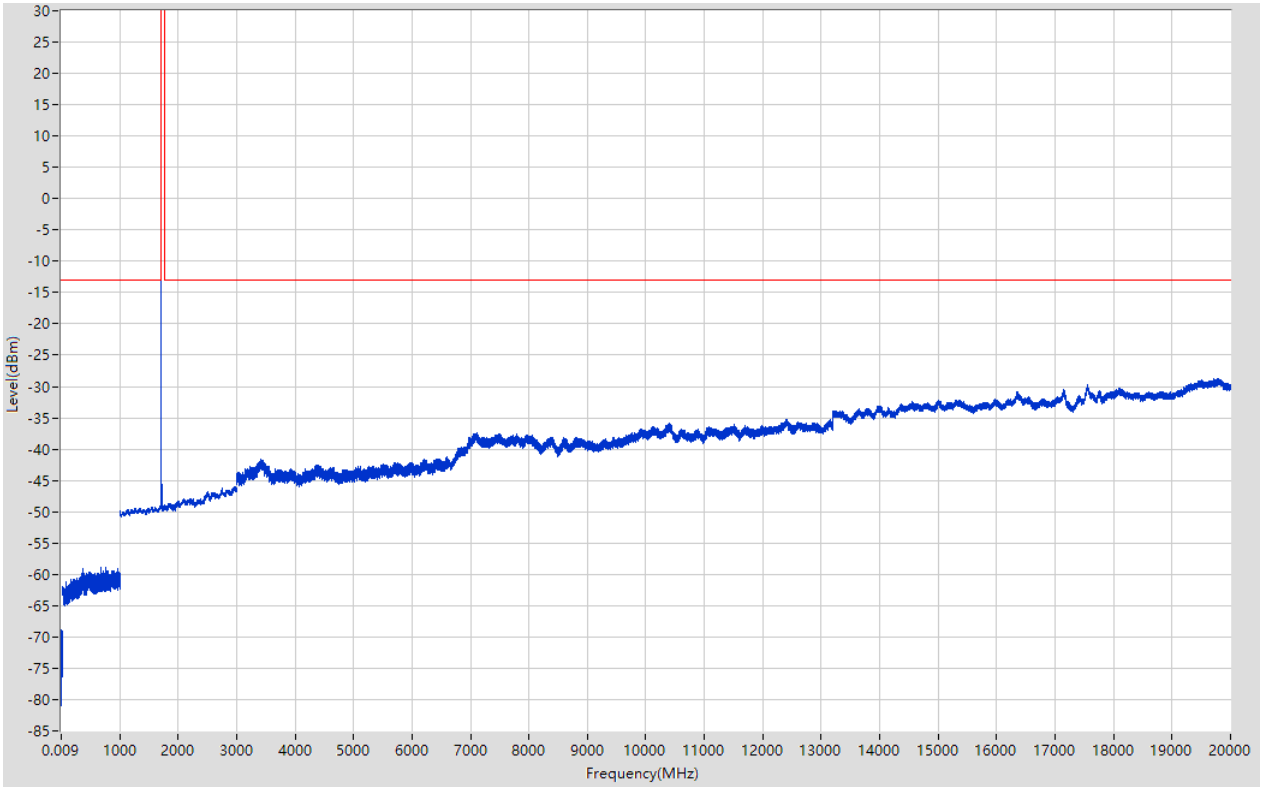

2.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:19957, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.51	-13	Pass	401
0.15	30	0.01	RMS	28.12	-69.49	-13	Pass	2986
30	1000	0.1	RMS	865.911	-59.34	-13	Pass	9701
1000	1700	1	RMS	1700	-48.85	-13	Pass	701
1700	1765	1	RMS	1710.238	21.49	60	Pass	401
1765	3000	1	RMS	2969	-46.07	-13	Pass	1236
3000	12000	1	RMS	10400	-35.96	-13	Pass	9002
12000	20000	1	RMS	19814	-28.43	-13	Pass	8001

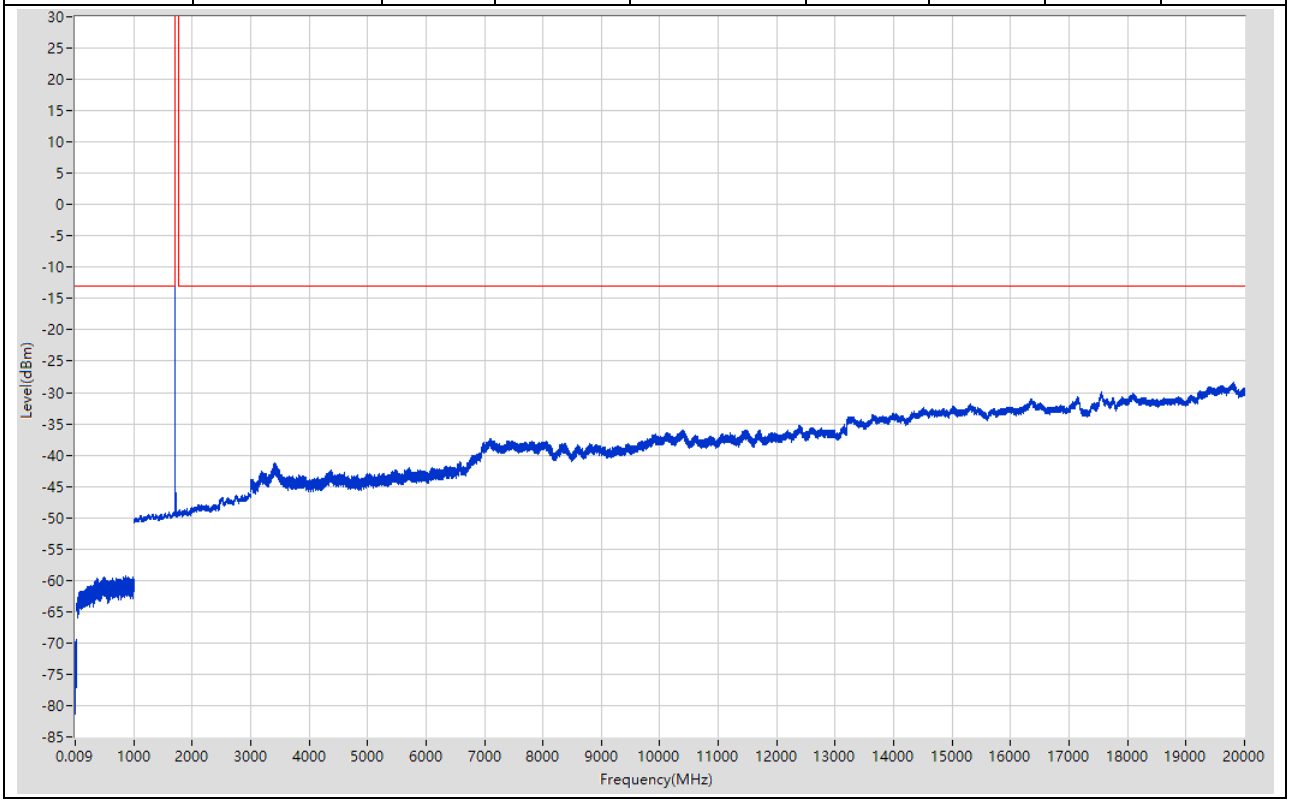

2.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:20175, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-72.45	-13	Pass	401
0.15	30	0.01	RMS	0.55	-69.61	-13	Pass	2986
30	1000	0.1	RMS	506.2	-58.85	-13	Pass	9701
1000	1700	1	RMS	1642	-49.26	-13	Pass	701
1700	1765	1	RMS	1732.013	22.56	60	Pass	401
1765	3000	1	RMS	2972	-46.13	-13	Pass	1236
3000	12000	1	RMS	10410	-35.9	-13	Pass	9002
12000	20000	1	RMS	19807	-28.73	-13	Pass	8001

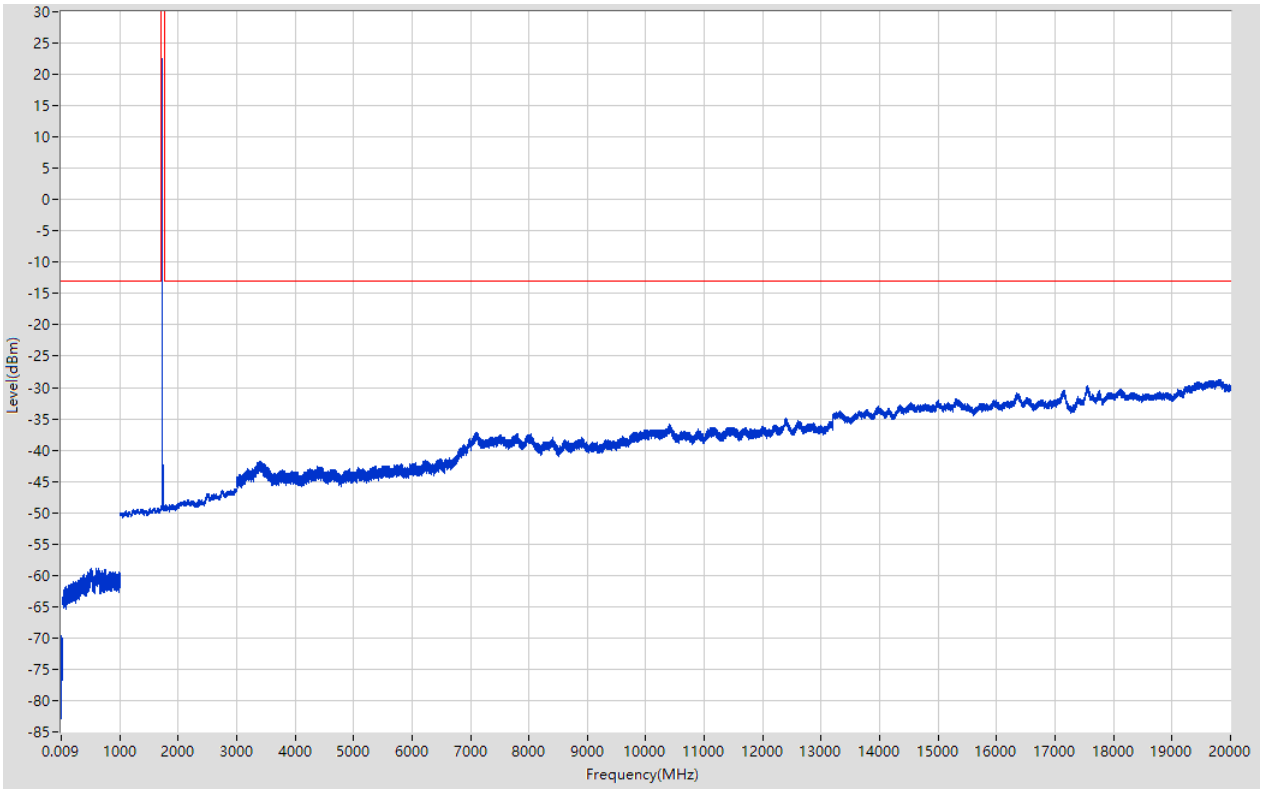

2.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:20175, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.8	-13	Pass	401
0.15	30	0.01	RMS	8.19	-69.39	-13	Pass	2986
30	1000	0.1	RMS	874.617	-58.56	-13	Pass	9701
1000	1700	1	RMS	1697	-49.24	-13	Pass	701
1700	1765	1	RMS	1732.013	21.65	60	Pass	401
1765	3000	1	RMS	2977	-46.21	-13	Pass	1236
3000	12000	1	RMS	10412	-35.96	-13	Pass	9002
12000	20000	1	RMS	19817	-28.65	-13	Pass	8001

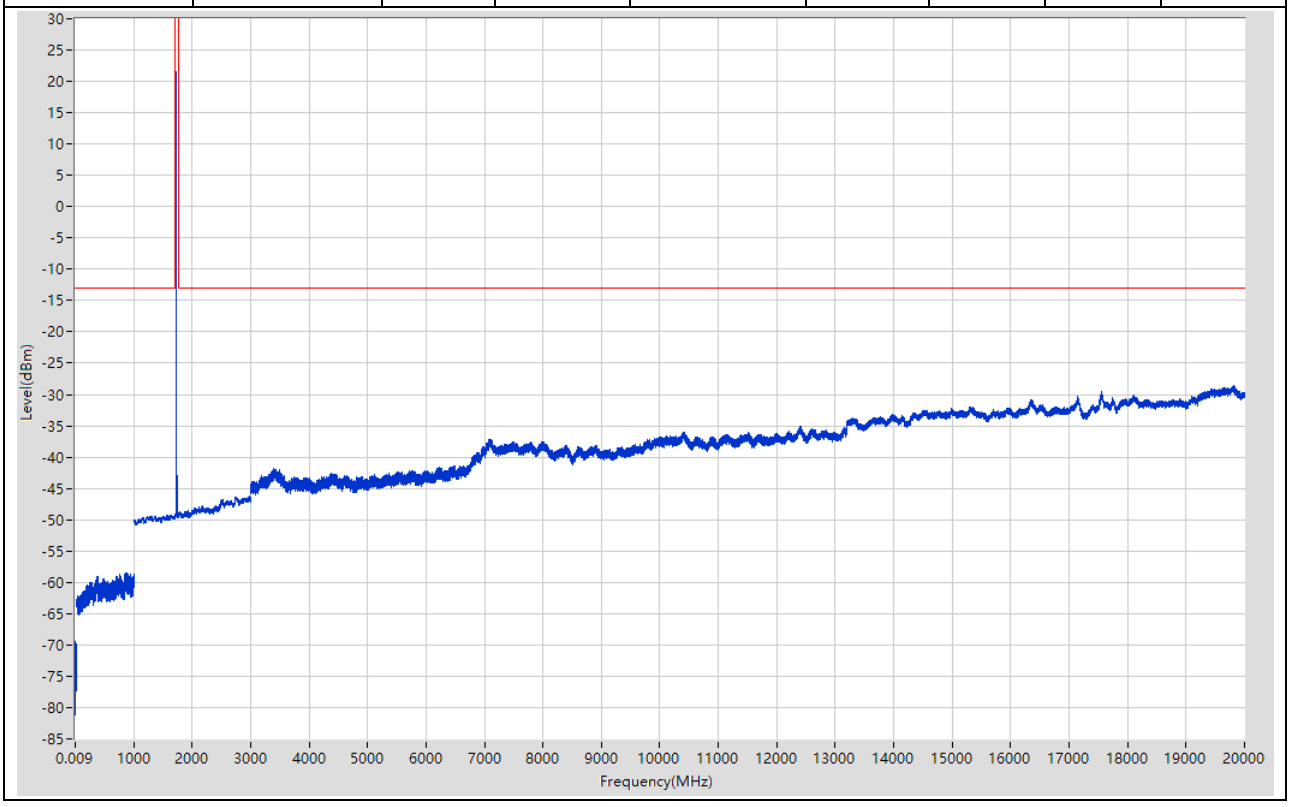

2.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:20393, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.76	-13	Pass	401
0.15	30	0.01	RMS	23.76	-69.27	-13	Pass	2986
30	1000	0.1	RMS	926.751	-59.27	-13	Pass	9701
1000	1700	1	RMS	1670	-49.28	-13	Pass	701
1700	1765	1	RMS	1753.788	22.64	60	Pass	401
1765	3000	1	RMS	2983	-46.08	-13	Pass	1236
3000	12000	1	RMS	10393	-36.22	-13	Pass	9002
12000	20000	1	RMS	19801	-28.76	-13	Pass	8001

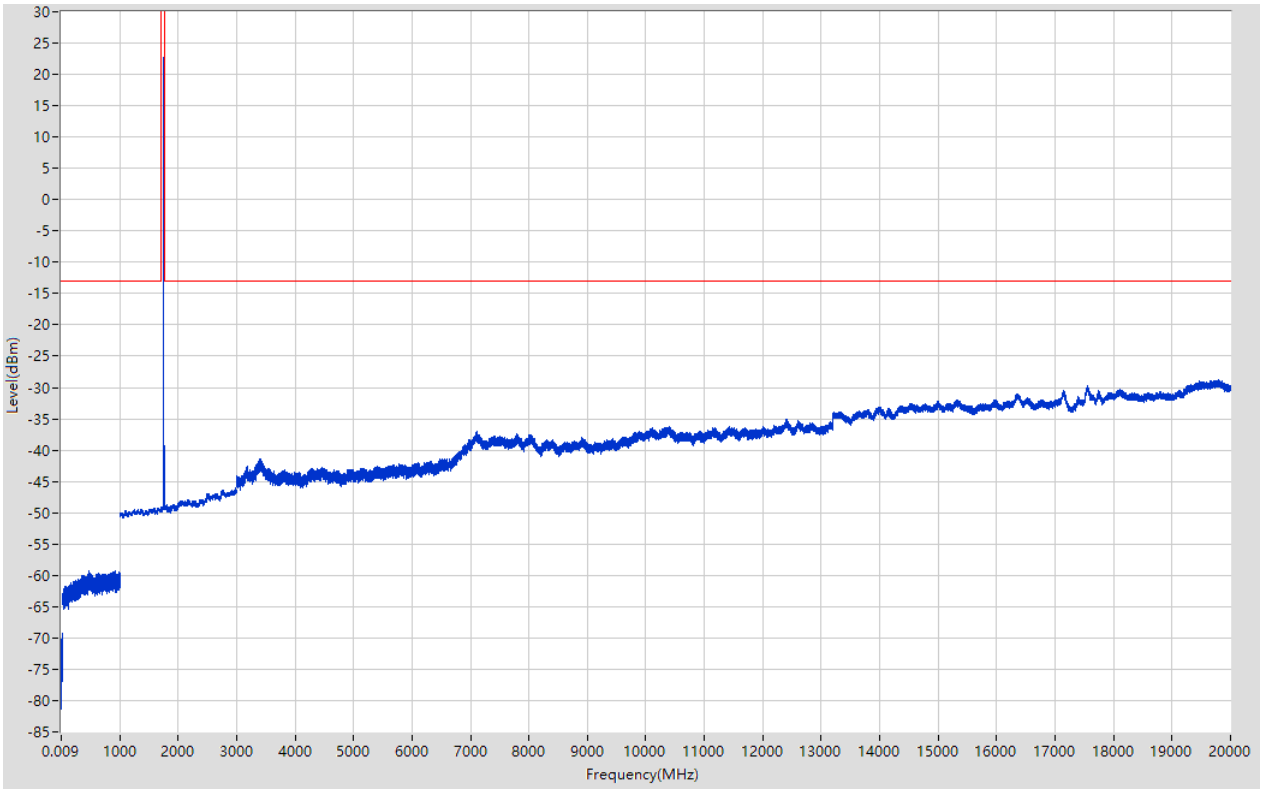

2.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:20393, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.19	-13	Pass	401
0.15	30	0.01	RMS	28.81	-69.87	-13	Pass	2986
30	1000	0.1	RMS	889.227	-59.51	-13	Pass	9701
1000	1700	1	RMS	1687	-49.22	-13	Pass	701
1700	1765	1	RMS	1753.788	21.75	60	Pass	401
1765	3000	1	RMS	2994	-46.22	-13	Pass	1236
3000	12000	1	RMS	10400	-35.97	-13	Pass	9002
12000	20000	1	RMS	19792	-28.49	-13	Pass	8001

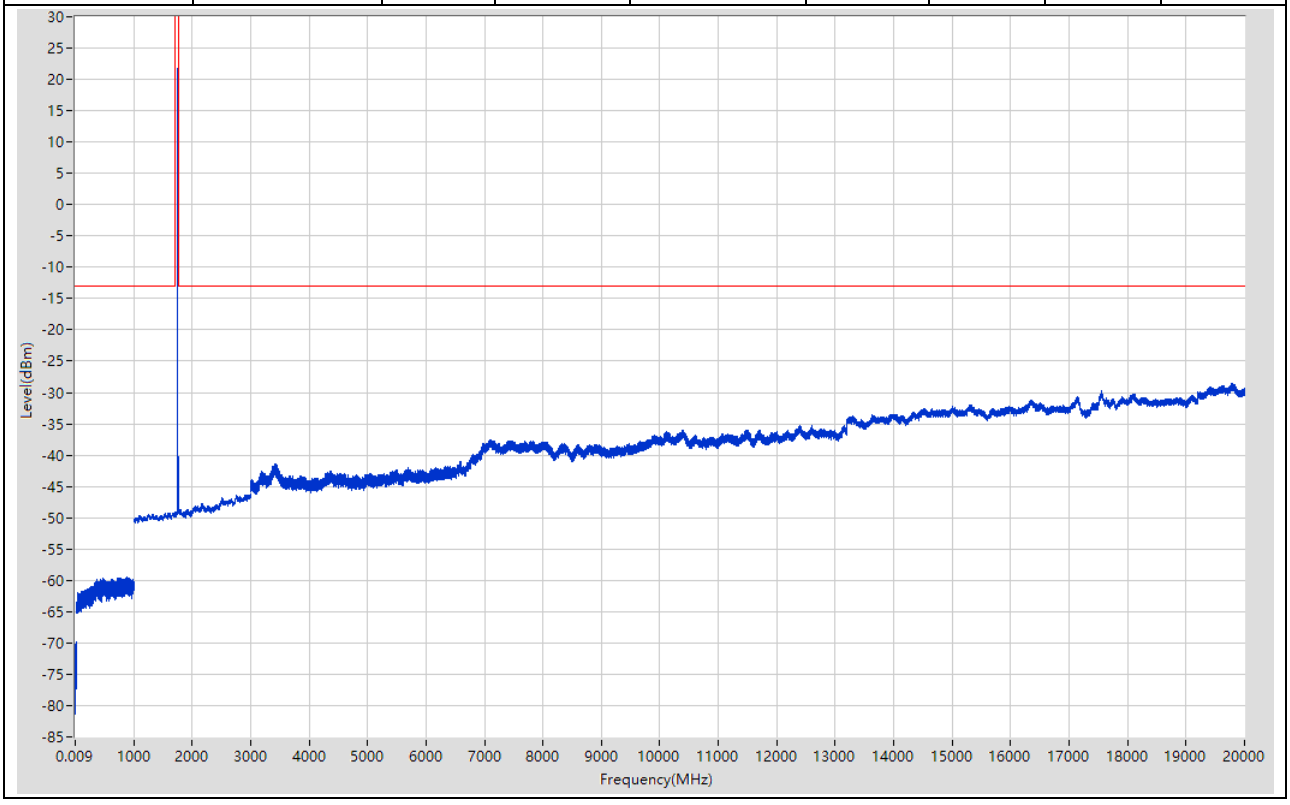

2.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:19965, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-71.59	-13	Pass	401
0.15	30	0.01	RMS	14.22	-69.8	-13	Pass	2986
30	1000	0.1	RMS	883.923	-59.44	-13	Pass	9701
1000	1700	1	RMS	1700	-48.46	-13	Pass	701
1700	1765	1	RMS	1710.238	22.31	60	Pass	401
1765	3000	1	RMS	2971	-46.11	-13	Pass	1236
3000	12000	1	RMS	10394	-35.95	-13	Pass	9002
12000	20000	1	RMS	19799	-28.71	-13	Pass	8001

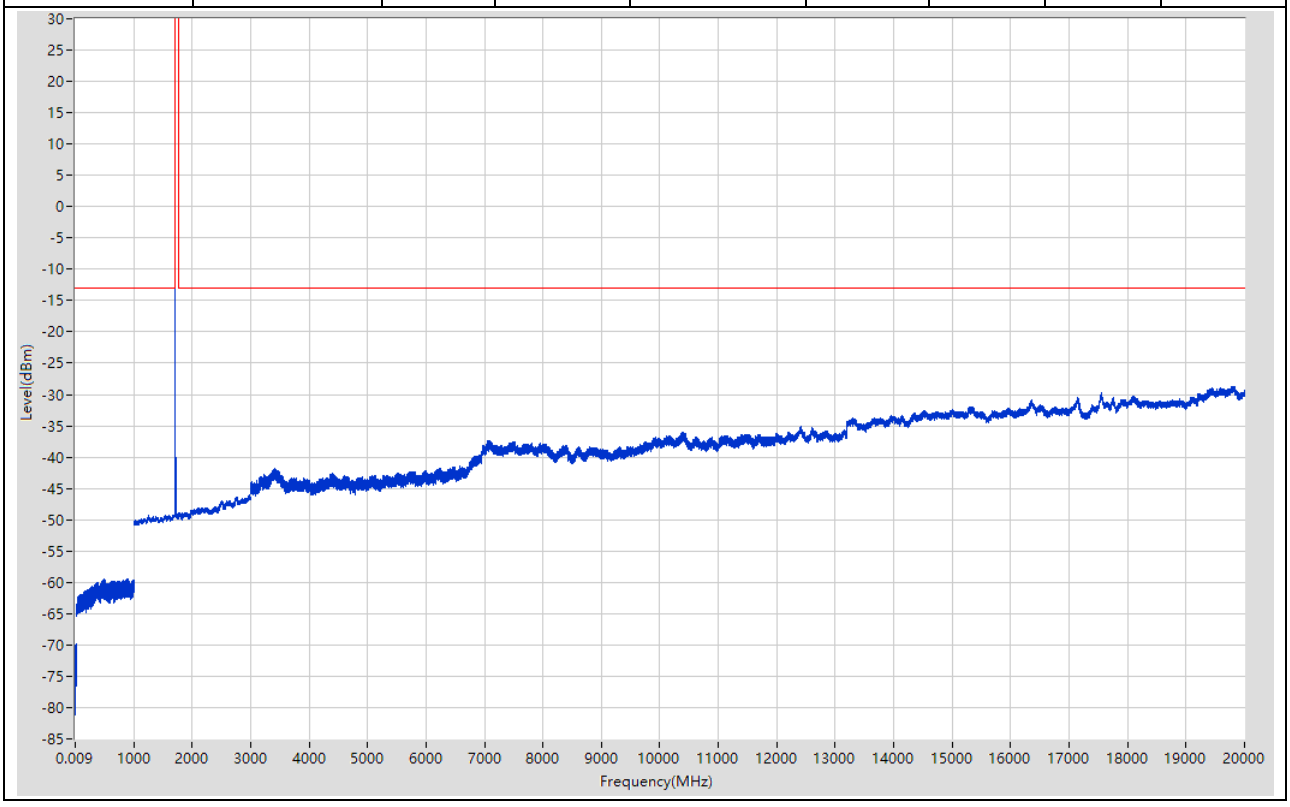

2.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:19965, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-74.33	-13	Pass	401
0.15	30	0.01	RMS	0.22	-69.64	-13	Pass	2986
30	1000	0.1	RMS	890.628	-59.51	-13	Pass	9701
1000	1700	1	RMS	1700	-48.59	-13	Pass	701
1700	1765	1	RMS	1710.075	21.56	60	Pass	401
1765	3000	1	RMS	2970	-46.2	-13	Pass	1236
3000	12000	1	RMS	10401	-35.82	-13	Pass	9002
12000	20000	1	RMS	19792	-28.56	-13	Pass	8001

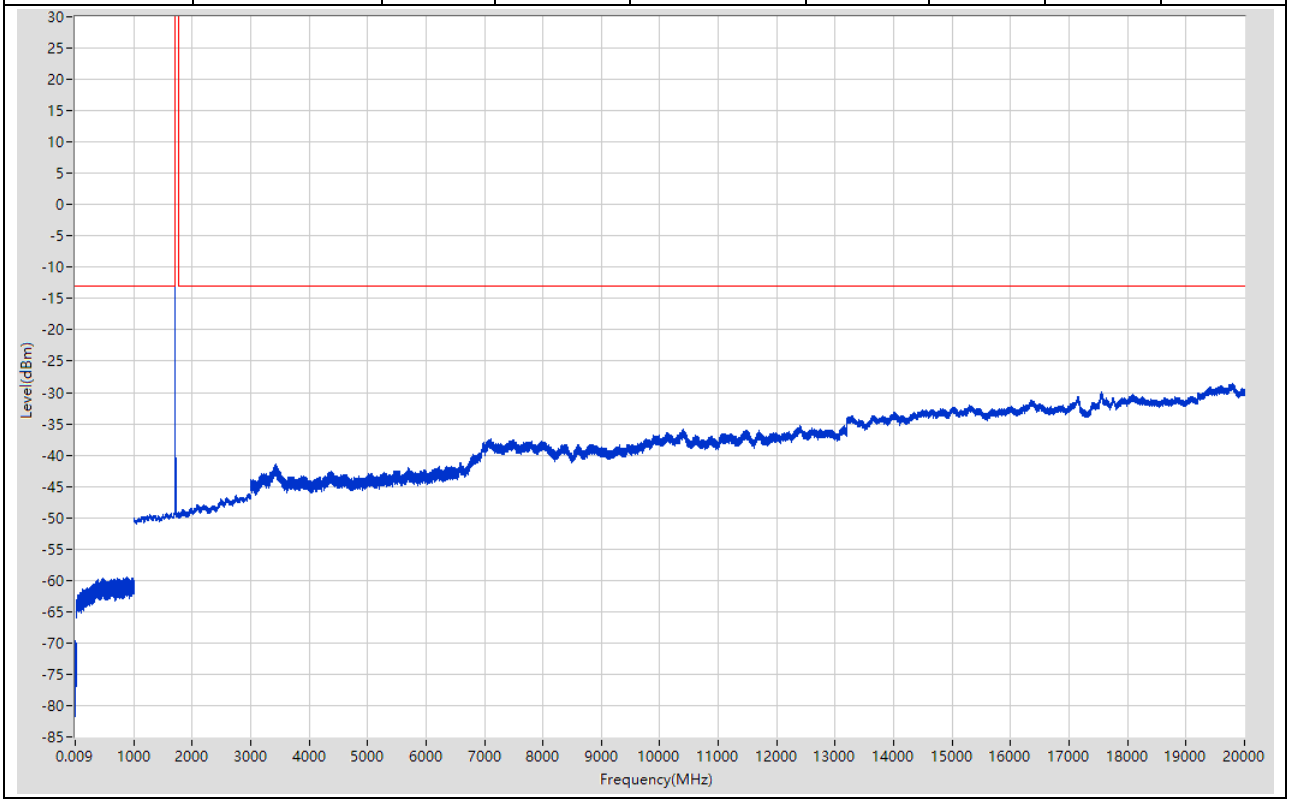

2.9. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:9, Channel:20175, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.48	-13	Pass	401
0.15	30	0.01	RMS	0.15	-69.01	-13	Pass	2986
30	1000	0.1	RMS	906.638	-59.43	-13	Pass	9701
1000	1700	1	RMS	1583	-49.33	-13	Pass	701
1700	1765	1	RMS	1731.2	22.47	60	Pass	401
1765	3000	1	RMS	2990	-46.32	-13	Pass	1236
3000	12000	1	RMS	11696	-35.99	-13	Pass	9002
12000	20000	1	RMS	19802	-28.58	-13	Pass	8001

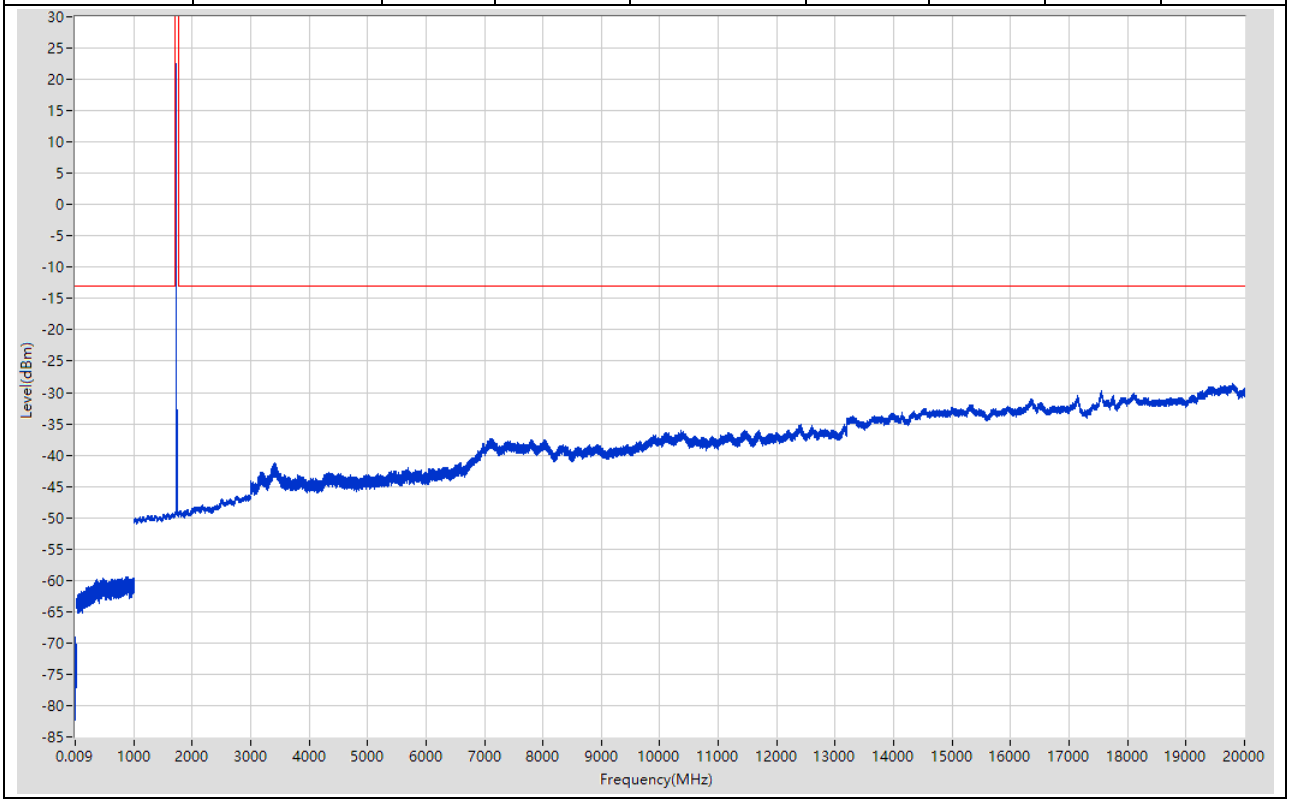

2.10. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:10, Channel:20175, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-74.06	-13	Pass	401
0.15	30	0.01	RMS	28.21	-69.83	-13	Pass	2986
30	1000	0.1	RMS	890.127	-59.39	-13	Pass	9701
1000	1700	1	RMS	1687	-49.19	-13	Pass	701
1700	1765	1	RMS	1731.2	21.56	60	Pass	401
1765	3000	1	RMS	2963	-46.29	-13	Pass	1236
3000	12000	1	RMS	10385	-36.05	-13	Pass	9002
12000	20000	1	RMS	19774	-28.44	-13	Pass	8001

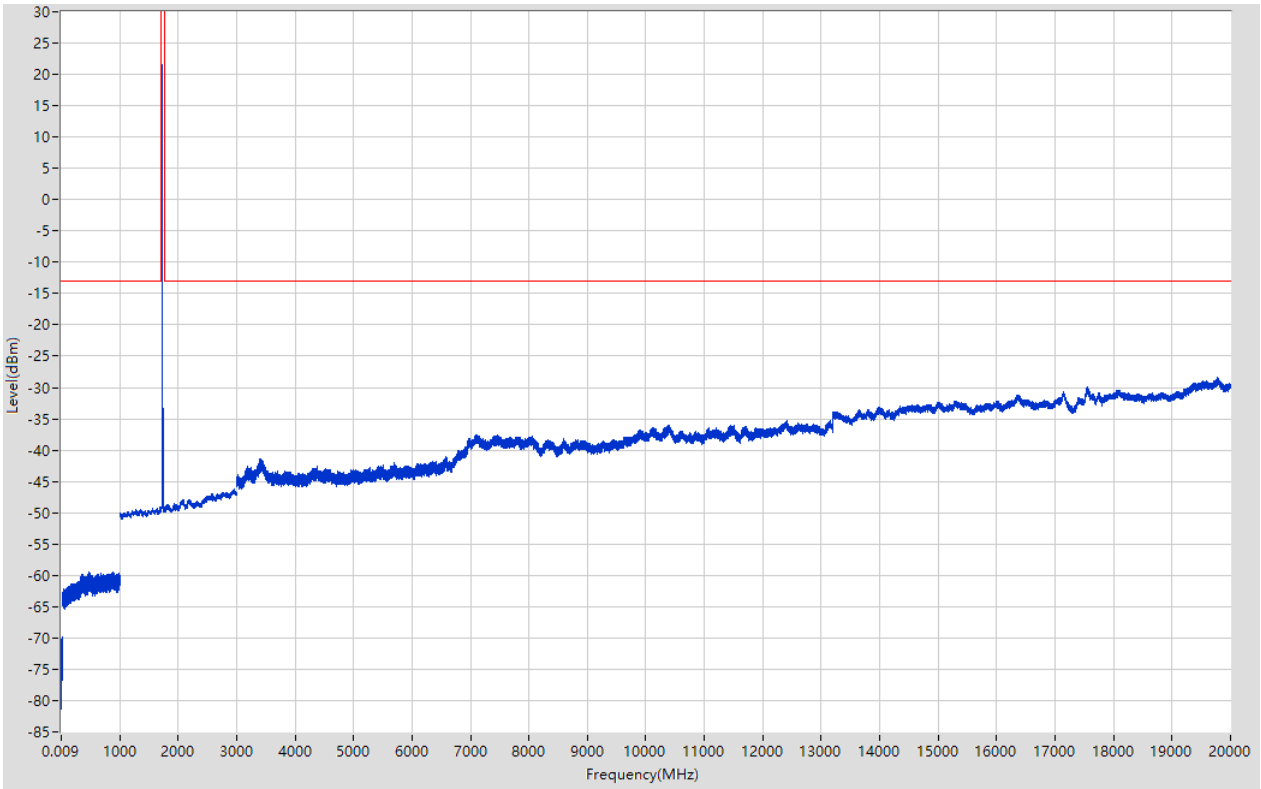

2.11. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:11, Channel:20385, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.67	-13	Pass	401
0.15	30	0.01	RMS	23.04	-69.4	-13	Pass	2986
30	1000	0.1	RMS	909.84	-59.48	-13	Pass	9701
1000	1700	1	RMS	1587	-49.32	-13	Pass	701
1700	1765	1	RMS	1752.163	22.56	60	Pass	401
1765	3000	1	RMS	2930	-46.37	-13	Pass	1236
3000	12000	1	RMS	10402	-35.99	-13	Pass	9002
12000	20000	1	RMS	19808	-28.58	-13	Pass	8001

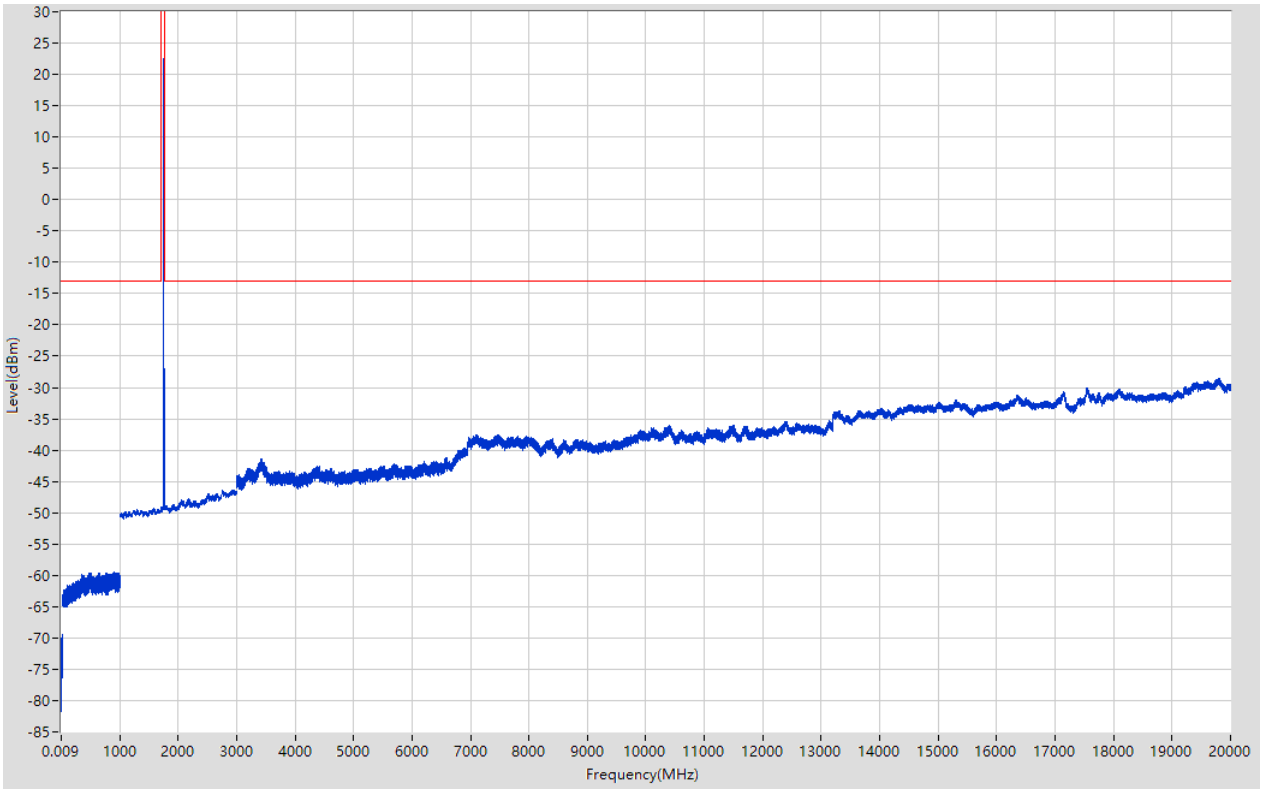

2.12. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:12, Channel:20385, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.93	-13	Pass	401
0.15	30	0.01	RMS	24.51	-69.34	-13	Pass	2986
30	1000	0.1	RMS	865.111	-59.53	-13	Pass	9701
1000	1700	1	RMS	1590	-49.34	-13	Pass	701
1700	1765	1	RMS	1752.163	21.75	60	Pass	401
1765	3000	1	RMS	2945	-46.34	-13	Pass	1236
3000	12000	1	RMS	10400	-35.89	-13	Pass	9002
12000	20000	1	RMS	19800	-28.59	-13	Pass	8001

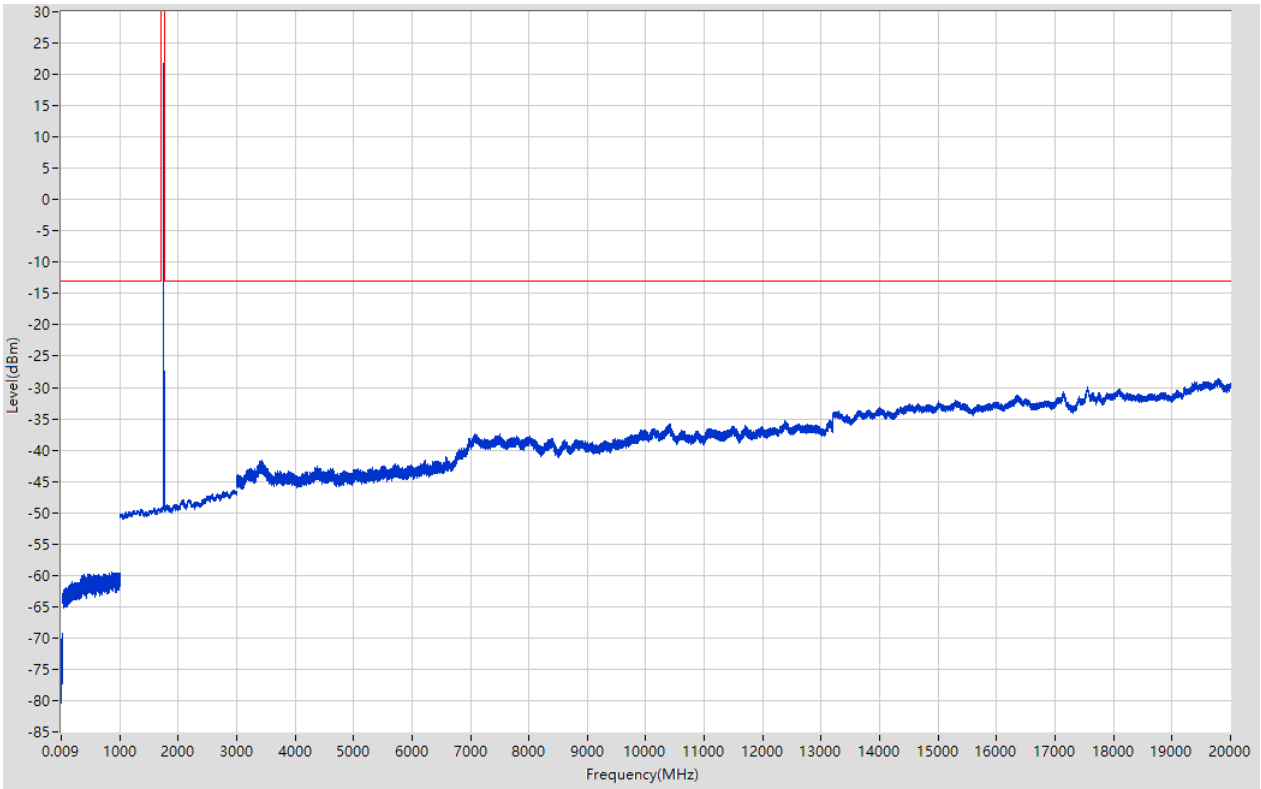

2.13. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:13, Channel:19975, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-71.37	-13	Pass	401
0.15	30	0.01	RMS	6.71	-70.04	-13	Pass	2986
30	1000	0.1	RMS	878.82	-59.26	-13	Pass	9701
1000	1700	1	RMS	1700	-48.38	-13	Pass	701
1700	1765	1	RMS	1710.238	22.46	60	Pass	401
1765	3000	1	RMS	2994	-46.33	-13	Pass	1236
3000	12000	1	RMS	10401	-36	-13	Pass	9002
12000	20000	1	RMS	19796	-28.88	-13	Pass	8001

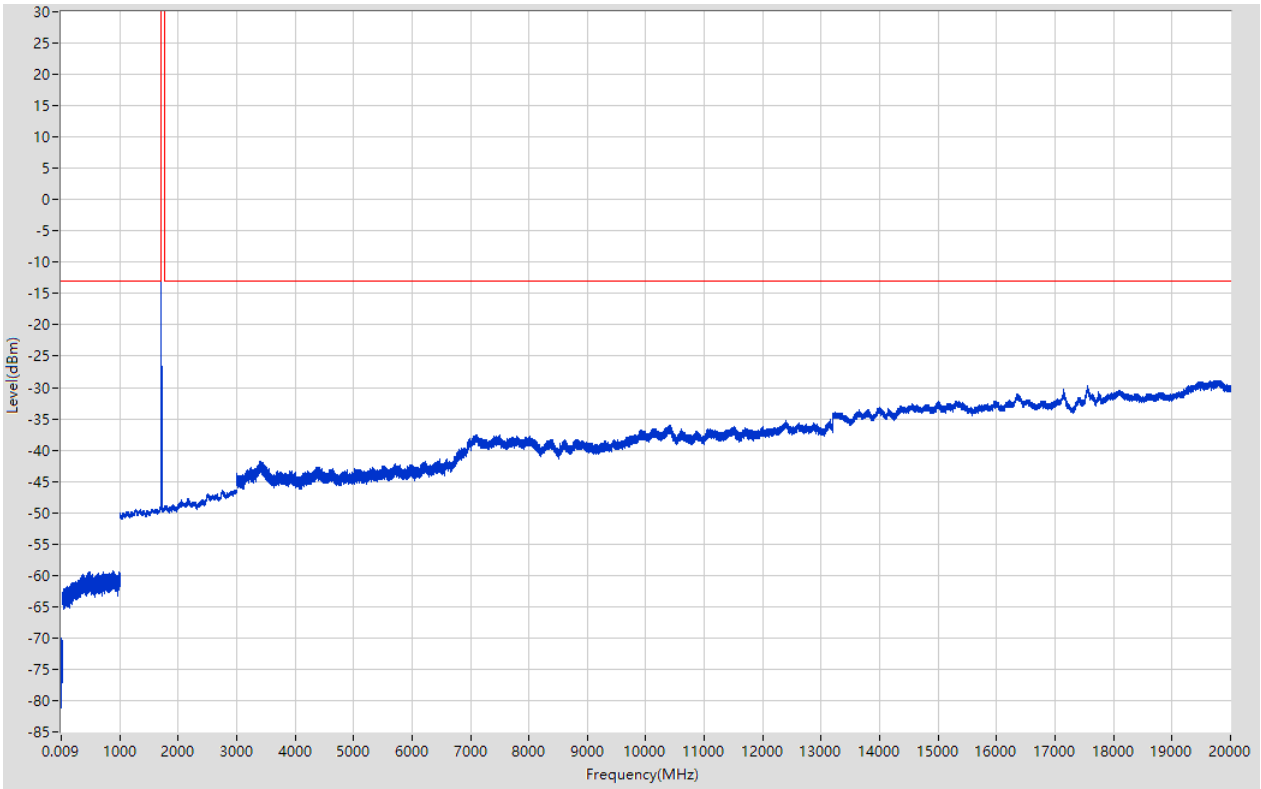

2.14. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:14, Channel:19975, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.08	-13	Pass	401
0.15	30	0.01	RMS	15.81	-69.74	-13	Pass	2986
30	1000	0.1	RMS	488.1	-59.45	-13	Pass	9701
1000	1700	1	RMS	1700	-48.49	-13	Pass	701
1700	1765	1	RMS	1710.238	21.6	60	Pass	401
1765	3000	1	RMS	2972	-46.14	-13	Pass	1236
3000	12000	1	RMS	10403	-35.87	-13	Pass	9002
12000	20000	1	RMS	19791	-28.89	-13	Pass	8001

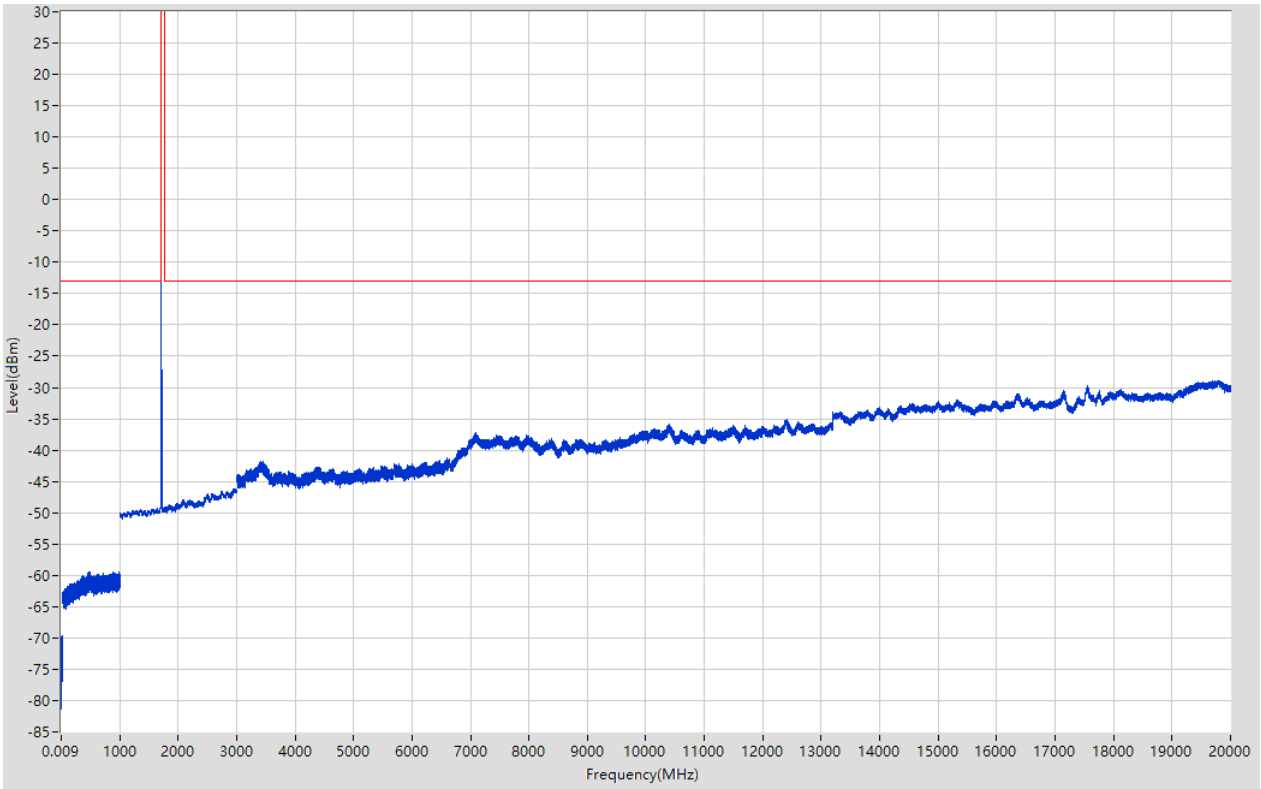

2.15. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:15, Channel:20175, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.56	-13	Pass	401
0.15	30	0.01	RMS	7.96	-69.76	-13	Pass	2986
30	1000	0.1	RMS	472.8	-59.43	-13	Pass	9701
1000	1700	1	RMS	1677	-49.22	-13	Pass	701
1700	1765	1	RMS	1730.225	22.48	60	Pass	401
1765	3000	1	RMS	2968	-46.33	-13	Pass	1236
3000	12000	1	RMS	11512	-36.03	-13	Pass	9002
12000	20000	1	RMS	19807	-28.67	-13	Pass	8001

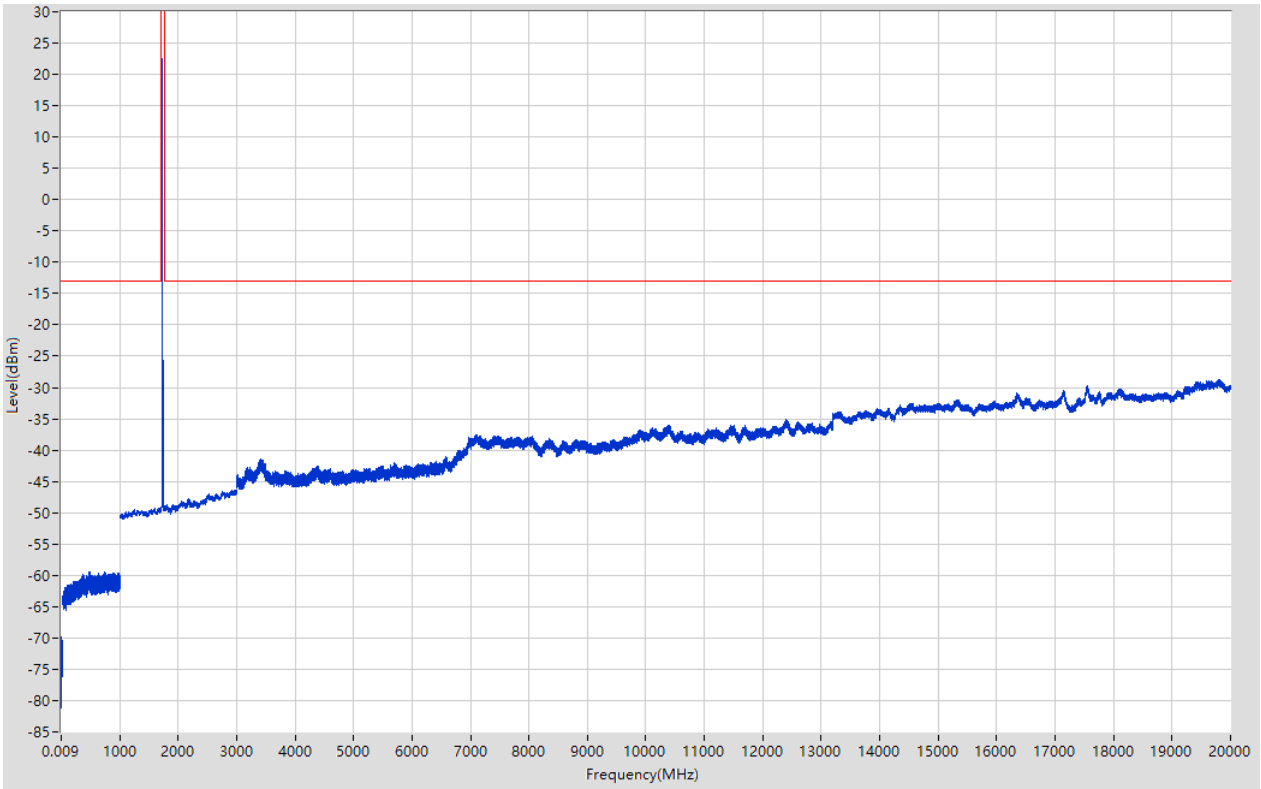

2.16. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:16, Channel:20175, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.78	-13	Pass	401
0.15	30	0.01	RMS	0.18	-70.28	-13	Pass	2986
30	1000	0.1	RMS	985.891	-59.5	-13	Pass	9701
1000	1700	1	RMS	1689	-49.27	-13	Pass	701
1700	1765	1	RMS	1730.225	21.66	60	Pass	401
1765	3000	1	RMS	2954	-46.23	-13	Pass	1236
3000	12000	1	RMS	10403	-35.97	-13	Pass	9002
12000	20000	1	RMS	19781	-28.53	-13	Pass	8001

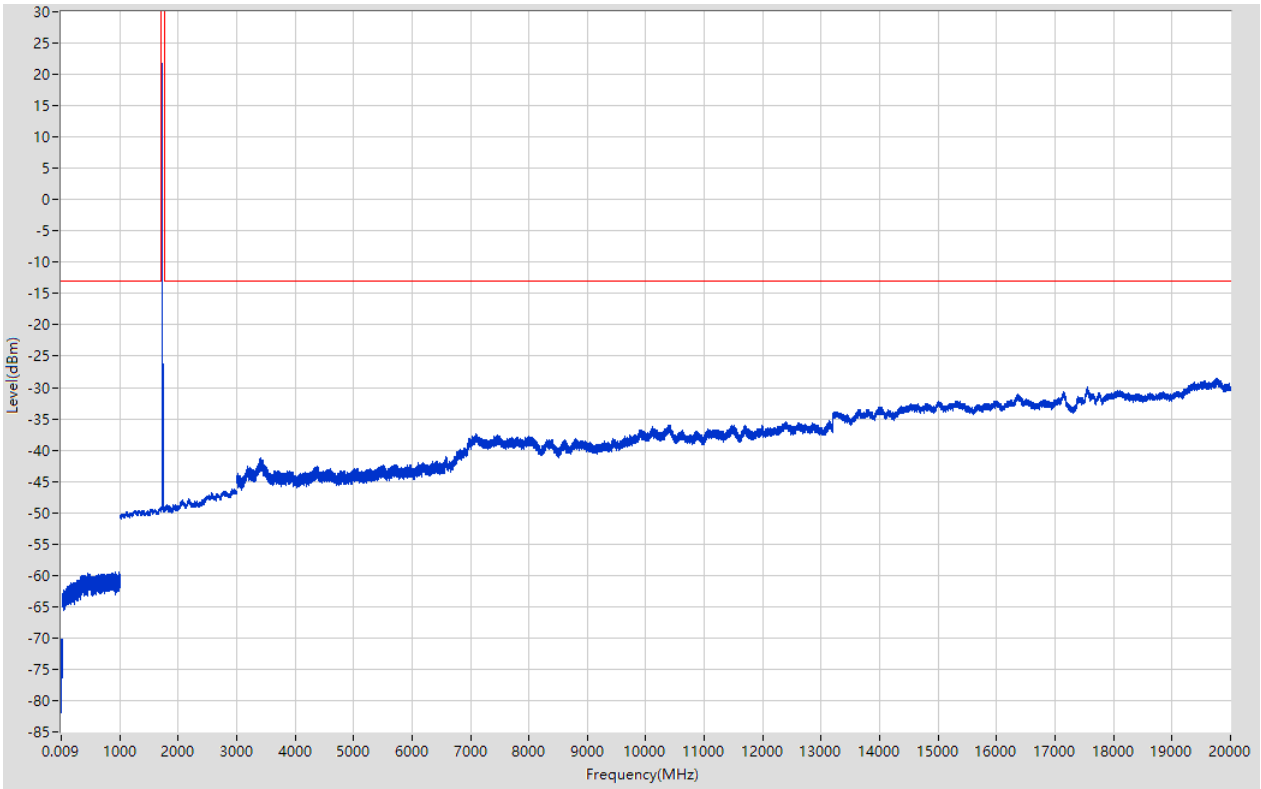

2.17. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:17, Channel:20375, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.6	-13	Pass	401
0.15	30	0.01	RMS	19.13	-69.88	-13	Pass	2986
30	1000	0.1	RMS	987.892	-59.37	-13	Pass	9701
1000	1700	1	RMS	1695	-49.34	-13	Pass	701
1700	1765	1	RMS	1750.213	22.61	60	Pass	401
1765	3000	1	RMS	2971	-46.13	-13	Pass	1236
3000	12000	1	RMS	11997	-36.2	-13	Pass	9002
12000	20000	1	RMS	19808	-28.51	-13	Pass	8001

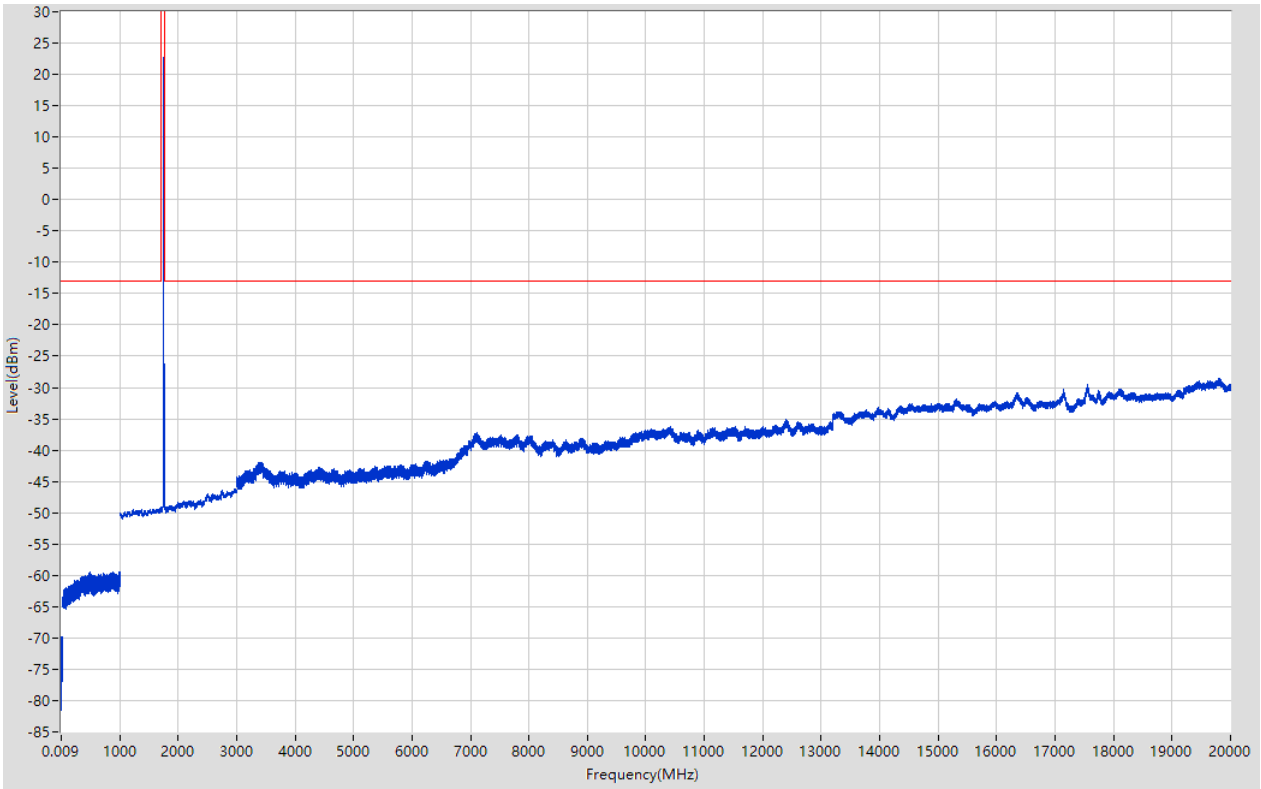

2.18. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:18, Channel:20375, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-71.58	-13	Pass	401
0.15	30	0.01	RMS	0.53	-69.21	-13	Pass	2986
30	1000	0.1	RMS	489.5	-59.03	-13	Pass	9701
1000	1700	1	RMS	1700	-49.25	-13	Pass	701
1700	1765	1	RMS	1750.213	21.81	60	Pass	401
1765	3000	1	RMS	2969	-46.08	-13	Pass	1236
3000	12000	1	RMS	11464	-36.02	-13	Pass	9002
12000	20000	1	RMS	19797	-28.63	-13	Pass	8001

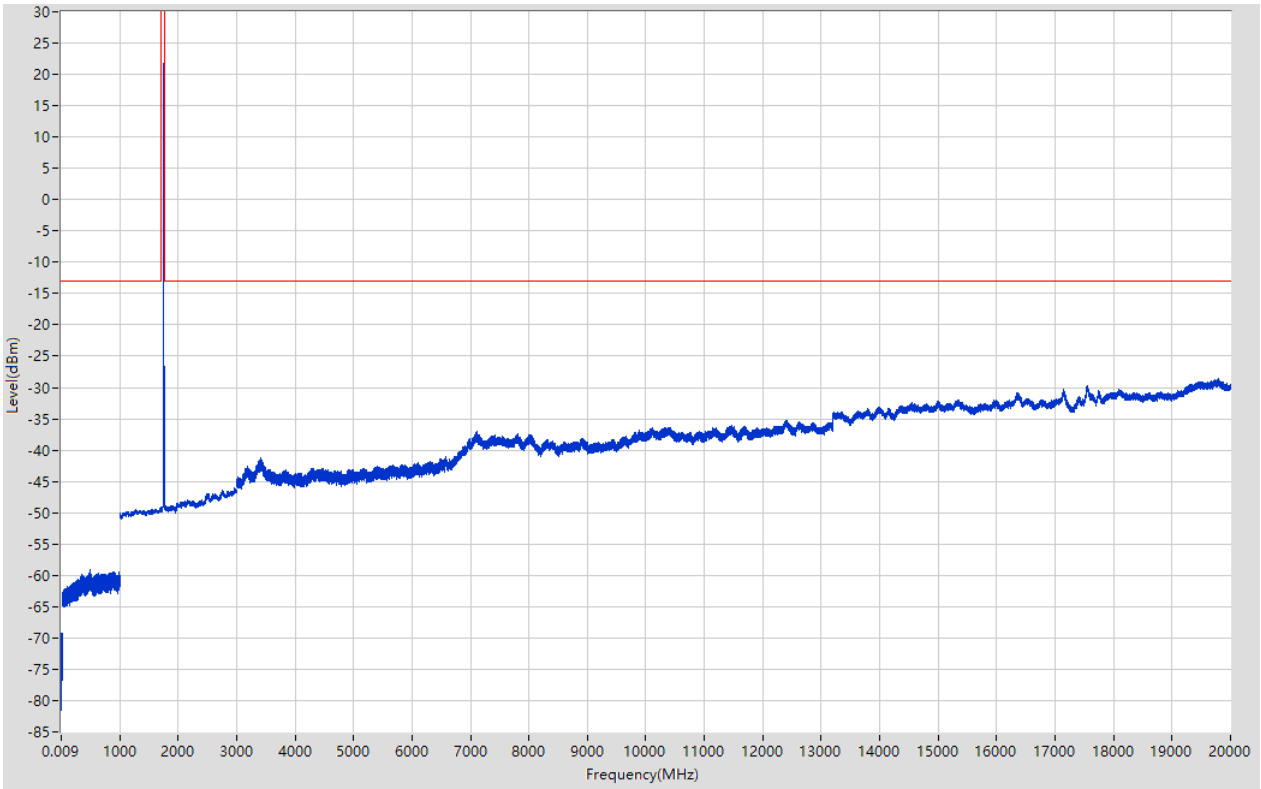

2.19. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:19, Channel:20000, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.54	-13	Pass	401
0.15	30	0.01	RMS	28.43	-69.33	-13	Pass	2986
30	1000	0.1	RMS	902.335	-58.68	-13	Pass	9701
1000	1700	1	RMS	1693	-47.39	-13	Pass	701
1700	1765	1	RMS	1710.563	22.31	60	Pass	401
1765	3000	1	RMS	2957	-46.11	-13	Pass	1236
3000	12000	1	RMS	10401	-35.83	-13	Pass	9002
12000	20000	1	RMS	19786	-28.51	-13	Pass	8001

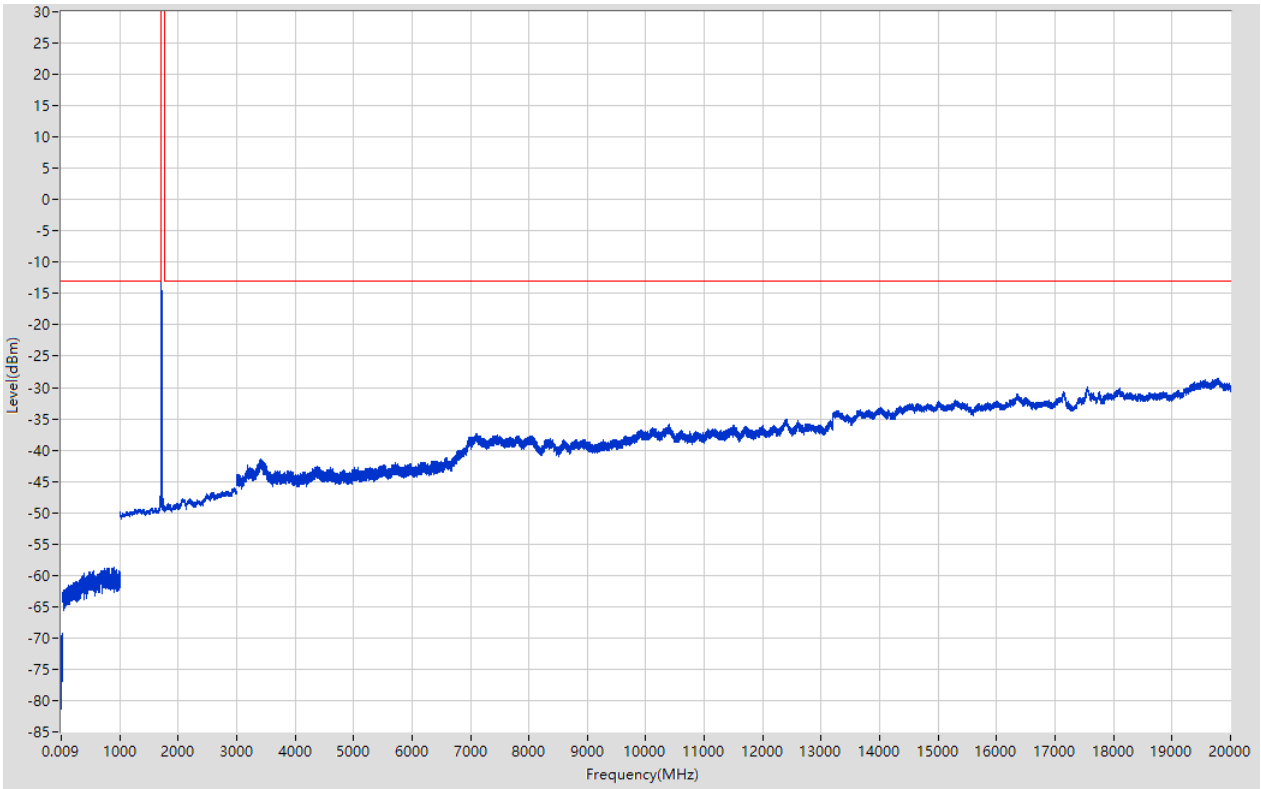

2.20. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:20, Channel:20000, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.2	-13	Pass	401
0.15	30	0.01	RMS	11.13	-69.22	-13	Pass	2986
30	1000	0.1	RMS	992.695	-58.7	-13	Pass	9701
1000	1700	1	RMS	1693	-47.08	-13	Pass	701
1700	1765	1	RMS	1710.563	21.62	60	Pass	401
1765	3000	1	RMS	2943	-46.2	-13	Pass	1236
3000	12000	1	RMS	10401	-35.76	-13	Pass	9002
12000	20000	1	RMS	19803	-28.39	-13	Pass	8001

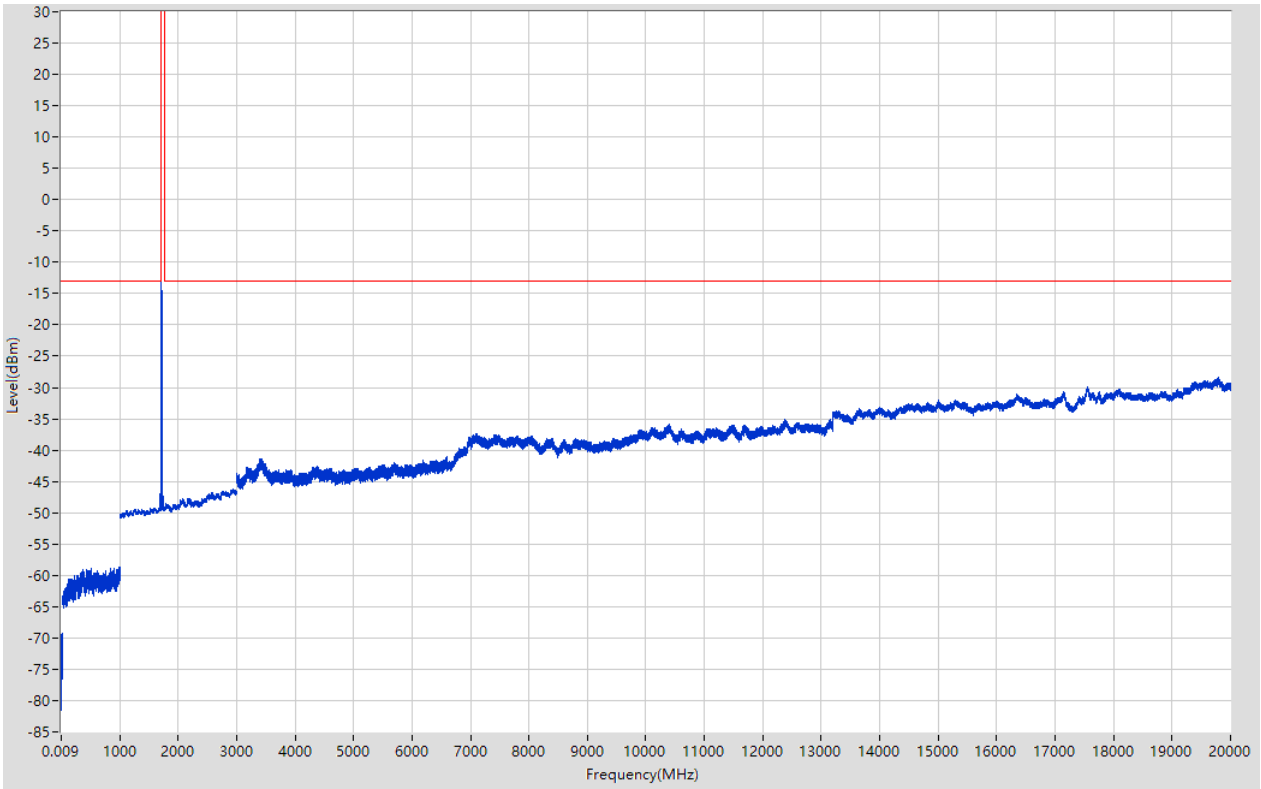

2.21. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:21, Channel:20175, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-72.5	-13	Pass	401
0.15	30	0.01	RMS	0.17	-68.83	-13	Pass	2986
30	1000	0.1	RMS	756	-58.92	-13	Pass	9701
1000	1700	1	RMS	1681	-49.09	-13	Pass	701
1700	1765	1	RMS	1727.95	22.24	60	Pass	401
1765	3000	1	RMS	2765	-46.34	-13	Pass	1236
3000	12000	1	RMS	11694	-36.01	-13	Pass	9002
12000	20000	1	RMS	19814	-28.45	-13	Pass	8001

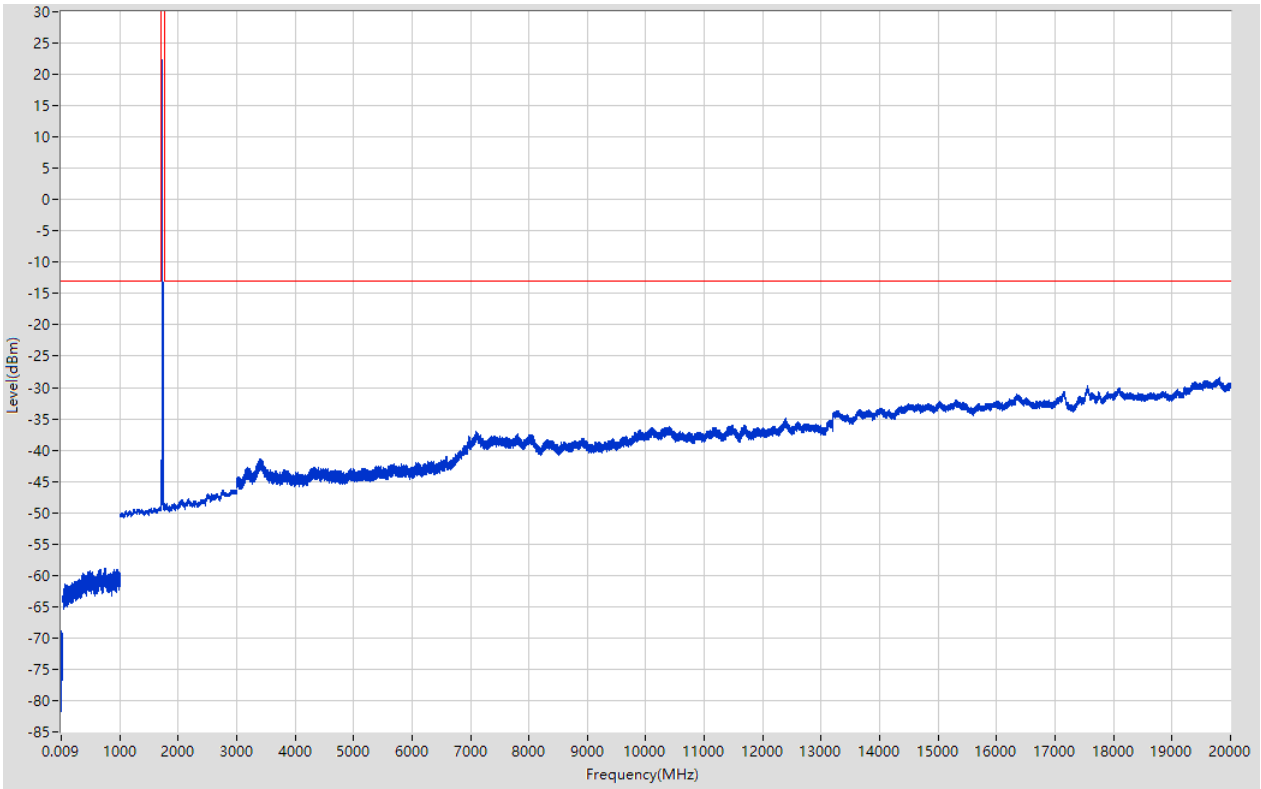

2.22. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:22, Channel:20175, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.016	-72.25	-13	Pass	401
0.15	30	0.01	RMS	11.32	-69.07	-13	Pass	2986
30	1000	0.1	RMS	498.5	-58.69	-13	Pass	9701
1000	1700	1	RMS	1697	-49.1	-13	Pass	701
1700	1765	1	RMS	1727.95	21.26	60	Pass	401
1765	3000	1	RMS	2969	-46	-13	Pass	1236
3000	12000	1	RMS	10420	-36.11	-13	Pass	9002
12000	20000	1	RMS	19812	-28.6	-13	Pass	8001

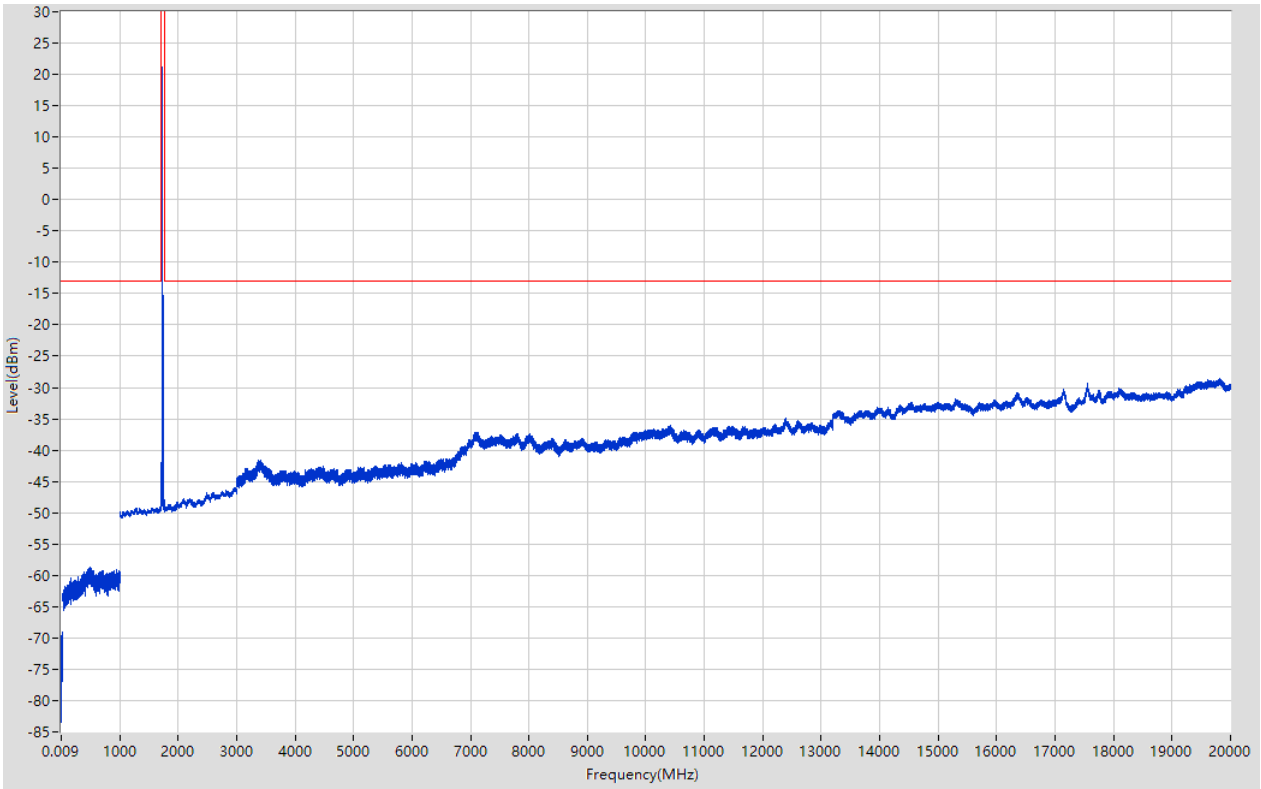

2.23. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:23, Channel:20350, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.52	-13	Pass	401
0.15	30	0.01	RMS	10.4	-68.89	-13	Pass	2986
30	1000	0.1	RMS	851.301	-58.59	-13	Pass	9701
1000	1700	1	RMS	1684	-49.14	-13	Pass	701
1700	1765	1	RMS	1745.5	22.64	60	Pass	401
1765	3000	1	RMS	2966	-46.13	-13	Pass	1236
3000	12000	1	RMS	11456	-36.05	-13	Pass	9002
12000	20000	1	RMS	19759	-28.62	-13	Pass	8001

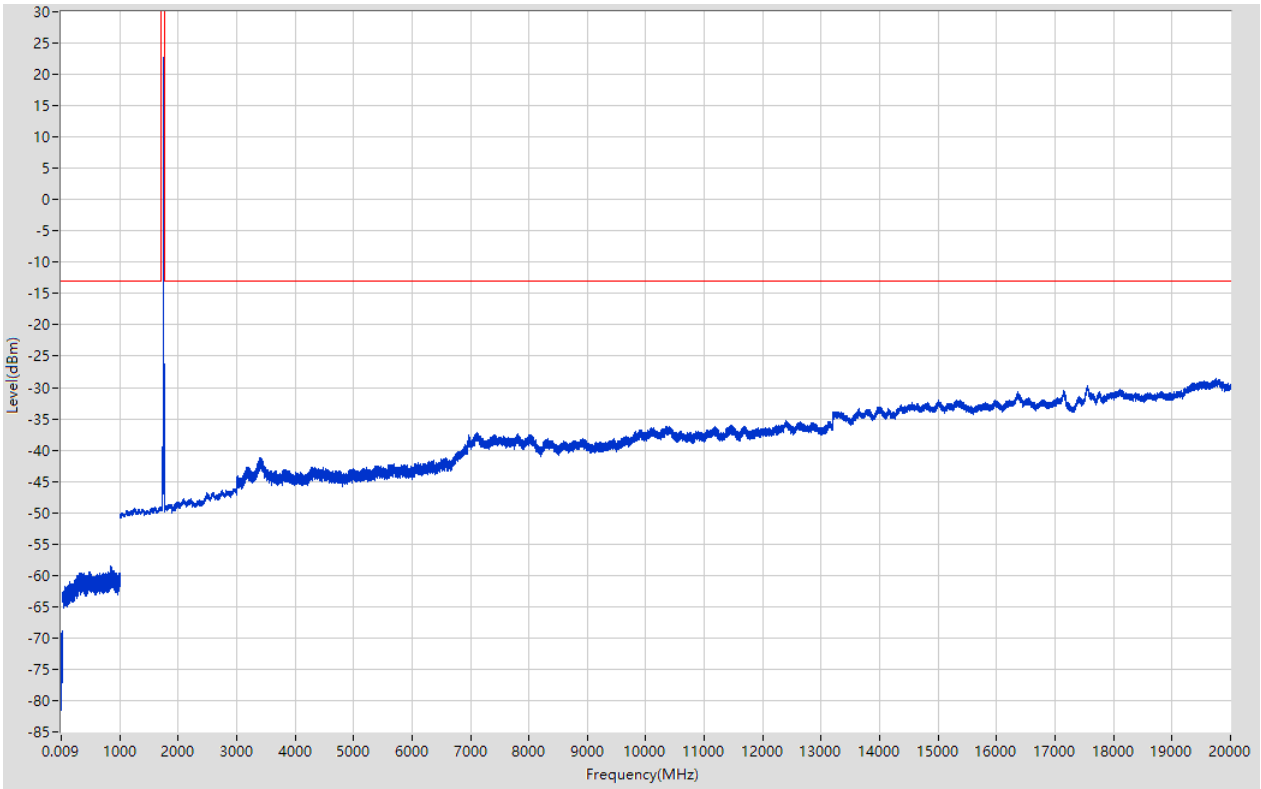

2.24. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:24, Channel:20350, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.05	-13	Pass	401
0.15	30	0.01	RMS	26.32	-69.6	-13	Pass	2986
30	1000	0.1	RMS	862.509	-59.01	-13	Pass	9701
1000	1700	1	RMS	1645	-49.22	-13	Pass	701
1700	1765	1	RMS	1745.5	21.86	60	Pass	401
1765	3000	1	RMS	2754	-46.37	-13	Pass	1236
3000	12000	1	RMS	10402	-35.74	-13	Pass	9002
12000	20000	1	RMS	19809	-28.6	-13	Pass	8001

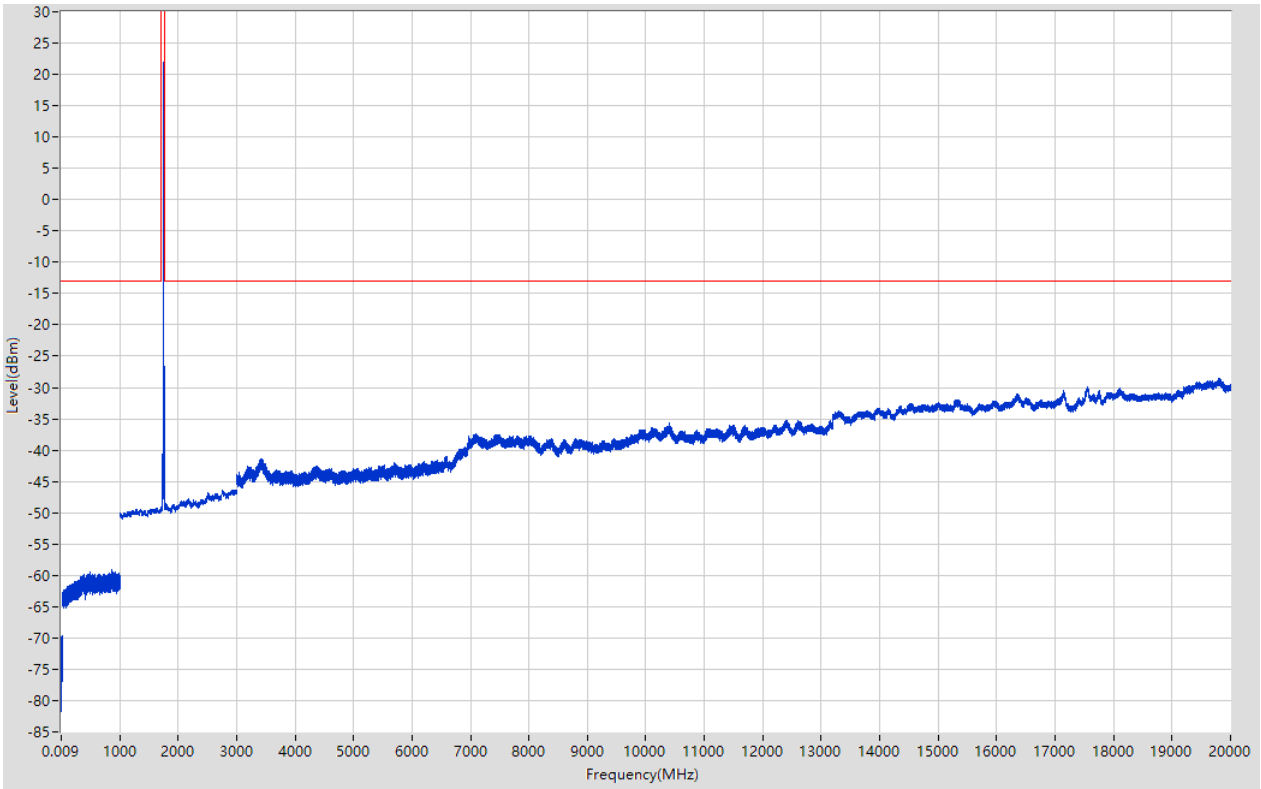

2.25. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:25, Channel:20025, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.62	-13	Pass	401
0.15	30	0.01	RMS	15.38	-69.69	-13	Pass	2986
30	1000	0.1	RMS	877.719	-59.57	-13	Pass	9701
1000	1700	1	RMS	1698	-44.58	-13	Pass	701
1700	1765	1	RMS	1710.725	22.42	60	Pass	401
1765	3000	1	RMS	2999	-46.29	-13	Pass	1236
3000	12000	1	RMS	10396	-35.88	-13	Pass	9002
12000	20000	1	RMS	19804	-28.5	-13	Pass	8001

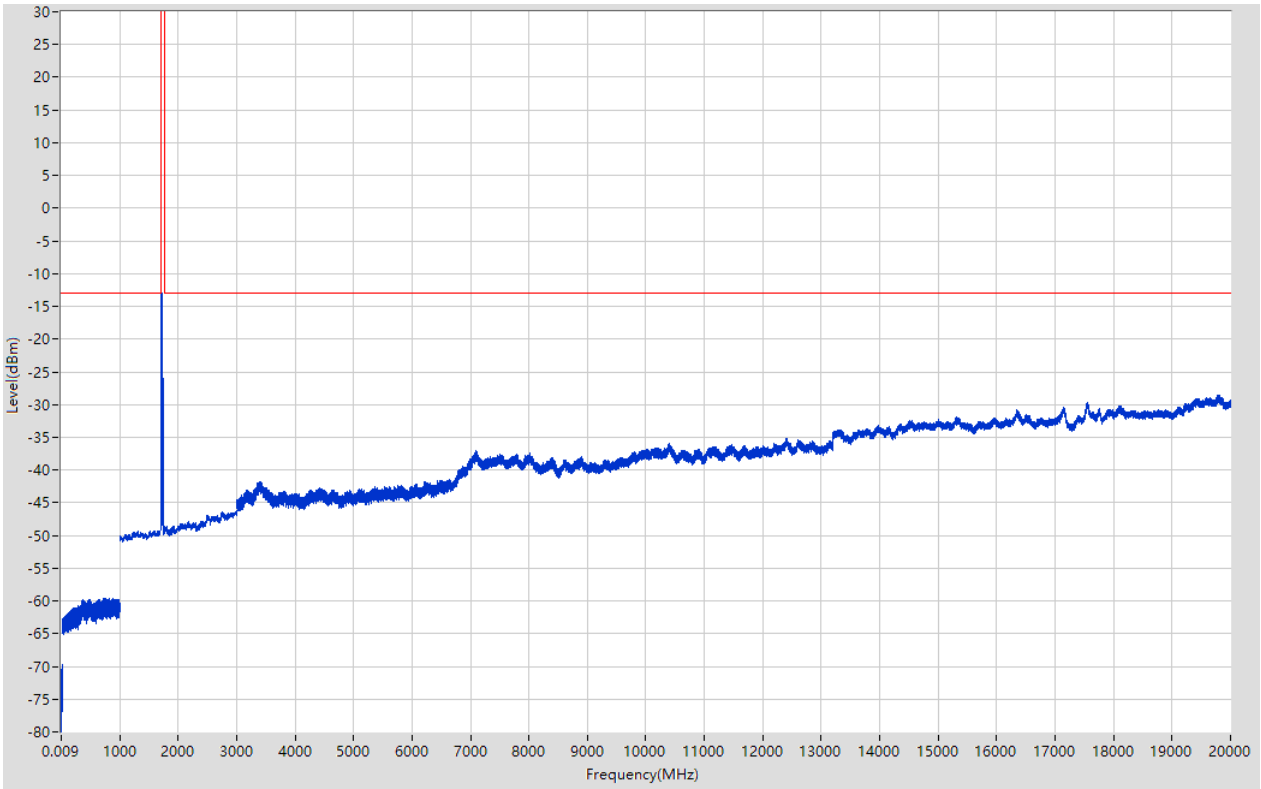

2.26. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:26, Channel:20025, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.18	-13	Pass	401
0.15	30	0.01	RMS	24.47	-69.45	-13	Pass	2986
30	1000	0.1	RMS	472.4	-59.49	-13	Pass	9701
1000	1700	1	RMS	1698	-45.64	-13	Pass	701
1700	1765	1	RMS	1710.725	21.71	60	Pass	401
1765	3000	1	RMS	2960	-46.27	-13	Pass	1236
3000	12000	1	RMS	11444	-36.14	-13	Pass	9002
12000	20000	1	RMS	19752	-28.71	-13	Pass	8001

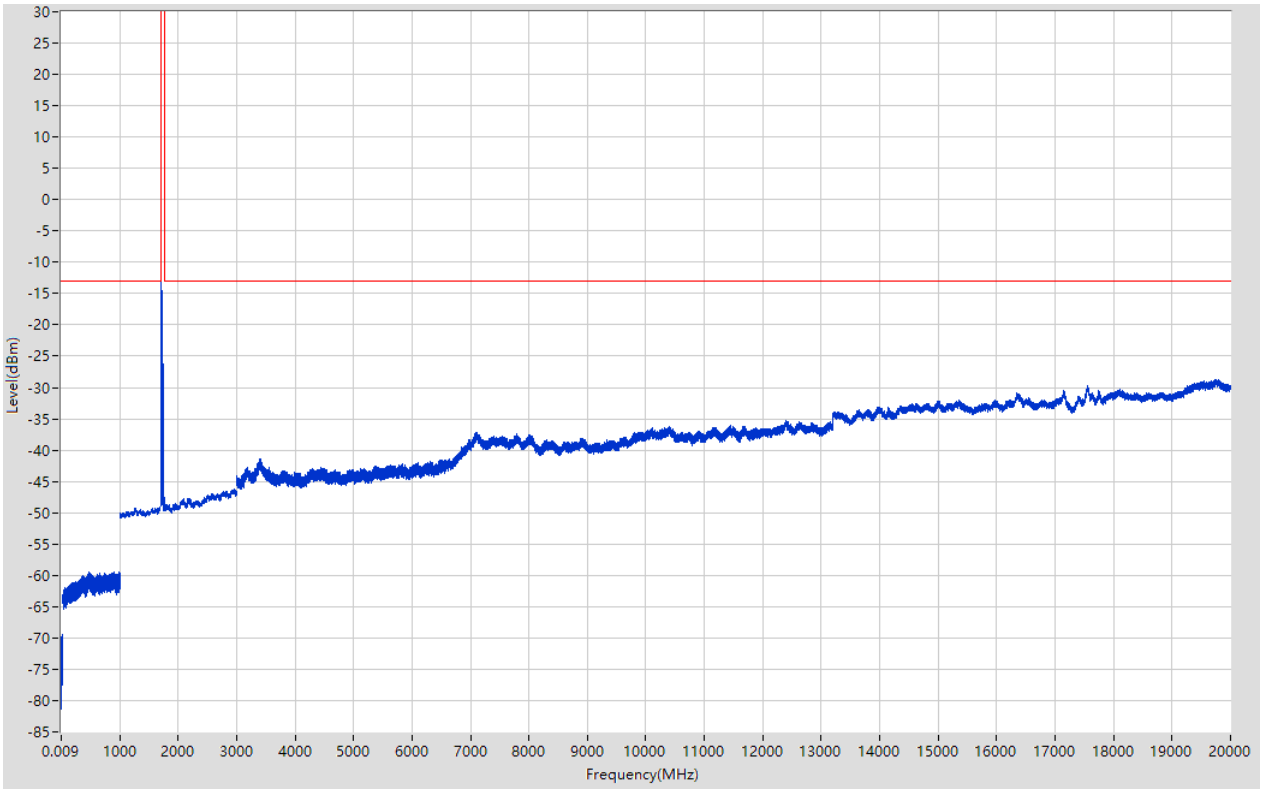

2.27. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:27, Channel:20175, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.09	-73.62	-13	Pass	401
0.15	30	0.01	RMS	18.18	-69.26	-13	Pass	2986
30	1000	0.1	RMS	755.1	-59.26	-13	Pass	9701
1000	1700	1	RMS	1699	-44.47	-13	Pass	701
1700	1765	1	RMS	1725.838	22.17	60	Pass	401
1765	3000	1	RMS	2973	-46.22	-13	Pass	1236
3000	12000	1	RMS	10404	-35.96	-13	Pass	9002
12000	20000	1	RMS	19799	-28.61	-13	Pass	8001

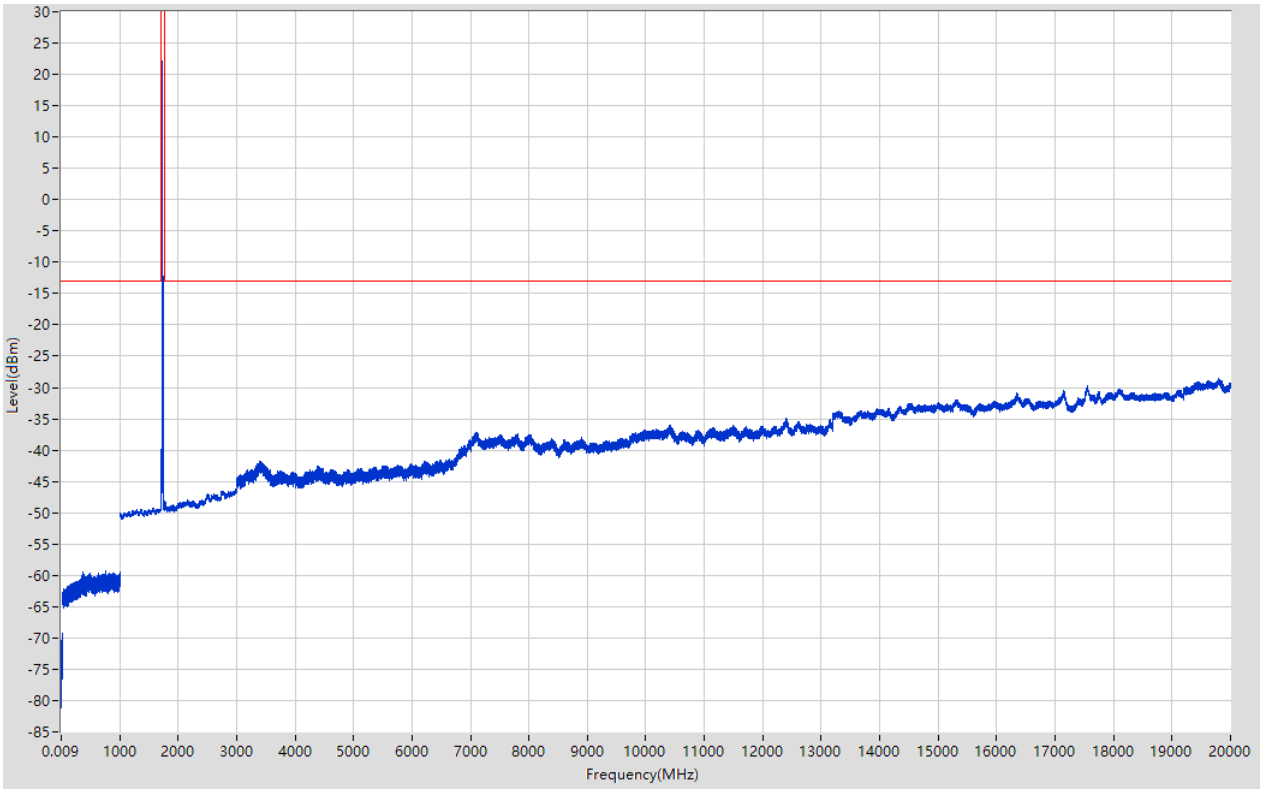

2.28. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:28, Channel:20175, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-71.9	-13	Pass	401
0.15	30	0.01	RMS	28.54	-69.47	-13	Pass	2986
30	1000	0.1	RMS	877.219	-59.45	-13	Pass	9701
1000	1700	1	RMS	1699	-43.82	-13	Pass	701
1700	1765	1	RMS	1725.675	21.4	60	Pass	401
1765	3000	1	RMS	2963	-46.14	-13	Pass	1236
3000	12000	1	RMS	10402	-35.86	-13	Pass	9002
12000	20000	1	RMS	19794	-28.46	-13	Pass	8001

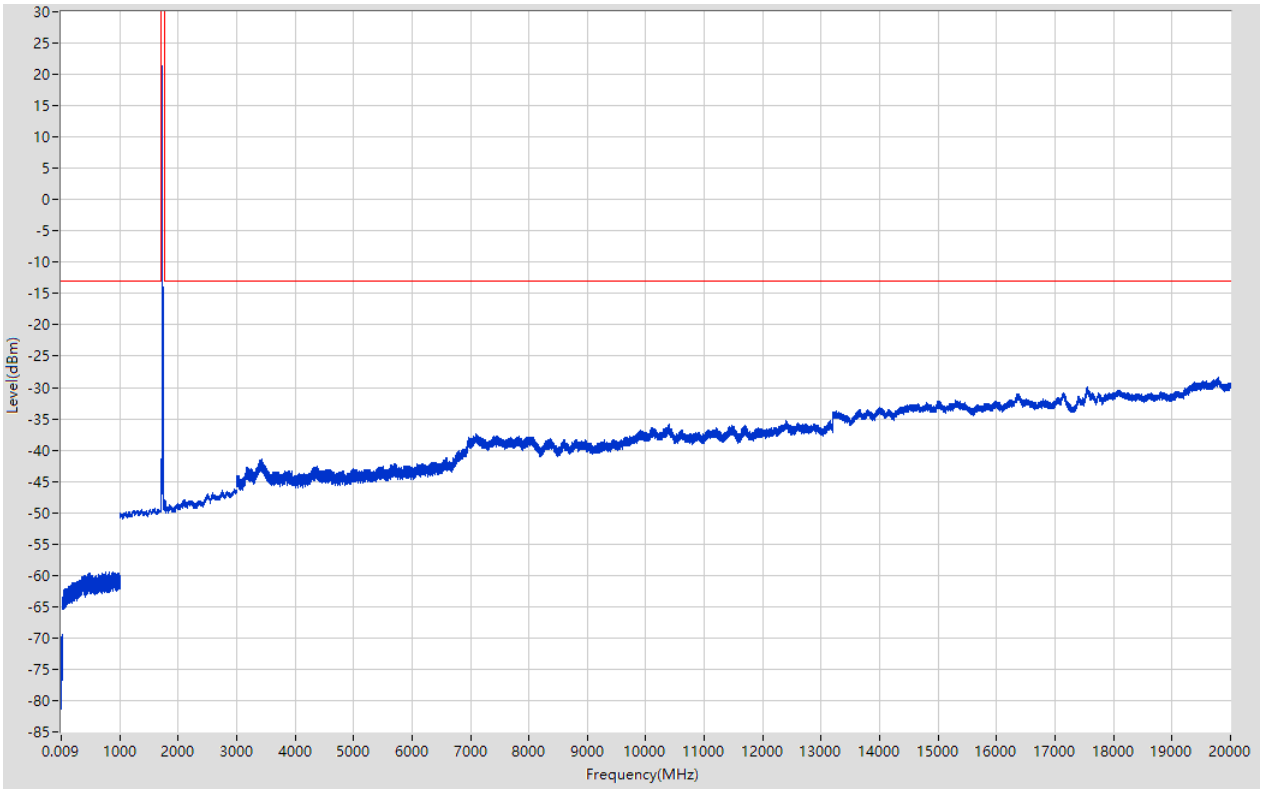

2.29. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:29, Channel:20325, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-71.51	-13	Pass	401
0.15	30	0.01	RMS	27.54	-69.63	-13	Pass	2986
30	1000	0.1	RMS	856.805	-59.46	-13	Pass	9701
1000	1700	1	RMS	1700	-49.21	-13	Pass	701
1700	1765	1	RMS	1740.788	22.58	60	Pass	401
1765	3000	1	RMS	1767	-29.6	-13	Pass	1236
3000	12000	1	RMS	10399	-36.26	-13	Pass	9002
12000	20000	1	RMS	19798	-28.45	-13	Pass	8001

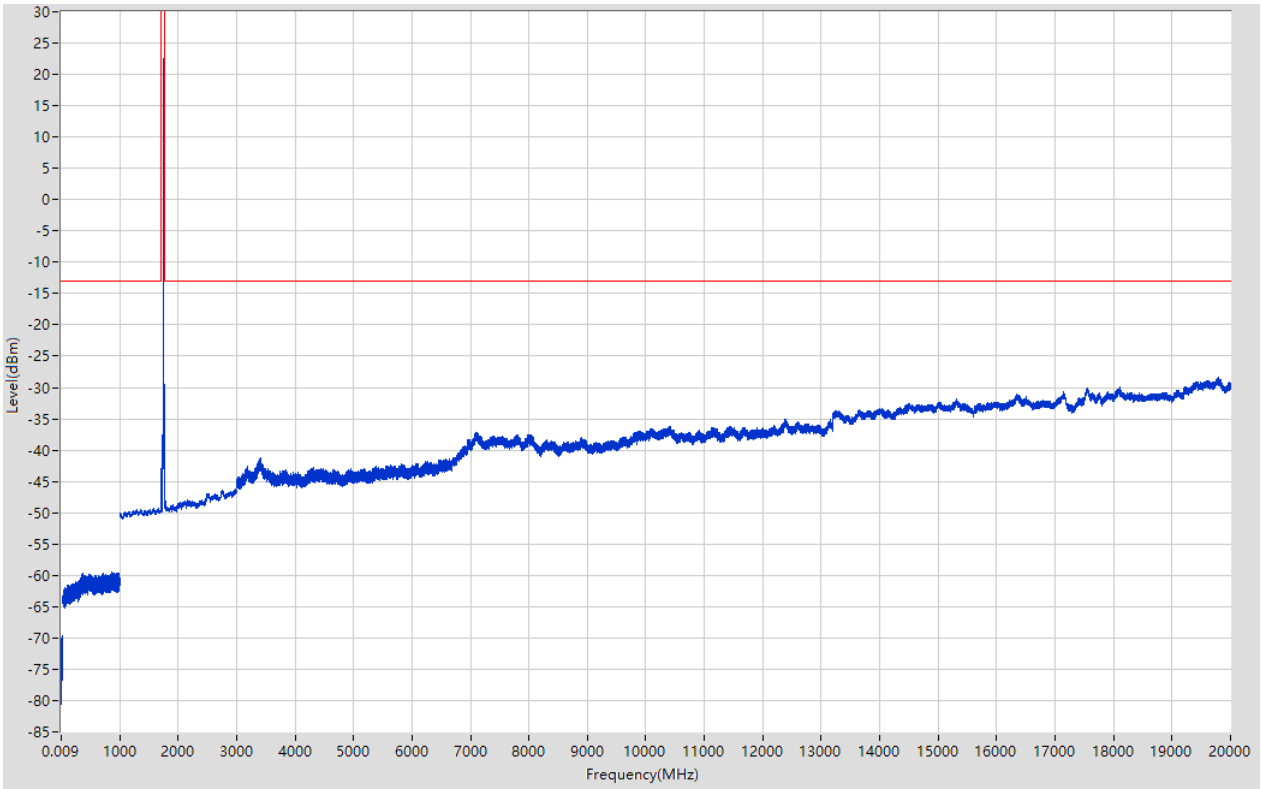

2.30. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:30, Channel:20325, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.81	-13	Pass	401
0.15	30	0.01	RMS	0.15	-69.38	-13	Pass	2986
30	1000	0.1	RMS	902.736	-59.36	-13	Pass	9701
1000	1700	1	RMS	1592	-49.34	-13	Pass	701
1700	1765	1	RMS	1740.788	21.59	60	Pass	401
1765	3000	1	RMS	1767	-30	-13	Pass	1236
3000	12000	1	RMS	10393	-36.02	-13	Pass	9002
12000	20000	1	RMS	19778	-28.62	-13	Pass	8001

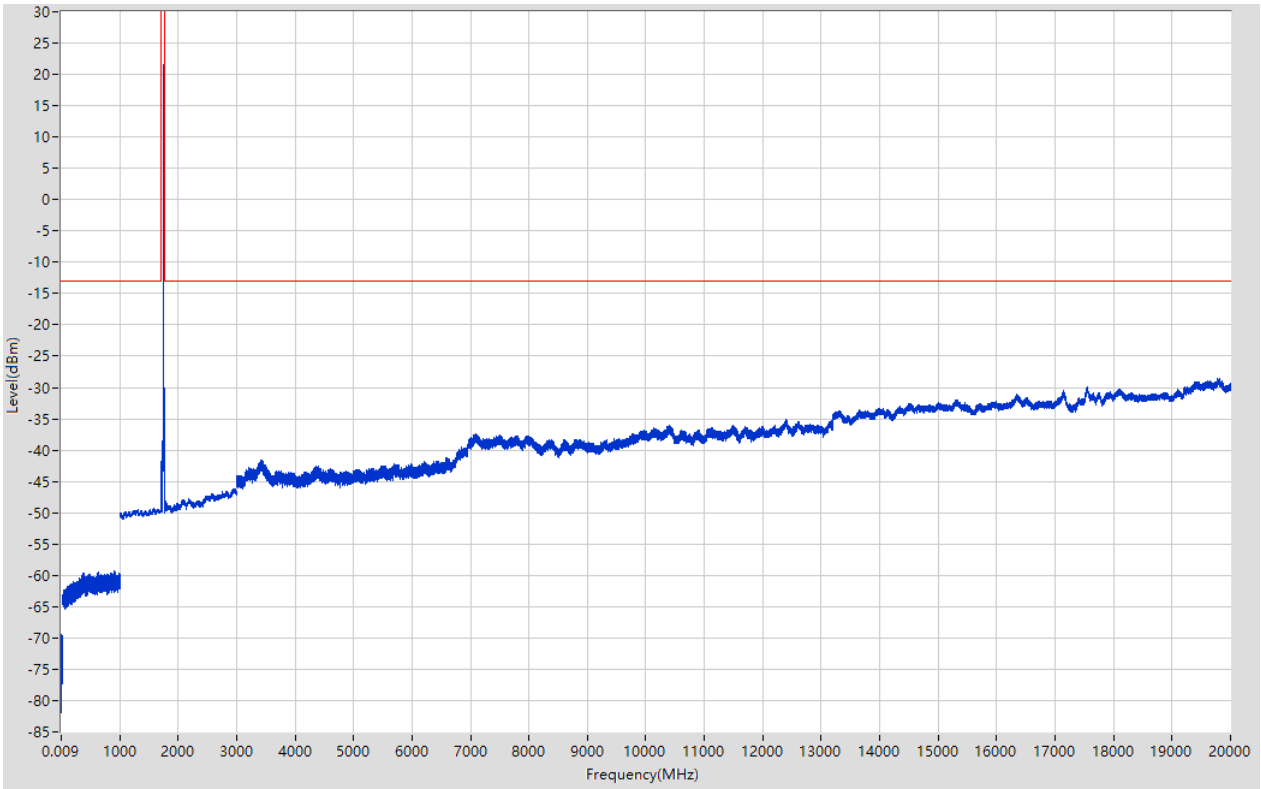

2.31. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:31, Channel:20050, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.043	-73.82	-13	Pass	401
0.15	30	0.01	RMS	2.33	-69.41	-13	Pass	2986
30	1000	0.1	RMS	491.6	-59.42	-13	Pass	9701
1000	1700	1	RMS	1693	-45.49	-13	Pass	701
1700	1765	1	RMS	1711.05	22.32	60	Pass	401
1765	3000	1	RMS	2966	-46.18	-13	Pass	1236
3000	12000	1	RMS	11451	-36.05	-13	Pass	9002
12000	20000	1	RMS	19721	-28.64	-13	Pass	8001

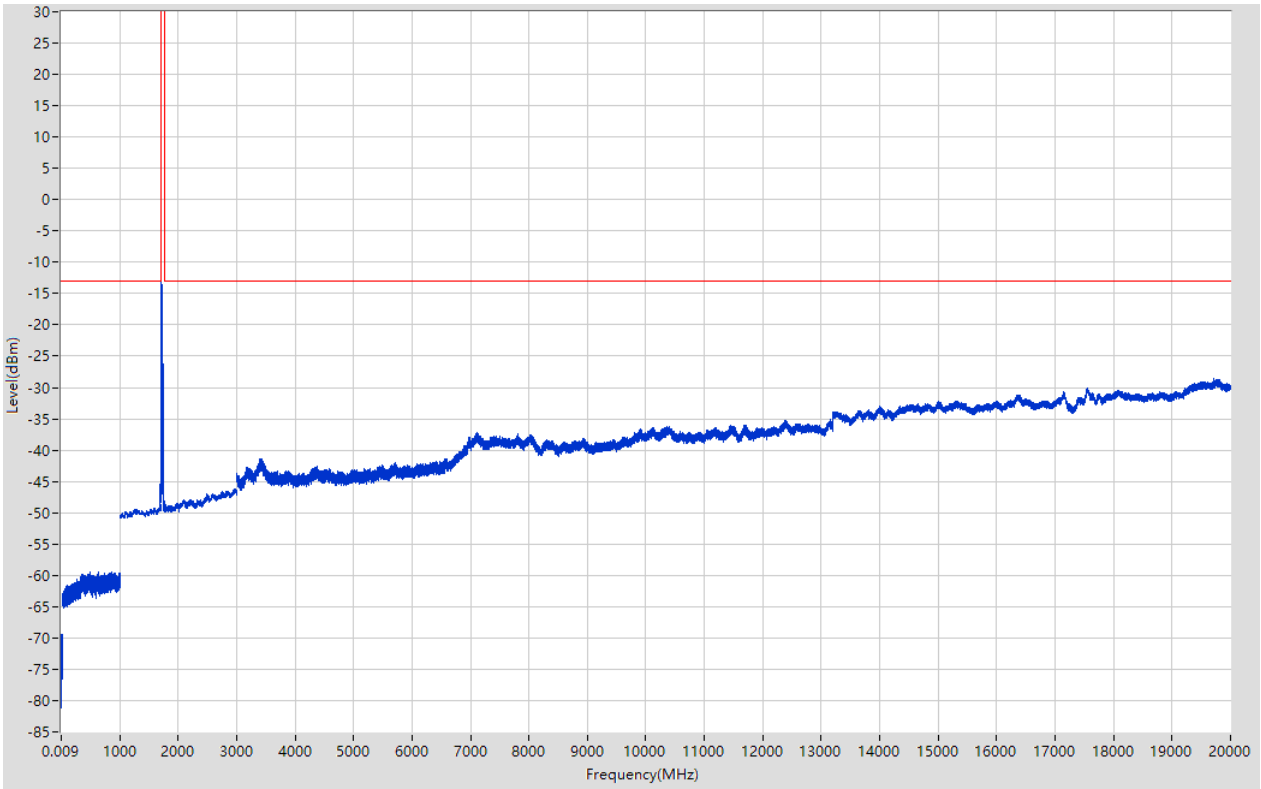

2.32. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:32, Channel:20050, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.49	-13	Pass	401
0.15	30	0.01	RMS	21.85	-68.92	-13	Pass	2986
30	1000	0.1	RMS	890.628	-59.11	-13	Pass	9701
1000	1700	1	RMS	1693	-46.23	-13	Pass	701
1700	1765	1	RMS	1711.05	21.61	60	Pass	401
1765	3000	1	RMS	2976	-46.05	-13	Pass	1236
3000	12000	1	RMS	11467	-36.11	-13	Pass	9002
12000	20000	1	RMS	19782	-28.63	-13	Pass	8001

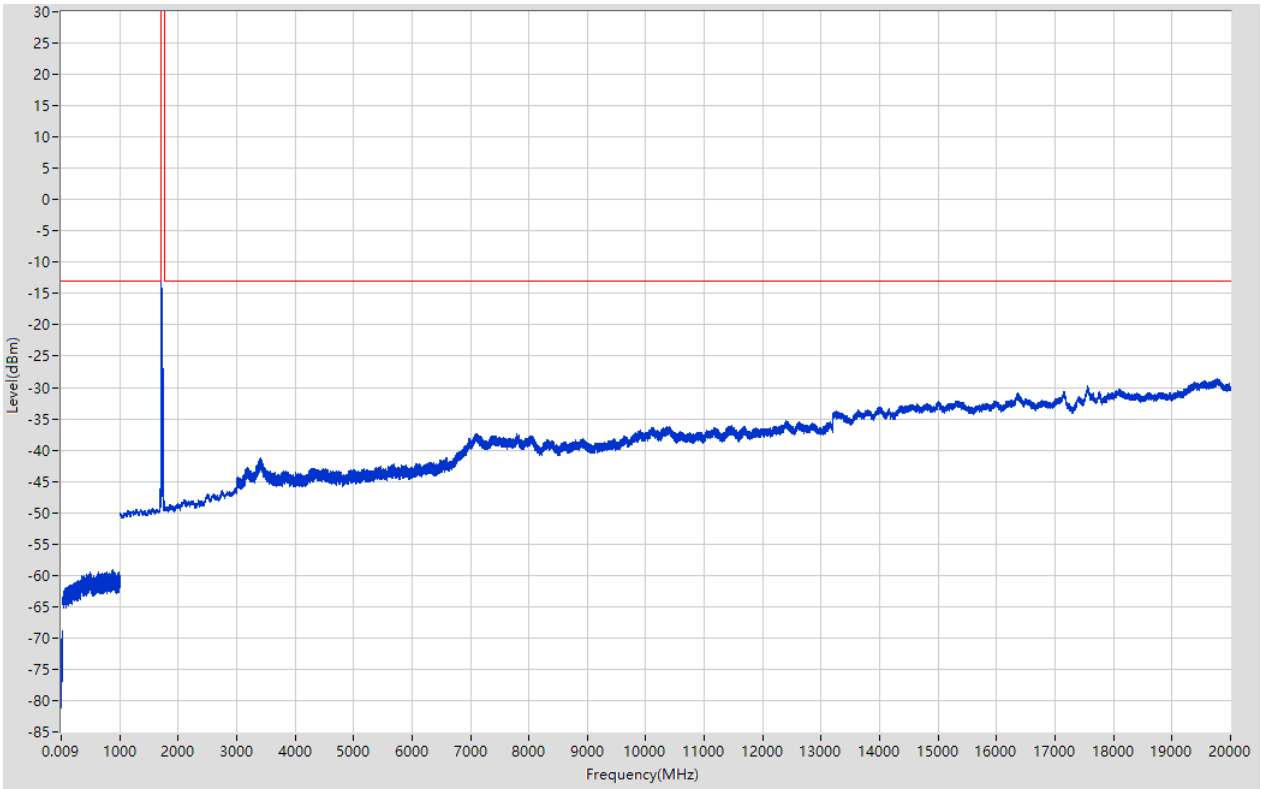

2.33. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:33, Channel:20175, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.09	-73.13	-13	Pass	401
0.15	30	0.01	RMS	24.34	-69.06	-13	Pass	2986
30	1000	0.1	RMS	892.429	-59.12	-13	Pass	9701
1000	1700	1	RMS	1697	-49.04	-13	Pass	701
1700	1765	1	RMS	1723.563	22.14	60	Pass	401
1765	3000	1	RMS	2975	-46.15	-13	Pass	1236
3000	12000	1	RMS	10426	-36.08	-13	Pass	9002
12000	20000	1	RMS	19778	-28.76	-13	Pass	8001

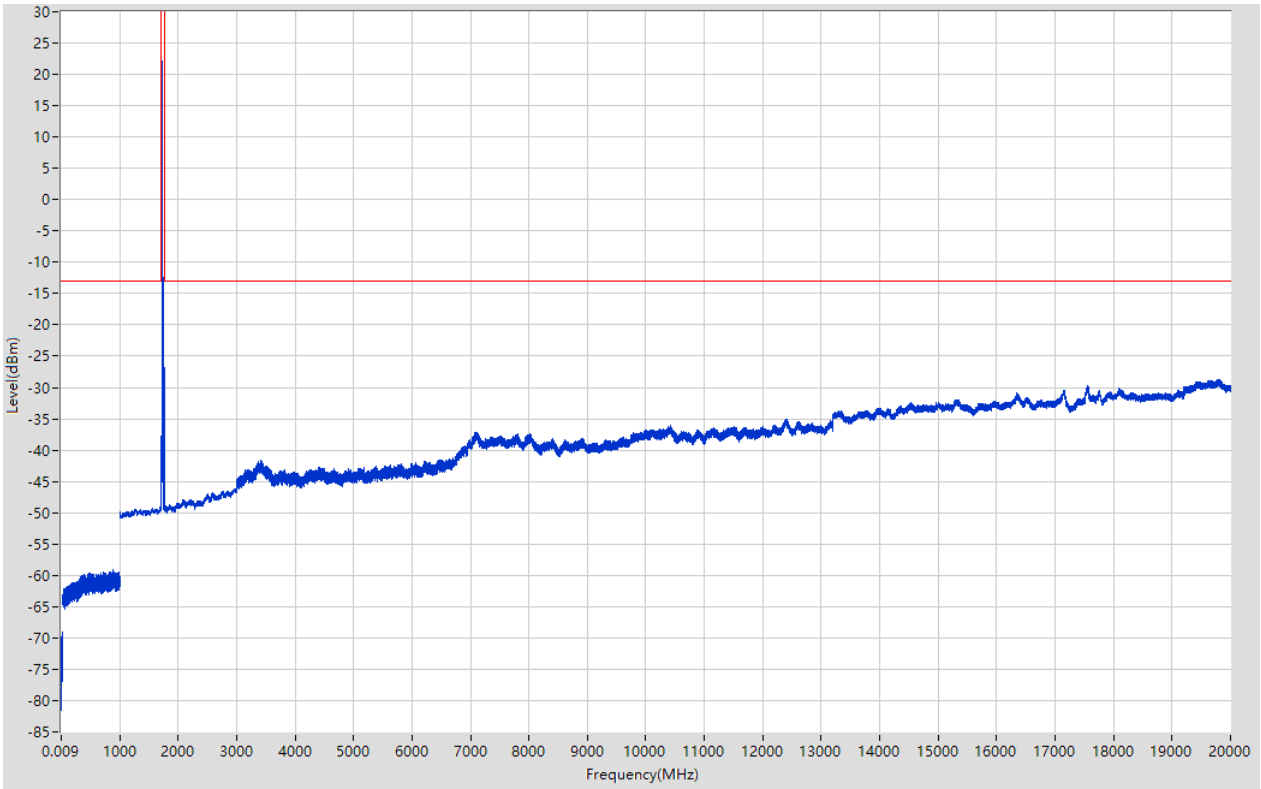

2.34. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:34, Channel:20175, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.04	-13	Pass	401
0.15	30	0.01	RMS	5.7	-69.52	-13	Pass	2986
30	1000	0.1	RMS	899.533	-59.36	-13	Pass	9701
1000	1700	1	RMS	1688	-49.27	-13	Pass	701
1700	1765	1	RMS	1723.563	21.33	60	Pass	401
1765	3000	1	RMS	2925	-46.36	-13	Pass	1236
3000	12000	1	RMS	10401	-35.93	-13	Pass	9002
12000	20000	1	RMS	19804	-28.73	-13	Pass	8001

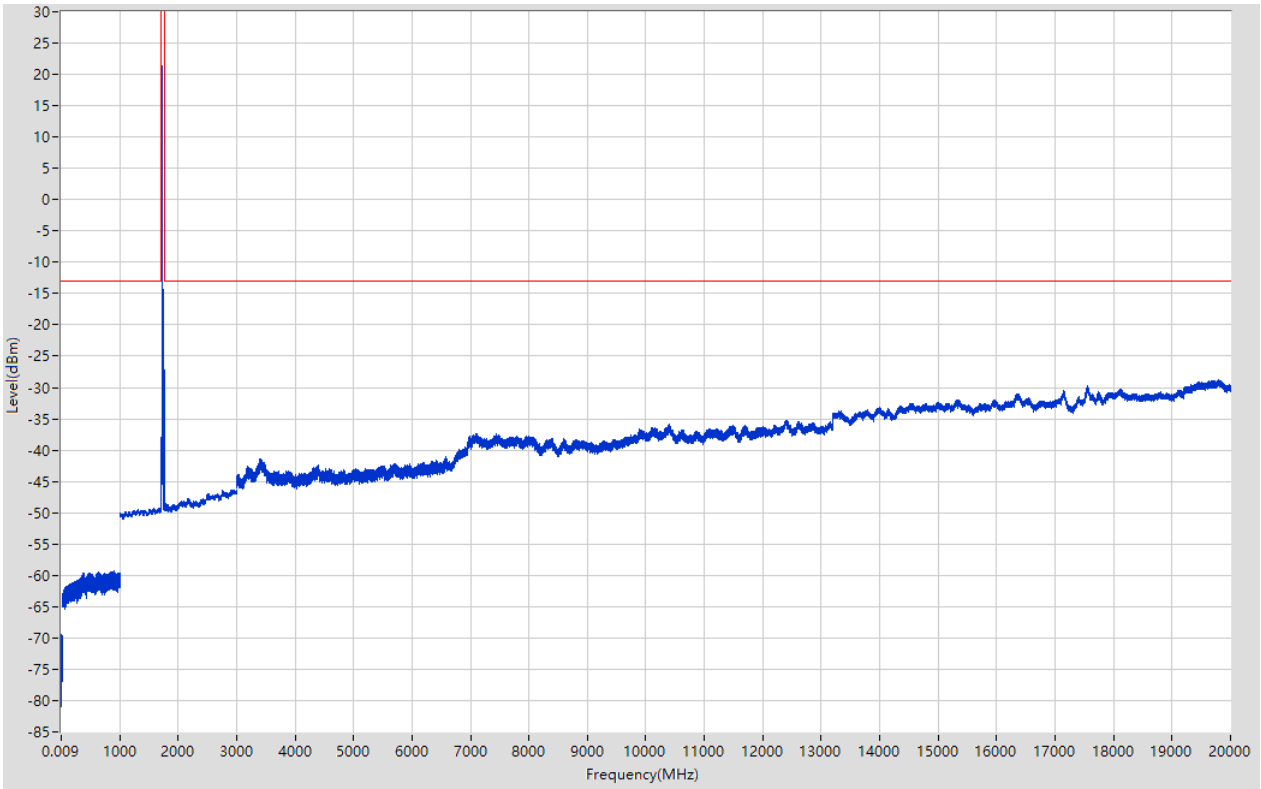

2.35. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:35, Channel:20300, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.94	-13	Pass	401
0.15	30	0.01	RMS	0.15	-69.22	-13	Pass	2986
30	1000	0.1	RMS	482.9	-59.43	-13	Pass	9701
1000	1700	1	RMS	1700	-46.59	-13	Pass	701
1700	1765	1	RMS	1736.075	22.34	60	Pass	401
1765	3000	1	RMS	1772	-29.09	-13	Pass	1236
3000	12000	1	RMS	11154	-36.28	-13	Pass	9002
12000	20000	1	RMS	19811	-28.76	-13	Pass	8001

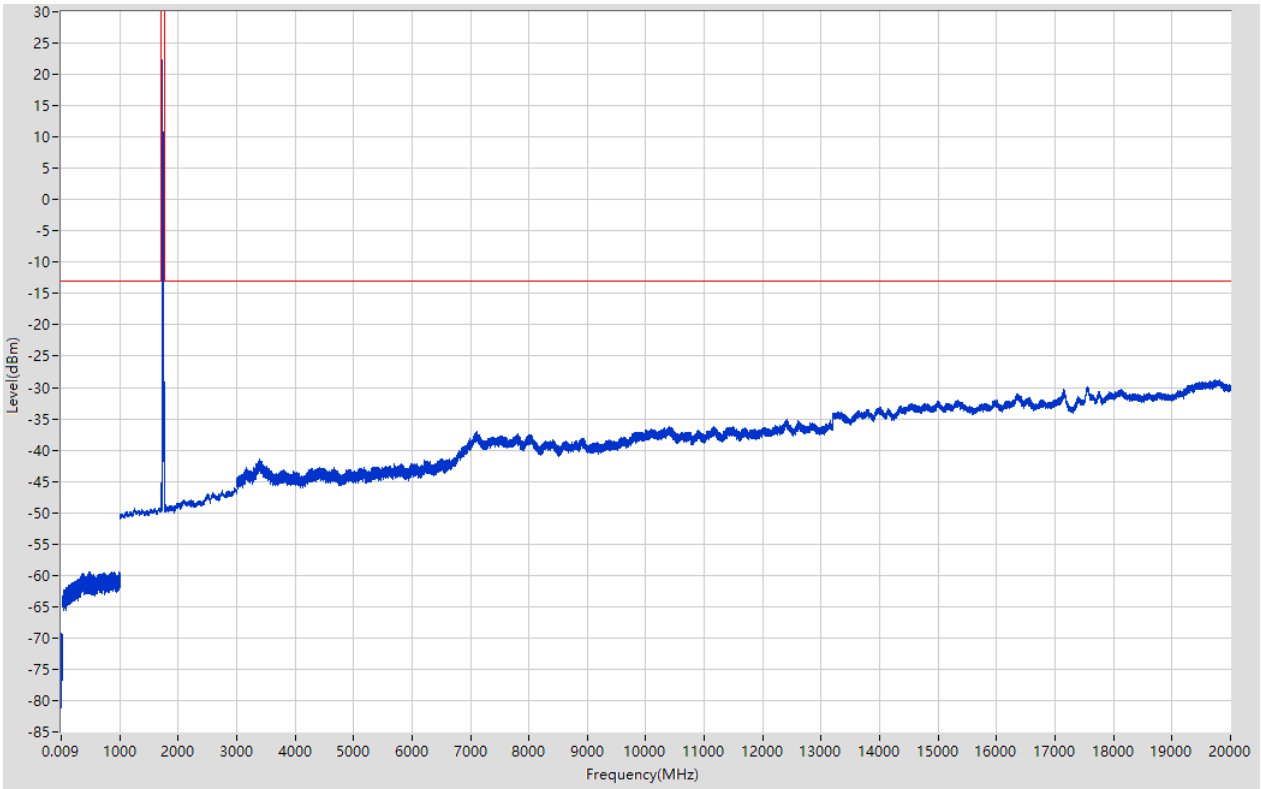

2.36. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:36, Channel:20300, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.025	-72.8	-13	Pass	401
0.15	30	0.01	RMS	10.68	-69.48	-13	Pass	2986
30	1000	0.1	RMS	751.2	-59.28	-13	Pass	9701
1000	1700	1	RMS	1700	-45.78	-13	Pass	701
1700	1765	1	RMS	1736.075	21.4	60	Pass	401
1765	3000	1	RMS	1772	-29.45	-13	Pass	1236
3000	12000	1	RMS	10401	-35.84	-13	Pass	9002
12000	20000	1	RMS	19812	-28.7	-13	Pass	8001

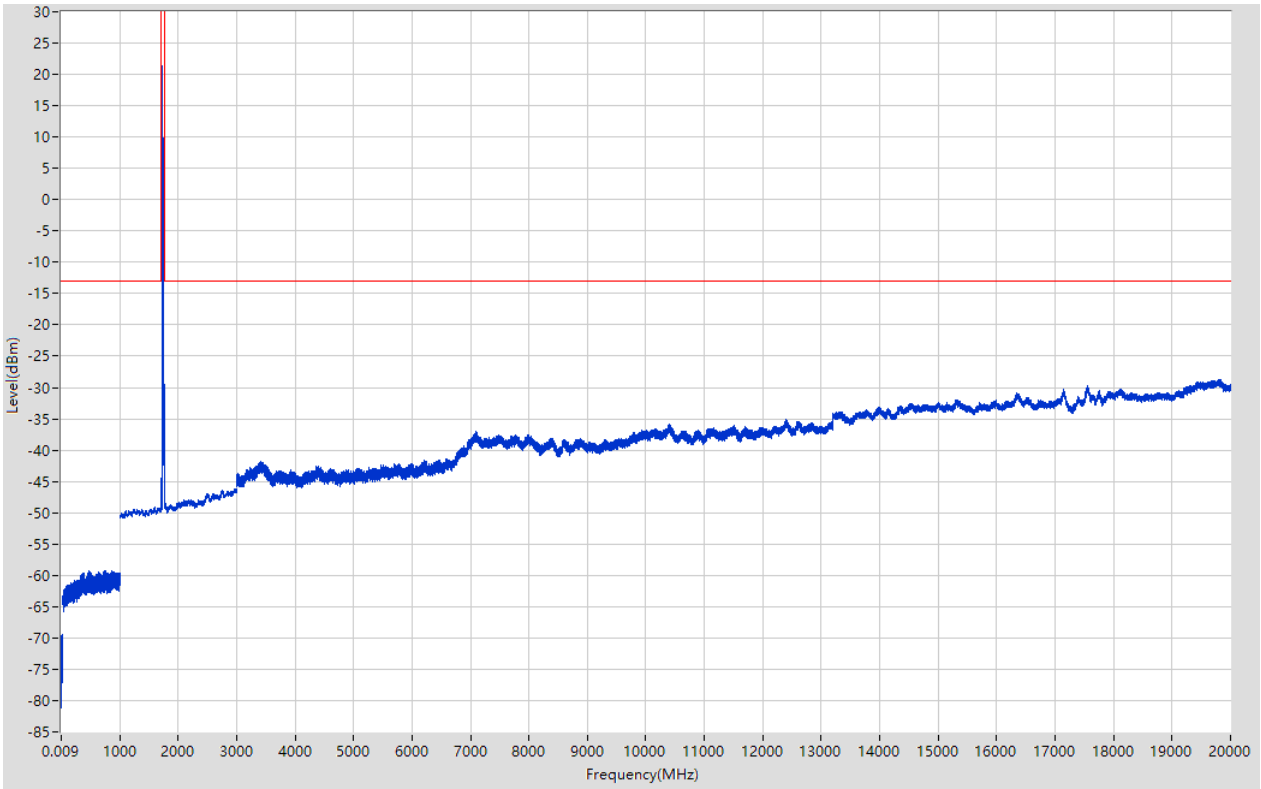

3. LTE_Band5

3.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:20407, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.095	-73.63	-13	Pass	401
0.15	30	0.01	RMS	19.66	-69.2	-13	Pass	2986
30	814	0.1	RMS	495.4	-59.67	-13	Pass	7841
814	860	0.1	RMS	824.2	19.68	60	Pass	461
860	1000	0.1	RMS	949.4	-59.35	-13	Pass	1401
1000	3000	1	RMS	1648	-45.88	-13	Pass	2001
3000	10000	1	RMS	9912	-36.83	-13	Pass	7001

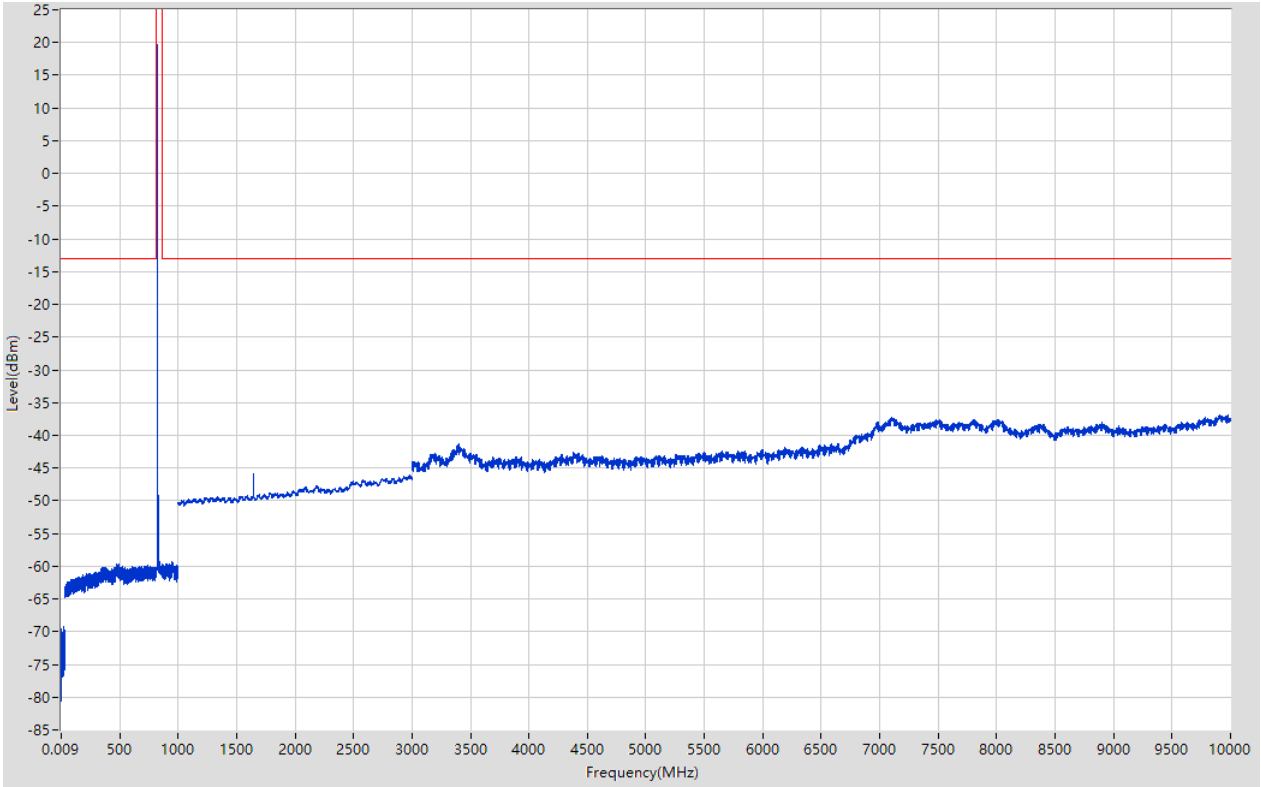

3.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:20407, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.08	-73.66	-13	Pass	401
0.15	30	0.01	RMS	0.4	-68.99	-13	Pass	2986
30	814	0.1	RMS	808.5	-59.34	-13	Pass	7841
814	860	0.1	RMS	824.2	18.89	60	Pass	461
860	1000	0.1	RMS	998.8	-59.64	-13	Pass	1401
1000	3000	1	RMS	2949	-46.25	-13	Pass	2001
3000	10000	1	RMS	9907	-36.99	-13	Pass	7001

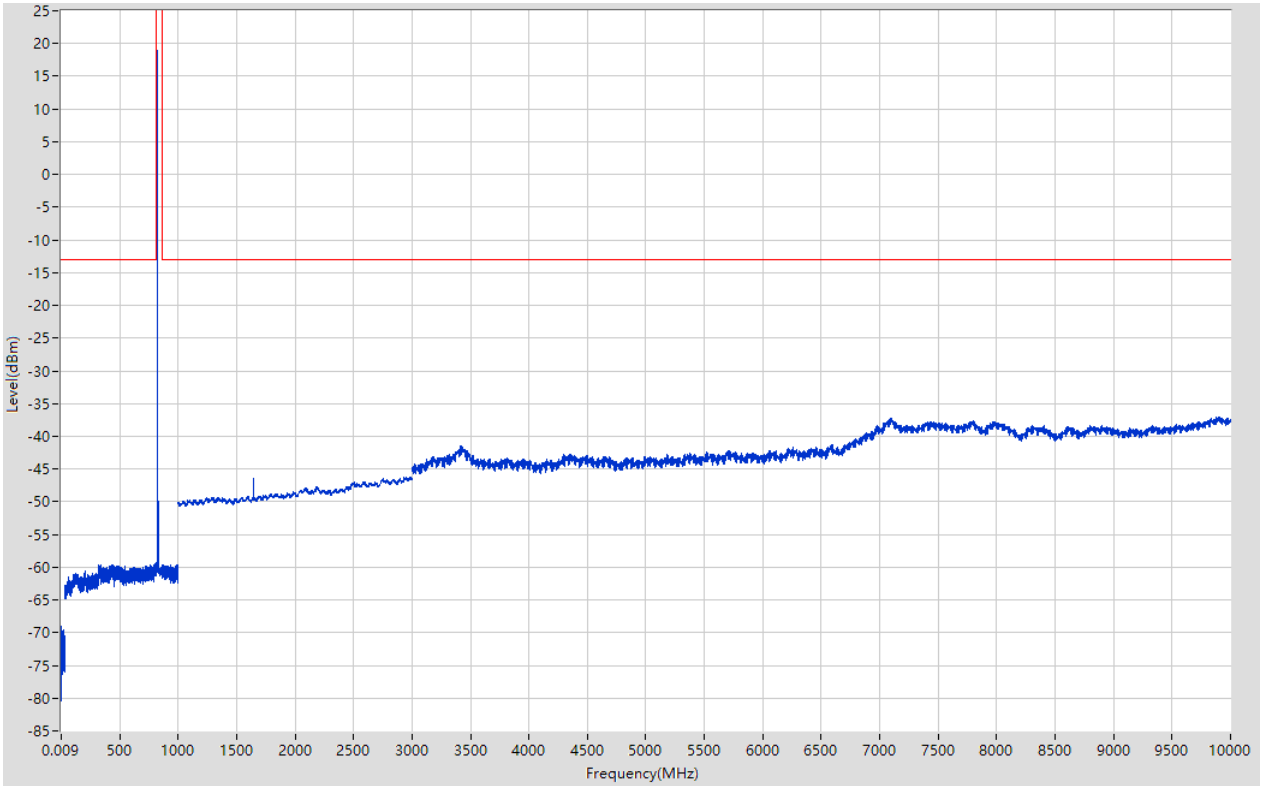

3.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:20525, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.041	-73.74	-13	Pass	401
0.15	30	0.01	RMS	0.39	-69.59	-13	Pass	2986
30	814	0.1	RMS	725.6	-59.55	-13	Pass	7841
814	860	0.1	RMS	836.1	19.38	60	Pass	461
860	1000	0.1	RMS	889.7	-59.49	-13	Pass	1401
1000	3000	1	RMS	2972	-46.13	-13	Pass	2001
3000	10000	1	RMS	10000	-37.09	-13	Pass	7001

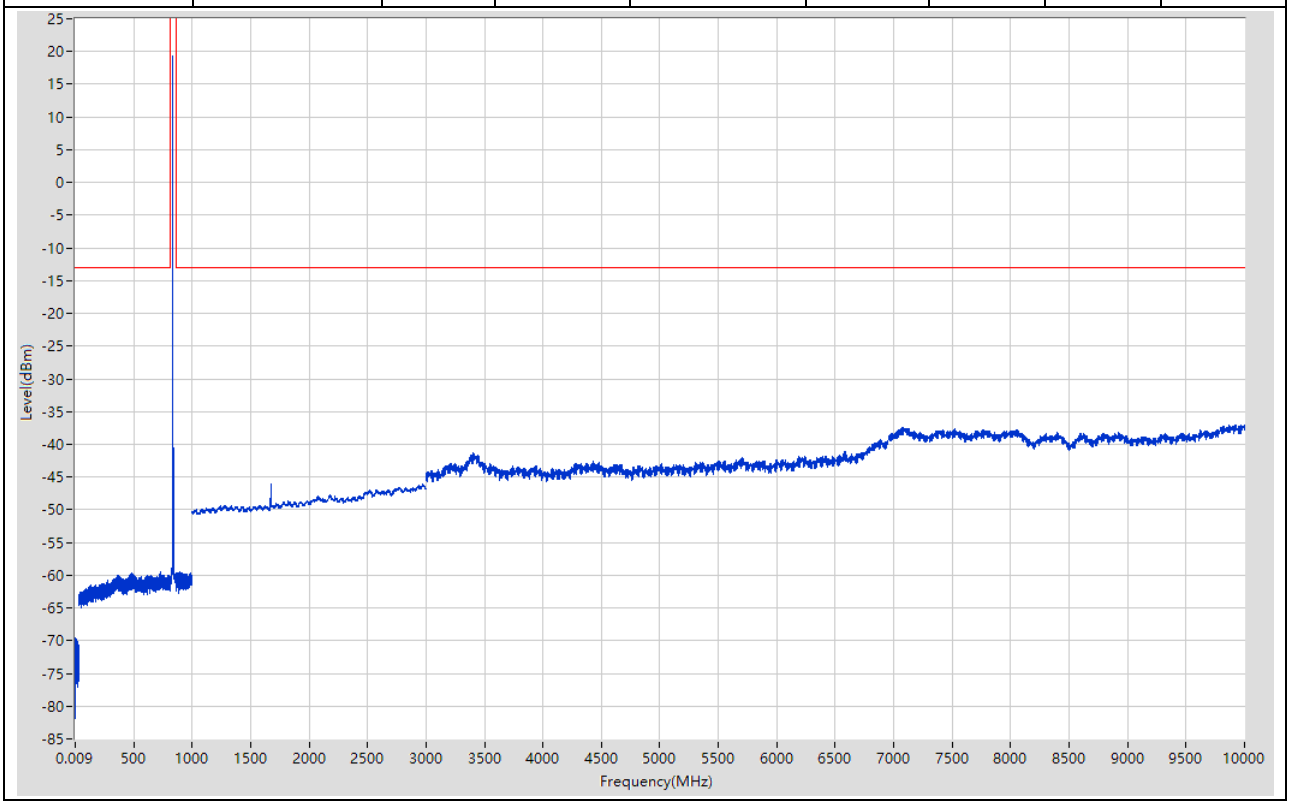

3.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:20525, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.25	-13	Pass	401
0.15	30	0.01	RMS	19.25	-69.58	-13	Pass	2986
30	814	0.1	RMS	754.3	-59.8	-13	Pass	7841
814	860	0.1	RMS	836.1	18.57	60	Pass	461
860	1000	0.1	RMS	900.3	-59.39	-13	Pass	1401
1000	3000	1	RMS	2972	-46.06	-13	Pass	2001
3000	10000	1	RMS	9986	-36.81	-13	Pass	7001

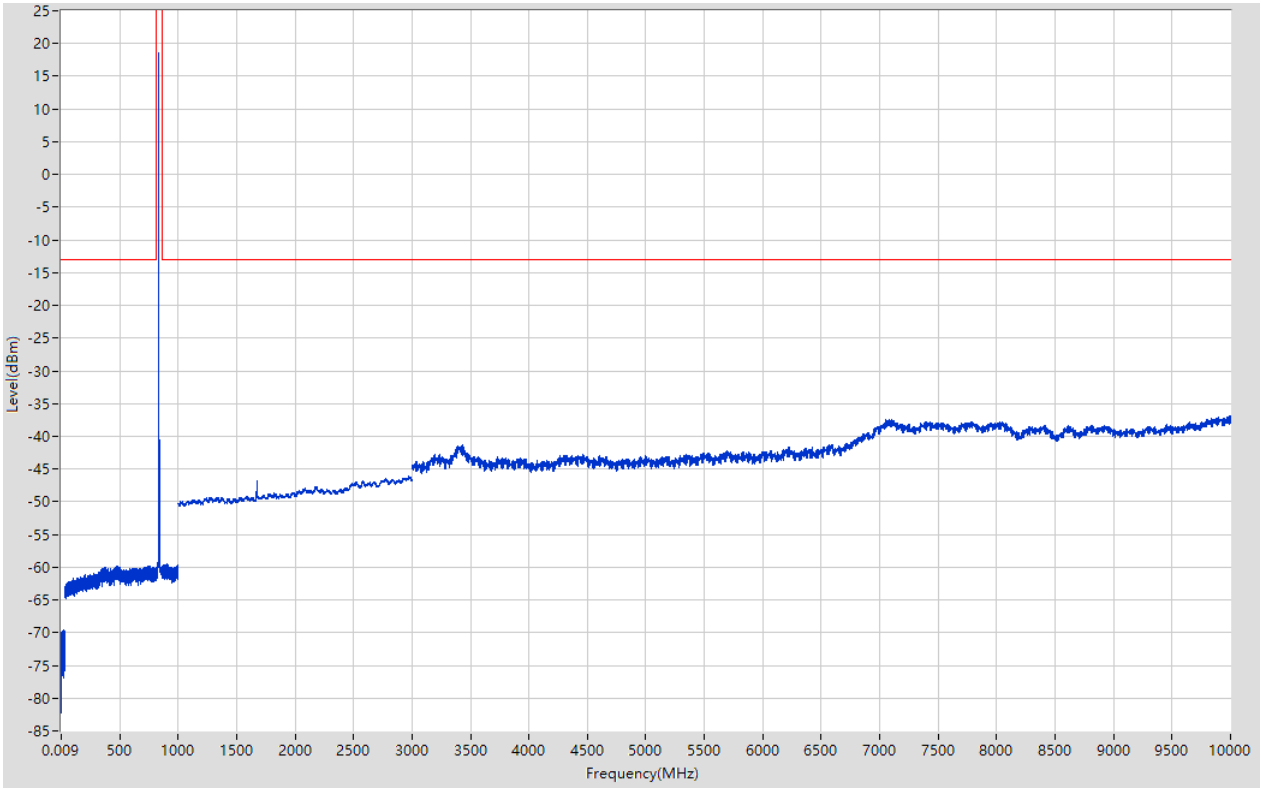

3.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:20643, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.24	-13	Pass	401
0.15	30	0.01	RMS	25.29	-69.55	-13	Pass	2986
30	814	0.1	RMS	468.3	-59.77	-13	Pass	7841
814	860	0.1	RMS	847.9	19.1	60	Pass	461
860	1000	0.1	RMS	898.8	-59.36	-13	Pass	1401
1000	3000	1	RMS	1695	-45.97	-13	Pass	2001
3000	10000	1	RMS	9897	-36.85	-13	Pass	7001

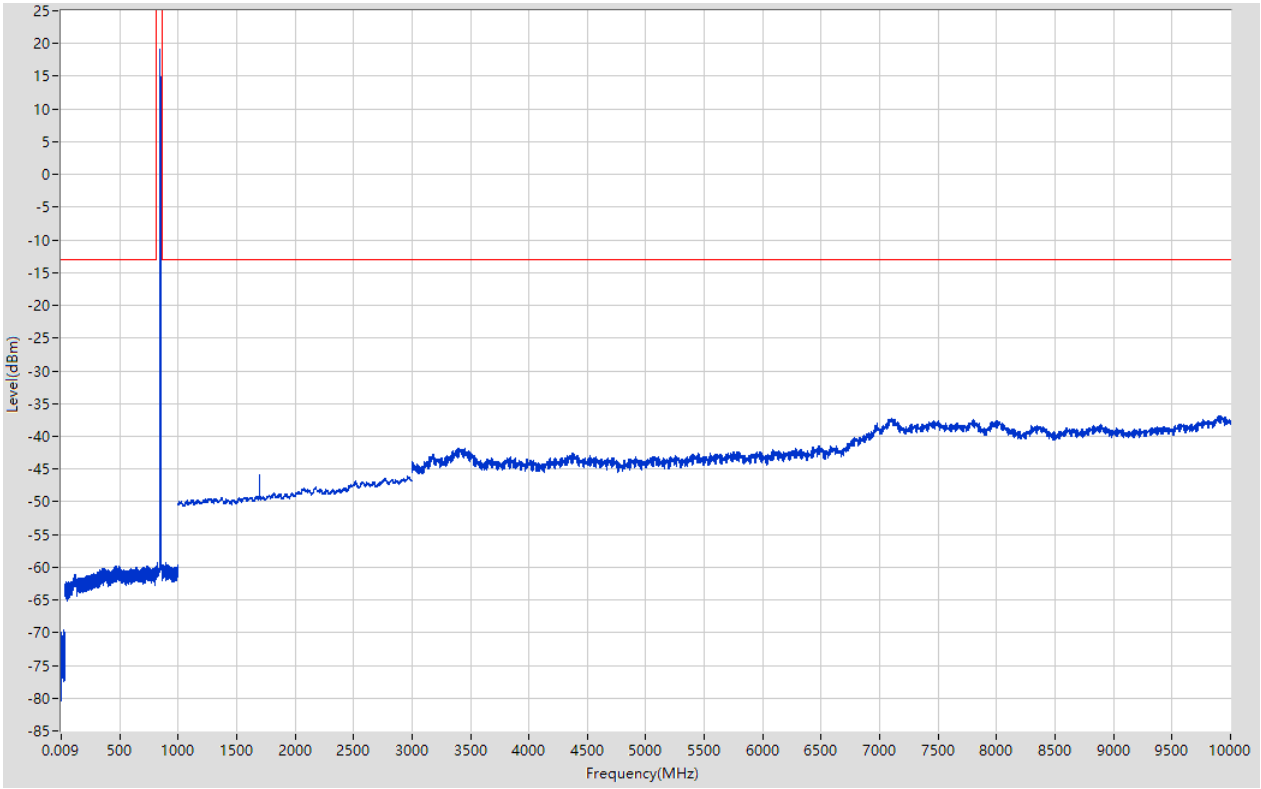

3.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:20643, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.033	-73.67	-13	Pass	401
0.15	30	0.01	RMS	21.37	-69.98	-13	Pass	2986
30	814	0.1	RMS	471.3	-59.71	-13	Pass	7841
814	860	0.1	RMS	847.9	18.23	60	Pass	461
860	1000	0.1	RMS	908.2	-59.56	-13	Pass	1401
1000	3000	1	RMS	2967	-46.05	-13	Pass	2001
3000	10000	1	RMS	9870	-37.06	-13	Pass	7001

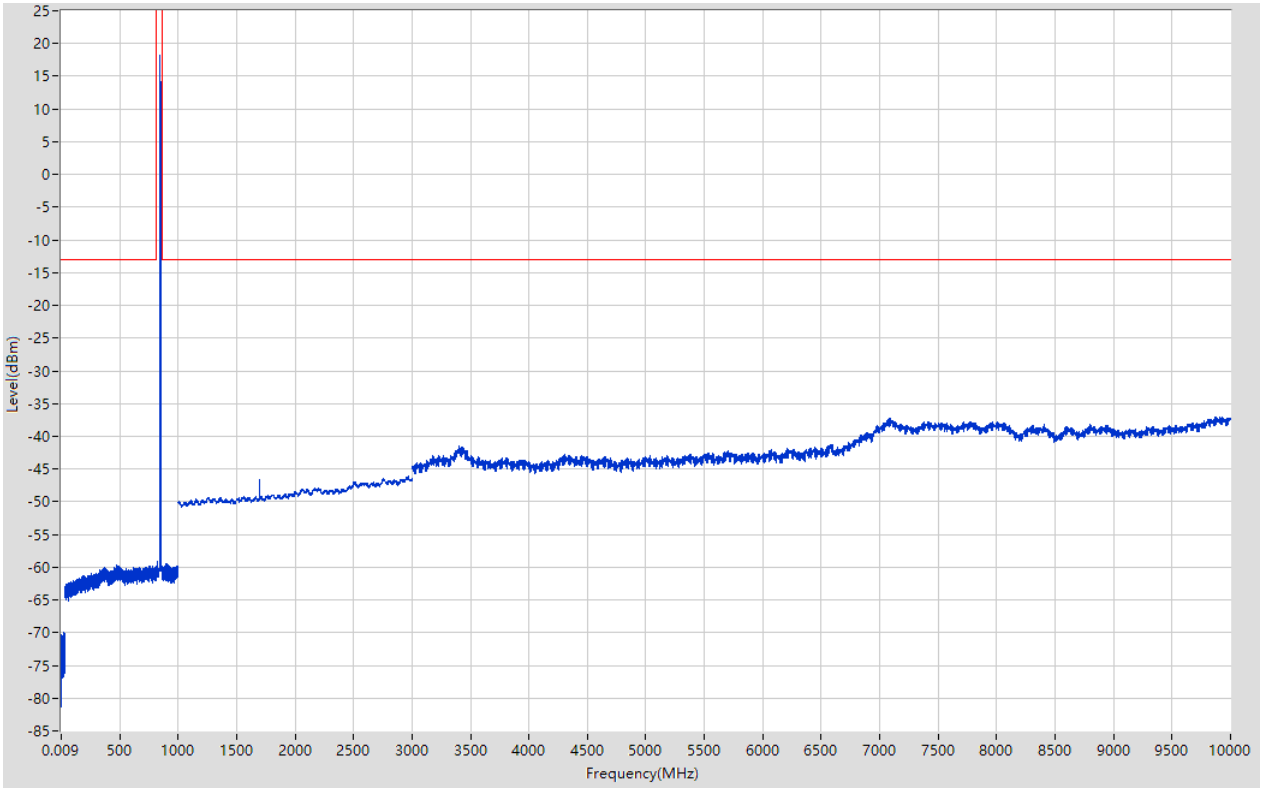

3.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:20415, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.015	-72.98	-13	Pass	401
0.15	30	0.01	RMS	0.25	-69.51	-13	Pass	2986
30	814	0.1	RMS	813.6	-59.71	-13	Pass	7841
814	860	0.1	RMS	824.2	19.75	60	Pass	461
860	1000	0.1	RMS	870	-59.53	-13	Pass	1401
1000	3000	1	RMS	1648	-45.89	-13	Pass	2001
3000	10000	1	RMS	9999	-37.16	-13	Pass	7001

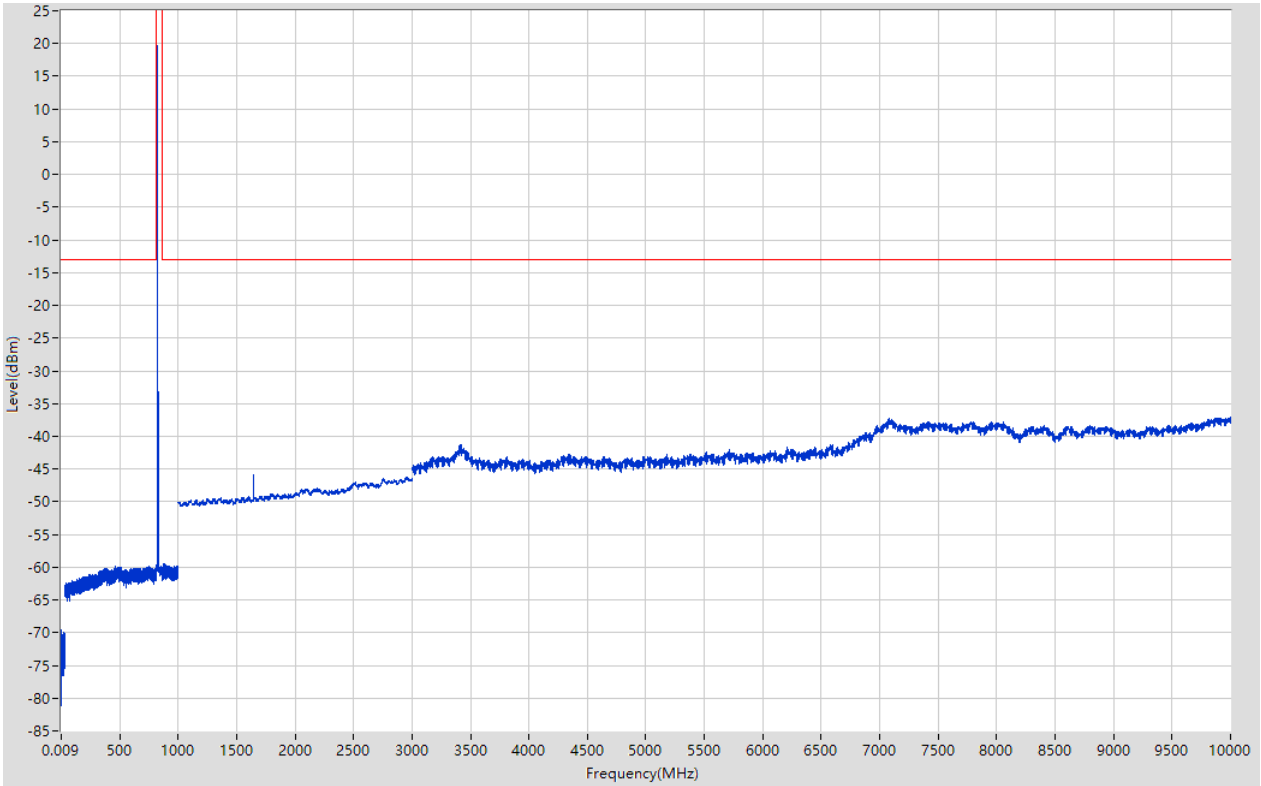

3.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:20415, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-71.51	-13	Pass	401
0.15	30	0.01	RMS	26.64	-69.97	-13	Pass	2986
30	814	0.1	RMS	491.5	-59.43	-13	Pass	7841
814	860	0.1	RMS	824.2	19.01	60	Pass	461
860	1000	0.1	RMS	901.2	-59.5	-13	Pass	1401
1000	3000	1	RMS	2978	-46.2	-13	Pass	2001
3000	10000	1	RMS	9890	-36.95	-13	Pass	7001

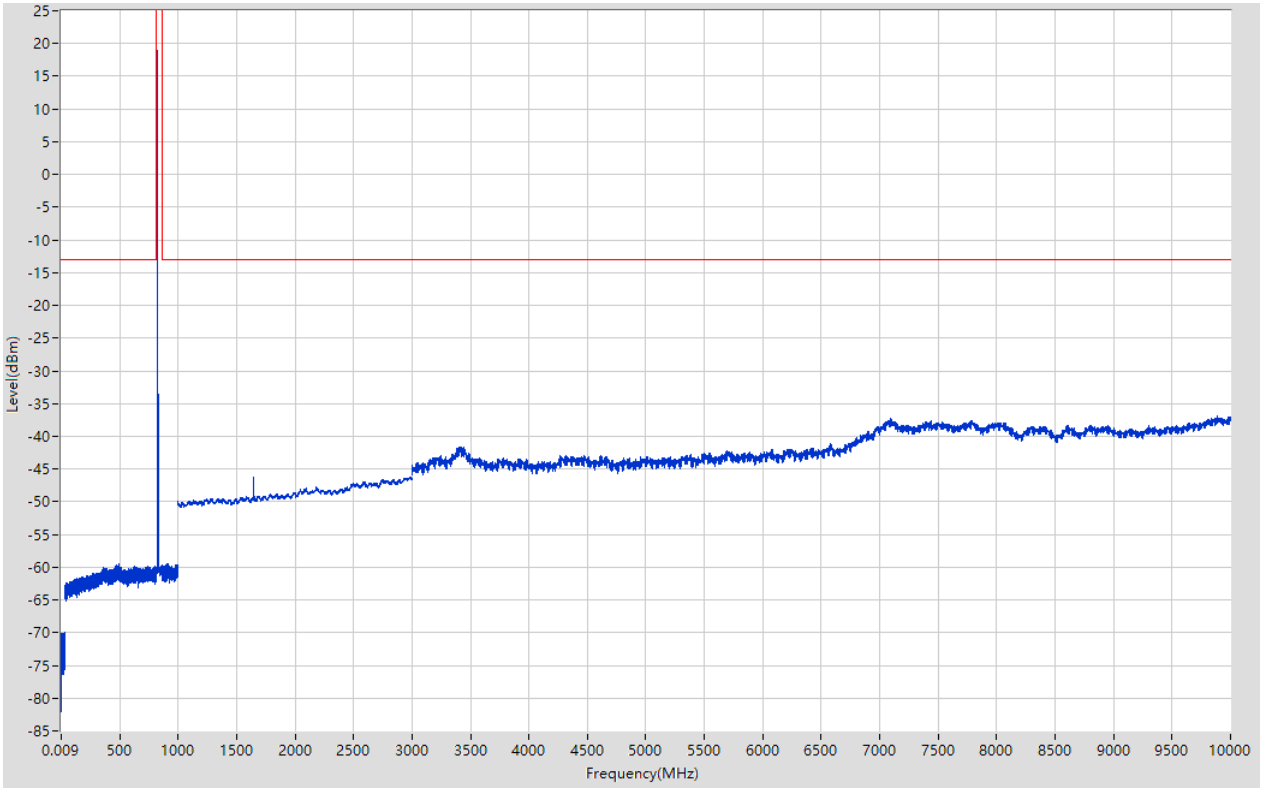

3.9. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:9, Channel:20525, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.11	-13	Pass	401
0.15	30	0.01	RMS	0.15	-68.79	-13	Pass	2986
30	814	0.1	RMS	487.5	-59.63	-13	Pass	7841
814	860	0.1	RMS	835.2	19.56	60	Pass	461
860	1000	0.1	RMS	897.3	-59.27	-13	Pass	1401
1000	3000	1	RMS	1670	-45.67	-13	Pass	2001
3000	10000	1	RMS	9915	-36.93	-13	Pass	7001

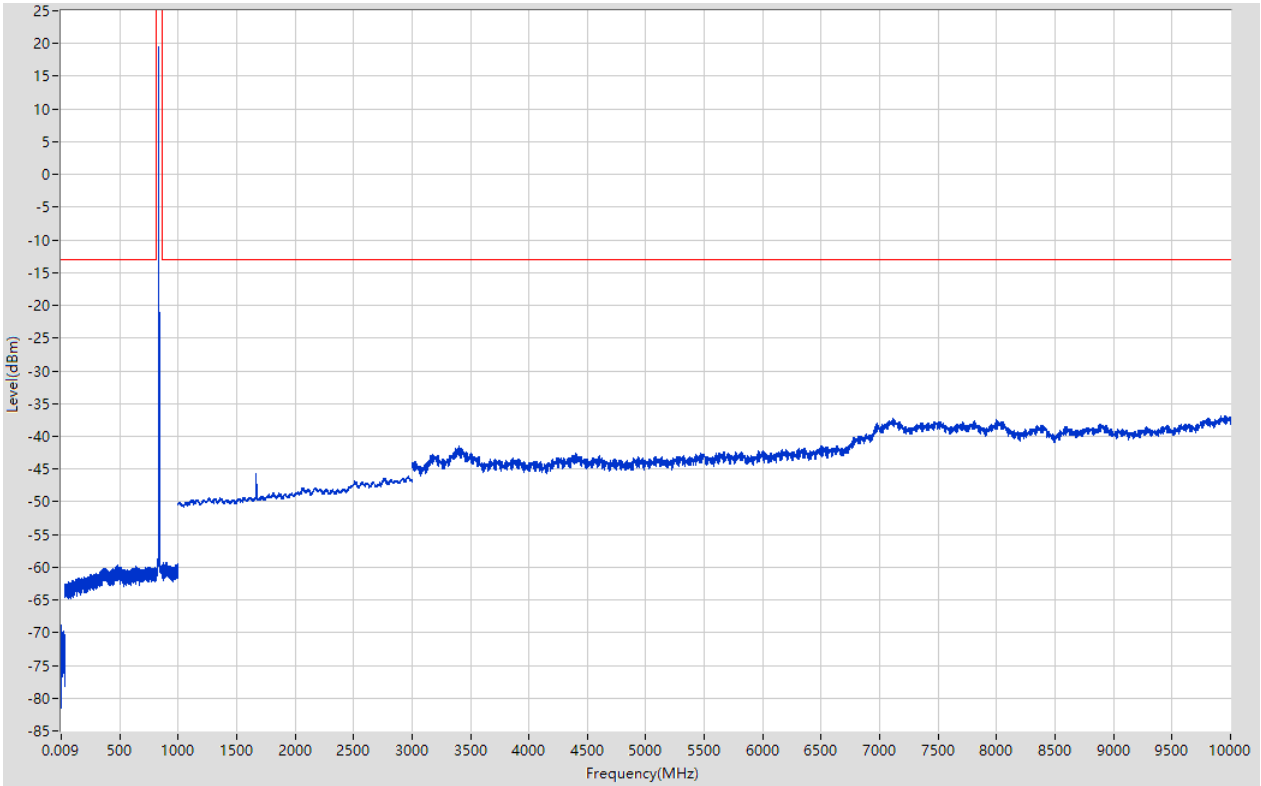

3.10. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:10, Channel:20525, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-72.97	-13	Pass	401
0.15	30	0.01	RMS	7.46	-69.39	-13	Pass	2986
30	814	0.1	RMS	740.6	-59.75	-13	Pass	7841
814	860	0.1	RMS	835.2	18.6	60	Pass	461
860	1000	0.1	RMS	893.7	-59.6	-13	Pass	1401
1000	3000	1	RMS	2966	-46.16	-13	Pass	2001
3000	10000	1	RMS	9909	-36.96	-13	Pass	7001

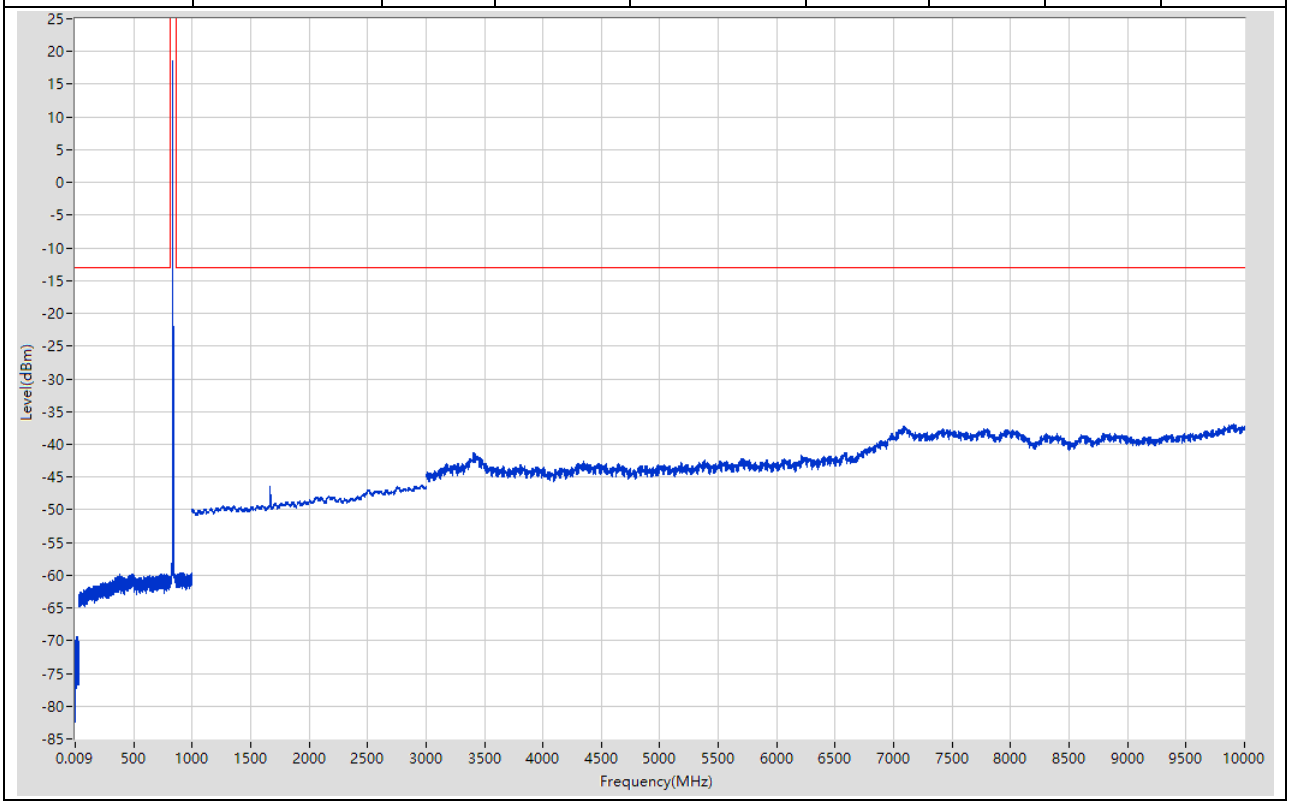

3.11. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:11, Channel:20635, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.17	-13	Pass	401
0.15	30	0.01	RMS	29.4	-69.81	-13	Pass	2986
30	814	0.1	RMS	492.7	-59.45	-13	Pass	7841
814	860	0.1	RMS	846.2	19.29	60	Pass	461
860	1000	0.1	RMS	924.1	-59.29	-13	Pass	1401
1000	3000	1	RMS	1692	-45.76	-13	Pass	2001
3000	10000	1	RMS	9978	-36.95	-13	Pass	7001

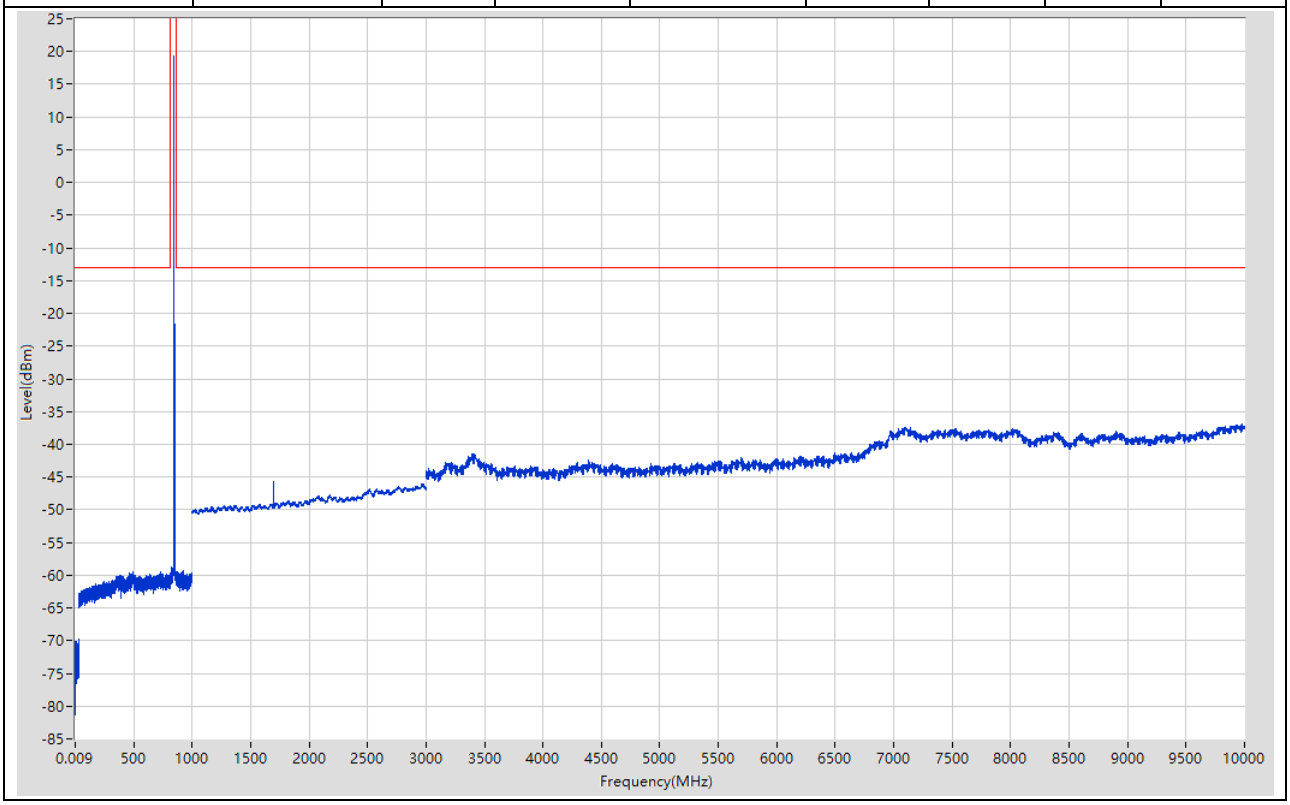

3.12. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:12, Channel:20635, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-71.75	-13	Pass	401
0.15	30	0.01	RMS	9.58	-69.52	-13	Pass	2986
30	814	0.1	RMS	486	-59.73	-13	Pass	7841
814	860	0.1	RMS	846.2	18.35	60	Pass	461
860	1000	0.1	RMS	868.6	-59.58	-13	Pass	1401
1000	3000	1	RMS	2967	-46.14	-13	Pass	2001
3000	10000	1	RMS	9918	-36.85	-13	Pass	7001

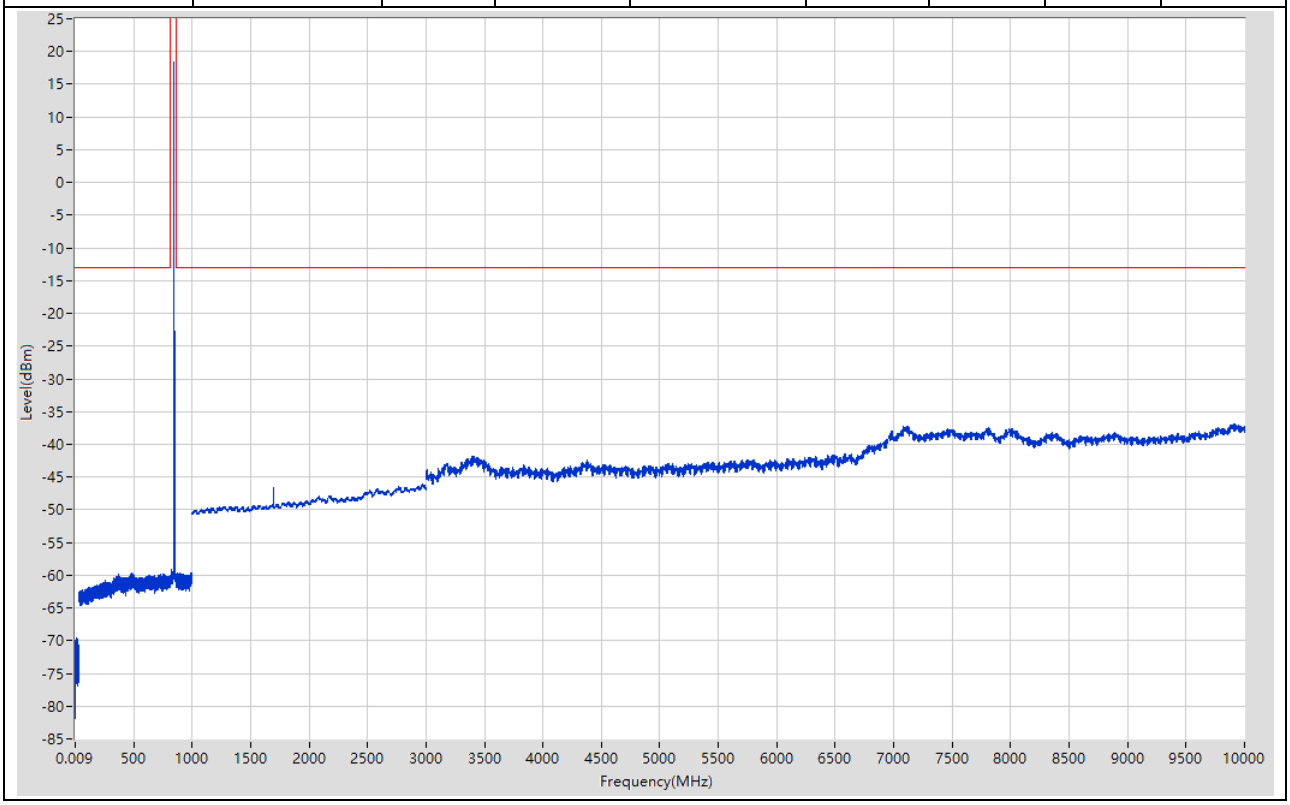

3.13. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:13, Channel:20425, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.078	-73.15	-13	Pass	401
0.15	30	0.01	RMS	0.18	-69.15	-13	Pass	2986
30	814	0.1	RMS	760.2	-58.99	-13	Pass	7841
814	860	0.1	RMS	824.3	19.91	60	Pass	461
860	1000	0.1	RMS	910.8	-58.49	-13	Pass	1401
1000	3000	1	RMS	1648	-45.97	-13	Pass	2001
3000	10000	1	RMS	9919	-36.89	-13	Pass	7001

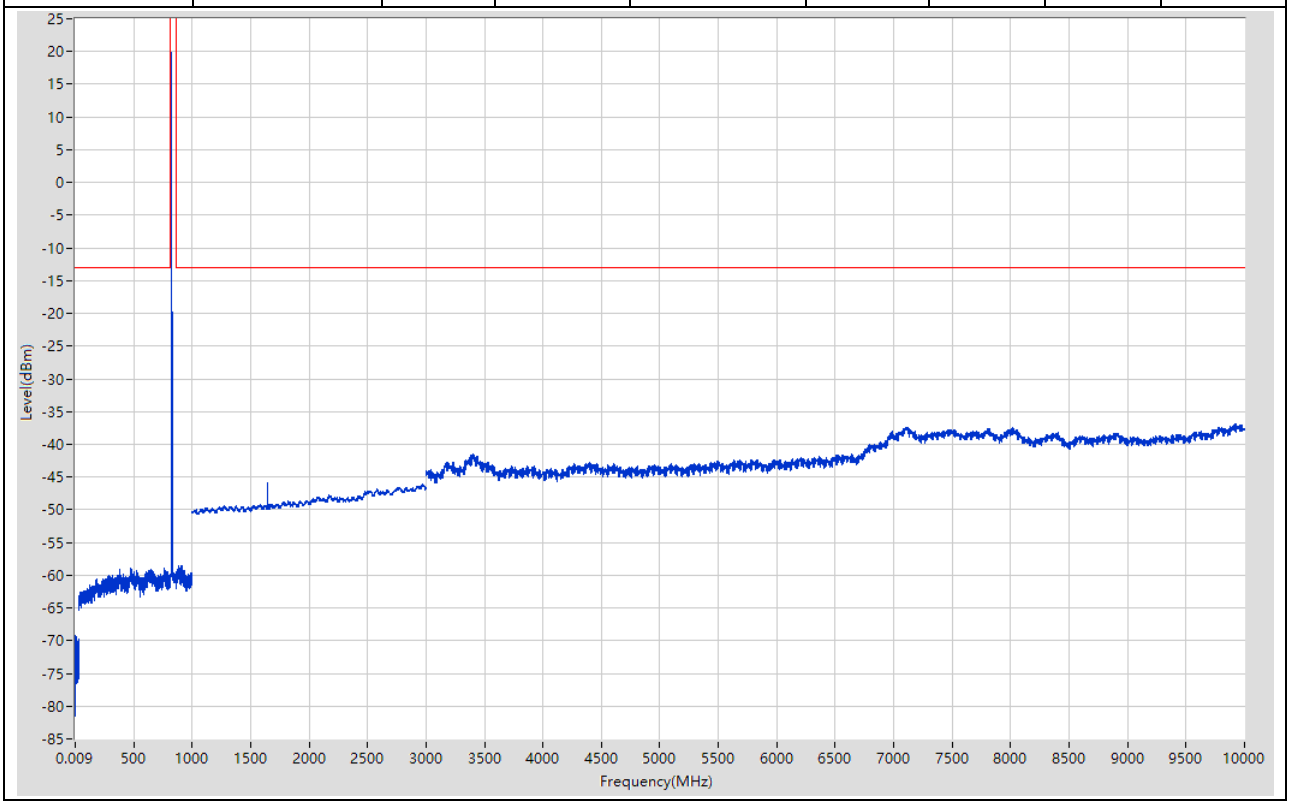

3.14. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:14, Channel:20425, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.17	-13	Pass	401
0.15	30	0.01	RMS	27.56	-69.34	-13	Pass	2986
30	814	0.1	RMS	489.4	-59.59	-13	Pass	7841
814	860	0.1	RMS	824.3	18.94	60	Pass	461
860	1000	0.1	RMS	869.9	-59.57	-13	Pass	1401
1000	3000	1	RMS	2965	-46.2	-13	Pass	2001
3000	10000	1	RMS	9913	-36.82	-13	Pass	7001

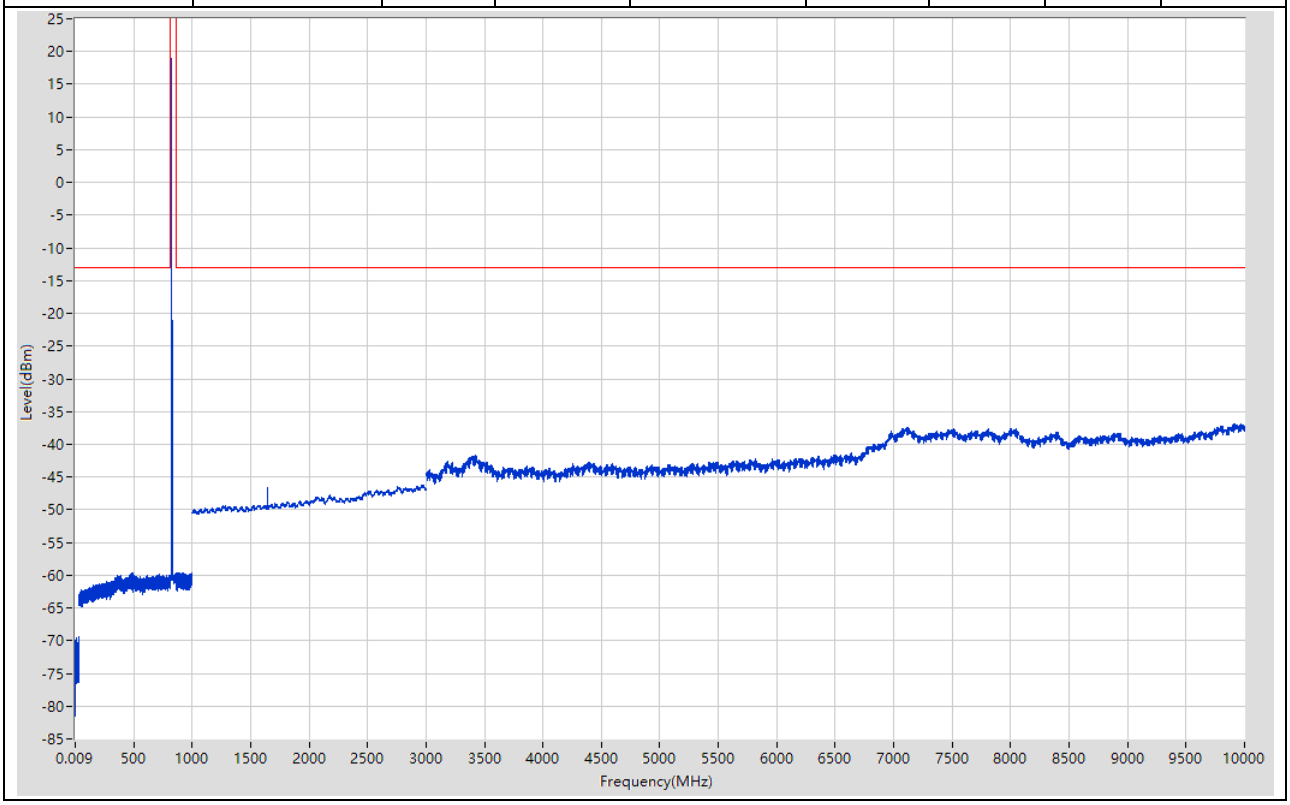

3.15. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:15, Channel:20525, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.52	-13	Pass	401
0.15	30	0.01	RMS	0.35	-69.09	-13	Pass	2986
30	814	0.1	RMS	483.9	-59.75	-13	Pass	7841
814	860	0.1	RMS	834.3	19.51	60	Pass	461
860	1000	0.1	RMS	997.3	-59.53	-13	Pass	1401
1000	3000	1	RMS	1668	-45.9	-13	Pass	2001
3000	10000	1	RMS	9974	-36.94	-13	Pass	7001

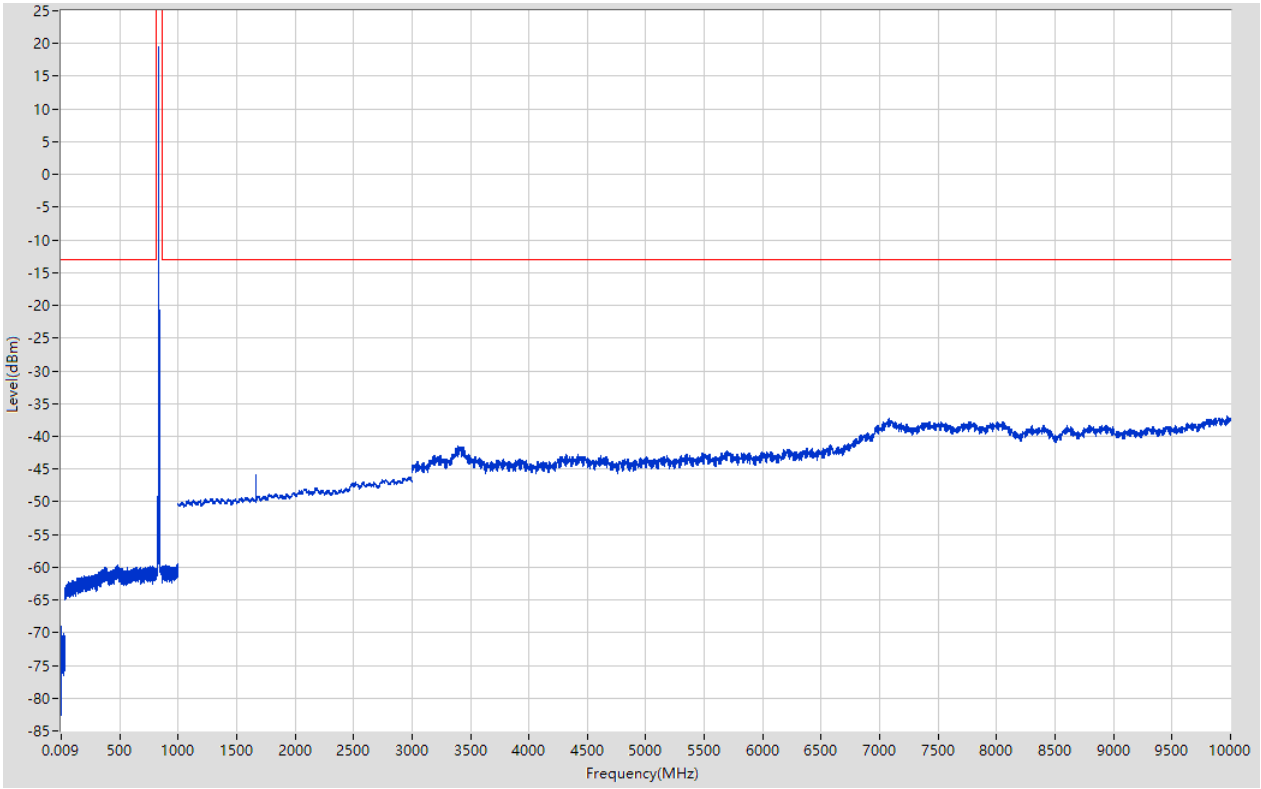

3.16. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:16, Channel:20525, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.057	-73.59	-13	Pass	401
0.15	30	0.01	RMS	0.22	-69.3	-13	Pass	2986
30	814	0.1	RMS	730.9	-59.82	-13	Pass	7841
814	860	0.1	RMS	834.3	18.93	60	Pass	461
860	1000	0.1	RMS	930.5	-59.61	-13	Pass	1401
1000	3000	1	RMS	2957	-46.33	-13	Pass	2001
3000	10000	1	RMS	9982	-36.84	-13	Pass	7001

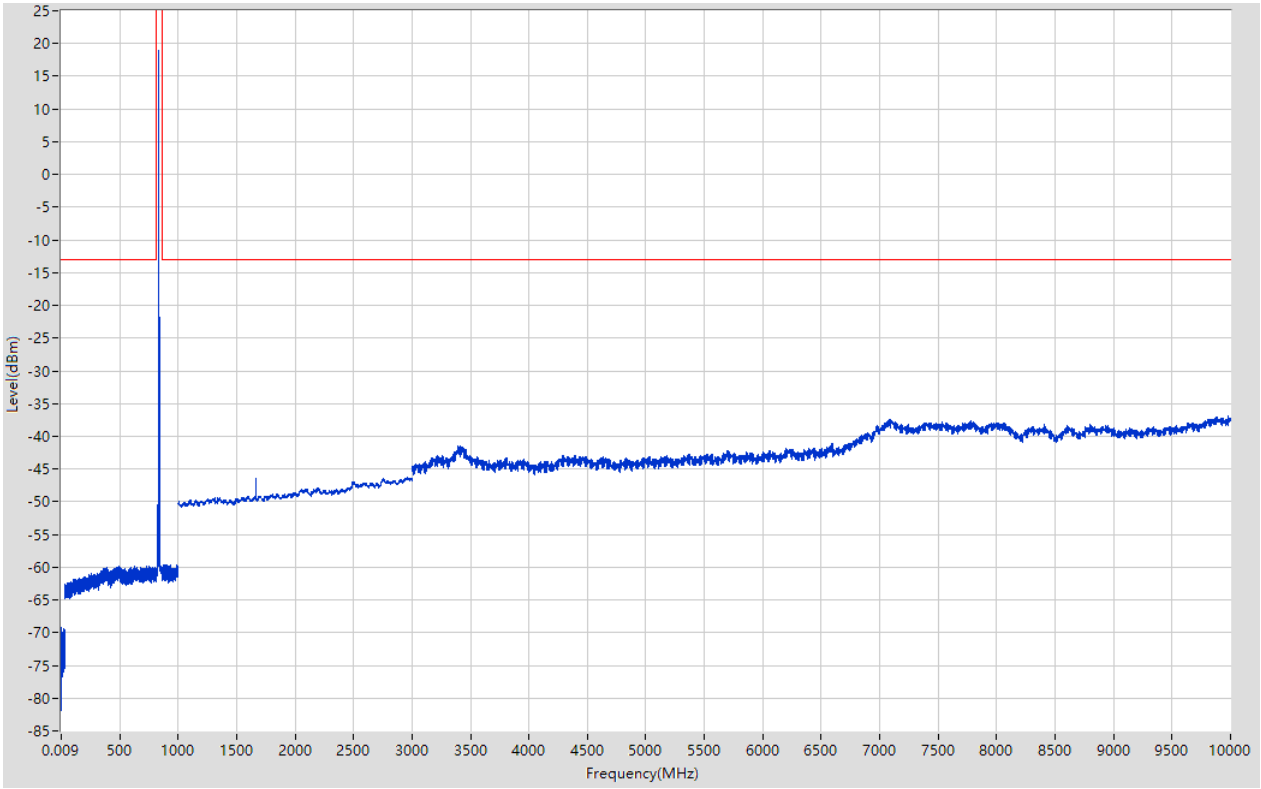

3.17. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:17, Channel:20625, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.94	-13	Pass	401
0.15	30	0.01	RMS	0.23	-69.86	-13	Pass	2986
30	814	0.1	RMS	489.9	-59.67	-13	Pass	7841
814	860	0.1	RMS	844.3	19.51	60	Pass	461
860	1000	0.1	RMS	891.3	-59.51	-13	Pass	1401
1000	3000	1	RMS	1688	-45.6	-13	Pass	2001
3000	10000	1	RMS	9890	-36.96	-13	Pass	7001

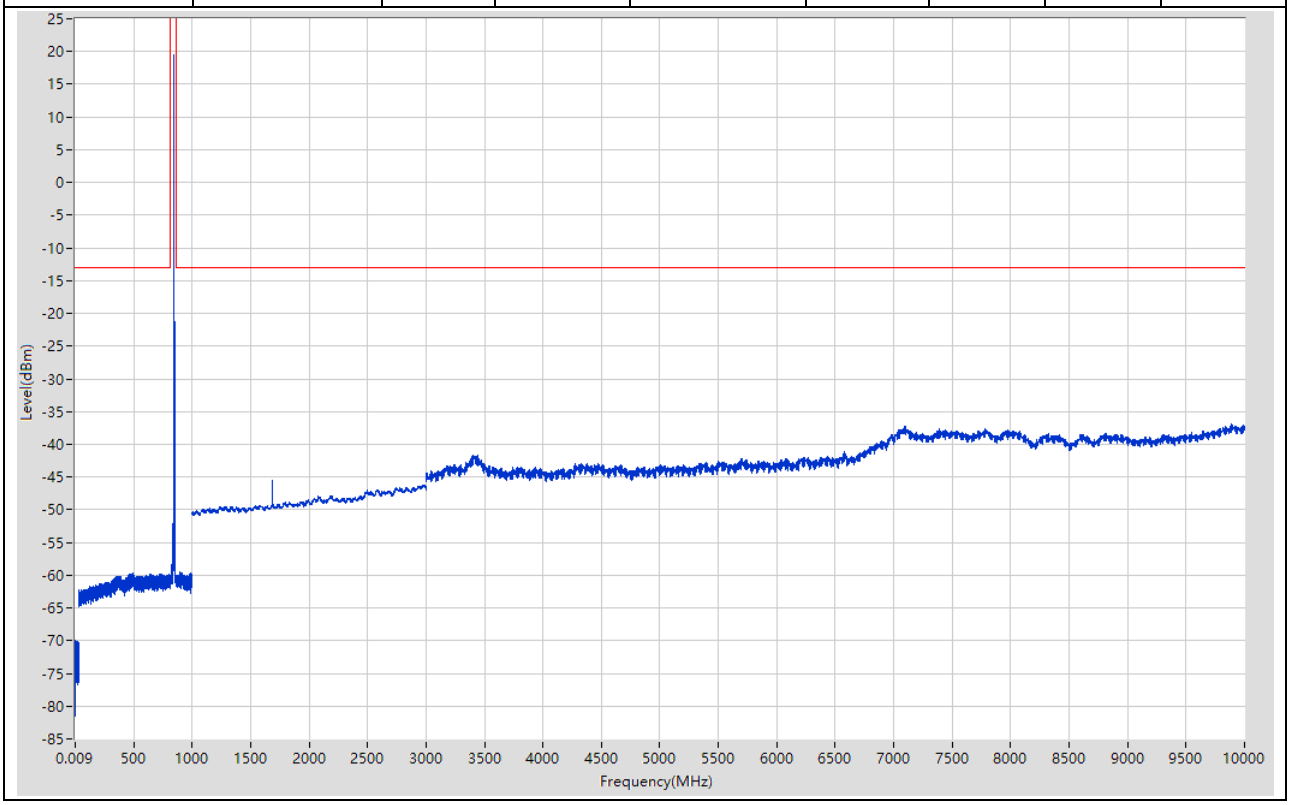

3.18. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:18, Channel:20625, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.049	-73.27	-13	Pass	401
0.15	30	0.01	RMS	0.21	-69.67	-13	Pass	2986
30	814	0.1	RMS	495.2	-59.75	-13	Pass	7841
814	860	0.1	RMS	844.3	18.93	60	Pass	461
860	1000	0.1	RMS	986.5	-59.58	-13	Pass	1401
1000	3000	1	RMS	1688	-46.11	-13	Pass	2001
3000	10000	1	RMS	10000	-36.96	-13	Pass	7001

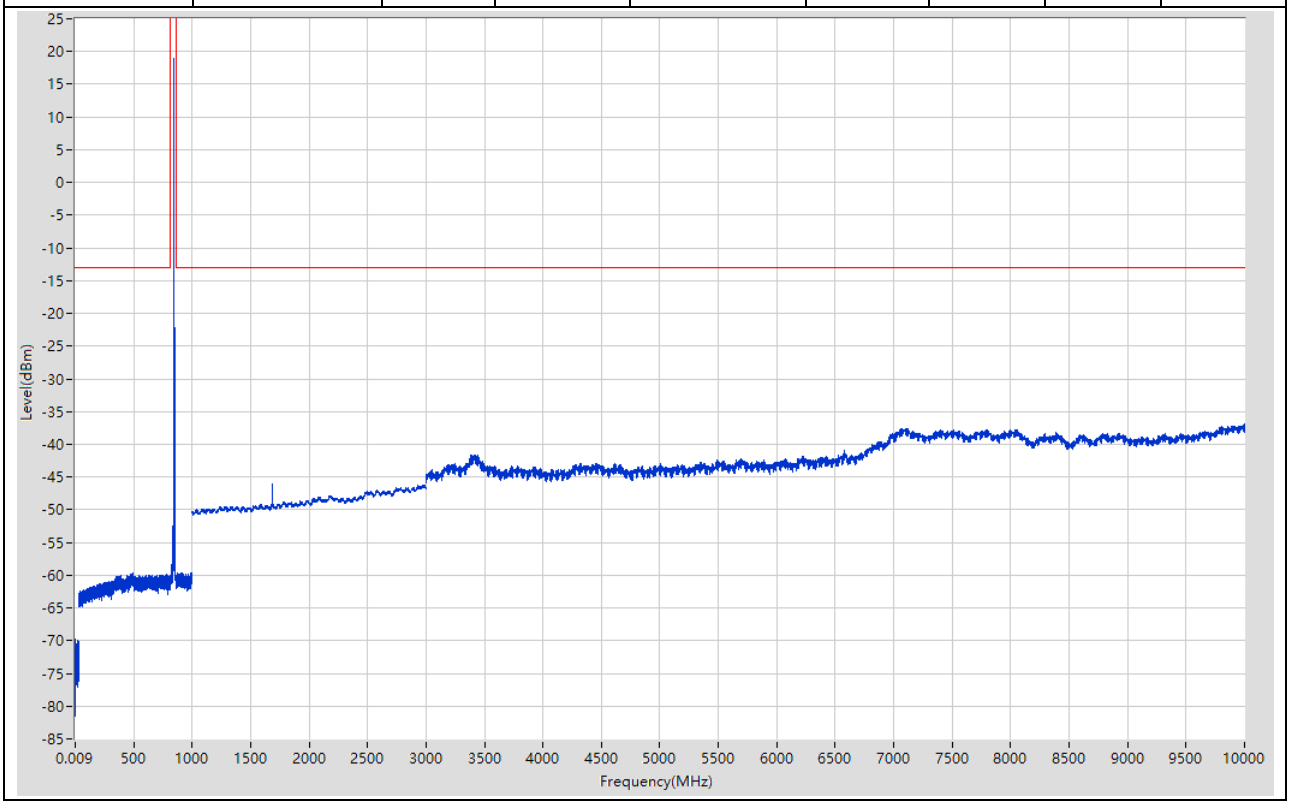

3.19. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:19, Channel:20450, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.08	-13	Pass	401
0.15	30	0.01	RMS	17.36	-69.38	-13	Pass	2986
30	814	0.1	RMS	813.9	-59.66	-13	Pass	7841
814	860	0.1	RMS	824.6	20.3	60	Pass	461
860	1000	0.1	RMS	992.1	-59.59	-13	Pass	1401
1000	3000	1	RMS	1649	-46.16	-13	Pass	2001
3000	10000	1	RMS	9969	-37.1	-13	Pass	7001

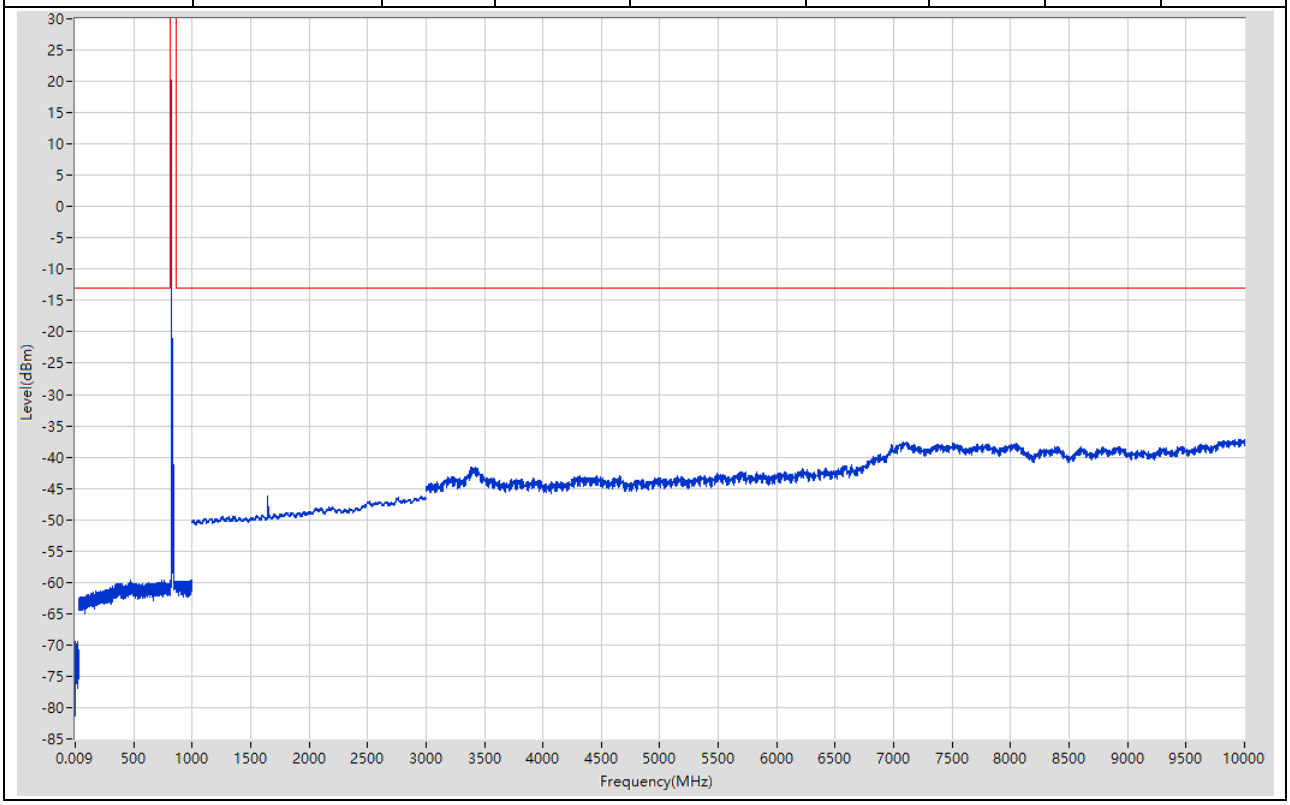

3.20. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:20, Channel:20450, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.58	-13	Pass	401
0.15	30	0.01	RMS	0.18	-69.33	-13	Pass	2986
30	814	0.1	RMS	493.7	-59.84	-13	Pass	7841
814	860	0.1	RMS	824.6	19.45	60	Pass	461
860	1000	0.1	RMS	886.4	-59.61	-13	Pass	1401
1000	3000	1	RMS	2930	-46.29	-13	Pass	2001
3000	10000	1	RMS	9942	-36.96	-13	Pass	7001

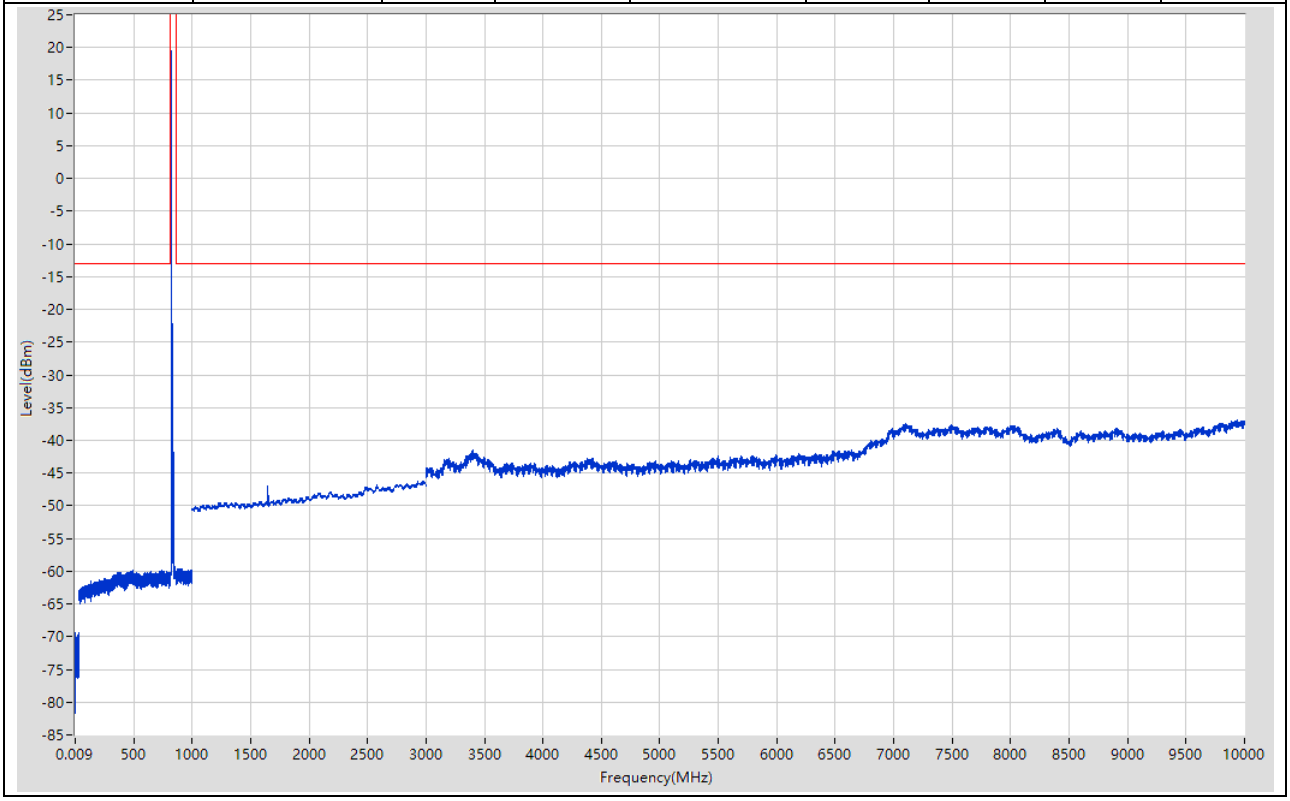

3.21. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:21, Channel:20525, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-71.73	-13	Pass	401
0.15	30	0.01	RMS	2.92	-69.22	-13	Pass	2986
30	814	0.1	RMS	483.1	-59.78	-13	Pass	7841
814	860	0.1	RMS	832.1	20.07	60	Pass	461
860	1000	0.1	RMS	892.3	-59.44	-13	Pass	1401
1000	3000	1	RMS	1664	-46.18	-13	Pass	2001
3000	10000	1	RMS	9922	-36.94	-13	Pass	7001

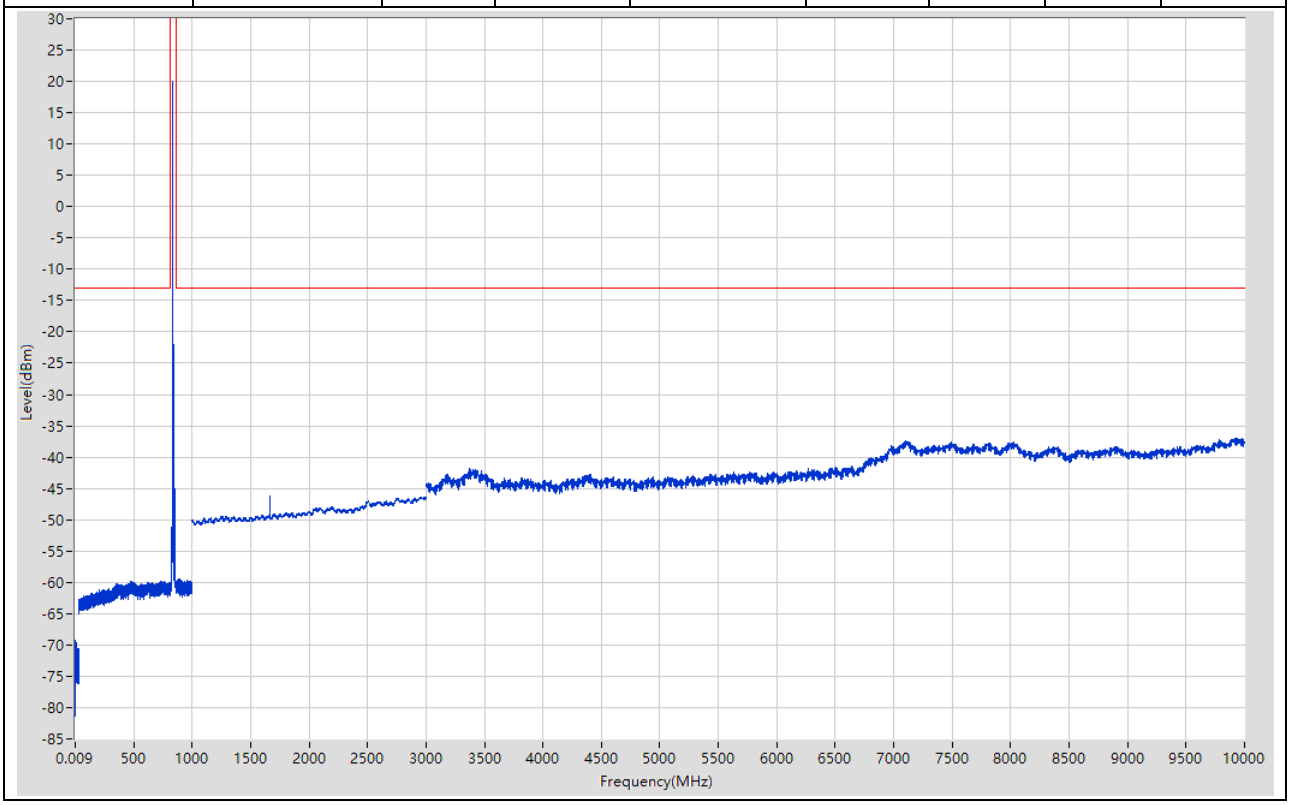

3.22. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:22, Channel:20525, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.066	-73.75	-13	Pass	401
0.15	30	0.01	RMS	0.52	-69.34	-13	Pass	2986
30	814	0.1	RMS	759.5	-59.84	-13	Pass	7841
814	860	0.1	RMS	832.1	19.42	60	Pass	461
860	1000	0.1	RMS	911.2	-59.55	-13	Pass	1401
1000	3000	1	RMS	2970	-46.15	-13	Pass	2001
3000	10000	1	RMS	9934	-36.97	-13	Pass	7001

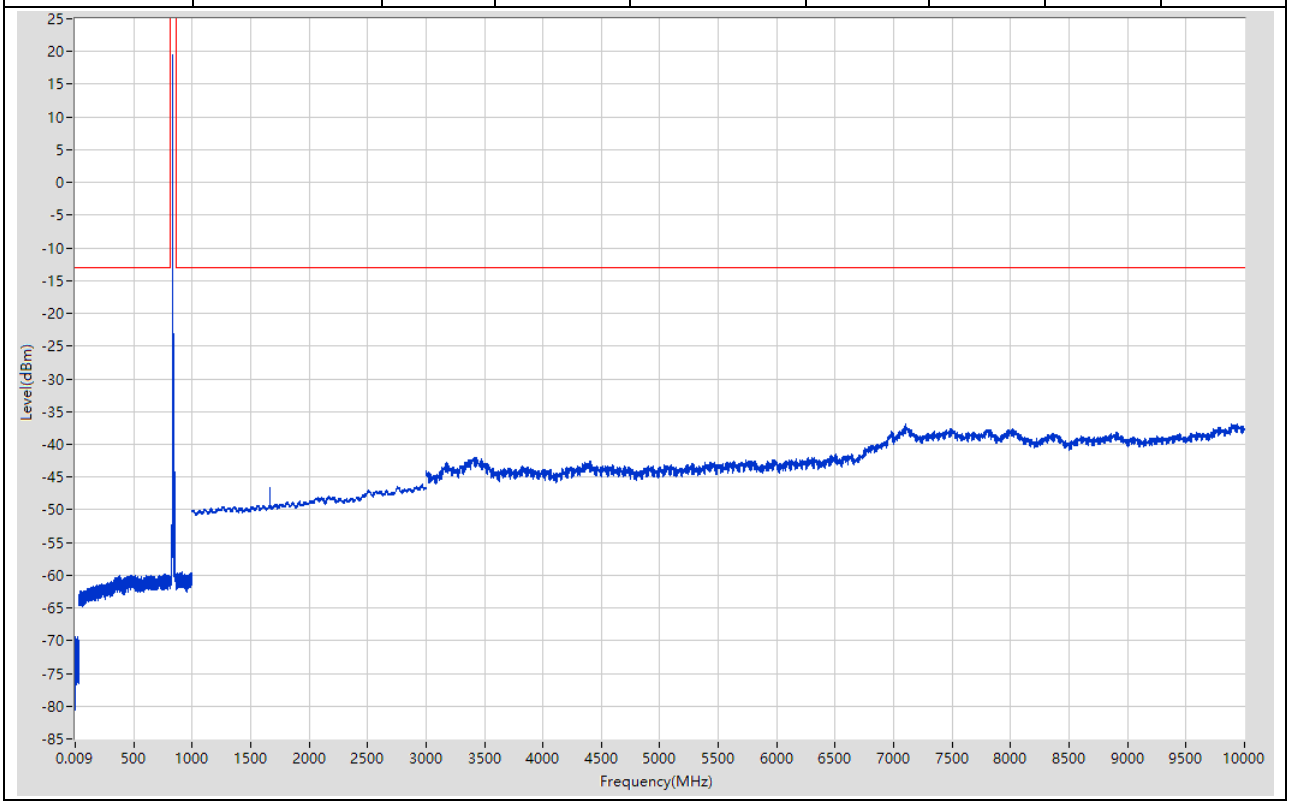

3.23. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:23, Channel:20600, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.098	-73.82	-13	Pass	401
0.15	30	0.01	RMS	0.16	-69.43	-13	Pass	2986
30	814	0.1	RMS	635.7	-59.91	-13	Pass	7841
814	860	0.1	RMS	839.6	20.17	60	Pass	461
860	1000	0.1	RMS	987.7	-59.69	-13	Pass	1401
1000	3000	1	RMS	1679	-45.93	-13	Pass	2001
3000	10000	1	RMS	9917	-36.94	-13	Pass	7001

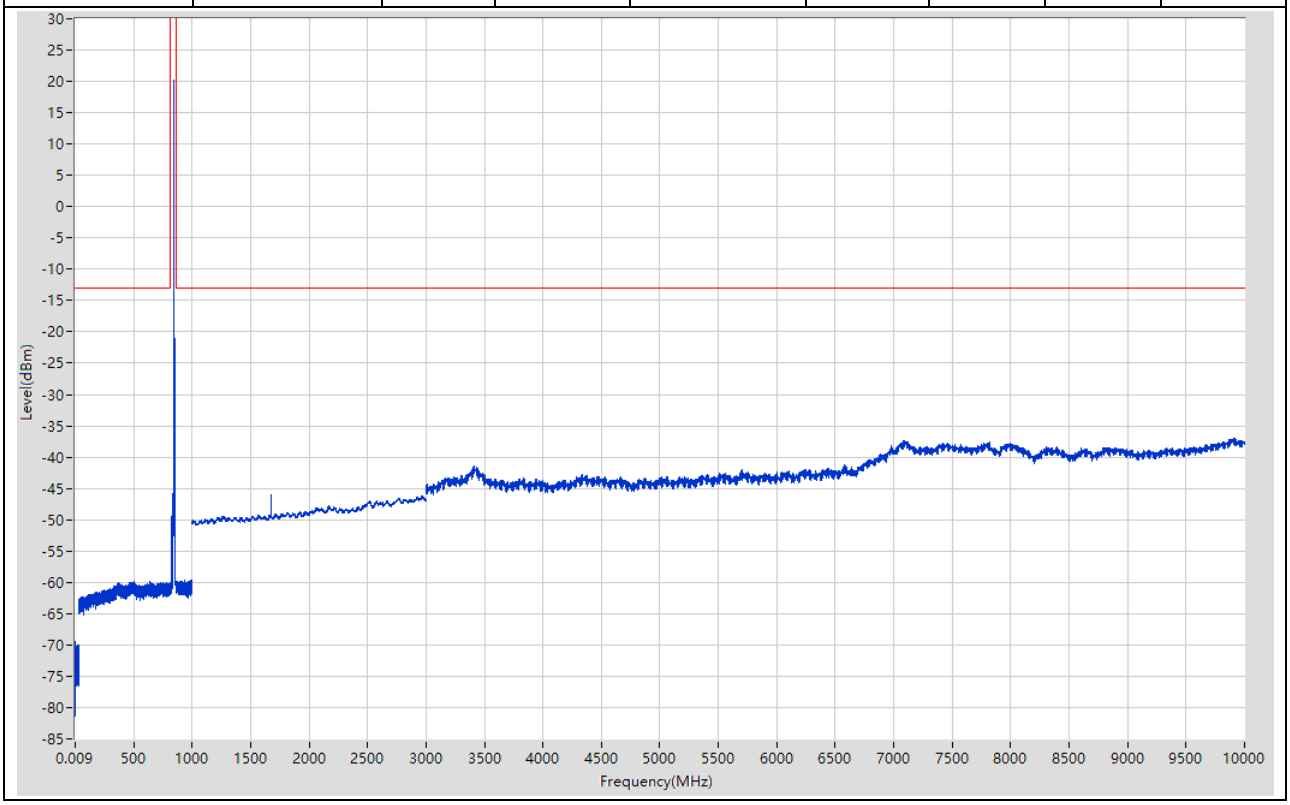

3.24. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:24, Channel:20600, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.071	-73.71	-13	Pass	401
0.15	30	0.01	RMS	0.26	-68.98	-13	Pass	2986
30	814	0.1	RMS	724.4	-59.91	-13	Pass	7841
814	860	0.1	RMS	839.6	19.29	60	Pass	461
860	1000	0.1	RMS	991.2	-59.54	-13	Pass	1401
1000	3000	1	RMS	2967	-46.14	-13	Pass	2001
3000	10000	1	RMS	9899	-36.95	-13	Pass	7001

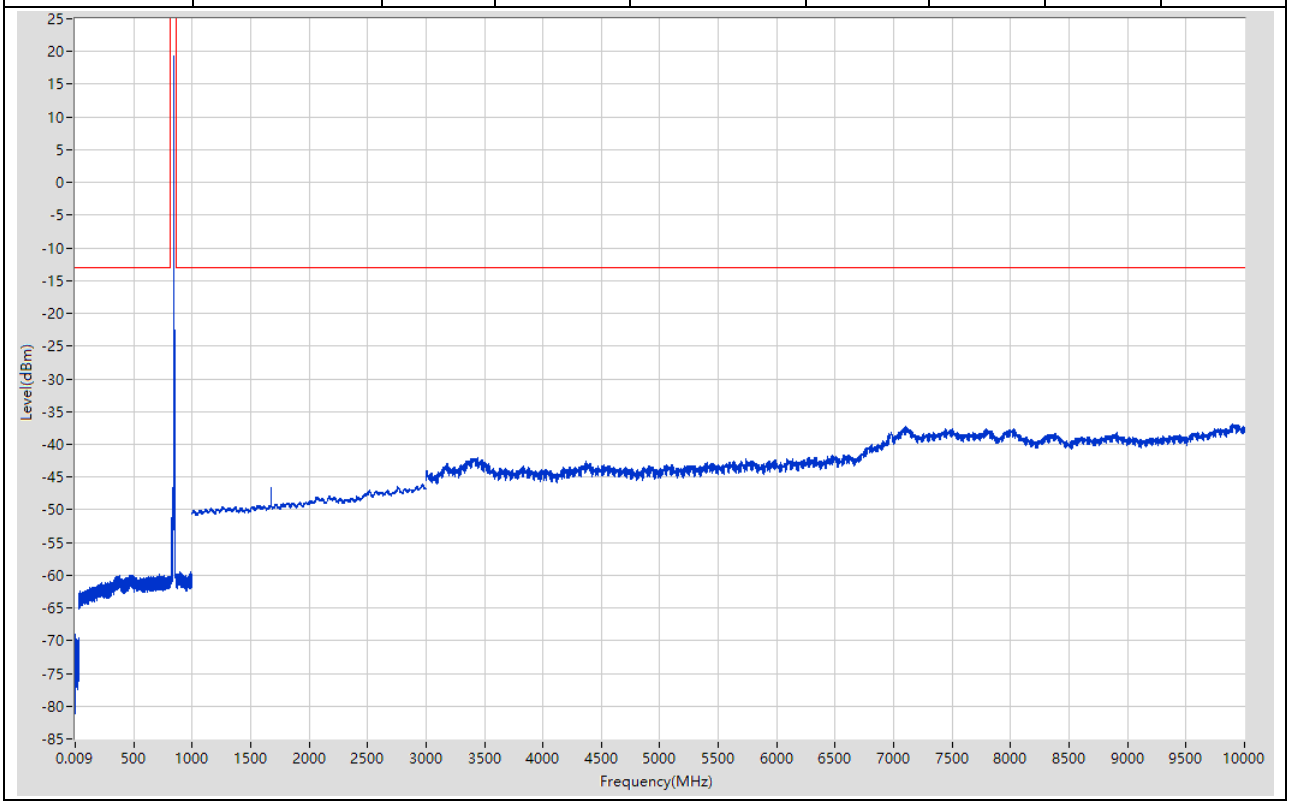

4. LTE_Band12

4.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:23017, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.044	-73.43	-13	Pass	401
0.15	30	0.01	RMS	3.51	-69	-13	Pass	2986
30	689	0.1	RMS	489.3	-59.63	-13	Pass	6591
689	726	0.1	RMS	699.268	19.93	60	Pass	401
726	1000	0.1	RMS	891.6	-58.75	-13	Pass	2741
1000	3000	1	RMS	1398	-43.56	-13	Pass	2001
3000	10000	1	RMS	9974	-36.88	-13	Pass	7001

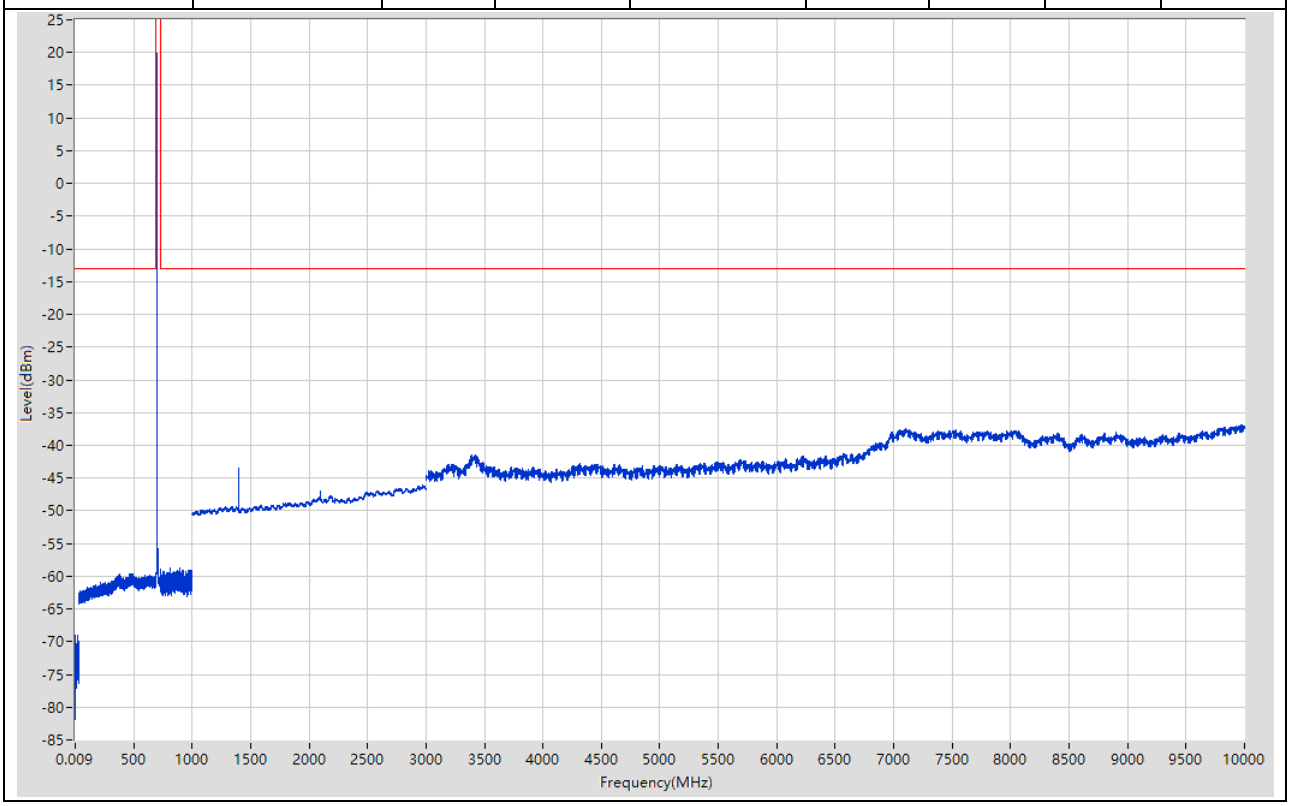

4.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:23017, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.79	-13	Pass	401
0.15	30	0.01	RMS	20.87	-69.83	-13	Pass	2986
30	689	0.1	RMS	486.3	-59.41	-13	Pass	6591
689	726	0.1	RMS	699.268	18.96	60	Pass	401
726	1000	0.1	RMS	915	-58.76	-13	Pass	2741
1000	3000	1	RMS	1398	-44.46	-13	Pass	2001
3000	10000	1	RMS	9999	-36.85	-13	Pass	7001

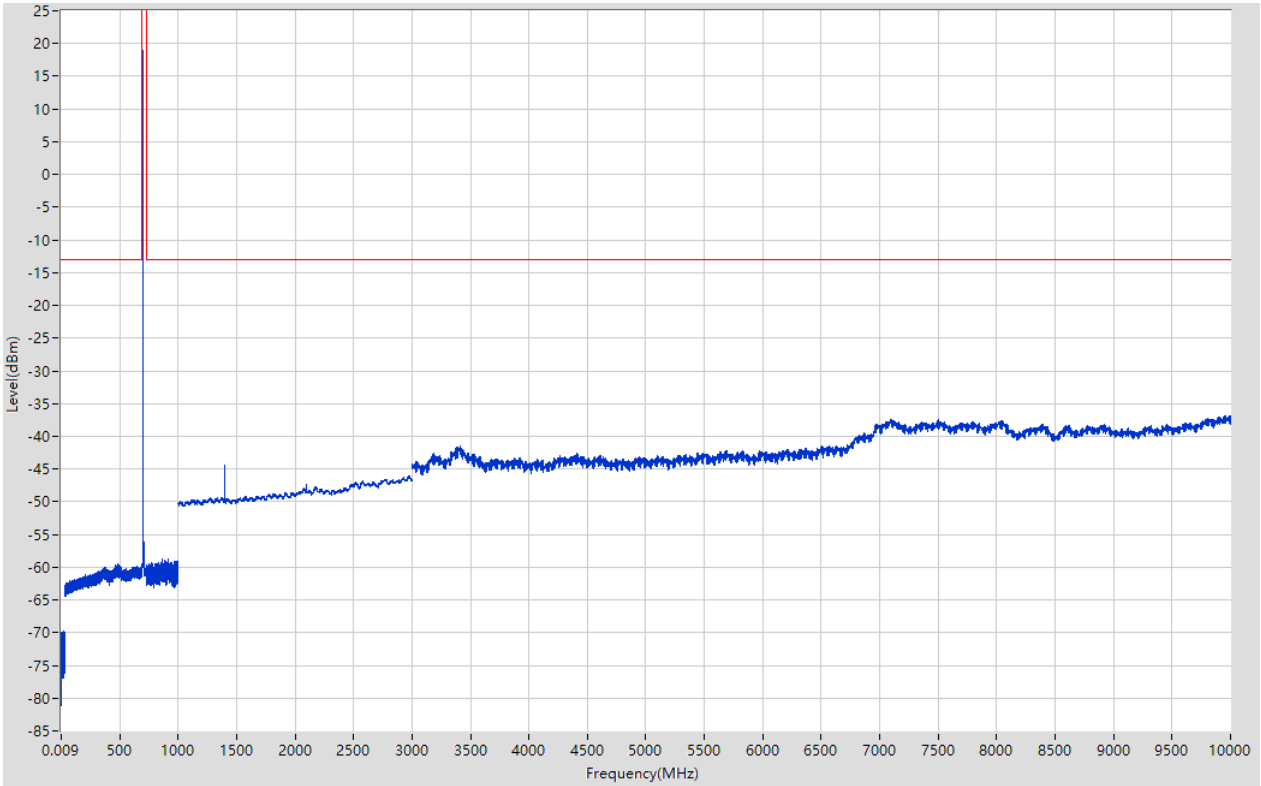

4.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:23095, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.05	-13	Pass	401
0.15	30	0.01	RMS	20.46	-69.19	-13	Pass	2986
30	689	0.1	RMS	484	-59.67	-13	Pass	6591
689	726	0.1	RMS	707.038	19.96	60	Pass	401
726	1000	0.1	RMS	991	-59.01	-13	Pass	2741
1000	3000	1	RMS	2970	-46.17	-13	Pass	2001
3000	10000	1	RMS	9974	-36.92	-13	Pass	7001

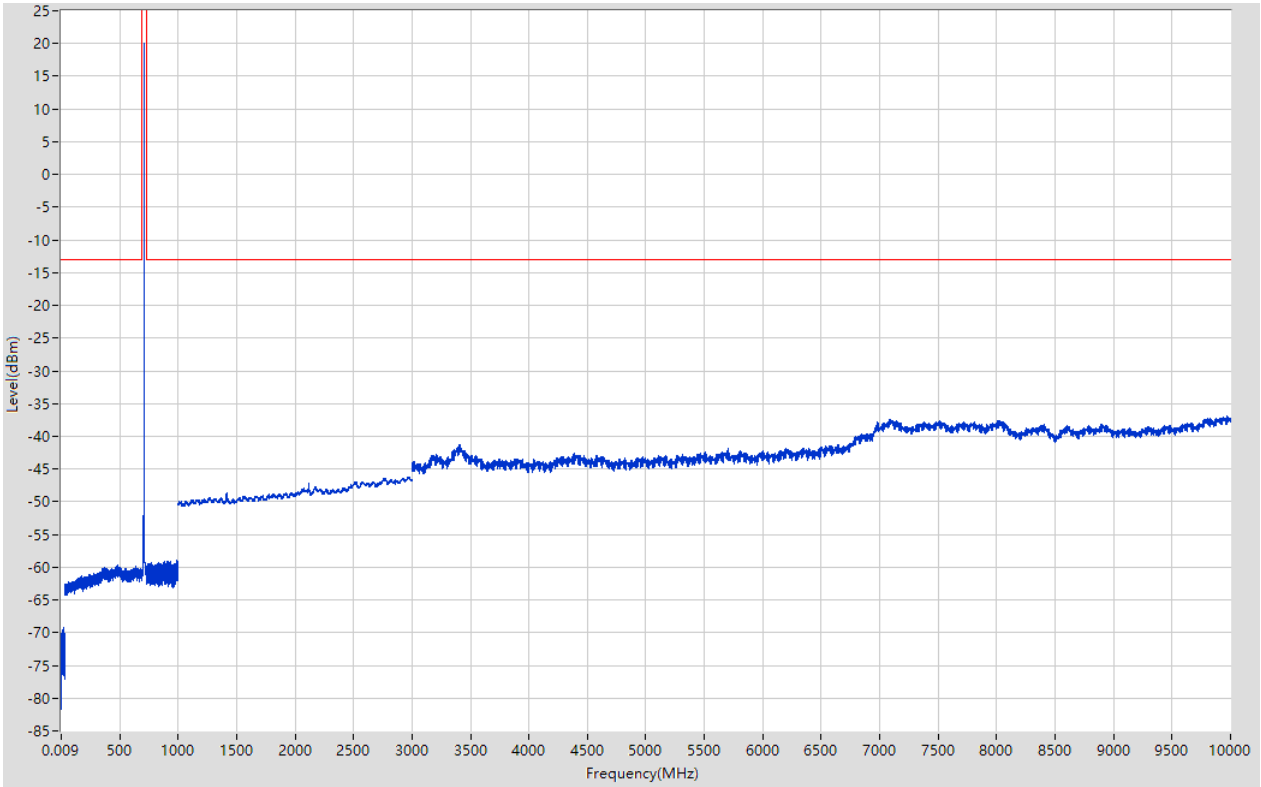

4.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:23095, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.13	-13	Pass	401
0.15	30	0.01	RMS	0.19	-69.11	-13	Pass	2986
30	689	0.1	RMS	477.4	-59.78	-13	Pass	6591
689	726	0.1	RMS	707.038	18.78	60	Pass	401
726	1000	0.1	RMS	901.7	-58.92	-13	Pass	2741
1000	3000	1	RMS	2962	-46.19	-13	Pass	2001
3000	10000	1	RMS	9986	-37.02	-13	Pass	7001

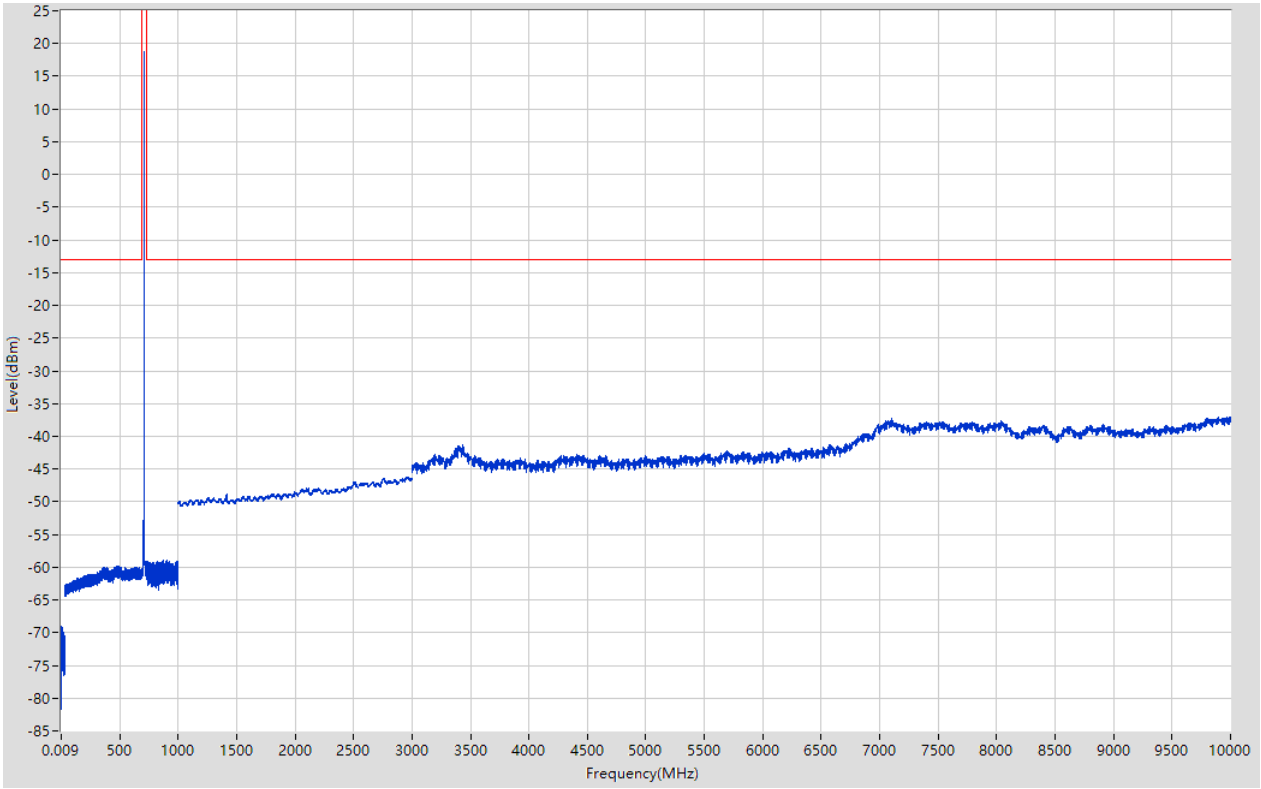

4.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:23173, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73	-13	Pass	401
0.15	30	0.01	RMS	17.36	-68.92	-13	Pass	2986
30	689	0.1	RMS	488.6	-59.71	-13	Pass	6591
689	726	0.1	RMS	714.808	19.36	60	Pass	401
726	1000	0.1	RMS	867.1	-58.89	-13	Pass	2741
1000	3000	1	RMS	1429	-45.85	-13	Pass	2001
3000	10000	1	RMS	9998	-36.72	-13	Pass	7001

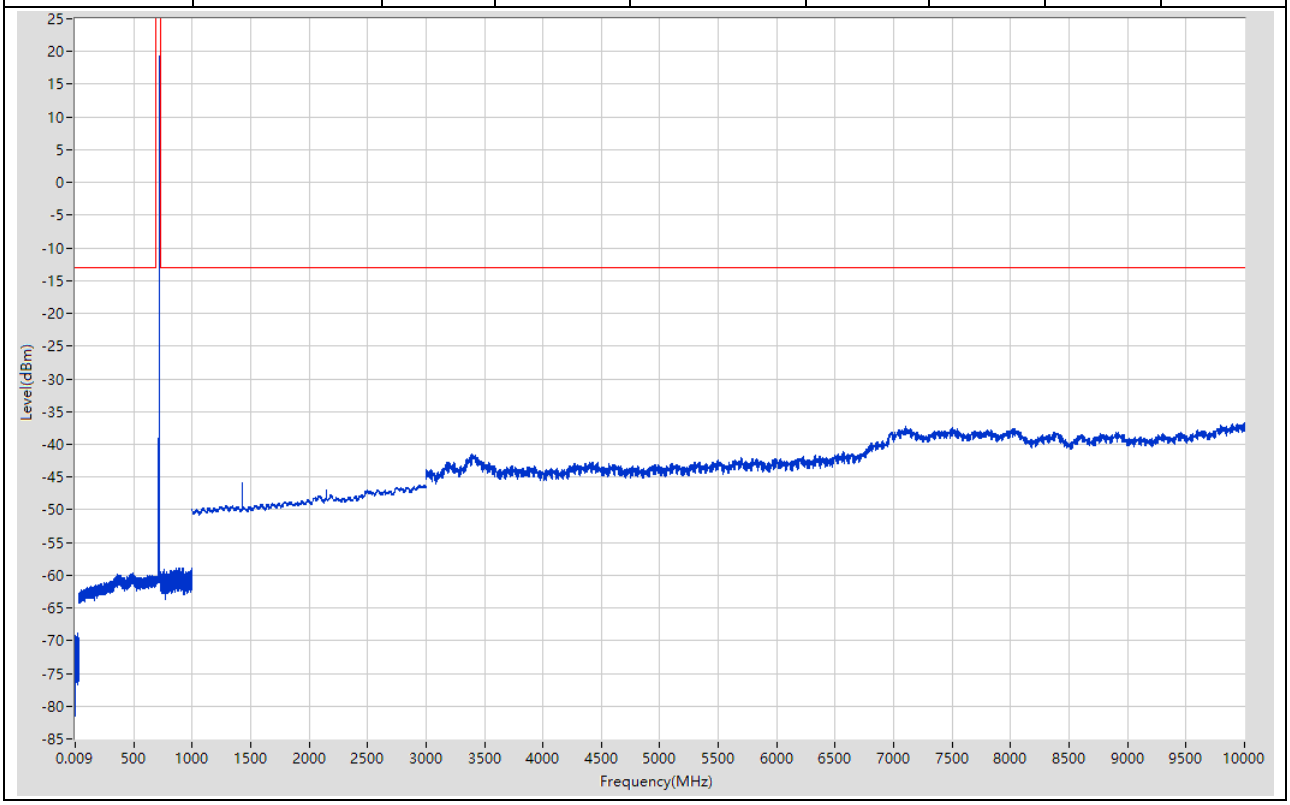

4.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:23173, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.033	-74.22	-13	Pass	401
0.15	30	0.01	RMS	29.05	-69.58	-13	Pass	2986
30	689	0.1	RMS	490.8	-59.56	-13	Pass	6591
689	726	0.1	RMS	714.808	18.37	60	Pass	401
726	1000	0.1	RMS	985.7	-58.89	-13	Pass	2741
1000	3000	1	RMS	2965	-46.05	-13	Pass	2001
3000	10000	1	RMS	9897	-36.84	-13	Pass	7001

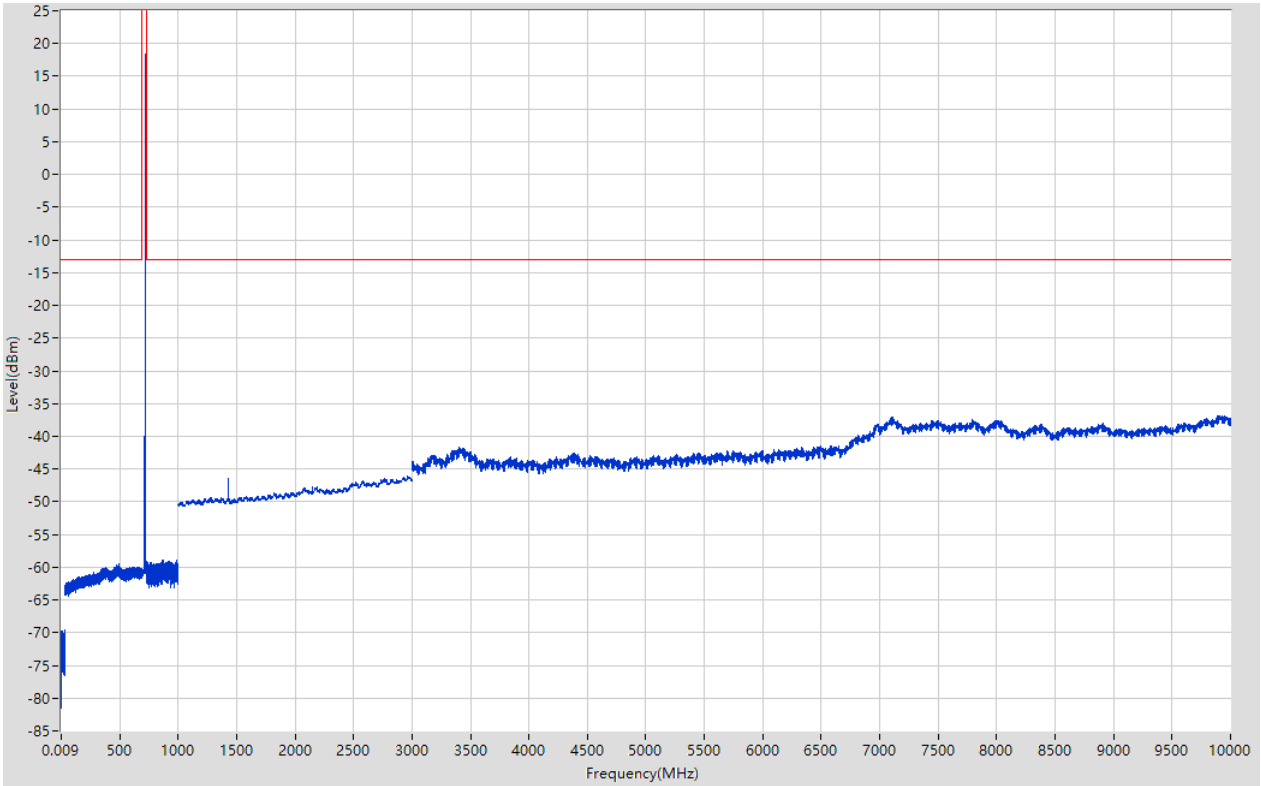

4.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:23025, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.02	-13	Pass	401
0.15	30	0.01	RMS	14.84	-69.46	-13	Pass	2986
30	689	0.1	RMS	484.4	-59.57	-13	Pass	6591
689	726	0.1	RMS	699.268	19.76	60	Pass	401
726	1000	0.1	RMS	882	-59.02	-13	Pass	2741
1000	3000	1	RMS	1398	-43.62	-13	Pass	2001
3000	10000	1	RMS	9999	-36.79	-13	Pass	7001

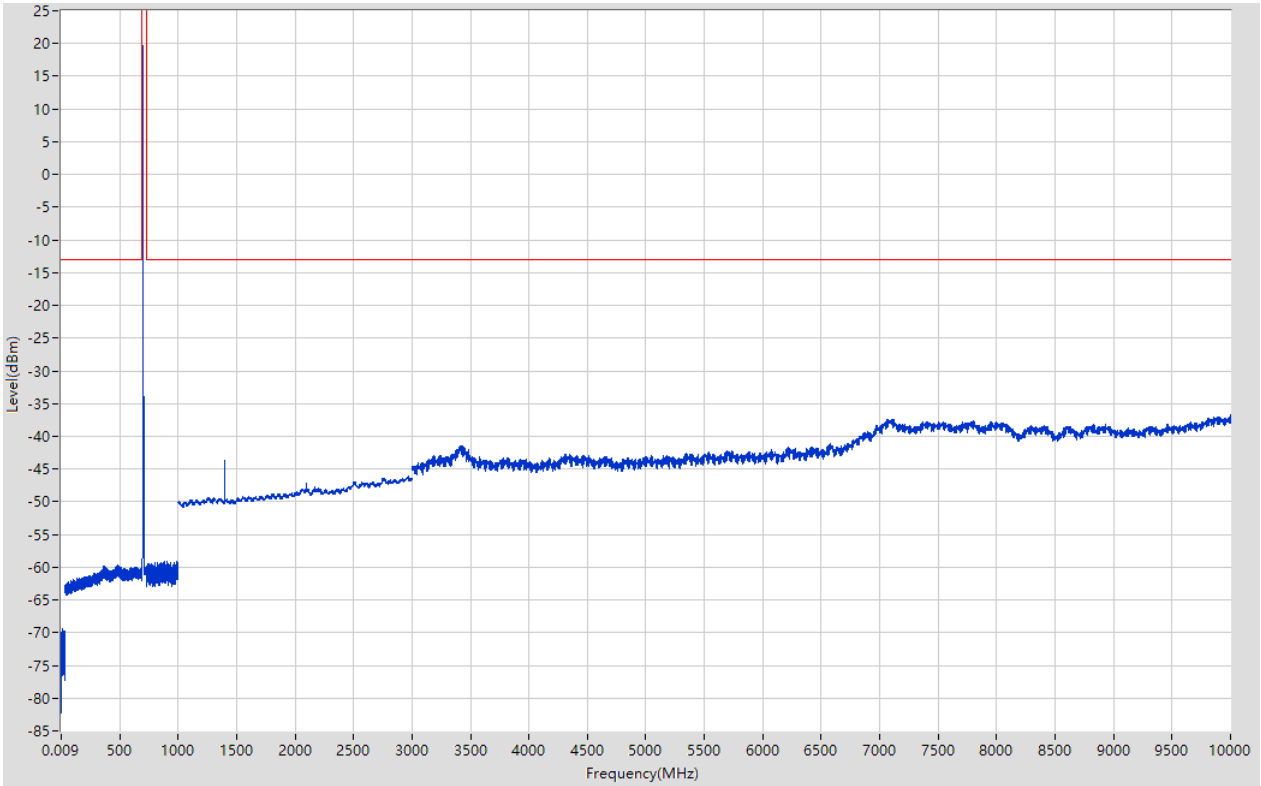

4.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:23025, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-74.04	-13	Pass	401
0.15	30	0.01	RMS	28.79	-69.3	-13	Pass	2986
30	689	0.1	RMS	481	-59.52	-13	Pass	6591
689	726	0.1	RMS	699.268	18.69	60	Pass	401
726	1000	0.1	RMS	998	-58.87	-13	Pass	2741
1000	3000	1	RMS	1398	-44.63	-13	Pass	2001
3000	10000	1	RMS	9975	-36.93	-13	Pass	7001

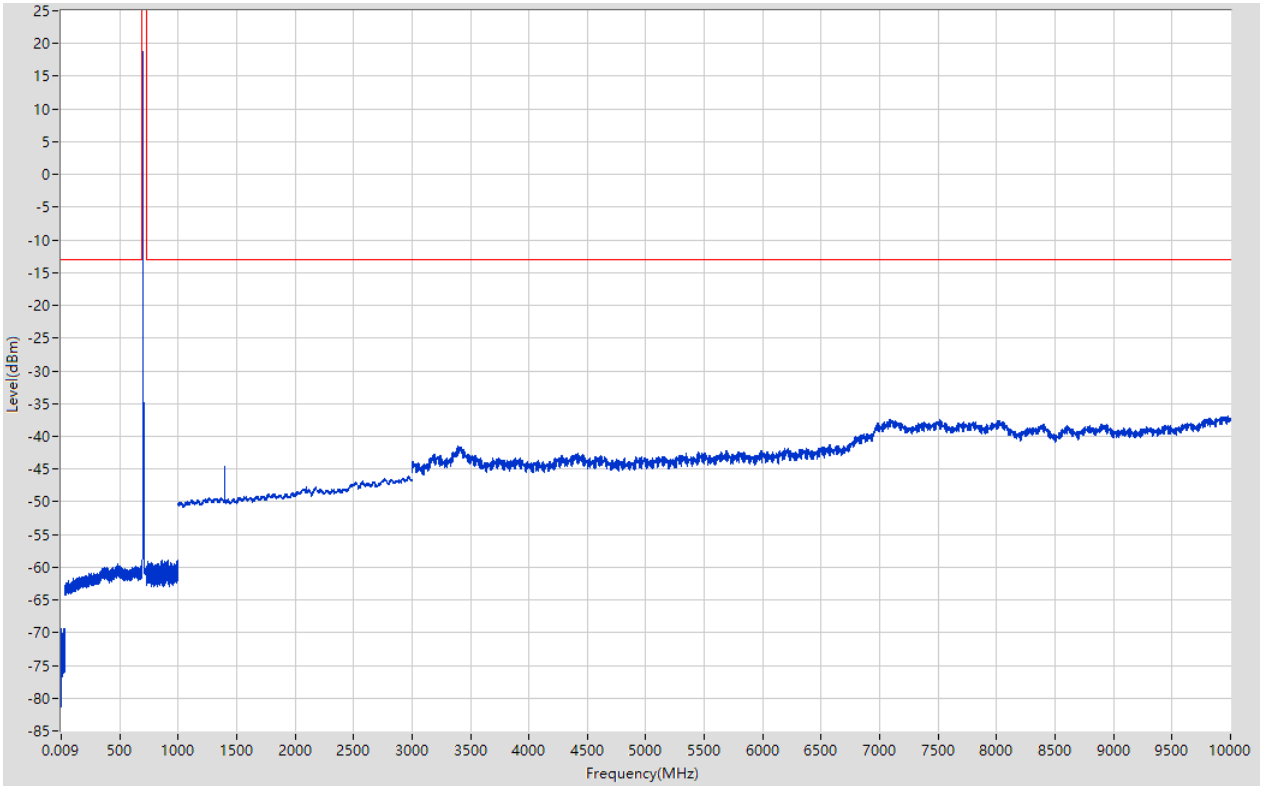

4.9. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:9, Channel:23095, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.041	-73.31	-13	Pass	401
0.15	30	0.01	RMS	28.26	-68.88	-13	Pass	2986
30	689	0.1	RMS	658.4	-59.85	-13	Pass	6591
689	726	0.1	RMS	706.205	19.48	60	Pass	401
726	1000	0.1	RMS	898.8	-58.81	-13	Pass	2741
1000	3000	1	RMS	2964	-46.06	-13	Pass	2001
3000	10000	1	RMS	9876	-36.94	-13	Pass	7001

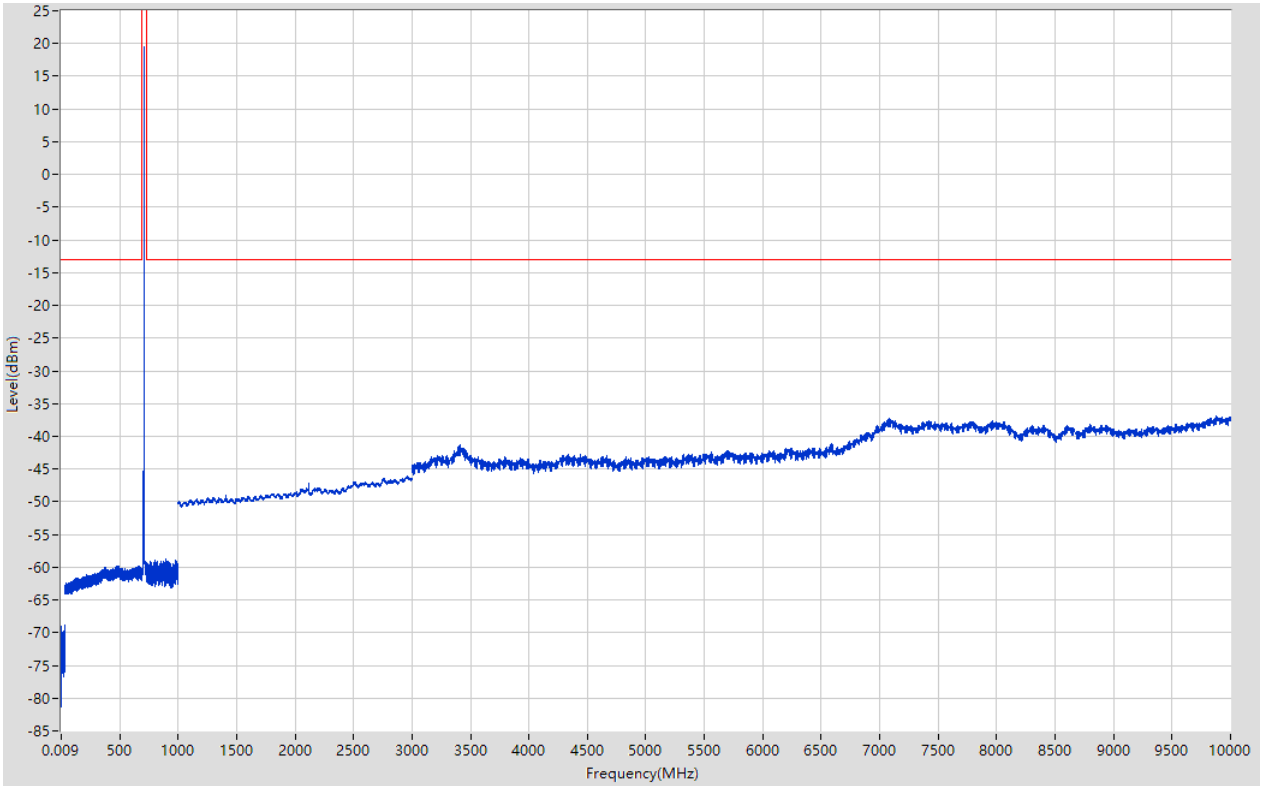

4.10. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:10, Channel:23095, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-72.37	-13	Pass	401
0.15	30	0.01	RMS	0.2	-69.43	-13	Pass	2986
30	689	0.1	RMS	477.7	-59.56	-13	Pass	6591
689	726	0.1	RMS	706.205	18.56	60	Pass	401
726	1000	0.1	RMS	914.6	-58.45	-13	Pass	2741
1000	3000	1	RMS	2976	-46.2	-13	Pass	2001
3000	10000	1	RMS	9934	-36.77	-13	Pass	7001

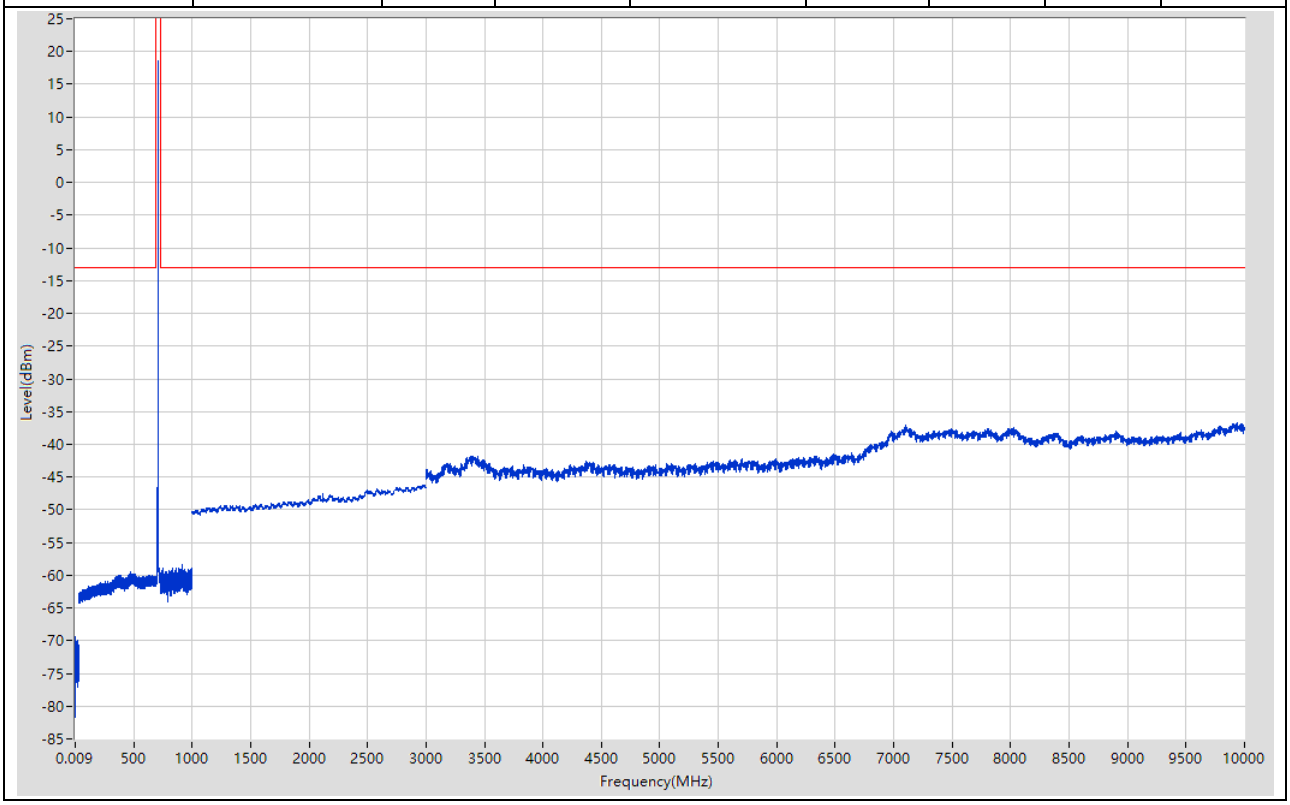

4.11. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:11, Channel:23165, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.61	-13	Pass	401
0.15	30	0.01	RMS	2.95	-69.27	-13	Pass	2986
30	689	0.1	RMS	475.9	-59.46	-13	Pass	6591
689	726	0.1	RMS	713.235	19.89	60	Pass	401
726	1000	0.1	RMS	976.5	-58.46	-13	Pass	2741
1000	3000	1	RMS	1426	-44.15	-13	Pass	2001
3000	10000	1	RMS	9898	-36.92	-13	Pass	7001

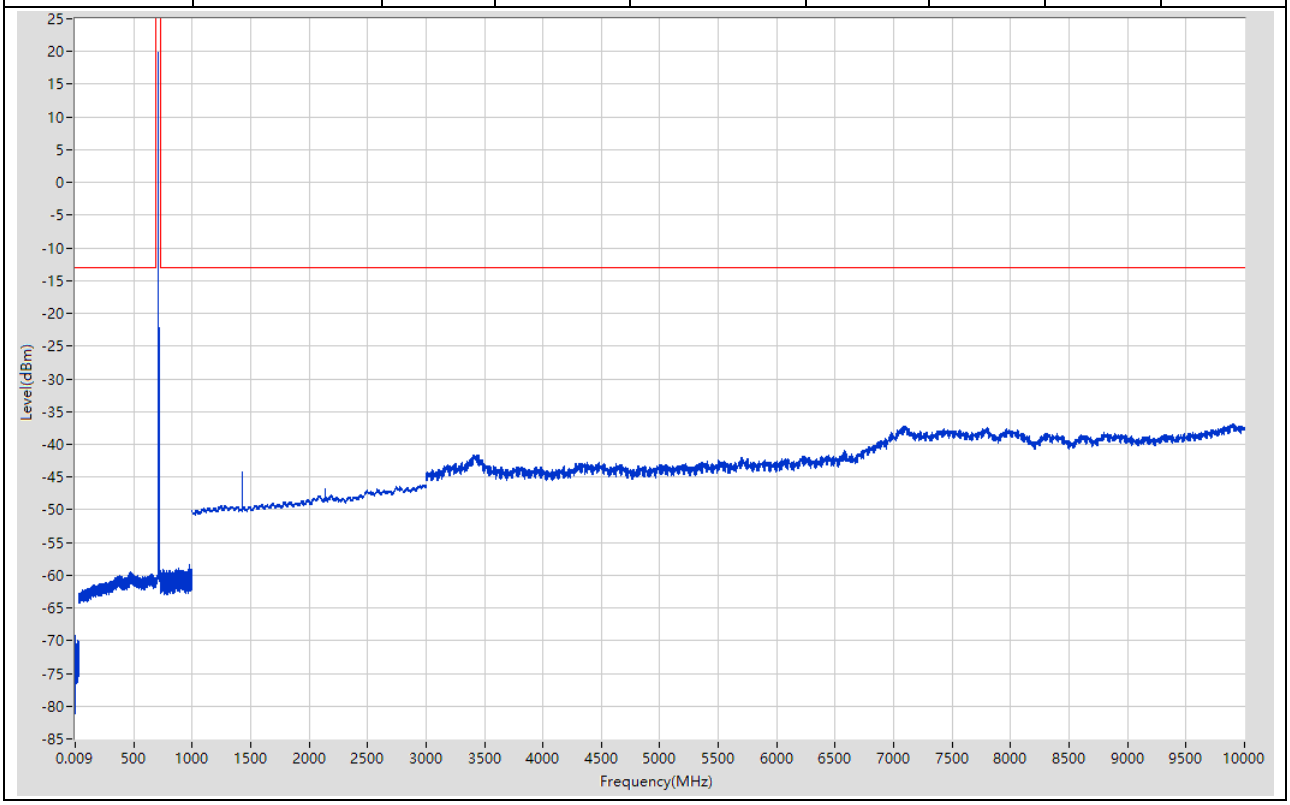

4.12. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:12, Channel:23165, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.38	-13	Pass	401
0.15	30	0.01	RMS	0.18	-68.8	-13	Pass	2986
30	689	0.1	RMS	463.8	-59.74	-13	Pass	6591
689	726	0.1	RMS	713.235	18.93	60	Pass	401
726	1000	0.1	RMS	992.6	-58.54	-13	Pass	2741
1000	3000	1	RMS	1426	-44.78	-13	Pass	2001
3000	10000	1	RMS	9934	-36.82	-13	Pass	7001

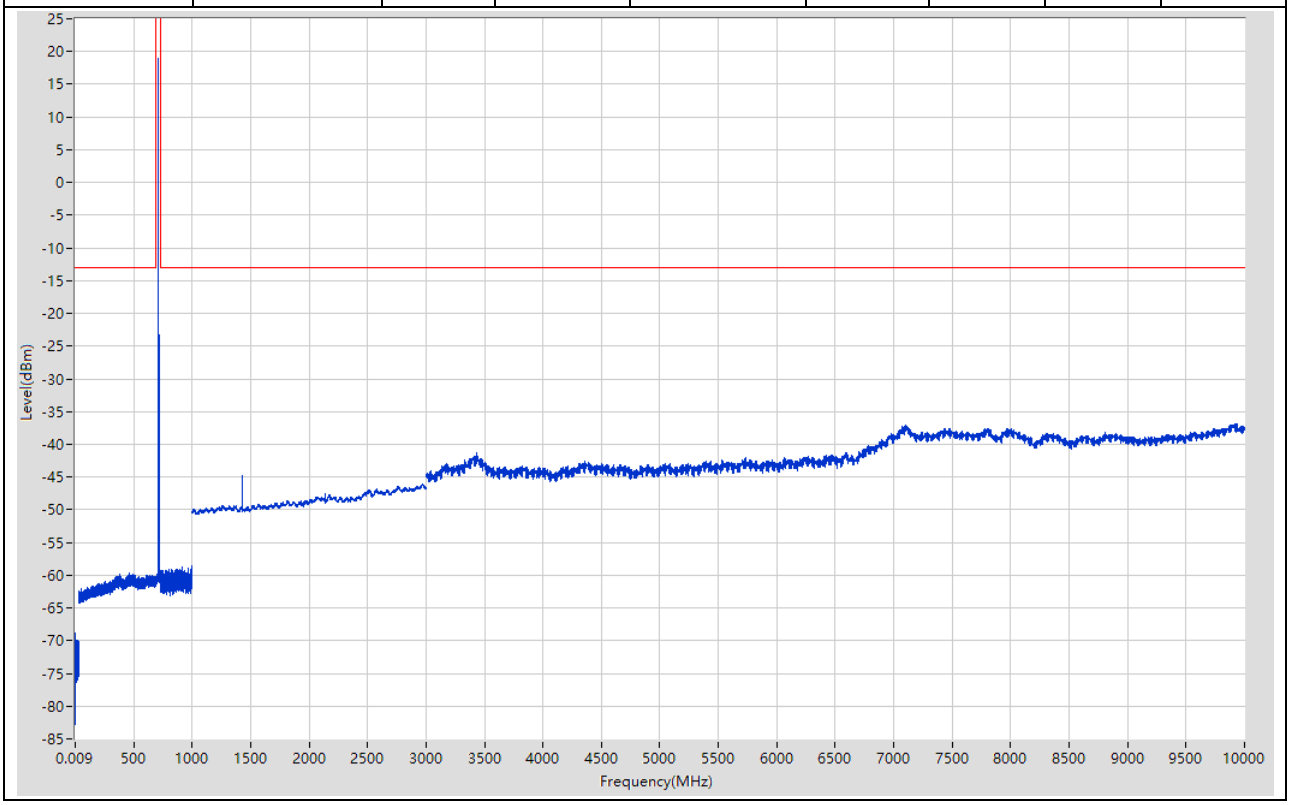

4.13. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:13, Channel:23035, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.92	-13	Pass	401
0.15	30	0.01	RMS	29.83	-69.39	-13	Pass	2986
30	689	0.1	RMS	488.1	-59.5	-13	Pass	6591
689	726	0.1	RMS	699.36	19.88	60	Pass	401
726	1000	0.1	RMS	925	-58.88	-13	Pass	2741
1000	3000	1	RMS	1398	-43.65	-13	Pass	2001
3000	10000	1	RMS	9944	-36.86	-13	Pass	7001

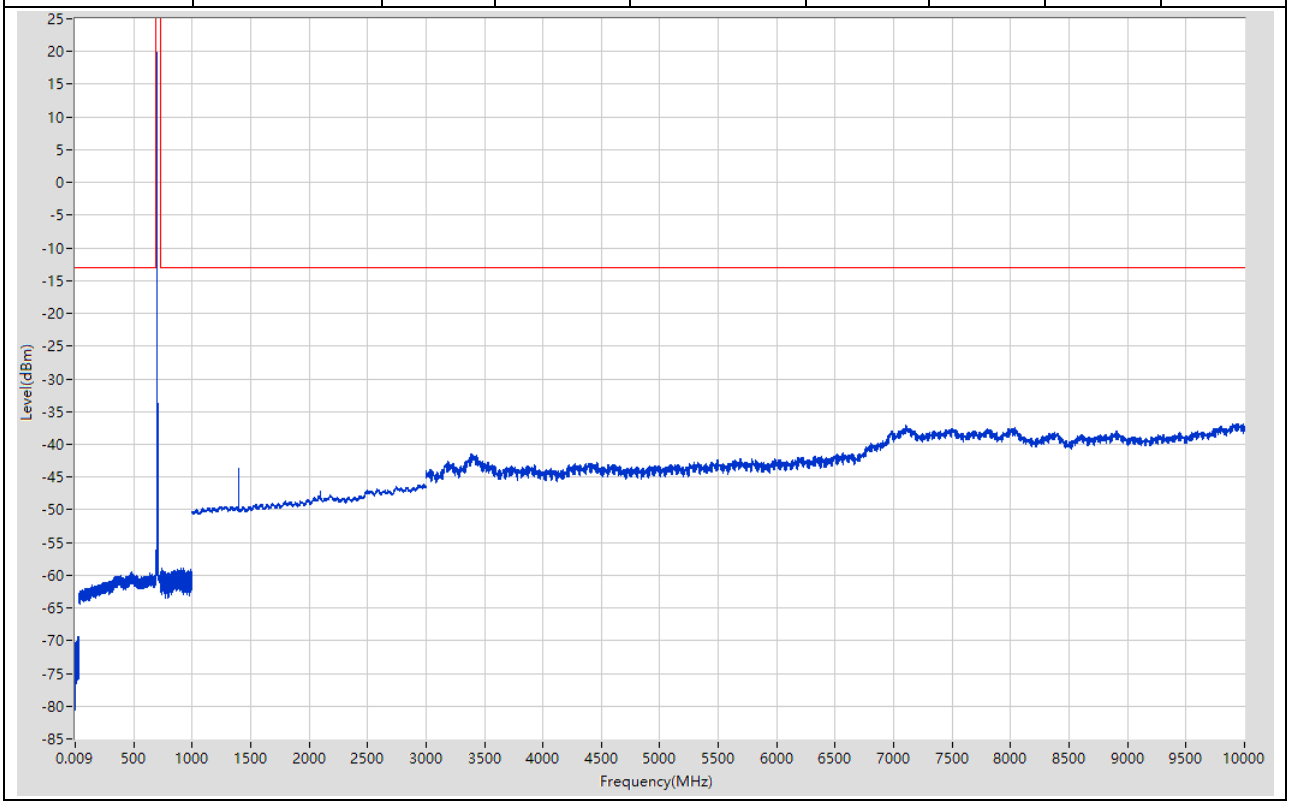

4.14. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:14, Channel:23035, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.86	-13	Pass	401
0.15	30	0.01	RMS	0.38	-69.64	-13	Pass	2986
30	689	0.1	RMS	489	-59.54	-13	Pass	6591
689	726	0.1	RMS	699.36	18.9	60	Pass	401
726	1000	0.1	RMS	979.3	-58.95	-13	Pass	2741
1000	3000	1	RMS	1398	-44.63	-13	Pass	2001
3000	10000	1	RMS	9892	-36.86	-13	Pass	7001

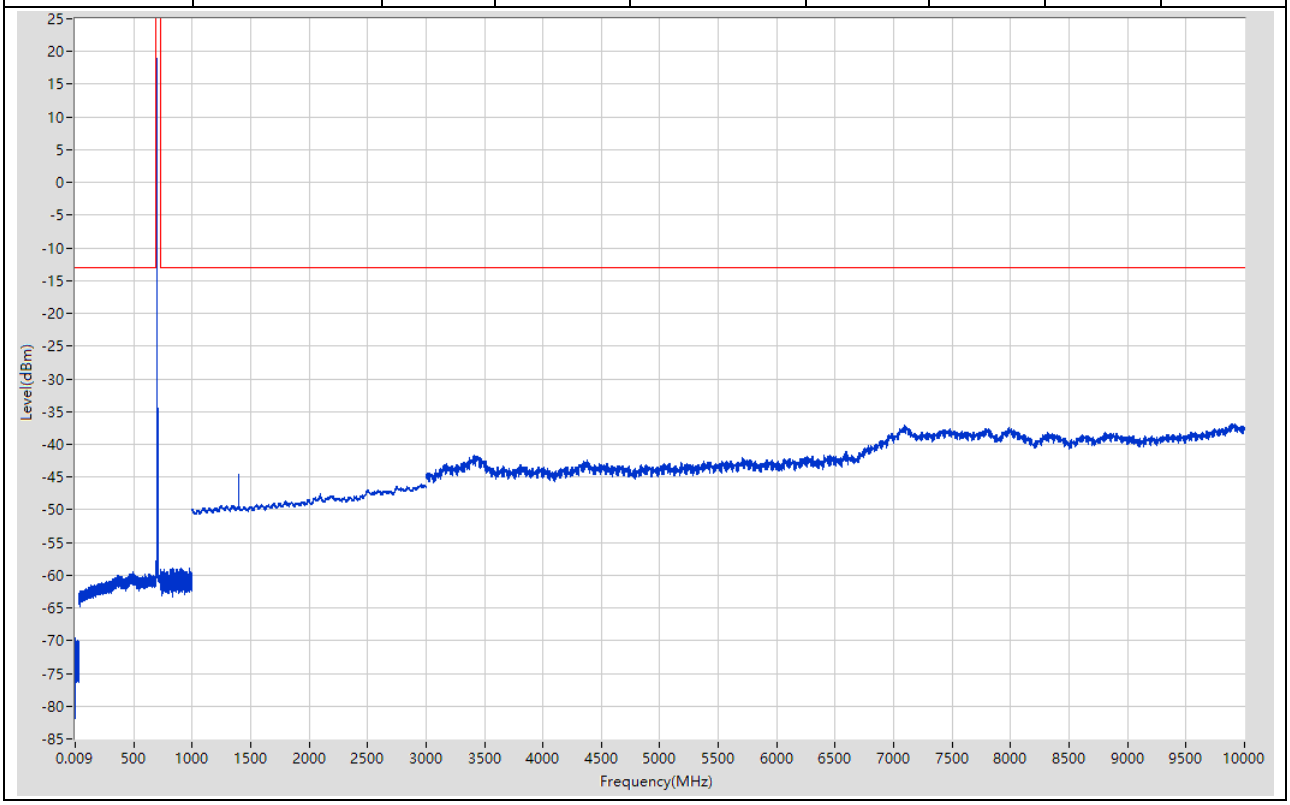

4.15. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:15, Channel:23095, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.68	-13	Pass	401
0.15	30	0.01	RMS	0.31	-69.39	-13	Pass	2986
30	689	0.1	RMS	461.1	-59.73	-13	Pass	6591
689	726	0.1	RMS	705.373	19.69	60	Pass	401
726	1000	0.1	RMS	873.4	-58.86	-13	Pass	2741
1000	3000	1	RMS	2967	-46.19	-13	Pass	2001
3000	10000	1	RMS	9898	-36.81	-13	Pass	7001

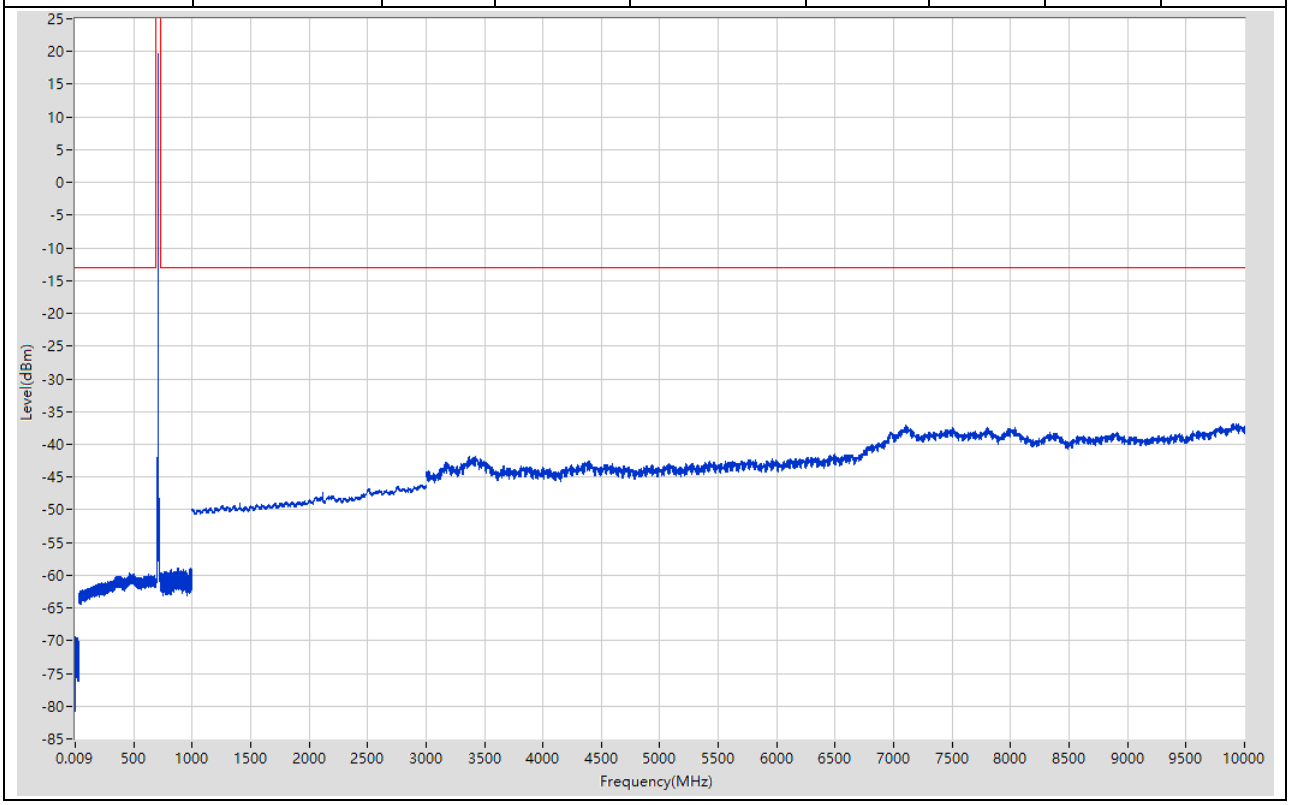

4.16. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:16, Channel:23095, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-71.19	-13	Pass	401
0.15	30	0.01	RMS	1.99	-69.56	-13	Pass	2986
30	689	0.1	RMS	472.4	-59.58	-13	Pass	6591
689	726	0.1	RMS	705.373	18.76	60	Pass	401
726	1000	0.1	RMS	999.8	-58.84	-13	Pass	2741
1000	3000	1	RMS	2975	-46.1	-13	Pass	2001
3000	10000	1	RMS	10000	-37.09	-13	Pass	7001

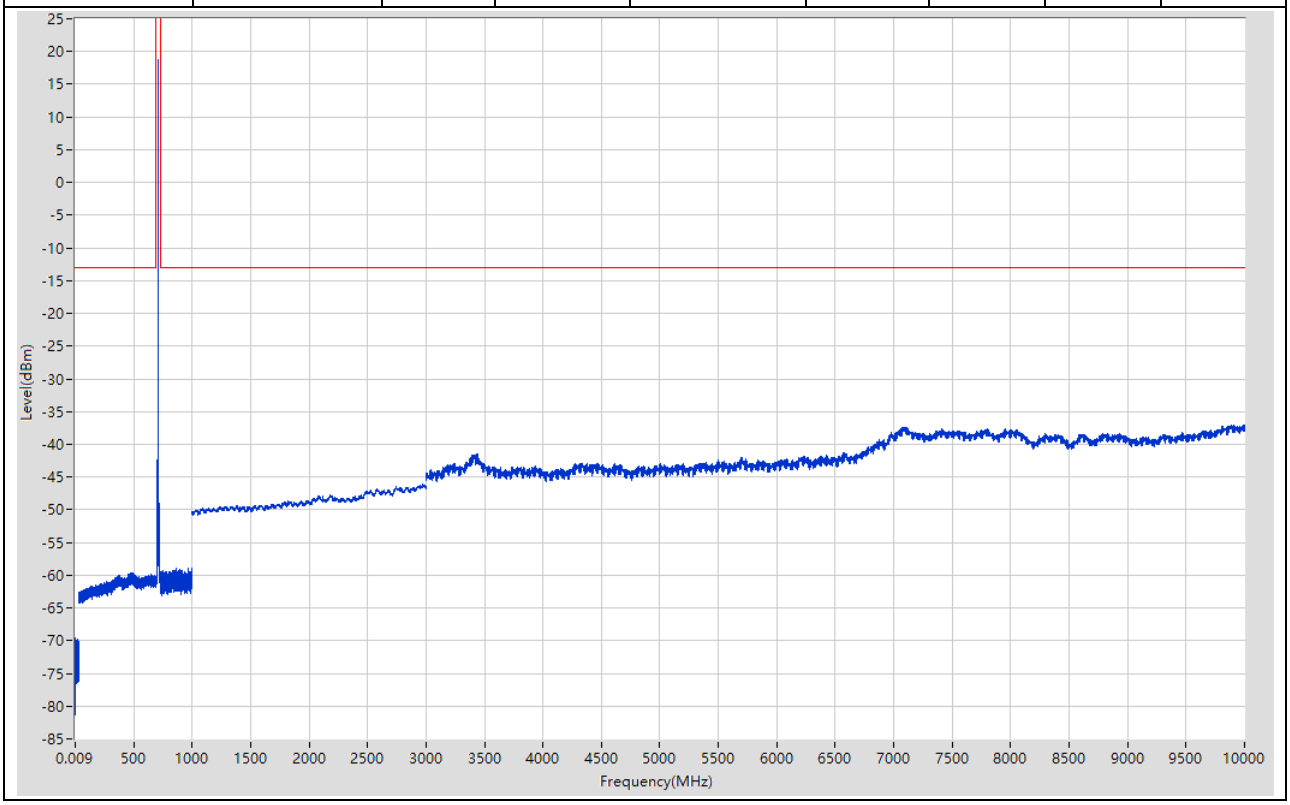

4.17. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:17, Channel:23155, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.57	-13	Pass	401
0.15	30	0.01	RMS	0.39	-69.44	-13	Pass	2986
30	689	0.1	RMS	503.1	-59.65	-13	Pass	6591
689	726	0.1	RMS	711.293	19.4	60	Pass	401
726	1000	0.1	RMS	875.6	-58.74	-13	Pass	2741
1000	3000	1	RMS	1422	-44.51	-13	Pass	2001
3000	10000	1	RMS	9903	-36.92	-13	Pass	7001

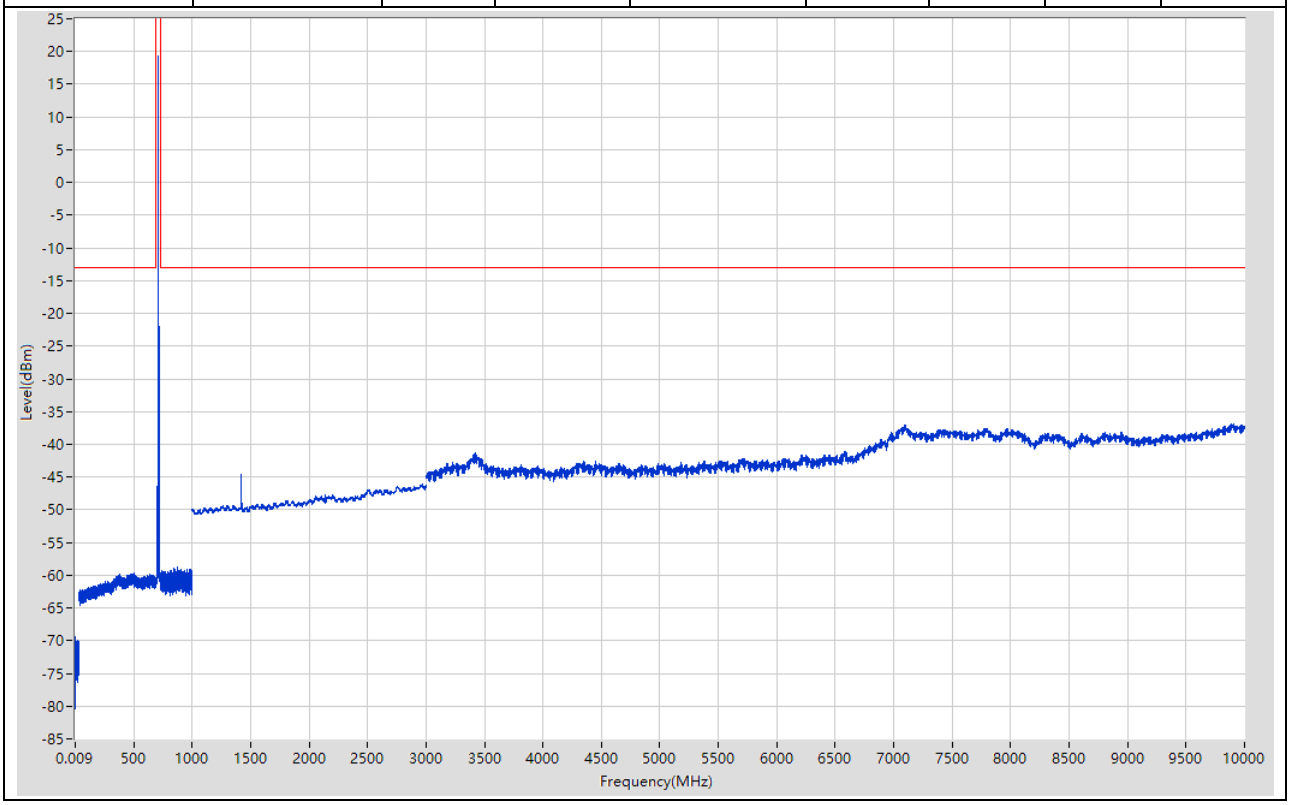

4.18. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:18, Channel:23155, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.2	-13	Pass	401
0.15	30	0.01	RMS	14.3	-69.85	-13	Pass	2986
30	689	0.1	RMS	485.6	-59.59	-13	Pass	6591
689	726	0.1	RMS	711.385	18.65	60	Pass	401
726	1000	0.1	RMS	981.3	-58.88	-13	Pass	2741
1000	3000	1	RMS	1422	-45.28	-13	Pass	2001
3000	10000	1	RMS	9938	-36.78	-13	Pass	7001

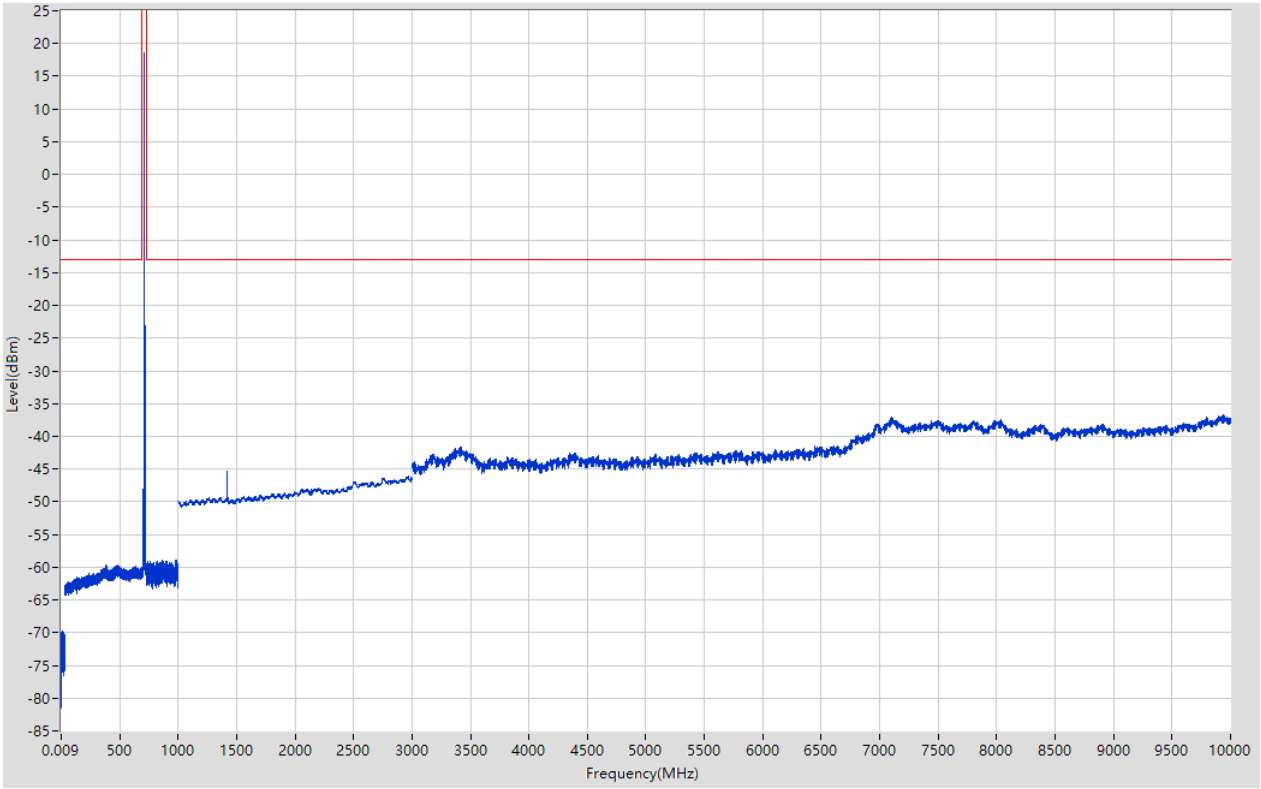

4.19. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:19, Channel:23060, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.75	-13	Pass	401
0.15	30	0.01	RMS	7.61	-69.05	-13	Pass	2986
30	689	0.1	RMS	476.6	-59.81	-13	Pass	6591
689	726	0.1	RMS	699.545	19.37	60	Pass	401
726	1000	0.1	RMS	881	-58.94	-13	Pass	2741
1000	3000	1	RMS	1399	-44.25	-13	Pass	2001
3000	10000	1	RMS	9889	-36.92	-13	Pass	7001

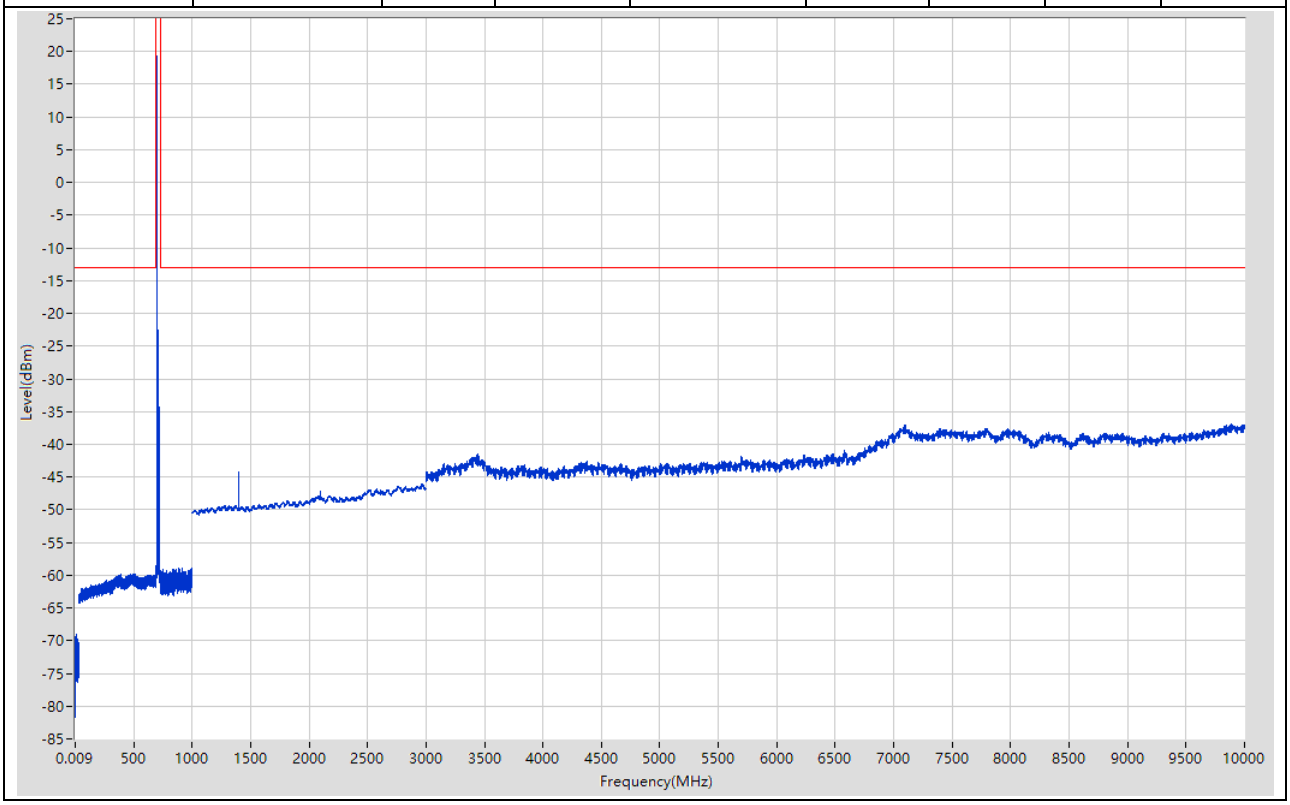

4.20. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:20, Channel:23060, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-72.85	-13	Pass	401
0.15	30	0.01	RMS	6.11	-68.75	-13	Pass	2986
30	689	0.1	RMS	484.5	-59.53	-13	Pass	6591
689	726	0.1	RMS	699.638	18.4	60	Pass	401
726	1000	0.1	RMS	993.1	-58.66	-13	Pass	2741
1000	3000	1	RMS	1399	-45.05	-13	Pass	2001
3000	10000	1	RMS	9926	-36.8	-13	Pass	7001

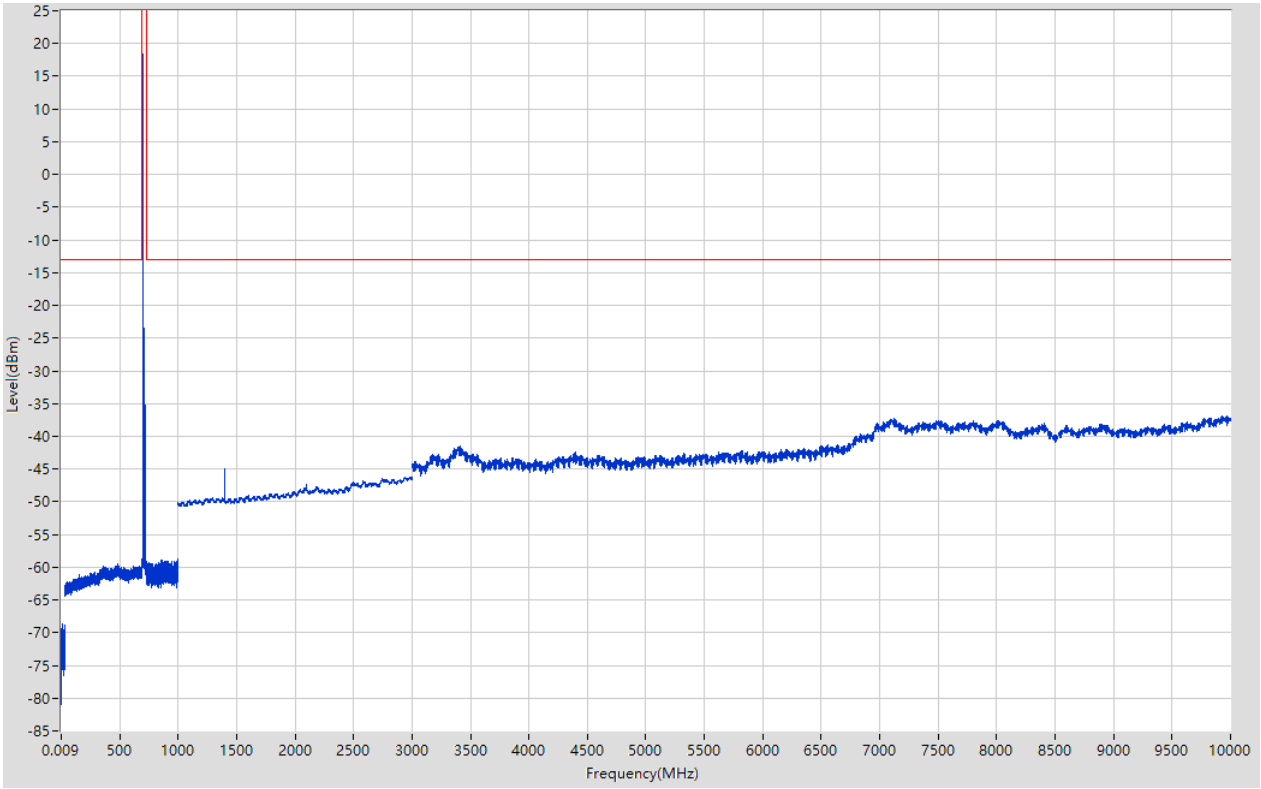

4.21. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:21, Channel:23095, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.023	-72.73	-13	Pass	401
0.15	30	0.01	RMS	21.45	-69.67	-13	Pass	2986
30	689	0.1	RMS	487.6	-59.78	-13	Pass	6591
689	726	0.1	RMS	703.06	19.89	60	Pass	401
726	1000	0.1	RMS	866.6	-58.84	-13	Pass	2741
1000	3000	1	RMS	2964	-46.18	-13	Pass	2001
3000	10000	1	RMS	9997	-36.81	-13	Pass	7001

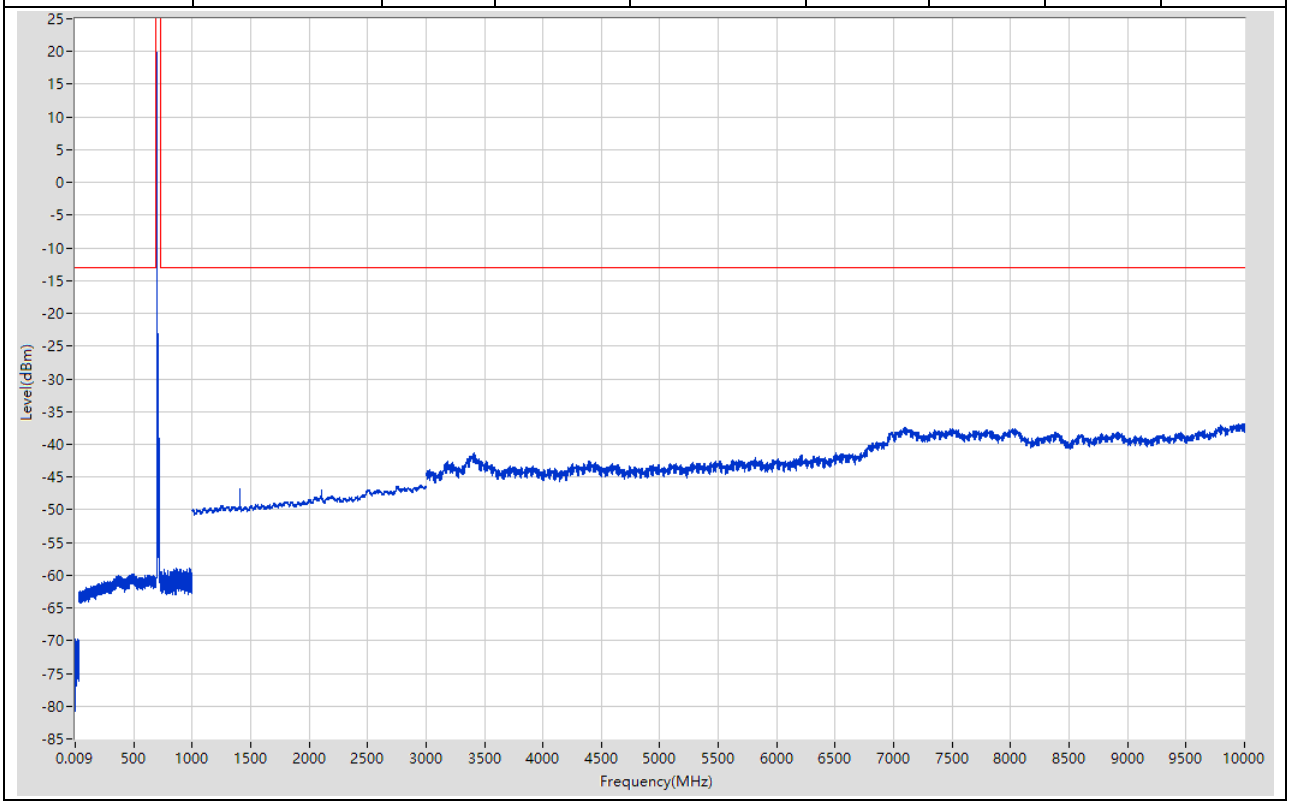

4.22. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:22, Channel:23095, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.34	-13	Pass	401
0.15	30	0.01	RMS	1.29	-69.33	-13	Pass	2986
30	689	0.1	RMS	460.3	-59.82	-13	Pass	6591
689	726	0.1	RMS	703.06	18.73	60	Pass	401
726	1000	0.1	RMS	893.1	-59	-13	Pass	2741
1000	3000	1	RMS	2976	-46.19	-13	Pass	2001
3000	10000	1	RMS	9908	-36.87	-13	Pass	7001

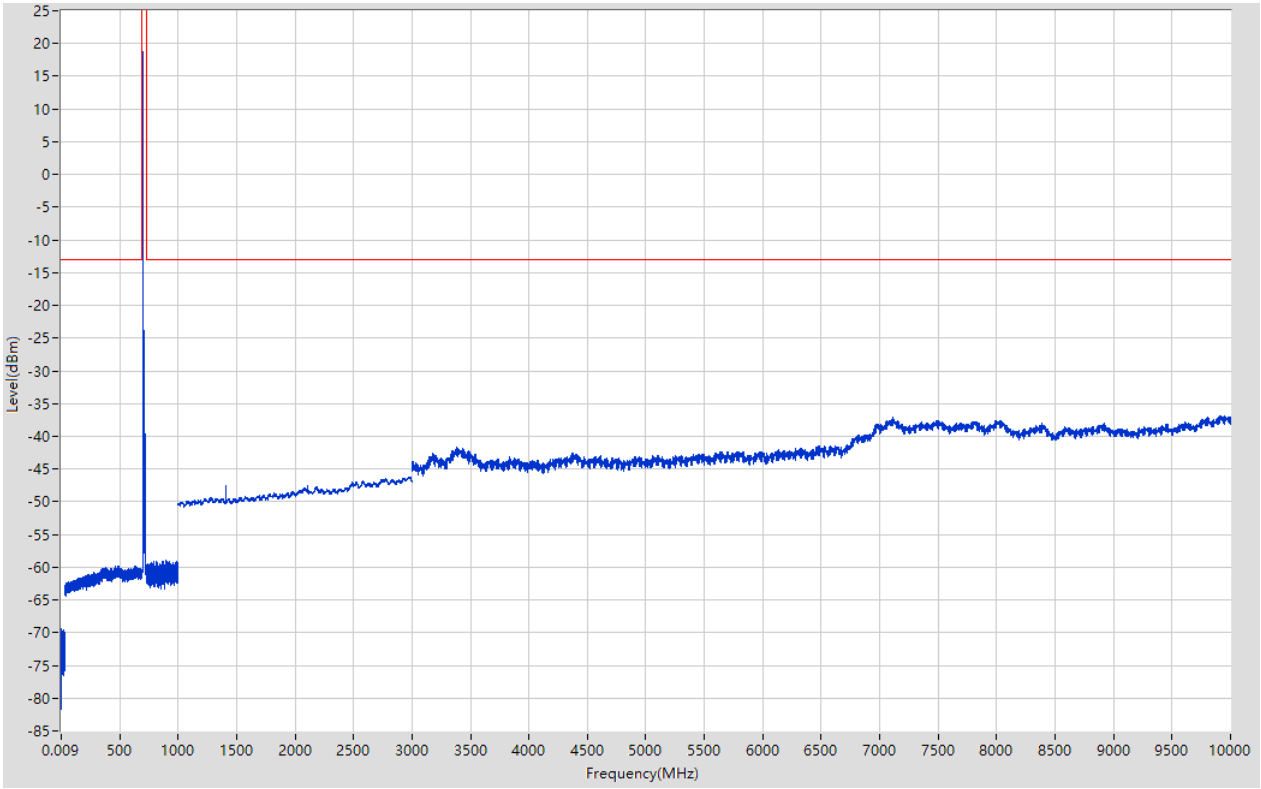

4.23. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:23, Channel:23130, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.34	-13	Pass	401
0.15	30	0.01	RMS	22.39	-69.53	-13	Pass	2986
30	689	0.1	RMS	467.8	-59.64	-13	Pass	6591
689	726	0.1	RMS	706.575	20	60	Pass	401
726	1000	0.1	RMS	866.8	-58.94	-13	Pass	2741
1000	3000	1	RMS	2972	-46.07	-13	Pass	2001
3000	10000	1	RMS	9992	-36.95	-13	Pass	7001

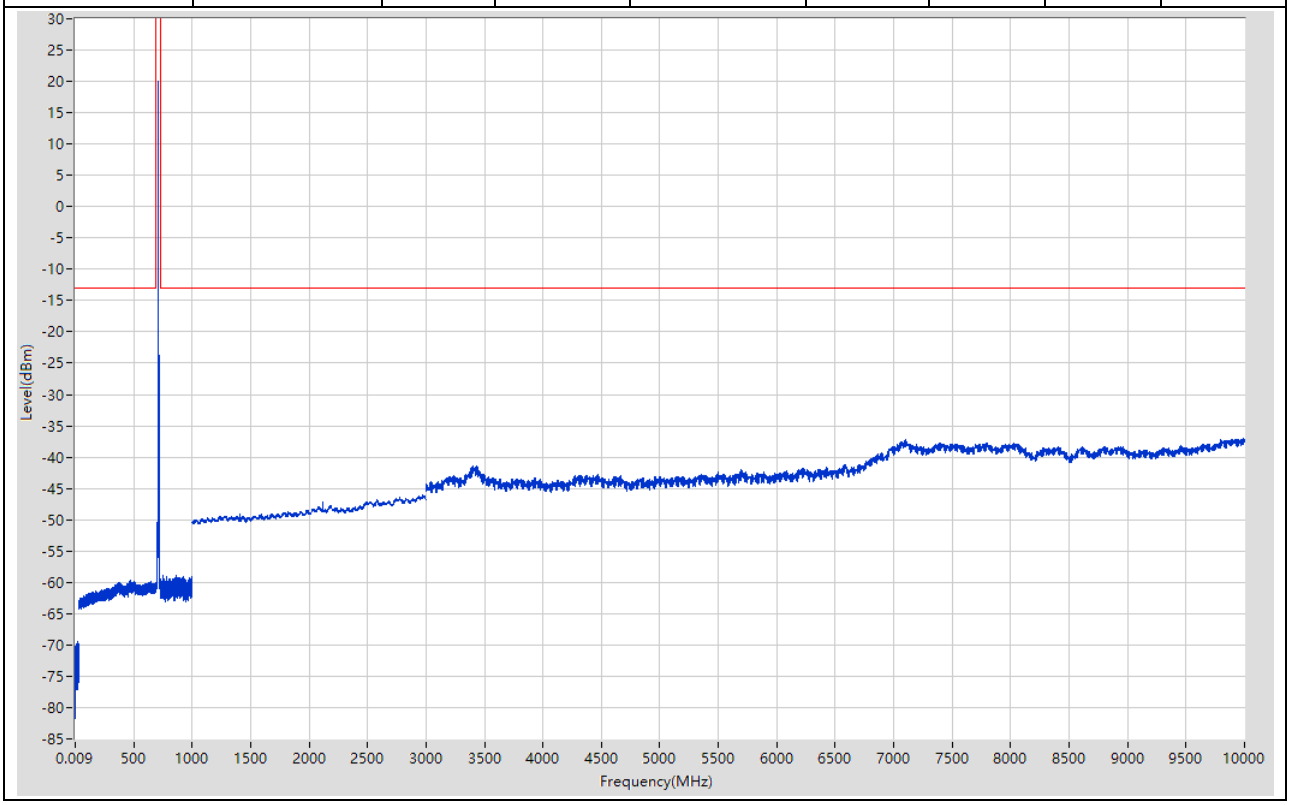

4.24. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:24, Channel:23130, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.95	-13	Pass	401
0.15	30	0.01	RMS	25.03	-69.48	-13	Pass	2986
30	689	0.1	RMS	631	-59.72	-13	Pass	6591
689	726	0.1	RMS	706.575	18.78	60	Pass	401
726	1000	0.1	RMS	914.2	-58.89	-13	Pass	2741
1000	3000	1	RMS	2972	-46.06	-13	Pass	2001
3000	10000	1	RMS	9996	-36.8	-13	Pass	7001

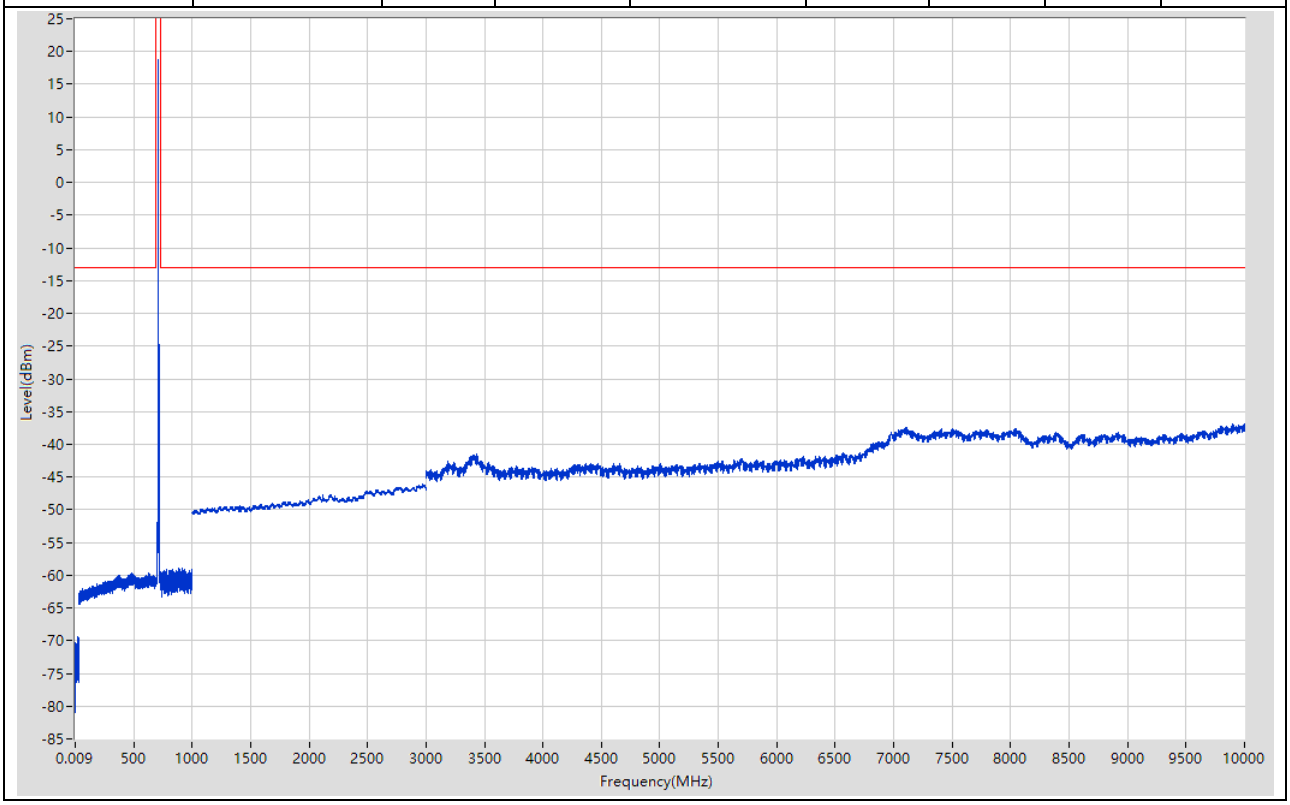

5. LTE_Band13

5.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:23205, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-71.68	-13	Pass	401
0.15	30	0.01	RMS	0.15	-69.11	-13	Pass	2986
30	767	0.1	RMS	757.4	-59.51	-13	Pass	7371
767	797	0.1	RMS	777.35	19.78	60	Pass	401
797	1000	0.1	RMS	996.2	-59.31	-13	Pass	2031
1000	3000	1	RMS	1554	-45.76	-13	Pass	2001
3000	10000	1	RMS	9910	-36.86	-13	Pass	7001

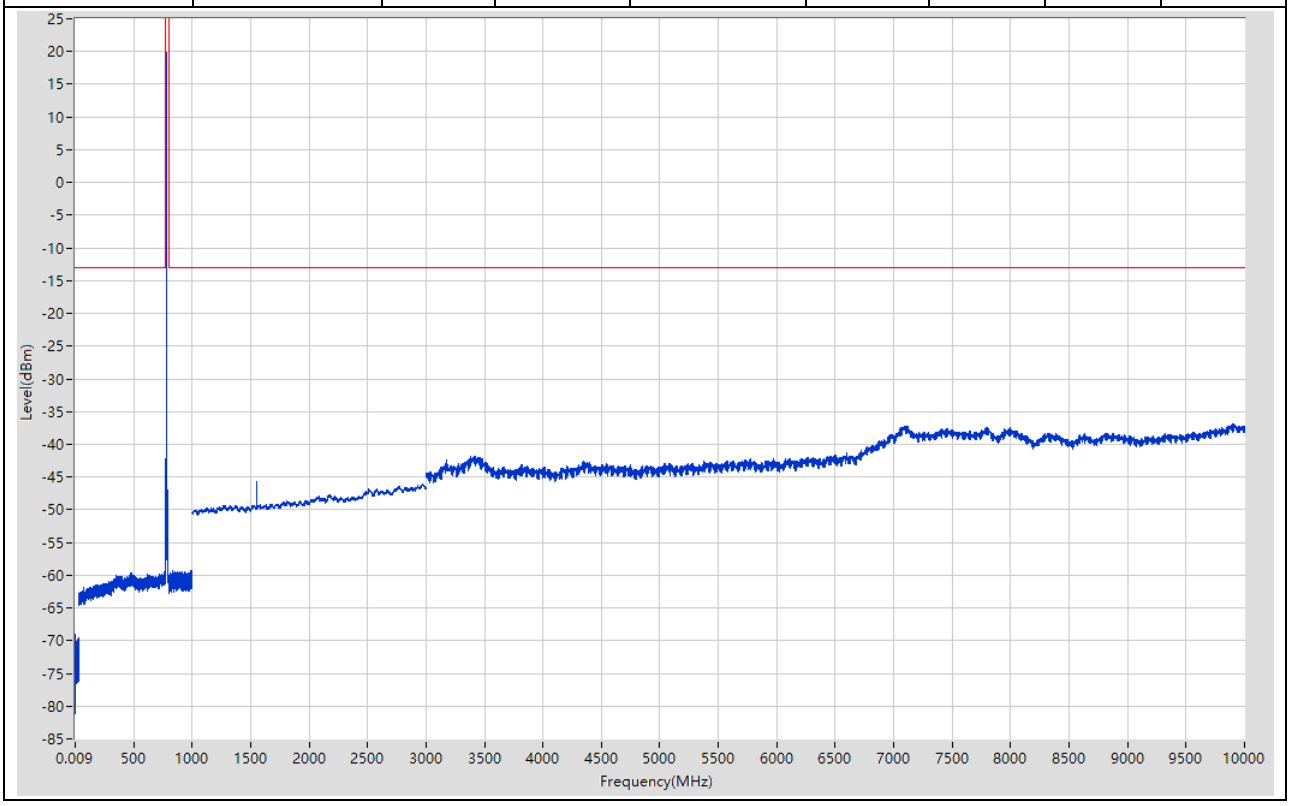

5.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:23205, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.047	-73.46	-13	Pass	401
0.15	30	0.01	RMS	23.23	-69.72	-13	Pass	2986
30	767	0.1	RMS	729	-59.81	-13	Pass	7371
767	797	0.1	RMS	777.35	19.09	60	Pass	401
797	1000	0.1	RMS	905.5	-59.27	-13	Pass	2031
1000	3000	1	RMS	2964	-46.17	-13	Pass	2001
3000	10000	1	RMS	9881	-36.88	-13	Pass	7001

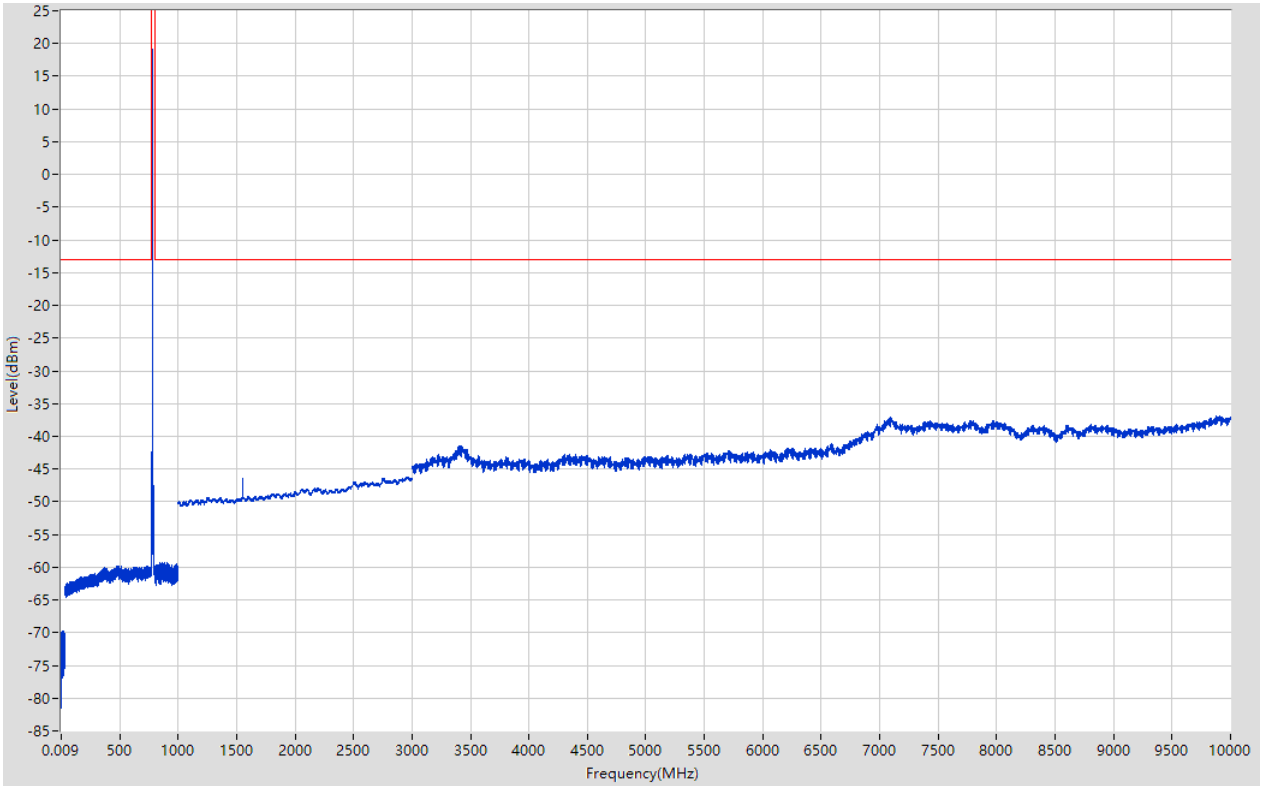

5.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:23230, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.19	-13	Pass	401
0.15	30	0.01	RMS	5.67	-69.02	-13	Pass	2986
30	767	0.1	RMS	729.5	-59.35	-13	Pass	7371
767	797	0.1	RMS	779.825	19.86	60	Pass	401
797	1000	0.1	RMS	879.3	-59.17	-13	Pass	2031
1000	3000	1	RMS	1559	-45.94	-13	Pass	2001
3000	10000	1	RMS	9890	-36.78	-13	Pass	7001

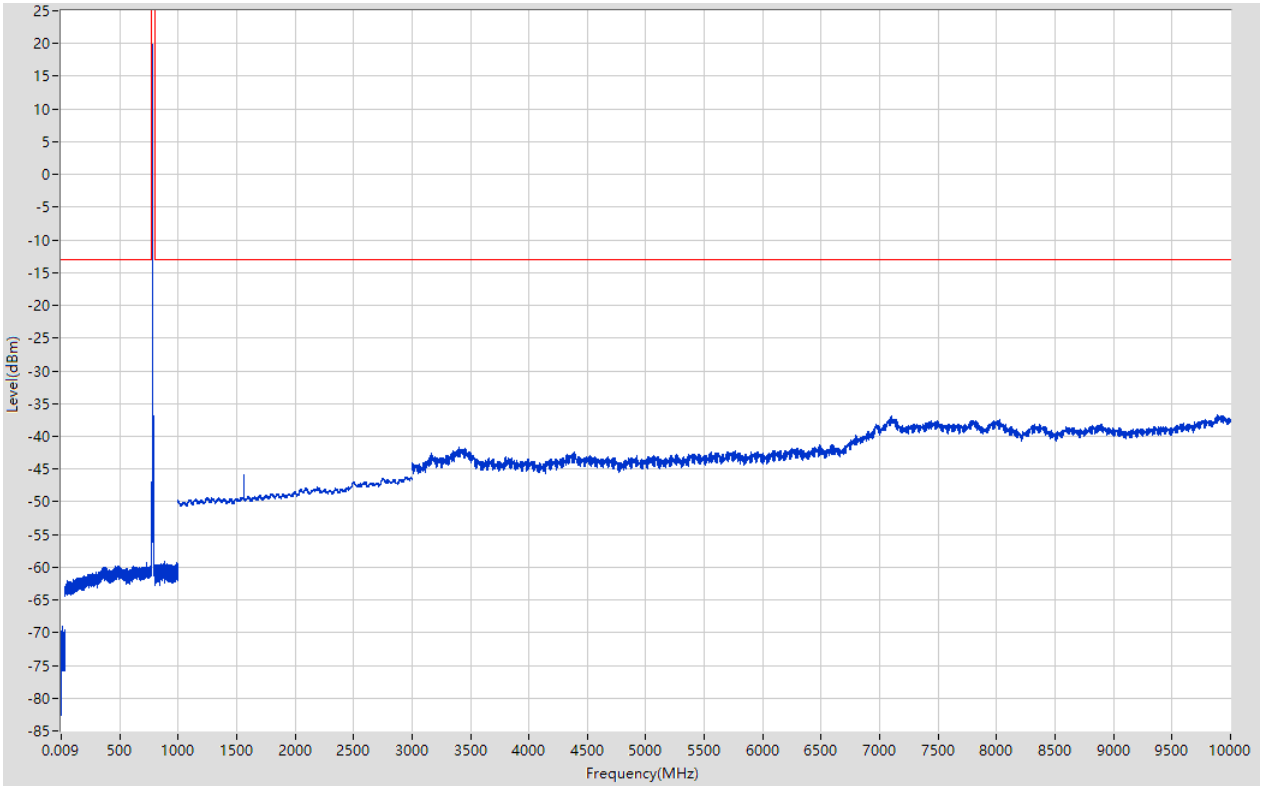

5.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:23230, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.021	-73.26	-13	Pass	401
0.15	30	0.01	RMS	18.52	-69.36	-13	Pass	2986
30	767	0.1	RMS	766.3	-59.75	-13	Pass	7371
767	797	0.1	RMS	779.825	19.01	60	Pass	401
797	1000	0.1	RMS	979.8	-59.14	-13	Pass	2031
1000	3000	1	RMS	2963	-46.09	-13	Pass	2001
3000	10000	1	RMS	9905	-36.71	-13	Pass	7001

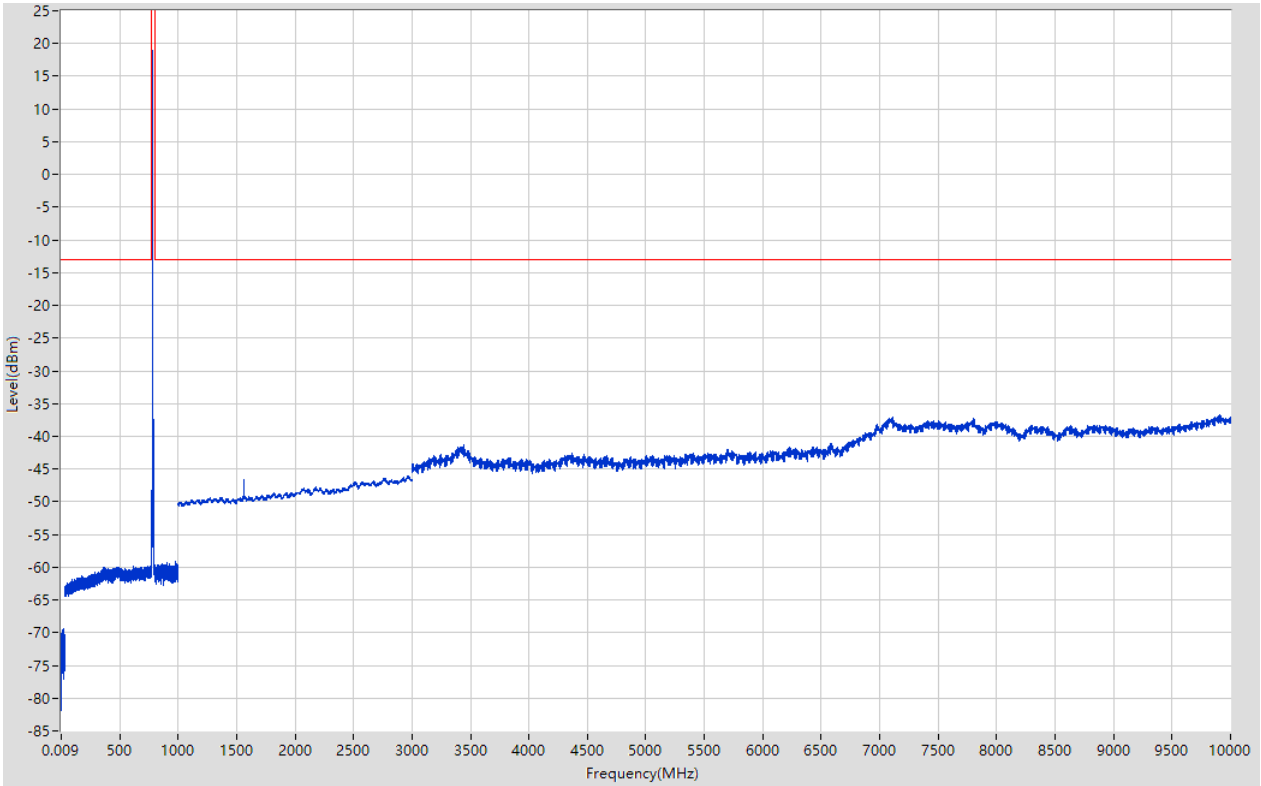

5.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:23255, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.24	-13	Pass	401
0.15	30	0.01	RMS	5.58	-69.41	-13	Pass	2986
30	767	0.1	RMS	488.3	-59.46	-13	Pass	7371
767	797	0.1	RMS	782.375	19.21	60	Pass	401
797	1000	0.1	RMS	896	-59.24	-13	Pass	2031
1000	3000	1	RMS	2973	-46.14	-13	Pass	2001
3000	10000	1	RMS	9919	-37.01	-13	Pass	7001

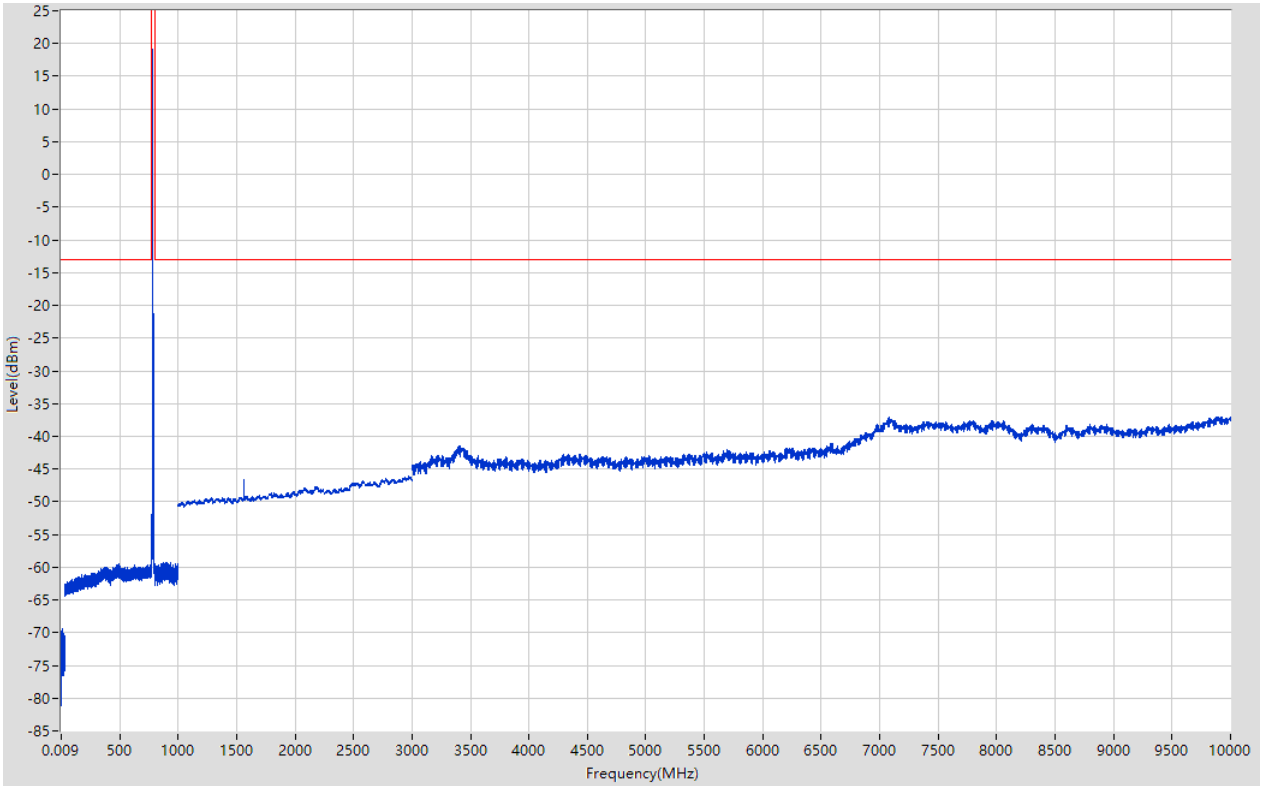

5.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:23255, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.021	-72.61	-13	Pass	401
0.15	30	0.01	RMS	2.38	-69.36	-13	Pass	2986
30	767	0.1	RMS	746.6	-59.71	-13	Pass	7371
767	797	0.1	RMS	782.375	18.42	60	Pass	401
797	1000	0.1	RMS	898.3	-59.35	-13	Pass	2031
1000	3000	1	RMS	2979	-46.1	-13	Pass	2001
3000	10000	1	RMS	9906	-36.55	-13	Pass	7001

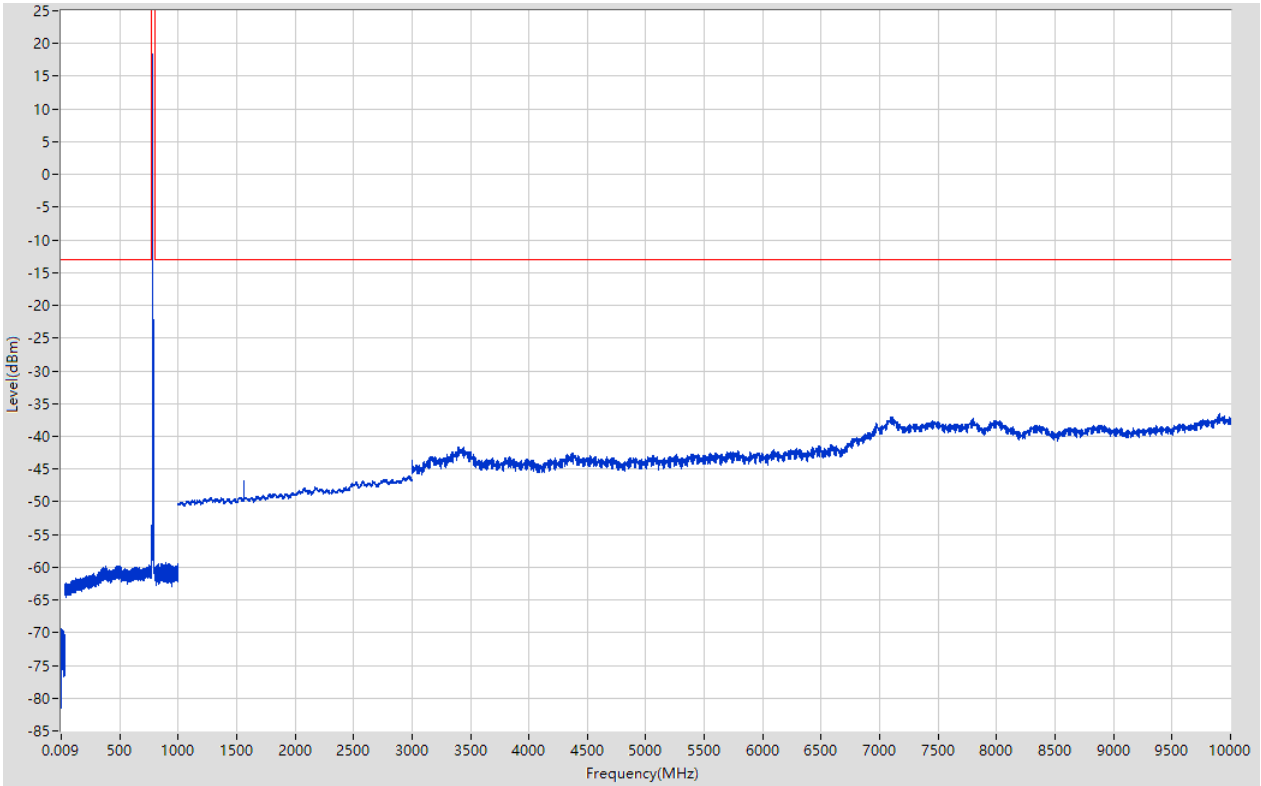

5.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:23230, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.086	-73.49	-13	Pass	401
0.15	30	0.01	RMS	0.15	-68.95	-13	Pass	2986
30	767	0.1	RMS	477.6	-59.8	-13	Pass	7371
767	797	0.1	RMS	777.575	20.05	60	Pass	401
797	1000	0.1	RMS	986.4	-59.17	-13	Pass	2031
1000	3000	1	RMS	1555	-45.9	-13	Pass	2001
3000	10000	1	RMS	9914	-36.96	-13	Pass	7001

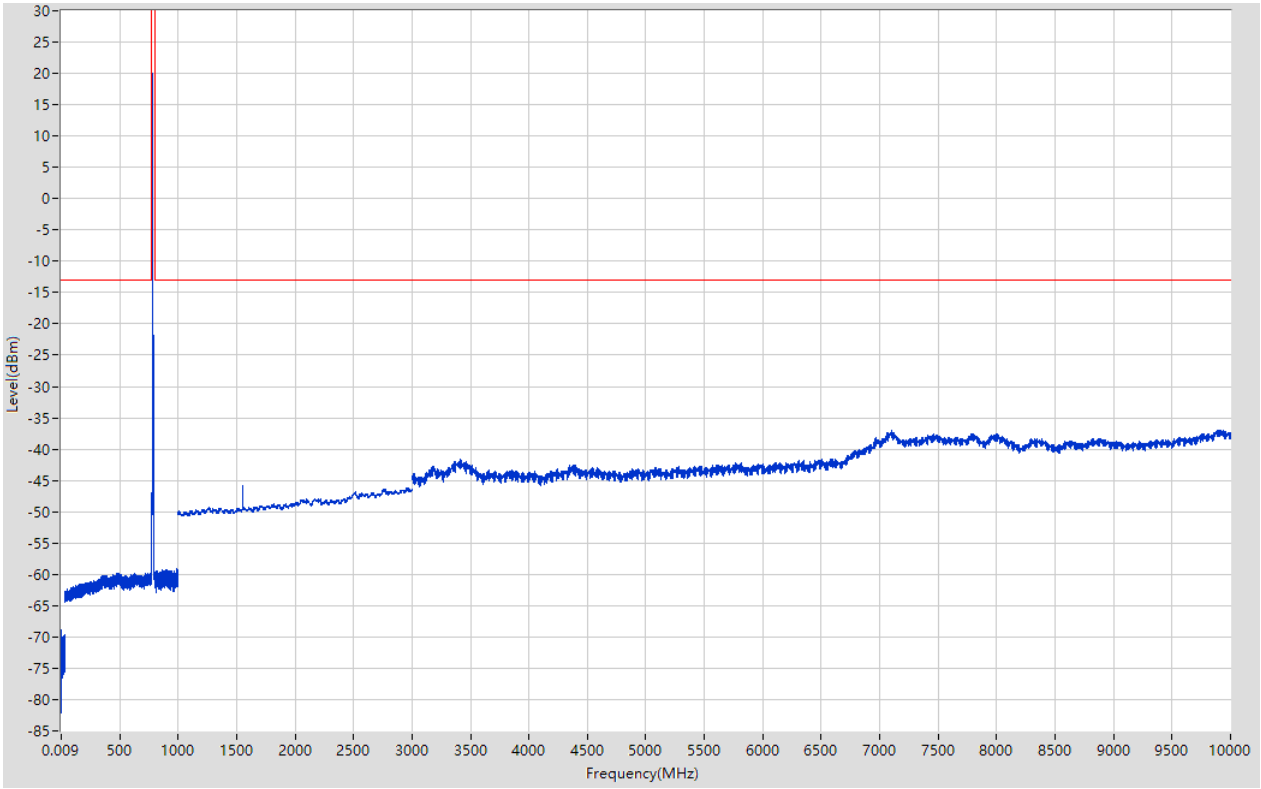

5.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:23230, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.33	-13	Pass	401
0.15	30	0.01	RMS	26.14	-68.96	-13	Pass	2986
30	767	0.1	RMS	489.6	-59.47	-13	Pass	7371
767	797	0.1	RMS	777.575	19.03	60	Pass	401
797	1000	0.1	RMS	889.4	-59.01	-13	Pass	2031
1000	3000	1	RMS	2977	-46.13	-13	Pass	2001
3000	10000	1	RMS	9972	-36.95	-13	Pass	7001

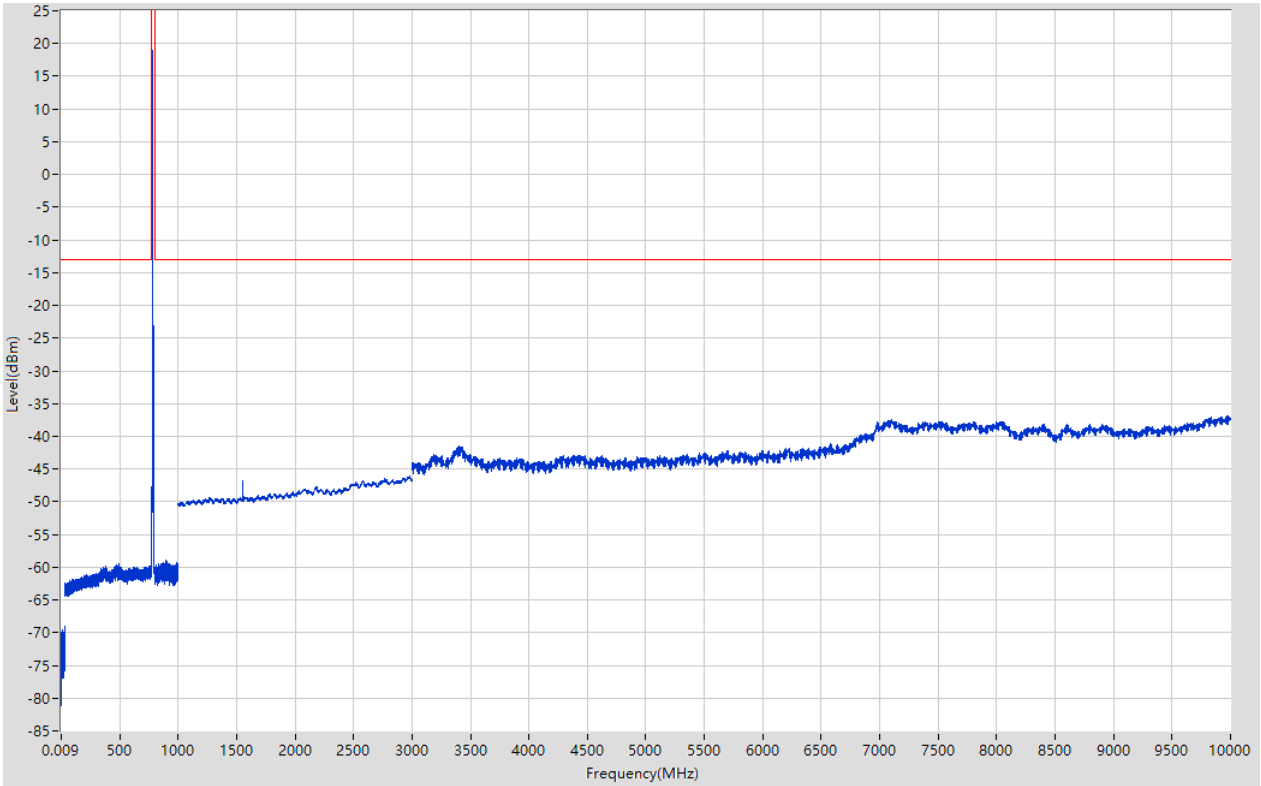

6. LTE_Band66

6.1. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:1, Channel:131979, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.02	-72.95	-13	Pass	401
0.15	30	0.01	RMS	25.09	-68.96	-13	Pass	2986
30	1000	0.1	RMS	862.009	-59.33	-13	Pass	9701
1000	1700	1	RMS	1700	-48.62	-13	Pass	701
1700	1790	1	RMS	1710.125	22.41	60	Pass	401
1790	3000	1	RMS	2947	-46.22	-13	Pass	1211
3000	12000	1	RMS	10398	-35.68	-13	Pass	9002
12000	20000	1	RMS	19788	-28.37	-13	Pass	8001

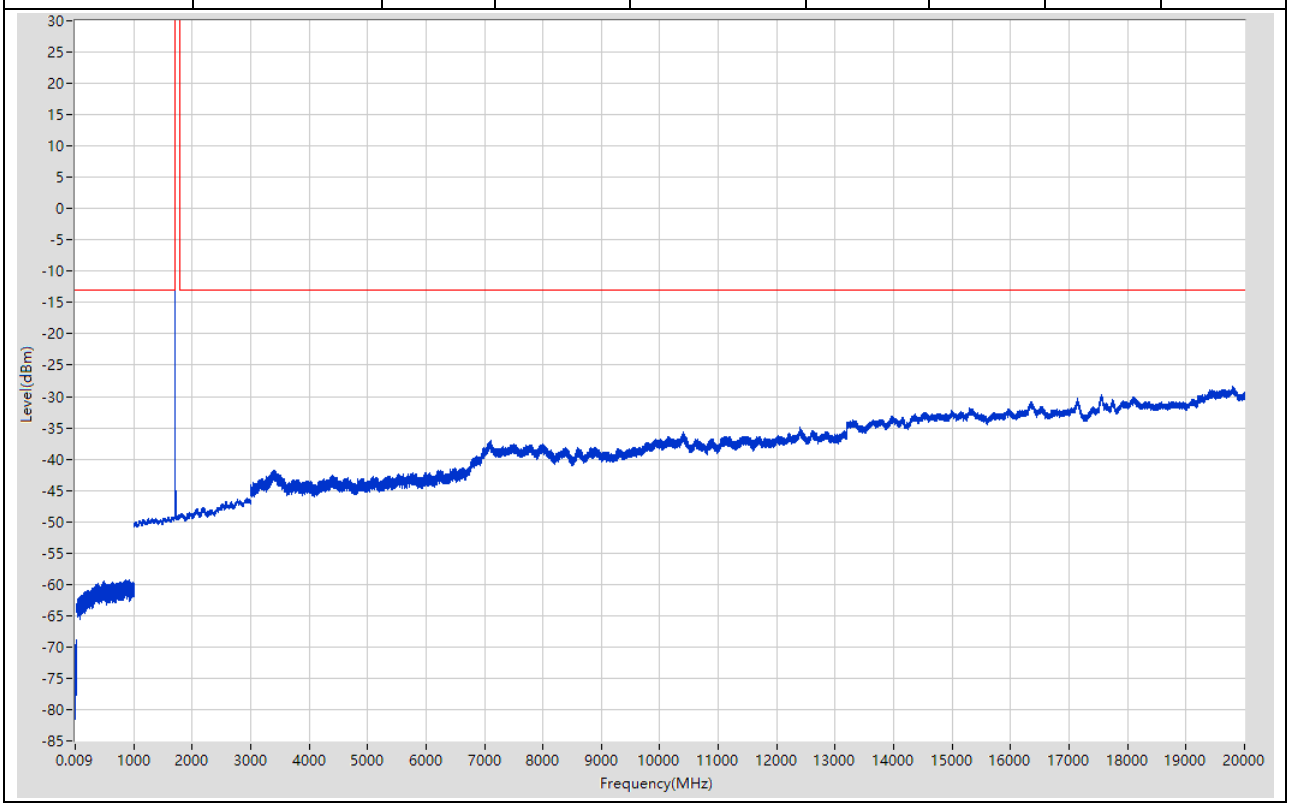

6.2. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:2, Channel:131979, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-71.9	-13	Pass	401
0.15	30	0.01	RMS	5.16	-69.3	-13	Pass	2986
30	1000	0.1	RMS	999.9	-59.17	-13	Pass	9701
1000	1700	1	RMS	1700	-48.83	-13	Pass	701
1700	1790	1	RMS	1710.125	21.31	60	Pass	401
1790	3000	1	RMS	2965	-46.17	-13	Pass	1211
3000	12000	1	RMS	10403	-35.87	-13	Pass	9002
12000	20000	1	RMS	19795	-28.42	-13	Pass	8001

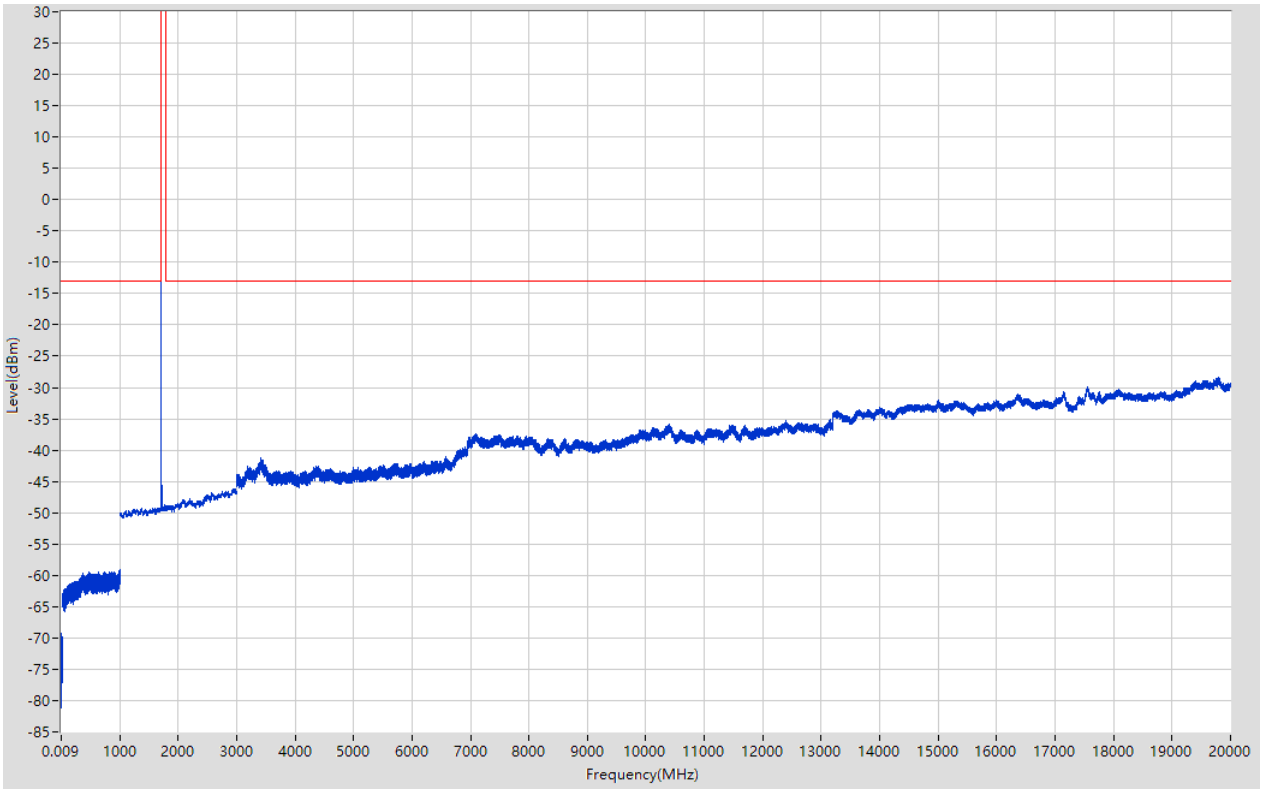

6.3. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:3, Channel:132322, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.47	-13	Pass	401
0.15	30	0.01	RMS	14.02	-69.4	-13	Pass	2986
30	1000	0.1	RMS	893.429	-59.43	-13	Pass	9701
1000	1700	1	RMS	1697	-49.07	-13	Pass	701
1700	1790	1	RMS	1744.55	22.28	60	Pass	401
1790	3000	1	RMS	2985	-46.13	-13	Pass	1211
3000	12000	1	RMS	10408	-35.96	-13	Pass	9002
12000	20000	1	RMS	19788	-28.56	-13	Pass	8001

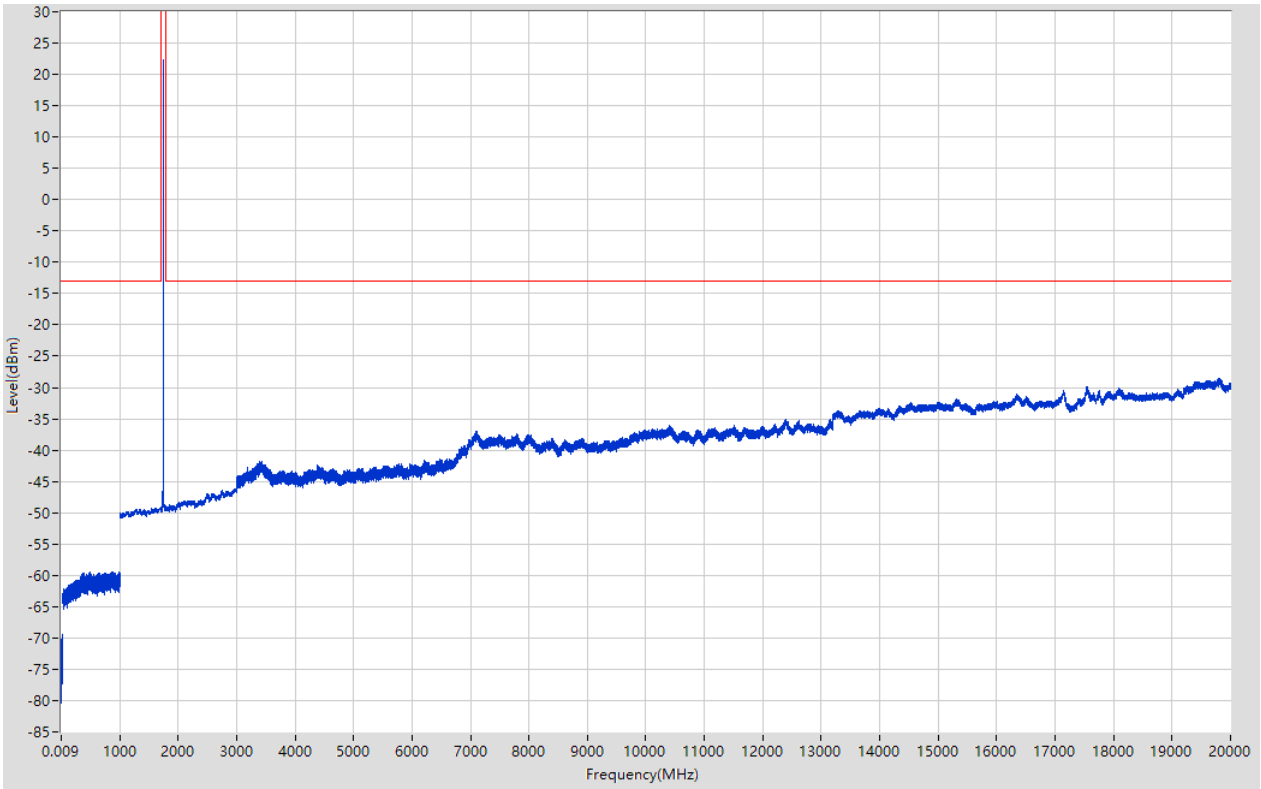

6.4. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:4, Channel:132322, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.036	-73.13	-13	Pass	401
0.15	30	0.01	RMS	0.18	-68.99	-13	Pass	2986
30	1000	0.1	RMS	478.6	-59.35	-13	Pass	9701
1000	1700	1	RMS	1660	-49.25	-13	Pass	701
1700	1790	1	RMS	1744.325	21.47	60	Pass	401
1790	3000	1	RMS	2931	-46.28	-13	Pass	1211
3000	12000	1	RMS	10391	-35.91	-13	Pass	9002
12000	20000	1	RMS	19795	-28.53	-13	Pass	8001

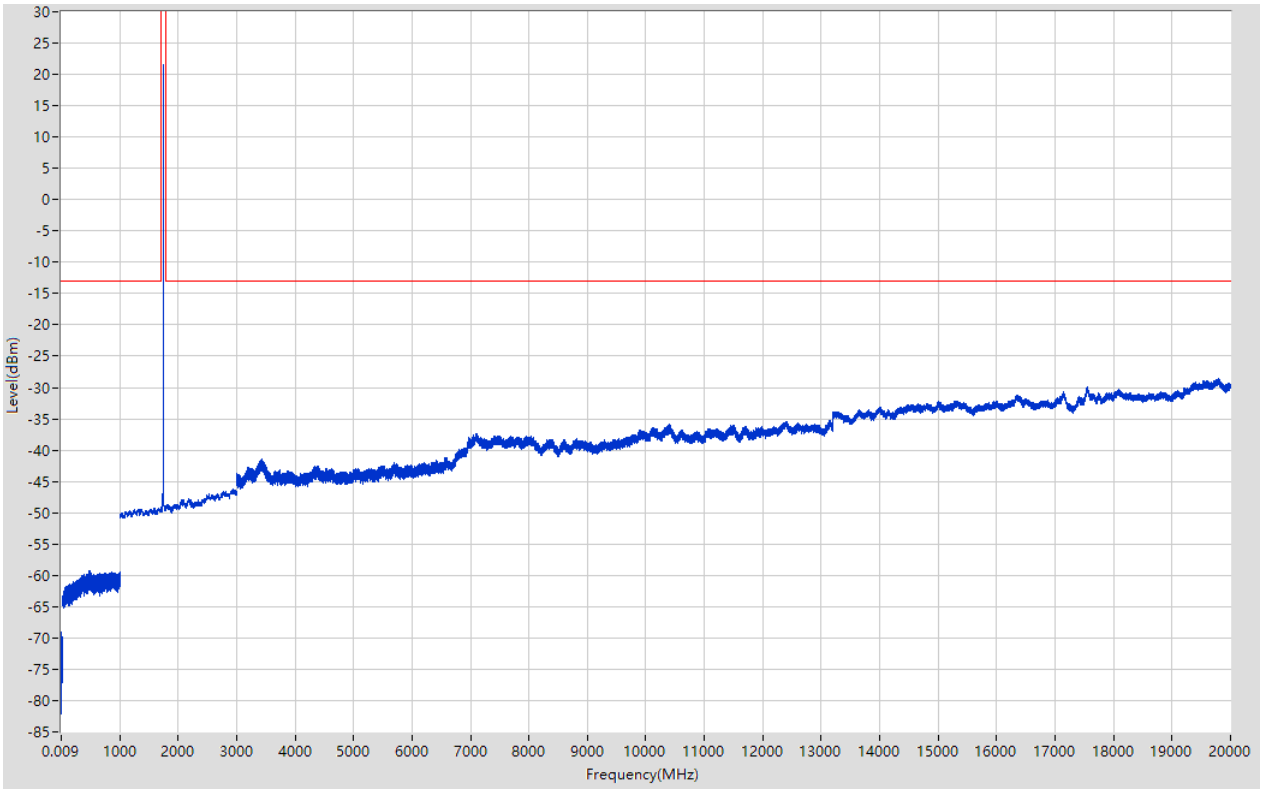

6.5. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:5, Channel:132665, Bandwidth:1.4, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-73.05	-13	Pass	401
0.15	30	0.01	RMS	1.22	-69.14	-13	Pass	2986
30	1000	0.1	RMS	865.611	-59.3	-13	Pass	9701
1000	1700	1	RMS	1588	-49.23	-13	Pass	701
1700	1790	1	RMS	1778.75	22.13	60	Pass	401
1790	3000	1	RMS	2935	-46.35	-13	Pass	1211
3000	12000	1	RMS	10406	-35.86	-13	Pass	9002
12000	20000	1	RMS	19820	-28.57	-13	Pass	8001

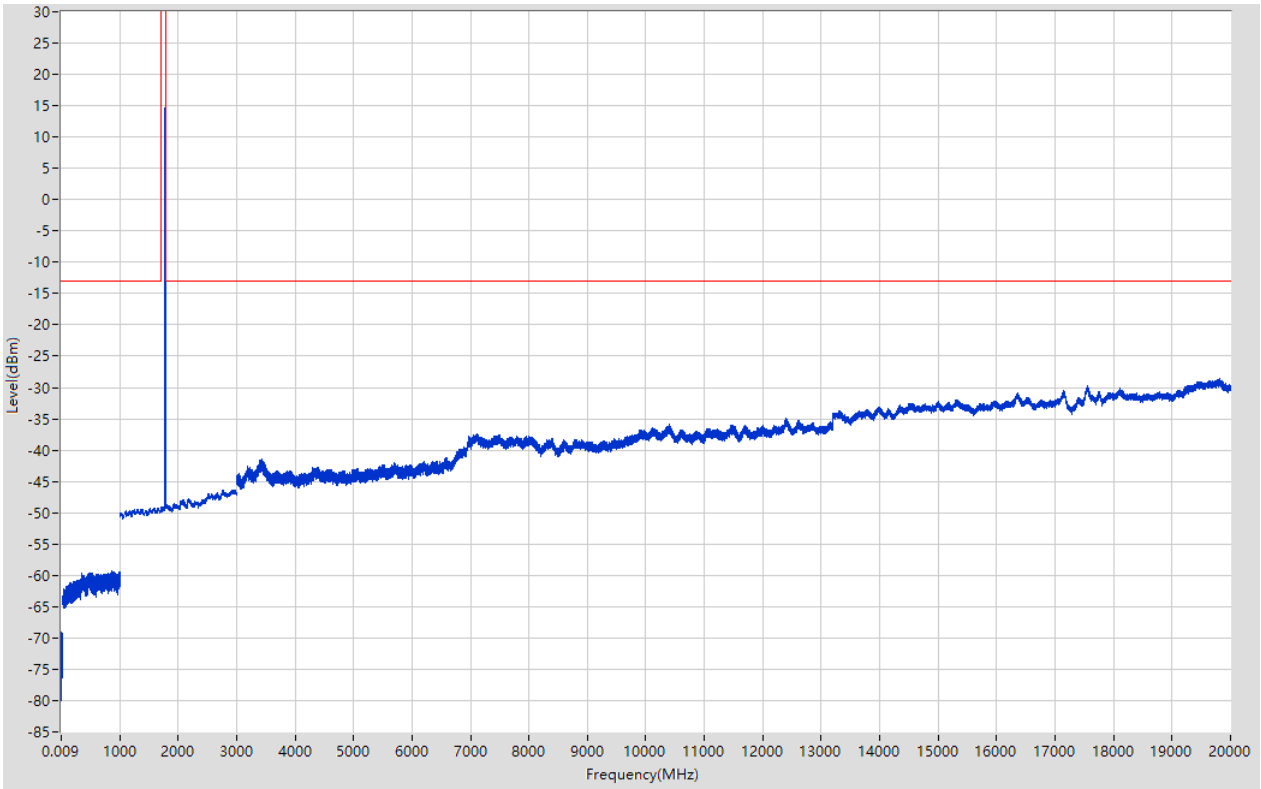

6.6. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:6, Channel:132665, Bandwidth:1.4, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-71.71	-13	Pass	401
0.15	30	0.01	RMS	1.27	-69.74	-13	Pass	2986
30	1000	0.1	RMS	475.7	-59.1	-13	Pass	9701
1000	1700	1	RMS	1658	-49.24	-13	Pass	701
1700	1790	1	RMS	1778.75	21.32	60	Pass	401
1790	3000	1	RMS	2920	-46.33	-13	Pass	1211
3000	12000	1	RMS	10399	-35.98	-13	Pass	9002
12000	20000	1	RMS	19783	-28.49	-13	Pass	8001

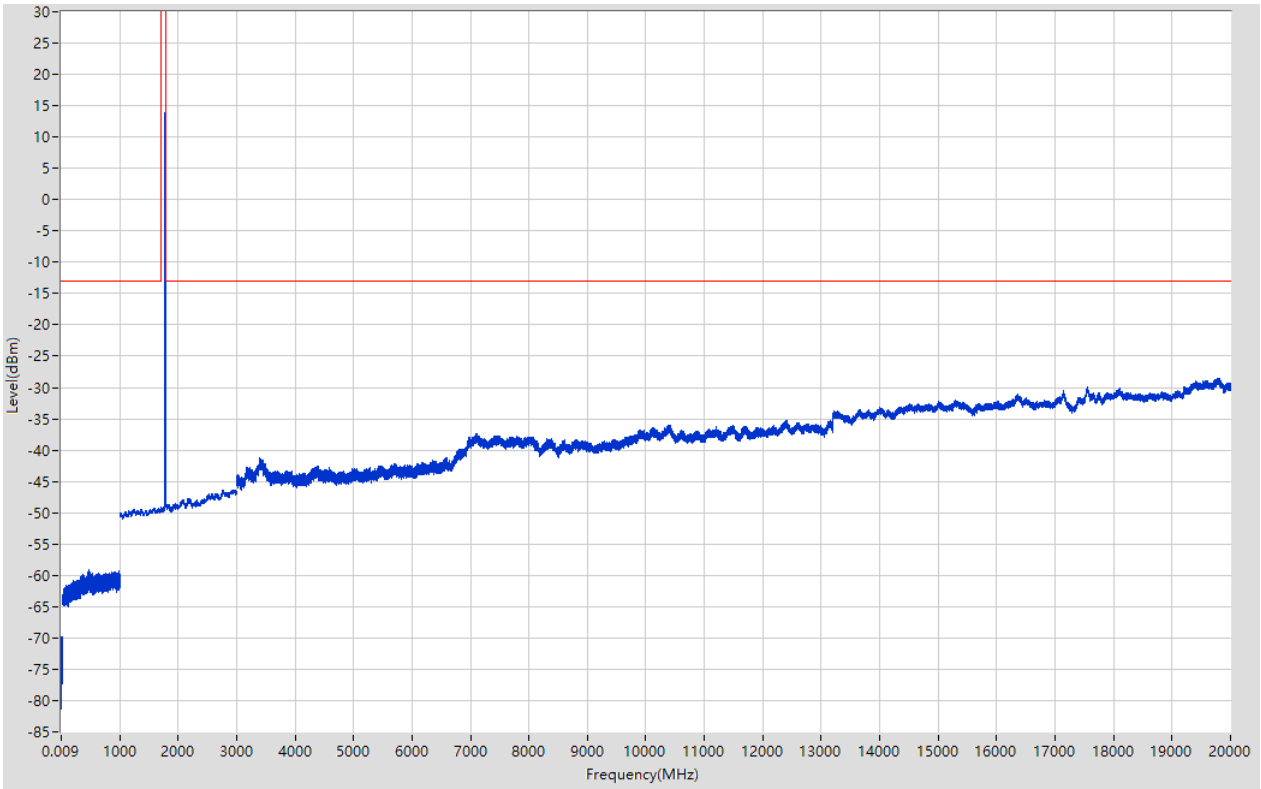

6.7. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:7, Channel:131987, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.85	-13	Pass	401
0.15	30	0.01	RMS	2.26	-69.31	-13	Pass	2986
30	1000	0.1	RMS	891.028	-59.35	-13	Pass	9701
1000	1700	1	RMS	1700	-48.47	-13	Pass	701
1700	1790	1	RMS	1710.125	22.3	60	Pass	401
1790	3000	1	RMS	2971	-46.09	-13	Pass	1211
3000	12000	1	RMS	11483	-36.04	-13	Pass	9002
12000	20000	1	RMS	19799	-28.46	-13	Pass	8001

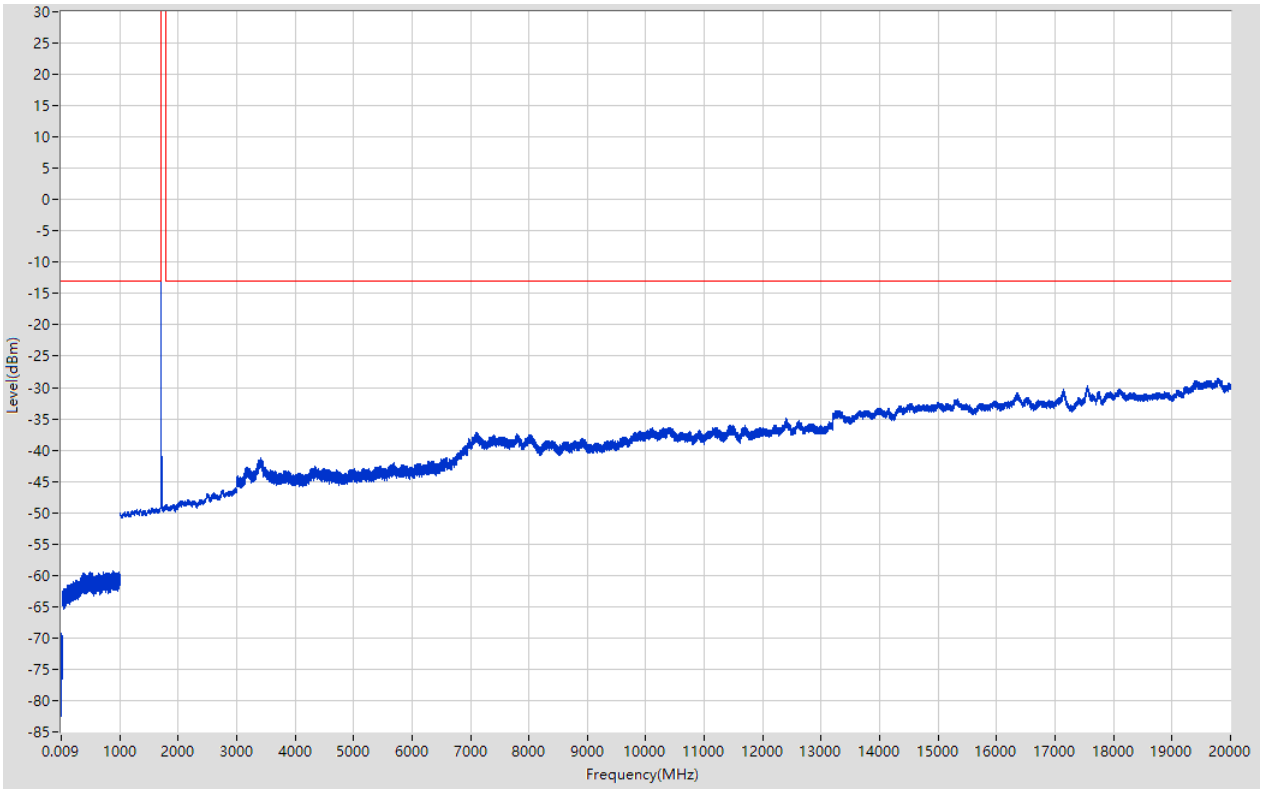

6.8. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:8, Channel:131987, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-73.41	-13	Pass	401
0.15	30	0.01	RMS	16.09	-69.77	-13	Pass	2986
30	1000	0.1	RMS	926.351	-59.04	-13	Pass	9701
1000	1700	1	RMS	1694	-49.14	-13	Pass	701
1700	1790	1	RMS	1710.125	21.37	60	Pass	401
1790	3000	1	RMS	2974	-46.08	-13	Pass	1211
3000	12000	1	RMS	10392	-36.27	-13	Pass	9002
12000	20000	1	RMS	19825	-28.68	-13	Pass	8001

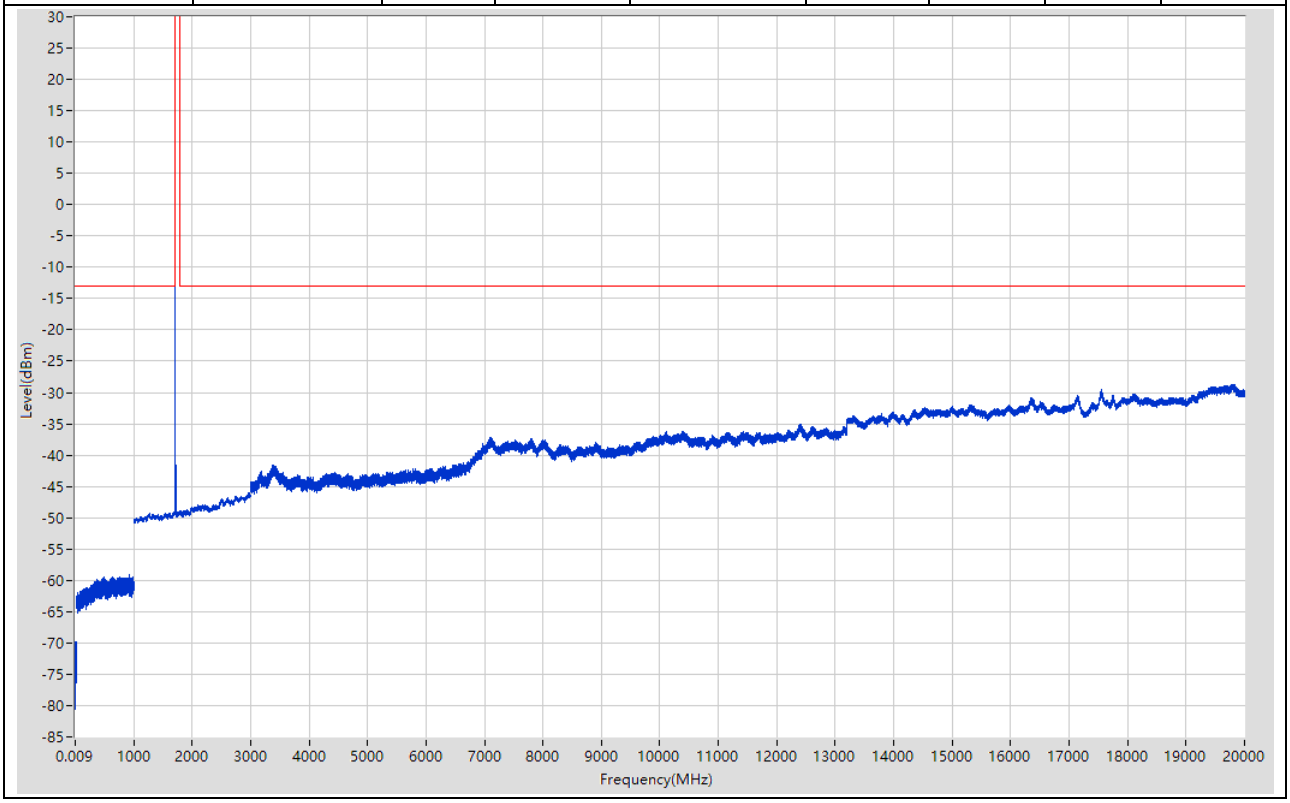

6.9. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:9, Channel:132322, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.93	-13	Pass	401
0.15	30	0.01	RMS	6.18	-69.01	-13	Pass	2986
30	1000	0.1	RMS	487.8	-59.38	-13	Pass	9701
1000	1700	1	RMS	1697	-49.16	-13	Pass	701
1700	1790	1	RMS	1743.65	22.29	60	Pass	401
1790	3000	1	RMS	2973	-46.21	-13	Pass	1211
3000	12000	1	RMS	10400	-35.91	-13	Pass	9002
12000	20000	1	RMS	19821	-28.63	-13	Pass	8001

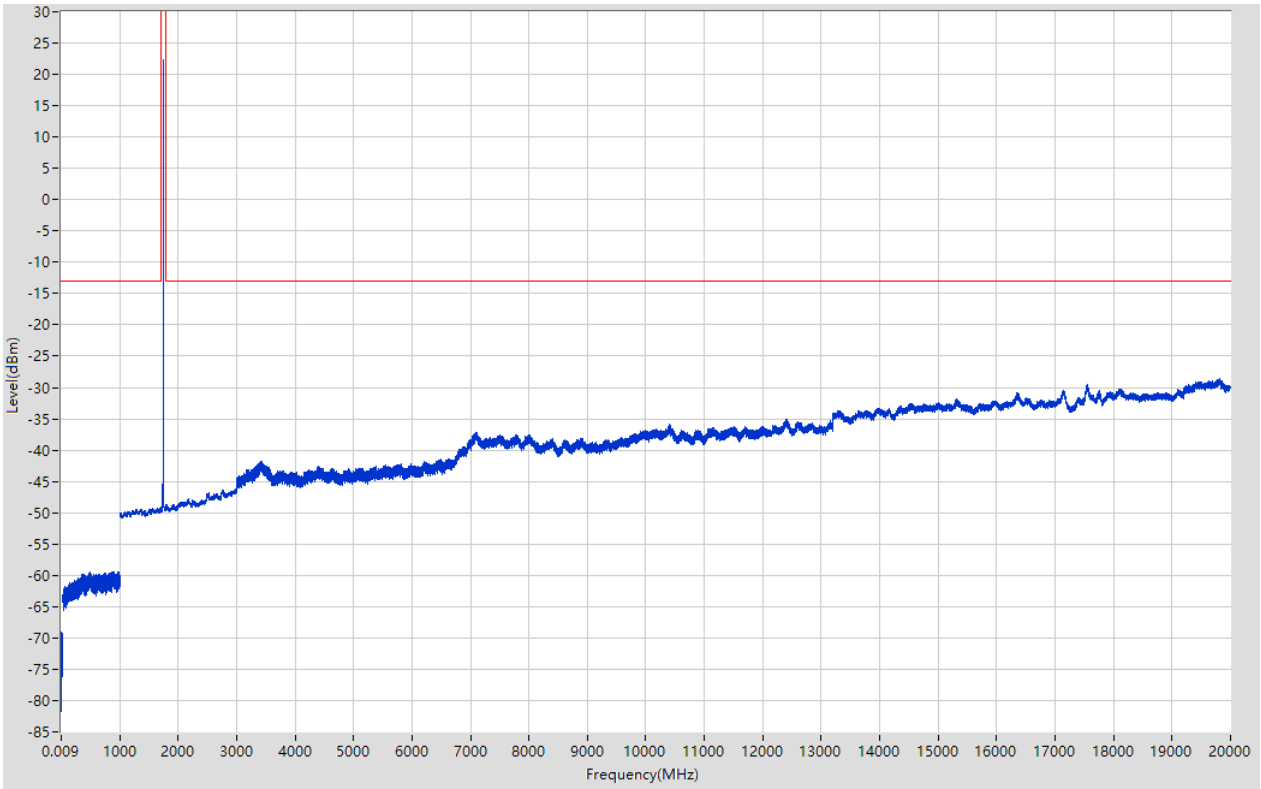

6.10. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:10, Channel:132322, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.037	-73.74	-13	Pass	401
0.15	30	0.01	RMS	0.17	-69.65	-13	Pass	2986
30	1000	0.1	RMS	901.235	-59.25	-13	Pass	9701
1000	1700	1	RMS	1697	-48.99	-13	Pass	701
1700	1790	1	RMS	1743.65	21.64	60	Pass	401
1790	3000	1	RMS	2974	-46.11	-13	Pass	1211
3000	12000	1	RMS	10379	-35.98	-13	Pass	9002
12000	20000	1	RMS	19794	-28.47	-13	Pass	8001

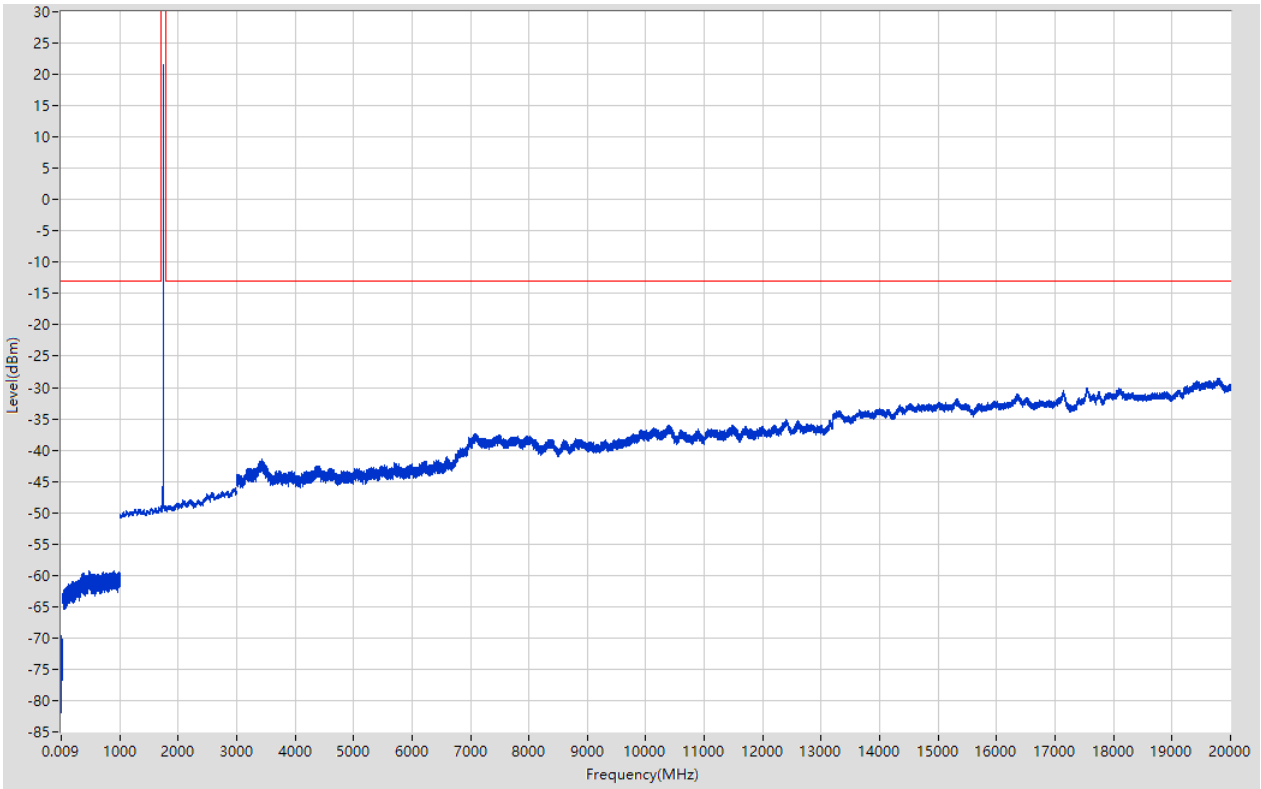

6.11. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:11, Channel:132657, Bandwidth:3, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.063	-74.15	-13	Pass	401
0.15	30	0.01	RMS	0.53	-69.47	-13	Pass	2986
30	1000	0.1	RMS	891.428	-59.4	-13	Pass	9701
1000	1700	1	RMS	1694	-49.17	-13	Pass	701
1700	1790	1	RMS	1777.175	22.04	60	Pass	401
1790	3000	1	RMS	2960	-46.18	-13	Pass	1211
3000	12000	1	RMS	11437	-36.23	-13	Pass	9002
12000	20000	1	RMS	19791	-28.72	-13	Pass	8001

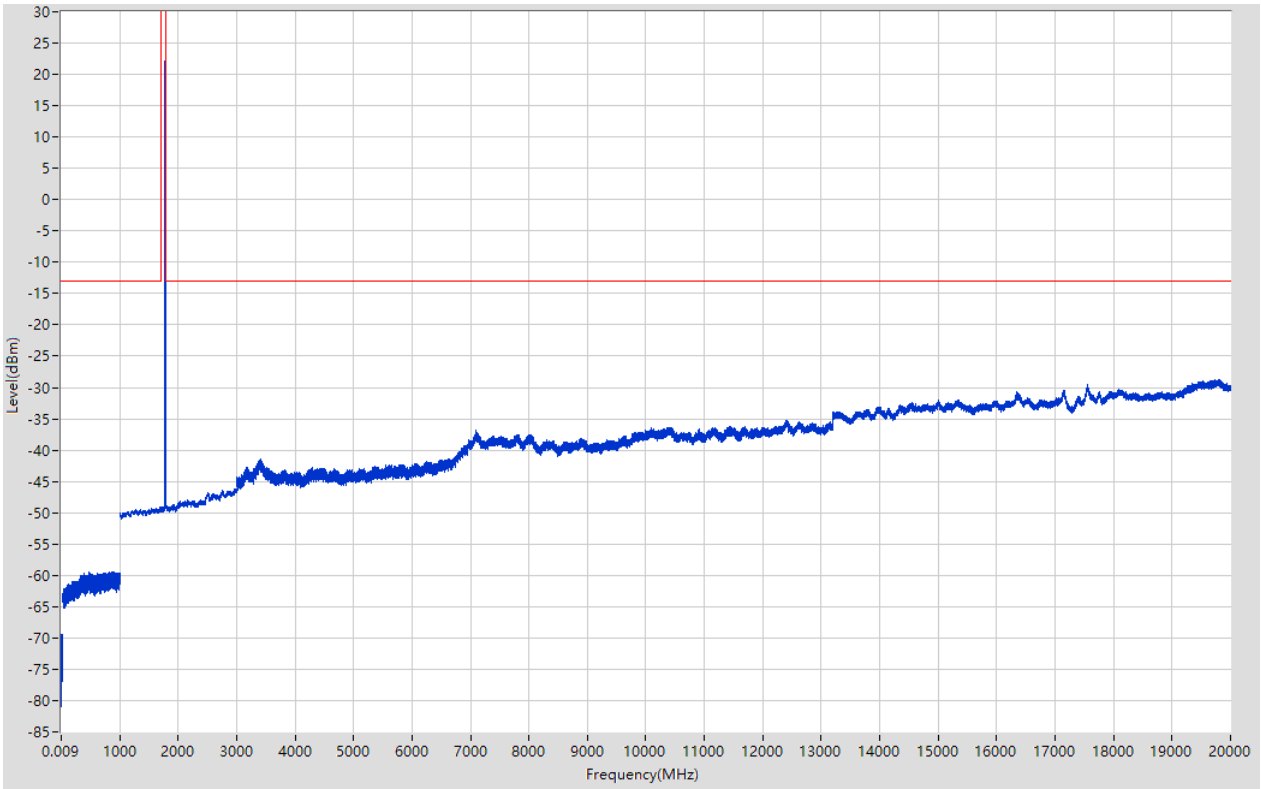

6.12. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:12, Channel:132657, Bandwidth:3, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.62	-13	Pass	401
0.15	30	0.01	RMS	5.86	-69.73	-13	Pass	2986
30	1000	0.1	RMS	882.822	-59.27	-13	Pass	9701
1000	1700	1	RMS	1690	-49.15	-13	Pass	701
1700	1790	1	RMS	1777.175	21.16	60	Pass	401
1790	3000	1	RMS	2982	-46.24	-13	Pass	1211
3000	12000	1	RMS	12000	-36.15	-13	Pass	9002
12000	20000	1	RMS	19789	-28.49	-13	Pass	8001

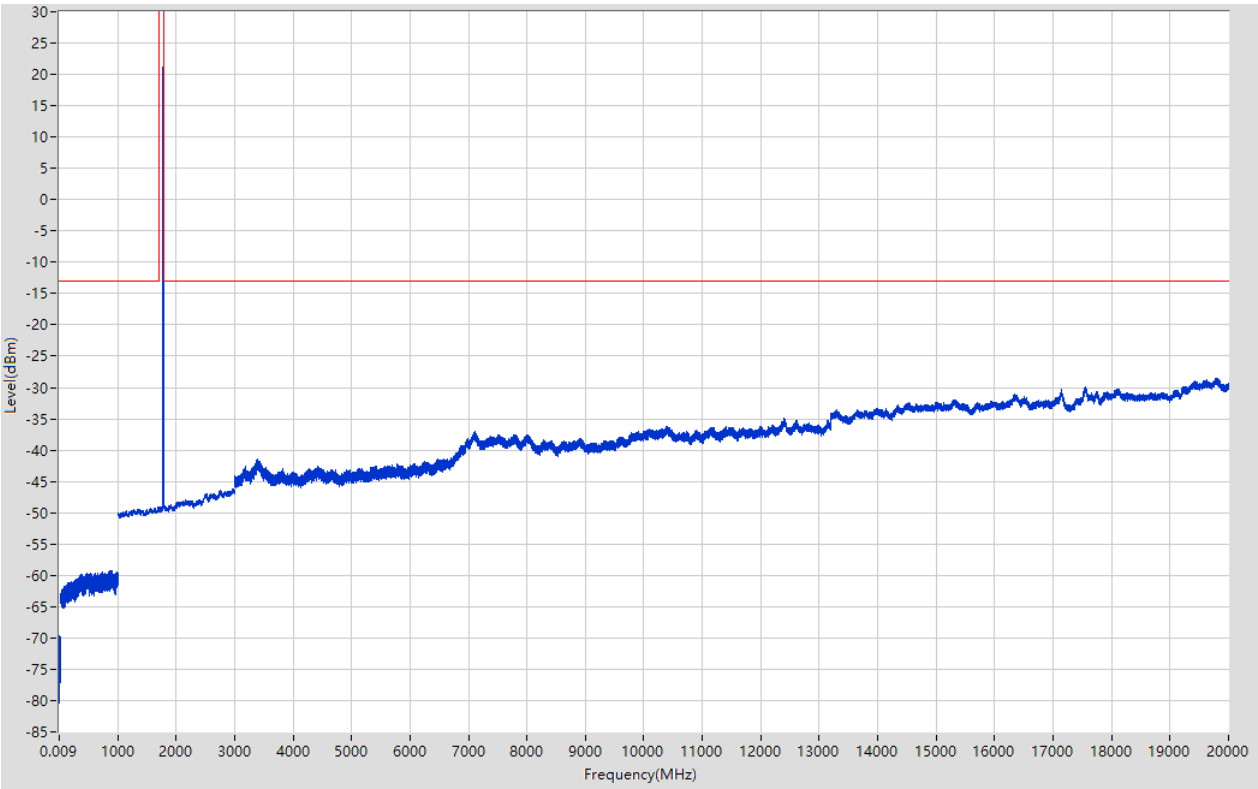

6.13. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:13, Channel:131997, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-72.61	-13	Pass	401
0.15	30	0.01	RMS	0.88	-69.15	-13	Pass	2986
30	1000	0.1	RMS	758.4	-59.35	-13	Pass	9701
1000	1700	1	RMS	1700	-48.21	-13	Pass	701
1700	1790	1	RMS	1710.125	22.33	60	Pass	401
1790	3000	1	RMS	2952	-46.1	-13	Pass	1211
3000	12000	1	RMS	10399	-35.91	-13	Pass	9002
12000	20000	1	RMS	19803	-28.42	-13	Pass	8001

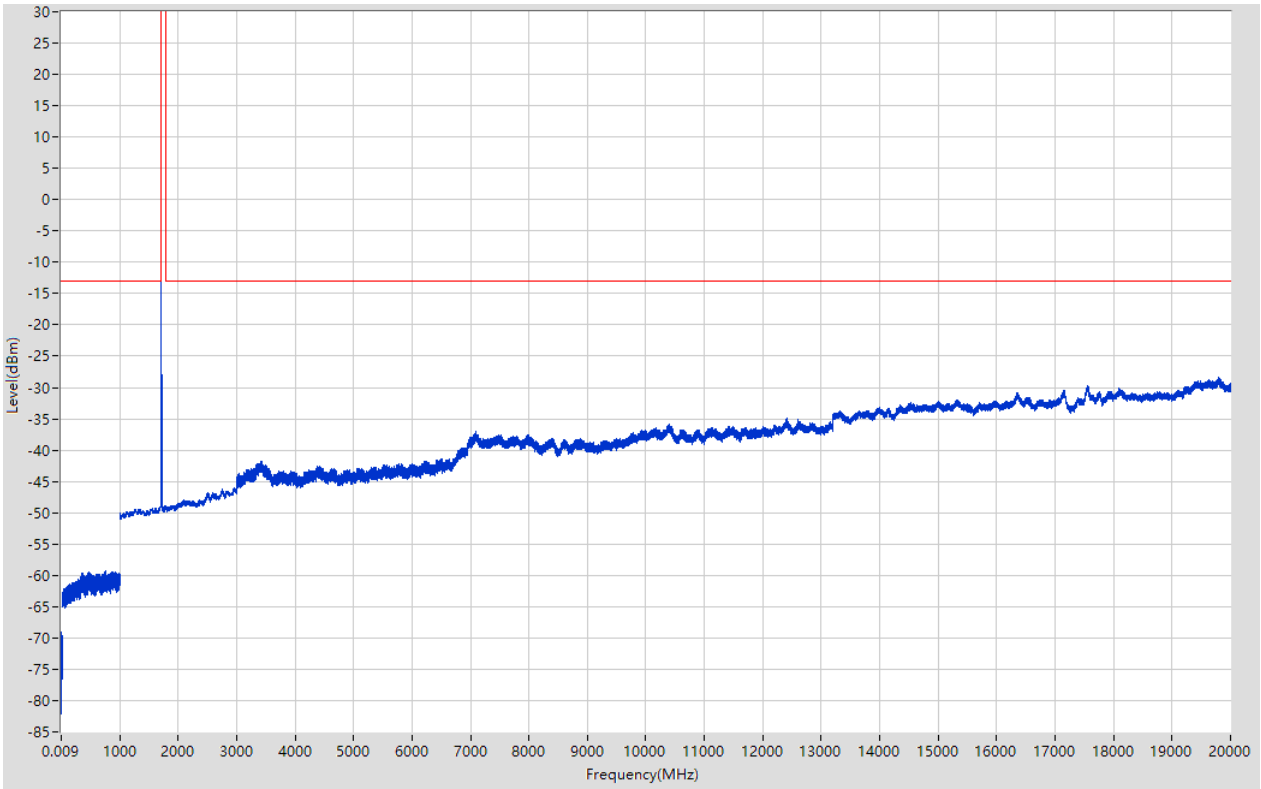

6.14. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:14, Channel:131997, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-71.71	-13	Pass	401
0.15	30	0.01	RMS	29.32	-69.07	-13	Pass	2986
30	1000	0.1	RMS	904.737	-58.87	-13	Pass	9701
1000	1700	1	RMS	1700	-48.47	-13	Pass	701
1700	1790	1	RMS	1710.125	21.28	60	Pass	401
1790	3000	1	RMS	2986	-46.18	-13	Pass	1211
3000	12000	1	RMS	11456	-36.15	-13	Pass	9002
12000	20000	1	RMS	19799	-28.41	-13	Pass	8001

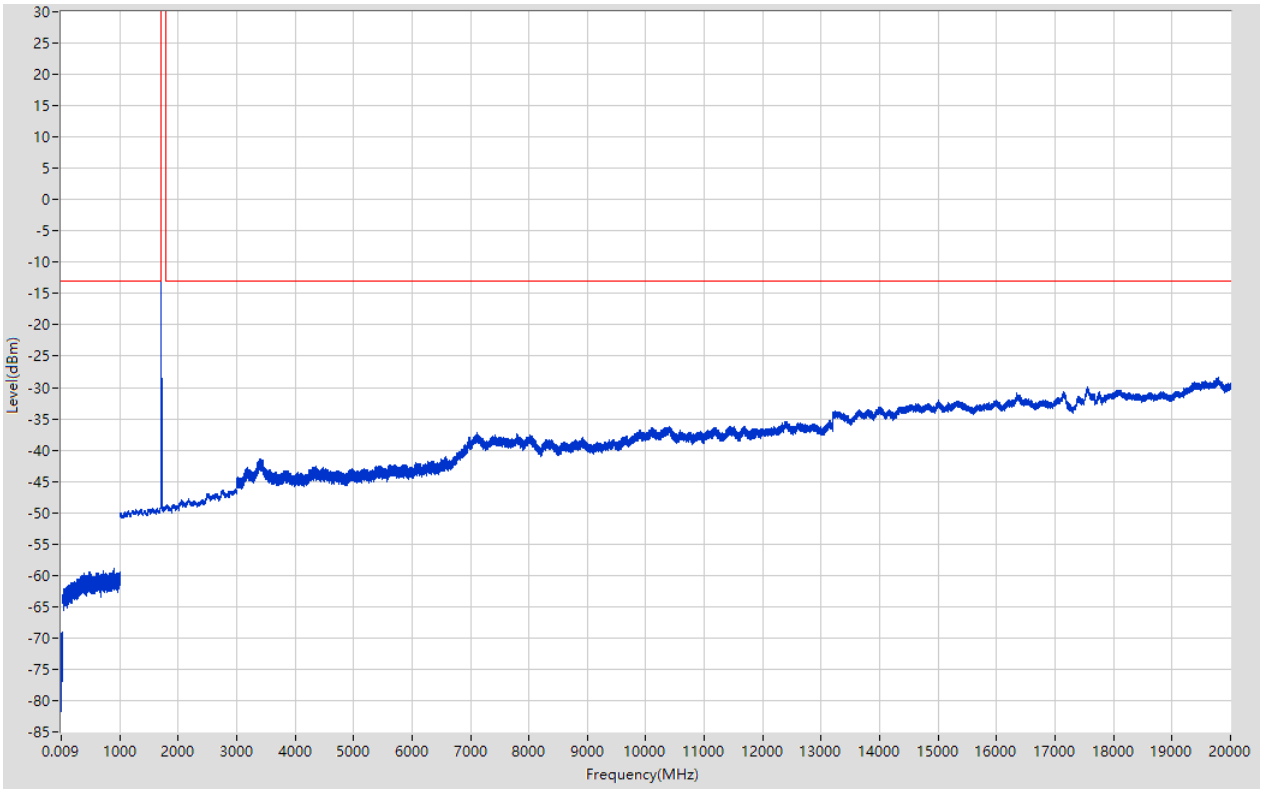

6.15. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:15, Channel:132322, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-72.27	-13	Pass	401
0.15	30	0.01	RMS	29.42	-69.49	-13	Pass	2986
30	1000	0.1	RMS	915.344	-59.24	-13	Pass	9701
1000	1700	1	RMS	1591	-49.13	-13	Pass	701
1700	1790	1	RMS	1742.75	22.34	60	Pass	401
1790	3000	1	RMS	2984	-46.23	-13	Pass	1211
3000	12000	1	RMS	10384	-36.02	-13	Pass	9002
12000	20000	1	RMS	19806	-28.45	-13	Pass	8001

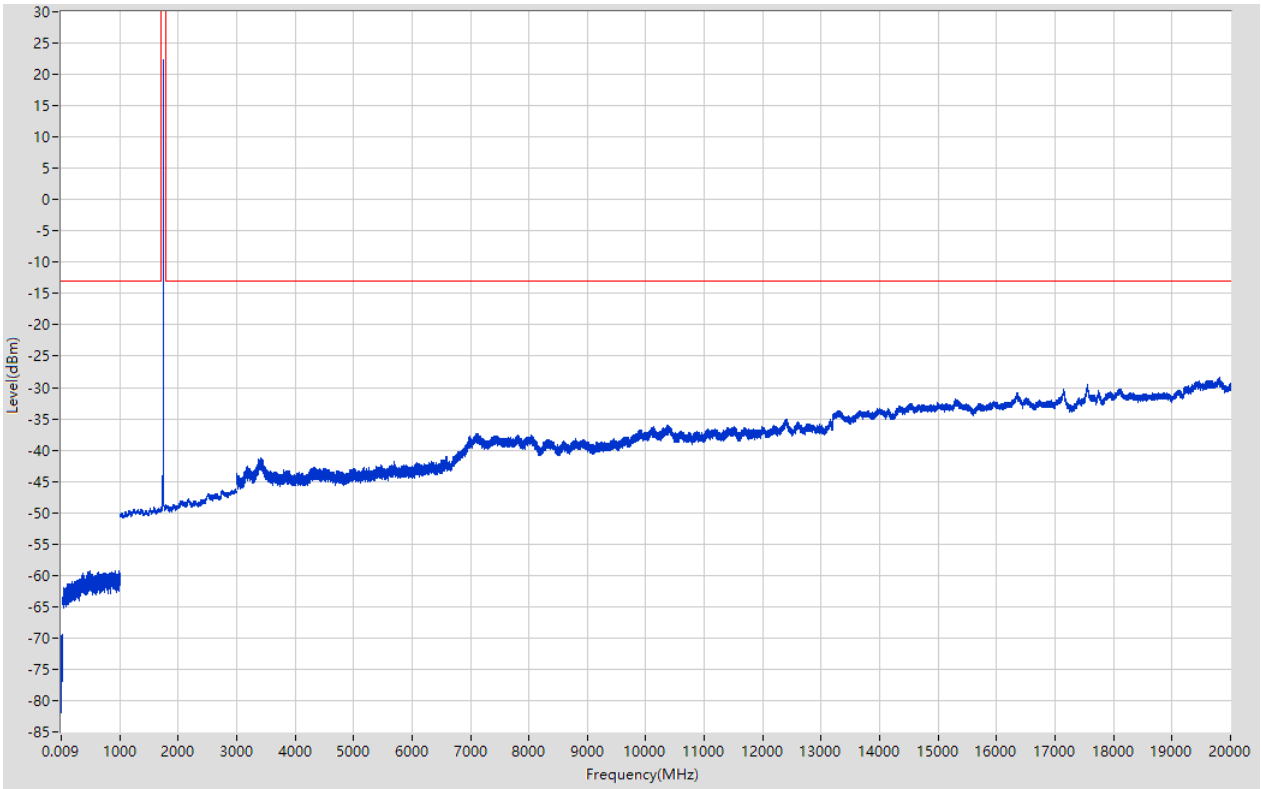

6.16. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:16, Channel:132322, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.016	-72.35	-13	Pass	401
0.15	30	0.01	RMS	2.91	-69.13	-13	Pass	2986
30	1000	0.1	RMS	469.8	-59.39	-13	Pass	9701
1000	1700	1	RMS	1697	-49.18	-13	Pass	701
1700	1790	1	RMS	1742.75	21.63	60	Pass	401
1790	3000	1	RMS	2984	-46.14	-13	Pass	1211
3000	12000	1	RMS	11501	-35.87	-13	Pass	9002
12000	20000	1	RMS	19818	-28.72	-13	Pass	8001

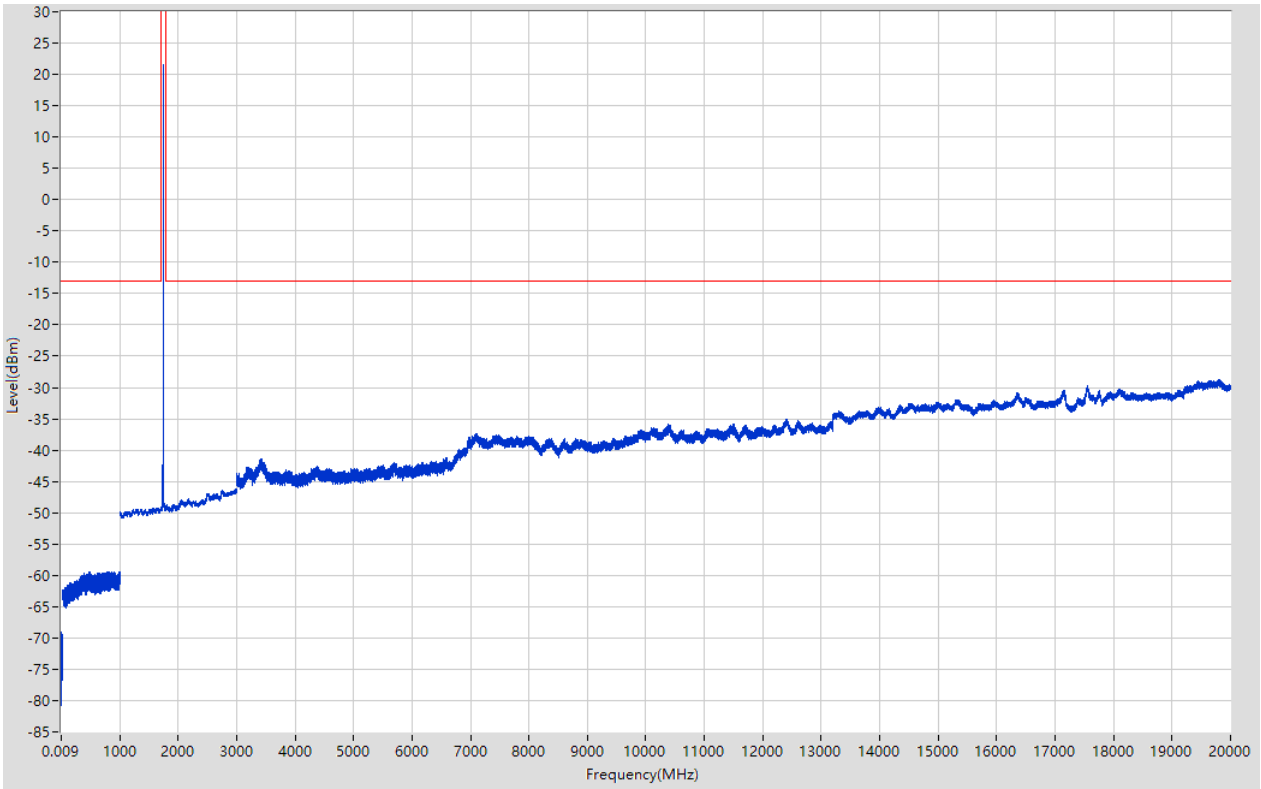

6.17. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:17, Channel:132647, Bandwidth:5, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-73.62	-13	Pass	401
0.15	30	0.01	RMS	27.99	-68.56	-13	Pass	2986
30	1000	0.1	RMS	878.419	-59.36	-13	Pass	9701
1000	1700	1	RMS	1696	-49.15	-13	Pass	701
1700	1790	1	RMS	1775.15	22.17	60	Pass	401
1790	3000	1	RMS	2931	-46.37	-13	Pass	1211
3000	12000	1	RMS	11465	-36.03	-13	Pass	9002
12000	20000	1	RMS	19795	-28.5	-13	Pass	8001

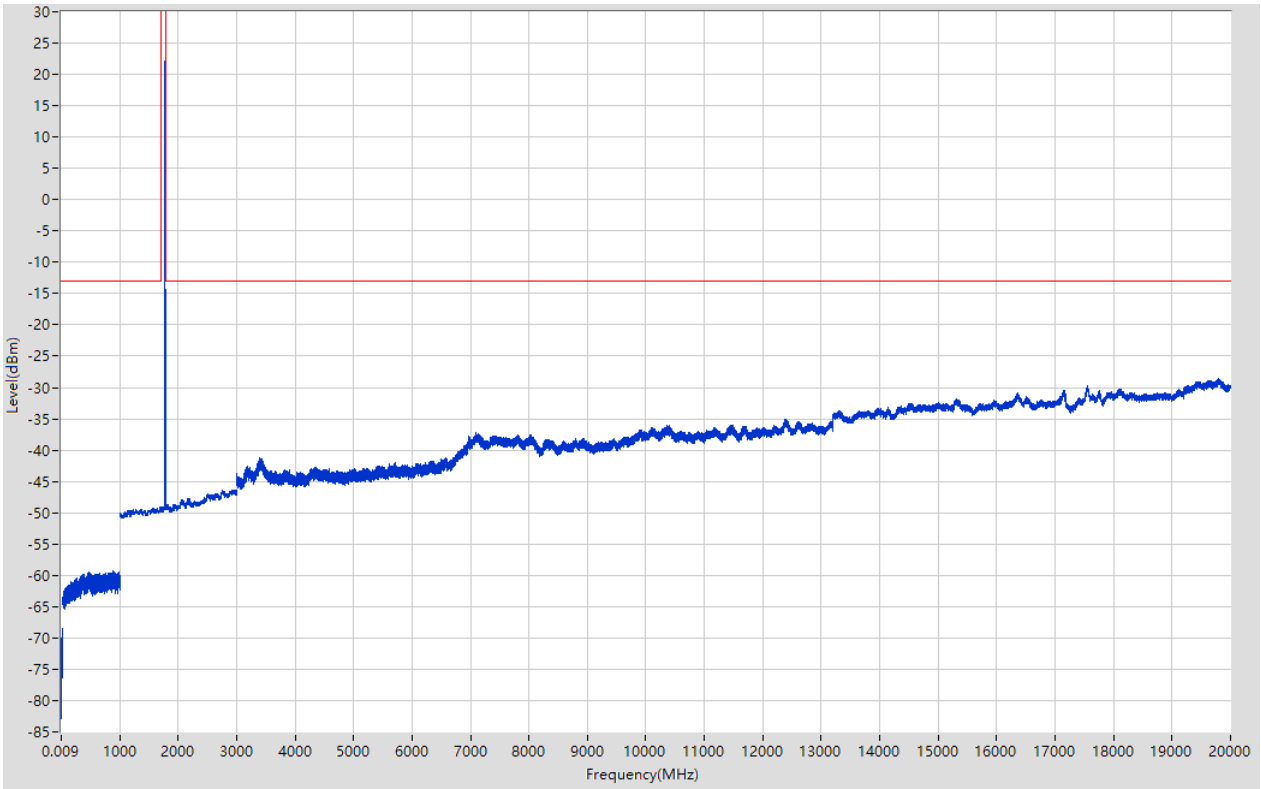

6.18. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:18, Channel:132647, Bandwidth:5, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.63	-13	Pass	401
0.15	30	0.01	RMS	20.08	-69.6	-13	Pass	2986
30	1000	0.1	RMS	852.202	-59.1	-13	Pass	9701
1000	1700	1	RMS	1659	-49.19	-13	Pass	701
1700	1790	1	RMS	1775.15	21.42	60	Pass	401
1790	3000	1	RMS	2969	-46.09	-13	Pass	1211
3000	12000	1	RMS	11474	-35.81	-13	Pass	9002
12000	20000	1	RMS	19801	-28.78	-13	Pass	8001

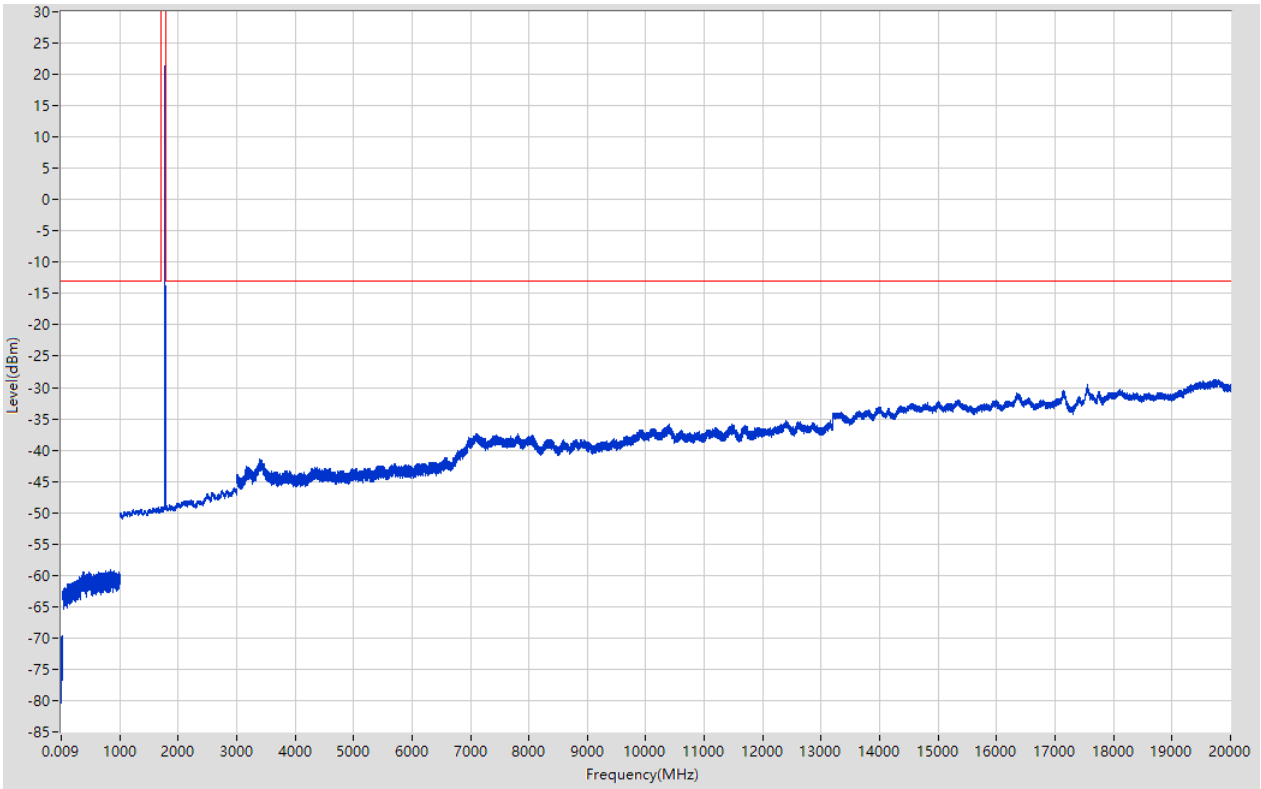

6.19. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:19, Channel:132022, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.07	-73.52	-13	Pass	401
0.15	30	0.01	RMS	25.81	-69.58	-13	Pass	2986
30	1000	0.1	RMS	856.305	-59.18	-13	Pass	9701
1000	1700	1	RMS	1693	-47.84	-13	Pass	701
1700	1790	1	RMS	1710.575	22.33	60	Pass	401
1790	3000	1	RMS	2971	-46.01	-13	Pass	1211
3000	12000	1	RMS	10395	-35.84	-13	Pass	9002
12000	20000	1	RMS	19807	-28.45	-13	Pass	8001

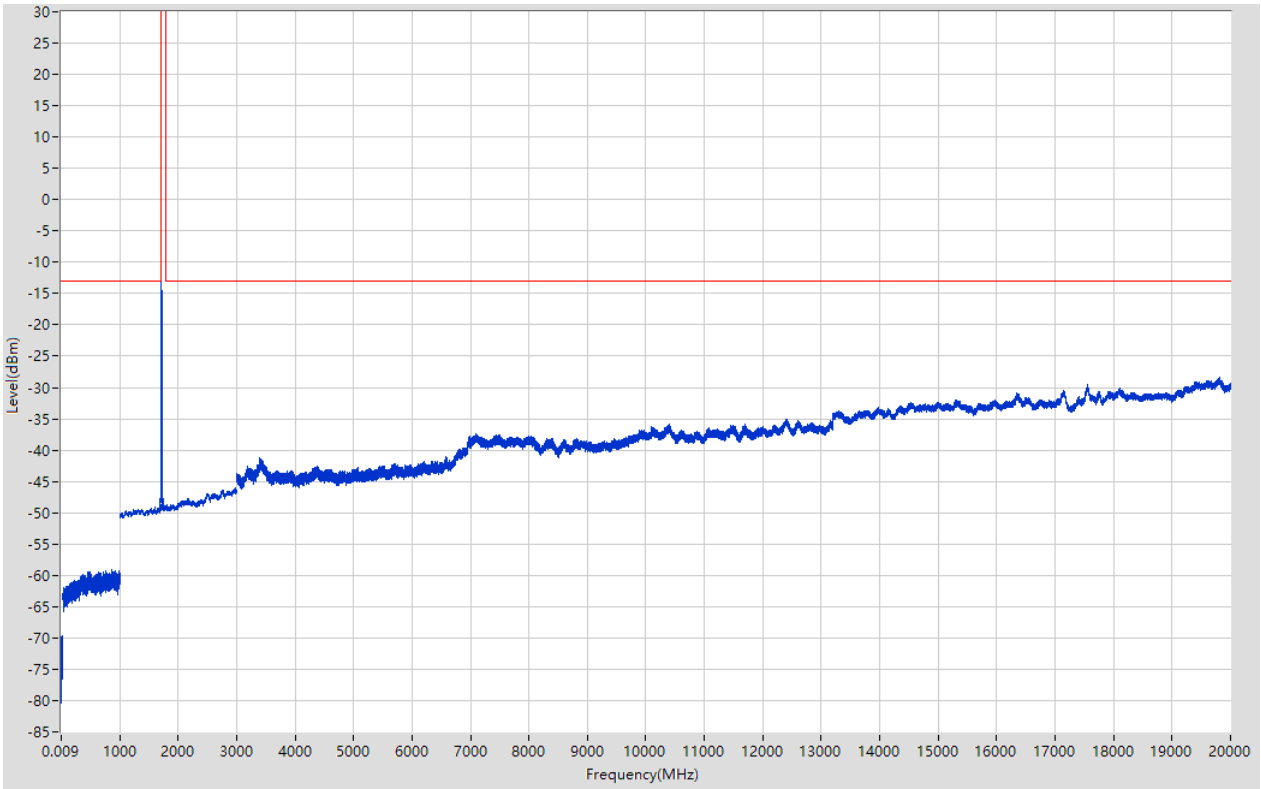

6.20. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:20, Channel:132022, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-73.25	-13	Pass	401
0.15	30	0.01	RMS	25.54	-69.58	-13	Pass	2986
30	1000	0.1	RMS	996.698	-59.28	-13	Pass	9701
1000	1700	1	RMS	1693	-47.64	-13	Pass	701
1700	1790	1	RMS	1710.575	21.37	60	Pass	401
1790	3000	1	RMS	2961	-46.12	-13	Pass	1211
3000	12000	1	RMS	10407	-36.19	-13	Pass	9002
12000	20000	1	RMS	19786	-28.44	-13	Pass	8001

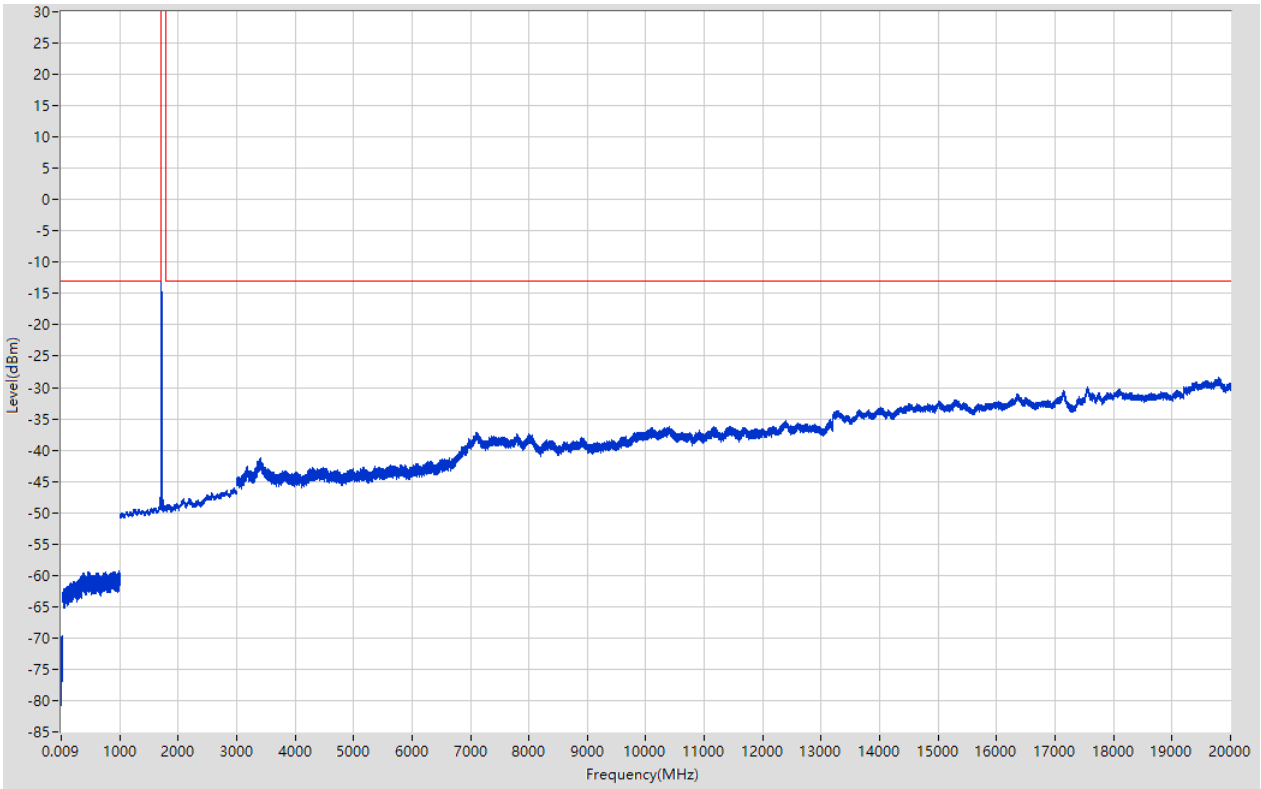

6.21. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:21, Channel:132322, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.58	-13	Pass	401
0.15	30	0.01	RMS	0.21	-69.24	-13	Pass	2986
30	1000	0.1	RMS	918.446	-59.3	-13	Pass	9701
1000	1700	1	RMS	1692	-49.25	-13	Pass	701
1700	1790	1	RMS	1740.5	22.15	60	Pass	401
1790	3000	1	RMS	2980	-46.12	-13	Pass	1211
3000	12000	1	RMS	11481	-35.98	-13	Pass	9002
12000	20000	1	RMS	19803	-28.4	-13	Pass	8001

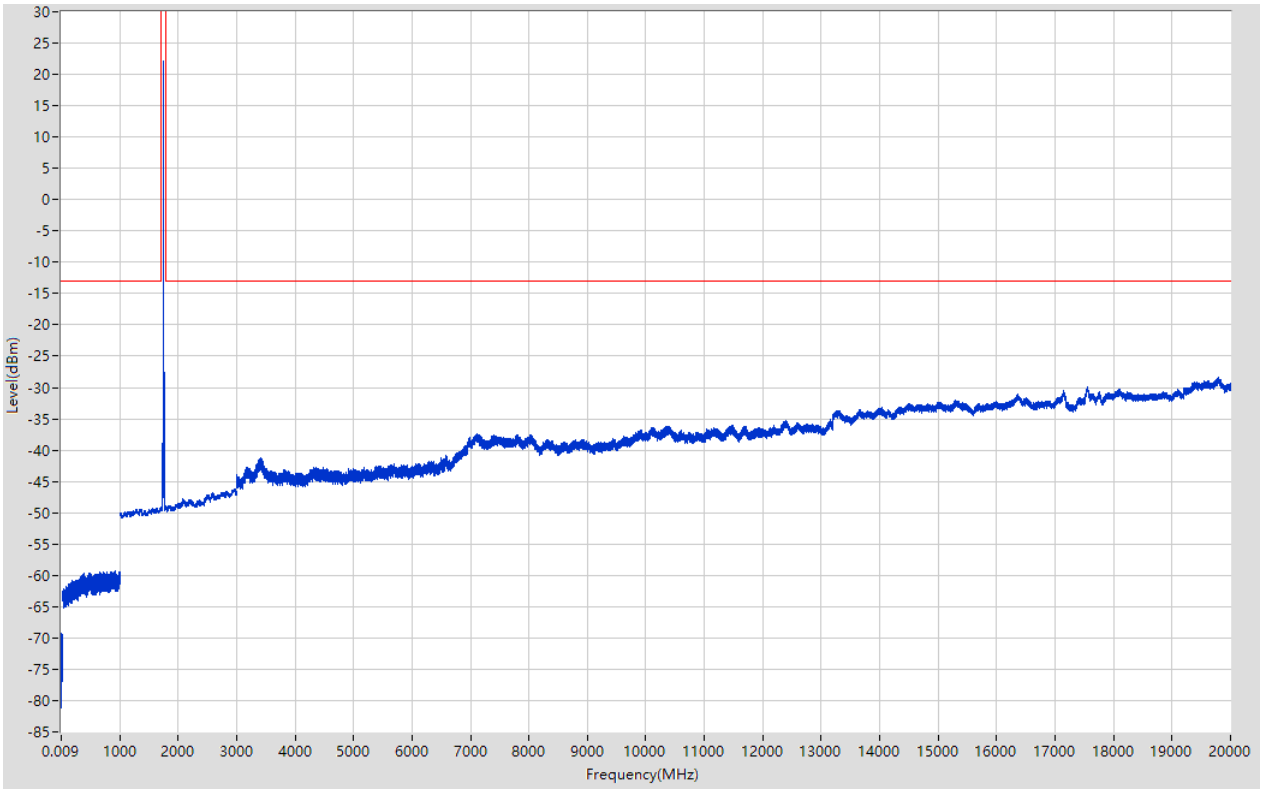

6.22. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:22, Channel:132322, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-73.13	-13	Pass	401
0.15	30	0.01	RMS	0.17	-68.95	-13	Pass	2986
30	1000	0.1	RMS	986.991	-59.25	-13	Pass	9701
1000	1700	1	RMS	1687	-49.23	-13	Pass	701
1700	1790	1	RMS	1740.5	21.26	60	Pass	401
1790	3000	1	RMS	2971	-46.28	-13	Pass	1211
3000	12000	1	RMS	11701	-35.98	-13	Pass	9002
12000	20000	1	RMS	19770	-28.62	-13	Pass	8001

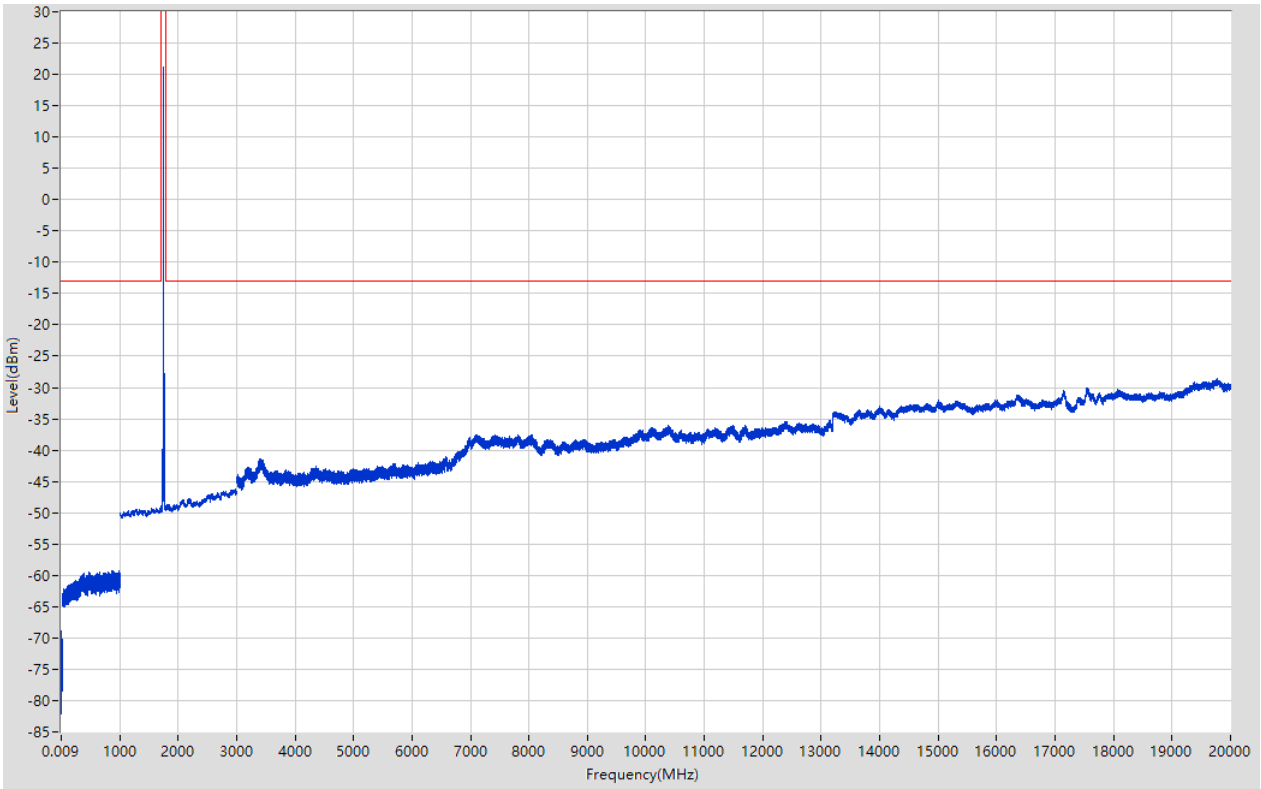

6.23. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:23, Channel:132622, Bandwidth:10, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.015	-72.36	-13	Pass	401
0.15	30	0.01	RMS	22.95	-69.78	-13	Pass	2986
30	1000	0.1	RMS	760.3	-59.26	-13	Pass	9701
1000	1700	1	RMS	1692	-49.17	-13	Pass	701
1700	1790	1	RMS	1770.425	22.05	60	Pass	401
1790	3000	1	RMS	2965	-46.15	-13	Pass	1211
3000	12000	1	RMS	10424	-36.13	-13	Pass	9002
12000	20000	1	RMS	19802	-28.78	-13	Pass	8001

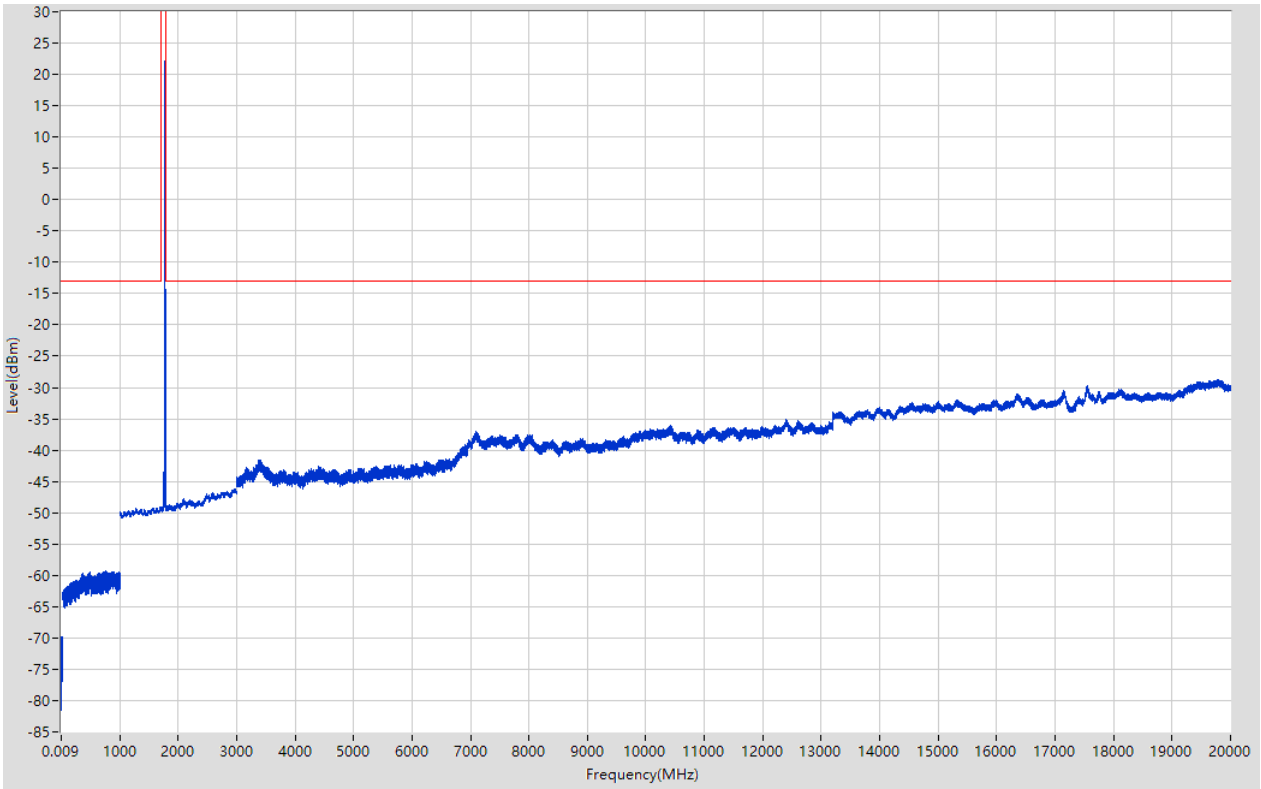

6.24. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:24, Channel:132622, Bandwidth:10, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.55	-13	Pass	401
0.15	30	0.01	RMS	26.82	-69.61	-13	Pass	2986
30	1000	0.1	RMS	859.407	-59.27	-13	Pass	9701
1000	1700	1	RMS	1688	-49.22	-13	Pass	701
1700	1790	1	RMS	1770.425	21.24	60	Pass	401
1790	3000	1	RMS	2965	-46.17	-13	Pass	1211
3000	12000	1	RMS	10405	-35.89	-13	Pass	9002
12000	20000	1	RMS	19805	-28.5	-13	Pass	8001

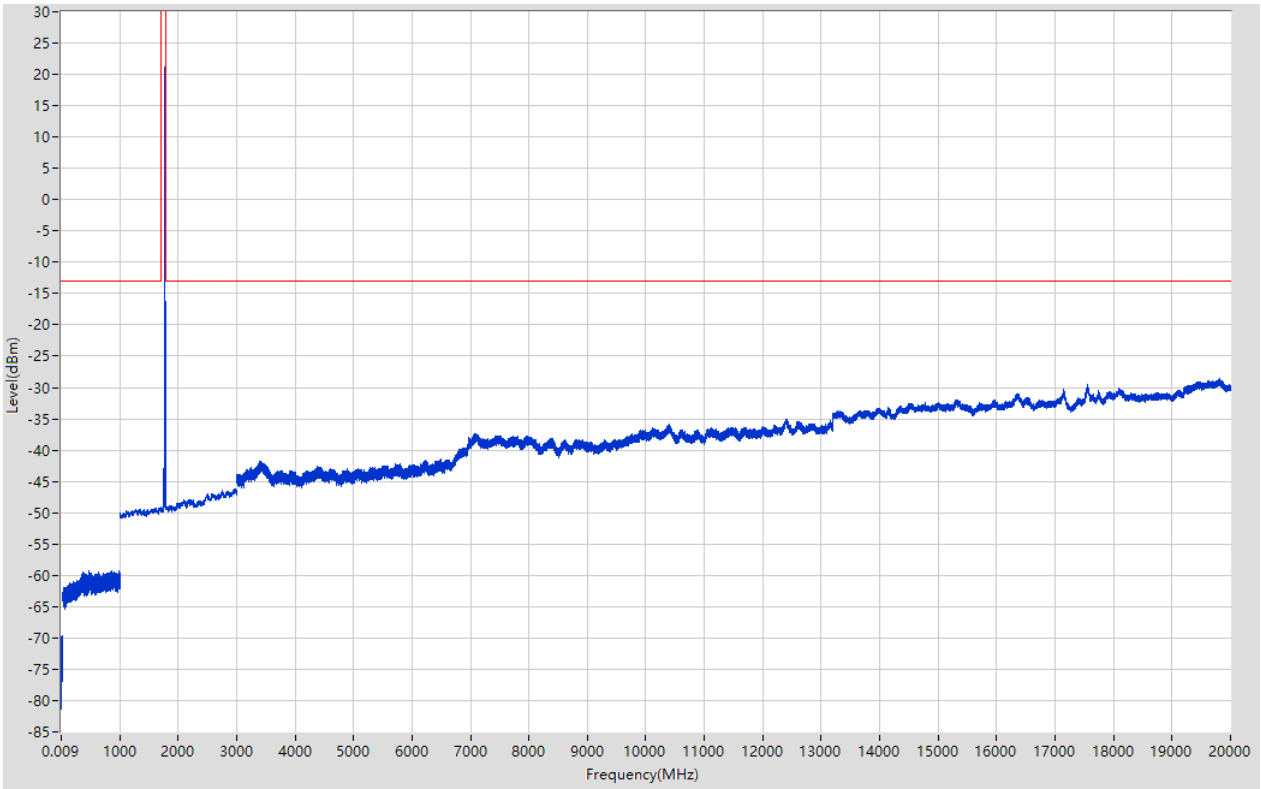

6.25. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:25, Channel:132047, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.055	-73.81	-13	Pass	401
0.15	30	0.01	RMS	21.11	-69.7	-13	Pass	2986
30	1000	0.1	RMS	822.9	-59.41	-13	Pass	9701
1000	1700	1	RMS	1698	-44.64	-13	Pass	701
1700	1790	1	RMS	1710.8	22.36	60	Pass	401
1790	3000	1	RMS	2966	-46.31	-13	Pass	1211
3000	12000	1	RMS	11454	-36.19	-13	Pass	9002
12000	20000	1	RMS	19806	-28.72	-13	Pass	8001

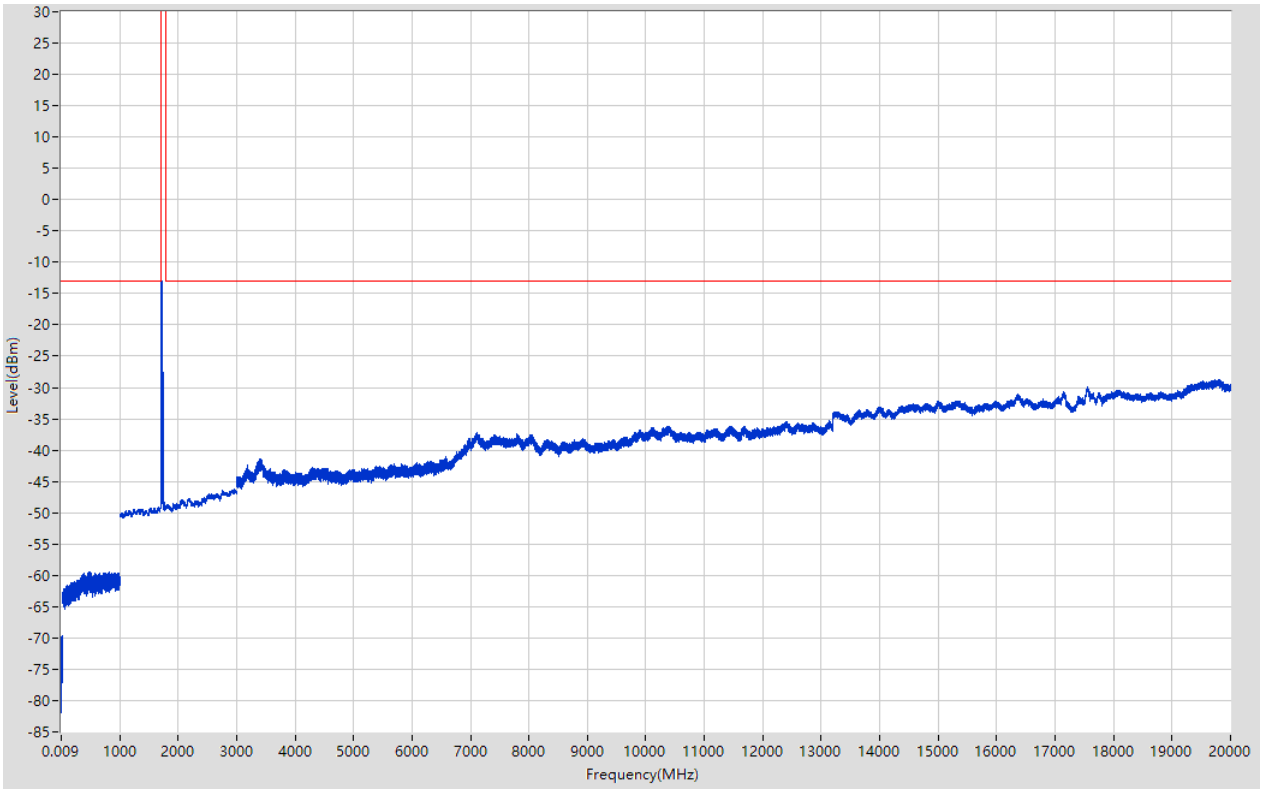

6.26. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:26, Channel:132047, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.13	-73.8	-13	Pass	401
0.15	30	0.01	RMS	9.94	-69.89	-13	Pass	2986
30	1000	0.1	RMS	893.229	-59.37	-13	Pass	9701
1000	1700	1	RMS	1698	-45.78	-13	Pass	701
1700	1790	1	RMS	1710.8	21.4	60	Pass	401
1790	3000	1	RMS	2928	-46.25	-13	Pass	1211
3000	12000	1	RMS	10403	-35.91	-13	Pass	9002
12000	20000	1	RMS	19824	-28.57	-13	Pass	8001

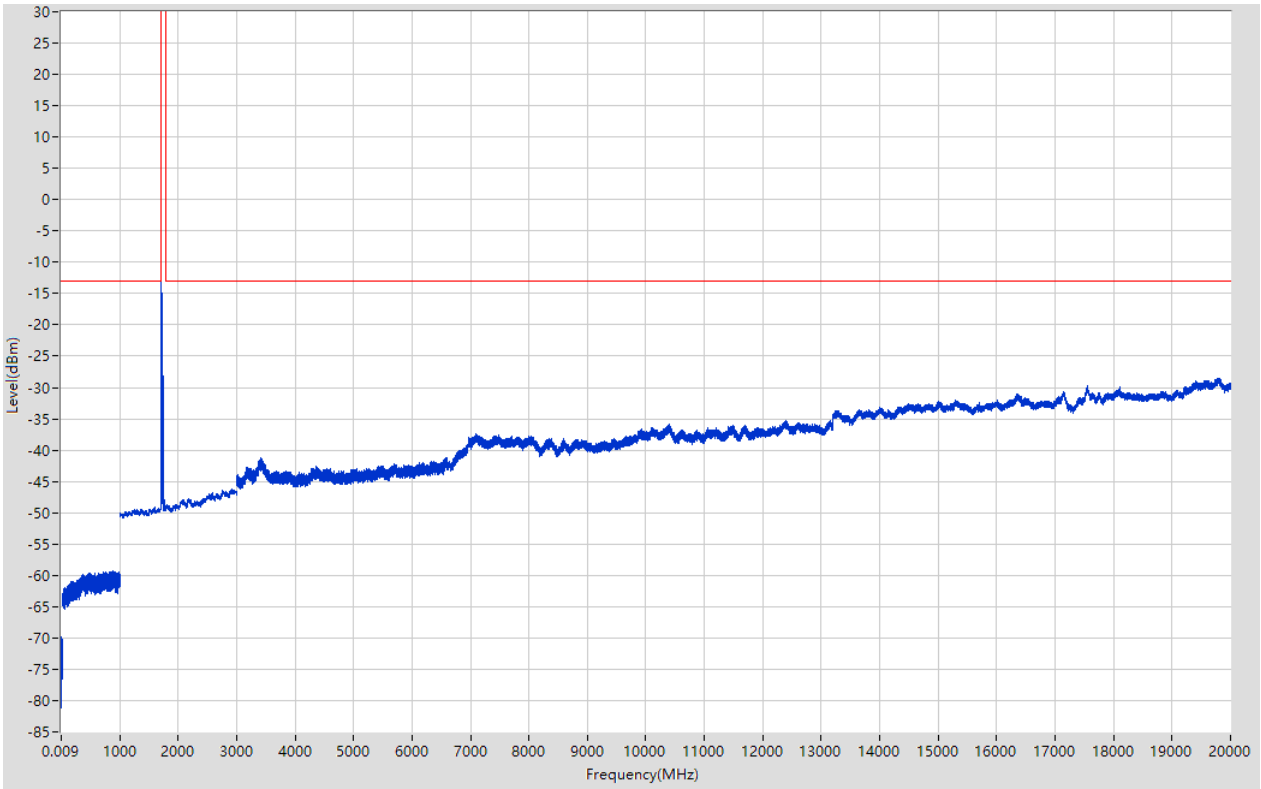

6.27. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:27, Channel:132322, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-72.19	-13	Pass	401
0.15	30	0.01	RMS	17.92	-69.21	-13	Pass	2986
30	1000	0.1	RMS	862.509	-59.19	-13	Pass	9701
1000	1700	1	RMS	1597	-49.17	-13	Pass	701
1700	1790	1	RMS	1738.25	22.14	60	Pass	401
1790	3000	1	RMS	2993	-46.22	-13	Pass	1211
3000	12000	1	RMS	11705	-35.98	-13	Pass	9002
12000	20000	1	RMS	19795	-28.52	-13	Pass	8001

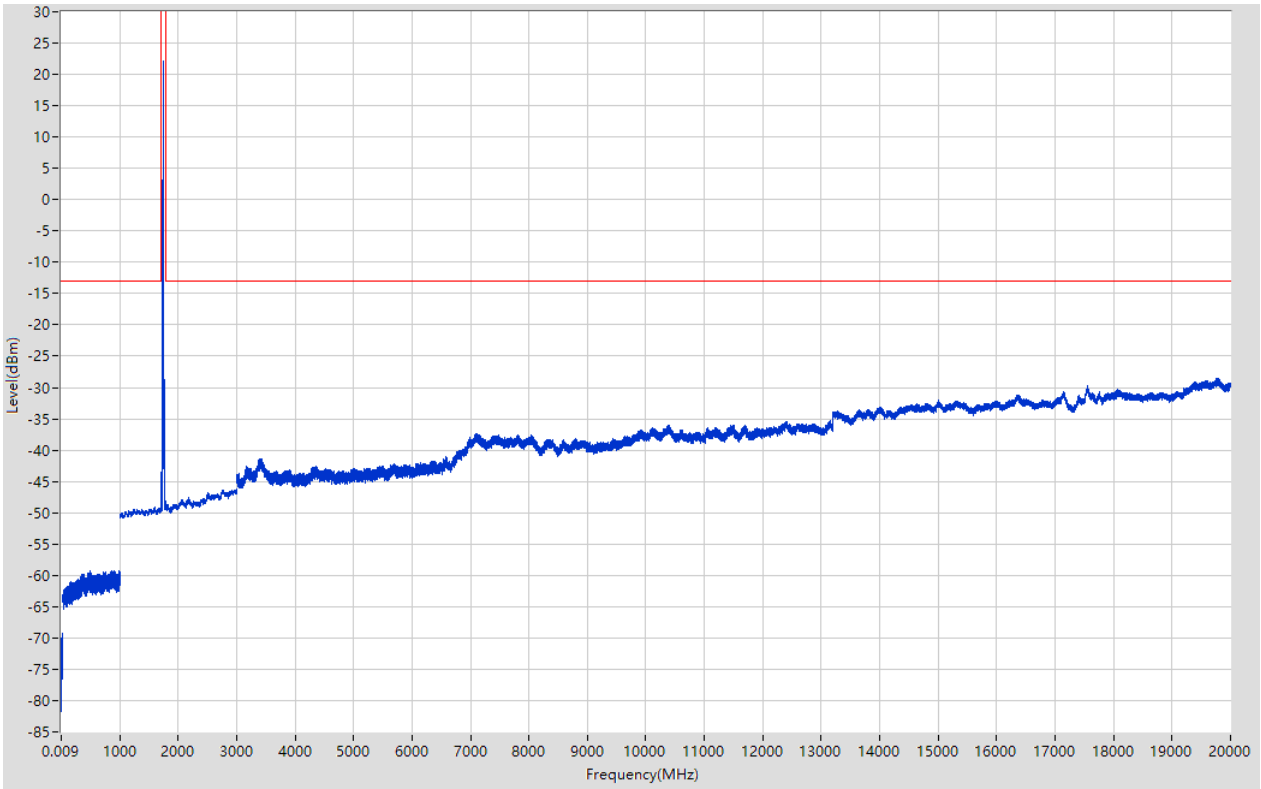

6.28. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:28, Channel:132322, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-73.75	-13	Pass	401
0.15	30	0.01	RMS	0.27	-69.53	-13	Pass	2986
30	1000	0.1	RMS	904.637	-59.39	-13	Pass	9701
1000	1700	1	RMS	1698	-49.1	-13	Pass	701
1700	1790	1	RMS	1738.25	21.45	60	Pass	401
1790	3000	1	RMS	2958	-46.2	-13	Pass	1211
3000	12000	1	RMS	10406	-35.84	-13	Pass	9002
12000	20000	1	RMS	19724	-28.81	-13	Pass	8001

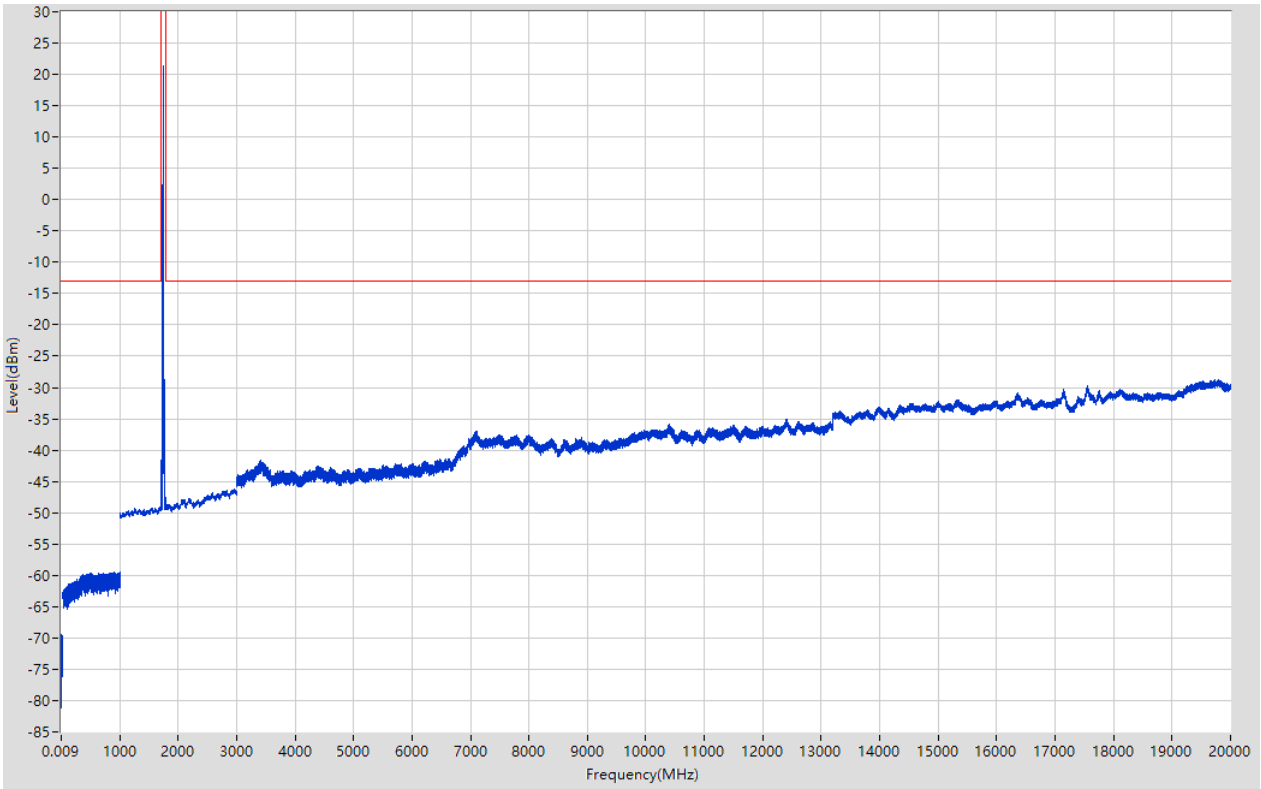

6.29. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:29, Channel:132597, Bandwidth:15, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.04	-73.58	-13	Pass	401
0.15	30	0.01	RMS	26.46	-69.37	-13	Pass	2986
30	1000	0.1	RMS	479.4	-59.28	-13	Pass	9701
1000	1700	1	RMS	1675	-49.23	-13	Pass	701
1700	1790	1	RMS	1765.7	21.97	60	Pass	401
1790	3000	1	RMS	1792	-32.58	-13	Pass	1211
3000	12000	1	RMS	10401	-35.96	-13	Pass	9002
12000	20000	1	RMS	19794	-28.52	-13	Pass	8001

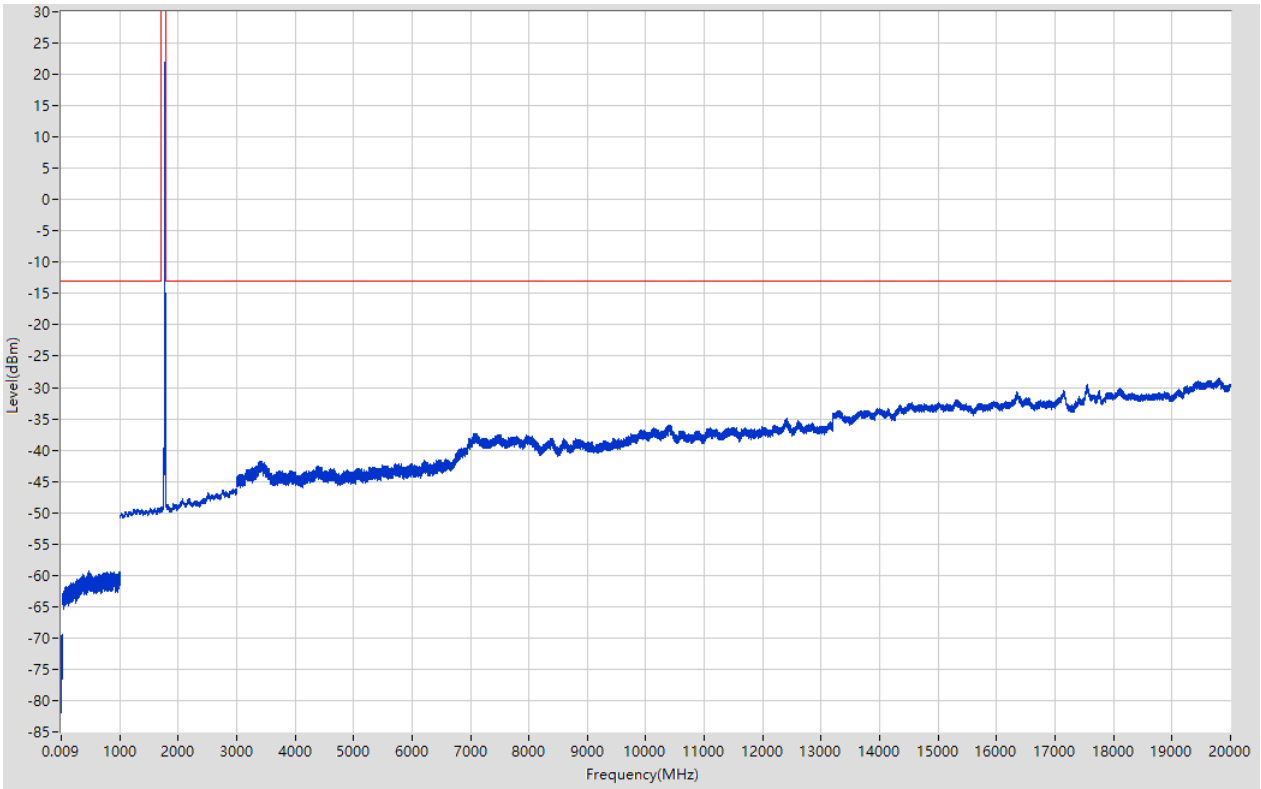

6.30. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:30, Channel:132597, Bandwidth:15, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.079	-73.89	-13	Pass	401
0.15	30	0.01	RMS	0.24	-69.35	-13	Pass	2986
30	1000	0.1	RMS	818.9	-59.44	-13	Pass	9701
1000	1700	1	RMS	1668	-49.18	-13	Pass	701
1700	1790	1	RMS	1765.7	21.16	60	Pass	401
1790	3000	1	RMS	1792	-32.82	-13	Pass	1211
3000	12000	1	RMS	11502	-35.89	-13	Pass	9002
12000	20000	1	RMS	19812	-28.62	-13	Pass	8001

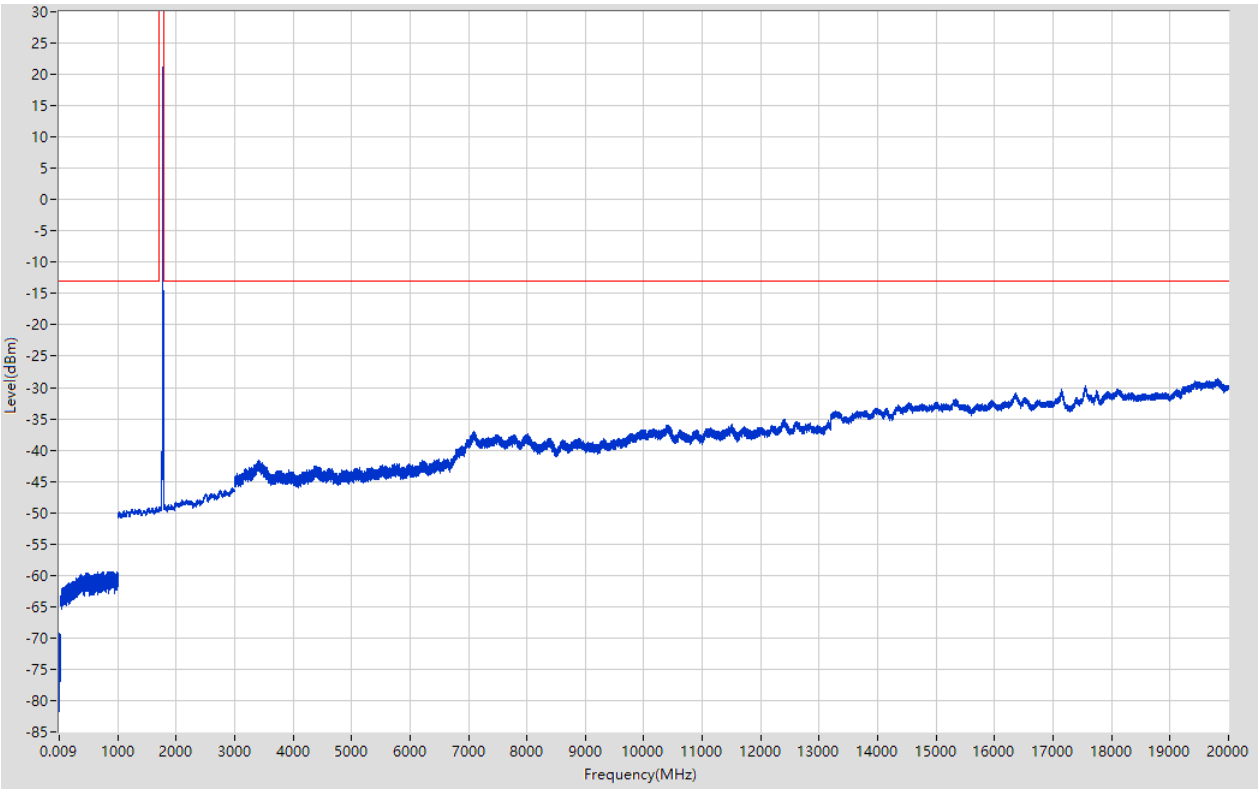

6.31. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:31, Channel:132072, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-73.18	-13	Pass	401
0.15	30	0.01	RMS	0.23	-69.27	-13	Pass	2986
30	1000	0.1	RMS	870.214	-59.32	-13	Pass	9701
1000	1700	1	RMS	1693	-45.45	-13	Pass	701
1700	1790	1	RMS	1711.025	22.31	60	Pass	401
1790	3000	1	RMS	2952	-46.23	-13	Pass	1211
3000	12000	1	RMS	10402	-35.92	-13	Pass	9002
12000	20000	1	RMS	19800	-28.57	-13	Pass	8001

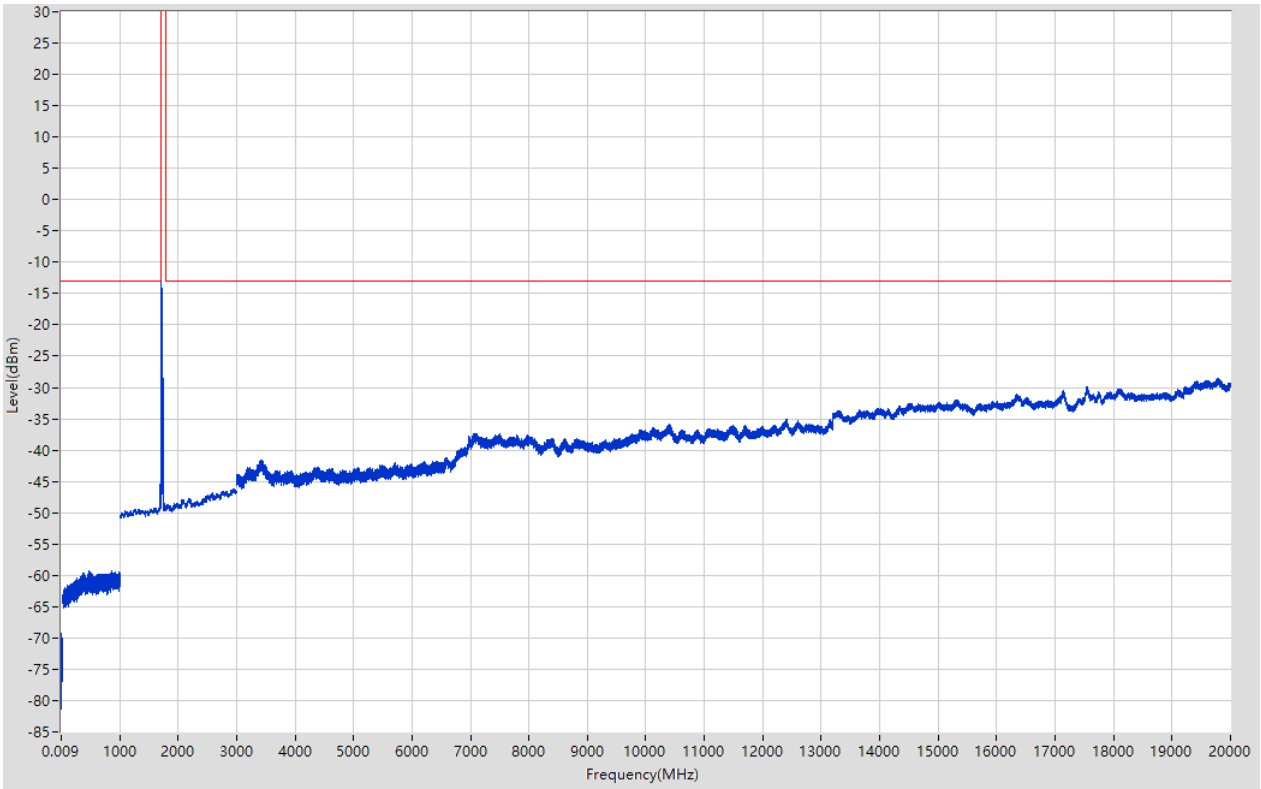

6.32. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:32, Channel:132072, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-72.43	-13	Pass	401
0.15	30	0.01	RMS	25.59	-69.71	-13	Pass	2986
30	1000	0.1	RMS	496.3	-59.37	-13	Pass	9701
1000	1700	1	RMS	1693	-46.43	-13	Pass	701
1700	1790	1	RMS	1711.025	21.46	60	Pass	401
1790	3000	1	RMS	2982	-46.12	-13	Pass	1211
3000	12000	1	RMS	10398	-35.88	-13	Pass	9002
12000	20000	1	RMS	19765	-28.57	-13	Pass	8001

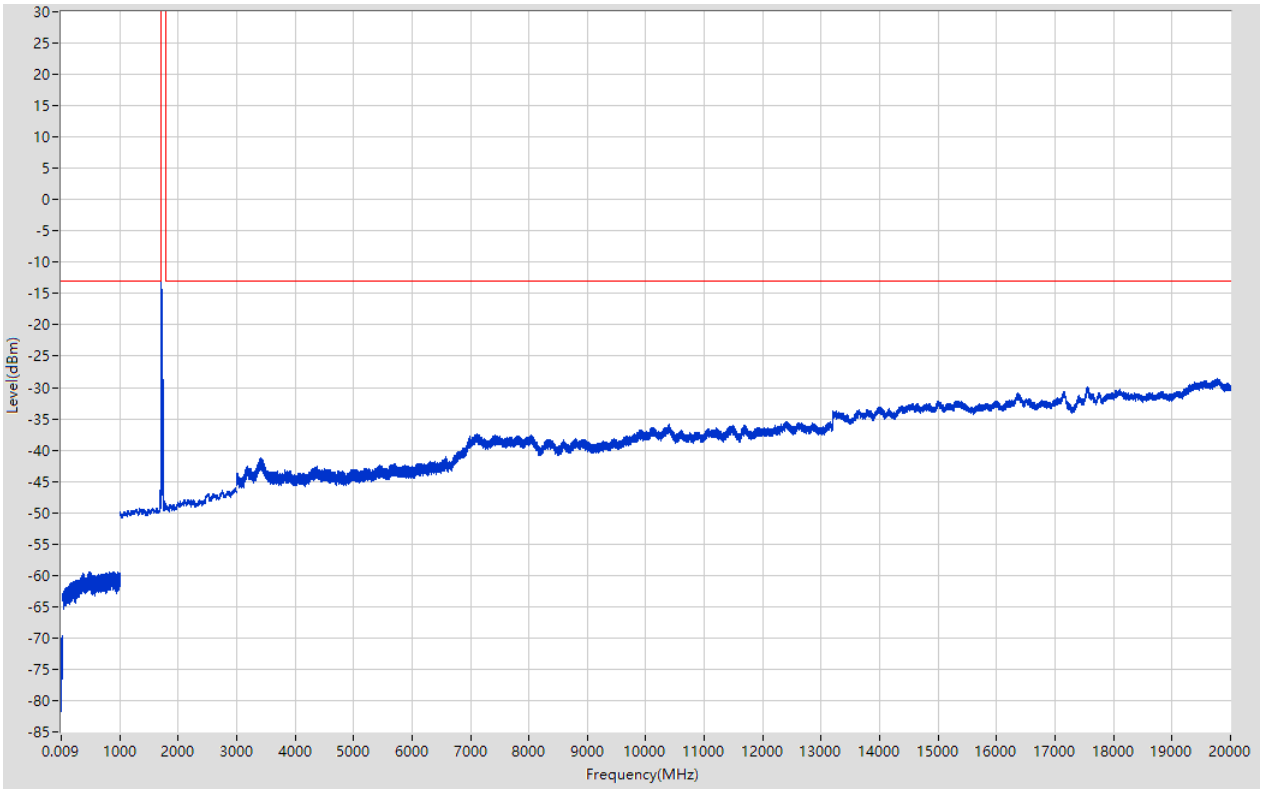

6.33. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:33, Channel:132322, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.016	-73.49	-13	Pass	401
0.15	30	0.01	RMS	27.97	-69.33	-13	Pass	2986
30	1000	0.1	RMS	829.1	-59.32	-13	Pass	9701
1000	1700	1	RMS	1700	-47.28	-13	Pass	701
1700	1790	1	RMS	1736	22.08	60	Pass	401
1790	3000	1	RMS	2967	-46.25	-13	Pass	1211
3000	12000	1	RMS	11995	-36.07	-13	Pass	9002
12000	20000	1	RMS	19800	-28.77	-13	Pass	8001

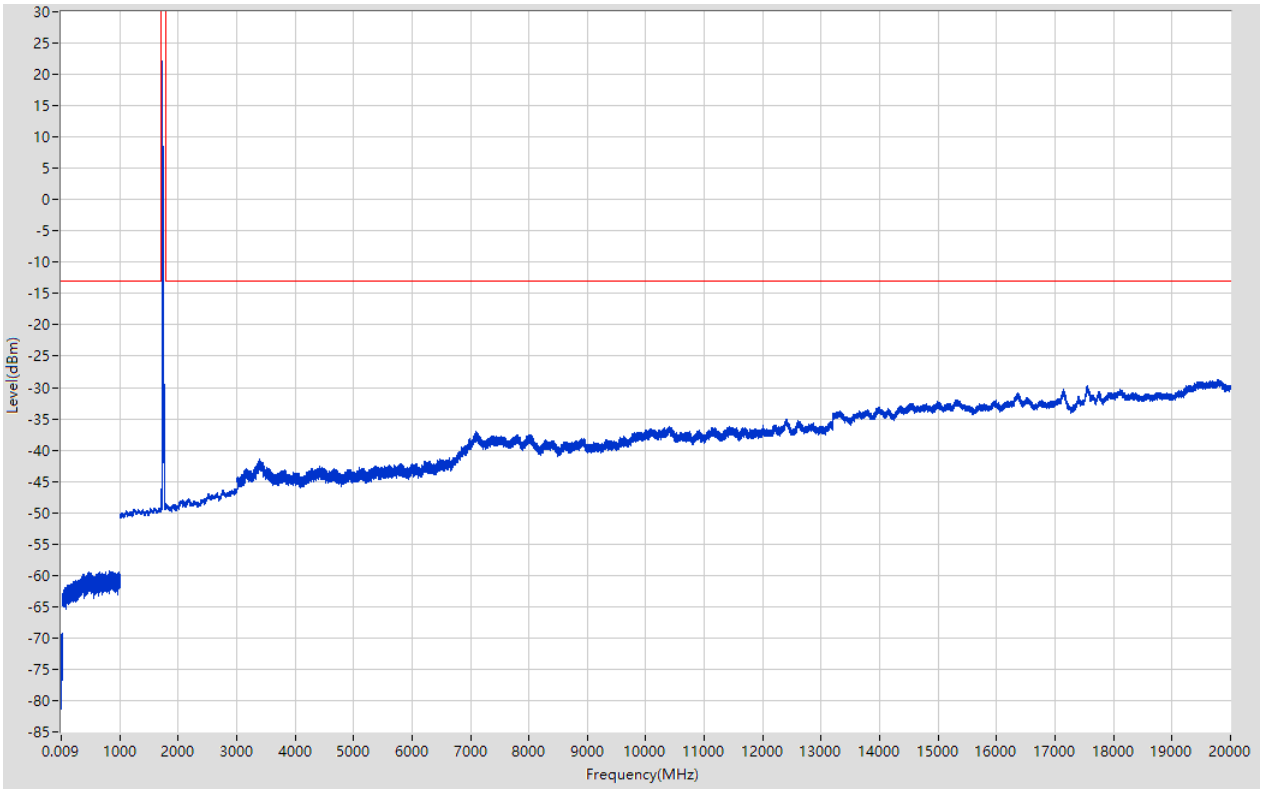

6.34. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:34, Channel:132322, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-72.65	-13	Pass	401
0.15	30	0.01	RMS	0.15	-69.38	-13	Pass	2986
30	1000	0.1	RMS	995.497	-59.25	-13	Pass	9701
1000	1700	1	RMS	1700	-46.8	-13	Pass	701
1700	1790	1	RMS	1736	21.16	60	Pass	401
1790	3000	1	RMS	2957	-46.07	-13	Pass	1211
3000	12000	1	RMS	10397	-36.11	-13	Pass	9002
12000	20000	1	RMS	19790	-28.5	-13	Pass	8001

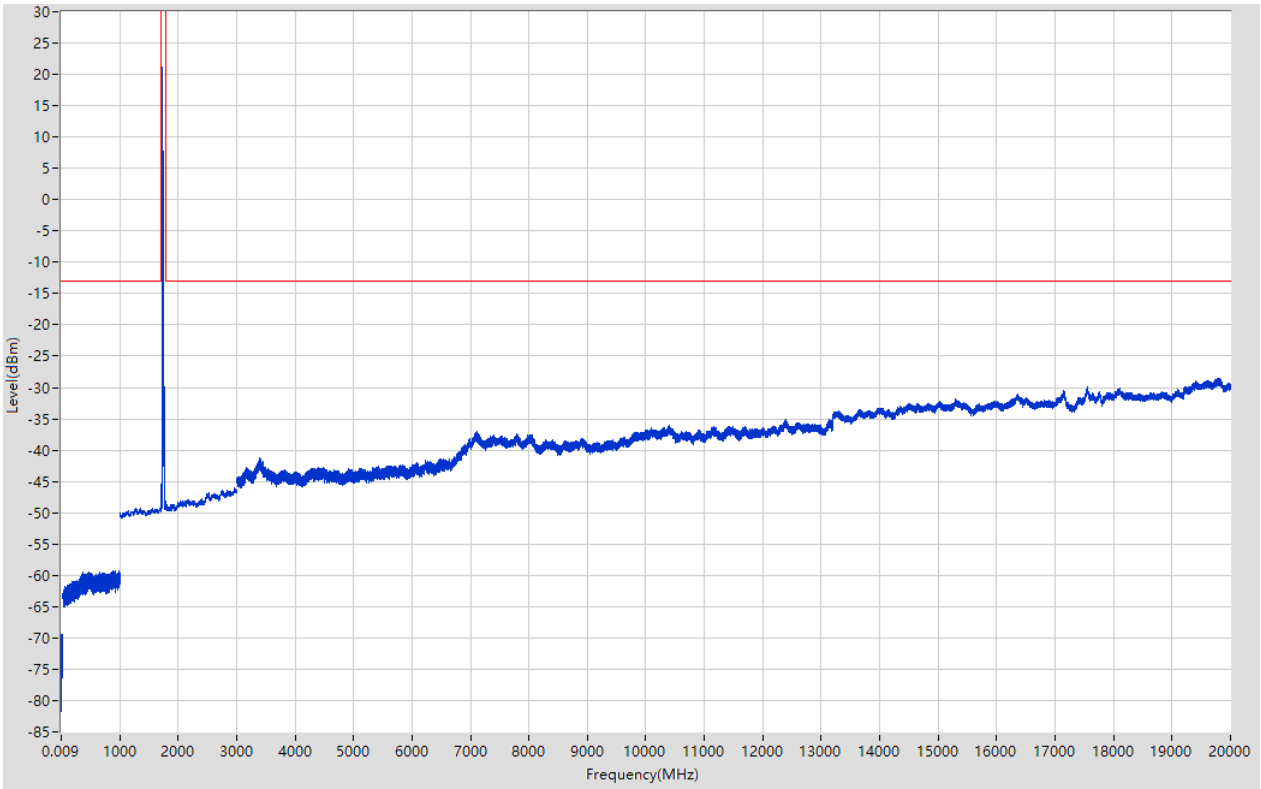

6.35. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:35, Channel:132572, Bandwidth:20, Modulation:QPSK, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.53	-13	Pass	401
0.15	30	0.01	RMS	5.87	-69.85	-13	Pass	2986
30	1000	0.1	RMS	902.435	-59.37	-13	Pass	9701
1000	1700	1	RMS	1695	-49.11	-13	Pass	701
1700	1790	1	RMS	1760.975	22.02	60	Pass	401
1790	3000	1	RMS	1797	-32.98	-13	Pass	1211
3000	12000	1	RMS	11491	-36.01	-13	Pass	9002
12000	20000	1	RMS	19780	-28.66	-13	Pass	8001

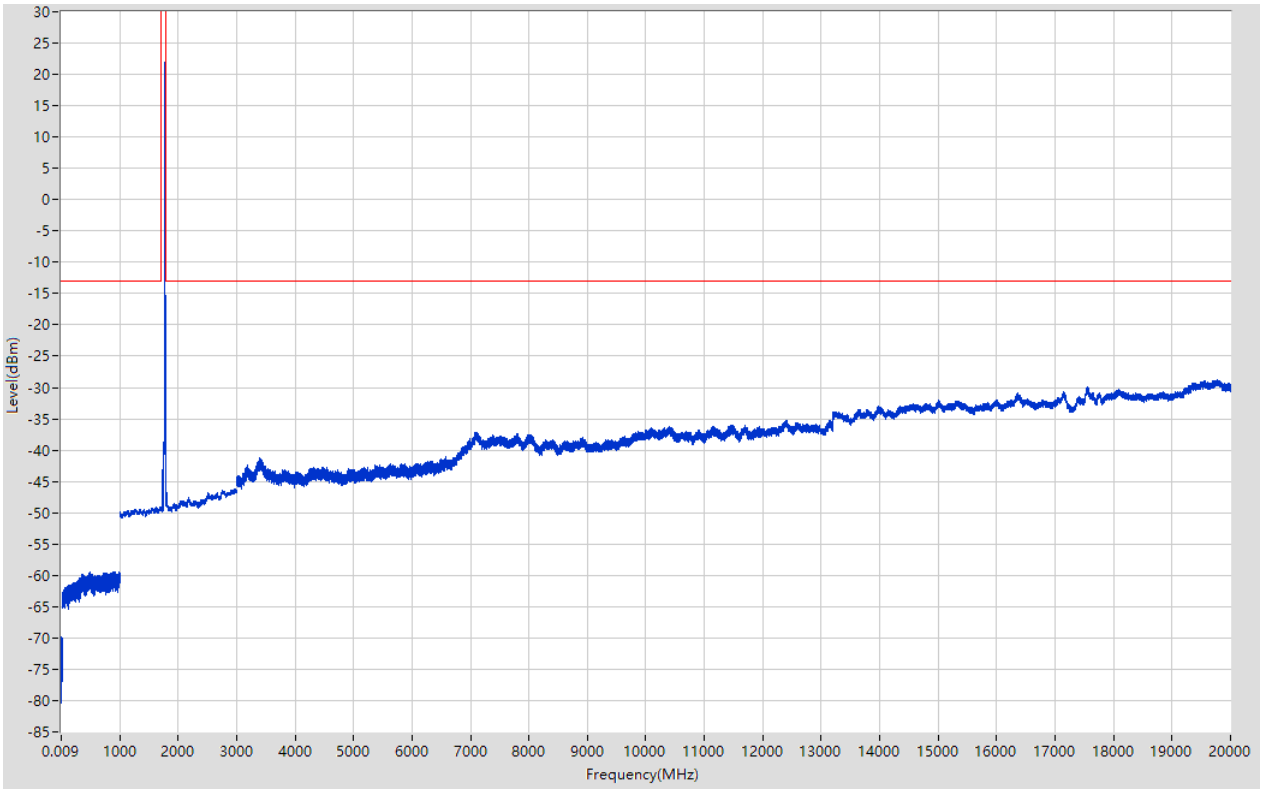

6.36. LTE Spurious Emission at Antenna Terminals_Part22-24-27(NTNV)(Subtest:36, Channel:132572, Bandwidth:20, Modulation:Q16, RB Number: 1, RB Position:LOW)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-72.31	-13	Pass	401
0.15	30	0.01	RMS	1.6	-69.24	-13	Pass	2986
30	1000	0.1	RMS	894.43	-59.18	-13	Pass	9701
1000	1700	1	RMS	1695	-49.07	-13	Pass	701
1700	1790	1	RMS	1760.975	21.25	60	Pass	401
1790	3000	1	RMS	1797	-33.05	-13	Pass	1211
3000	12000	1	RMS	10403	-35.92	-13	Pass	9002
12000	20000	1	RMS	19795	-28.45	-13	Pass	8001

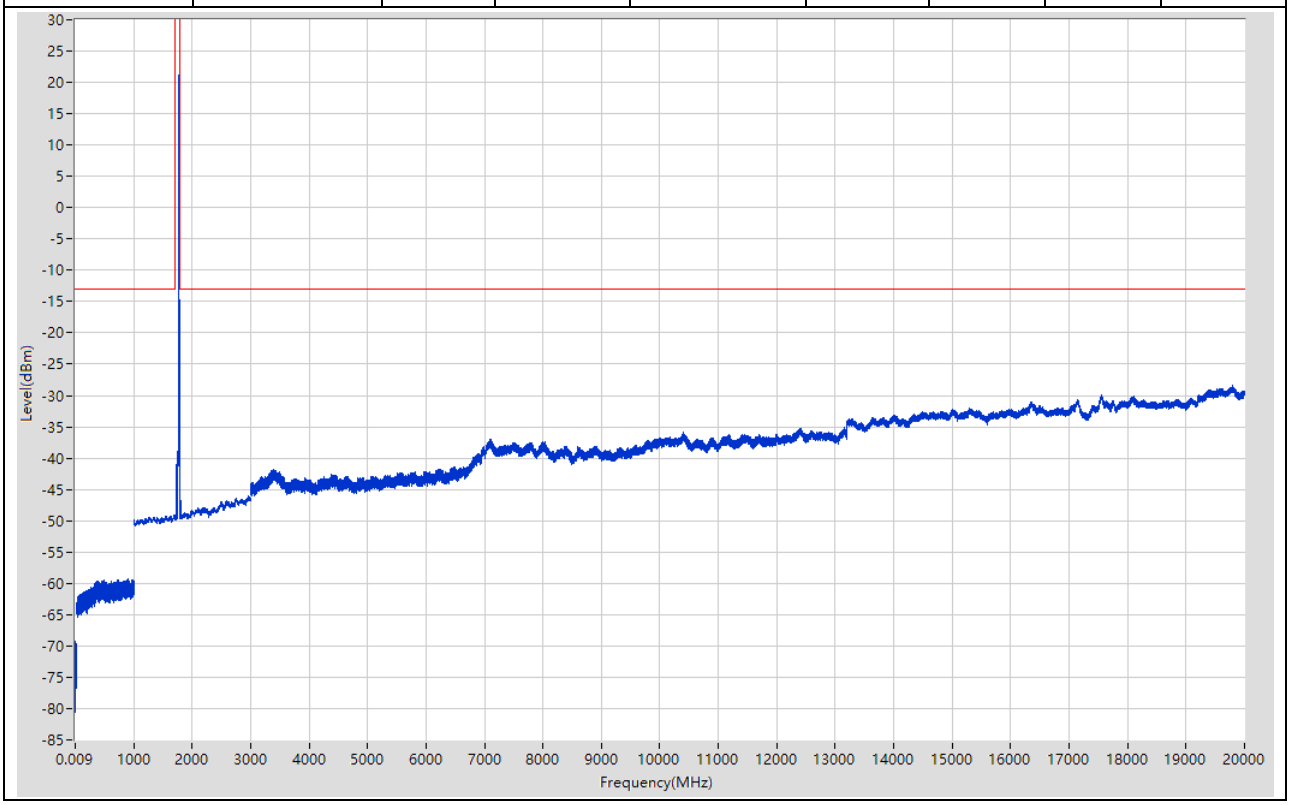

--BLANK BELOW--