Report No.: DDT-R22040611-2E01

Issued Date: May 31, 2022

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	SOUNDBAR
Model No.	:	Bar 2.1
HVIN	:	BAR21MK2
Trade Mark	:	JBL
FCC ID	:	APIBAR21MK2
IC	:	6132A-BAR21MK2
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, http://www.dgddt.com

REPORT

Table of Contents

Test report declares....3
1. Summary of Test Results.... 6
2. General Test Information 7
2.1. Description of EUT 7
2.2. Accessories of EUT.... 8
2.3. Assistant equipment used for test.... 8
2.4. Block diagram of EUT configuration for test 8
2.5. Deviations of test standard.... 8
2.6. Test environment conditions 9
2.7. Test laboratory 9
2.8. Measurement uncertainty.... 10
3. Equipment Used During Test.... 11
4. Maximum Peak Output Power 12
4.1. Block diagram of test setup.... 12
4.2. Limits 12
4.3. Test procedure 12
4.4. Test result.... 12
4.5. Original test data 13
5. 20 dB Bandwidth and 99% Bandwidth.... 17
5.1. Block diagram of test setup.... 17
5.2. Limits 17
5.3. Test procedure 17
5.4. Test result.... 17
5.5. Original test data 18
6. Carrier Frequency Separation.... 25
6.1. Block diagram of test setup.... 25
6.2. Limits 25
6.3. Test procedure 25
6.4. Test result.... 25
6.5. Original test data 26
7. Number of Hopping Channel 28
7.1. Block diagram of test setup.... 28
7.2. Limits 28
7.3. Test procedure 28
7.4. Test result.... 28
7.5. Original test data 28
8. Dwell Time.... 30

8.1. Block diagram of test setup 30
8.2. Limits 30
8.3. Test procedure 30
8.4. Test result 30
8.5. Original test data 31
9. Band Edge Compliance (Conducted Method) 38
9.1. Block diagram of test setup 38
9.2. Limit 38
9.3. Test result 38
9.4. Original test data 39
10. Radiated Emission 44
10.1. Block diagram of test setup 44
10.2. Limit 45
10.3. Test procedure 47
10.4. Test result 48
11. RF Conducted Spurious Emissions 67
11.1. Block diagram of test setup 67
11.2. Limits 67
11.3. Test procedure 67
11.4. Test result 68
11.5. Original test data 68
12. Band Edge Compliance (Radiated Method) 78
12.1. Block diagram of test setup 78
12.2. Limit 78
12.3. Test procedure 78
12.4. Test result 78
13. Power Line Conducted Emission 91
13.1. Block diagram of test setup 91
13.2. Power line conducted emission limits 91
13.3. Test procedure 91
13.4. Test result 92
14. Antenna Requirements 95
14.1. Limit 95
14.2. Result 95
15. Test Setup Photograph 96
16. Photos of the EUT 98

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	SOUNDBAR
Model No.	:	Bar 2.1
HVIN	:	BAR21MK2
Trade Mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021).

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R22040611-2E01		
Date of Receipt:	Apr. 12, 2022	**Date of Test:**	Apr. 12, 2022 ~ May 31, 2022

Prepared By: ***Approved By:***

Sam Li

Sam Li/Engineer ***Damon Hu/EMC Manager***

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	May 31, 2022	

1. Summary of Test Results

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	:	SOUNDBAR
Model Number	:	Bar 2.1
HVIN	:	BAR21MK2
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	AC 100-240V-50/60Hz 100W
Radio Specification	:	Bluetooth V4.2
Operation Frequency	:	2402 MHz - 2480 MHz
Modulation	:	GFSK, π/4-DQPSK, 8DPSK
Data Rate	:	1 Mbps, 2 Mbps, 3 Mbps
Antenna Type	:	FPC antenna, maximum PK gain: 2.36 dBi
Sample Type	:	Series production
Sample Number	:	S22040611-06 for conducted test S22040611-08 for radiation test

Note: EUT is the abbreviation of equipment under test.

Channel Information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Other
AC cable	Harman	N/A	N/A	Length: 1.40m,
HDMI cable	Harman	N/A	N/A	Length: 1.40m, with two magnetic rings
Remote control	Harman	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

AC mains —— EUT

Test software: BQB.EXE
The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
π/4-DQPSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480
π/4-DQPSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480
8DPSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 ℃
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, http://www.dgddt.com, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10^{-8} (Antenna couple method)
	5.5 x 10^{-8} (Conducted method)
Conducted Spurious Emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 ℃
Humidity	2 %
Uncertainty for Radiation Emission Test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒**RF Connected Test (Tonscend RF Measurement System 3#)**					
SPECTRUM ANALYZER	R&S	FSU26	200071	Sep. 02, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150 L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☒**Radiation 3#chamber**					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02468	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	COM-POWE R	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWE R	PAM-840A	461369	Apr. 11, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☒**Power Line Conducted Emissions Test 1#**					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBE CK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

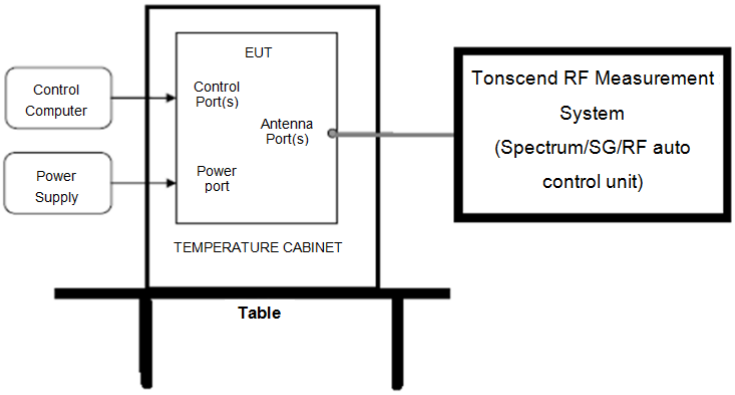

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4 W.

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW = 3 MHz (above 20 dB bandwidth of measured signal), VBW = 10 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Mode	Antenna	Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	5.47	21	Pass
	ANT1	2441	5.24	21	Pass
	ANT1	2480	5.31	21	Pass
π/4-DQPSK	ANT1	2402	5.56	21	Pass
	ANT1	2441	5.40	21	Pass
	ANT1	2480	5.56	21	Pass
8DPSK	ANT1	2402	5.76	21	Pass
	ANT1	2441	5.69	21	Pass
	ANT1	2480	5.92	21	Pass

Mode	Antenna	Freq. (MHz)	EIRP (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	7.83	36	Pass
	ANT1	2441	7.60	36	Pass
	ANT1	2480	7.67	36	Pass
π/4-DQPSK	ANT1	2402	7.92	36	Pass
	ANT1	2441	7.76	36	Pass
	ANT1	2480	7.92	36	Pass
8DPSK	ANT1	2402	8.12	36	Pass
	ANT1	2441	8.05	36	Pass
	ANT1	2480	8.28	36	Pass
Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)					

4.5. Original test data

DH5_Ant1_2402

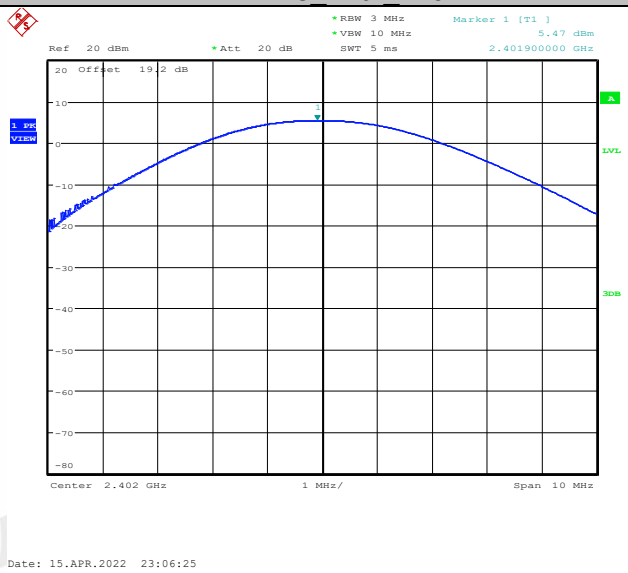

DH5_Ant1_2441

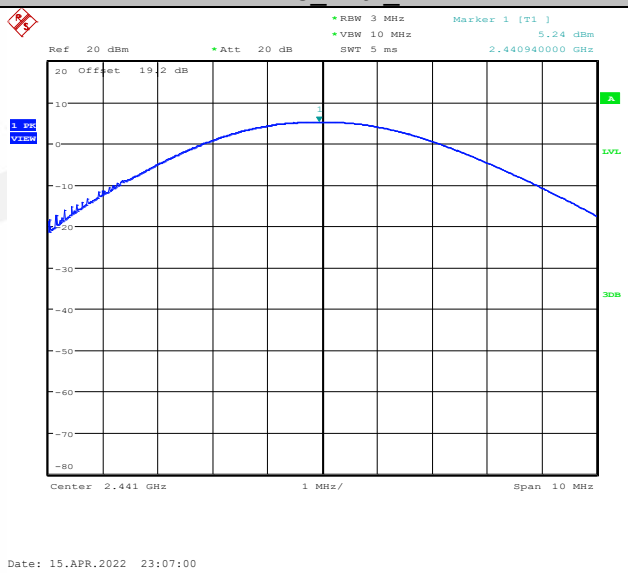

DH5_Ant1_2480

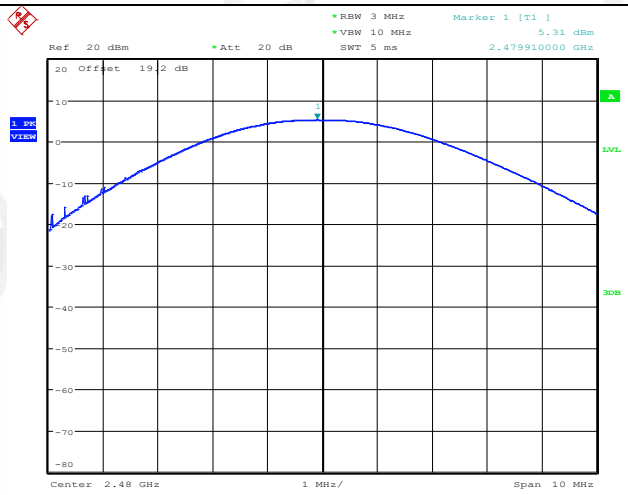

2DH5_Ant1_2402

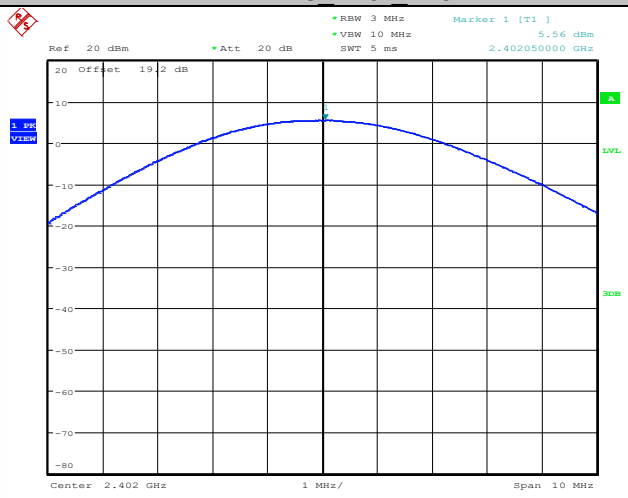

2DH5_Ant1_2441

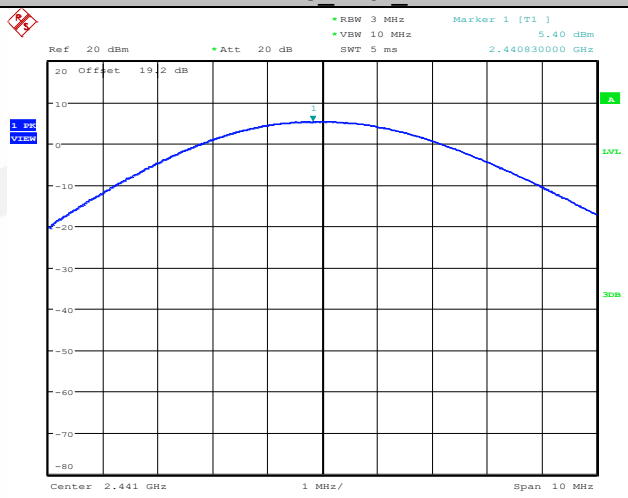

2DH5_Ant1_2480

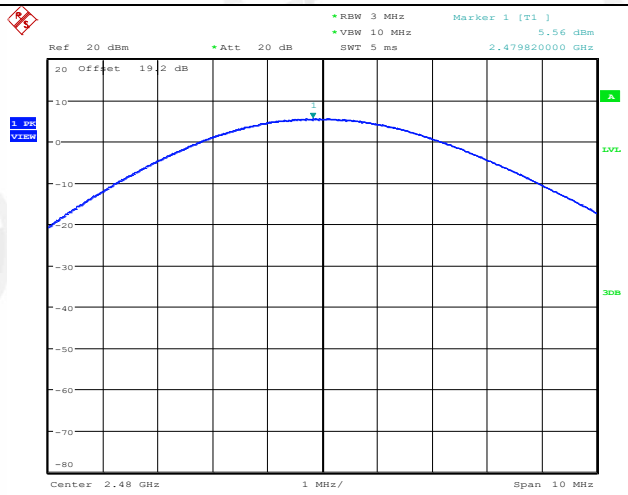

3DH5_Ant1_2402

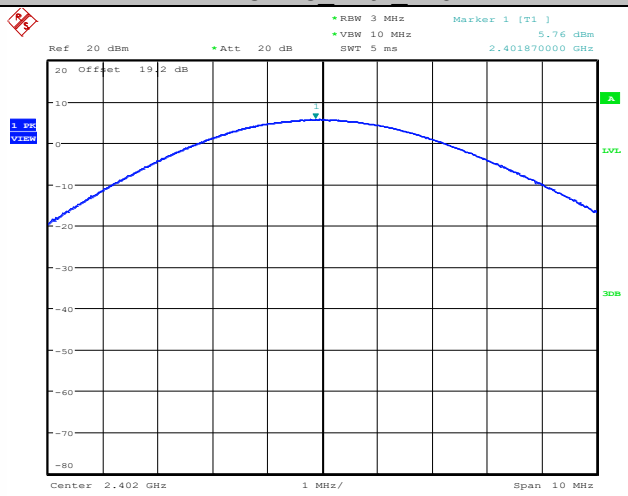

3DH5_Ant1_2441

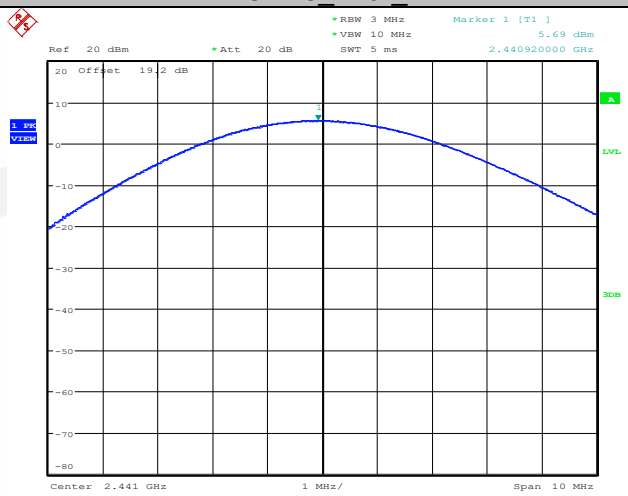

3DH5_Ant1_2480

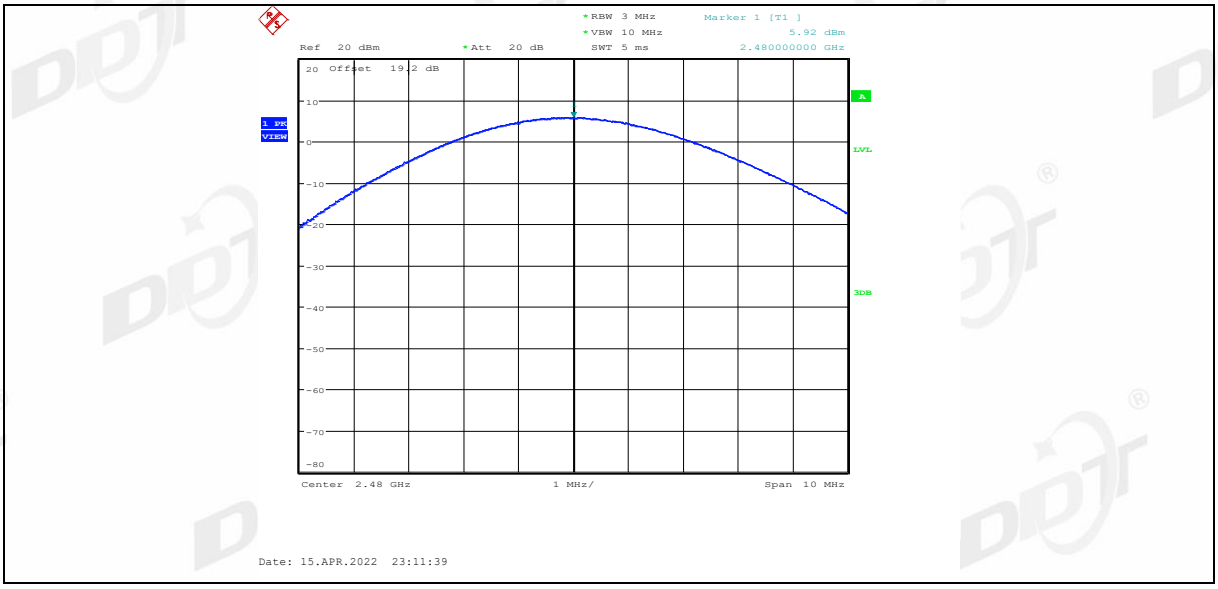
RBW 3 MHz
VBW 10 MHz
SWT 5 ms
Marker 1 [T1]
5.92 dBm
2.480000000 GHz
Ref 20 dBm
Att 20 dB
Offset 19.2 dB
1 PK VIEW
A
LVL
3DB
Center 2.48 GHz
1 MHz/
Span 10 MHz
Date: 15.APR.2022 23:11:39

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	1.030	0.928	Pass
	2441	1.040	0.948	Pass
	2480	1.032	0.938	Pass
π/4-DQPSK	2402	1.228	1.164	Pass
	2441	1.214	1.168	Pass
	2480	1.190	1.154	Pass
8DPSK	2402	1.258	1.164	Pass
	2441	1.244	1.166	Pass
	2480	1.210	1.154	Pass

5.5. Original test data

20 dB bandwidth:

DH5_Ant1_2402

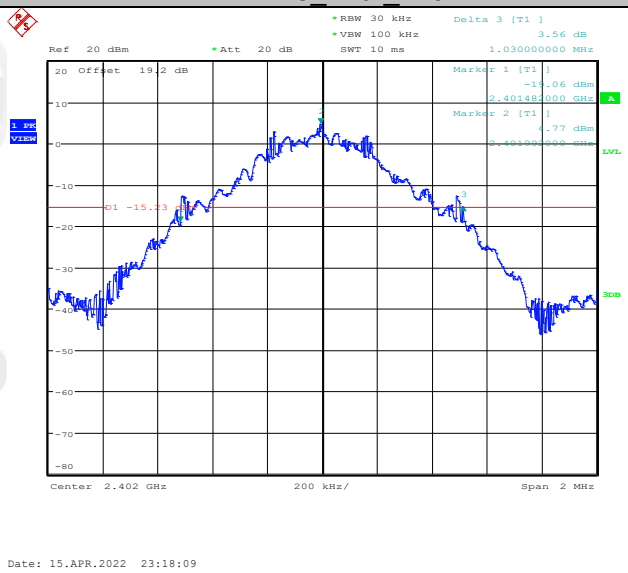

DH5_Ant1_2441

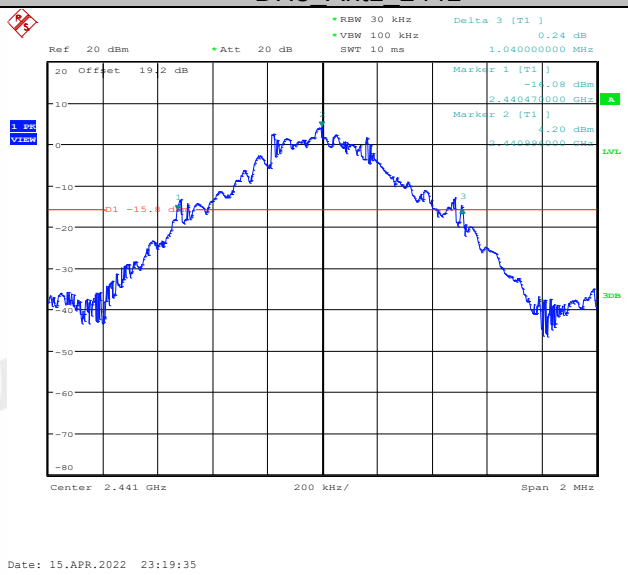

DH5_Ant1_2480

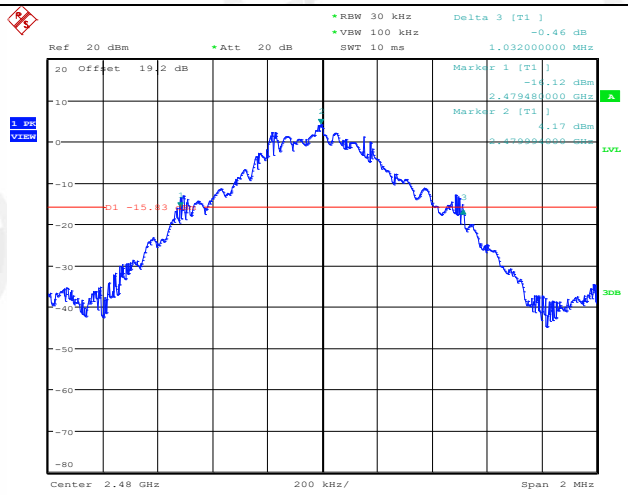

Date: 15.APR.2022 23:20:49

2DH5_Ant1_2402

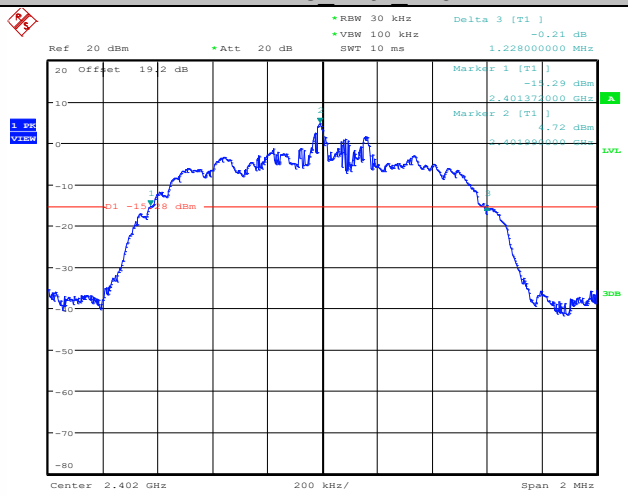

Date: 15.APR.2022 23:23:25

2DH5_Ant1_2441

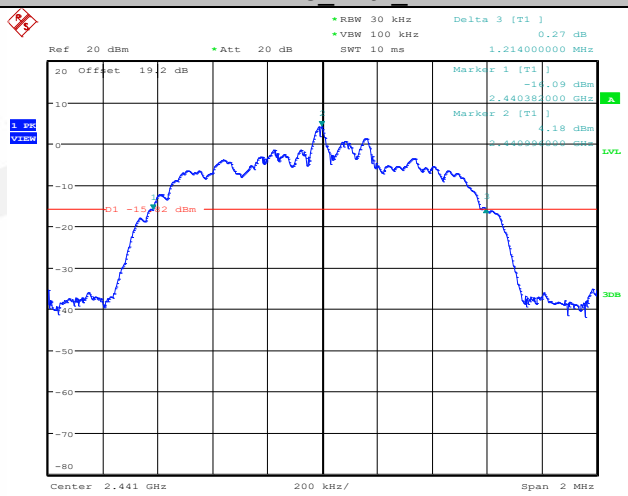

Date: 15.APR.2022 23:25:19

2DH5_Ant1_2480

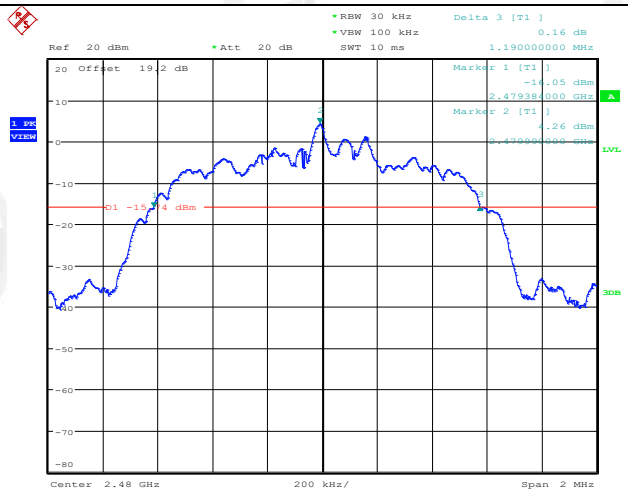

Date: 15.APR.2022 23:28:17

3DH5_Ant1_2402

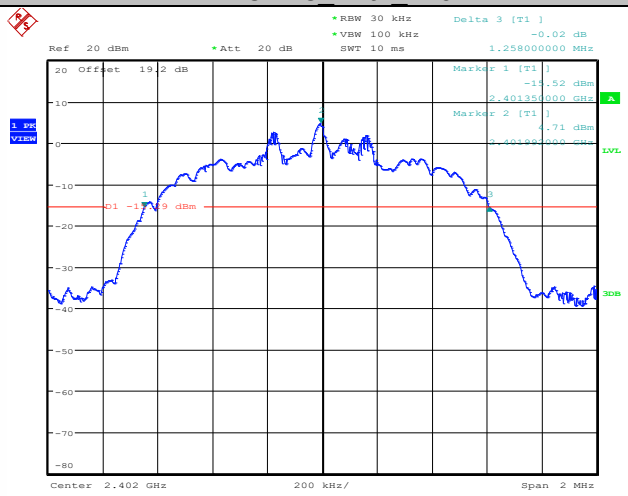

Date: 15.APR.2022 23:30:01

3DH5_Ant1_2441

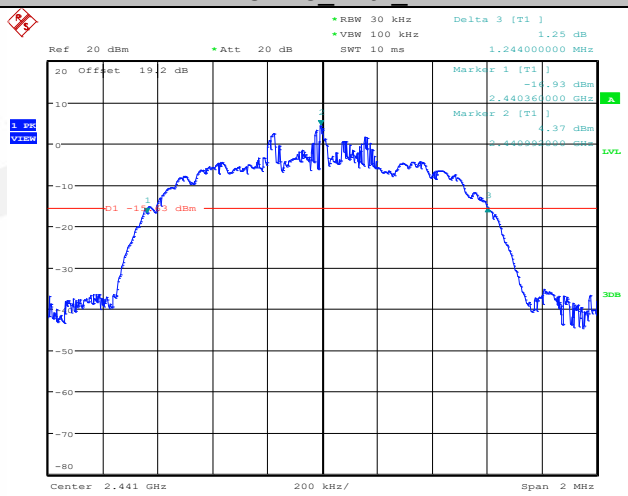

Date: 15.APR.2022 23:32:55

3DH5_Ant1_2480

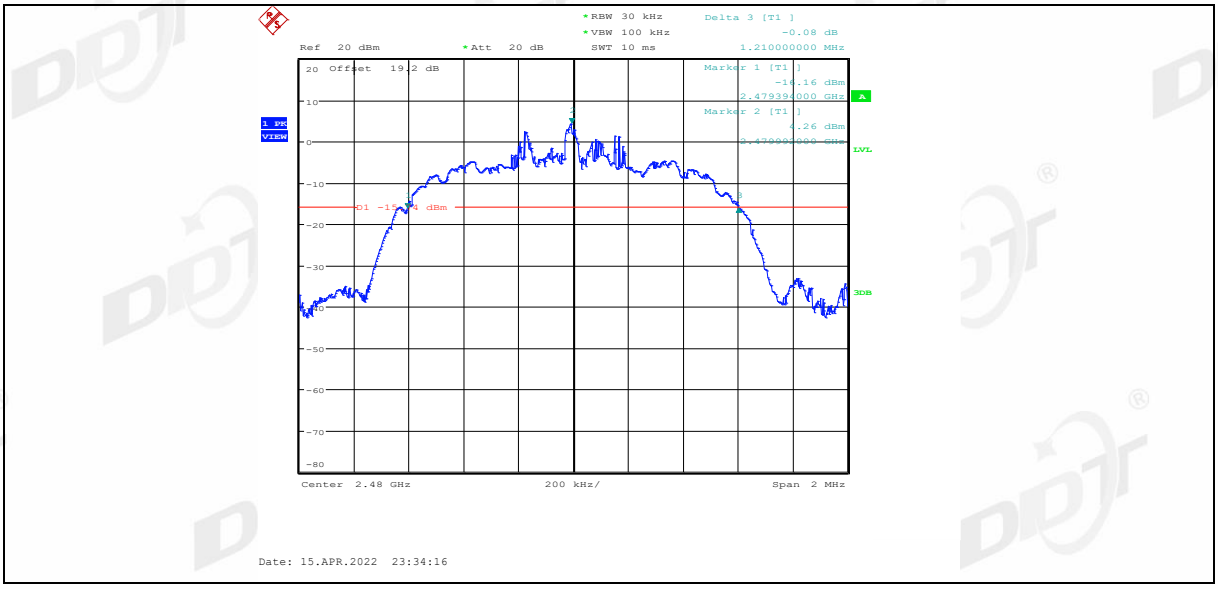

99% bandwidth:

DH5_Ant1_2402
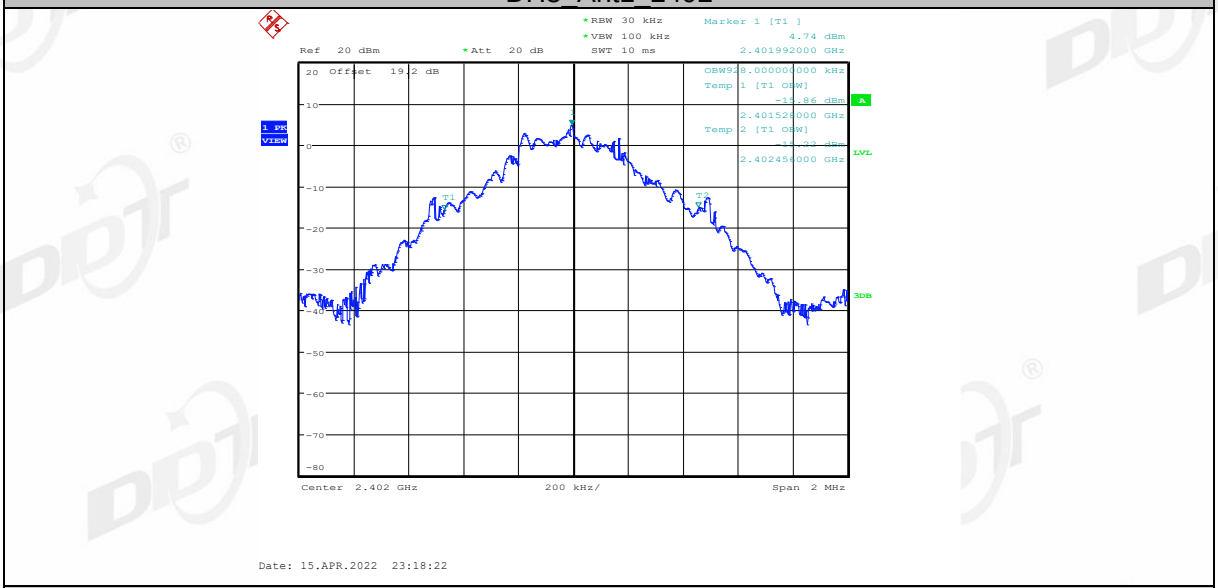
DH5_Ant1_2441

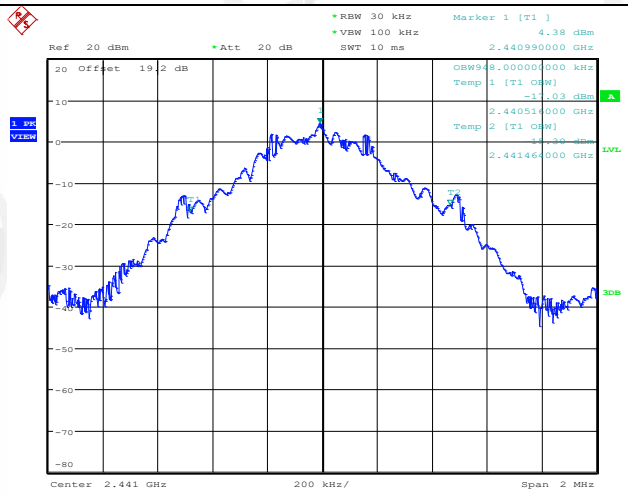

Date: 15.APR.2022 23:19:48

DH5_Ant1_2480

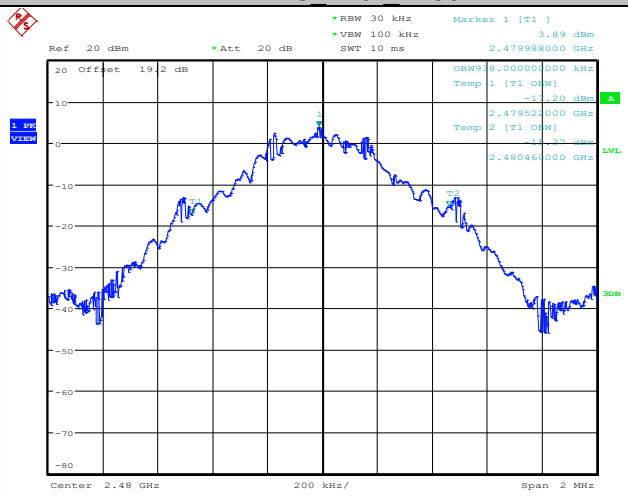

Date: 15.APR.2022 23:21:03

2DH5_Ant1_2402

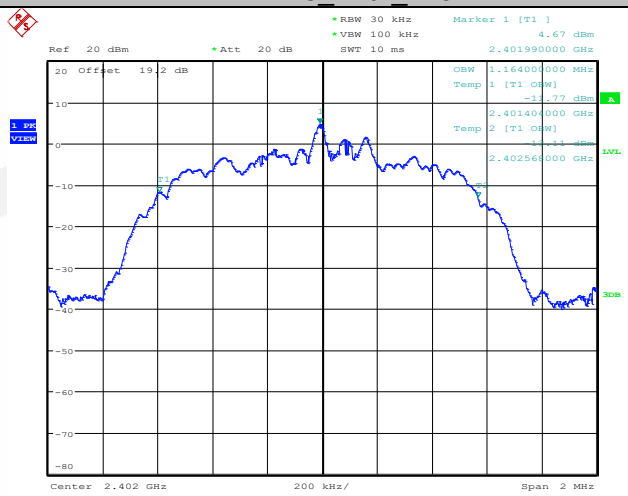

Date: 15.APR.2022 23:23:51

2DH5_Ant1_2441

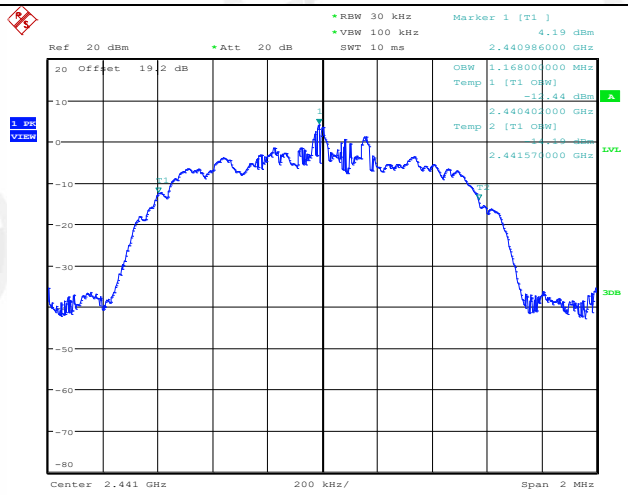

Date: 15.APR.2022 23:25:32

2DH5_Ant1_2480

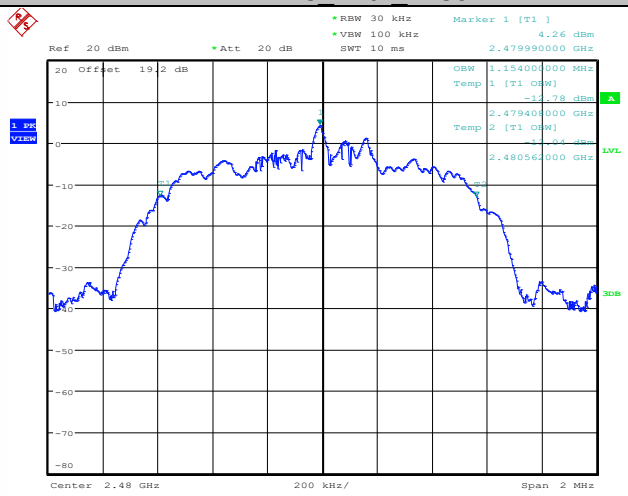

Date: 15.APR.2022 23:28:35

3DH5_Ant1_2402

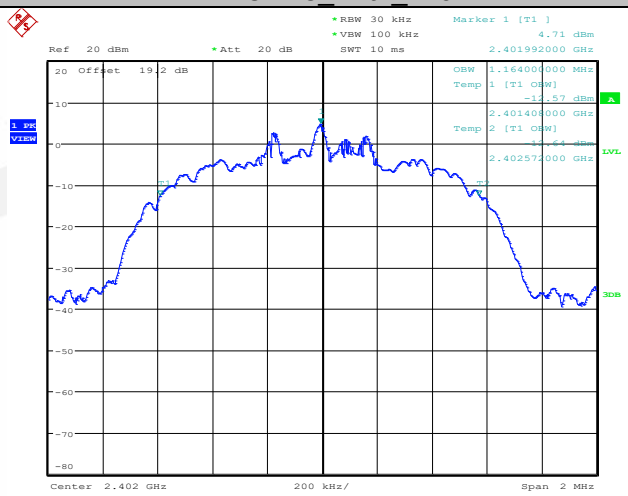

Date: 15.APR.2022 23:30:26

3DH5_Ant1_2441

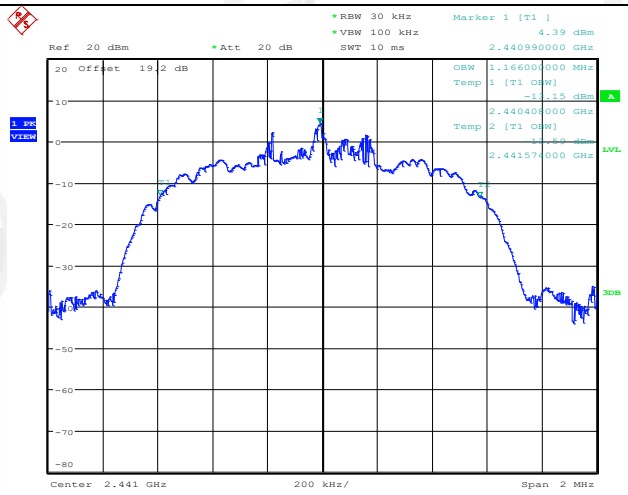

3DH5_Ant1_2480

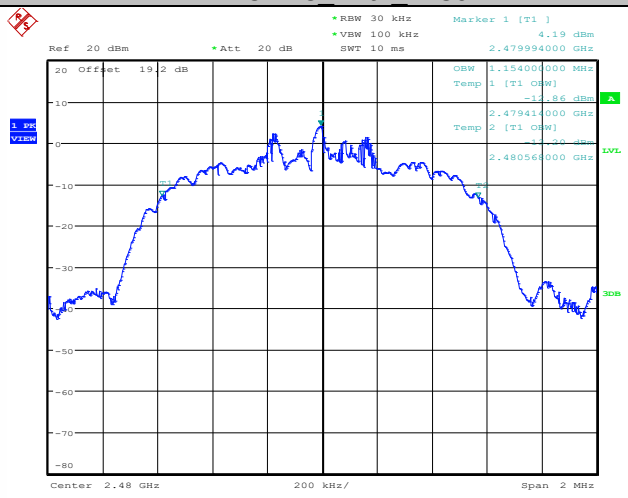

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Mode	Channel separation (MHz)	20 dB bandwidth (MHz) (Worse case)	Limit (MHz) 2/3 of 20 dB bandwidth	Verdict
GFSK	1.006	1.040	≥0.693	Pass
π/4-DQPSK	1.000	1.228	≥0.819	Pass
8DPSK	0.997	1.258	≥0.839	Pass

6.5. Original test data

DH5_Ant1_Hop

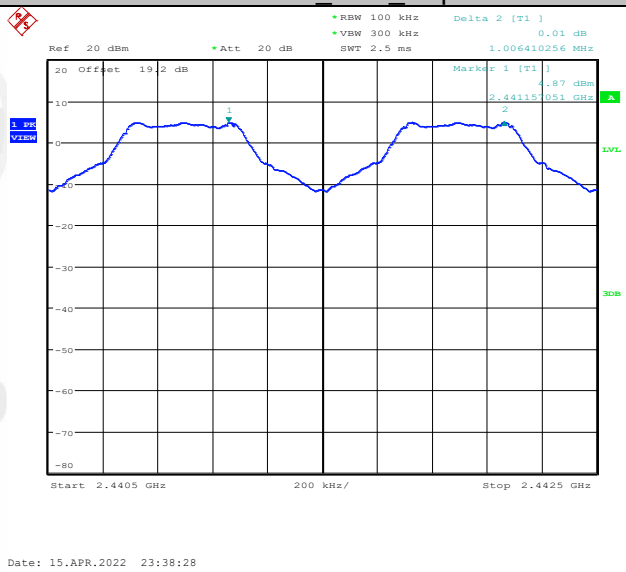

2DH5_Ant1_Hop

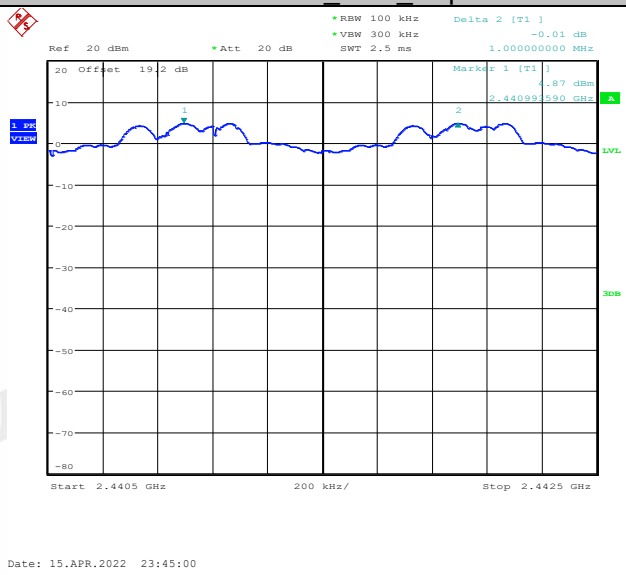

3DH5_Ant1_Hop

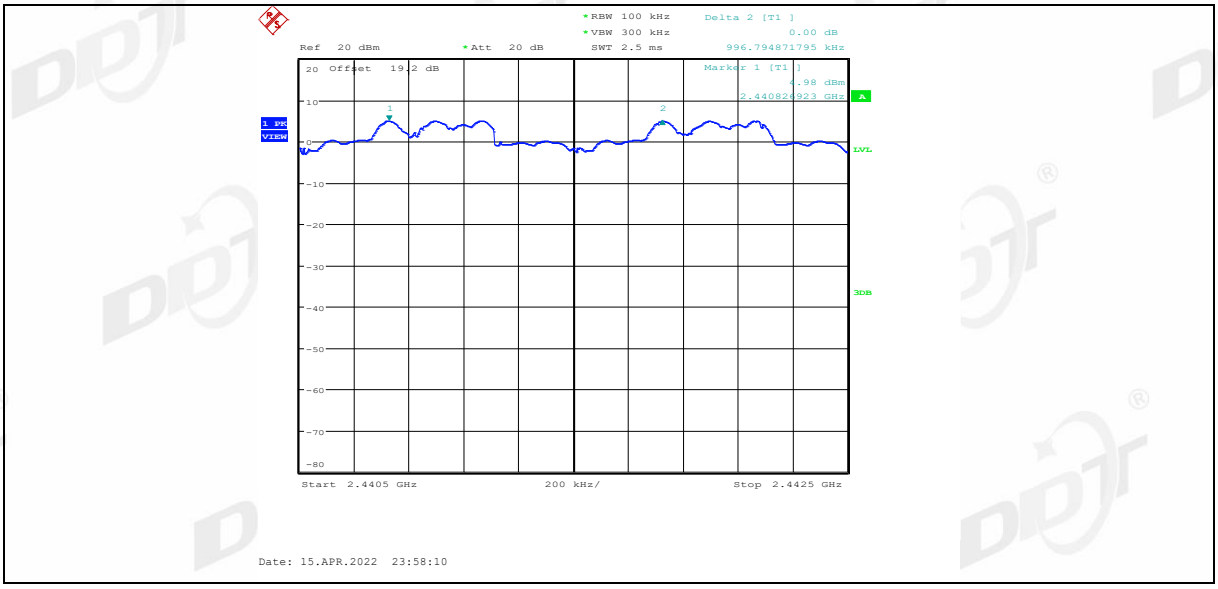
RBW 100 kHz
VBW 300 kHz
SWT 2.5 ms
Delta 2 [T1]
0.00 dB
996.794871795 kHz
Ref 20 dBm
Att 20 dB
Offset 19.2 dB
Marker 1 [T1]
4.98 dBm
2.440824923 GHz
1 PK VIEW
A
LVL
3DB
Start 2.4405 GHz
200 kHz/
Stop 2.4425 GHz
Date: 15.APR.2022 23:58:10

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
π/4-DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

7.5. Original test data

DH5_Ant1_Hop

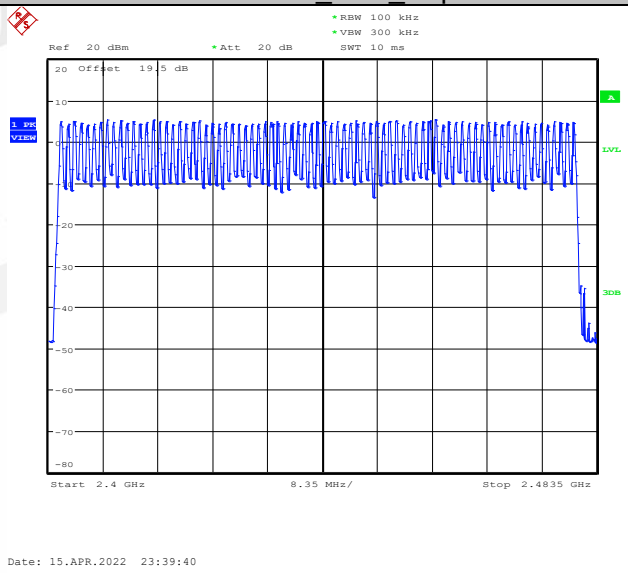

2DH5_Ant1_Hop

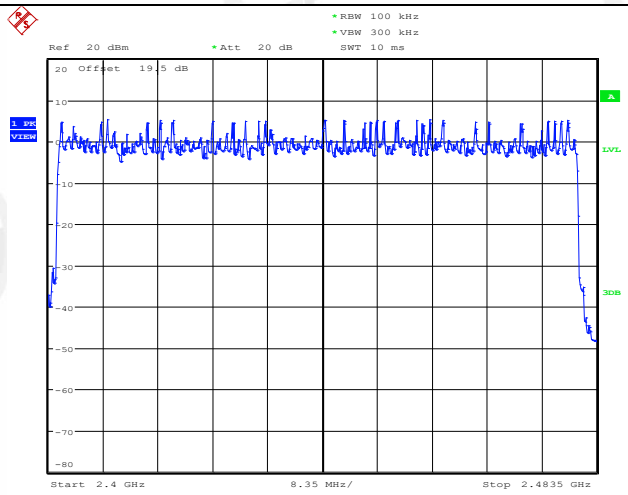

Date: 15.APR.2022 23:45:54

3DH5_Ant1_Hop

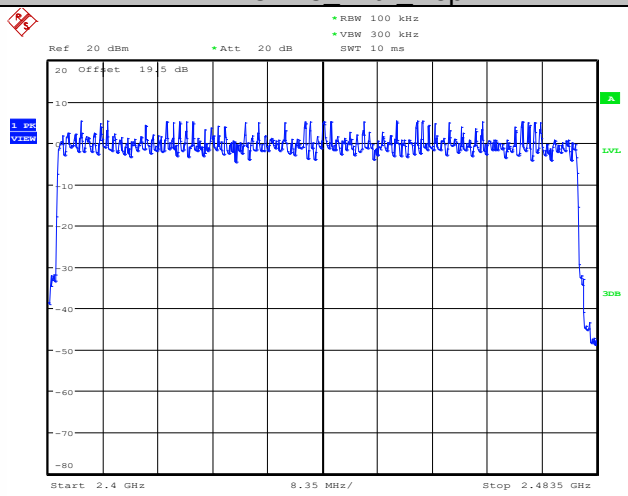

Date: 15.APR.2022 23:59:17

8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

(3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops *pulse's on time.

8.4. Test result

Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.060	0.39	155	<400ms	Pass
DH3	0.165	1.65	100	<400ms	Pass
DH5	0.247	2.90	85	<400ms	Pass
2DH1	0.062	0.40	155	<400ms	Pass
2DH3	0.183	1.66	110	<400ms	Pass
2DH5	0.247	2.91	85	<400ms	Pass
3DH1	0.064	0.41	155	<400ms	Pass
3DH3	0.164	1.66	99	<400ms	Pass
3DH5	0.247	2.91	85	<400ms	Pass
Note: Dwell time = total hops *pulse's on time.					

8.5. Original test data

DH1_Ant1_Hop
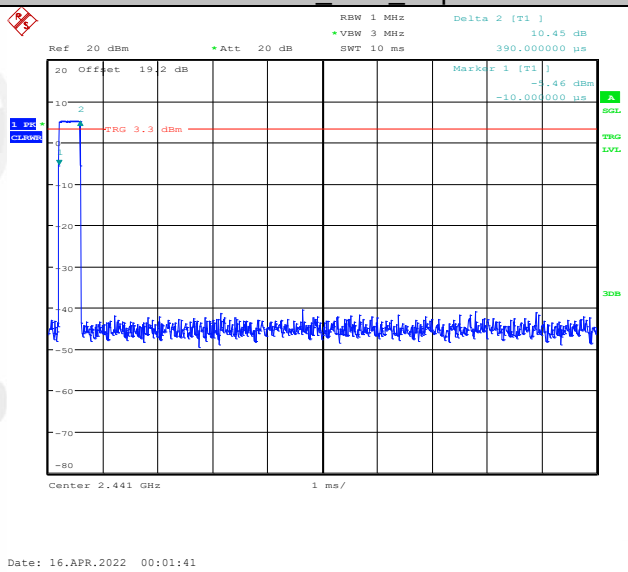
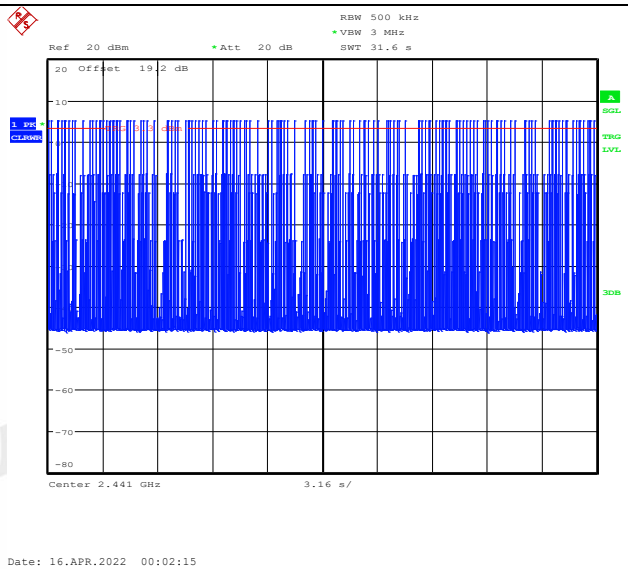
DH3_Ant1_Hop

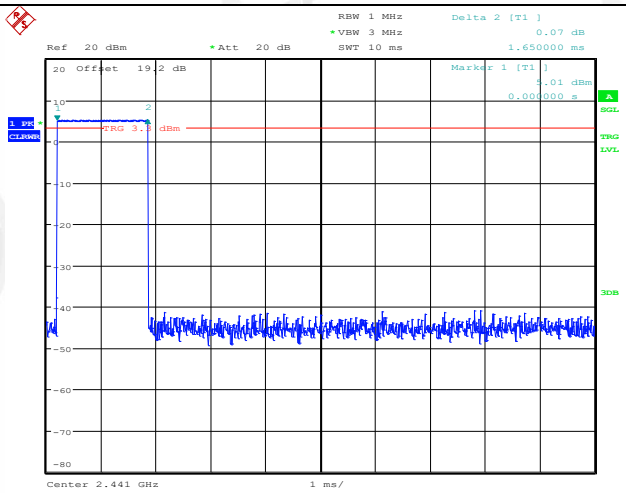

Date: 16.APR.2022 00:03:15

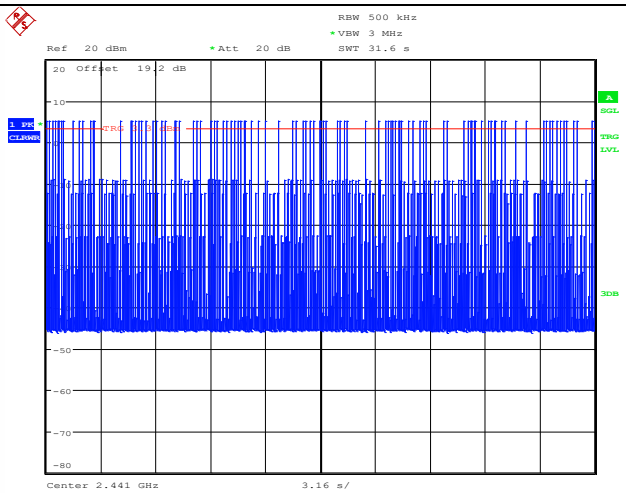

Date: 16.APR.2022 00:03:54

DH5_Ant1_Hop

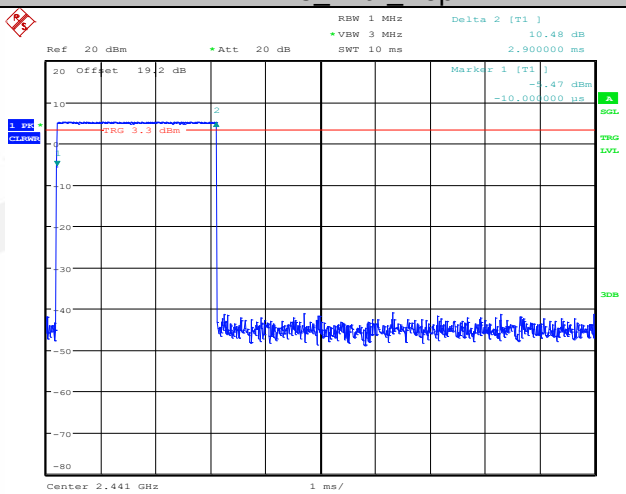

Date: 16.APR.2022 00:04:23

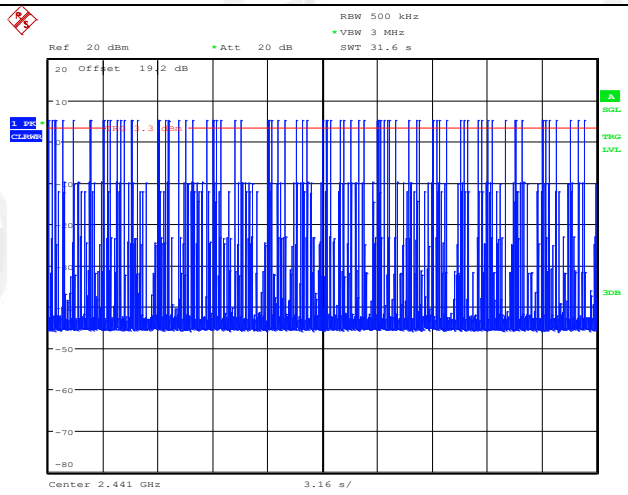

2DH1_Ant1_Hop

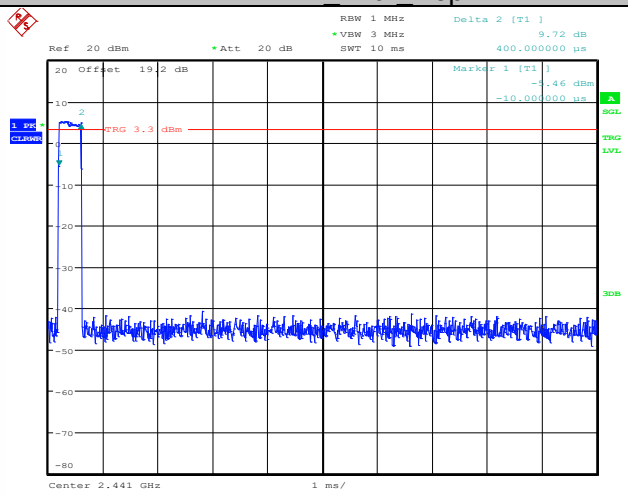

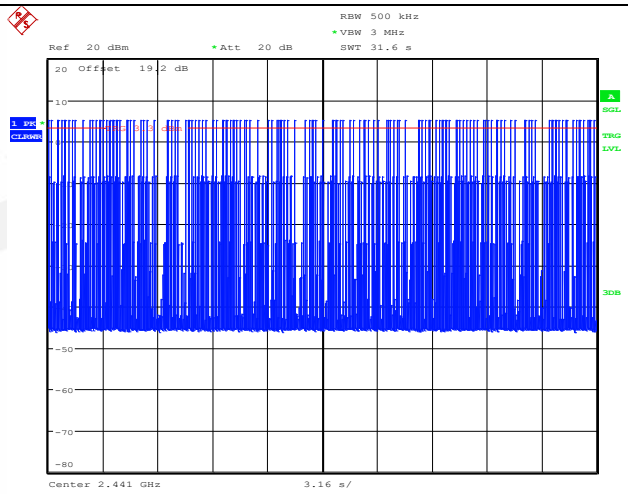

2DH3_Ant1_Hop

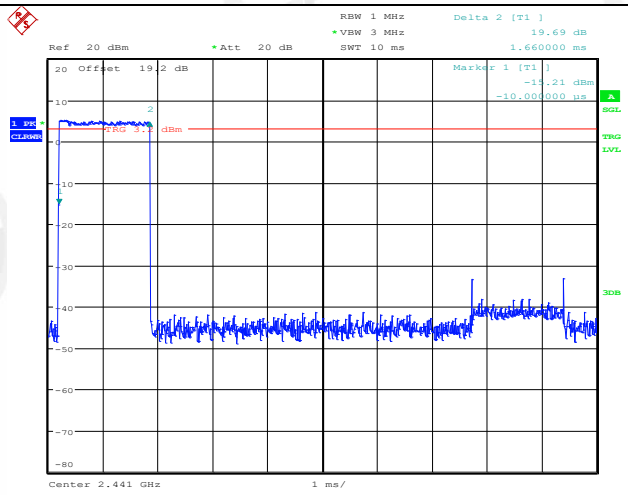

Date: 16.APR.2022 00:07:54

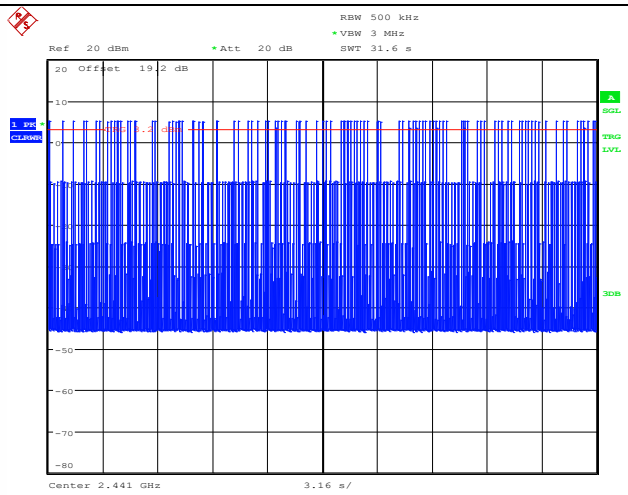

Date: 16.APR.2022 00:08:29

2DH5_Ant1_Hop

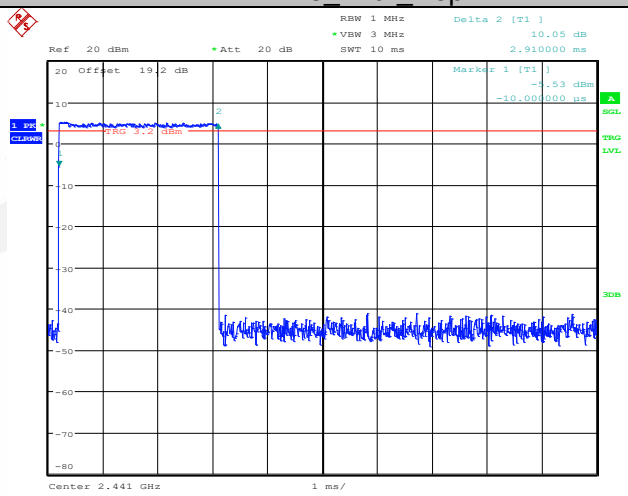

Date: 16.APR.2022 00:08:58

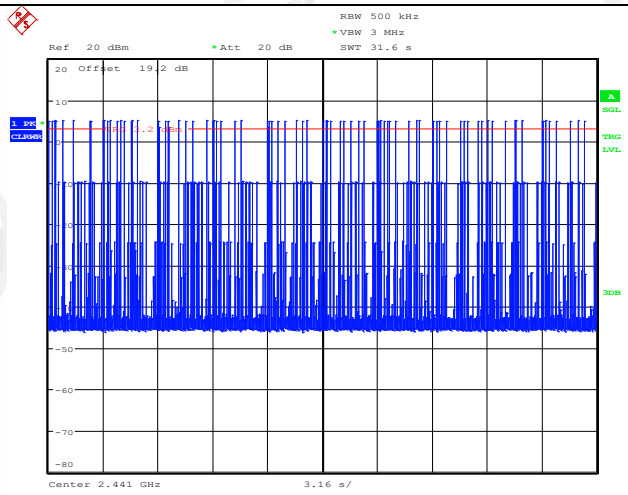

Date: 16.APR.2022 00:09:32

3DH1_Ant1_Hop

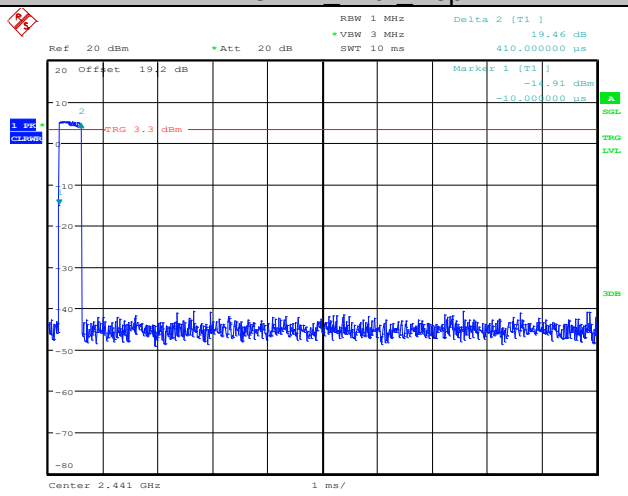

Date: 16.APR.2022 00:10:05

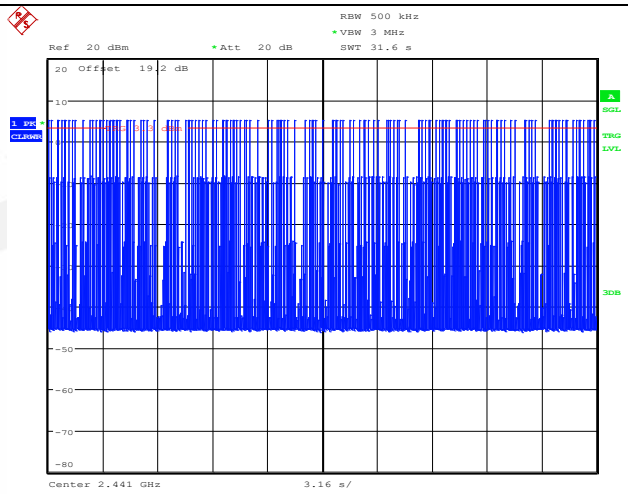

Date: 16.APR.2022 00:10:39

3DH3_Ant1_Hop

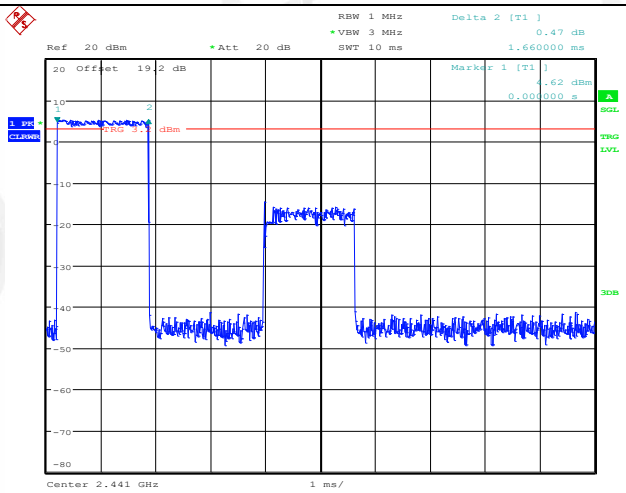

Date: 16.APR.2022 00:11:09

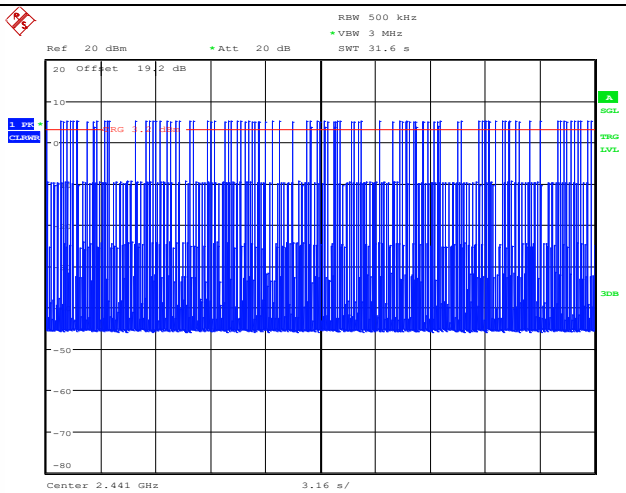

Date: 16.APR.2022 00:11:43

3DH5_Ant1_Hop

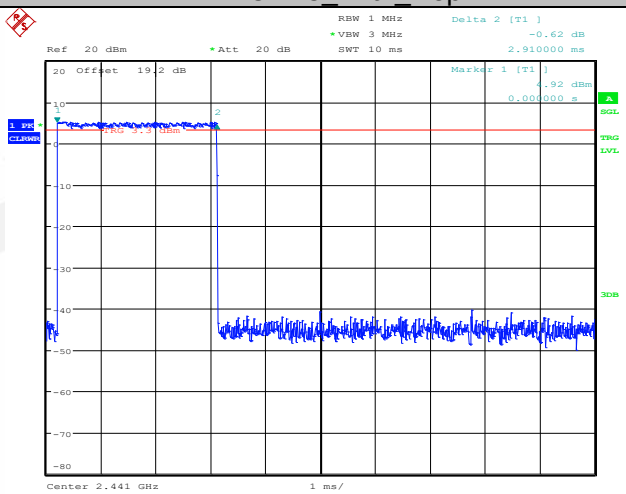

Date: 16.APR.2022 00:12:09

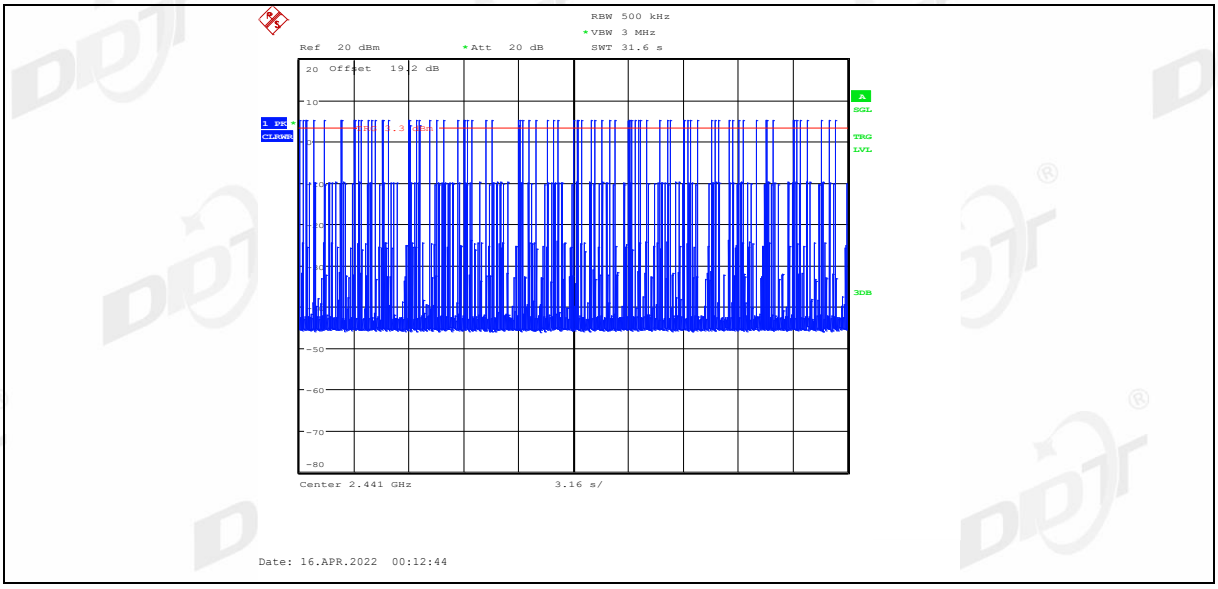
RBW 500 kHz
VBW 3 MHz
Ref 20 dBm
Att 20 dB
SWT 31.6 s
Offset 19.2 dB
1 PK
CLRWR
A
SGL
TRG
LVL
3DB
Center 2.441 GHz
3.16 s/
Date: 16.APR.2022 00:12:44

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

9.4. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
π/4-DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

9.5. Original test data

DH5_Ant1_Low_2402

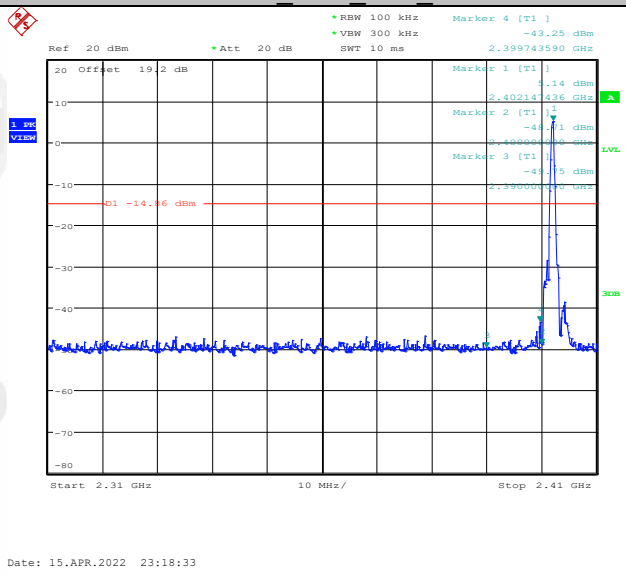

DH5_Ant1_High_2480

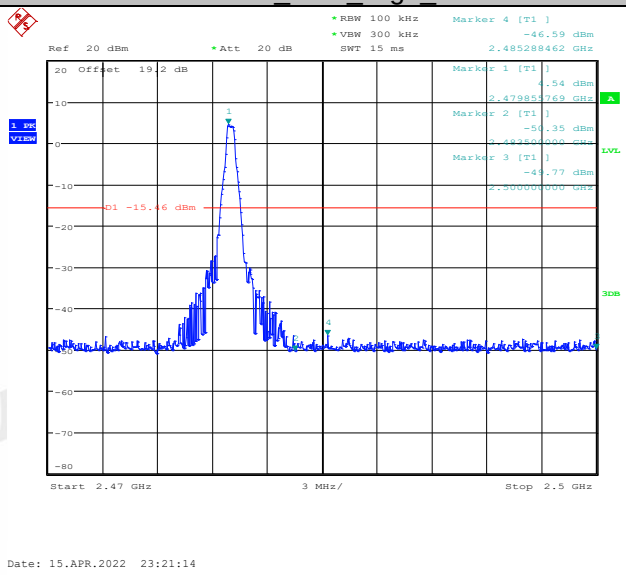

DH5_Ant1_Low_Hop

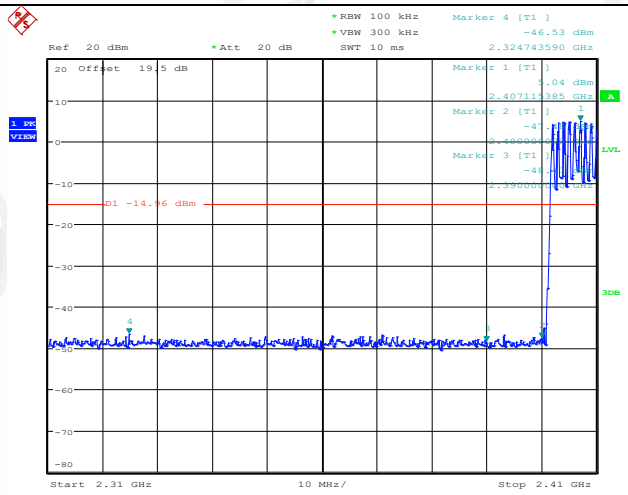

Date: 15.APR.2022 23:40:47

DH5_Ant1_High_Hop

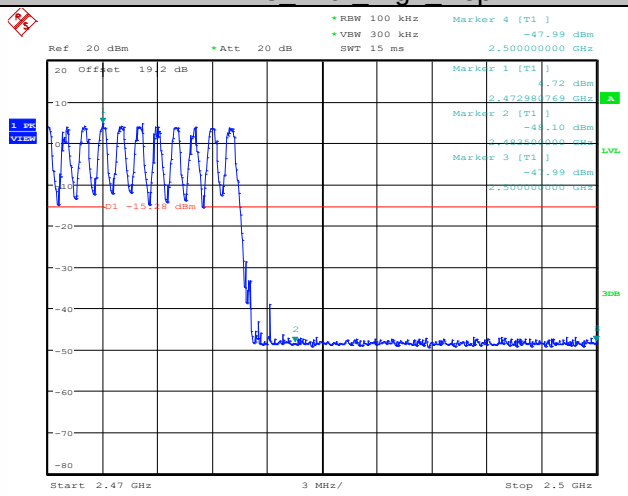

Date: 15.APR.2022 23:40:25

2DH5_Ant1_Low_2402

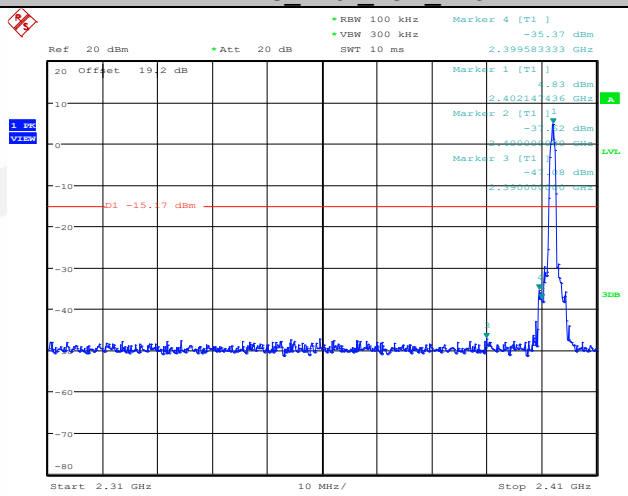

Date: 15.APR.2022 23:24:02

2DH5_Ant1_High_2480

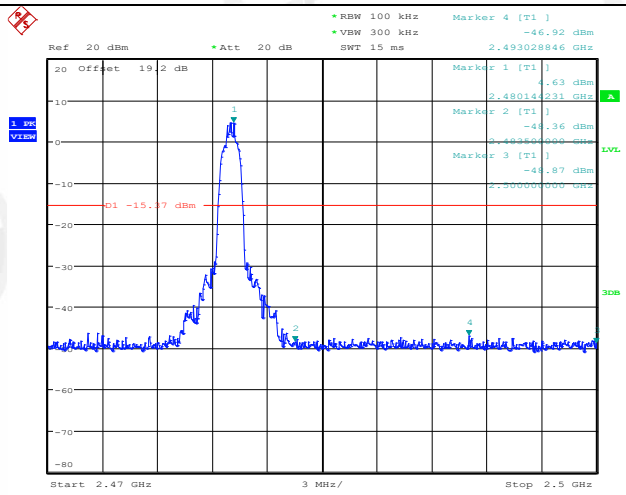

Date: 15.APR.2022 23:28:47

2DH5_Ant1_Low_Hop

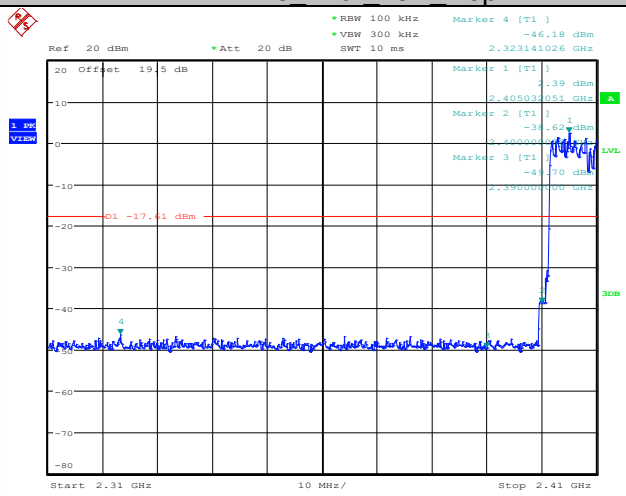

Date: 15.APR.2022 23:47:30

2DH5_Ant1_High_Hop

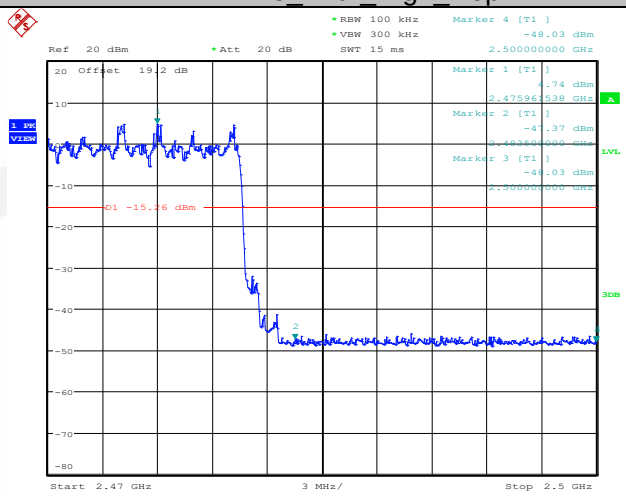

Date: 15.APR.2022 23:47:13

3DH5_Ant1_Low_2402

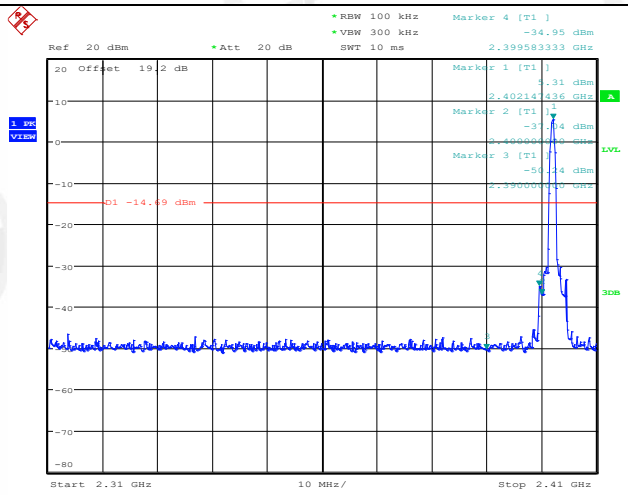

Date: 15.APR.2022 23:30:38

3DH5_Ant1_High_2480

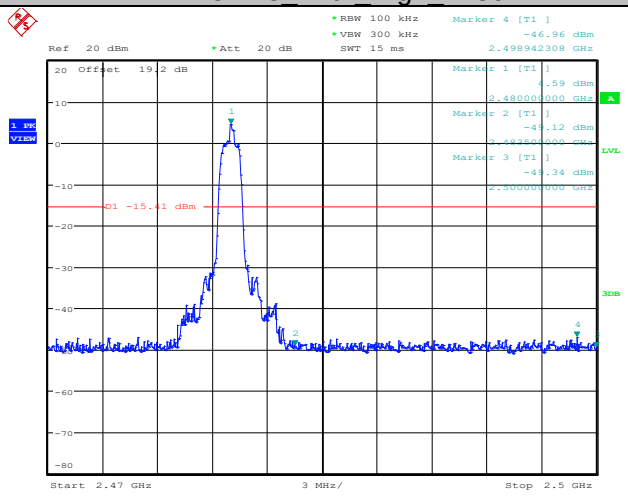

Date: 15.APR.2022 23:34:41

3DH5_Ant1_Low_Hop

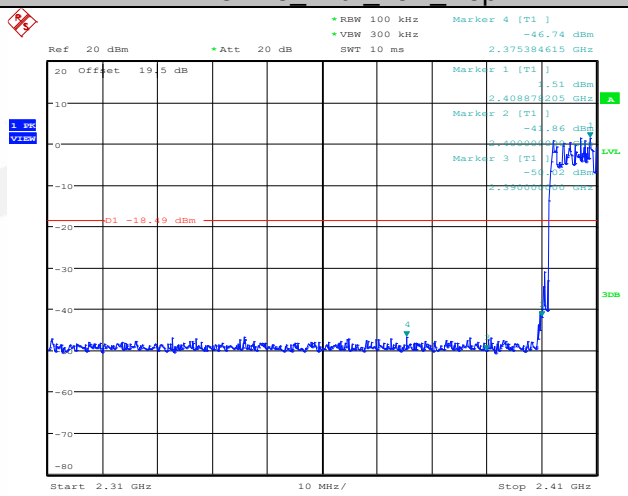

Date: 16.APR.2022 00:01:08

3DH5_Ant1_High_Hop

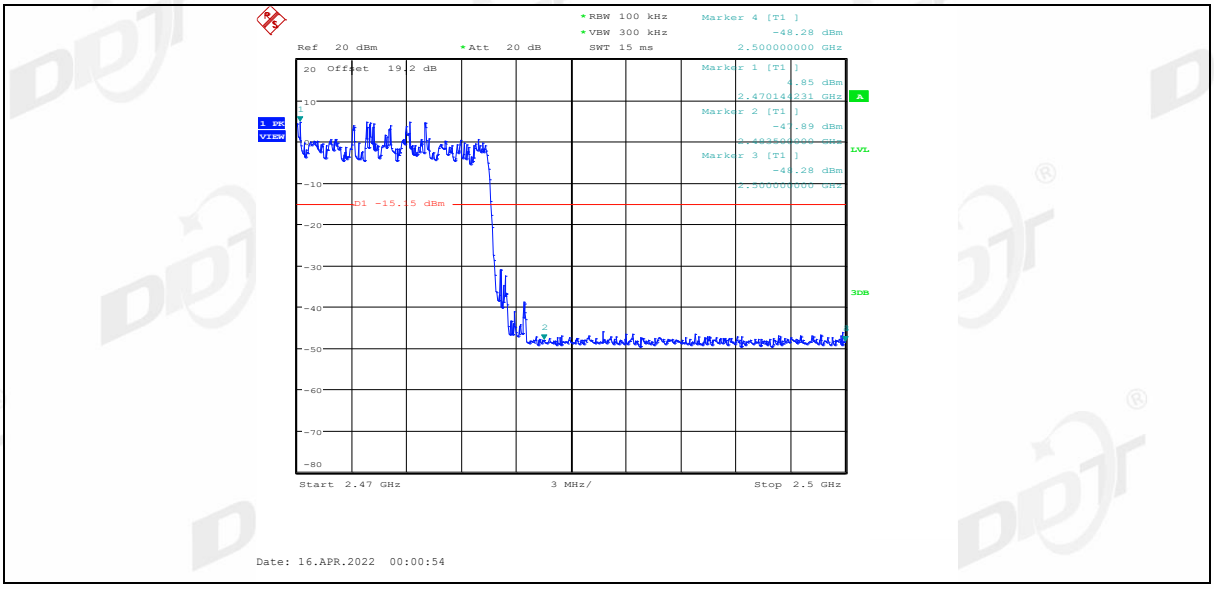
RBW 100 kHz
VBW 300 kHz
SWT 15 ms
Ref 20 dBm
Att 20 dB
Offset 19.2 dB
Marker 4 [T1]
-48.28 dBm
2.500000000 GHz
Marker 1 [T1]
4.85 dBm
2.470144231 GHz
Marker 2 [T1]
-47.89 dBm
2.483500000 GHz
Marker 3 [T1]
-48.28 dBm
2.500000000 GHz
D1 -15.15 dBm
Start 2.47 GHz
3 MHz/
Stop 2.5 GHz
Date: 16.APR.2022 00:00:54

10. Radiated Emission

10.1. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

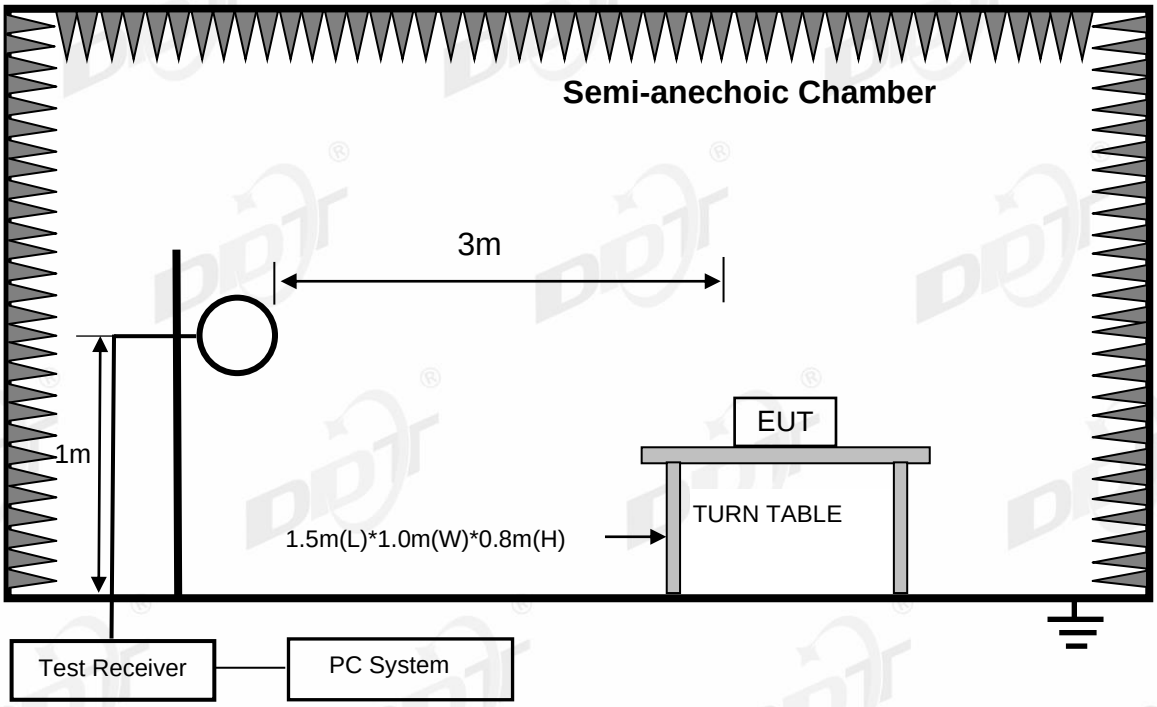

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

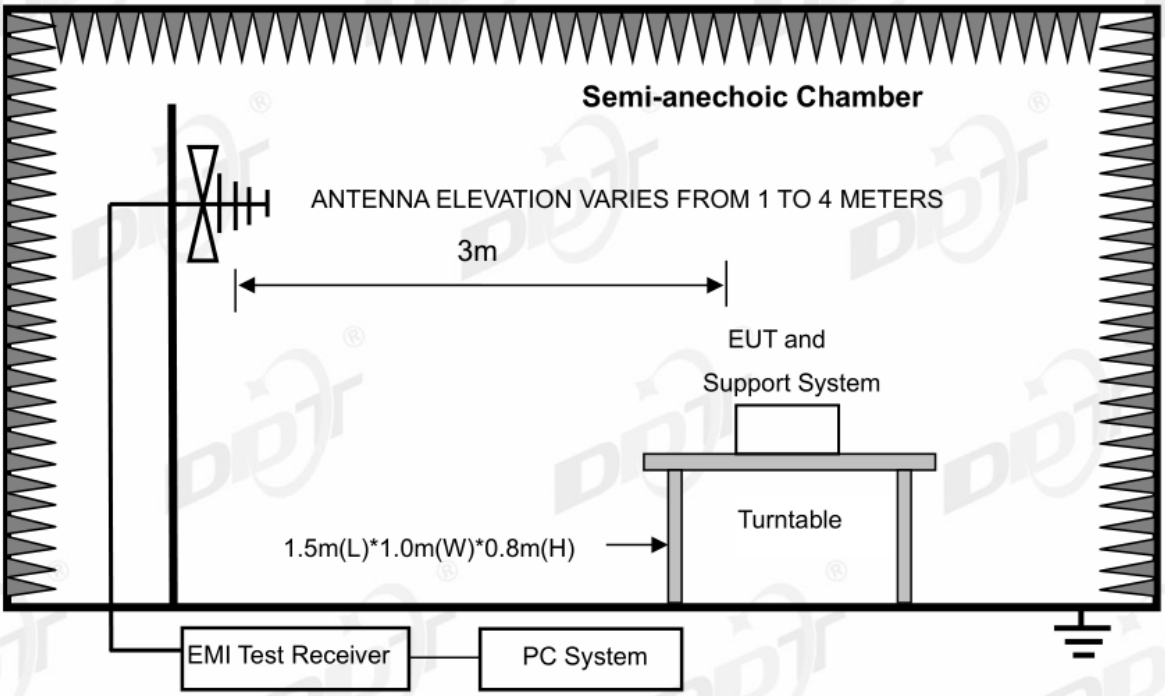

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

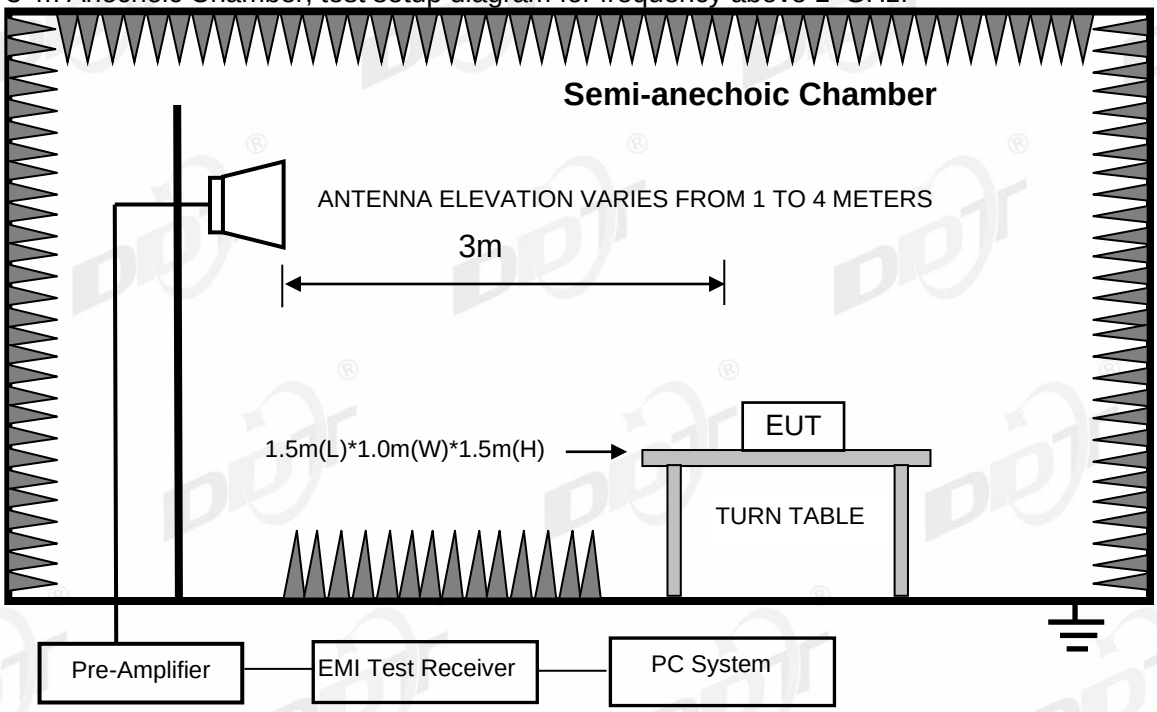

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
[1]0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	([2])
13.36-13.41			

[1]Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

[2]Above 38.6

(2) RSS-GEN Restricted frequency band*

MHz	MHz	MHz	GHz
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(3) FCC 15.209 & RSS-GEN Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$Limit_{3m}(dBuV/m)= Limit_{30m}(dBuV/m) + 40Log(30m/3m)$$

(4) Limit for this EUT
All the emissions appearing within 15.205 & RSS-GEN restricted frequency bands shall not exceed the limits shown in 15.209 & RSS-GEN, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 & RSS-GEN limits.

10.3. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 GHz.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6,5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 & RSS-GEN limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8DPSK, Tx 2480 MHz mode.

Note3: For emissions above 1 GHz. Scan with GFSK, π/4-DQPSK and 8DPSK mode, the worst case is 8DPSK mode. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Other emission levels are attenuated 20 dB below the limit, so it does not record in the report.

Note4: For simultaneous transmission of multiple channels in the 2.4GHz BT and 5.8GHz SRD bands, the worst case was reported.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC BELOW 1G.EM6	
Test Date	: 2022-05-18	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:24.5°C,Humi:55%,Press:100.1kPa	**Antenna/Distance**	: 2021 VLUB 9163 3#/3m/HORIZONTAL
Memo	:		

Data:
1

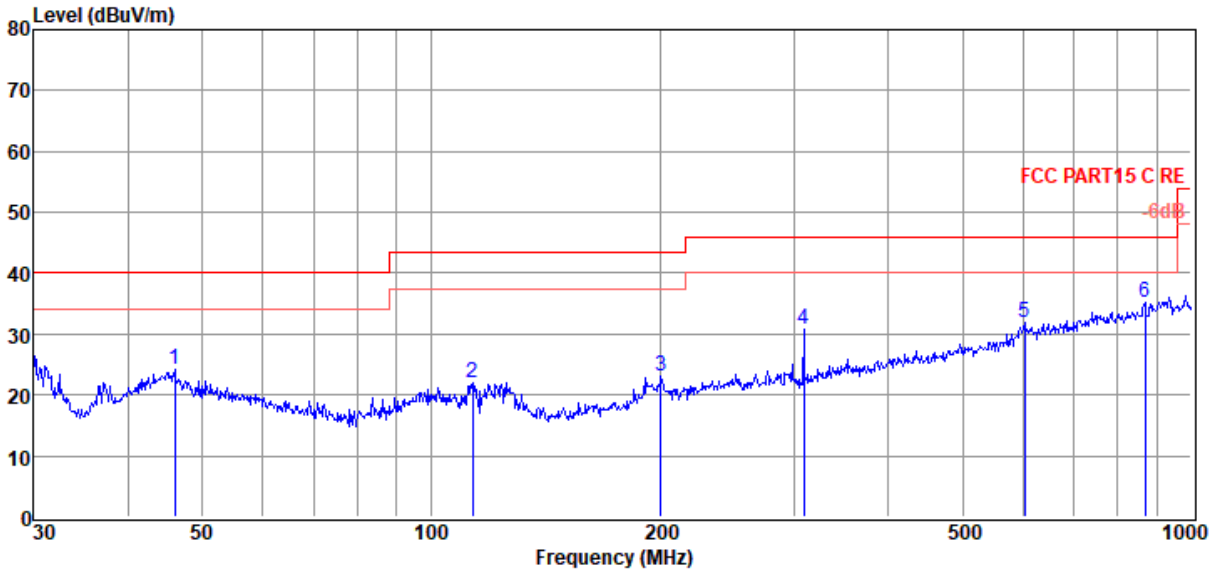

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	46.02	5.92	14.59	3.65	24.16	40.00	-15.84	QP	HORIZONTAL
2	113.32	7.88	9.94	4.06	21.88	43.50	-21.62	QP	HORIZONTAL
3	200.69	6.90	11.75	4.45	23.10	43.50	-20.40	QP	HORIZONTAL
4	308.91	12.62	13.38	4.85	30.85	46.00	-15.15	QP	HORIZONTAL
5	603.54	7.04	19.17	5.75	31.96	46.00	-14.04	QP	HORIZONTAL
6	869.13	7.34	21.48	6.39	35.21	46.00	-10.79	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC BELOW 1G.EM6	
Test Date	: 2022-05-18	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:24.5°C,Humi:55%,Press:100.1kPa	**Antenna/Distance**	: 2021 VLUB 9163 3#/3m/VERTICAL
Memo	:		

Data:
2

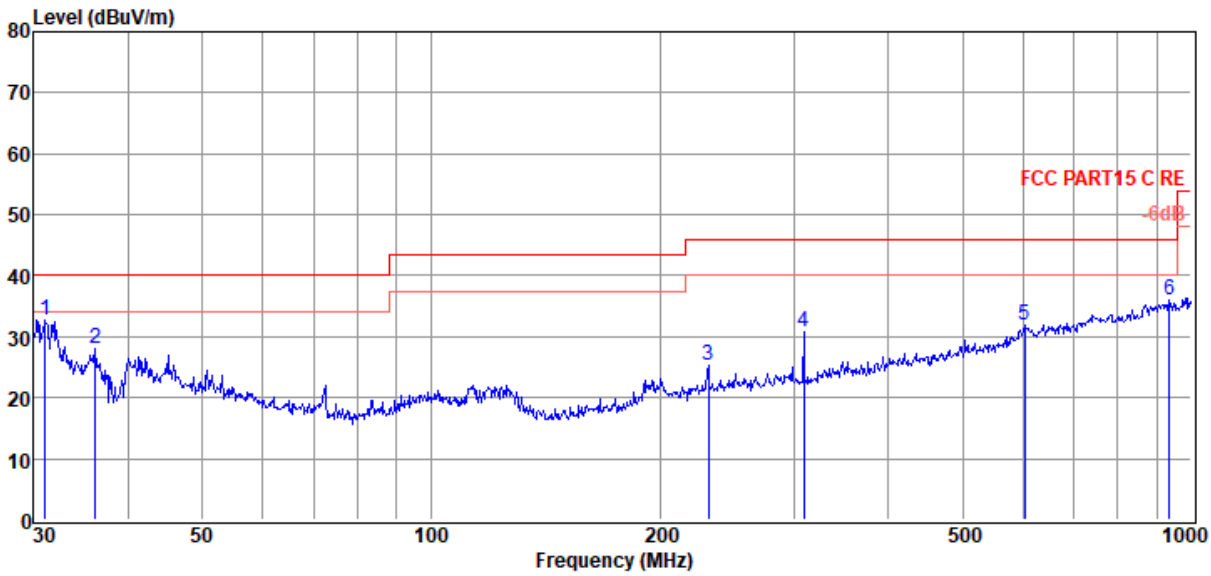

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	31.07	20.14	9.09	3.55	32.78	40.00	-7.22	QP	VERTICAL
2	36.13	14.87	9.69	3.59	28.15	40.00	-11.85	QP	VERTICAL
3	231.72	8.48	12.10	4.58	25.16	46.00	-20.84	QP	VERTICAL
4	308.91	12.62	13.38	4.85	30.85	46.00	-15.15	QP	VERTICAL
5	603.54	7.04	19.17	5.75	31.96	46.00	-14.04	QP	VERTICAL
6	935.55	7.31	22.29	6.54	36.14	46.00	-9.86	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2402		

Data: 1

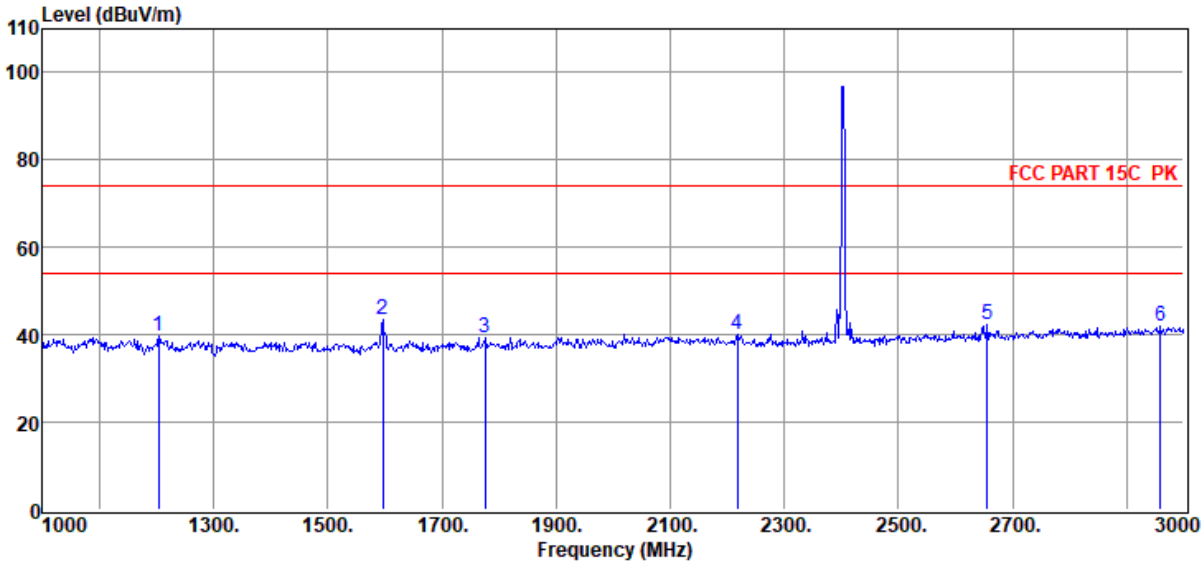

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1204.00	50.84	25.46	38.21	1.21	0.54	39.84	74.00	-34.16	Peak	VERTICAL
2	1596.00	54.54	25.65	38.79	1.42	0.61	43.43	74.00	-30.57	Peak	VERTICAL
3	1776.00	50.27	26.12	39.06	1.50	0.64	39.47	74.00	-34.53	Peak	VERTICAL
4	2218.00	50.31	27.09	39.51	1.66	0.70	40.25	74.00	-33.75	Peak	VERTICAL
5	2656.00	51.44	28.19	39.73	1.78	0.75	42.43	74.00	-31.57	Peak	VERTICAL
6	2960.00	49.67	29.35	39.88	1.86	0.79	41.79	74.00	-32.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2402		

Data: 2

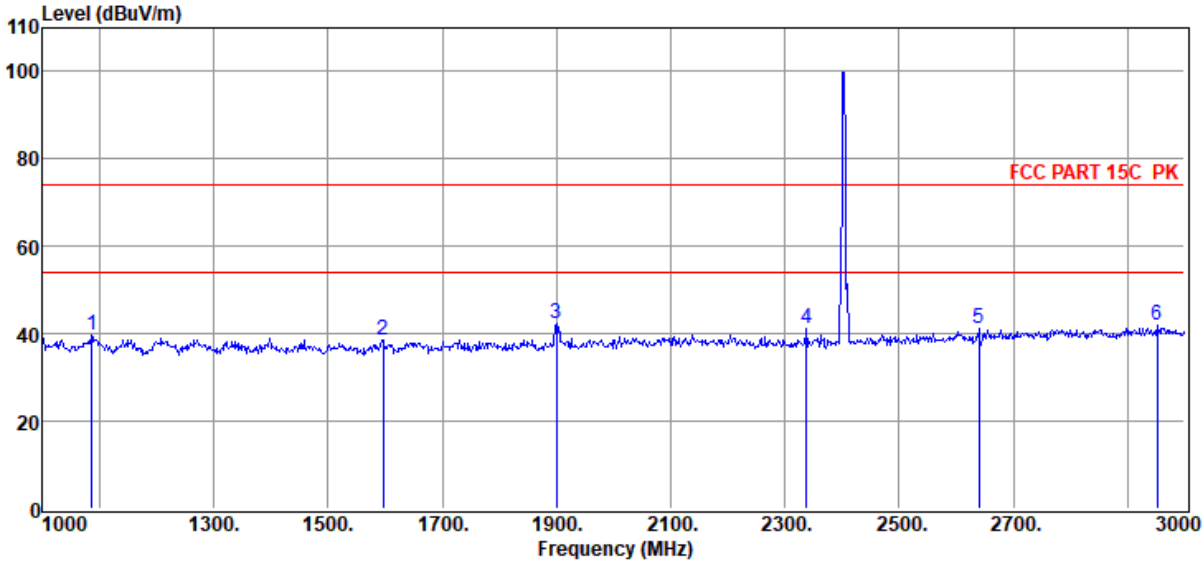

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1086.00	50.52	25.48	38.03	1.15	0.52	39.64	74.00	-34.36	Peak	HORIZONTAL
2	1596.00	49.58	25.65	38.79	1.42	0.61	38.47	74.00	-35.53	Peak	HORIZONTAL
3	1900.00	53.01	26.44	39.25	1.56	0.66	42.42	74.00	-31.58	Peak	HORIZONTAL
4	2338.00	50.87	27.31	39.57	1.69	0.72	41.02	74.00	-32.98	Peak	HORIZONTAL
5	2640.00	50.14	28.13	39.72	1.78	0.75	41.08	74.00	-32.92	Peak	HORIZONTAL
6	2952.00	50.03	29.32	39.88	1.86	0.78	42.11	74.00	-31.89	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2441		

Data: 5

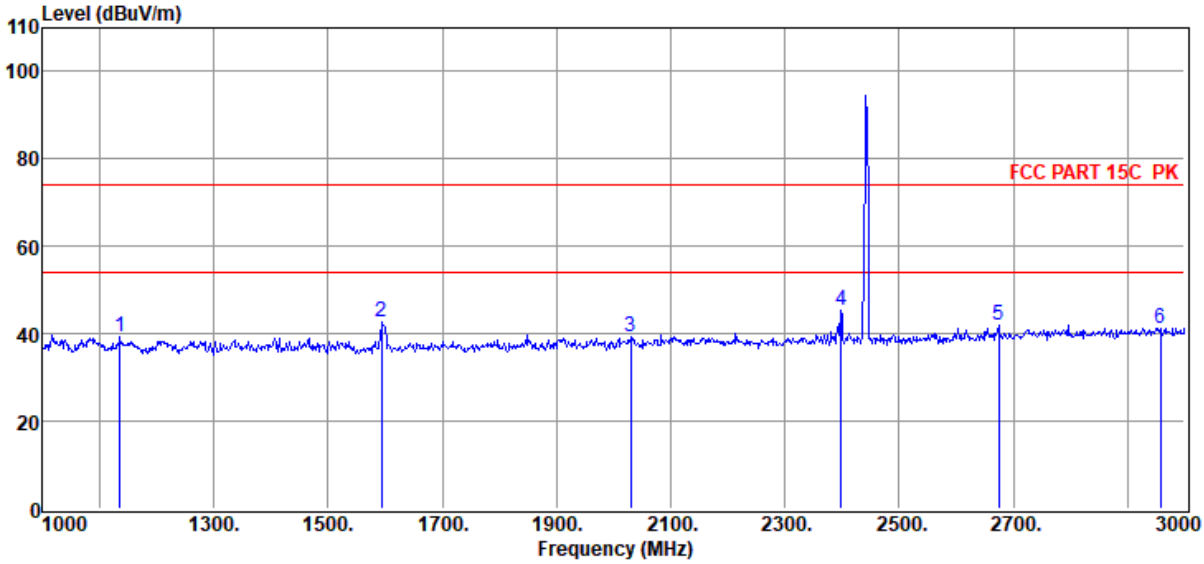

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1136.00	50.06	25.47	38.10	1.18	0.52	39.13	74.00	-34.87	Peak	VERTICAL
2	1594.00	53.88	25.64	38.79	1.42	0.61	42.76	74.00	-31.24	Peak	VERTICAL
3	2030.00	49.69	26.75	39.42	1.61	0.68	39.31	74.00	-34.69	Peak	VERTICAL
4	2398.00	55.00	27.42	39.60	1.71	0.72	45.25	74.00	-28.75	Peak	VERTICAL
5	2674.00	50.92	28.26	39.74	1.79	0.75	41.98	74.00	-32.02	Peak	VERTICAL
6	2958.00	49.16	29.34	39.88	1.86	0.79	41.27	74.00	-32.73	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2441		

Data: 6

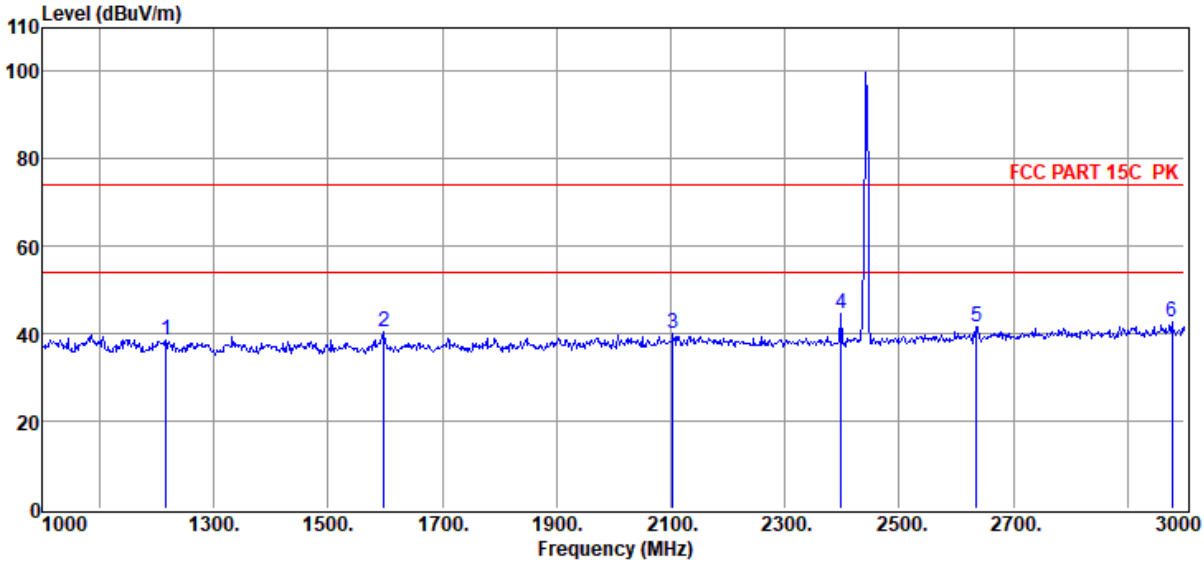

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1216.00	49.52	25.46	38.22	1.22	0.54	38.52	74.00	-35.48	Peak	HORIZONTAL
2	1598.00	51.38	25.65	38.80	1.42	0.61	40.26	74.00	-33.74	Peak	HORIZONTAL
3	2104.00	50.15	26.89	39.45	1.63	0.69	39.91	74.00	-34.09	Peak	HORIZONTAL
4	2398.00	54.20	27.42	39.60	1.71	0.72	44.45	74.00	-29.55	Peak	HORIZONTAL
5	2636.00	50.69	28.12	39.72	1.78	0.75	41.62	74.00	-32.38	Peak	HORIZONTAL
6	2978.00	50.50	29.42	39.89	1.86	0.79	42.68	74.00	-31.32	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2480		

Data: 7

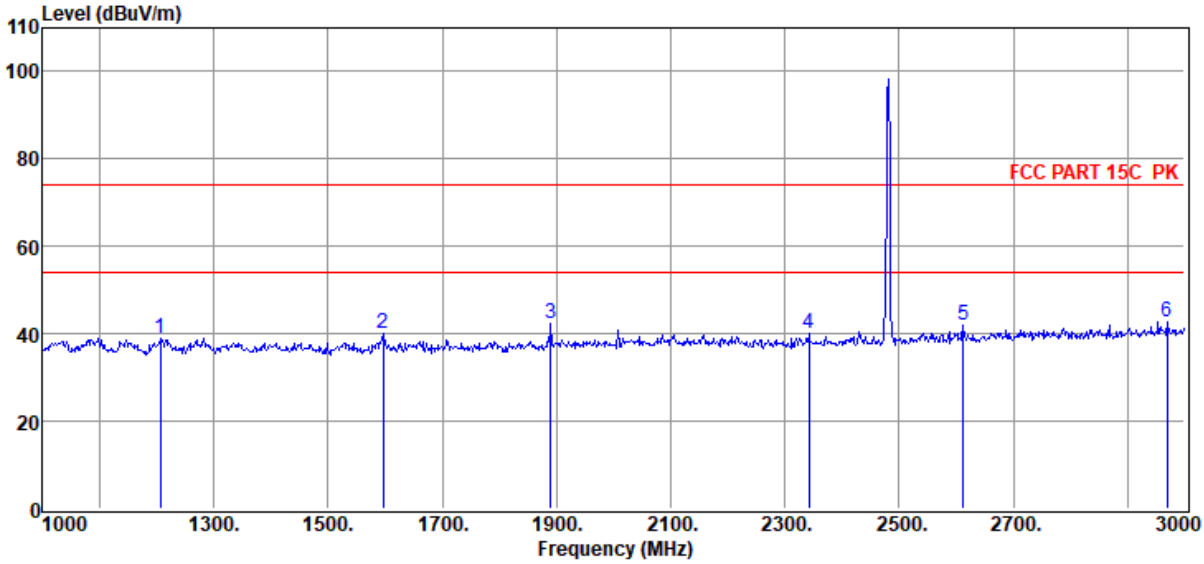

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1206.00	50.04	25.46	38.21	1.22	0.54	39.05	74.00	-34.95	Peak	HORIZONTAL
2	1596.00	51.11	25.65	38.79	1.42	0.61	40.00	74.00	-34.00	Peak	HORIZONTAL
3	1890.00	52.94	26.41	39.24	1.55	0.66	42.32	74.00	-31.68	Peak	HORIZONTAL
4	2342.00	49.78	27.32	39.57	1.70	0.72	39.95	74.00	-34.05	Peak	HORIZONTAL
5	2612.00	51.07	28.03	39.71	1.77	0.75	41.91	74.00	-32.09	Peak	HORIZONTAL
6	2970.00	50.45	29.39	39.89	1.86	0.79	42.60	74.00	-31.40	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2480		

Data: 8

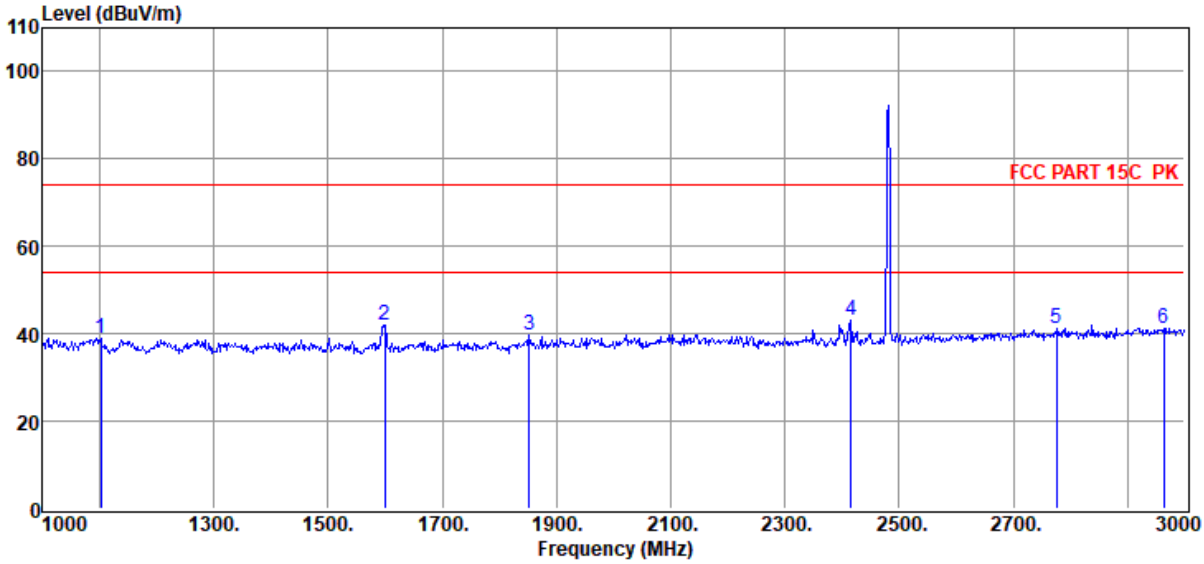

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1102.00	49.68	25.48	38.05	1.16	0.52	38.79	74.00	-35.21	Peak	VERTICAL
2	1600.00	53.19	25.66	38.80	1.42	0.61	42.08	74.00	-31.92	Peak	VERTICAL
3	1852.00	50.23	26.32	39.18	1.53	0.65	39.55	74.00	-34.45	Peak	VERTICAL
4	2416.00	52.86	27.45	39.61	1.72	0.73	43.15	74.00	-30.85	Peak	VERTICAL
5	2776.00	49.82	28.65	39.79	1.81	0.77	41.26	74.00	-32.74	Peak	VERTICAL
6	2964.00	49.25	29.36	39.88	1.86	0.79	41.38	74.00	-32.62	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2402		

Data: 19

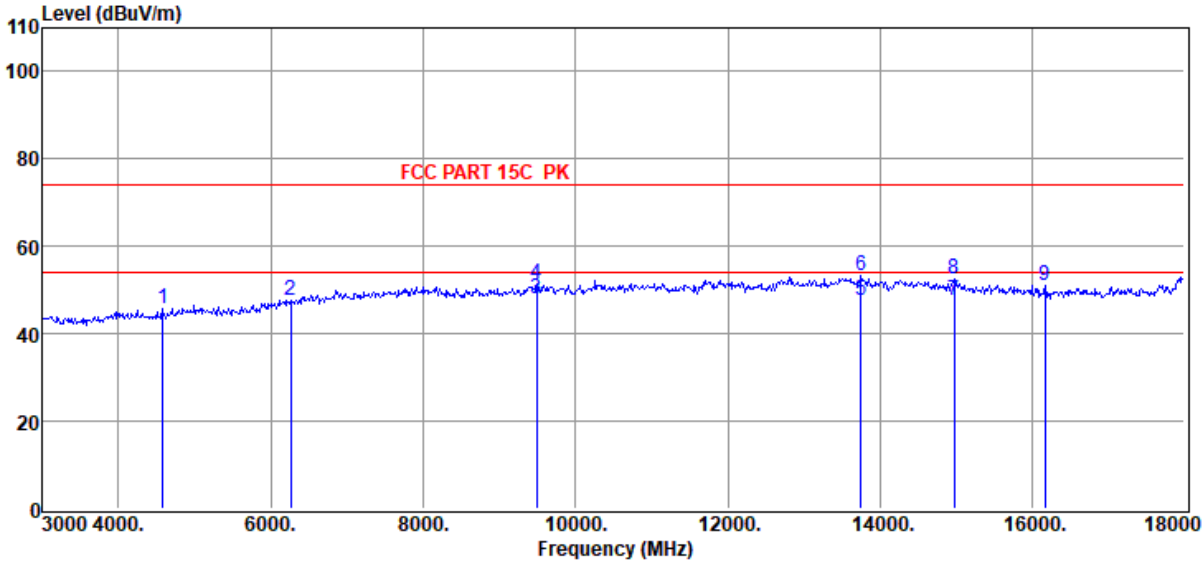

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4575.00	49.64	31.74	40.32	2.39	2.13	45.58	74.00	-28.42	Peak	HORIZONTAL
2	6255.00	47.66	34.61	40.30	3.15	2.66	47.78	74.00	-26.22	Peak	HORIZONTAL
3	9495.00	43.50	38.70	40.25	3.62	2.33	47.90	54.00	-6.10	Average	HORIZONTAL
4	9495.00	47.03	38.70	40.25	3.62	2.33	51.43	74.00	-22.57	Peak	HORIZONTAL
5	13755.00	40.50	39.95	39.87	4.27	2.91	47.76	54.00	-6.24	Average	HORIZONTAL
6	13755.00	46.19	39.95	39.87	4.27	2.91	53.45	74.00	-20.55	Peak	HORIZONTAL
7	14970.00	40.50	39.52	39.60	4.46	2.63	47.51	54.00	-6.49	Average	HORIZONTAL
8	14970.00	45.44	39.52	39.60	4.46	2.63	52.45	74.00	-21.55	Peak	HORIZONTAL
9	16170.00	45.18	37.90	39.93	4.64	3.19	50.98	74.00	-23.02	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2402		

Data: 20

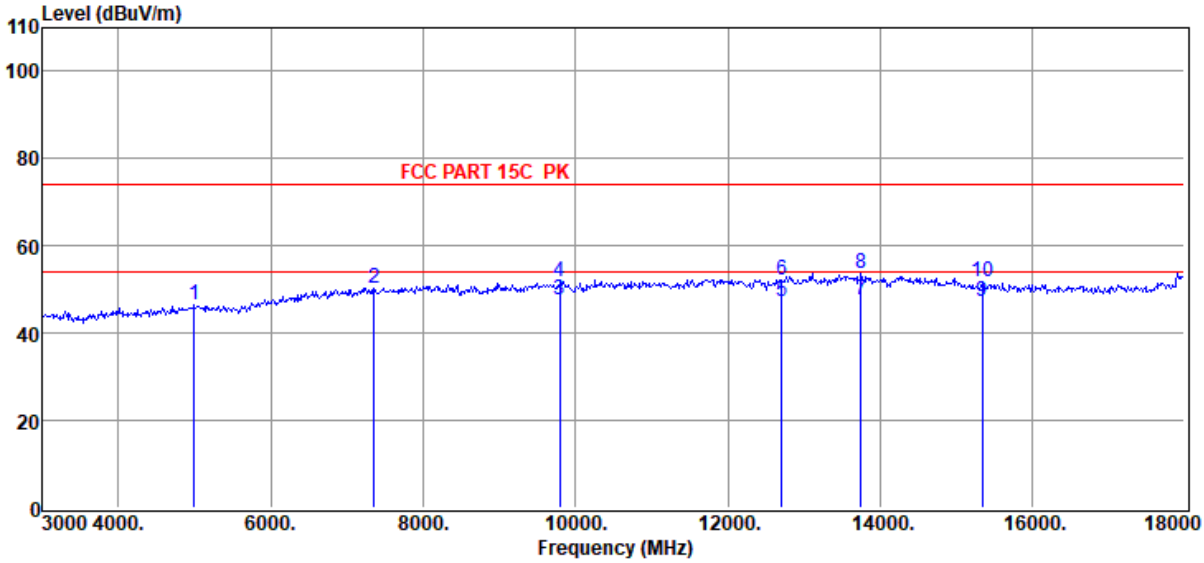

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4995.00	49.17	33.08	40.40	2.54	2.19	46.58	74.00	-27.42	Peak	VERTICAL
2	7350.00	48.43	36.28	39.74	3.10	2.27	50.34	74.00	-23.66	Peak	VERTICAL
3	9795.00	43.50	38.52	40.46	3.65	2.42	47.63	54.00	-6.37	Average	VERTICAL
4	9795.00	47.55	38.52	40.46	3.65	2.42	51.68	74.00	-22.32	Peak	VERTICAL
5	12705.00	41.50	39.25	40.31	3.99	2.79	47.22	54.00	-6.78	Average	VERTICAL
6	12705.00	46.63	39.25	40.31	3.99	2.79	52.35	74.00	-21.65	Peak	VERTICAL
7	13755.00	40.50	39.95	39.87	4.27	2.91	47.76	54.00	-6.24	Average	VERTICAL
8	13755.00	46.35	39.95	39.87	4.27	2.91	53.61	74.00	-20.39	Peak	VERTICAL
9	15345.00	40.56	39.02	39.70	4.53	2.79	47.20	54.00	-6.80	Average	VERTICAL
10	15345.00	45.02	39.02	39.70	4.53	2.79	51.66	74.00	-22.34	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2441		

Data: 21

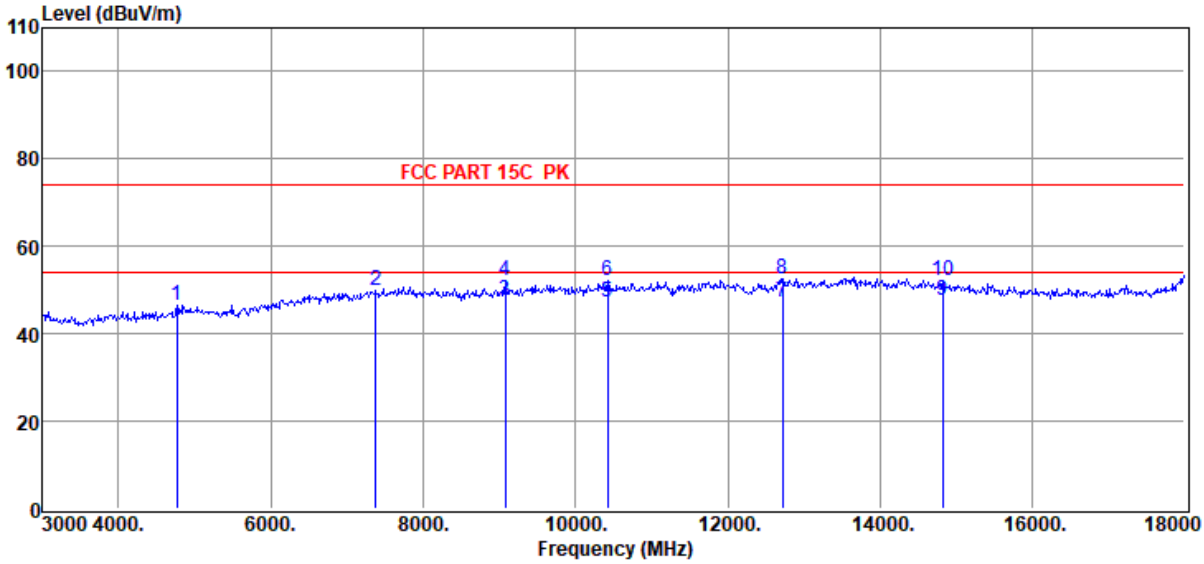

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4770.00	49.87	32.36	40.35	2.46	2.16	46.50	74.00	-27.50	Peak	VERTICAL
2	7380.00	47.98	36.30	39.74	3.11	2.27	49.92	74.00	-24.08	Peak	VERTICAL
3	9075.00	43.50	38.36	39.95	3.37	2.20	47.48	54.00	-6.52	Average	VERTICAL
4	9075.00	48.04	38.36	39.95	3.37	2.20	52.02	74.00	-21.98	Peak	VERTICAL
5	10425.00	42.50	38.91	40.43	3.67	2.44	47.09	54.00	-6.91	Average	VERTICAL
6	10425.00	47.65	38.91	40.43	3.67	2.44	52.24	74.00	-21.76	Peak	VERTICAL
7	12720.00	41.51	39.26	40.32	4.01	2.80	47.26	54.00	-6.74	Average	VERTICAL
8	12720.00	46.95	39.26	40.32	4.01	2.80	52.70	74.00	-21.30	Peak	VERTICAL
9	14820.00	40.60	39.64	39.62	4.43	2.67	47.72	54.00	-6.28	Average	VERTICAL
10	14820.00	45.11	39.64	39.62	4.43	2.67	52.23	74.00	-21.77	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2441		

Data: 22

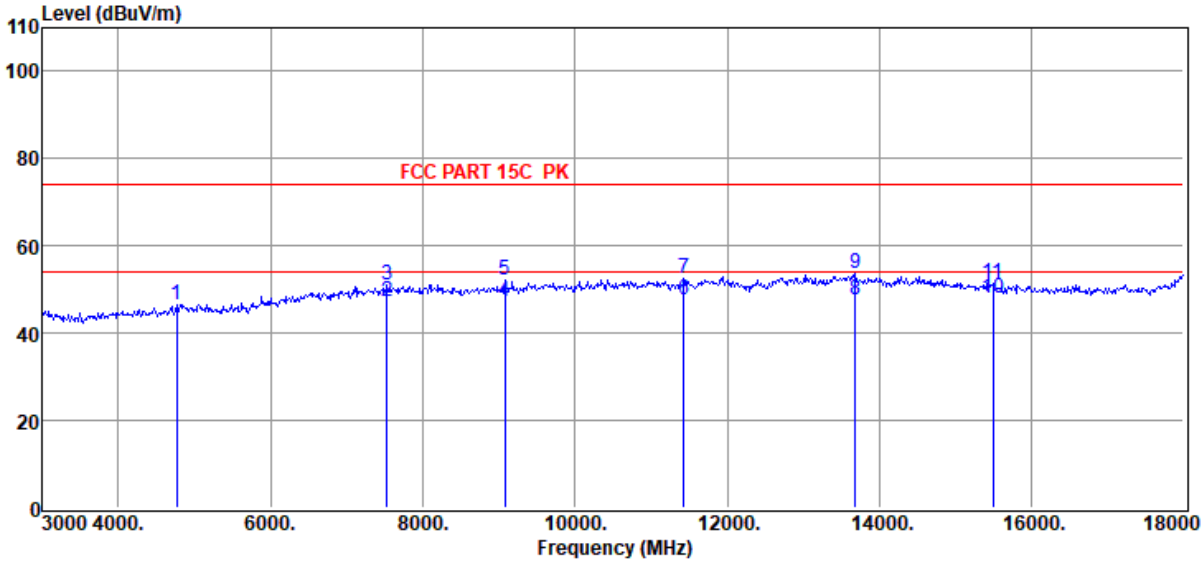

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4770.00	49.87	32.36	40.35	2.46	2.16	46.50	74.00	-27.50	Peak	HORIZONTAL
2	7530.00	45.00	36.44	39.75	3.14	2.27	47.10	54.00	-6.90	Average	HORIZONTAL
3	7530.00	49.06	36.44	39.75	3.14	2.27	51.16	74.00	-22.84	Peak	HORIZONTAL
4	9075.00	43.10	38.36	39.95	3.37	2.20	47.08	54.00	-6.92	Average	HORIZONTAL
5	9075.00	48.04	38.36	39.95	3.37	2.20	52.02	74.00	-21.98	Peak	HORIZONTAL
6	11430.00	42.50	39.04	40.16	3.95	2.39	47.72	54.00	-6.28	Average	HORIZONTAL
7	11430.00	47.19	39.04	40.16	3.95	2.39	52.41	74.00	-21.59	Peak	HORIZONTAL
8	13680.00	40.50	39.96	39.92	4.18	2.92	47.64	54.00	-6.36	Average	HORIZONTAL
9	13680.00	46.37	39.96	39.92	4.18	2.92	53.51	74.00	-20.49	Peak	HORIZONTAL
10	15495.00	41.50	38.81	39.75	4.56	2.87	47.99	54.00	-6.01	Average	HORIZONTAL
11	15495.00	44.89	38.81	39.75	4.56	2.87	51.38	74.00	-22.62	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2480		

Data: 23

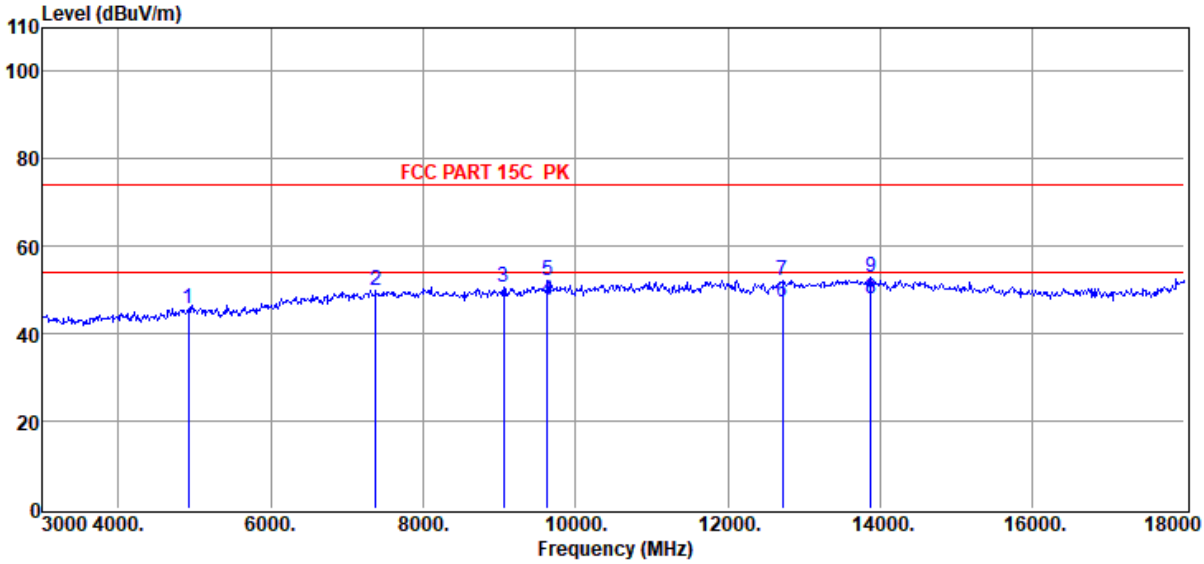

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4920.00	48.73	32.84	40.38	2.51	2.18	45.88	74.00	-28.12	Peak	HORIZONTAL
2	7380.00	48.07	36.30	39.74	3.11	2.27	50.01	74.00	-23.99	Peak	HORIZONTAL
3	9060.00	46.85	38.35	39.94	3.36	2.20	50.82	74.00	-23.18	Peak	HORIZONTAL
4	9630.00	43.50	38.62	40.34	3.63	2.37	47.78	54.00	-6.22	Average	HORIZONTAL
5	9630.00	47.87	38.62	40.34	3.63	2.37	52.15	74.00	-21.85	Peak	HORIZONTAL
6	12720.00	41.51	39.26	40.32	4.01	2.80	47.26	54.00	-6.74	Average	HORIZONTAL
7	12720.00	46.56	39.26	40.32	4.01	2.80	52.31	74.00	-21.69	Peak	HORIZONTAL
8	13875.00	40.50	39.93	39.79	4.39	2.91	47.94	54.00	-6.06	Average	HORIZONTAL
9	13875.00	45.43	39.93	39.79	4.39	2.91	52.87	74.00	-21.13	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2480		

Data: 24

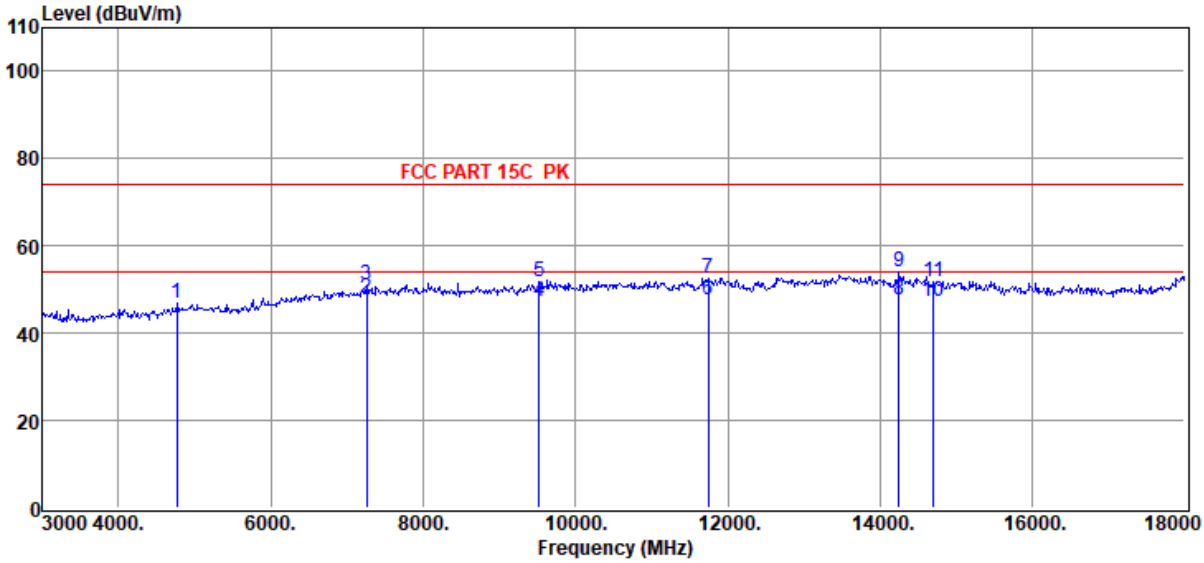

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4770.00	50.28	32.36	40.35	2.46	2.16	46.91	74.00	-27.09	Peak	VERTICAL
2	7260.00	46.00	36.21	39.73	3.08	2.27	47.83	54.00	-6.17	Average	VERTICAL
3	7260.00	49.18	36.21	39.73	3.08	2.27	51.01	74.00	-22.99	Peak	VERTICAL
4	9525.00	43.00	38.69	40.27	3.62	2.34	47.38	54.00	-6.62	Average	VERTICAL
5	9525.00	47.39	38.69	40.27	3.62	2.34	51.77	74.00	-22.23	Peak	VERTICAL
6	11745.00	42.21	39.10	40.13	4.01	2.39	47.58	54.00	-6.42	Average	VERTICAL
7	11745.00	47.28	39.10	40.13	4.01	2.39	52.65	74.00	-21.35	Peak	VERTICAL
8	14250.00	40.00	39.90	39.67	4.44	2.83	47.50	54.00	-6.50	Average	VERTICAL
9	14250.00	46.56	39.90	39.67	4.44	2.83	54.06	74.00	-19.94	Peak	VERTICAL
10	14700.00	40.00	39.74	39.63	4.40	2.70	47.21	54.00	-6.79	Average	VERTICAL
11	14700.00	44.62	39.74	39.63	4.40	2.70	51.83	74.00	-22.17	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: 120V 60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2480+11N20 5785		

Data: 85

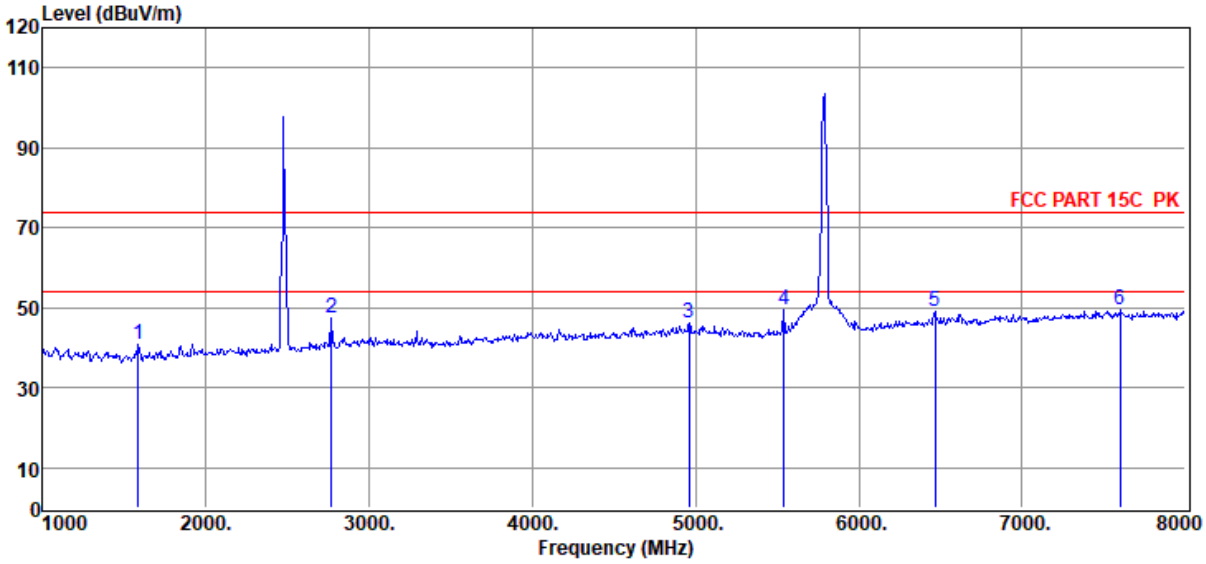

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1588.00	52.01	25.63	38.78	1.42	0.61	40.89	74.00	-33.11	Peak	HORIZONTAL
2	2771.00	56.13	28.63	39.79	1.81	0.76	47.54	74.00	-26.46	Peak	HORIZONTAL
3	4962.00	50.25	32.98	40.39	2.53	0.91	46.28	74.00	-27.72	Peak	HORIZONTAL
4	5543.00	53.53	32.90	40.45	2.61	1.03	49.62	74.00	-24.38	Peak	HORIZONTAL
5	6467.00	49.68	35.12	40.13	3.25	1.04	48.96	74.00	-25.04	Peak	HORIZONTAL
6	7601.00	48.32	36.52	39.76	3.15	1.08	49.31	74.00	-24.69	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: 120V 60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2480+11N20 5785		

Data: 86

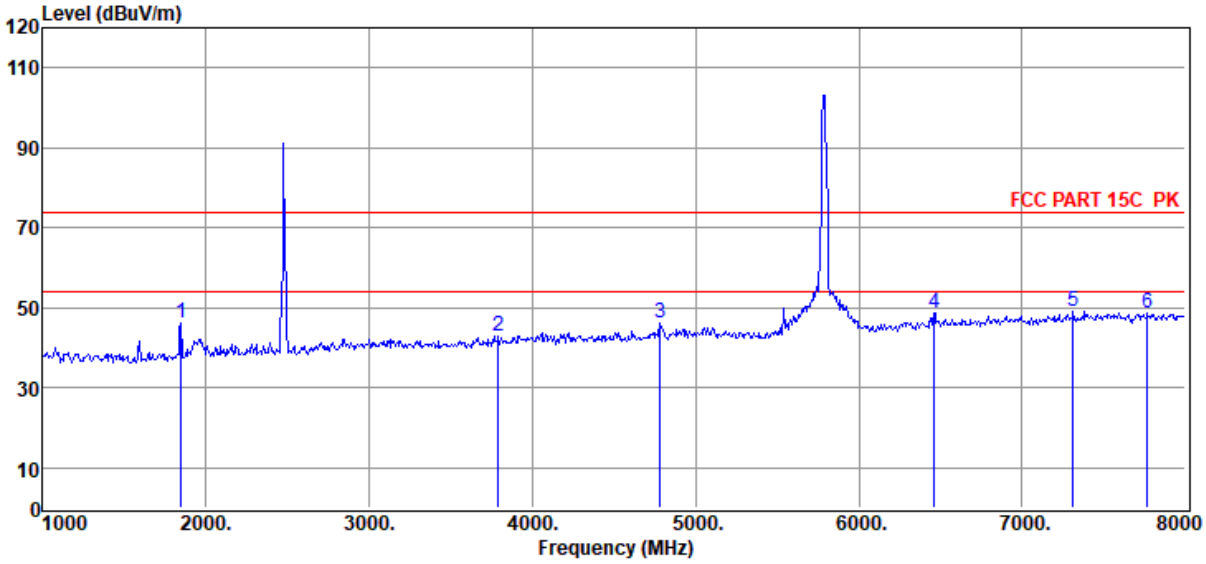

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1847.00	56.83	26.30	39.17	1.53	0.65	46.14	74.00	-27.86	Peak	VERTICAL
2	3793.00	49.88	30.40	40.14	1.94	0.85	42.93	74.00	-31.07	Peak	VERTICAL
3	4780.00	50.79	32.40	40.36	2.46	0.90	46.19	74.00	-27.81	Peak	VERTICAL
4	6460.00	49.29	35.10	40.13	3.25	1.04	48.55	74.00	-25.45	Peak	VERTICAL
5	7314.00	48.39	36.25	39.73	3.10	1.01	49.02	74.00	-24.98	Peak	VERTICAL
6	7769.00	47.52	36.72	39.78	3.17	1.12	48.75	74.00	-25.25	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: 120V 60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2480+11N20 5785		

Data: 87

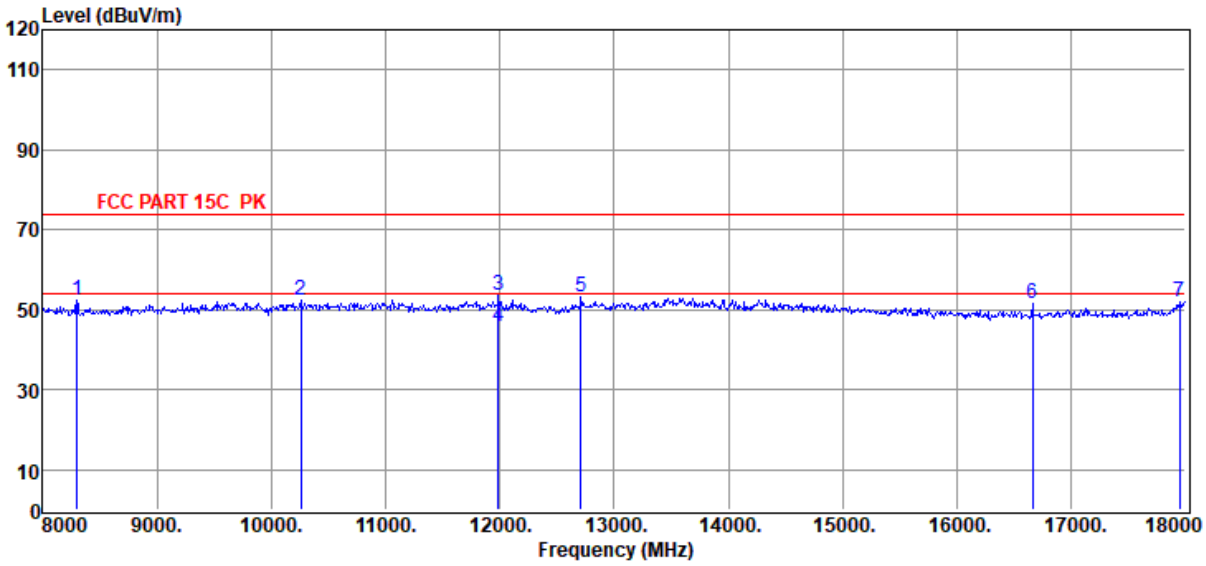

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	8300.00	48.95	37.48	39.83	3.21	2.74	52.55	74.00	-21.45	Peak	VERTICAL
2	10260.00	47.54	38.71	40.50	3.67	2.93	52.35	74.00	-21.65	Peak	VERTICAL
3	11990.00	48.04	39.20	40.10	4.05	2.37	53.56	74.00	-20.44	Peak	VERTICAL
4	11990.00	40.19	39.20	40.10	4.05	2.37	45.71	54.00	-8.29	Average	VERTICAL
5	12710.00	47.53	39.25	40.31	4.00	2.57	53.04	74.00	-20.96	Peak	VERTICAL
6	16660.00	45.63	38.09	40.03	4.72	3.12	51.53	74.00	-22.47	Peak	VERTICAL
7	17950.00	42.78	42.19	40.67	4.95	2.65	51.90	74.00	-22.10	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: 120V 60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2480+11N20 5785		

Data: 88

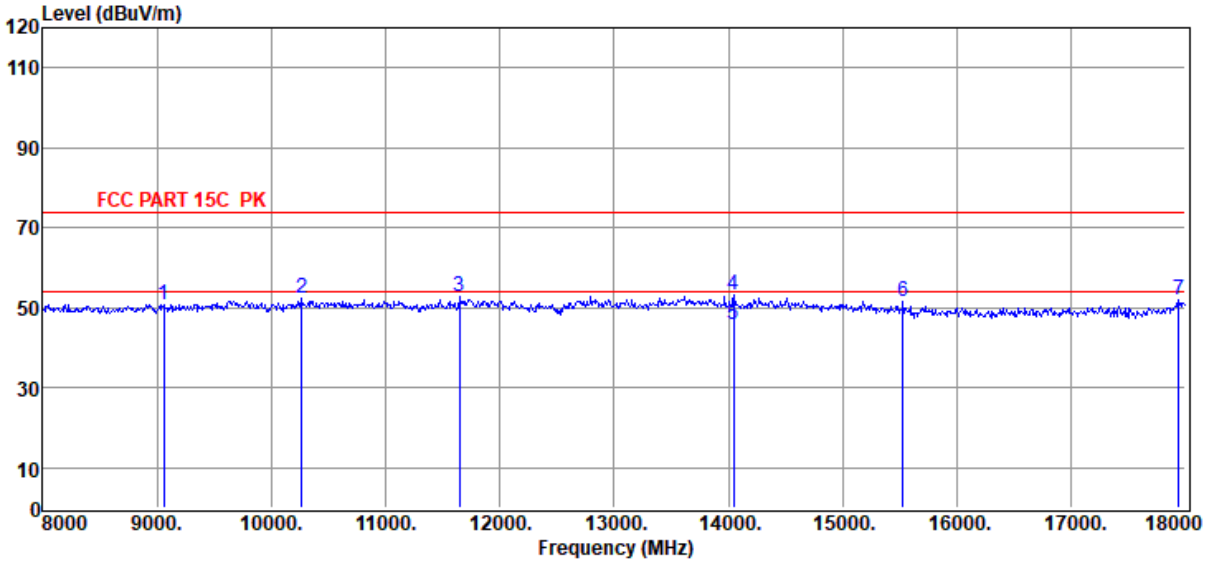

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	9060.00	46.24	38.35	39.94	3.36	2.81	50.82	74.00	-23.18	Peak	HORIZONTAL
2	10270.00	47.65	38.72	40.49	3.67	2.93	52.48	74.00	-21.52	Peak	HORIZONTAL
3	11650.00	47.52	39.06	40.13	3.99	2.46	52.90	74.00	-21.10	Peak	HORIZONTAL
4	14050.00	45.85	39.90	39.69	4.51	2.67	53.24	74.00	-20.76	Peak	HORIZONTAL
5	14050.00	38.18	39.90	39.69	4.51	2.67	45.57	54.00	-8.43	Average	HORIZONTAL
6	15530.00	45.31	38.75	39.76	4.56	2.50	51.36	74.00	-22.64	Peak	HORIZONTAL
7	17940.00	42.78	42.13	40.66	4.94	2.66	51.85	74.00	-22.15	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

RF Conducted Spurious Emissions

10.5. Block diagram of test setup

Same as section 4.1

10.6. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

10.7. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

10.8. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
π/4-DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

10.9. Original test data

DH5_Ant1_2402_0~Reference

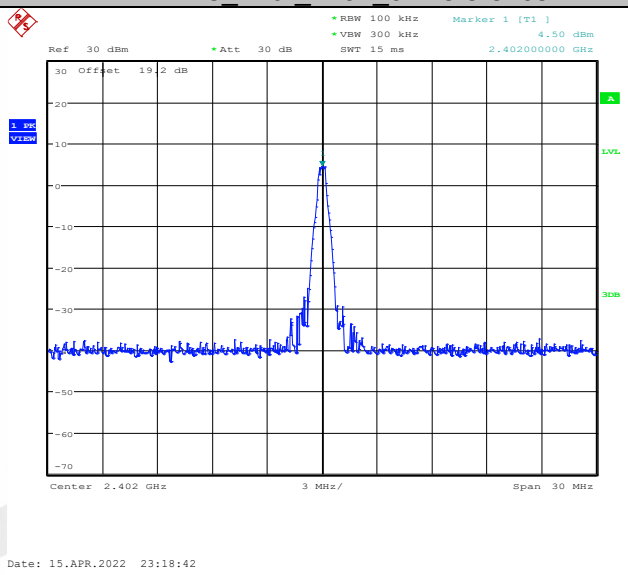

DH5_Ant1_2402_30~1000

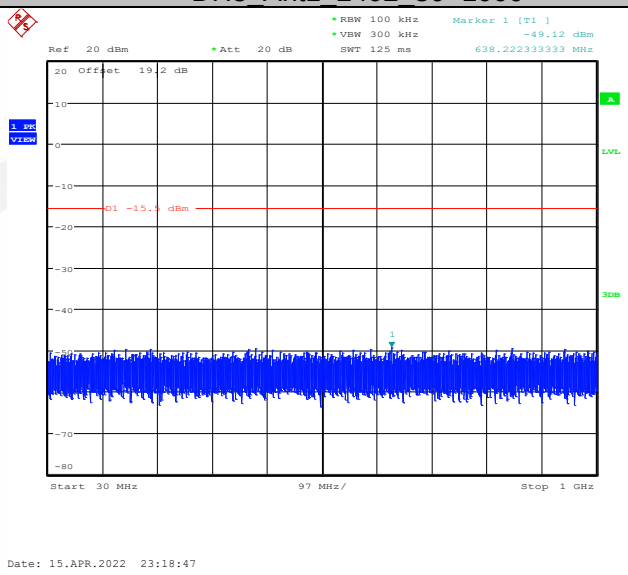

DH5_Ant1_2402_1000~26500

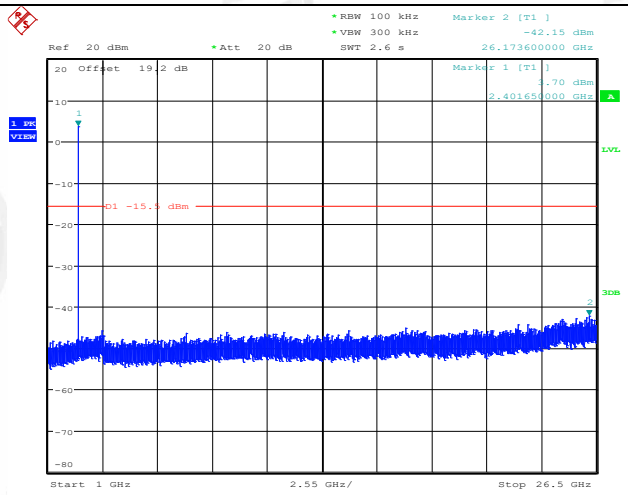

DH5_Ant1_2441_0~Reference

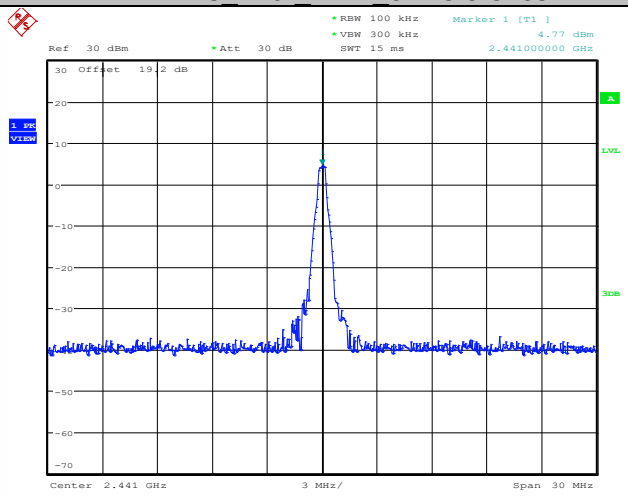

DH5_Ant1_2441_30~1000

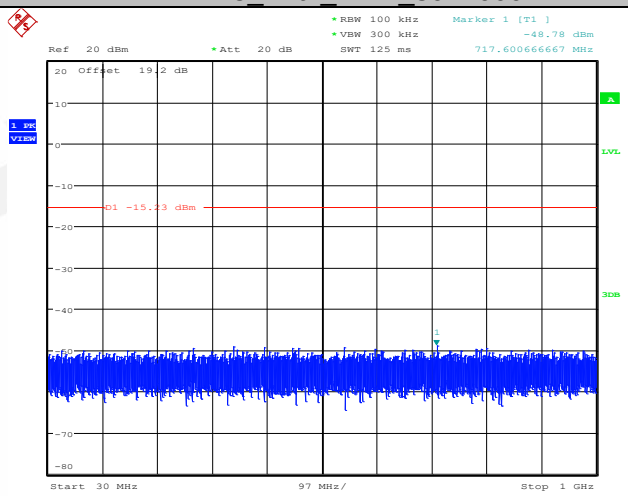

DH5_Ant1_2441_1000~26500

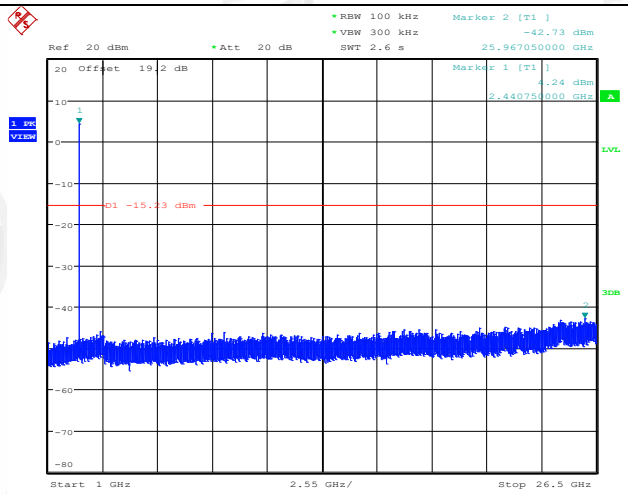

Date: 15.APR.2022 23:20:27

DH5_Ant1_2480_0~Reference

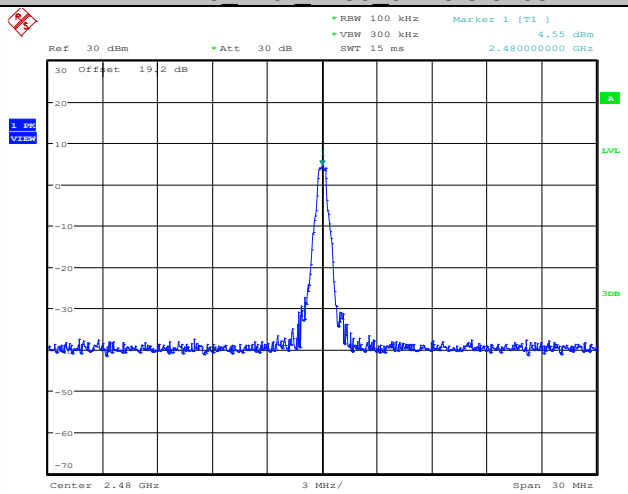

Date: 15.APR.2022 23:21:25

DH5_Ant1_2480_30~1000

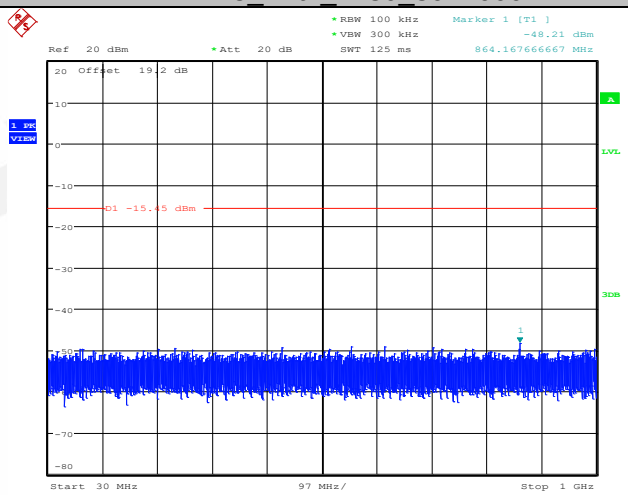

Date: 15.APR.2022 23:21:30

DH5_Ant1_2480_1000~26500

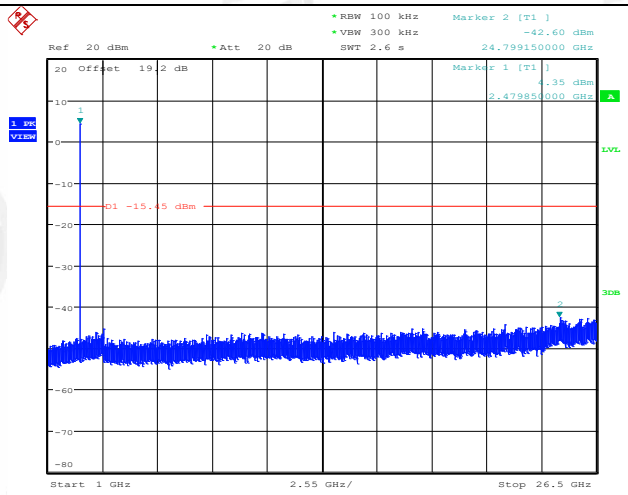

Date: 15.APR.2022 23:21:54

2DH5_Ant1_2402_0~Reference

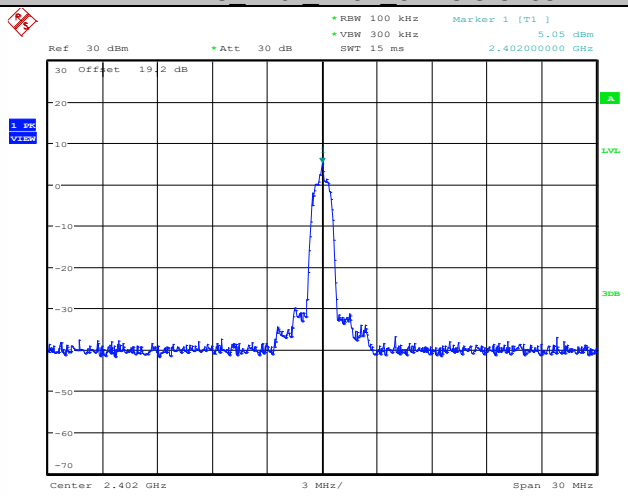

Date: 15.APR.2022 23:24:13

2DH5_Ant1_2402_30~1000

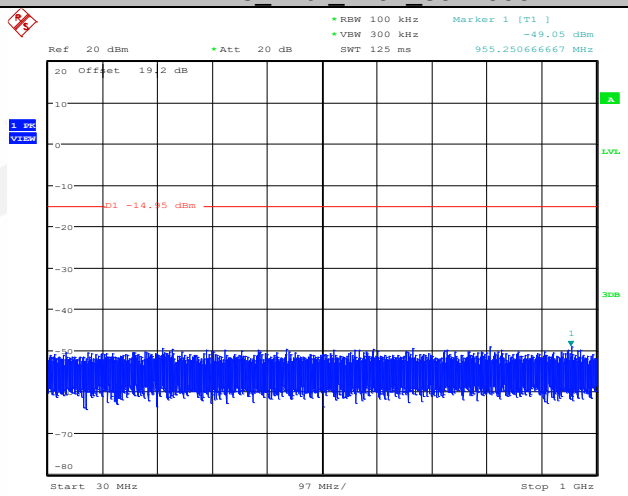

Date: 15.APR.2022 23:24:18

2DH5_Ant1_2402_1000~26500

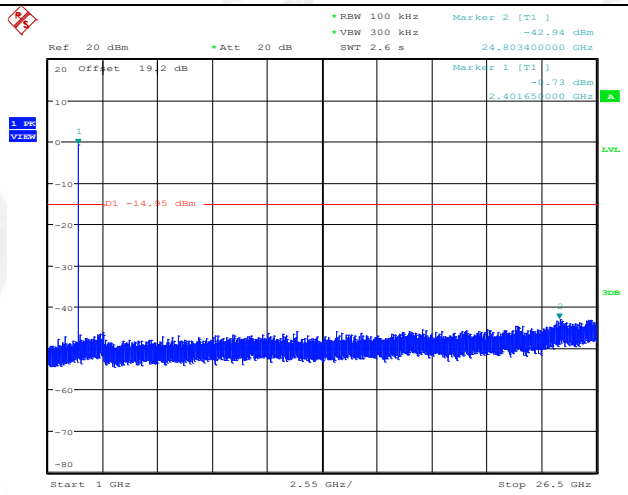

2DH5_Ant1_2441_0~Reference

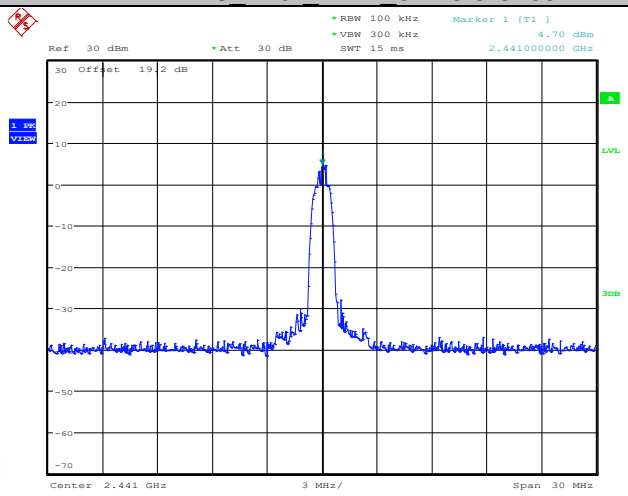

2DH5_Ant1_2441_30~1000

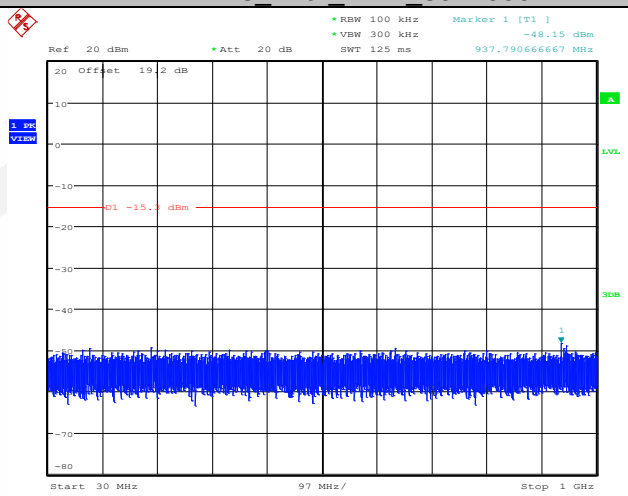

2DH5_Ant1_2441_1000~26500

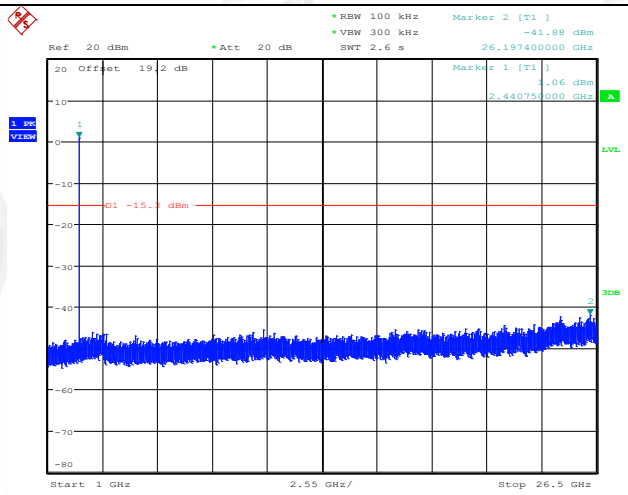

Date: 15.APR.2022 23:26:12

2DH5_Ant1_2480_0~Reference

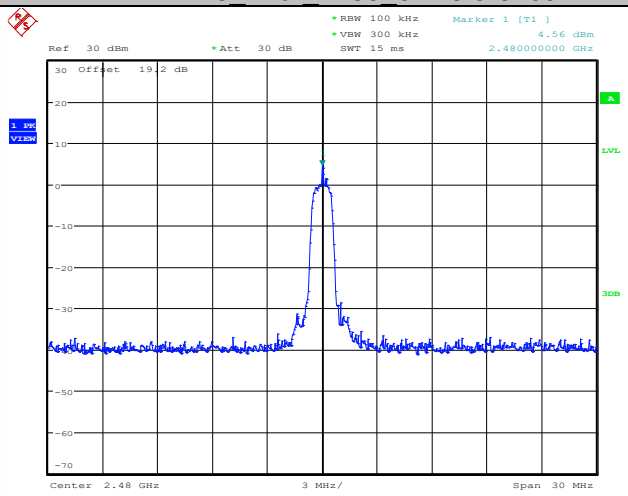

Date: 15.APR.2022 23:28:57

2DH5_Ant1_2480_30~1000

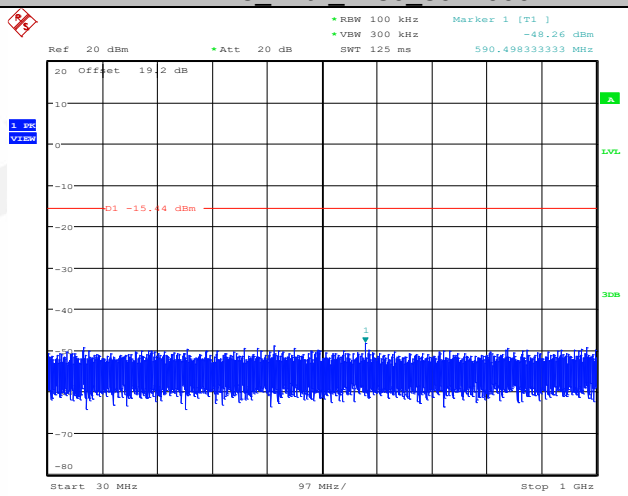

Date: 15.APR.2022 23:29:02

2DH5_Ant1_2480_1000~26500

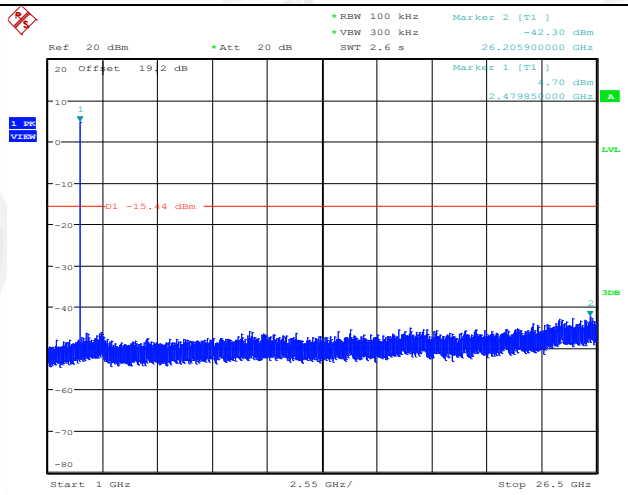

Date: 15.APR.2022 23:29:26

3DH5_Ant1_2402_0~Reference

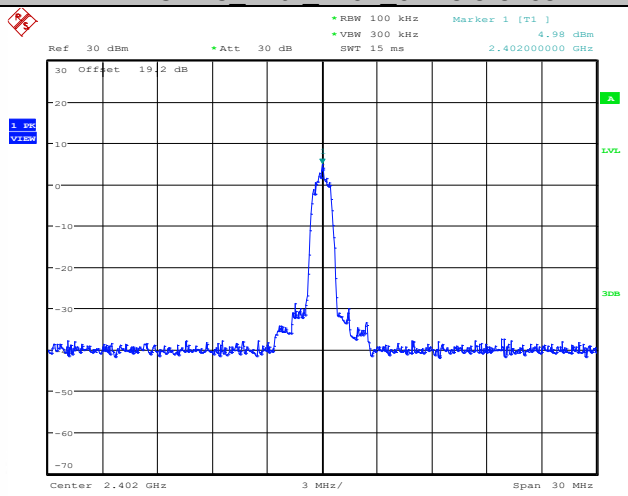

Date: 15.APR.2022 23:30:48

3DH5_Ant1_2402_30~1000

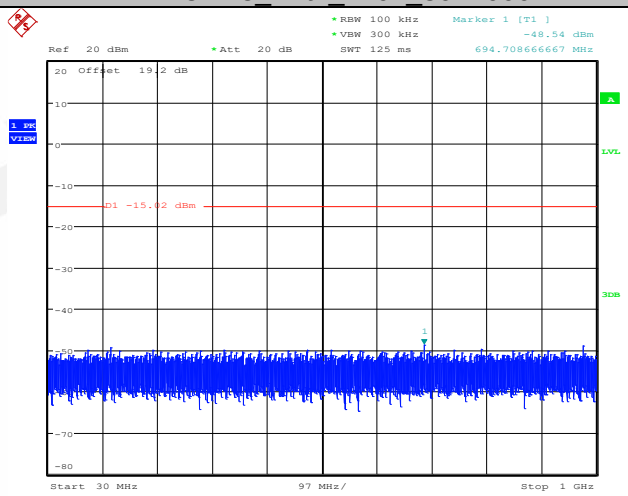

Date: 15.APR.2022 23:30:54

3DH5_Ant1_2402_1000~26500

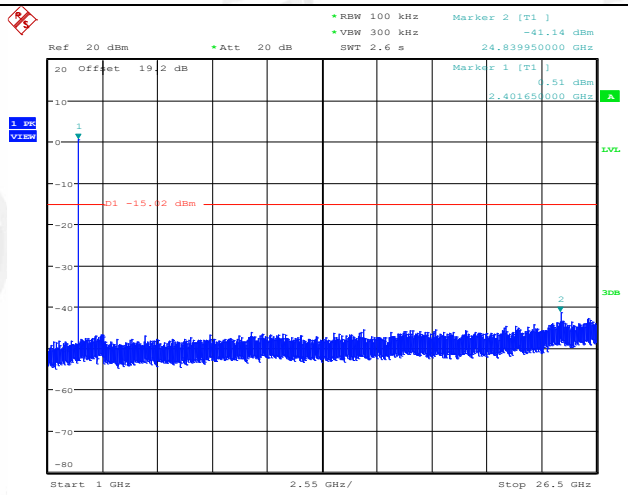

Date: 15.APR.2022 23:31:18

3DH5_Ant1_2441_0~Reference

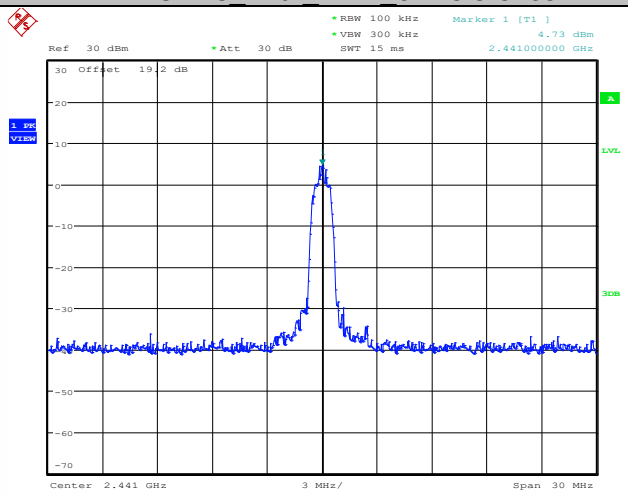

Date: 15.APR.2022 23:33:19

3DH5_Ant1_2441_30~1000

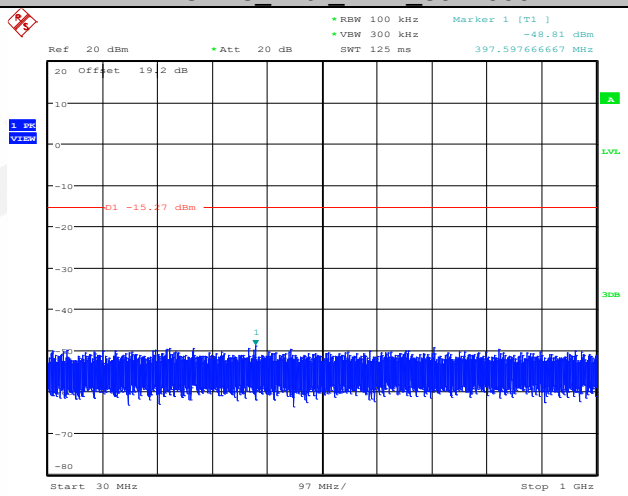

Date: 15.APR.2022 23:33:24

3DH5_Ant1_2441_1000~26500

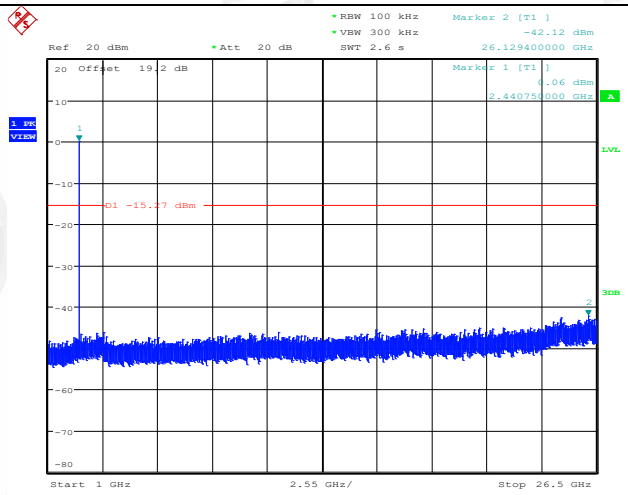

3DH5_Ant1_2480_0~Reference

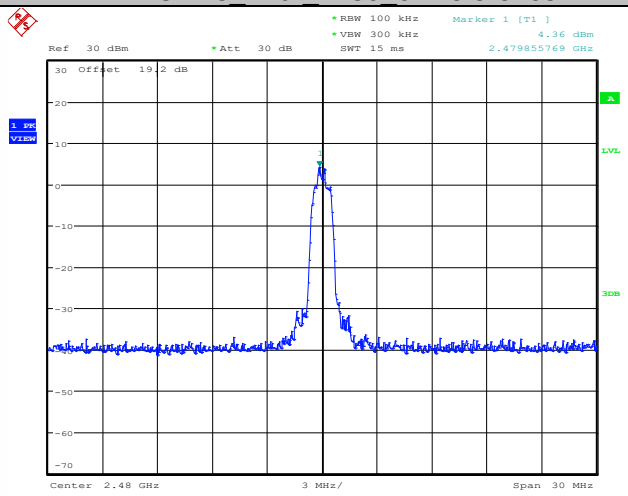

3DH5_Ant1_2480_30~1000

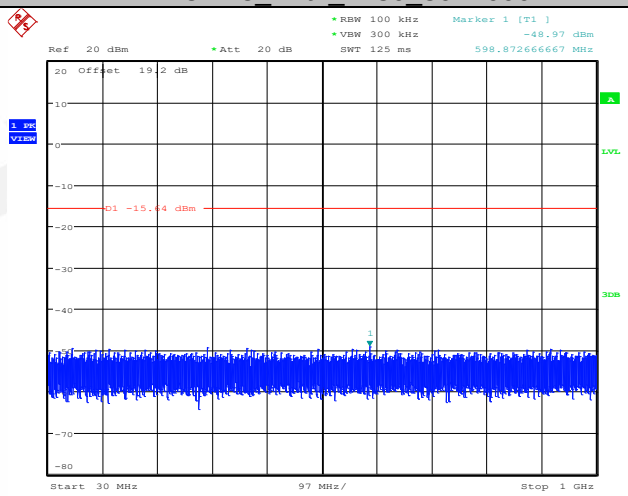

3DH5_Ant1_2480_1000~26500

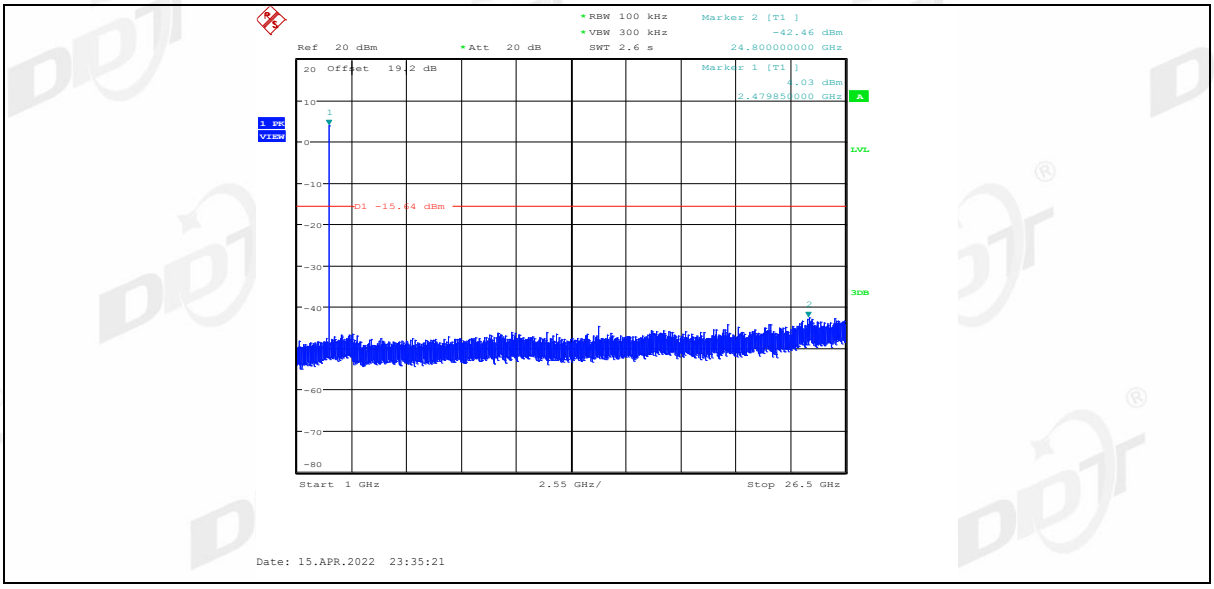
RBW 100 kHz
VBW 300 kHz
SWT 2.6 s
Marker 2 [T1]
-42.46 dBm
24.800000000 GHz
Ref 20 dBm
Att 20 dB
20 Offset 19.2 dB
Marker 1 [T1]
4.03 dBm
2.479850000 GHz
1 PK
VIEW
A
LVL
3DB
D1 -15.64 dBm
Start 1 GHz
2.55 GHz/
Stop 26.5 GHz
Date: 15.APR.2022 23:35:21

11. Band Edge Compliance (Radiated Method)

11.1. Block diagram of test setup

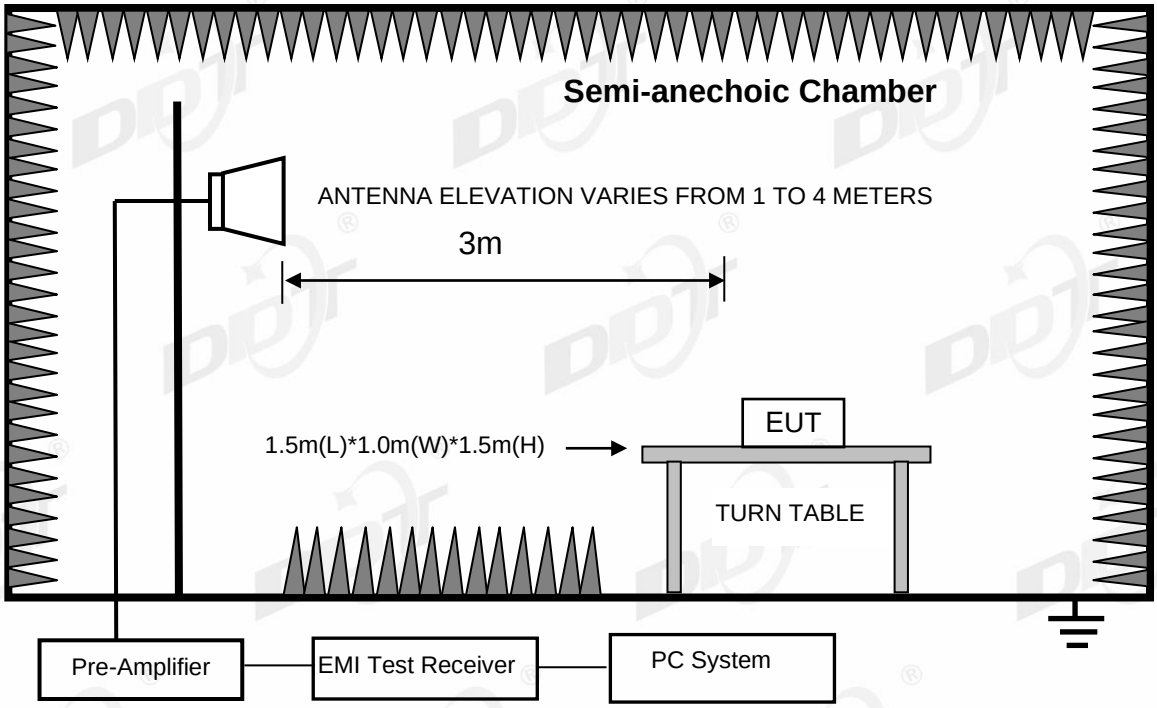

11.2. Limit

All restriction band should comply with 15.209 & RSS-GEN, other emission should be at least 20 dB below the fundamental.

11.3. Test procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

11.4. Test result

Pass. (See below detailed test result)
Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only, the worst case recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: DH5 2402		

Data: 11

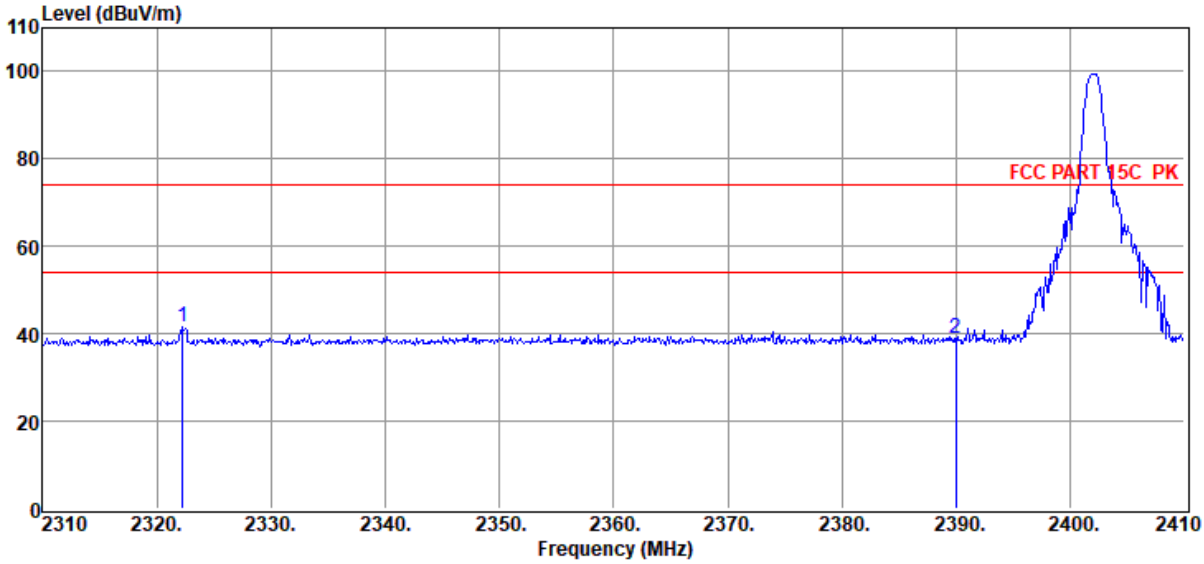

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2322.30	51.42	27.28	39.56	1.69	0.72	41.55	74.00	-32.45	Peak	HORIZONTAL
2	2390.00	48.69	27.40	39.60	1.71	0.72	38.92	74.00	-35.08	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: DH5 2402		

Data: 12

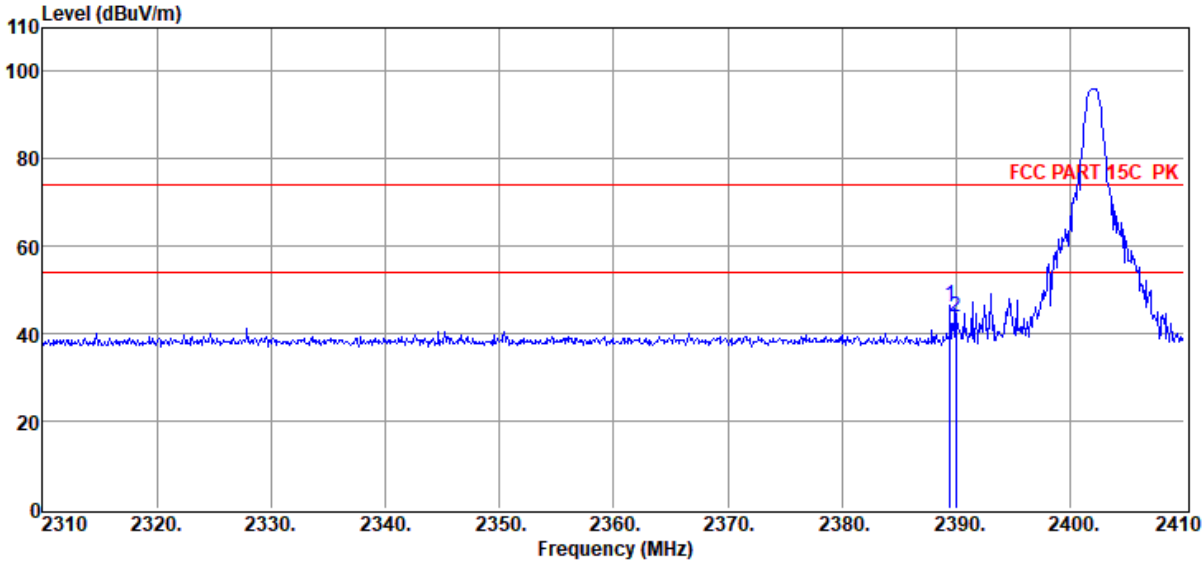

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2389.50	56.11	27.40	39.59	1.71	0.72	46.35	74.00	-27.65	Peak	VERTICAL
2	2390.00	53.72	27.40	39.60	1.71	0.72	43.95	74.00	-30.05	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: DH5 2480		

Data: 13

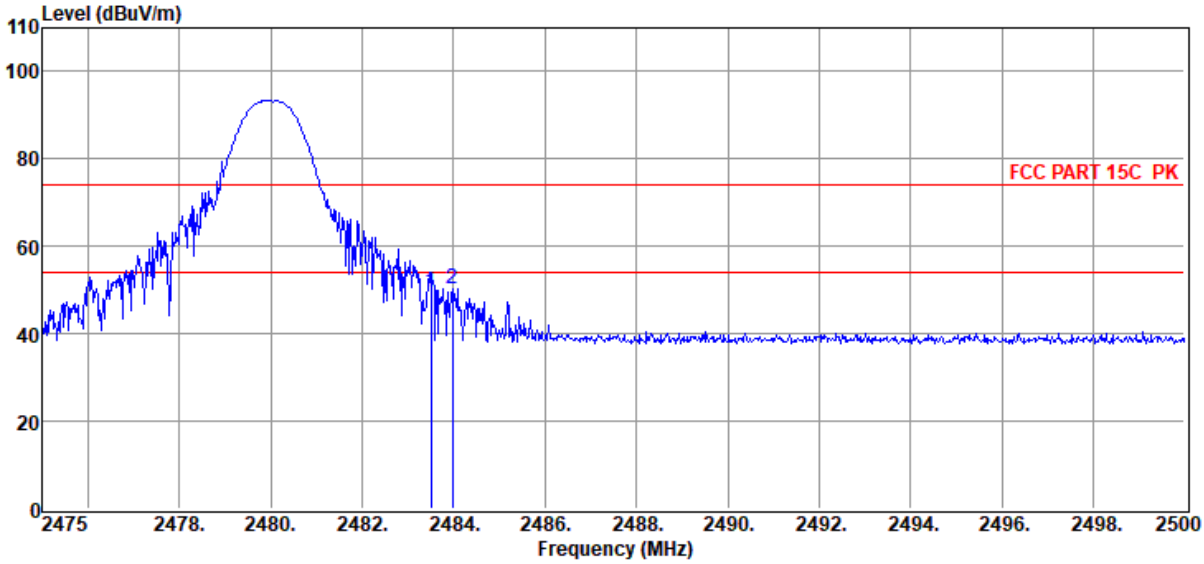

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	59.20	27.57	39.64	1.74	0.73	49.60	74.00	-24.40	Peak	VERTICAL
2	2483.98	60.06	27.57	39.64	1.74	0.73	50.46	74.00	-23.54	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: DH5 2480		

Data: 14

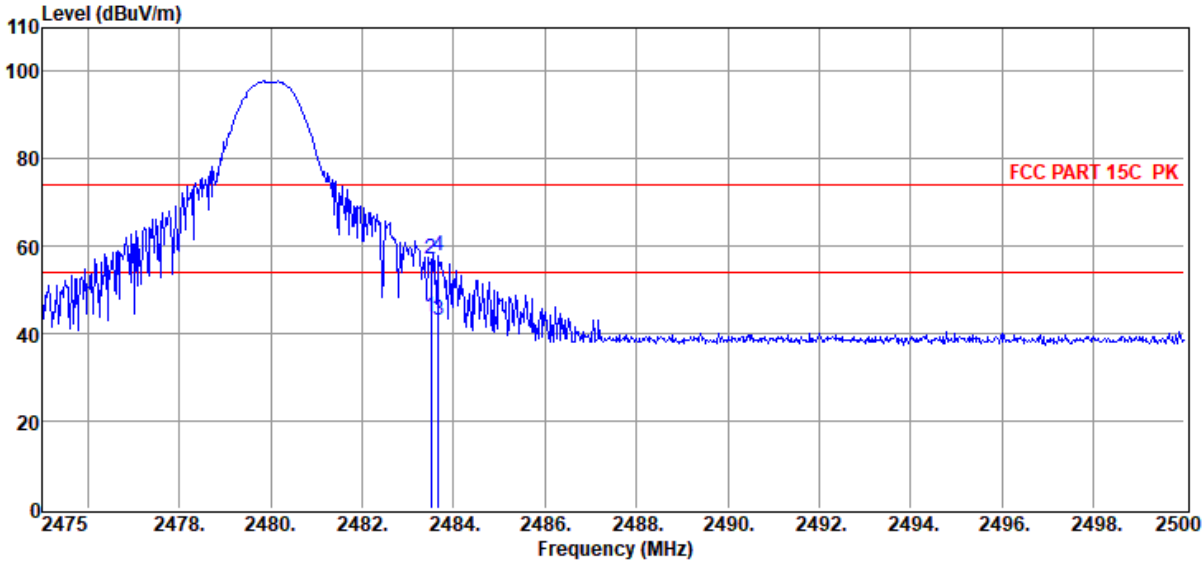

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.64	27.57	39.64	1.74	0.73	44.04	54.00	-9.96	Average	HORIZONTAL
2	2483.50	66.74	27.57	39.64	1.74	0.73	57.14	74.00	-16.86	Peak	HORIZONTAL
3	2483.68	52.51	27.57	39.64	1.74	0.73	42.91	54.00	-11.09	Average	HORIZONTAL
4	2483.68	67.57	27.57	39.64	1.74	0.73	57.97	74.00	-16.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 2DH5 2402		

Data: 15

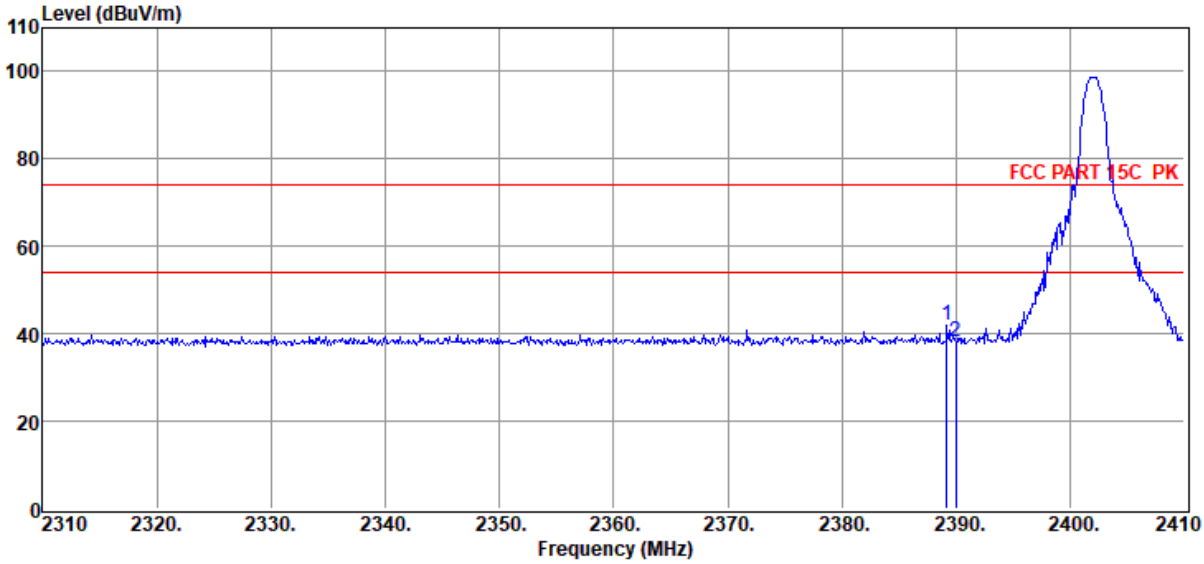

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2389.20	51.78	27.40	39.59	1.71	0.72	42.02	74.00	-31.98	Peak	HORIZONTAL
2	2390.00	48.00	27.40	39.60	1.71	0.72	38.23	74.00	-35.77	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 2DH5 2402		

Data: 16

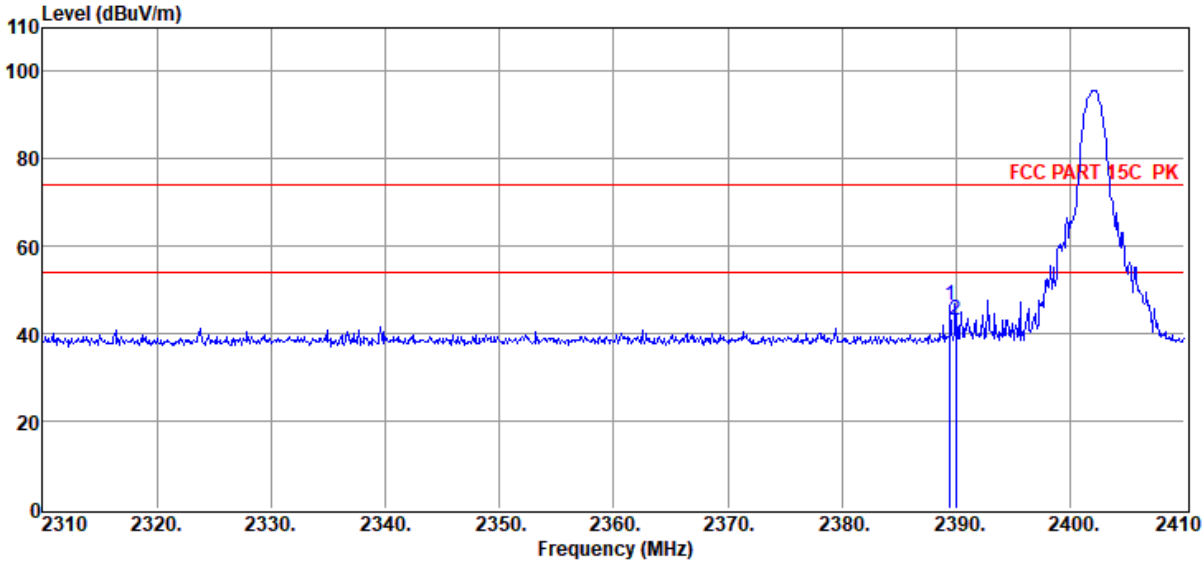

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2389.50	56.15	27.40	39.59	1.71	0.72	46.39	74.00	-27.61	Peak	VERTICAL
2	2390.00	53.05	27.40	39.60	1.71	0.72	43.28	74.00	-30.72	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 2DH5 2480		

Data: 17

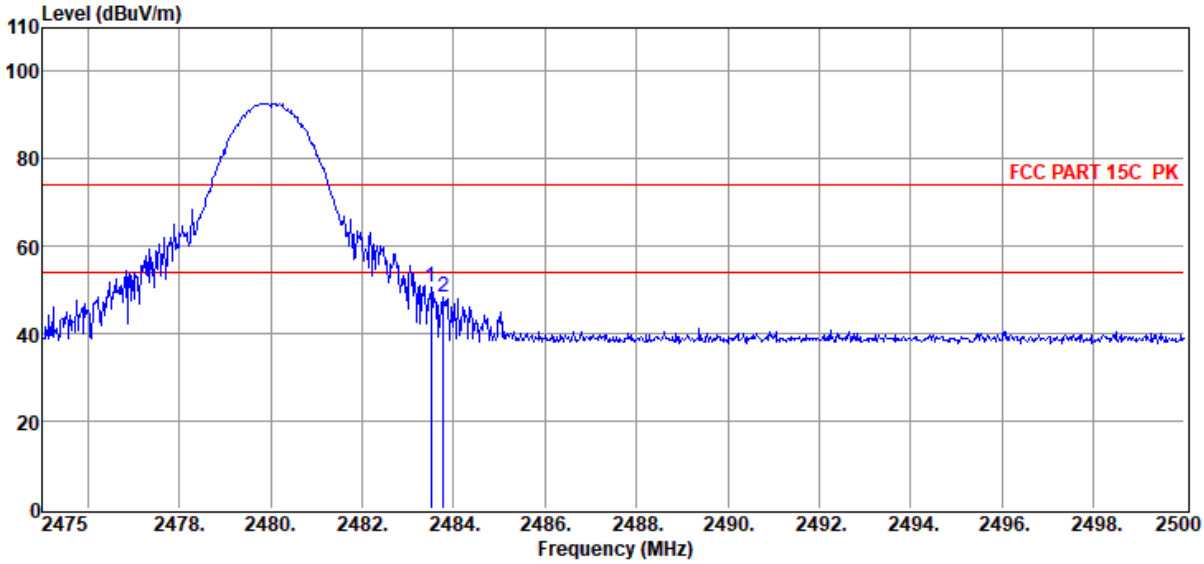

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	60.24	27.57	39.64	1.74	0.73	50.64	74.00	-23.36	Peak	VERTICAL
2	2483.78	57.98	27.57	39.64	1.74	0.73	48.38	74.00	-25.62	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 2DH5 2480		

Data: 18

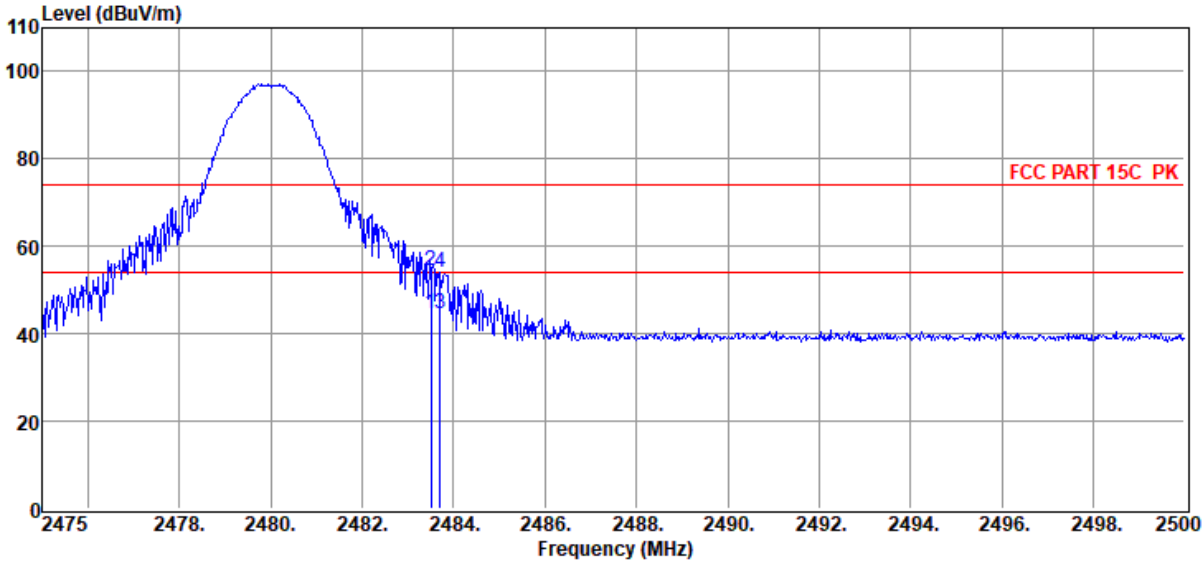

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	54.08	27.57	39.64	1.74	0.73	44.48	54.00	-9.52	Average	HORIZONTAL
2	2483.50	63.88	27.57	39.64	1.74	0.73	54.28	74.00	-19.72	Peak	HORIZONTAL
3	2483.70	54.10	27.57	39.64	1.74	0.73	44.50	54.00	-9.50	Average	HORIZONTAL
4	2483.70	63.81	27.57	39.64	1.74	0.73	54.21	74.00	-19.79	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2402		

Data: 3

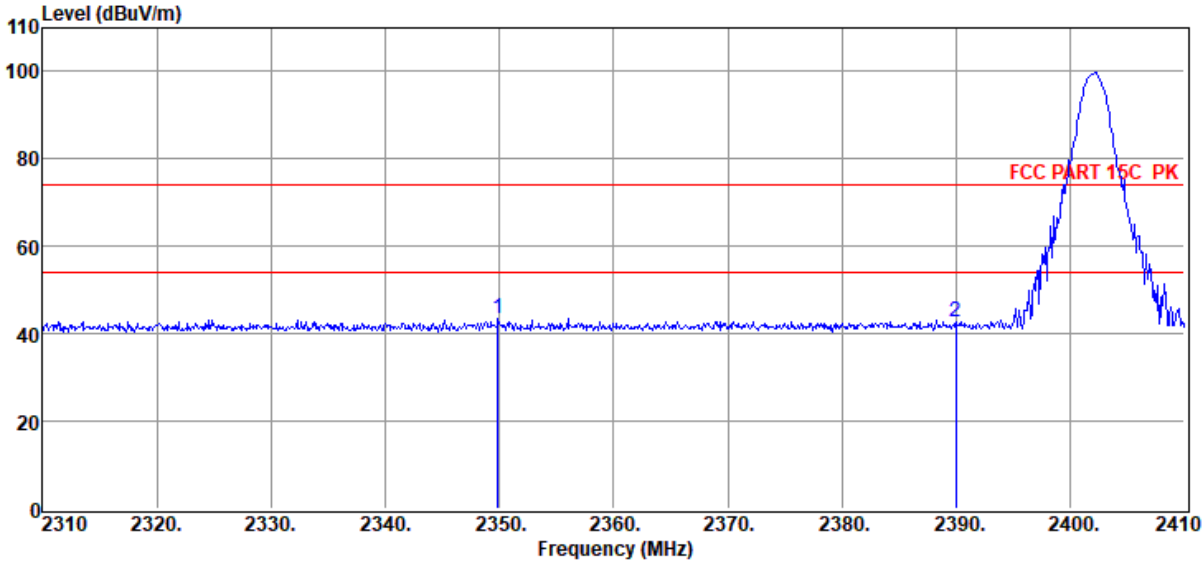

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2349.90	53.32	27.33	39.57	1.70	0.72	43.50	74.00	-30.50	Peak	HORIZONTAL
2	2390.00	52.36	27.40	39.60	1.71	0.72	42.59	74.00	-31.41	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2402		

Data: 4

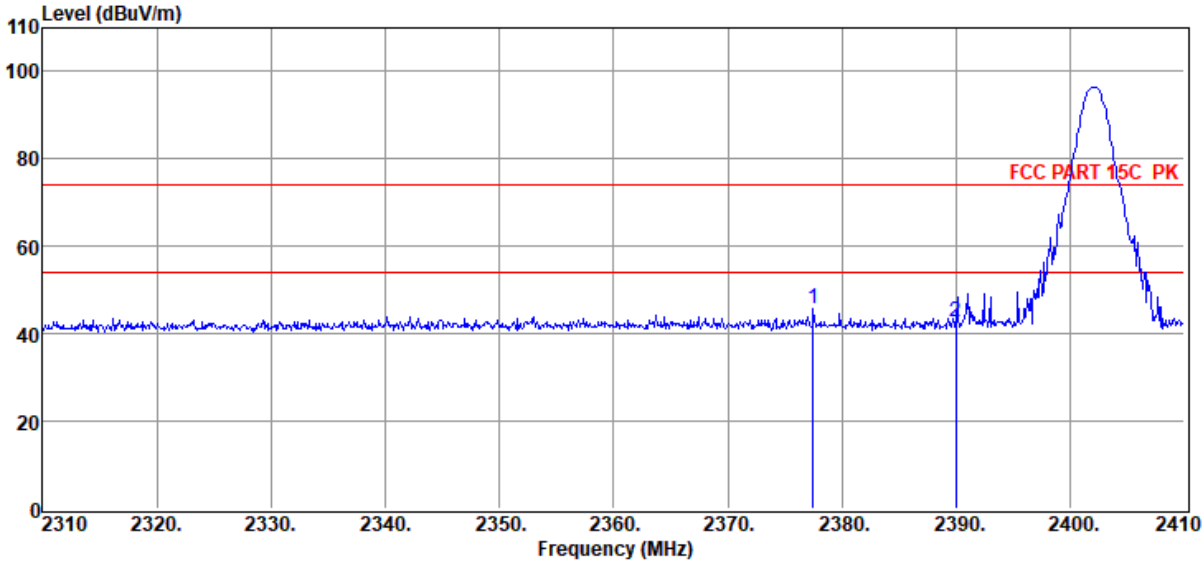

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2377.50	55.47	27.38	39.59	1.71	0.72	45.69	74.00	-28.31	Peak	VERTICAL
2	2390.00	52.55	27.40	39.60	1.71	0.72	42.78	74.00	-31.22	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 3DH5 2480		

Data: 9

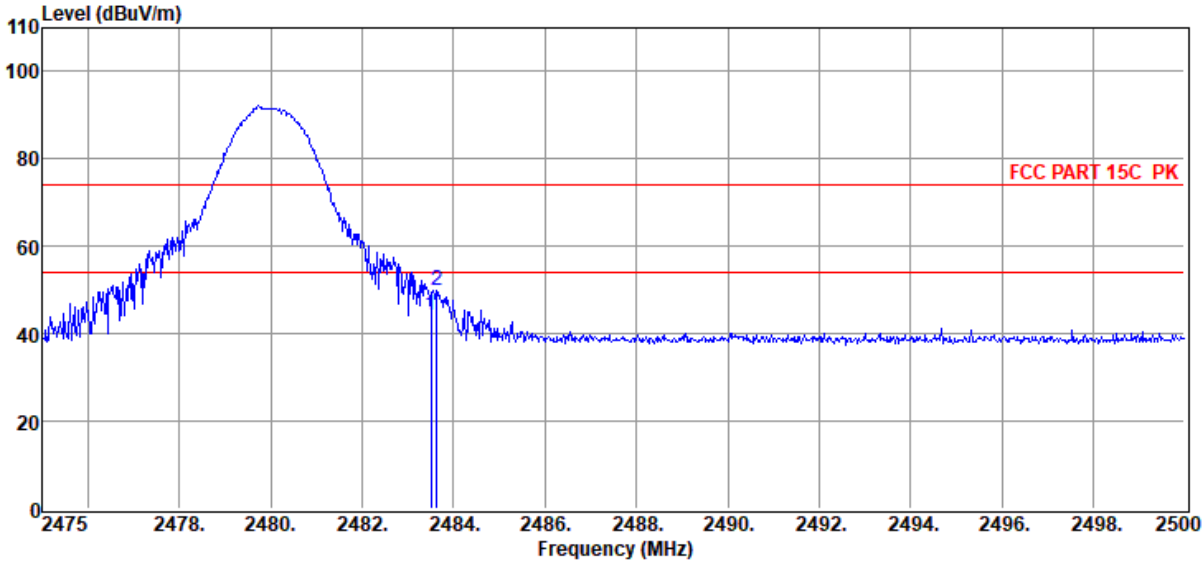

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	54.00	27.57	39.64	1.74	0.73	44.40	74.00	-29.60	Peak	VERTICAL
2	2483.63	59.43	27.57	39.64	1.74	0.73	49.83	74.00	-24.17	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22040611-2E BAR 2.1\FCC ABOVE 1G .EM6	
Test Date	: 2022-05-05	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:21.7°C,Humi:57.1%,Press:100.1kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 3DH5 2480		

Data: 10

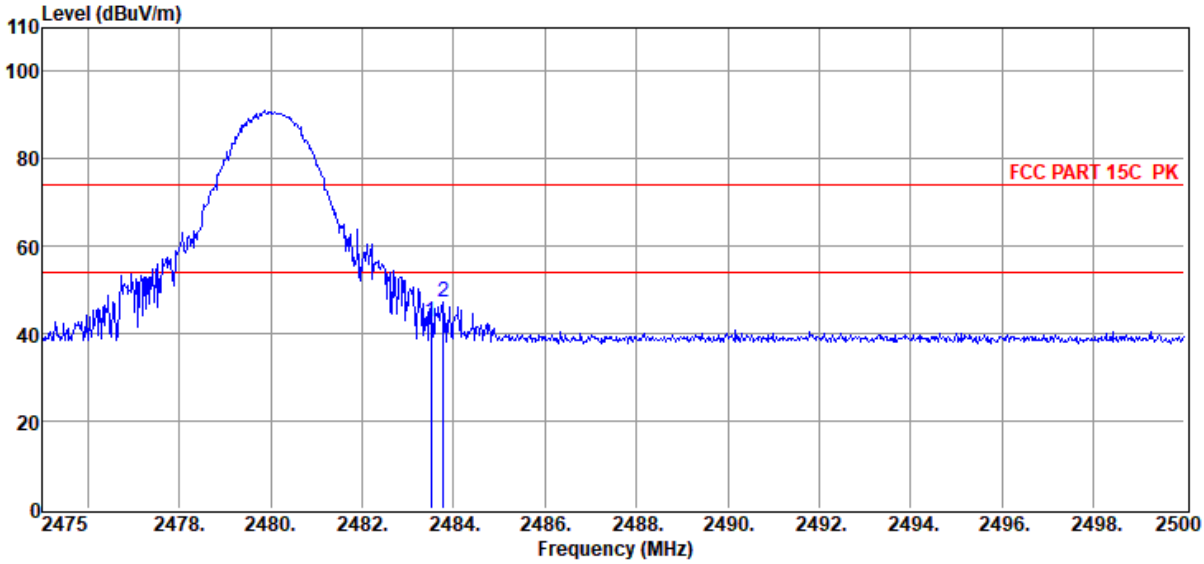

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.26	27.57	39.64	1.74	0.73	42.66	74.00	-31.34	Peak	HORIZONTAL
2	2483.78	56.67	27.57	39.64	1.74	0.73	47.07	74.00	-26.93	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

12. Power Line Conducted Emission

12.1. Block diagram of test setup

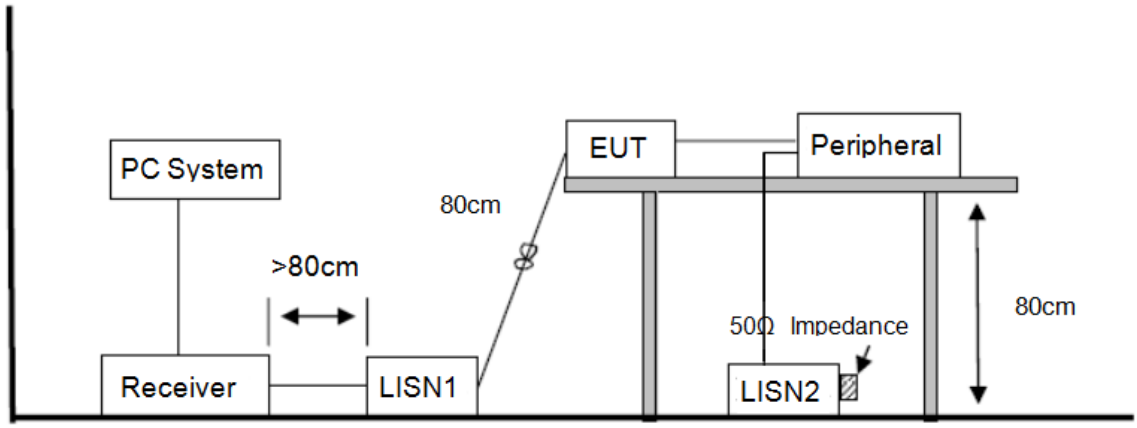

12.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

12.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

12.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.
Note2: "-----" means Peak detection; "-----" means Average detection.
Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2022 CE report date\Q22040611-2E BAR2.1\FCC.EM6	
Test Date	: 2022-05-06	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: TEMP:24.3°C, RH:53.0%, BP:101.0kPa	**LISN**	: 2021 1# ENV216/LINE
Memo	:		

Data: 2

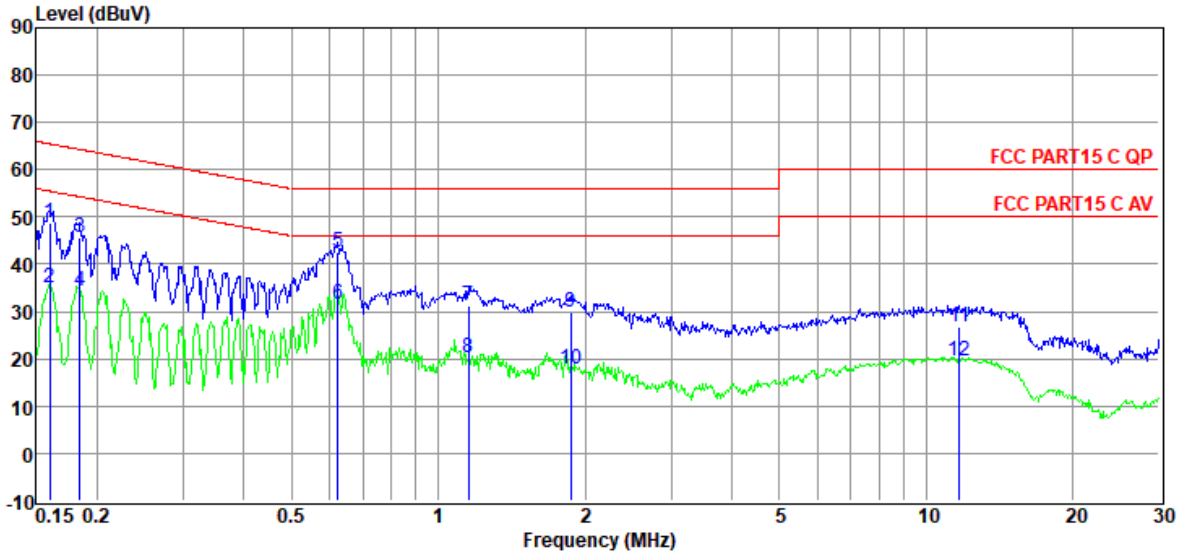

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.16	29.35	9.64	0.01	9.92	48.92	65.47	-16.55	QP	LINE
2	0.16	15.60	9.64	0.01	9.92	35.17	55.47	-20.30	Average	LINE
3	0.18	26.09	9.74	0.01	9.92	45.76	64.28	-18.52	QP	LINE
4	0.18	14.70	9.74	0.01	9.92	34.37	54.28	-19.91	Average	LINE
5	0.62	23.19	9.53	0.02	9.91	42.65	56.00	-13.35	QP	LINE
6	0.62	12.07	9.53	0.02	9.91	31.53	46.00	-14.47	Average	LINE
7	1.15	11.85	9.58	0.03	9.89	31.35	56.00	-24.65	QP	LINE
8	1.15	0.87	9.58	0.03	9.89	20.37	46.00	-25.63	Average	LINE
9	1.87	10.49	9.51	0.04	9.89	29.93	56.00	-26.07	QP	LINE
10	1.87	-1.54	9.51	0.04	9.89	17.90	46.00	-28.10	Average	LINE
11	11.68	7.24	9.62	0.12	9.94	26.92	60.00	-33.08	QP	LINE
12	11.68	-0.07	9.62	0.12	9.94	19.61	50.00	-30.39	Average	LINE

Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2022 CE report date\Q22040611-2E BAR2.1\FCC.EM6	
Test Date	: 2022-05-06	**Tested By**	: Kennys Zhang
EUT	: SOUNDBAR	**Model Number**	: Bar 2.1
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: TEMP:24.3°C, RH:53.0%, BP:101.0kPa	**LISN**	: 2021 1# ENV216/NEUTRAL
Memo	:		

Data: 4

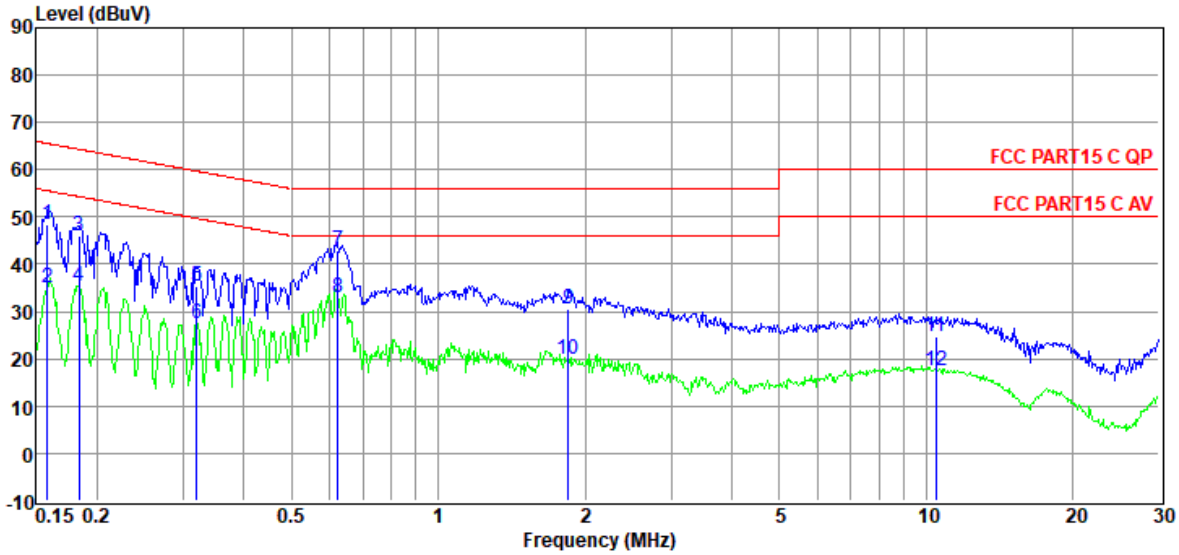

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.16	28.63	9.80	0.01	9.92	48.36	65.56	-17.20	QP	NEUTRAL
2	0.16	15.25	9.80	0.01	9.92	34.98	55.56	-20.58	Average	NEUTRAL
3	0.18	26.35	9.80	0.01	9.92	46.08	64.33	-18.25	QP	NEUTRAL
4	0.18	15.47	9.80	0.01	9.92	35.20	54.33	-19.13	Average	NEUTRAL
5	0.32	15.90	9.65	0.02	9.91	35.48	59.71	-24.23	QP	NEUTRAL
6	0.32	7.88	9.65	0.02	9.91	27.46	49.71	-22.25	Average	NEUTRAL
7	0.62	23.43	9.70	0.02	9.91	43.06	56.00	-12.94	QP	NEUTRAL
8	0.62	13.30	9.70	0.02	9.91	32.93	46.00	-13.07	Average	NEUTRAL
9	1.85	11.15	9.61	0.04	9.89	30.69	56.00	-25.31	QP	NEUTRAL
10	1.85	0.25	9.61	0.04	9.89	19.79	46.00	-26.21	Average	NEUTRAL
11	10.45	4.73	9.78	0.11	9.94	24.56	60.00	-35.44	QP	NEUTRAL
12	10.45	-2.33	9.78	0.11	9.94	17.50	50.00	-32.50	Average	NEUTRAL

Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.
The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

13.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain is 2.36 dBi.