

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_16.15.17

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11b CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

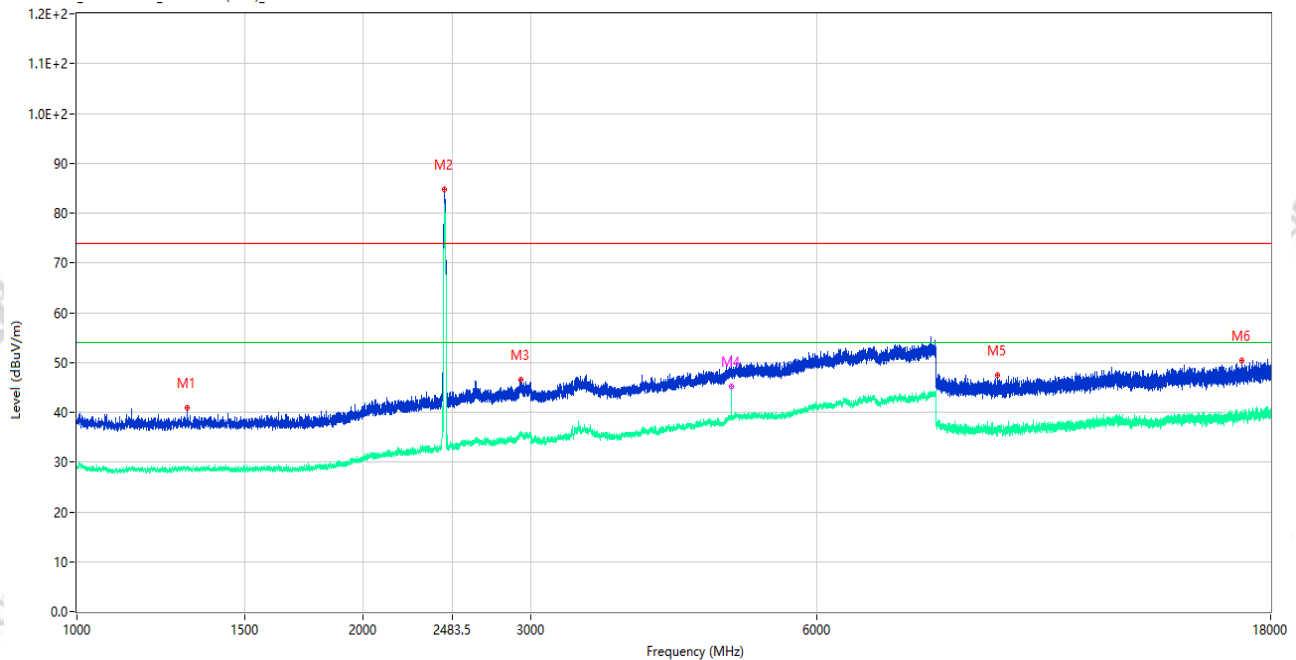

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.500	40.86	-15.63	74.0	33.14	Peak	0.00	150	Vertical	Pass
1**	1306.500	29.05	-15.63	54.0	24.95	AV	0.00	150	Vertical	Pass
2	2435.250	84.81	-12.29	74.0	-10.81	Peak	122.00	150	Vertical	N/A
2**	2435.250	81.88	-12.29	54.0	-27.88	AV	122.00	150	Vertical	N/A
3	2929.250	46.52	-7.95	74.0	27.48	Peak	195.00	150	Vertical	Pass
3**	2929.250	35.94	-7.95	54.0	18.06	AV	195.00	150	Vertical	Pass
4	4874.500	49.57	-2.25	74.0	24.43	Peak	339.00	150	Vertical	Pass
4**	4874.500	45.25	-2.25	54.0	8.75	AV	339.00	150	Vertical	Pass
5	9302.000	47.39	-5.46	74.0	26.61	Peak	140.00	150	Vertical	Pass
5**	9302.000	36.82	-5.46	54.0	17.18	AV	140.00	150	Vertical	Pass
6	16797.500	50.36	-1.30	74.0	23.64	Peak	162.00	150	Vertical	Pass
6**	16797.500	38.87	-1.30	54.0	15.13	AV	162.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_16.22.54

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11b CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

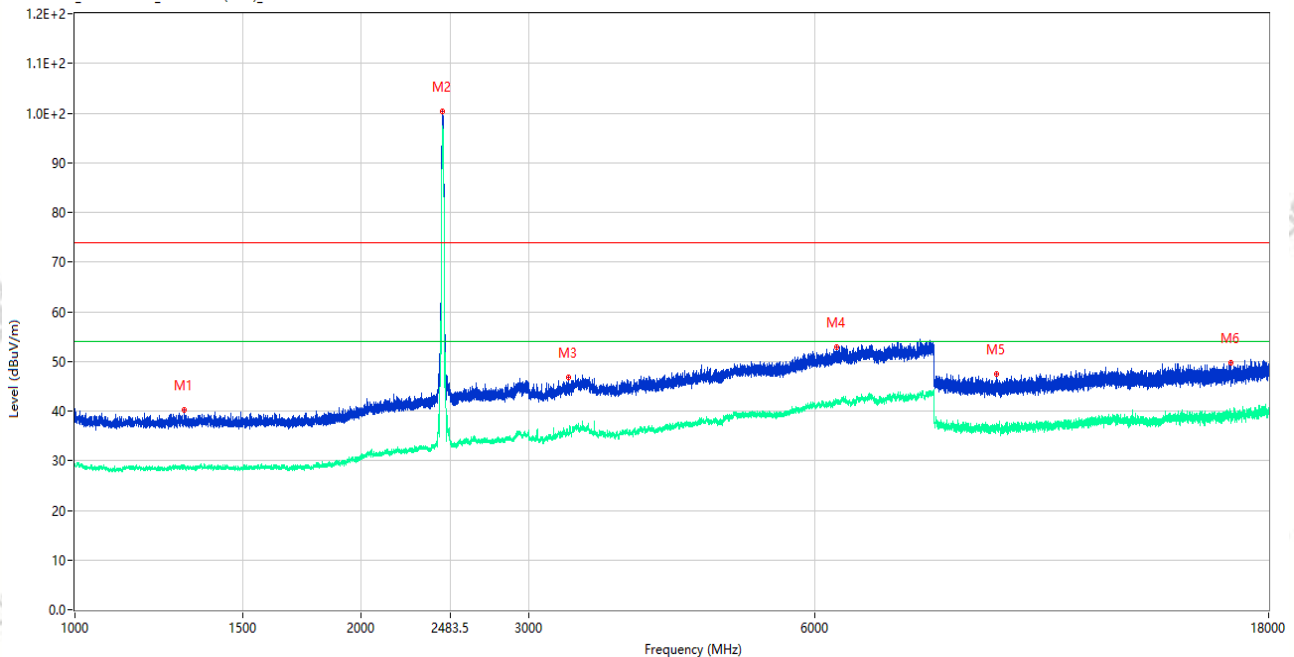

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.500	40.25	-15.59	74.0	33.75	Peak	235.00	150	Horizontal	Pass
1**	1303.500	29.04	-15.59	54.0	24.96	AV	235.00	150	Horizontal	Pass
2	2435.750	100.27	-12.32	74.0	-26.27	Peak	232.00	150	Horizontal	N/A
2**	2435.750	97.37	-12.32	54.0	-43.37	AV	232.00	150	Horizontal	N/A
3	3300.500	46.84	-6.92	74.0	27.16	Peak	82.00	150	Horizontal	Pass
3**	3300.500	35.56	-6.92	54.0	18.44	AV	82.00	150	Horizontal	Pass
4	6327.500	52.79	-0.66	74.0	21.21	Peak	253.00	150	Horizontal	Pass
4**	6327.500	41.71	-0.66	54.0	12.29	AV	253.00	150	Horizontal	Pass
5	9306.000	47.49	-5.41	74.0	26.51	Peak	66.00	150	Horizontal	Pass
5**	9306.000	36.73	-5.41	54.0	17.27	AV	66.00	150	Horizontal	Pass
6	16411.000	49.63	-1.72	74.0	24.37	Peak	44.00	150	Horizontal	Pass
6**	16411.000	39.00	-1.72	54.0	15.00	AV	44.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_17.28.10

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11g CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

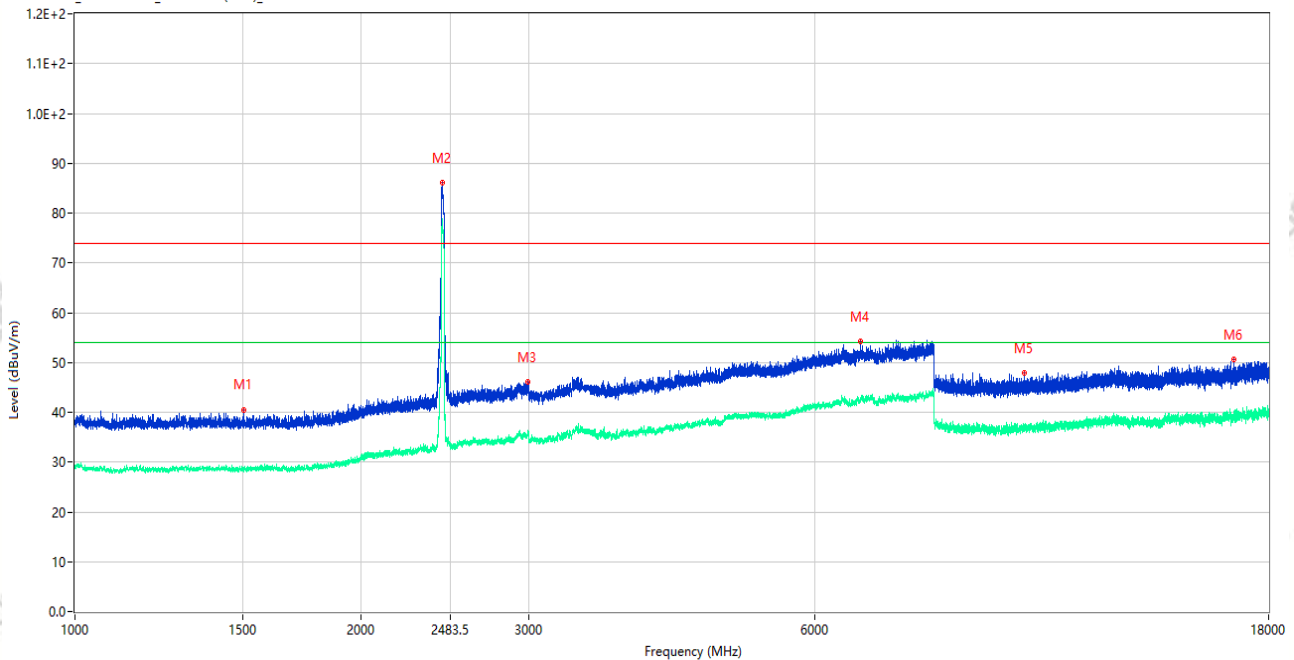

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1506.250	40.47	-16.01	74.0	33.53	Peak	360.00	150	Vertical	Pass
1**	1506.250	28.75	-16.01	54.0	25.25	AV	360.00	150	Vertical	Pass
2	2433.000	86.12	-12.31	74.0	-12.12	Peak	181.00	150	Vertical	N/A
2**	2433.000	78.46	-12.31	54.0	-24.46	AV	181.00	150	Vertical	N/A
3	2997.000	46.01	-8.79	74.0	27.99	Peak	360.00	150	Vertical	Pass
3**	2997.000	35.60	-8.79	54.0	18.40	AV	360.00	150	Vertical	Pass
4	6692.500	54.29	0.15	74.0	19.71	Peak	0.00	150	Vertical	Pass
4**	6692.500	42.63	0.15	54.0	11.37	AV	0.00	150	Vertical	Pass
5	9965.000	47.94	-3.85	74.0	26.06	Peak	90.00	150	Vertical	Pass
5**	9965.000	36.75	-3.85	54.0	17.25	AV	90.00	150	Vertical	Pass
6	16558.000	50.53	-0.91	74.0	23.47	Peak	360.00	150	Vertical	Pass
6**	16558.000	39.46	-0.91	54.0	14.54	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_17.11.51

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIIFI 11g CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

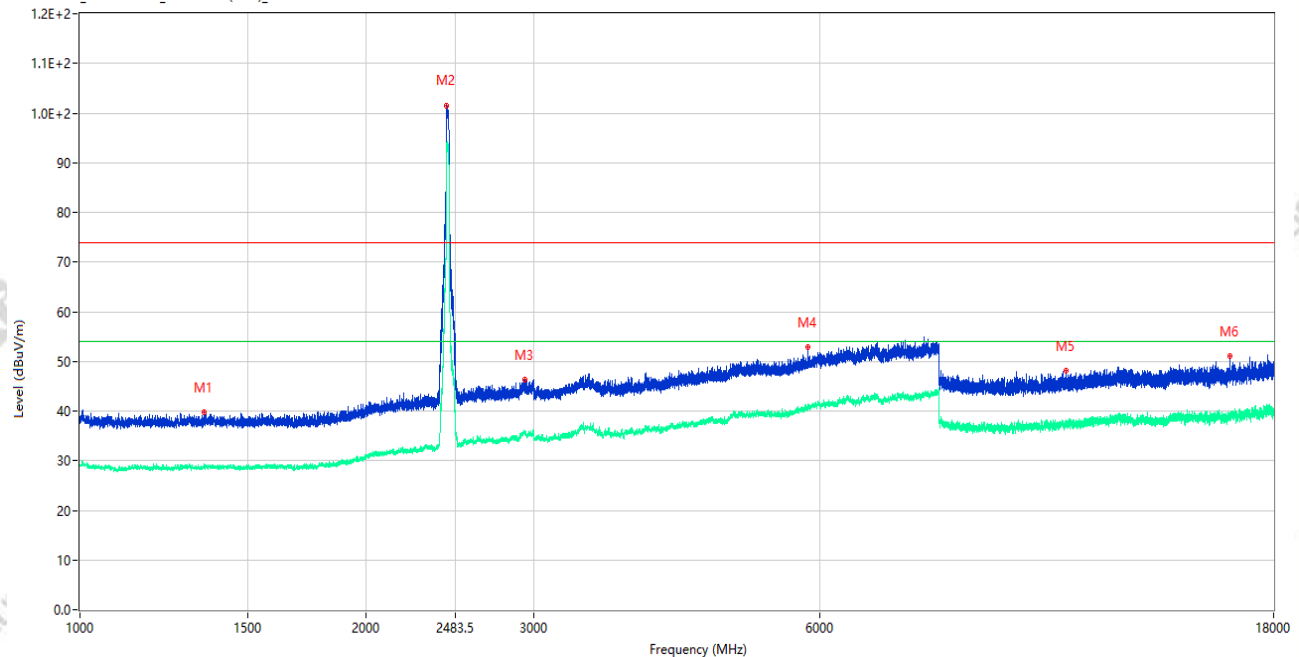

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1349.500	39.75	-15.96	74.0	34.25	Peak	74.00	150	Horizontal	Pass
1**	1349.500	28.65	-15.96	54.0	25.35	AV	74.00	150	Horizontal	Pass
2	2430.750	101.58	-12.27	74.0	-27.58	Peak	243.00	150	Horizontal	N/A
2**	2430.750	93.80	-12.27	54.0	-39.80	AV	243.00	150	Horizontal	N/A
3	2935.250	46.30	-8.11	74.0	27.70	Peak	354.00	150	Horizontal	Pass
3**	2935.250	35.82	-8.11	54.0	18.18	AV	354.00	150	Horizontal	Pass
4	5831.000	52.83	-0.86	74.0	21.17	Peak	346.00	150	Horizontal	Pass
4**	5831.000	40.69	-0.86	54.0	13.31	AV	346.00	150	Horizontal	Pass
5	10891.500	48.15	-3.50	74.0	25.85	Peak	203.00	150	Horizontal	Pass
5**	10891.500	37.13	-3.50	54.0	16.87	AV	203.00	150	Horizontal	Pass
6	16174.000	51.15	-0.96	74.0	22.85	Peak	359.00	150	Horizontal	Pass
6**	16174.000	38.77	-0.96	54.0	15.23	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_17.39.05

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11n20 CH6 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

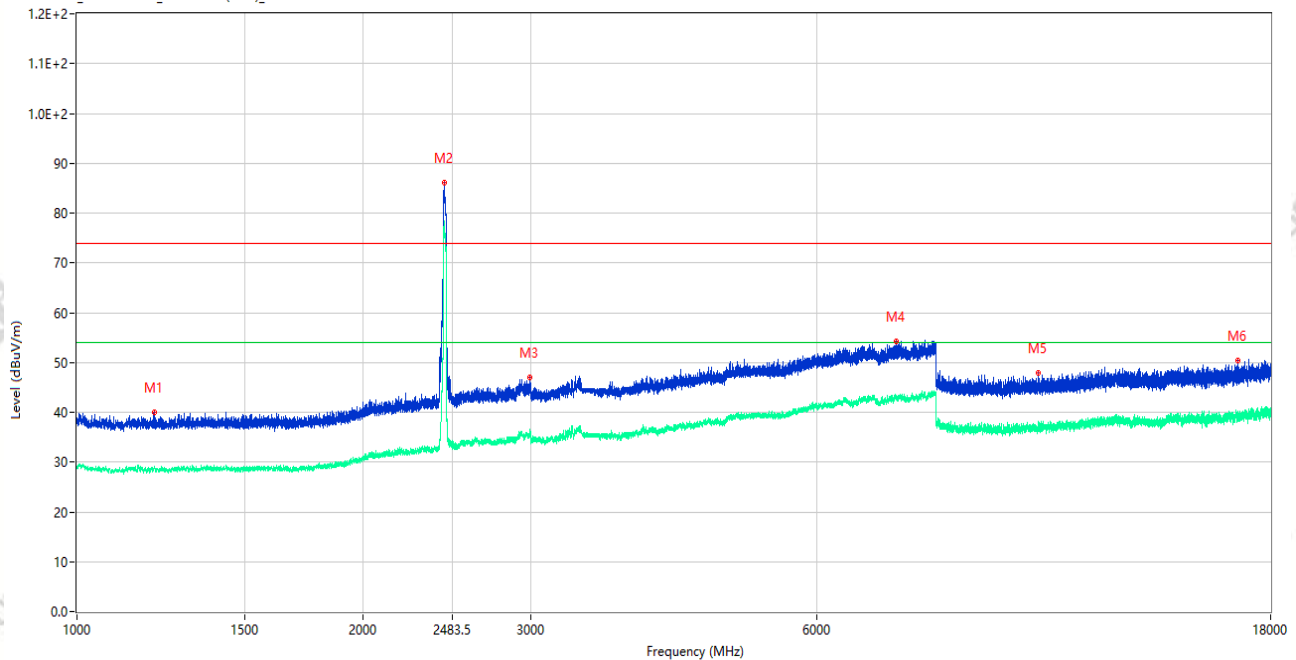

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1206.500	40.06	-15.79	74.0	33.94	Peak	58.00	150	Vertical	Pass
1**	1206.500	28.66	-15.79	54.0	25.34	AV	58.00	150	Vertical	Pass
2	2433.000	86.03	-12.31	74.0	-12.03	Peak	125.00	150	Vertical	N/A
2**	2433.000	77.98	-12.31	54.0	-23.98	AV	125.00	150	Vertical	N/A
3	2996.000	47.06	-8.83	74.0	26.94	Peak	0.00	150	Vertical	Pass
3**	2996.000	35.62	-8.83	54.0	18.38	AV	0.00	150	Vertical	Pass
4	7262.000	54.30	0.52	74.0	19.70	Peak	339.00	150	Vertical	Pass
4**	7262.000	43.26	0.52	54.0	10.74	AV	339.00	150	Vertical	Pass
5	10253.000	47.86	-3.17	74.0	26.14	Peak	74.00	150	Vertical	Pass
5**	10253.000	37.11	-3.17	54.0	16.89	AV	74.00	150	Vertical	Pass
6	16621.000	50.40	-1.12	74.0	23.60	Peak	10.00	150	Vertical	Pass
6**	16621.000	39.61	-1.12	54.0	14.39	AV	10.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_17.46.49

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11n20 CH6 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

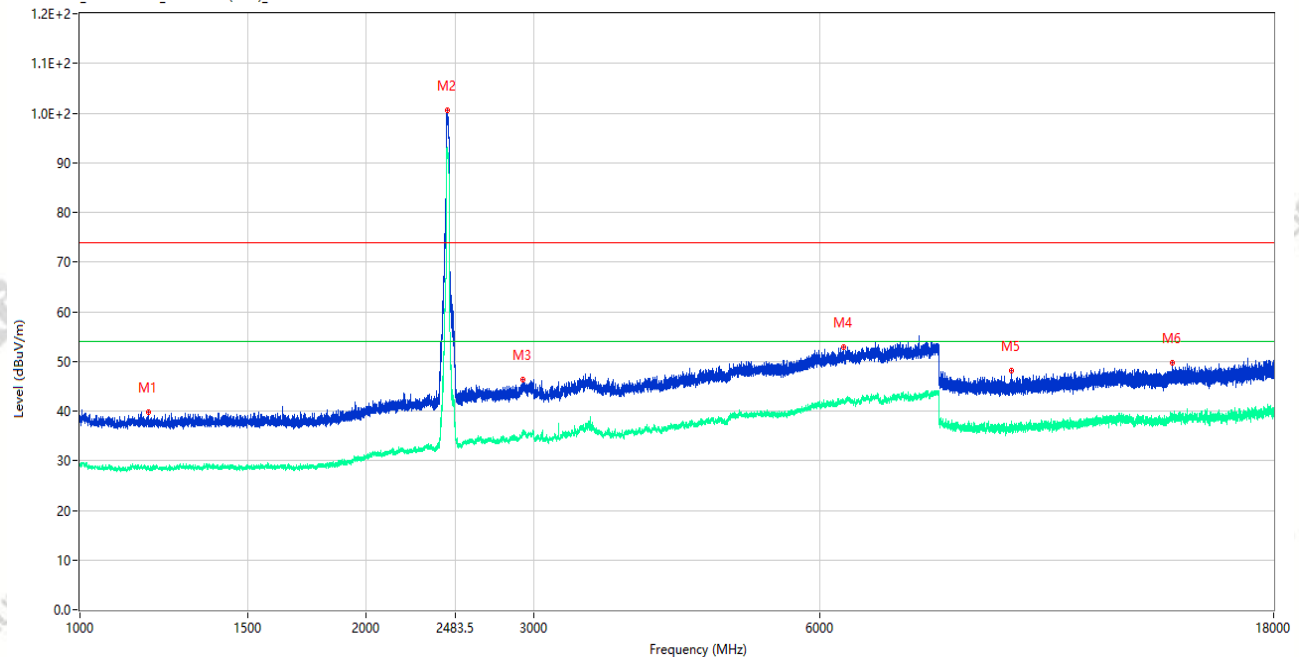

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1180.250	39.77	-15.78	74.0	34.23	Peak	265.00	150	Horizontal	Pass
1**	1180.250	28.60	-15.78	54.0	25.40	AV	265.00	150	Horizontal	Pass
2	2432.250	100.61	-12.29	74.0	-26.61	Peak	229.00	150	Horizontal	N/A
2**	2432.250	92.79	-12.29	54.0	-38.79	AV	229.00	150	Horizontal	N/A
3	2923.000	46.41	-8.35	74.0	27.59	Peak	215.00	150	Horizontal	Pass
3**	2923.000	35.37	-8.35	54.0	18.63	AV	215.00	150	Horizontal	Pass
4	6354.000	52.82	-0.44	74.0	21.18	Peak	111.00	150	Horizontal	Pass
4**	6354.000	41.79	-0.44	54.0	12.21	AV	111.00	150	Horizontal	Pass
5	9547.500	48.16	-2.54	74.0	25.84	Peak	308.00	150	Horizontal	Pass
5**	9547.500	37.40	-2.54	54.0	16.60	AV	308.00	150	Horizontal	Pass
6	14097.500	49.78	-1.65	74.0	24.22	Peak	221.00	150	Horizontal	Pass
6**	14097.500	38.54	-1.65	54.0	15.46	AV	221.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_18.57.16

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4G WIFI 11n40 CH6 P=15

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

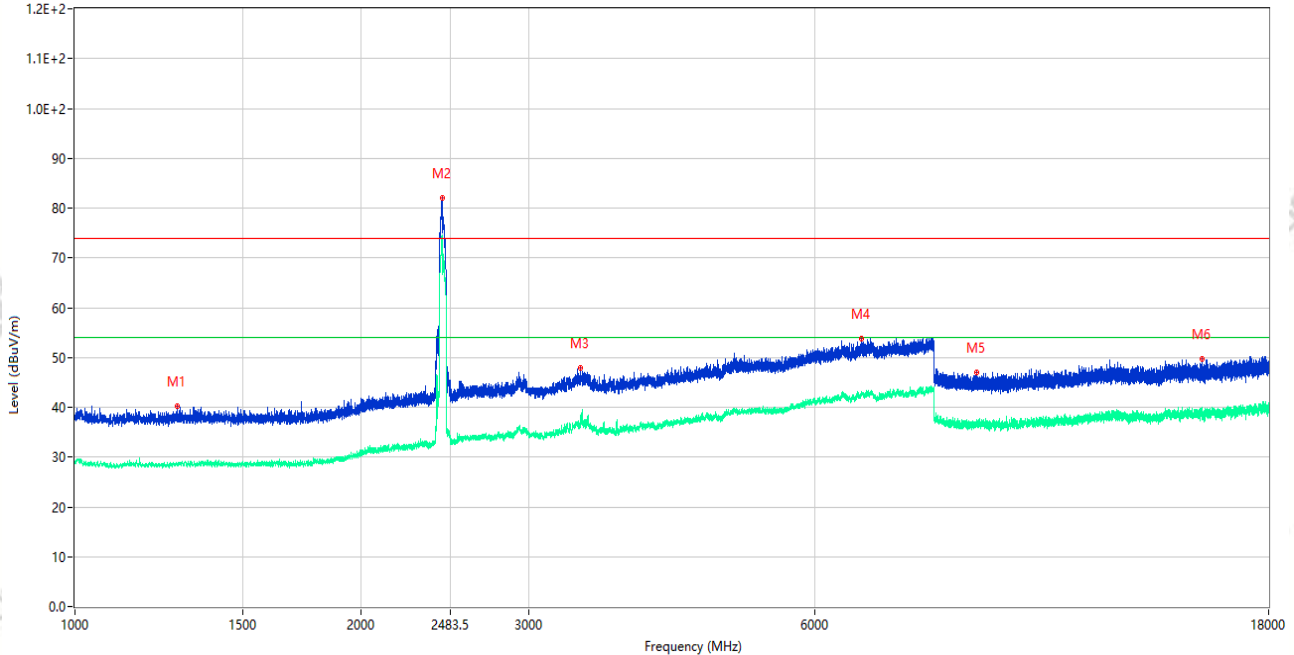RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz
1.2E+2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.750	40.18	-15.87	74.0	33.82	Peak	109.00	150	Vertical	Pass
1**	1279.750	28.62	-15.87	54.0	25.38	AV	109.00	150	Vertical	Pass
2	2432.750	81.94	-12.30	74.0	-7.94	Peak	142.00	150	Vertical	N/A
2**	2432.750	74.40	-12.30	54.0	-20.40	AV	142.00	150	Vertical	N/A
3	3403.500	47.84	-5.52	74.0	26.16	Peak	0.00	150	Vertical	Pass
3**	3403.500	38.12	-5.52	54.0	15.88	AV	0.00	150	Vertical	Pass
4	6714.500	53.72	0.32	74.0	20.28	Peak	95.00	150	Vertical	Pass
4**	6714.500	42.56	0.32	54.0	11.44	AV	95.00	150	Vertical	Pass
5	8877.000	47.07	-4.58	74.0	26.93	Peak	89.00	150	Vertical	Pass
5**	8877.000	36.76	-4.58	54.0	17.24	AV	89.00	150	Vertical	Pass
6	15318.000	49.62	-2.46	74.0	24.38	Peak	0.00	150	Vertical	Pass
6**	15318.000	38.96	-2.46	54.0	15.04	AV	0.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_18.14.30

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n40 CH6 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

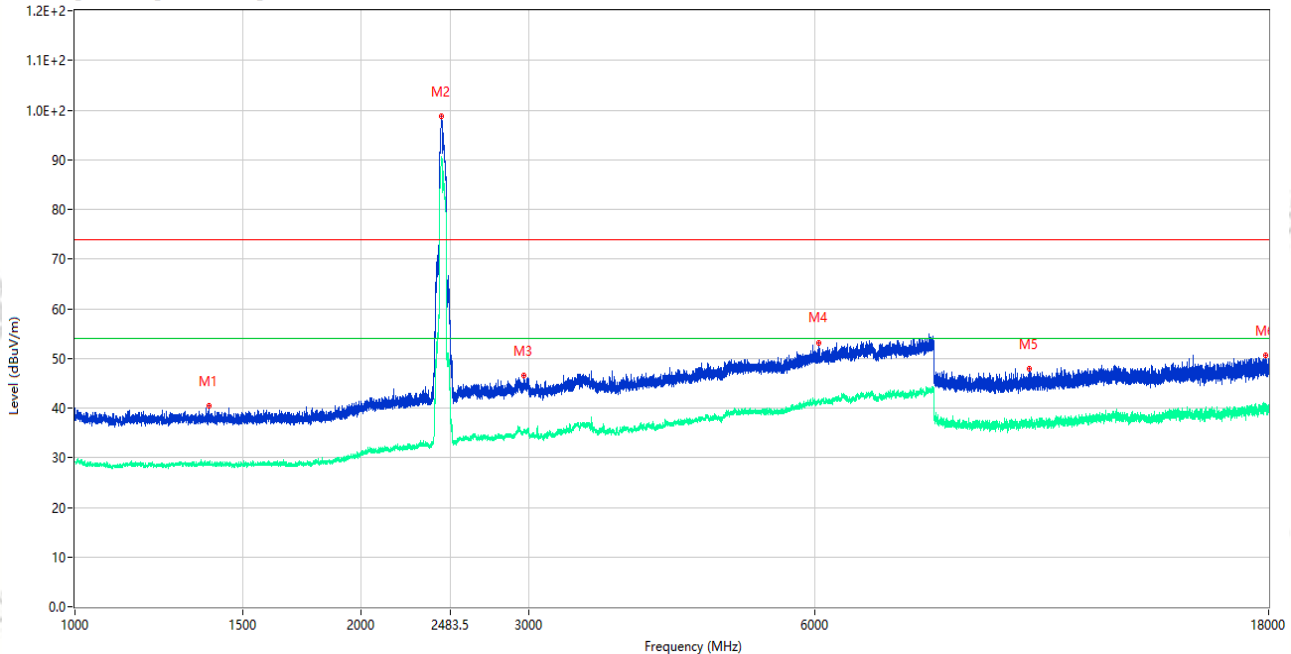

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1384.000	40.54	-15.97	74.0	33.46	Peak	82.00	150	Horizontal	Pass
1**	1384.000	29.00	-15.97	54.0	25.00	AV	82.00	150	Horizontal	Pass
2	2429.750	98.66	-12.25	74.0	-24.66	Peak	252.00	150	Horizontal	N/A
2**	2429.750	89.93	-12.25	54.0	-35.93	AV	252.00	150	Horizontal	N/A
3	2967.750	46.47	-8.42	74.0	27.53	Peak	0.00	150	Horizontal	Pass
3**	2967.750	35.59	-8.42	54.0	18.41	AV	0.00	150	Horizontal	Pass
4	6060.000	53.21	-0.34	74.0	20.79	Peak	162.00	150	Horizontal	Pass
4**	6060.000	41.37	-0.34	54.0	12.63	AV	162.00	150	Horizontal	Pass
5	10079.500	47.92	-3.80	74.0	26.08	Peak	336.00	150	Horizontal	Pass
5**	10079.500	36.70	-3.80	54.0	17.30	AV	336.00	150	Horizontal	Pass
6	17856.500	50.52	0.62	74.0	23.48	Peak	0.00	150	Horizontal	Pass
6**	17856.500	40.09	0.62	54.0	13.91	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_13.33.27

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

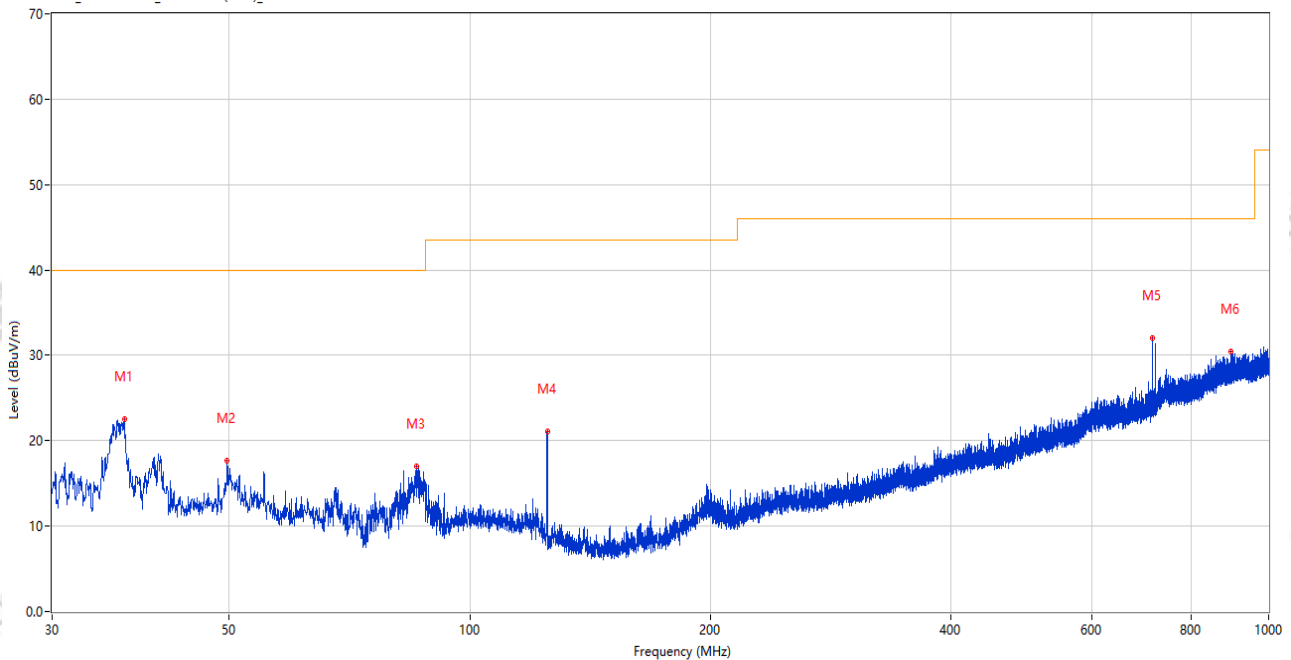

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.935	22.58	-27.02	40.0	17.42	Peak	167.00	100	Vertical	Pass
2	49.691	17.71	-24.53	40.0	22.29	Peak	138.00	100	Vertical	Pass
3	85.872	17.02	-29.44	40.0	22.98	Peak	241.00	100	Vertical	Pass
4	125.011	21.15	-28.74	43.5	22.35	Peak	36.00	100	Vertical	Pass
5	715.887	32.06	-13.44	46.0	13.94	Peak	70.00	200	Vertical	Pass
6	896.889	30.42	-9.42	46.0	15.58	Peak	212.00	100	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_13.36.55

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

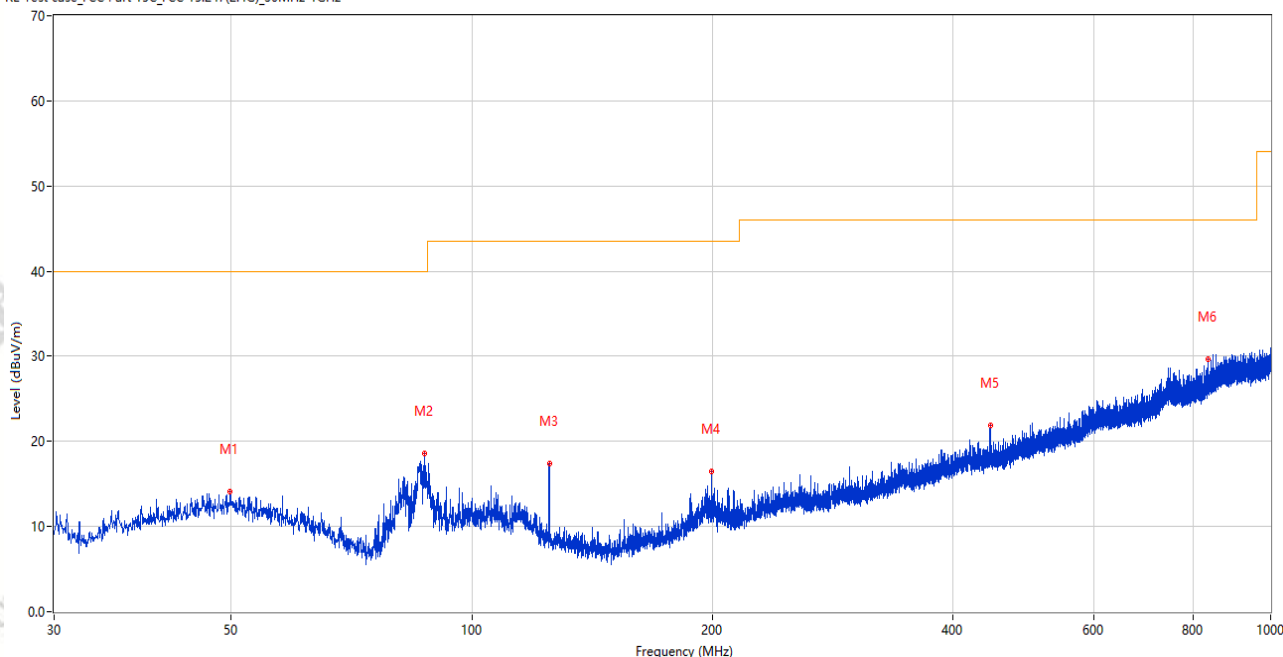

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	49.837	14.10	-24.52	40.0	25.90	Peak	163.00	200	Horizontal	Pass
2	87.376	18.55	-28.95	40.0	21.45	Peak	359.00	200	Horizontal	Pass
3	125.011	17.41	-28.74	43.5	26.09	Peak	0.00	200	Horizontal	Pass
4	199.459	16.44	-25.75	43.5	27.06	Peak	270.00	100	Horizontal	Pass
5	445.500	21.94	-19.49	46.0	24.06	Peak	66.00	200	Horizontal	Pass
6	835.876	29.62	-10.77	46.0	16.38	Peak	274.00	100	Horizontal	Pass