


Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.54.31

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11b CH1 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

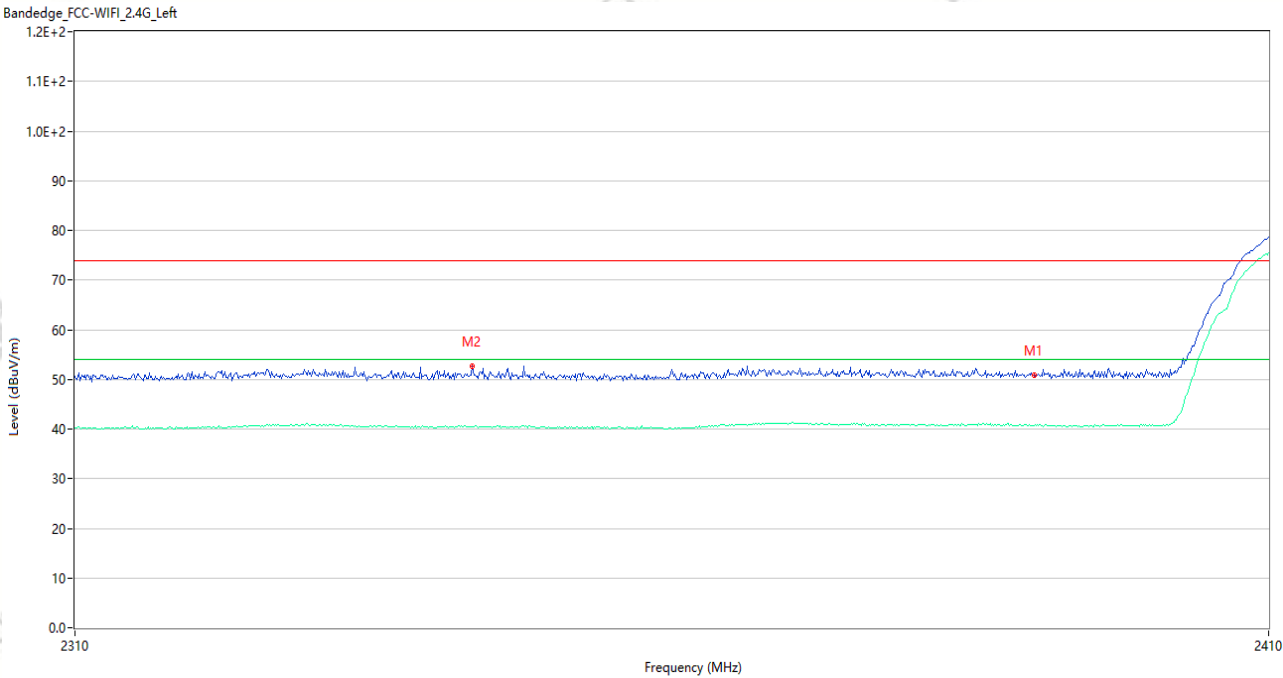


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.74	-4.87	74.0	23.26	Peak	208.84	150	Vertical	Pass
1**	2390.000	40.73	-4.87	54.0	13.27	AV	208.84	150	Vertical	Pass
2	2342.800	52.72	-4.53	74.0	21.28	Peak	182.00	150	Vertical	Pass
2**	2342.800	40.38	-4.53	54.0	13.62	AV	182.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.56.02

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11b CH1 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

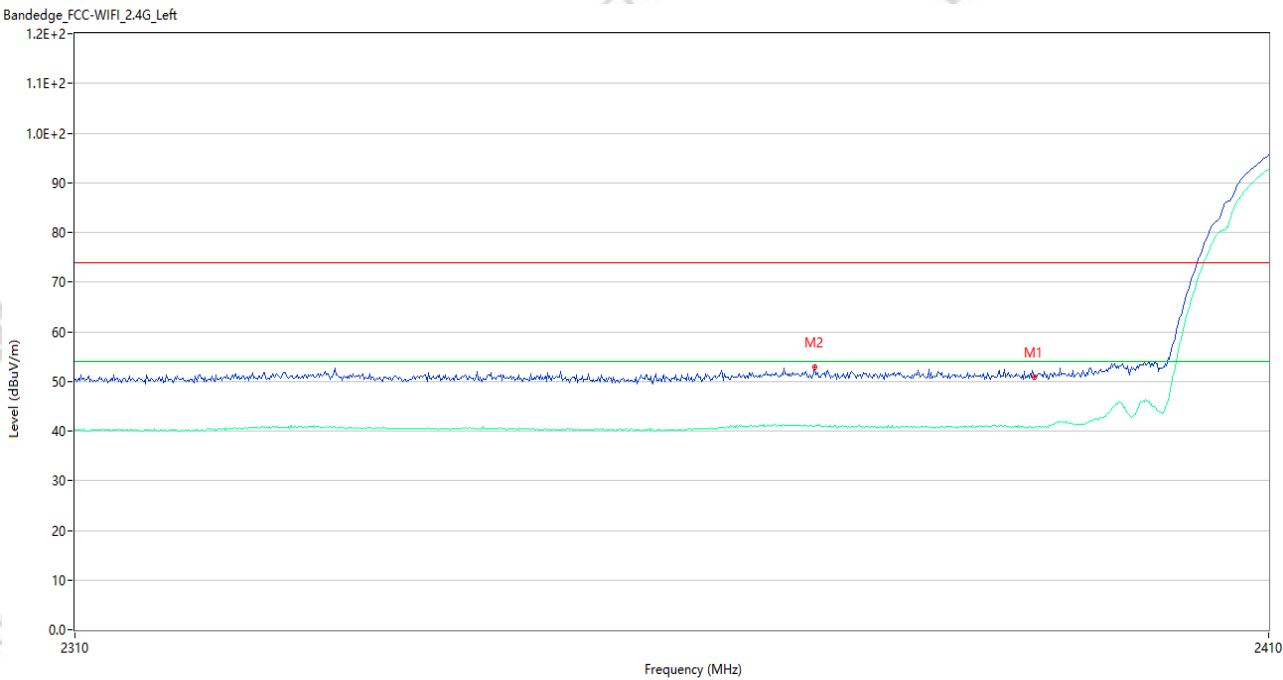


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.74	-4.87	74.0	23.26	Peak	360.00	150	Horizontal	Pass
1**	2390.000	40.63	-4.87	54.0	13.37	AV	360.00	150	Horizontal	Pass
2	2371.500	52.78	-4.05	74.0	21.22	Peak	179.00	150	Horizontal	Pass
2**	2371.500	40.83	-4.05	54.0	13.17	AV	179.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.08.49

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

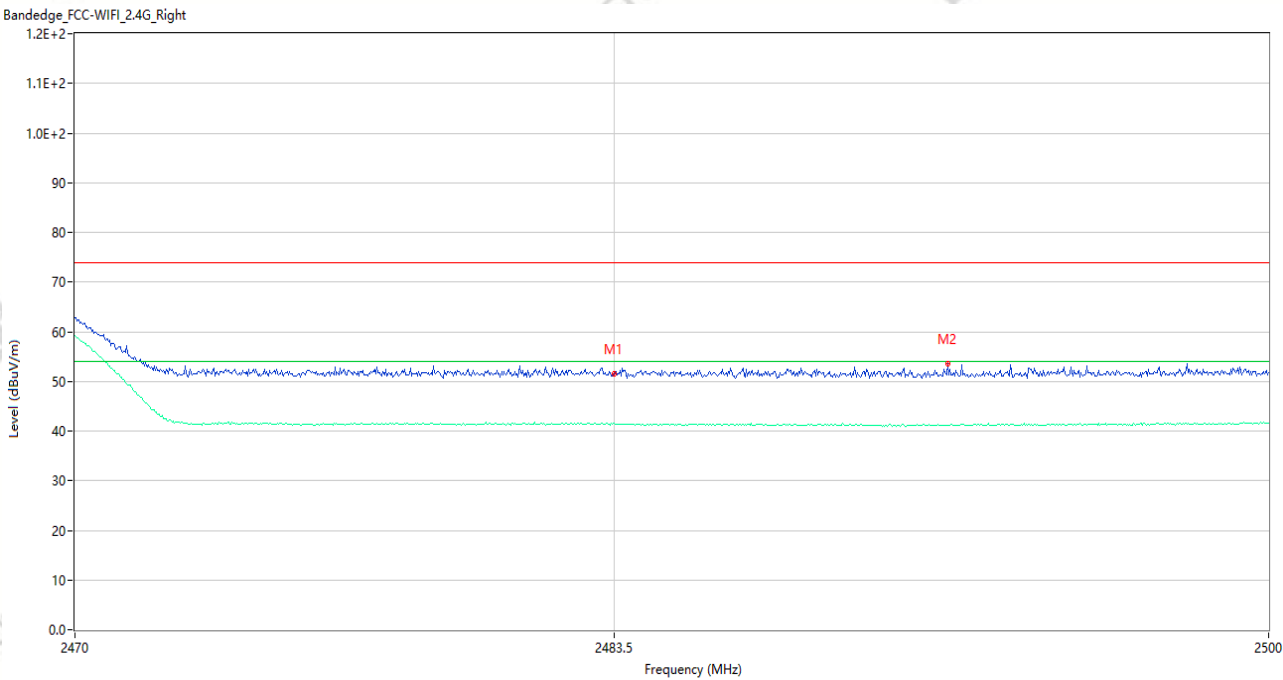


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.60	-3.78	74.0	22.40	Peak	360.00	150	Vertical	Pass
1**	2483.500	41.47	-3.78	54.0	12.53	AV	360.00	150	Vertical	Pass
2	2491.900	53.58	-3.87	74.0	20.42	Peak	360.00	150	Vertical	Pass
2**	2491.900	41.08	-3.87	54.0	12.92	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.05.37

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

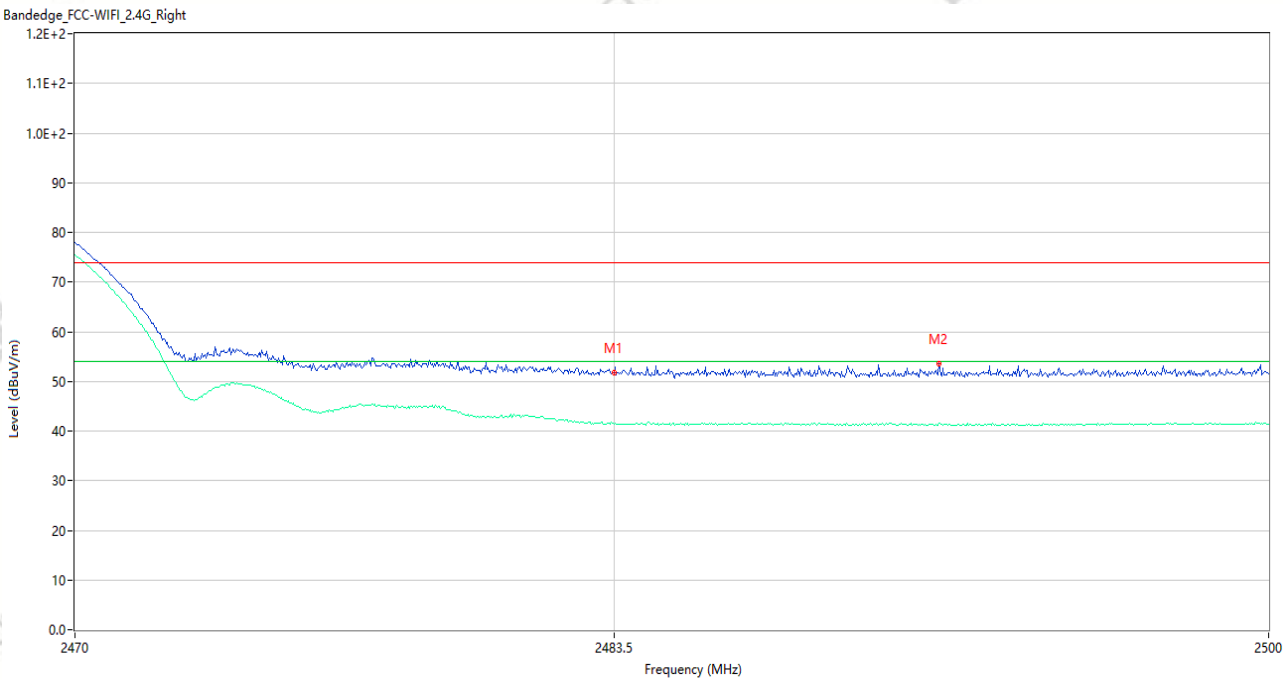

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.70	-3.78	74.0	22.30	Peak	116.00	150	Horizontal	Pass
1**	2483.500	41.43	-3.78	54.0	12.57	AV	116.00	150	Horizontal	Pass
2	2491.690	53.46	-3.86	74.0	20.54	Peak	224.00	150	Horizontal	Pass
2**	2491.690	41.48	-3.86	54.0	12.52	AV	224.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336
Test Time: 2026-08-29_19.51.45

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11g CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.93	-4.87	74.0	23.07	Peak	206.20	150	Vertical	Pass
1**	2390.000	40.57	-4.87	54.0	13.43	AV	206.20	150	Vertical	Pass
2	2367.200	53.00	-4.31	74.0	21.00	Peak	224.00	150	Vertical	Pass
2**	2367.200	40.90	-4.31	54.0	13.10	AV	224.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.50.12

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIIFI 11g CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

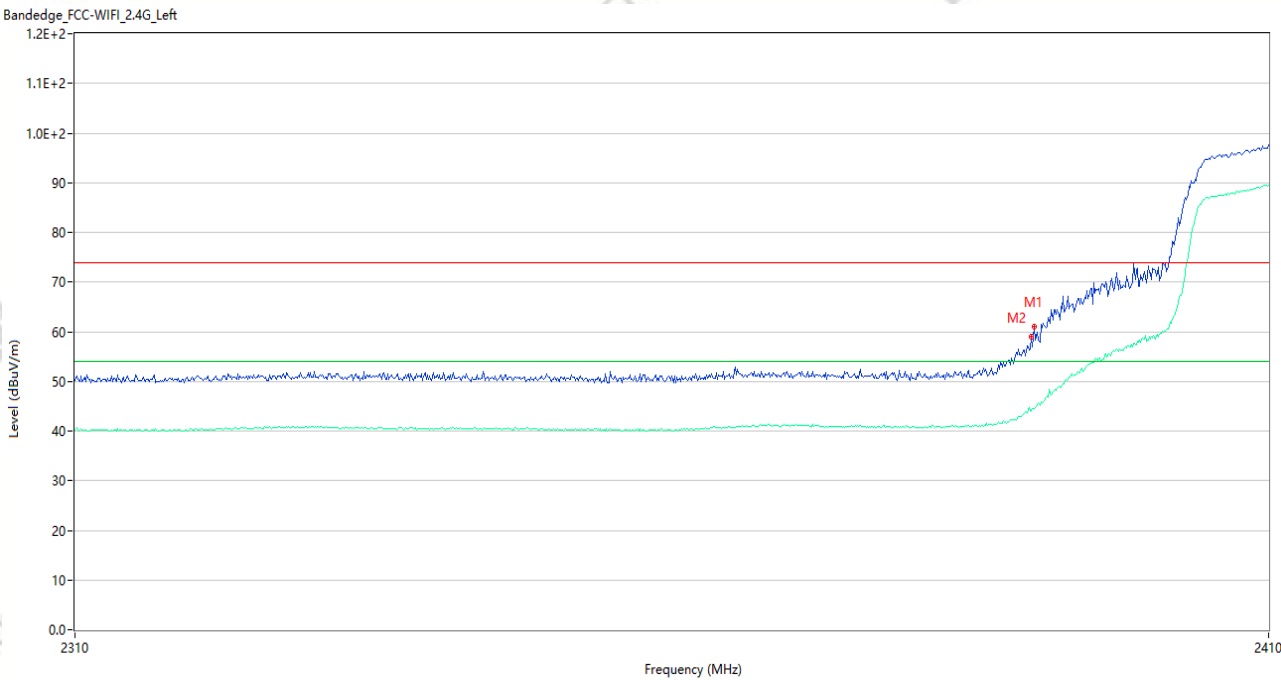

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	61.04	-4.87	74.0	12.96	Peak	231.72	150	Horizontal	Pass
1**	2390.000	44.42	-4.87	54.0	9.58	AV	231.72	150	Horizontal	Pass
2	2389.800	58.95	-4.86	74.0	15.05	Peak	222.00	150	Horizontal	Pass
2**	2389.800	44.11	-4.86	54.0	9.89	AV	222.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.13.11

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11g CH11 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

Bandedge_FCC-WIFI_2.4G_Right

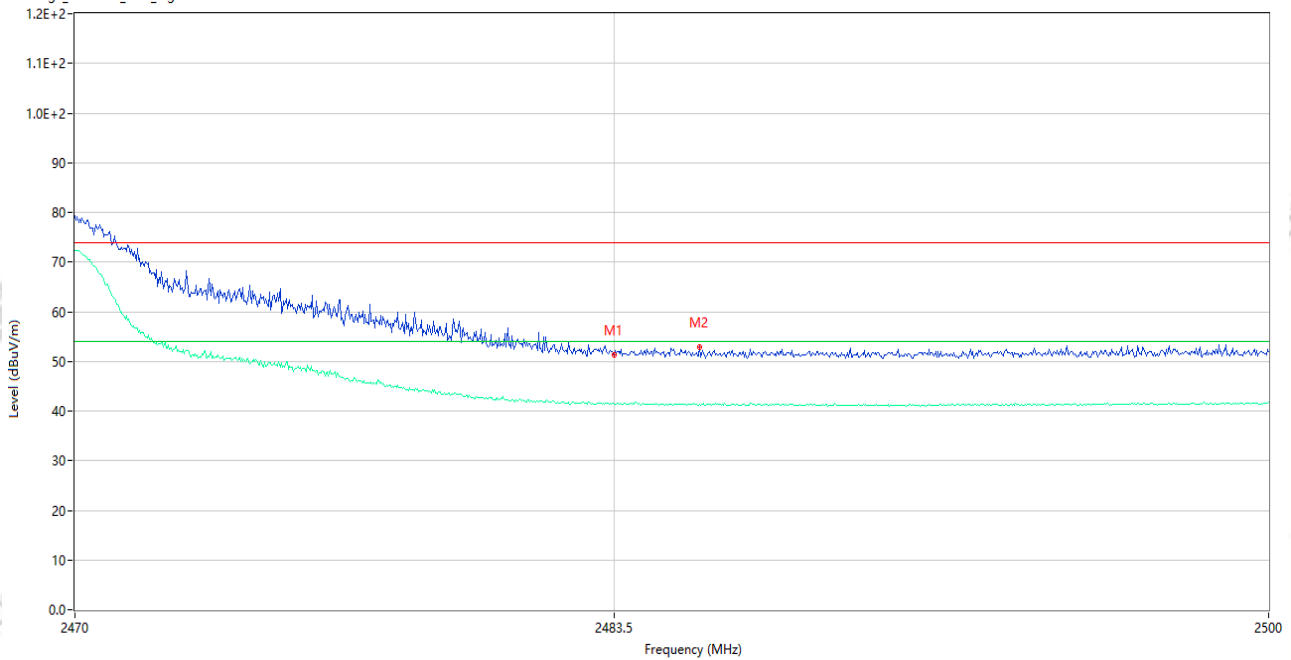

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.22	-3.78	74.0	22.78	Peak	118.00	150	Vertical	Pass
1**	2483.500	41.32	-3.78	54.0	12.68	AV	118.00	150	Vertical	Pass
2	2485.660	52.95	-3.78	74.0	21.05	Peak	0.00	150	Vertical	Pass
2**	2485.660	41.43	-3.78	54.0	12.57	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.19.02

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIIFI 11g CH11 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

Bandedge_FCC-WIFI_2.4G_Right

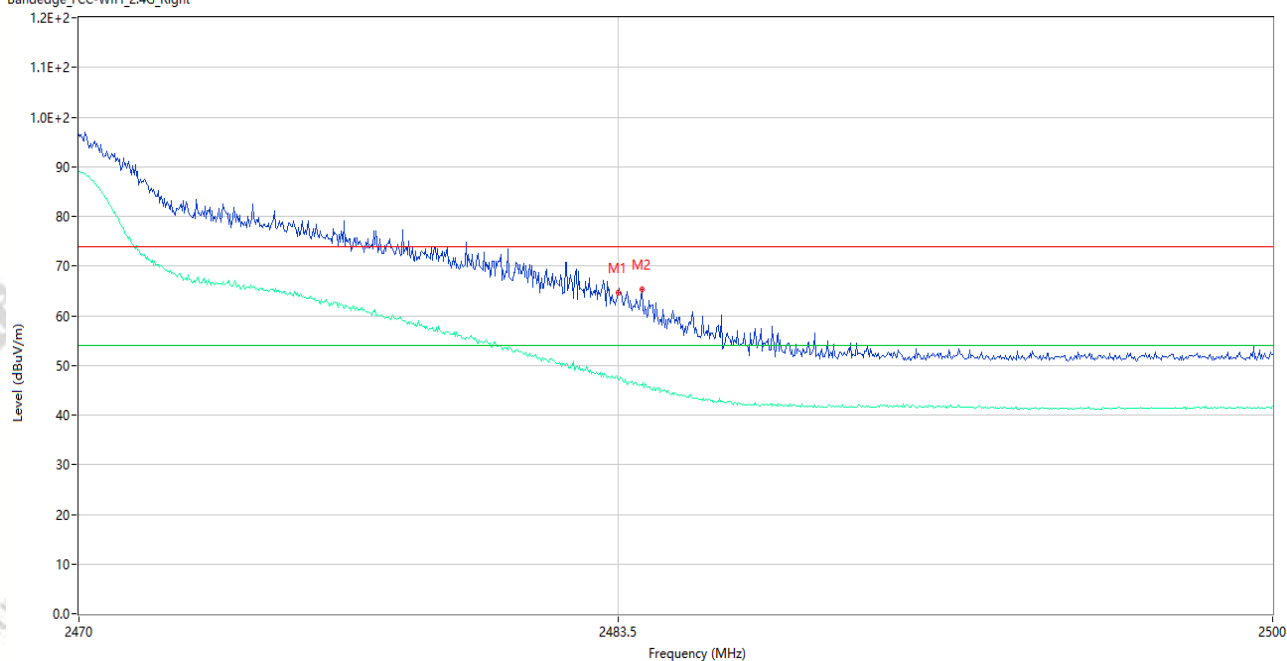


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.60	-3.78	74.0	9.40	Peak	247.00	150	Horizontal	Pass
1**	2483.500	47.16	-3.78	54.0	6.84	AV	247.00	150	Horizontal	Pass
2	2484.100	65.34	-3.78	74.0	8.66	Peak	228.00	150	Horizontal	Pass
2**	2484.100	45.93	-3.78	54.0	8.07	AV	228.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336
Test Time: 2026-08-29_19.45.45

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n20 CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

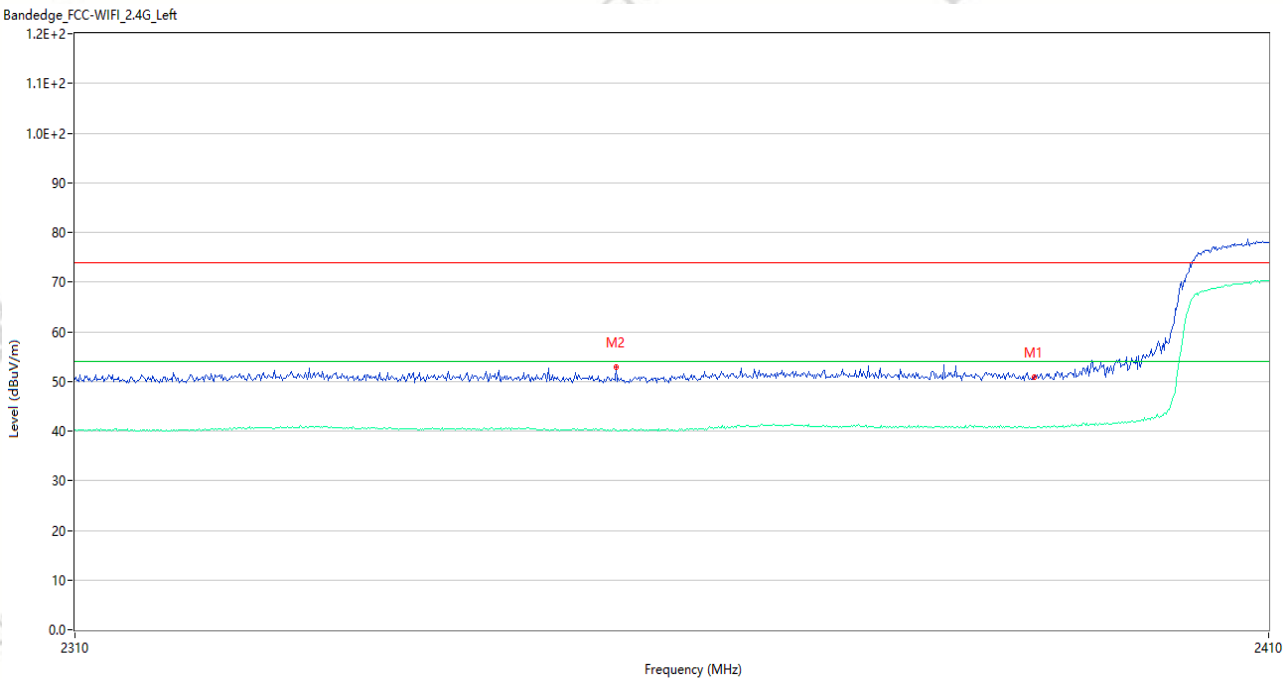

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.91	-4.87	74.0	23.09	Peak	220.80	150	Vertical	Pass
1**	2390.000	40.68	-4.87	54.0	13.32	AV	220.80	150	Vertical	Pass
2	2354.800	52.78	-5.03	74.0	21.22	Peak	299.00	150	Vertical	Pass
2**	2354.800	40.19	-5.03	54.0	13.81	AV	299.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.47.50

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n20 CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.14	-4.87	74.0	15.86	Peak	359.55	150	Horizontal	Pass
1**	2390.000	43.31	-4.87	54.0	10.69	AV	359.55	150	Horizontal	Pass
2	2389.600	60.02	-4.85	74.0	13.98	Peak	360.00	150	Horizontal	Pass
2**	2389.600	43.06	-4.85	54.0	10.94	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.28.37

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n20 CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

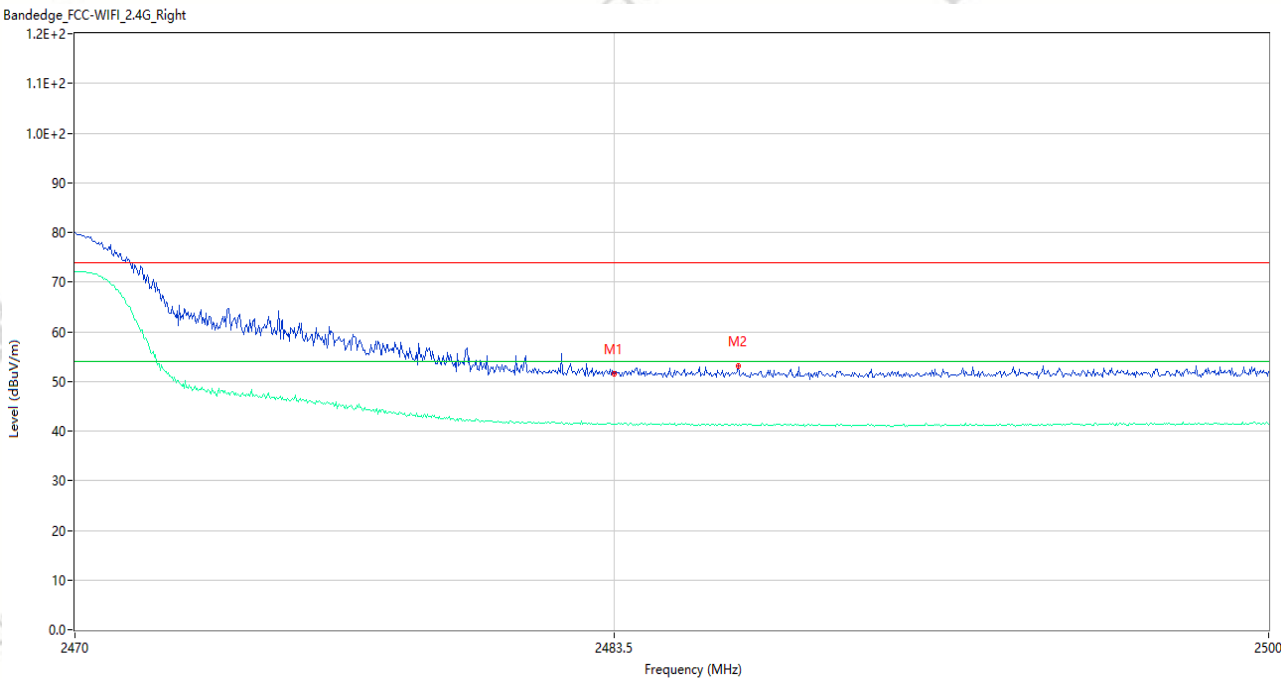

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.43	-3.78	74.0	22.57	Peak	56.00	150	Vertical	Pass
1**	2483.500	41.37	-3.78	54.0	12.63	AV	56.00	150	Vertical	Pass
2	2486.620	53.18	-3.79	74.0	20.82	Peak	60.00	150	Vertical	Pass
2**	2486.620	41.23	-3.79	54.0	12.77	AV	60.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.24.55

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIIFI 11n20 CH11 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

Bandedge_FCC-WIFI_2.4G_Right

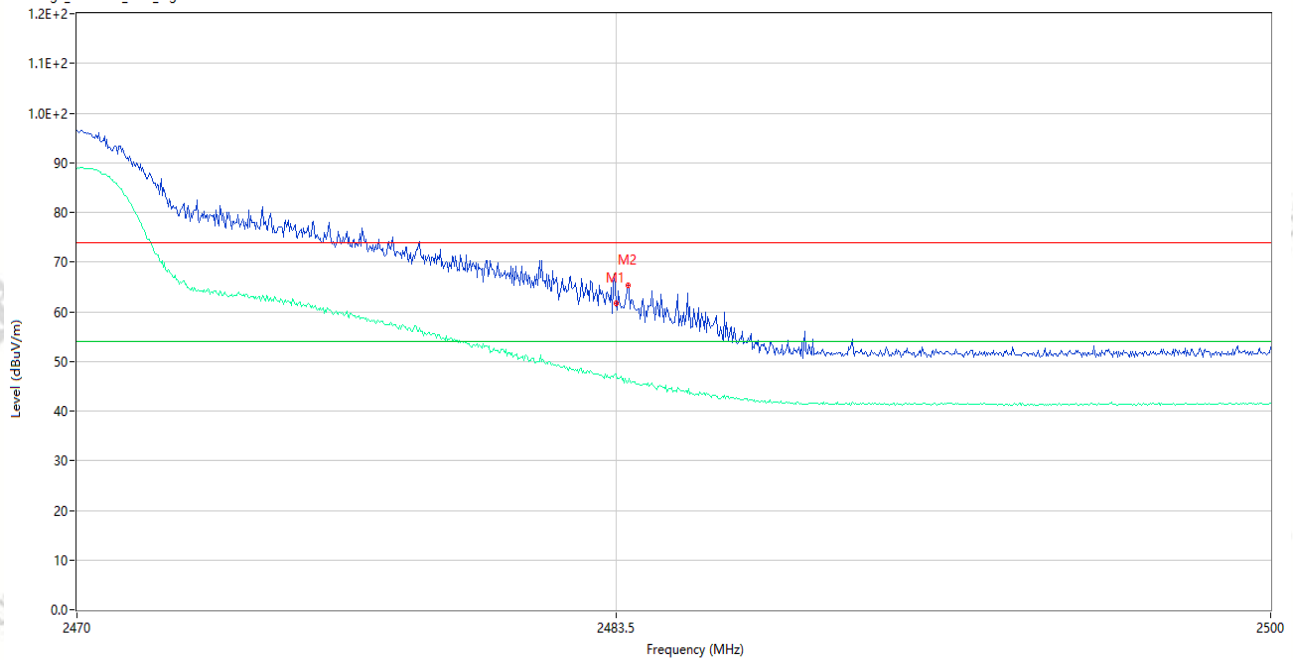


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.71	-3.78	74.0	12.29	Peak	228.00	150	Horizontal	Pass
1**	2483.500	47.36	-3.78	54.0	6.64	AV	228.00	150	Horizontal	Pass
2	2483.800	65.25	-3.78	74.0	8.75	Peak	207.00	150	Horizontal	Pass
2**	2483.800	45.98	-3.78	54.0	8.02	AV	207.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.41.53

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n40 CH3 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

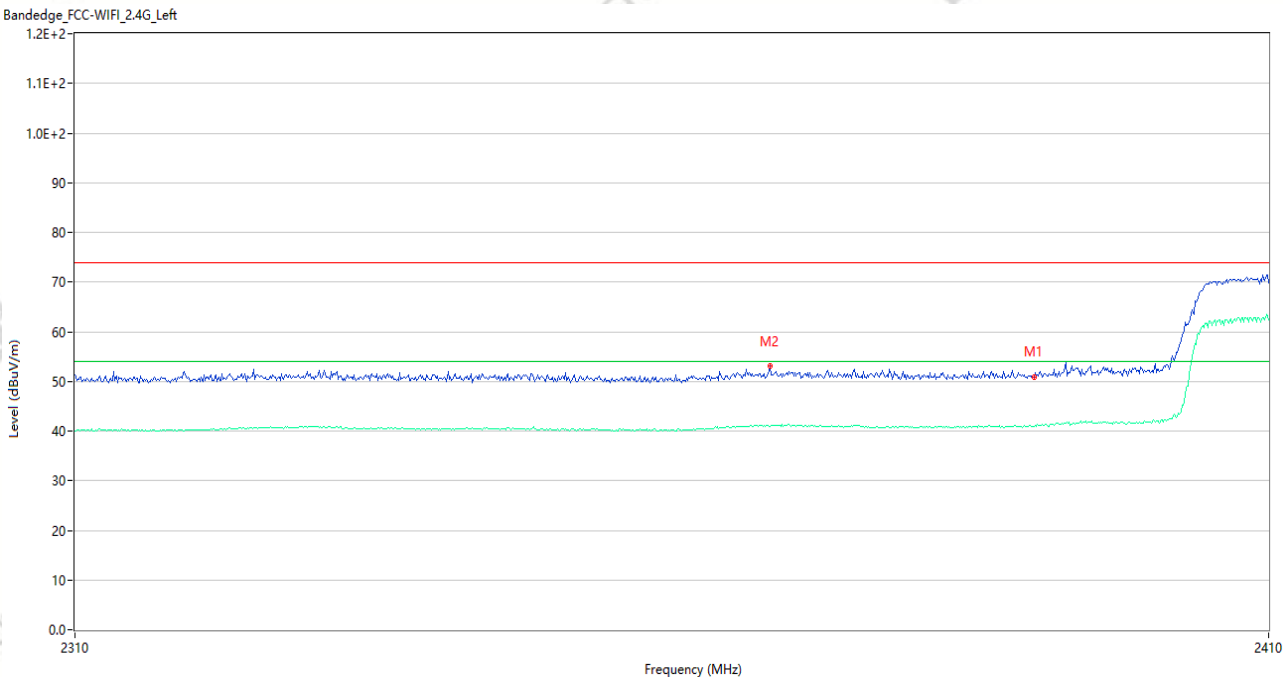


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.94	-4.87	74.0	23.06	Peak	165.95	150	Vertical	Pass
1**	2390.000	40.98	-4.87	54.0	13.02	AV	165.95	150	Vertical	Pass
2	2367.700	53.00	-4.26	74.0	21.00	Peak	279.00	150	Vertical	Pass
2**	2367.700	40.98	-4.26	54.0	13.02	AV	279.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.37.55

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n40 CH3 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

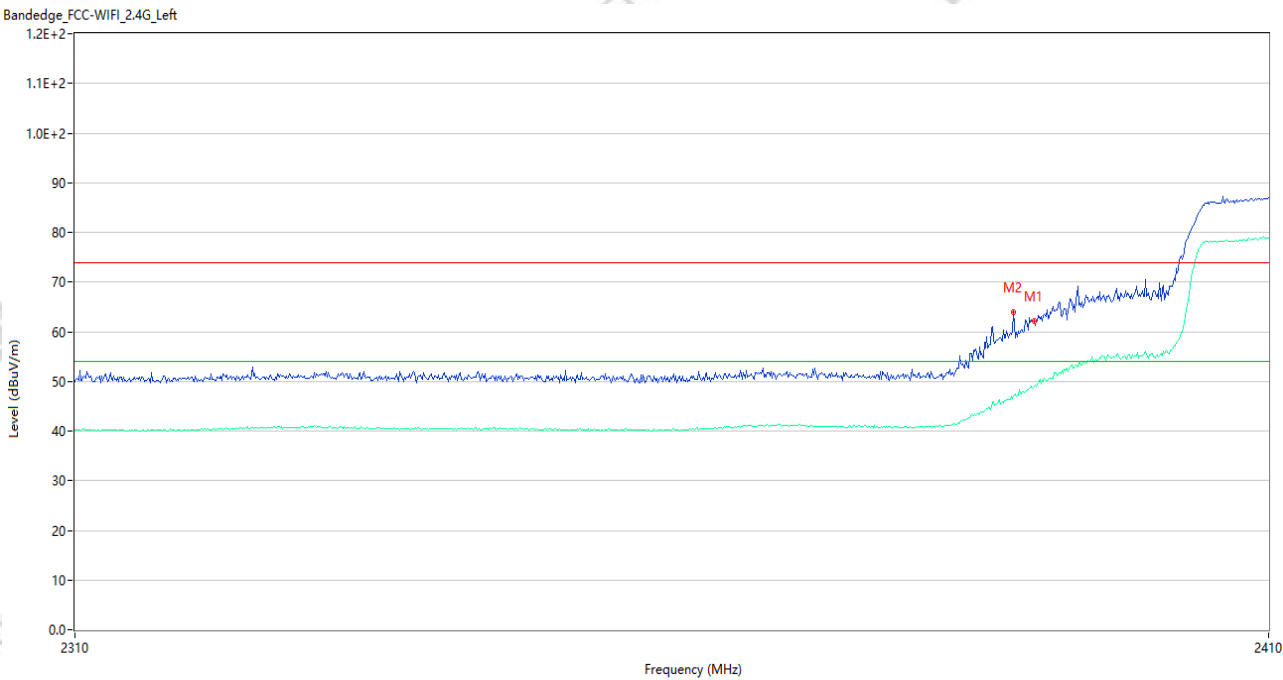


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.09	-4.87	74.0	11.91	Peak	243.01	150	Horizontal	Pass
1**	2390.000	49.05	-4.87	54.0	4.95	AV	243.01	150	Horizontal	Pass
2	2388.300	63.99	-4.78	74.0	10.01	Peak	225.00	150	Horizontal	Pass
2**	2388.300	47.09	-4.78	54.0	6.91	AV	225.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.33.51

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n40 CH9 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

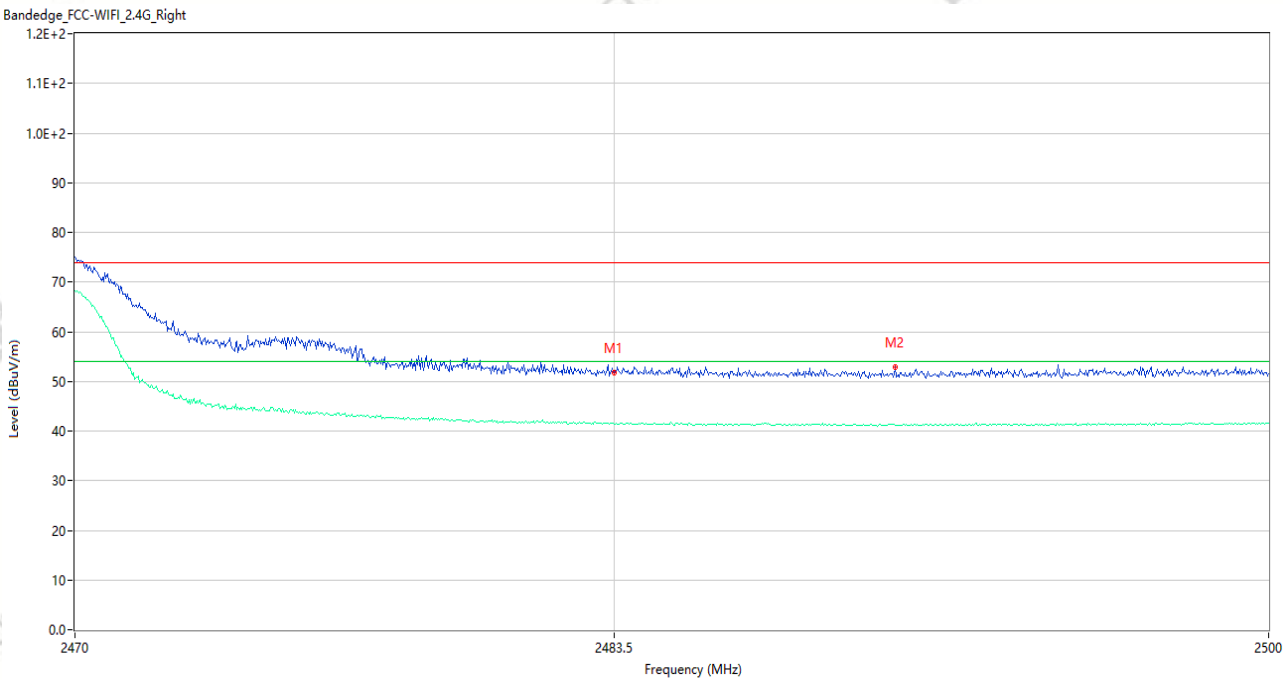


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.66	-3.78	74.0	22.34	Peak	125.00	150	Vertical	Pass
1**	2483.500	41.43	-3.78	54.0	12.57	AV	125.00	150	Vertical	Pass
2	2490.580	52.81	-3.84	74.0	21.19	Peak	315.00	150	Vertical	Pass
2**	2490.580	41.24	-3.84	54.0	12.76	AV	315.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336
Test Time: 2026-08-29_19.35.29

EUT Name:	SmartPhone	Temp.(°C):	23.2
Model Number:	MC9C674S	Humidity (%RH):	51
Sample Number:	CC26080200-001-S01	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIIFI 11n40 CH9 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A09+数据线: A14

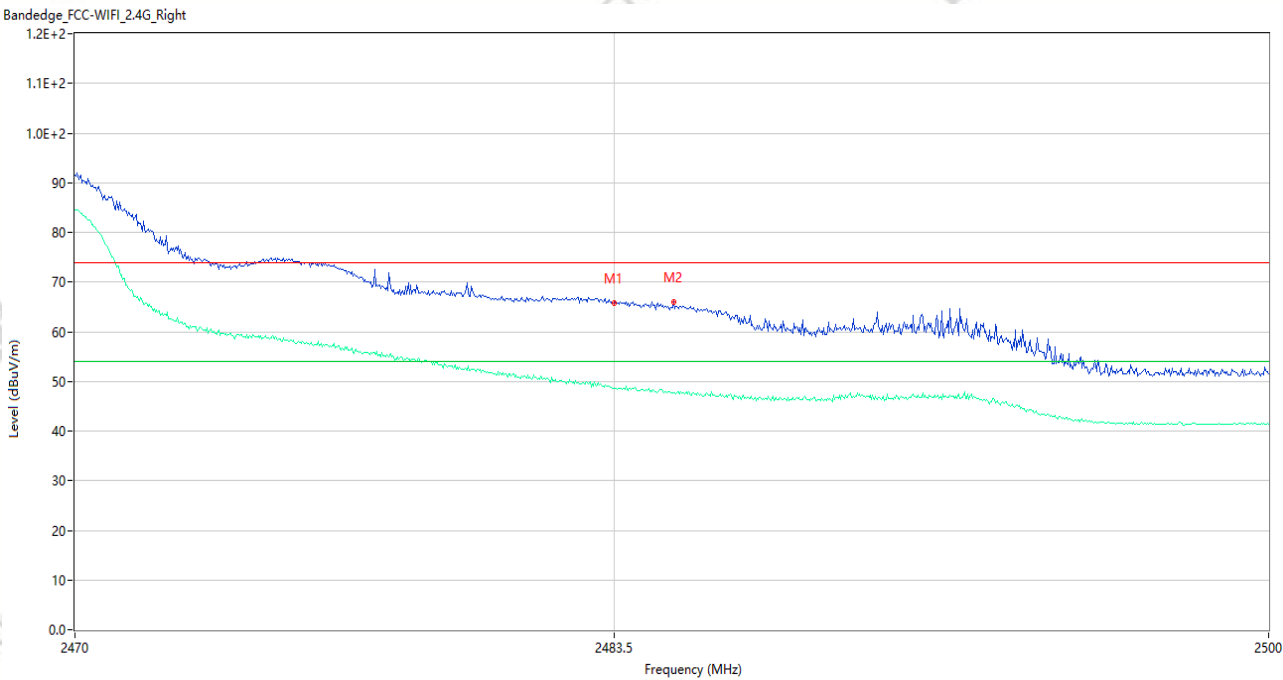

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.82	-3.78	74.0	8.18	Peak	236.00	150	Horizontal	Pass
1**	2483.500	48.59	-3.78	54.0	5.41	AV	236.00	150	Horizontal	Pass
2	2485.000	66.01	-3.78	74.0	7.99	Peak	252.00	150	Horizontal	Pass
2**	2485.000	47.77	-3.78	54.0	6.23	AV	252.00	150	Horizontal	Pass