

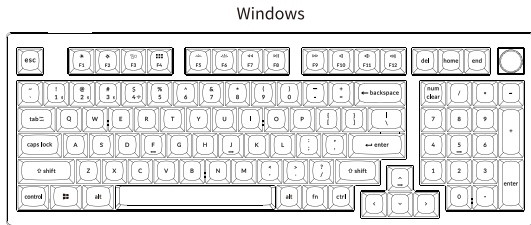



# V5 MAX WIRELESS MECHANICAL KEYBOARD OVERVIEW

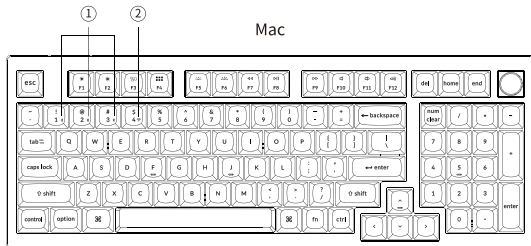


- ① Bluetooth Indicator
- ② 2.4G Indicator
- ③ G/Cable/BT (Mode Toggle)
- ④ Win/Android Mac/iOS (OS Toggle)
- ⑤ Type-C Port
- ⑥ Charging Indicator

## DEFAULT KEY LAYOUT:


LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

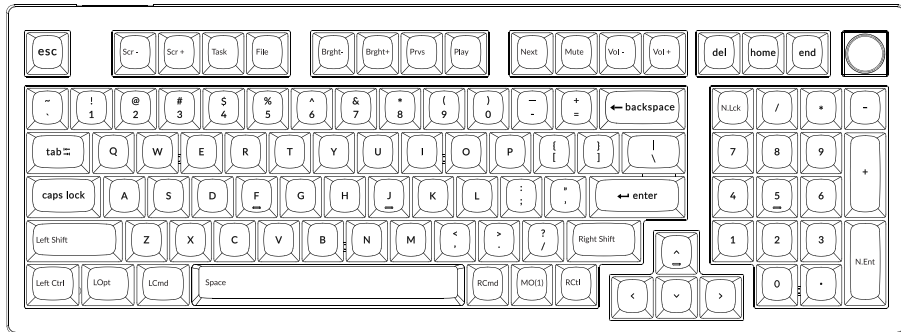

**LAYER 1:** This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn/MO(1) key.

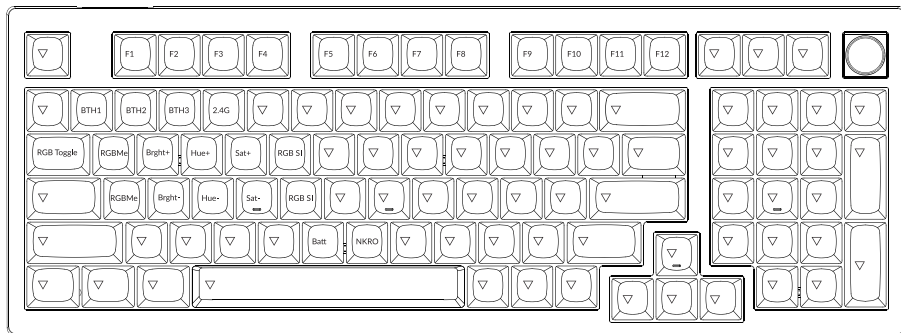


LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Windows.

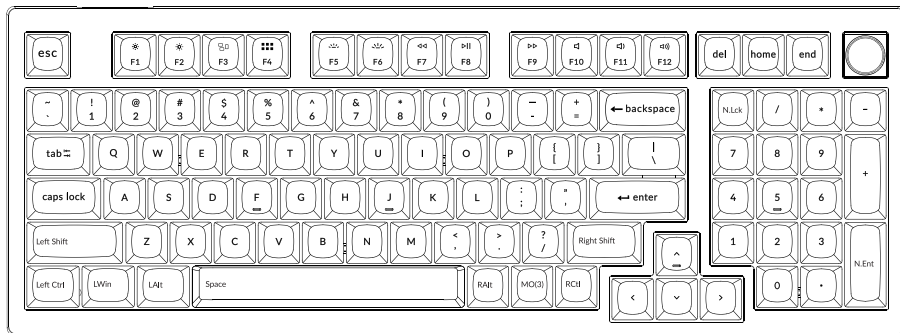

LWin = Left Windows   LAlt = Left Alt   RAlt = Right Alt   RCl = Right Ctrl

LAYER 3: This layer will be activated when your keyboard's system toggle is switched to Windows and press the fn/MO(3) key.

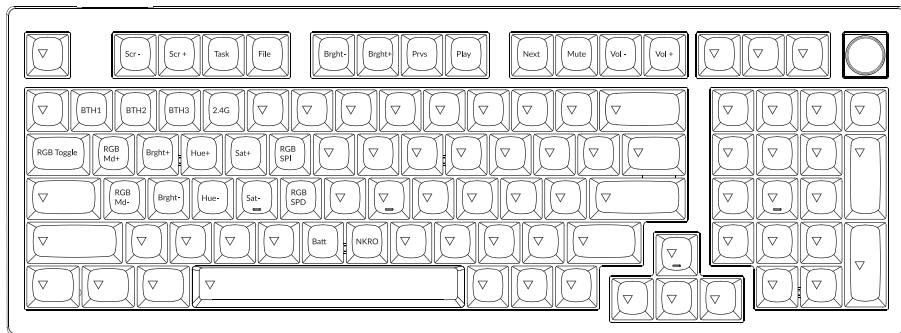

## KEY DESCRIPTION

| Key Description |                            | Key Description |                                                 | Key Description |                |
|-----------------|----------------------------|-----------------|-------------------------------------------------|-----------------|----------------|
| Scr-            | Screen Brightness Decrease | RGBMd+          | RGB Mode Next                                   | 2.4G            | 2.4GHz Host    |
| Scr+            | Screen Brightness Increase | RGBMd-          | RGB Mode Previous                               | Batt            | Battery life   |
| Bright-         | Backlight Decrease         | Hue+            | Hue Increase                                    | NKRO            | N-key rollover |
| Bright+         | Backlight Increase         | Hue-            | Hue Decrease                                    |                 |                |
| Prvs            | Previous                   | RGB SPI         | RGB Speed Increase                              |                 |                |
| Play            | Play/Pause                 | RGB SPD         | RGB Speed Decrease                              |                 |                |
| Next            | Next                       | MO(1)           | Layer 1 will be activated when holding this key |                 |                |
| Mute            | Mute                       | MO(3)           | Layer 3 will be activated when holding this key |                 |                |
| Vol-            | Volume Decrease            | BTH1            | Bluetooth Host 1                                |                 |                |
| Vol+            | Volume Increase            | BTH2            | Bluetooth Host 2                                |                 |                |
| RGB Toggle      | Turn Backlight on/off      | BTH3            | Bluetooth Host 3                                |                 |                |

## LED STATUS OVERVIEW

| LED Location                 | Function           | Status                                                                        |
|------------------------------|--------------------|-------------------------------------------------------------------------------|
| Battery Indicator            | Charging           | Charging - Static Red<br>Fully charged - Static Green                         |
| Bluetooth / 2.4GHz Indicator | Bluetooth / 2.4GHz | Reconnecting - Fast Blinking<br>Paired - Light off<br>Pairing - Slow Blinking |
| Caps Lock Indicator          | Caps Lock          | Enable Caps Lock - Static White<br>Disable Caps Lock - Light Off              |

### FUNCTION DESCRIPTION: CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Charging Indicator: A red light will stay on while charging; Charging is completed in about 5 hours, a green battery indicator will appear.

\*The V5 Max keyboard is compatible with all USB ports. Please use a 5V 1A adapter or USB 3.0 for the best performance. The V5 Max can be charged in Bluetooth/on/off mode.

\*\*This product supports up to 5V charging voltage and 1A charging current. We are not responsible for any problems caused by improper charging.

## **2.4GHZ / CABLE / BLUETOOTH MODE (MODE TOGGLE SWITCH)**

### **2.4GHZ MODE**

1. Connect the 2.4GHz receiver to your device's USB / Type-C Port.
2. Switch the toggle switch to the 2.4GHz option. The keyboard will automatically connect to your device.

\* Press the key combination "Fn" + "4" to enter the forced pairing mode. During this period, it is recommended that the keyboard be within 20cm of the receiver.

### **BLUETOOTH MODE**

1. Switch the toggle switch to the Bluetooth option.
2. Backlighting will be turned on.
3. Hold "Fn+1" key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device "Keychron V5 Max" on your device and connect it (the Bluetooth indicator goes off after successful pairing).

*Note: This keyboard supports pairing up to 3 devices simultaneously via key combination "Fn" + "1" / "Fn" + "2" / "Fn" + "3".*

*\*The Bluetooth indicator will continue to flash for 3 minutes.*

*\*\*Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

### **SWITCH BLUETOOTH DEVICES**

Short press key combination "Fn" + "1" / "Fn" + "2" / "Fn" + "3" to switch to other device.

### **RECONNECT:**

1. Switch the keyboard to the Bluetooth option to activate the keyboard.
2. The Bluetooth indicator flashes for 3 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again.

\* The keyboard must have been paired with the device to perform this function.

### **WIRED MODE**

1. Switch the toggle switch to the Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.
3. Backlighting will be turned on.

\*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

### **TURN OFF THE KEYBOARD**

Switch the keyboard to the Cable option and unplug the power cable.

### **BACKLIGHT SETTING**

- Short press key combination “Fn” + “Tab” to turn the backlight on/off.
- Short press key combination “Fn” + “Q” / “Fn” + “A” to switch between different types of lighting effects.

## TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer

Allow Bluetooth devices to connect to this computer

Alert me when a Bluetooth device wants to connect

### **My keyboard isn't working in Bluetooth mode.**

For the computer/smartphone:

Go to your device Bluetooth settings>Select the keyboard and remove/delete/unpair it.

Then restart your device.

For the keyboard:

Turn the keyboard off and back on. Then reconnect it to your device.

### **Wireless connection is interrupted even within 10 meters.**

Check if the keyboard is resting on a metal surface that can interfere with the wireless signal.


### **Third-party input tools are not compatible with the keyboard.**

Due to compatibility, versions, brands and drivers of Windows/macOS, functionalities of third-party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

### **Certain multimedia keys or function keys do not work.**

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands, and drivers of devices.

\*Multimedia keys:



Function keys:

F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12

### **Safety Precaution:**

Keep the product, accessories and packaging parts out of the reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C(5°F) or above 50°C(131°F) to preserve the lifespan of the keyboard.

**Keychron, Inc.**  
**Dover, DE 19901, United States**

Find us at:

<https://www.keychron.com>

[Support@keychron.com](mailto:Support@keychron.com)

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

#### Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement in portable exposure condition without restriction.



# V5 Max 无线机械键盘用户手册

旋钮版本

# 完全组装版本

## 键盘

1x 已组装成品键盘

## 包含

1x 外壳

1x PCB

1x PC定位板

1x PET垫


1x 底壳泡棉

1x 吸音泡棉

6套PCB卫星轴

1套键帽(PBT材质-双色注塑)

1套机械轴体

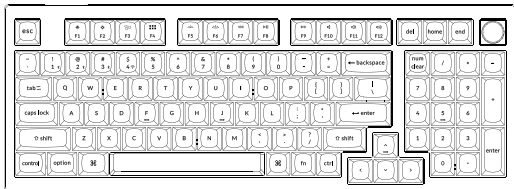

## 线材

1x Type-C to Type-C 接口线材

1x Type-A to Type-C 转接头

1x 接收器延长器

## 接收器

1x Type-A 2.4GHz 接收器


1x Type-C 2.4GHz 接收器

## 工具

1x 拔轴键器

1x 十字螺丝刀

1x 内六角螺丝刀

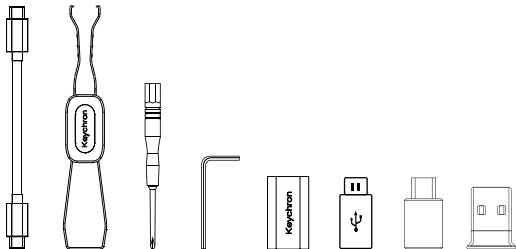

# 套件版本

## 键盘

1x 键盘本体 (不包含键帽、轴体)

## 包含

1x 外壳

1x PCB


1x PC定位板

1x PET垫

1x 底壳泡棉

1x 吸音泡棉

6套PCB卫星轴

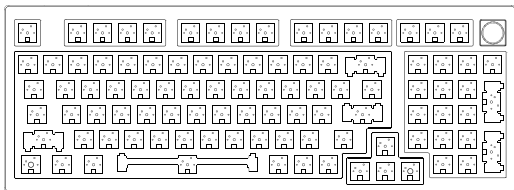

## 线材

1x Type-C to Type-C 接口线材

1x Type-A to Type-C 转接头

1x 接收器延长器

## 接收器

1xType-A 2.4GHz 接收器


1xType-C 2.4GHz 接收器

## 工具

1x 拔轴键器

1x 十字螺丝刀


1x 内六角螺丝刀

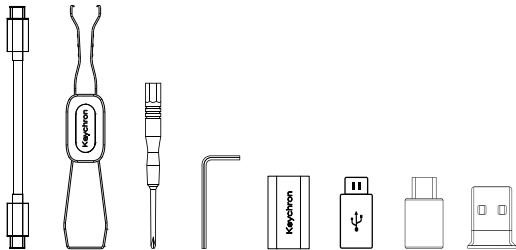

# 快速入门指南


如果您是Windows用户,请在包装内中找到对应的键帽,然后按照下面的说明找到并替换以下键帽。

Mac / Windows

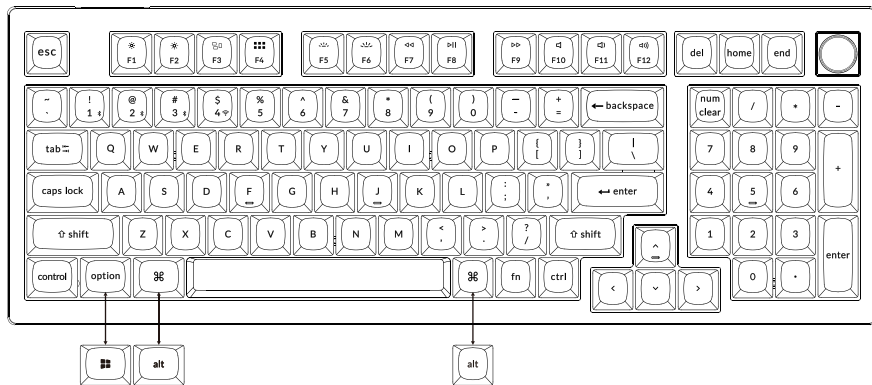


## 1、连接2.4GHz接收器


将2.4GHz接收器连接到设备USB端口。



把开关拨到2.4GHz模式



G = 2.4GHz




注意:为了获得最佳的无线体验,我们建议将2.4GHz接收器插入线材+赠送的接收器延长器,放置在书桌上靠近你的键盘,以降低延迟率和更少的干扰信号。


## 2、连接蓝牙



把开关拨到蓝牙模式




长按fn+1四秒使键盘进入配对模式, 键盘的配对名为: Keychron V5 Max.



### 3、连接有线



把开关拨到有线模式



---

### 4、关于VIA映射软件

可以访问 [usevia.app](https://usevia.app)使用在线VIA软件，  
VIA是可以映射按键的软件。  
如果VIA软件不能识别你的键盘，  
请联系我们以获得技术支持。



- \* 在线VIA只能在最新版本的Chrome, Edge和Opera浏览器中运行。
- \* VIA仅在键盘通过线连接到计算机时有效。