



# Balance and MediaFast

## User Manual (Declaration)

### Peplink Products:

One / One Core / Two / 20 / 20X / 30 LTE / 30 Pro / 210 / 310 / 310X / 310 5G / 310 Fiber 5G / 305 / 380 / 380X / 580 / 580X / 710 / 1350 / 1350 EC / 2500 / 2500 EC / 5000 EC / EPX / SDX / SDX Pro / MediaFast 200 / 500 / 750

Peplink Balance Firmware 8.5.2  
June 2025

### COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice.

Copyright © 2024 Peplink Ltd. All Rights Reserved. Peplink and Peplink logo are trademarks of Peplink International Ltd. Other brands or products mentioned may be trademarks or registered trademarks of their respective owners.

# Table of Contents

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>Introduction and Scope</b>                           | <b>5</b>  |
| <b>1 Glossary</b>                                       | <b>6</b>  |
| <b>2 Product Comparison Charts</b>                      | <b>7</b>  |
| 2.1 Balance Routers (for Small Office / Branch)         | 7         |
| 2.2 Balance Routers (for Enterprise / Headquarters)     | 8         |
| 2.3 MediaFast Routers                                   | 9         |
| <b>3 Product Features</b>                               | <b>10</b> |
| 3.1 WAN                                                 | 10        |
| 3.2 LAN                                                 | 10        |
| 3.3 VPN                                                 | 11        |
| 3.4 Inbound Traffic Management                          | 11        |
| 3.5 Outbound Policy                                     | 11        |
| 3.6 AP Controller                                       | 11        |
| 3.7 QoS                                                 | 11        |
| 3.8 Firewall                                            | 12        |
| 3.9 Captive Portal                                      | 12        |
| 3.10 Other Supported Features                           | 12        |
| <b>4 Advanced Feature Summary</b>                       | <b>14</b> |
| 4.1 Drop-in Mode and LAN Bypass: Transparent Deployment | 14        |
| 4.2 QoS: Clearer VoIP                                   | 14        |
| 4.3 Per-User Bandwidth Control                          | 15        |
| 4.4 High Availability via VRRP                          | 15        |
| 4.5 USB Modem and Android Tethering                     | 16        |
| 4.6 Built-In Remote User VPN Support                    | 16        |
| 4.7 LACP NIC Bonding                                    | 17        |
| 4.8 KVM Virtualization                                  | 17        |
| 4.9 DPI Engine                                          | 17        |
| 4.10 NetFlow                                            | 18        |
| 4.11 Wi-Fi Air Monitoring                               | 18        |
| 4.12 SP Default Configuration                           | 18        |
| 4.13 Peplink Relay                                      | 18        |
| 4.14 DNS over HTTPS (DoH)                               | 19        |
| 4.15 Peplink InTouch                                    | 19        |
| 4.16 Synergy Mode                                       | 19        |

|                                                       |           |
|-------------------------------------------------------|-----------|
| 4.17 Virtual WAN on VLAN                              | 19        |
| <b>5 Package Contents</b>                             | <b>20</b> |
| 5.1 Peplink Balance One/Two                           | 20        |
| 5.2 Peplink Balance 20/30/30 LTE/30 Pro/50            | 20        |
| 5.3 Peplink Balance 20X                               | 20        |
| 5.4 Peplink Balance 210/310                           | 20        |
| 5.5 Peplink Balance 310X                              | 20        |
| 5.6 Peplink Balance 310 5G                            | 21        |
| 5.7 Peplink Balance 310 Fiber 5G                      | 21        |
| 5.8 Peplink Balance 305/380/580/710/1350/2500/2500 EC | 21        |
| 5.9 Peplink Balance 5000 EC                           | 21        |
| 5.10 Peplink Balance 380X/580X                        | 21        |
| 5.11 Peplink MediaFast 200                            | 21        |
| 5.12 Peplink MediaFast 500                            | 22        |
| 5.13 Peplink EPX                                      | 22        |
| 5.14 Peplink SDX                                      | 22        |
| 5.15 Peplink SDX Pro                                  | 22        |
| <b>6 Peplink Balance Overview</b>                     | <b>23</b> |
| 6.1 Peplink Balance One                               | 23        |
| 6.2 Peplink Balance Two                               | 24        |
| 6.3 Peplink Balance 20                                | 25        |
| 6.4 Peplink Balance 20X                               | 27        |
| 6.5 Peplink Balance 30 LTE                            | 30        |
| 6.6 Peplink Balance 30 Pro                            | 31        |
| 6.7 Peplink Balance 50                                | 32        |
| 6.8 Peplink Balance 210                               | 34        |
| 6.9 Peplink Balance 305                               | 35        |
| 6.10 Peplink Balance 310                              | 36        |
| 6.11 Peplink Balance 310X                             | 37        |
| 6.12 Peplink Balance 310 5G                           | 38        |
| 6.13 Peplink Balance 310 Fiber 5G                     | 40        |
| 6.14 Peplink Balance 380                              | 41        |
| 6.15 Peplink Balance 380X                             | 42        |
| 6.16 Peplink Balance 580                              | 45        |
| 6.17 Peplink Balance 580X                             | 46        |
| 6.18 Peplink Balance 710                              | 48        |
| 6.19 Peplink Balance 1350                             | 50        |

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| 6.20 Peplink Balance 1350 EC                                                            | 51        |
| 6.21 Peplink Balance 2500                                                               | 52        |
| 6.22 Peplink Balance 2500 EC                                                            | 53        |
| 6.23 Peplink Balance 5000 EC                                                            | 54        |
| <b>7 Peplink MediaFast Overview</b>                                                     | <b>56</b> |
| 7.1 Peplink MediaFast 200                                                               | 56        |
| 7.2 Peplink MediaFast 500                                                               | 57        |
| 7.3 Peplink MediaFast 750                                                               | 58        |
| <b>8 Peplink Flex-Module Supported Models</b>                                           | <b>59</b> |
| 8.1 Peplink EPX                                                                         | 59        |
| 8.2 Peplink SDX                                                                         | 63        |
| 8.3 Peplink SDX Pro                                                                     | 66        |
| 8.4 Flex Module Expansion Modules                                                       | 68        |
| <b>9 OLED Display Menu</b>                                                              | <b>75</b> |
| <b>10 Installation</b>                                                                  | <b>76</b> |
| <b>11 Basic Configuration</b>                                                           | <b>76</b> |
| <b>12 Network Tab</b>                                                                   | <b>76</b> |
| <b>13 System Tab</b>                                                                    | <b>76</b> |
| <b>14 Status Tab</b>                                                                    | <b>76</b> |
| Appendix A. Restoration of Factory Defaults                                             | 77        |
| Appendix B. Routing under DHCP, Static IP, and PPPoE                                    | 77        |
| Appendix C. FusionSIM Manual                                                            | 80        |
| Appendix D. Case studies                                                                | 80        |
| Appendix E. Overview of ports used by Peplink SD-WAN routers and other Peplink services | 80        |
| Appendix F. Troubleshooting                                                             | 82        |
| Appendix G. Declaration                                                                 | 84        |

## Introduction and Scope

Peplink Balance routers provide link aggregation and load balancing across multiple WAN connections. We develop products and technologies that can help you build SD-WAN networks with unbreakable connection resilience, unmatched deployment flexibility, and intuitive ease of use.

Our product and technology focus has always been on WAN virtualization and the intelligent use of multiple WAN links at the same time to increase reliability and bandwidth whilst reducing costs.

We have two key WAN virtualization technologies, Intelligent load balancing for Internet access and SpeedFusion VPN Bonding for secure branch to branch connectivity.

The Peplink MediaFast series are a range of routers capable of content caching.

Designed with education and entertainment in mind, MediaFast downloads and accelerates video, iTunes iOS updates, app downloads, and other content for uninterrupted learning and fun anytime.

The MediaFast can prefetch content during off-peak hours, saving connectivity costs and reducing network burden during busy times.

This manual applies to the following Peplink Balance products:

- Peplink Balance One
- Peplink Balance Two
- Peplink Balance 20
- Peplink Balance 20X
- Peplink Balance 30 LTE/Pro
- Peplink Balance 210
- Peplink Balance 310
- Peplink Balance 310X
- Peplink Balance 310 5G
- Peplink Balance 310 Fiber 5G
- Peplink Balance 380
- Peplink Balance 380X
- Peplink Balance 580
- Peplink Balance 580X
- Peplink Balance 710
- Peplink Balance 1350
- Peplink Balance 2500
- Peplink Balance 2500 EC
- Peplink Balance 5000 EC
- Peplink MediaFast 200/500/750
- Peplink EPX
- Peplink SDX
- Peplink SDX Pro

The manual covers setting up your Peplink Balance or MediaFast and provides a collection of case studies detailing the advanced features of the Peplink Balance.

## 1 Glossary

The following terms, acronyms, and abbreviations are frequently used in this manual:

| Term        | Definition                                                         |
|-------------|--------------------------------------------------------------------|
| 3G          | 3rd generation standards for wireless communications (e.g., HSDPA) |
| 4G          | 4th generation standards for wireless communications (e.g., LTE)   |
| DHCP        | Dynamic Host Configuration Protocol                                |
| DNS         | Domain Name System                                                 |
| EVDO        | Evolution-Data Optimized                                           |
| FQDN        | Fully Qualified Domain Name                                        |
| HSDPA       | High-Speed Downlink Packet Access                                  |
| HTTP        | Hyper-Text Transfer Protocol                                       |
| ICMP        | Internet Control Message Protocol                                  |
| IP          | Internet Protocol                                                  |
| LAN         | Local Area Network                                                 |
| MAC Address | Media Access Control Address                                       |
| MTU         | Maximum Transmission Unit                                          |
| MSS         | Maximum Segment Size                                               |
| NAT         | Network Address Translation                                        |
| PPPoE       | Point to Point Protocol over Ethernet                              |
| QoS         | Quality of Service                                                 |
| SNMP        | Simple Network Management Protocol                                 |
| TCP         | Transmission Control Protocol                                      |
| UDP         | User Datagram Protocol                                             |
| VPN         | Virtual Private Network                                            |
| VRF         | Virtual Routing and Forwarding                                     |
| VRRP        | Virtual Router Redundancy Protocol                                 |
| WAN         | Wide Area Network                                                  |
| WINS        | Windows Internet Name Service                                      |
| WLAN        | Wireless Local Area Network                                        |

|      |                                                                 |
|------|-----------------------------------------------------------------|
| 210+ | Refers to Peplink Balance 210/310/380/580/710/1350/2500/2500 EC |
| 380+ | Refers to Peplink Balance 380/580/710/1350/2500/2500 EC         |

## 2 Product Comparison Charts

### 2.1 Balance Routers (for Small Office / Branch)

|                                                         | 20             | 20X                 | 30 LTE             | 30 PRO              | ONE                               | TWO            | 210            | 310X            |
|---------------------------------------------------------|----------------|---------------------|--------------------|---------------------|-----------------------------------|----------------|----------------|-----------------|
| <b>Product Code</b>                                     | <b>BPL-021</b> | <b>BPL-021X-LTE</b> | <b>BPL-031-LTE</b> | <b>BPL-031-LTEA</b> | <b>BPL-ONE</b>                    | <b>BPL-TWO</b> | <b>BPL-210</b> | <b>BPL-310X</b> |
| <b>Capacity</b>                                         |                |                     |                    |                     |                                   |                |                |                 |
| <b>Ethernet WAN Ports</b>                               | 2 (GE) +       | 1 (GE)              | 2 (GE)             | 2 (GE)              | <a href="#">2/5 (GE) #</a>        | 2 (GE)         | 2 (GE) +       | 2 (GE)          |
| <b>LAN Ports</b>                                        | 4 (GE)         | 4 (GE)              | 4 (GE)             | 4 (GE)              | <a href="#">8/5 (GE) #</a>        | 4 (GE)         | 7 (GE)         | 9 (GE)          |
| <b>Simultaneous Dual-Band 802.11ac/a/b/g/n Wi-Fi AP</b> | No             | Yes                 | No                 | Yes                 | Yes                               | No             | No             | No              |
| <b>Embedded 4G LTE</b>                                  | No             | Yes                 | Yes                | Yes                 | No                                | No             | No             | Yes             |
| <b>SIM Card Size</b>                                    | No             | Mini-SIM (2FF)      | Mini-SIM (2FF)     | Mini-SIM (2FF)      | No                                | No             | No             | Mini-SIM (2FF)  |
| <b>USB WAN Modem Port</b>                               | 1              | 1                   | 1                  | 1                   | 1                                 | 1              | 1              | 2               |
| <b>Recommended Users</b>                                | 1-60           | 1-60                | 1-60               | 1-60                | 1-60                              | 25-150         | 25-150         | 50-500          |
| <b>Stateful Firewall Throughput</b>                     | 150Mbps        | 900Mbps             | 200Mbps            | 400Mbps             | <a href="#">600Mbps/400Mbps #</a> | 1Gbps          | 350Mbps        | 2.5Gbps         |

A full product comparison for Balance routers is available at:  
<http://www.peplink.com/products/balance/model-comparison/>

## 2.2 Balance Routers (for Enterprise / Headquarters)

|                                                  | 305     | 310X     | 380     | 380X     | 580      | 580X     | 710      | 1350      | 2500                            | 2500 EC                              |
|--------------------------------------------------|---------|----------|---------|----------|----------|----------|----------|-----------|---------------------------------|--------------------------------------|
| Product Code                                     | BPL-305 | BPL-310X | BPL-380 | BPL-380X | BPL-580  | BPL-580X | BPL-710  | BPL-135   | BPL-2500 *                      | BPL-2500-EC                          |
| Capacity                                         |         |          |         |          |          |          |          |           |                                 |                                      |
| Ethernet WAN Ports                               | 3 (GE)  | 2 (GE)   | 3 (GE)  | 3 (GE)   | 5 (GE)   | 5 (GE)   | 7 (GE)   | 13 (GE)   | 12 (GE)/4 (GE) & 2 (10G SFP+) * | Up to 16 (GE)*<br>Up to 4x 10G SFP+* |
| LAN Ports                                        | 3 (GE)  | 9 (GE)   | 3 (GE)  | 3 (GE)   | 3 (GE)   | 3 (GE)   | 3 (GE)   | 3 (GE)    | 8 (GE)/2 (10G SFP+) *           | Up to 16 (GE)*<br>Up to 4x 10G SFP+* |
| Simultaneous Dual-Band 802.11ac/a/b/g/n Wi-Fi AP | No      | No       | No      | No       | No       | No       | No       | No        | No                              | No                                   |
| Embedded 4G LTE                                  | No      | Yes      | No      | No       | No       | No       | No       | No        | No                              | No                                   |
| SIM Card Size                                    | No      | Yes      | No      | No       | No       | No       | No       | No        | No                              | No                                   |
| USB WAN Modem Port                               | 1       | 2        | 1       | 1        | 1        | 1        | 1        | 1         | 1                               | 1                                    |
| Recommended Users                                | 50-500  | 50-500   | 50-500  | 50-500   | 300-1000 | 300-1000 | 500-2000 | 1000-5000 | 5000-20000+                     | 10000-20000+                         |
| Stateful Firewall Throughput                     | 1Gbps   | 2.5Gbps  | 1Gbps   | 3Gbps    | 1.5Gbps  | 4Gbps    | 2.5Gbps  | 5Gbps     | 8Gbps                           | 30Gbps                               |

A full product comparison for Balance routers is available at:

<http://www.peplink.com/products/balance/model-comparison/>

## 2.3 MediaFast Routers

|                                           | MediaFast 200                                        | MediaFast 500     | MediaFast 750     |
|-------------------------------------------|------------------------------------------------------|-------------------|-------------------|
| <b>Product Code</b>                       | MFA-200-W                                            | MFA-500-B         | MFA-750-B         |
| <b>WAN Interface</b>                      | 2x GE<br>(Only WAN 1 is activated.)                  | 5x GE             | 7x GE             |
| <b>Wi-Fi Interface</b>                    | Simultaneous Dual-Band<br>802.11a/b/g/n Access Point | -                 | -                 |
| <b>Embedded 3G/4G LTE</b>                 | -                                                    | -                 | -                 |
| <b>USB WAN Modem</b>                      | 1                                                    | 1                 | 1                 |
| <b>LAN Interface</b>                      | 8x GE; 802.3at PoE Output                            | 3x GE             | 3x GE             |
| <b>Recommended Users</b>                  | 25-150                                               | 300-1000          | 500-2000          |
| <b>Router Throughput</b>                  | 200Mbps                                              | 800Mbps           | 1.5Gbps           |
| <b>Disk Drive</b>                         | 120GB SSD                                            | 500GB SSD         | 1TB SSD           |
| <b>Load Balancing &amp; Failover</b>      | Yes                                                  | Yes               | Yes               |
| <b>PepVPN</b>                             | Yes                                                  | Yes               | Yes               |
| <b>SpeedFusion Hot Failover</b>           | Optional Feature                                     | Yes               | Yes               |
| <b>SpeedFusion WAN Smoothing</b>          | Optional Feature                                     | Yes               | Yes               |
| <b>SpeedFusion Bandwidth Bonding</b>      | Optional Feature                                     | Yes               | Yes               |
| <b>Number of PepVPN/SpeedFusion Peers</b> | 2                                                    | 50                | 300               |
| <b>PepVPN/ SpeedFusion Throughput</b>     | 50Mbps                                               | 200Mbps           | 400Mbps           |
| <b>Built-in AP Controller</b>             | Yes                                                  | Yes               | Yes               |
| <b>Maximum Number of AP Support</b>       | 50                                                   | 100               | 250               |
| <b>PoE Input</b>                          | -                                                    | -                 | -                 |
| <b>PoE Output</b>                         | 8x 802.3at (optional feature)                        | -                 | -                 |
| <b>Dimensions</b>                         | 292 x 177 x 44 mm                                    | 431 x 305 x 44 mm | 426 x 365 x 44 mm |
| <b>Gross Weight</b>                       | 2.8 kg                                               | 6.6 kg            | 5.5 kgs           |

A full product comparison for MediaFast routers is available at:

<https://www.peplink.com/products/mediafast-specifications/>

## 3 Product Features

Peplink Balance Series products enable all LAN users to share broadband Internet connections and provide advanced features to enhance Internet access. The following is a list of supported features:

### 3.1 WAN

- Multiple public IP support (DHCP, PPPoE, static IP address)
- Static IP support for PPPoE
- 10/100/1000Mbps Ethernet connection in full/half duplex
- Built-in HSPA and EVDO cellular modems
- USB mobile connection (**only one USB modem can be connected at a time**)
- Drop-in mode on selectable WAN port with MAC address passthrough network address translation (NAT) / port address translation (PAT)
- Inbound and outbound NAT mapping
- Multiple static IP addresses per WAN connection
- MAC address clone
- Customizable MTU and MSS values
- WAN connection health check
- Dynamic DNS (supported service providers: [changeip.com](http://changeip.com), [dyndns.org](http://dyndns.org), [no-ip.org](http://no-ip.org), [tzo.com](http://tzo.com), and [DNS-O-Matic](http://DNS-O-Matic.com))
- Ping, DNS lookup, and HTTP-based health check
- WAN throughput and consistency diagnosis
- WAN to WAN speed test
- USB Ethernet Adapter support

### 3.2 LAN

- DHCP server on LAN
- Extended DHCP option support
- Static routing rules
- Local DNS proxy server
- 802.1q VLANs
- Port-based VLANs
- Virtual Network Mapping

### **3.3 VPN**

- Secure SpeedFusion™
- SpeedFusion performance analyzer
- X.509 certificate support
- Bandwidth bonding and failover among selected WAN connections
- Ability to route traffic to a remote VPN peer
- Optional pre-shared key setting
- Layer 2 bridging
- Layer 2 Peer Isolation
- SpeedFusion™ throughput, ping, and traceroute tests
- Built-in L2TP / PPTP / OpenVPN VPN server
- Authenticate L2TP / PPTP clients using RADIUS and LDAP servers
- Multi-Site PepVPN Profile
- IPsec VPN for network-to-network connections
- L2TP / PPTP and IPsec passthrough
- Simultaneous L2 & L3 VPN tunnel between the same pair of devices

### **3.4 Inbound Traffic Management**

- TCP/UDP traffic redirection to dedicated LAN server(s)
- Inbound link load balancing by means of DNS

### **3.5 Outbound Policy**

- Link load distribution per TCP/UDP service
- Persistent routing for specified source and/or destination IP addresses per TCP/UDP service
- Prioritize and route traffic to VPN tunnels with Priority and Enforced algorithms
- Time-based scheduling

### **3.6 AP Controller**

- Configure and manage Pepwave AP devices
- Review the status of connected AP

### **3.7 QoS**

- Quality of service for different applications and custom protocols

- User group classification for different service levels
- Bandwidth usage control and monitoring on group- and user-level
- Application prioritization for custom protocols and DSL optimization

### **3.8 Firewall**

- Outbound (LAN to WAN) firewall rules
- Inbound (WAN to LAN) firewall rules per WAN connection
- Intrusion detection and prevention
- Specification of NAT mappings
- Web blocking
- Application blocking
- Time-based scheduling
- Outbound firewall rules can be defined by destination domain name

### **3.9 Captive Portal**

- Social Wi-Fi Hotspot Support
- Splash screen of open networks, login page for secure networks
- Customizable built-in captive portal
- Supports linking to outside page for captive portal

### **3.10 Other Supported Features**

- Easy-to-use web administration interface
- HTTP and HTTPS support for web administration interface
- Configurable web administration port and administrator password
- Read-only user for web admin
- Shared-IP drop-in mode
- Authentication and accounting by RADIUS server for web admin
- Firmware upgrades, configuration backups, ping, and traceroute via web administration interface
- Remote web-based configuration (via WAN and LAN interfaces)
- Remote reporting to Peplink Balance reporting server
- Hardware high availability via VRRP, with automatic configuration synchronization
- Real-time, hourly, daily and monthly bandwidth usage reports and charts
- Hardware backup via LAN bypass
- Built-in WINS server
- Time server synchronization
- SNMP

- Email notification
- Syslog
- SIP passthrough
- PPTP packet passthrough
- Active sessions
- Active client list
- WINS client list
- UPnP / NAT-PMP
- Event log is persistent across reboots
- IPv6 support
- Support for USB tethering on Android phones

## 4 Advanced Feature Summary

### 4.1 Drop-in Mode and LAN Bypass: Transparent Deployment




As your organization grows, it may require more bandwidth, but modifying your network can be tedious. In **Drop-in Mode**, you can conveniently install your Peplink router without making any changes to your network. For any reason your Peplink router loses power, the **LAN Bypass** will safely and automatically bypass the Peplink router to resume your original network connection.

### 4.2 QoS: Clearer VoIP



VoIP and videoconferencing are highly sensitive to latency. With QoS, Peplink routers can detect VoIP traffic and assign it the highest priority, giving you crystal-clear calls.

### 4.3 Per-User Bandwidth Control

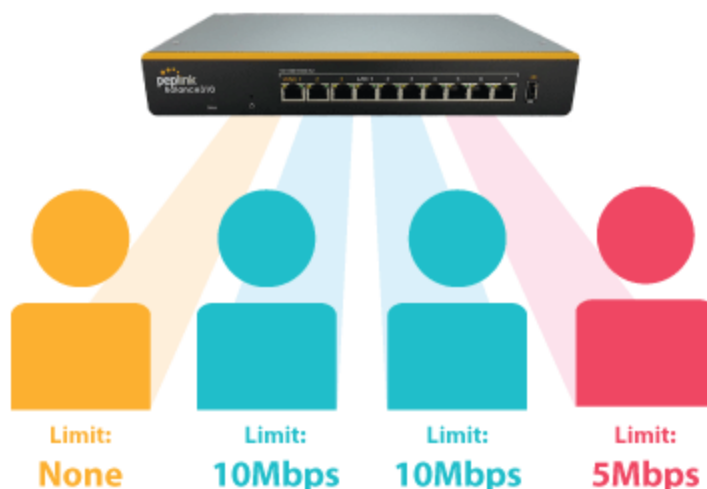

With per-user bandwidth control, you can define bandwidth control policies for up to 3 groups of users to prevent network congestion. Define groups by IP address and subnet, and set bandwidth limits for every user in the group.

### 4.4 High Availability via VRRP



When your organization has a corporate requirement demanding the highest availability with no single point of failure, you can deploy two Peplink routers in [High Availability mode](#). With High Availability mode, the second device will take over when needed.

## 4.5 USB Modem and Android Tethering



For increased WAN diversity, plug in a USB LTE modem as backup. Peplink routers are compatible with over 200 modem types. You can also tether to smartphones running Android 4.1.X and above.

By default, the USB port is “USB Modem” mode. If you need to use it to connect to USB Ethernet Adapter, you need to change it to “USB Ethernet” mode,

<https://forum.peplink.com/t/can-i-use-ethernet-adapters-on-the-usb-wan/8327>

## 4.6 Built-In Remote User VPN Support



Use OpenVPN or L2TP with IPsec to safely and conveniently connect remote clients to your private network. L2TP with IPsec is supported by most devices, but legacy devices can also connect using PPTP.

[Click here for the full instructions on setting up L2TP with IPsec.](#)


[Click here for the full instructions on setting up OpenVPN connections](#)

## 4.7 LACP NIC Bonding



Use 802.3ad to combine multiple LAN connections into a virtual LAN connection. This virtual connection has higher throughput and redundancy in case any single link fails.

## 4.8 KVM Virtualization

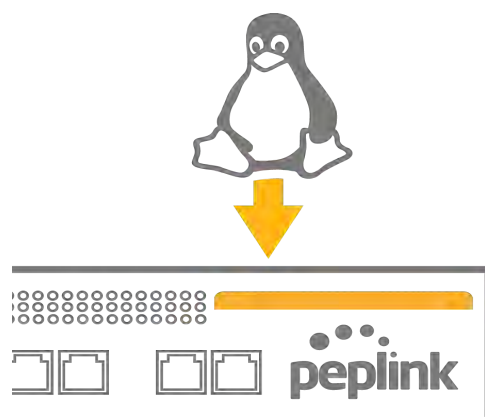

KVM is a virtualisation module that allows administrators using our routers to host a large range of virtual machines. KVM is now supported by some of the MediaFast / ContentHub routers.

[Click here for the full instructions on how to set up KVM](#)

[Click here for the full instructions on how to set up KVM with USB Storage](#)

## 4.9 DPI Engine


The DPI report written in the updated KB article will show further information on InControl2 through breaking down application categories into subcategories.

<https://forum.peplink.com/t/ic2-deep-packet-inspection-dpi-reports-and-everything-you-need-to-know-about-it/10151/>

## 4.10 NetFlow

NetFlow protocol is used to track network traffic. Tracking information from NetFlow can be sent to the NetFlow collector, which analyzes data and generates reports for review.

**Note:** To enable this feature, go to <https://<Device's IP>/cgi-bin/MANGA/support.cgi>

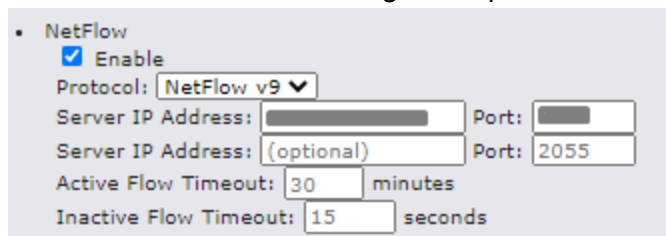


NetFlow configuration interface showing the following settings:

- ☒ Enable
- Protocol: **NetFlow v9** (dropdown)
- Server IP Address:  Port:
- Server IP Address: (optional)  Port: **2055**
- Active Flow Timeout: **30** minutes
- Inactive Flow Timeout: **15** seconds

## 4.11 Wi-Fi Air Monitoring

Peplink routers support Wi-Fi “Air Monitoring Mode” which is used to troubleshoot remotely and proactively monitor Wi-Fi and WAN performance. After enabling Wi-Fi Air Monitoring, reports can be viewed under **InControl 2 > Reports > AirProbe Reports**.

**Note:** To enable this feature, go to <https://<Device's IP>/cgi-bin/MANGA/support.cgi>

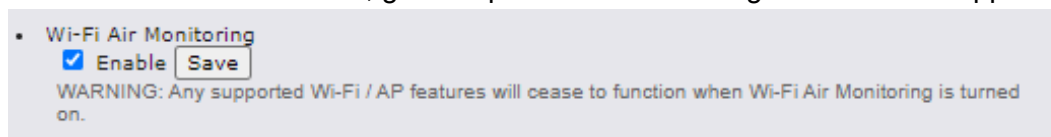

Wi-Fi Air Monitoring configuration interface showing the following settings:

- ☒ Enable **Save**
- WARNING: Any supported Wi-Fi / AP features will cease to function when Wi-Fi Air Monitoring is turned on.

## 4.12 SP Default Configuration

The SP Default Configuration feature written in the updated KB article allows for the provisioning of custom made settings (a.k.a. InControl2 configuration) via the Ethernet LAN port and is ideal for those wanting to do a bulk deployment of many Peplink devices.

**Note:** If you would like to use this feature, please contact your purchase point (Eg.VAD).

## 4.13 Peplink Relay

Cloud Service Providers often restrict access to certain applications. With SFC Relay, you can route traffic before going out to the Internet, allowing access to previously restricted applications experienced with the public SpeedFusion Cloud nodes. Available as an add-on for your home router or as an upgradable license to your Peplink router, SFC Relay is sure to impress you and any peers you give access to.

<https://forum.peplink.com/t/configure-speedfusion-cloud-relay-server-and-client/6215ca9b017e48e0f3ff2479/>

#### 4.14 DNS over HTTPS (DoH)

DoH provides the benefits of communicating DNS information over a secure HTTPS connection in an encrypted manner. The protocol offers increased privacy and confidentiality by preventing data interception and man-in-the-middle attacks.

#### 4.15 Peplink InTouch

InTouch is Peplink's zero-touch remote network management solution, leveraging InControl 2 and a SpeedFusion Connect (formerly known as SpeedFusion Cloud) data plan. This service extends a network administrator's ability to reach any device UI backed by a Peplink/Pepwave router. To configure InTouch, all you need is a valid InControl 2 subscription, a SpeedFusion Connect data plan, and a Peplink/Pepwave router (which requires the latest 8.2.0 firmware).

To watch a demonstration and read the FAQ, visit

<https://www.peplink.com/enterprise-solutions/intouch/>

Or learn to configure InTouch at <https://youtu.be/zg0iavHGkJw>

#### 4.16 Synergy Mode

Synergy mode is a cascade multiple devices and combine the number of WANs to a single device virtually. All the WANs on the Synergized Device will appear as native WAN interfaces at the Synergy Controller and it can be managed like the built-in WAN interfaces.

[https://forum.peplink.com/t/synergy-mode-\(firmware-8.3.0\)/639be7d8af8c71a6f3050323/](https://forum.peplink.com/t/synergy-mode-(firmware-8.3.0)/639be7d8af8c71a6f3050323/)

#### 4.17 Virtual WAN on VLAN

The Virtual WAN Activation License allows you to create 1 x virtual WAN on a particular VLAN, on either WAN or LAN interface. This means that you can create a virtual WAN on VLAN for a WAN port, or a virtual WAN on VLAN for a LAN port.

<https://forum.peplink.com/t/b20x-virtual-wan-activation-license-faq/6204bac7d90b9e6355e96e8d/1>

## 5 Package Contents

The contents of Peplink Balance product packages are as follows:

### 5.1 Peplink Balance One/Two

- Peplink Balance One/Two
- Power adapter
- Information slip

### 5.2 Peplink Balance 20/30/30 LTE/30 Pro/50

- Peplink Balance 20/30/30 LTE/30 Pro/50
- Power adapter
- Information slip

### 5.3 Peplink Balance 20X

- Peplink Balance 20X
- 2x LTE Antenna, 1x GPS Antenna, 2x Wi-Fi Antenna
- Power adapter
- Information slip

### 5.4 Peplink Balance 210/310

- Peplink Balance 210/310
- Power adapter
- Information slip
- Rackmount kit

### 5.5 Peplink Balance 310X

- Peplink Balance 310X
- 2x LTE Antenna, 1x GPS Antenna
- Power adapter
- Ear L-Mounts kit
- Power cord

## **5.6 Peplink Balance 310 5G**

- Balance 310 5G
- Power adapter
- Power cord
- 4x Rubber foot
- 6x Cellular Antenna

## **5.7 Peplink Balance 310 Fiber 5G**

- Balance 310 Fiber 5G
- Power adapter
- Power cord
- 4x Rubber foot
- 4x Cellular Antenna
- 4x Wi-Fi Antenna

## **5.8 Peplink Balance 305/380/580/710/1350/2500/2500 EC**

- Peplink Balance 305/380/580/710/1350/2500/ 2500 EC
- Power cord
- Information slip
- Rackmount kit

## **5.9 Peplink Balance 5000 EC**

- 2x Power Cords
- 1x RJ45 LAN cable
- 2x Rack Unit Rails
- 1x Pair of Short Ear Rack Mount Kit with Screws

## **5.10 Peplink Balance 380X/580X**

- Peplink 380X/580X
- Power cord
- 1 Pair of Mounting Brackets

## **5.11 Peplink MediaFast 200**

- Peplink MediaFast 200

- Power adapter
- Information slip

### **5.12 Peplink MediaFast 500**

- Peplink MediaFast 500
- Power cord
- Information slip
- Rackmount kit

### **5.13 Peplink EPX**

- Wireless SD-WAN Powerhouse
- EPX Chassis with OLD
- Optional x LTE-A modules
- Optional x Copper ETH module
- Optional x Fiber ETH module
- Rack mounting kit with brackets and slide

### **5.14 Peplink SDX**

- SDX Base Chassis
- 1U 19" Rackmount Chassis


### **5.15 Peplink SDX Pro**

- SDX Pro Base Chassis
- 1U 19" Rack-mount Chassis
- 1x Rubber Foot Pack
- 2x Power Cords
- 1x L-mount Set

## 6 Peplink Balance Overview

### 6.1 Peplink Balance One

#### 6.1.1 Panel Appearance

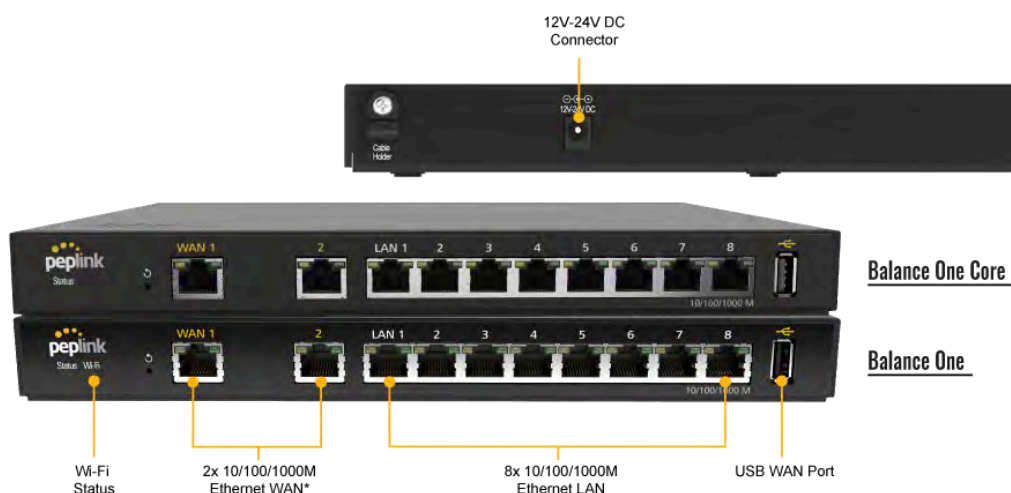

\*If the WAN Activation License (BPL-ONE-LC-5WAN) is activated, router throughput will be changed to 400Mbps, both number of WAN and LAN will become 5.

#### 6.1.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |


| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| Green LED         | ON – 1000 Mbps                                              |
|                   | OFF – 10 / 100 Mbps or port is not connected                |
| Orange LED        | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| Port Type         | Auto MDI/MDI-X ports                                        |

| Wi-Fi Indicators |       |          |
|------------------|-------|----------|
| Wi-Fi            | OFF   | Disabled |
|                  | Green | Ready    |

| USB Port  |                          |
|-----------|--------------------------|
| USB Ports | For future functionality |

## 6.2 Peplink Balance Two

### 6.2.1 Panel Appearance

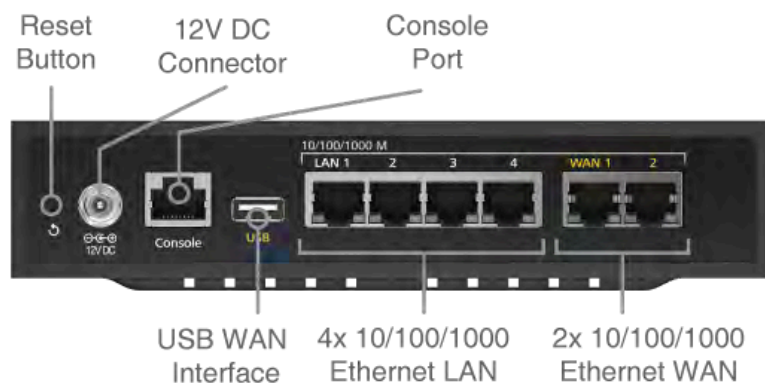

## 6.2.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Power                       | OFF – Power off              |
|                             | Green – Power on             |
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| Green LED         | ON – 1000 Mbps                                              |
|                   | OFF – 10 / 100 Mbps or port is not connected                |
| Orange LED        | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| Port Type         | Auto MDI/MDI-X ports                                        |

| USB Port  |                                  |
|-----------|----------------------------------|
| USB Ports | For connecting a 4G/3G USB modem |

## 6.3 Peplink Balance 20

### 6.3.1 Panel Appearance

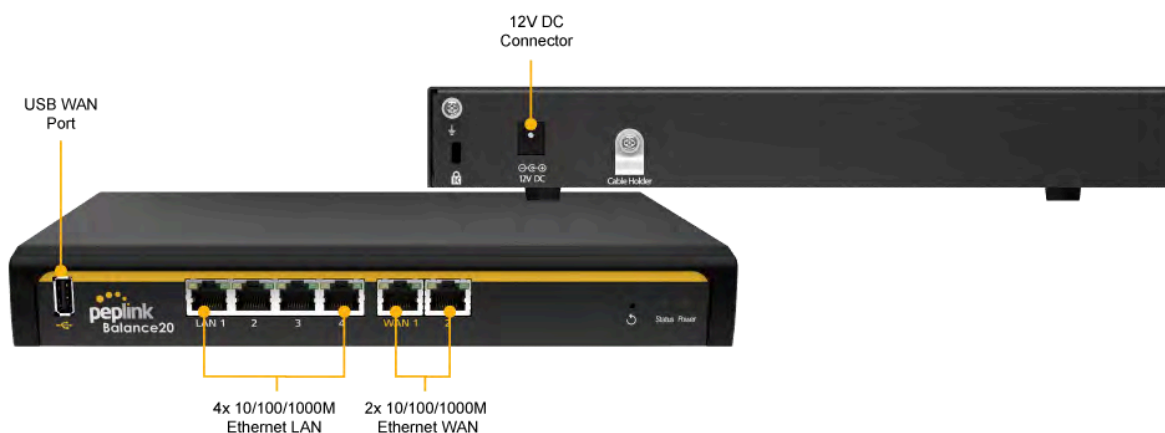

### 6.3.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Power</b>                | OFF – Power off              |
|                             | Green – Power on             |
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| <b>Green LED</b>  | ON – 10 / 100 / 1000 Mbps                                   |
| <b>Orange LED</b> | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                        |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.4 Peplink Balance 20X

### 6.4.1 Panel Appearance

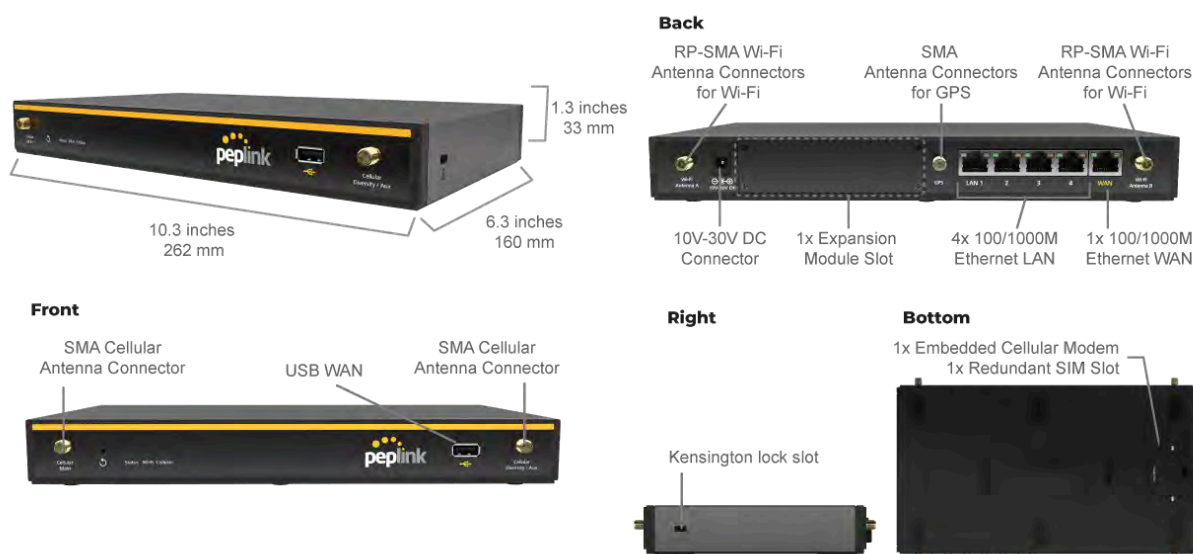

### 6.4.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| <b>Green LED</b>  | ON – 1000 Mbps                                              |
|                   | OFF – 10 / 100 Mbps or port is not connected                |
| <b>Orange LED</b> | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                        |

| Wi-Fi AP Indicators |     |          |
|---------------------|-----|----------|
| <b>Wi-Fi AP</b>     | OFF | Disabled |
|                     | ON  | Enabled  |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

### 6.4.3 Flex Module Mini



| 1x LTE-A Module                   |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <b>Interface</b>                  | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b>         | 2x SMA Cellular Antenna Connectors                         |
| <b>Downlink / Uplink Datarate</b> | 300Mbps/50Mbps (CAT-6)<br>600Mbps/150Mbps (CAT-12)         |
| <b>Power Consumption</b>          | 10W                                                        |
| <b>Weight</b>                     | 0.83 pounds   375 grams                                    |



| 1xLTE-A Module            |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Interface</b>          | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b> | 4x SMA Cellular Antenna Connectors                         |


|                                   |                            |
|-----------------------------------|----------------------------|
| <b>Downlink / Uplink Datarate</b> | 1.2 Gbps/150 Mbps (CAT-18) |
| <b>Power Consumption</b>          | 10W                        |
| <b>Weight</b>                     | 0.83 pounds   375 grams    |



| 1x VDSL Module           |                                     |
|--------------------------|-------------------------------------|
| <b>Interface</b>         | 1x RJ11 Connector,<br>1x Status LED |
| <b>Power Consumption</b> | 9W                                  |
| <b>Weight</b>            | 0.44 pounds   200 grams             |

## 6.5 Peplink Balance 30 LTE

### 6.5.1 Panel Appearance

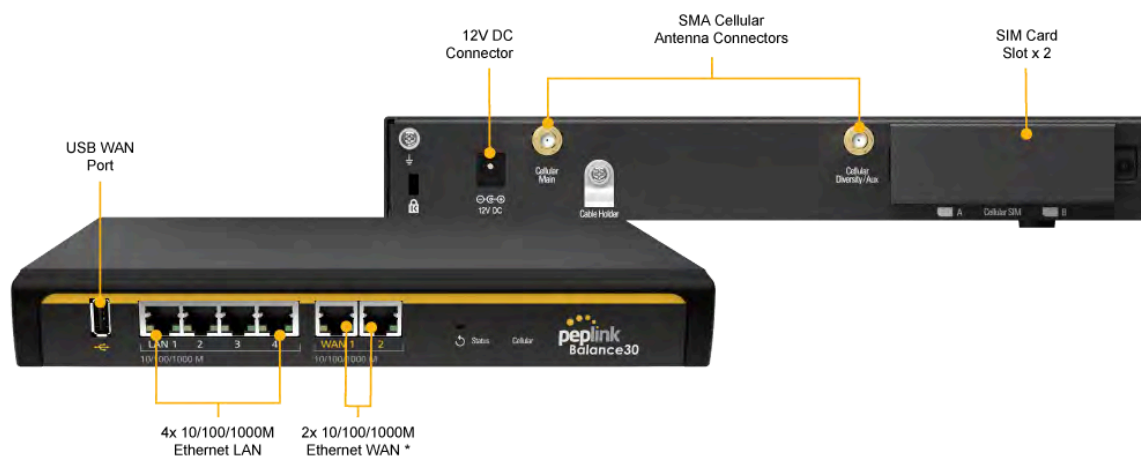

\* WAN ports can act as a LAN port if needed.

### 6.5.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Power</b>                | OFF – Power off              |
|                             | Green – Power on             |
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |


| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| <b>Green LED</b>  | ON – 10 / 100 /1000 Mbps                                    |
| <b>Orange LED</b> | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                        |

| Cellular WAN Indicators |                 |                                |
|-------------------------|-----------------|--------------------------------|
| Cellular                | OFF             | Disabled                       |
|                         | Blinking slowly | Connecting to wireless network |
|                         | ON              | Connected to wireless network  |

| USB Port  |                                  |
|-----------|----------------------------------|
| USB Ports | For connecting a 4G/3G USB modem |

## 6.6 Peplink Balance 30 Pro

### 6.6.1 Panel Appearance

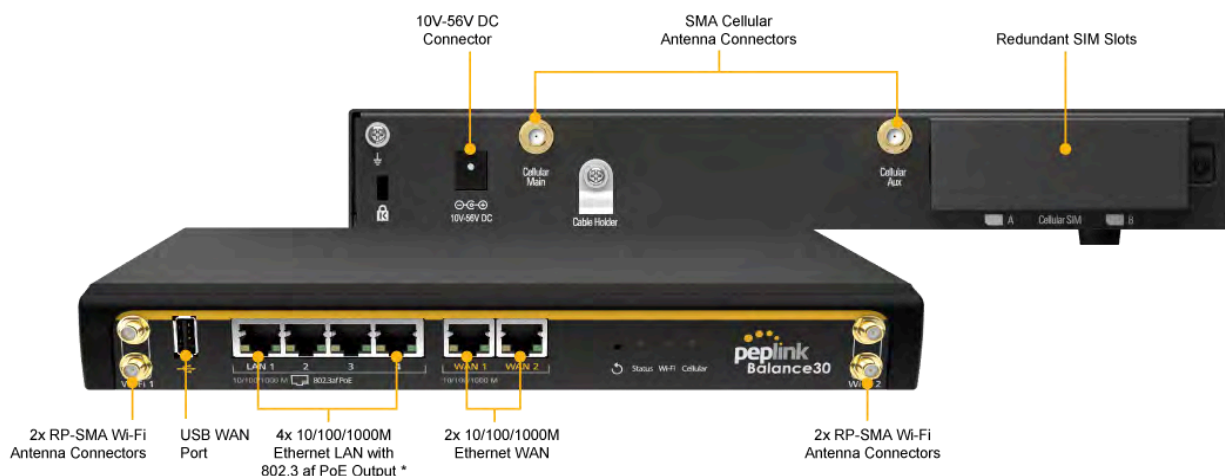

\* PoE Activation Kit is available separately, needs at least 48V of input for PoE output

### 6.6.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Power                       | OFF – Power off              |
|                             | Green – Power on             |
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |

|               |
|---------------|
| Green – Ready |
|---------------|

| WAN Ports         |                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------|
| <b>Green LED</b>  | ON – 1000 Mbps<br>OFF -10 / 100 Mbps or port is not connected                                  |
| <b>Orange LED</b> | Blinking – Data is transferring<br>OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                                                           |

| LAN Ports         |                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Green LED</b>  | ON – POE Enabled<br>OFF - POE Disabled                                                                       |
| <b>Orange LED</b> | Blinking – 10 / 100 / 1000 Mbps with activity<br>OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                                                                         |


| Wi-Fi AP Indicators |     |          |
|---------------------|-----|----------|
| <b>Wi-Fi AP</b>     | OFF | Disabled |
|                     | ON  | Enabled  |

| Cellular WAN Indicators |                 |                                |
|-------------------------|-----------------|--------------------------------|
| <b>Cellular</b>         | OFF             | Disabled                       |
|                         | Blinking slowly | Connecting to wireless network |
|                         | ON              | Connected to wireless network  |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.7 Peplink Balance 50

### 6.7.1 Front Panel Appearance

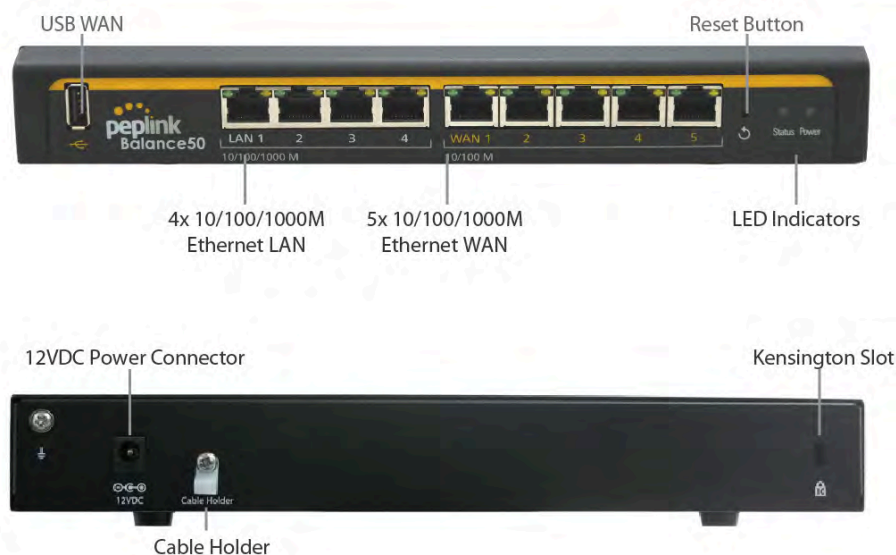

## 6.7.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Power                       | OFF – Power off              |
|                             | Green – Power on             |
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| Green LED         | ON – 10 / 100 /1000 Mbps                                    |
| Orange LED        | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| Port Type         | Auto MDI/MDI-X ports                                        |

| USB Port  |                                  |
|-----------|----------------------------------|
| USB Ports | For connecting a 4G/3G USB modem |

## 6.8 Peplink Balance 210

### 6.8.1 Front Panel Appearance

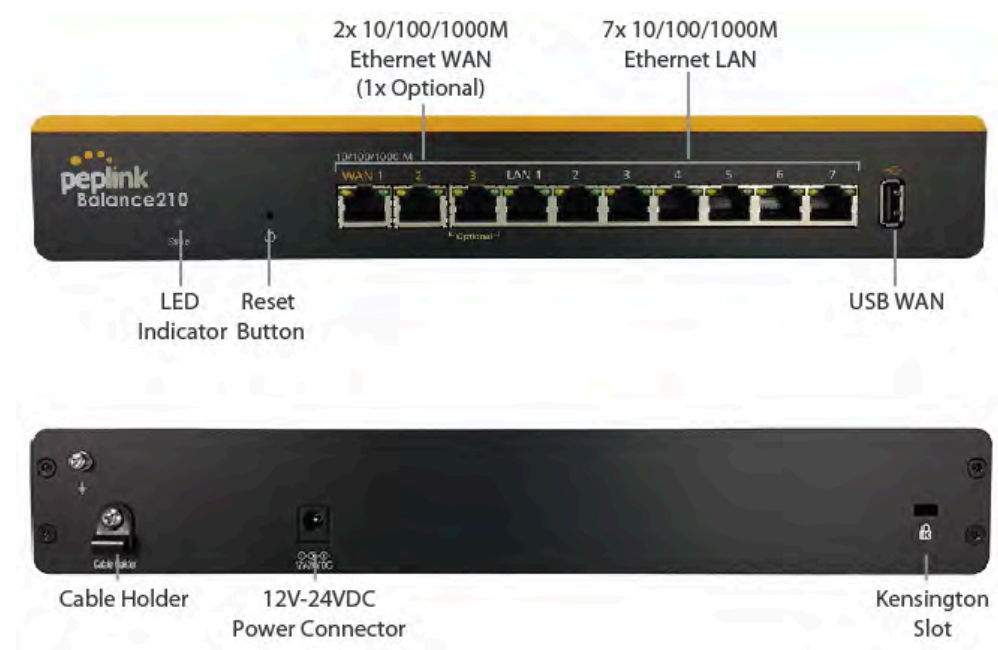

### 6.8.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                                             |
|-------------------|-------------------------------------------------------------|
| Green LED         | ON – 10 / 100 / 1000 Mbps                                   |
| Orange LED        | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| Port Type         | Auto MDI/MDI-X ports                                        |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.9 Peplink Balance 305

### 6.9.1 Front Panel Appearance

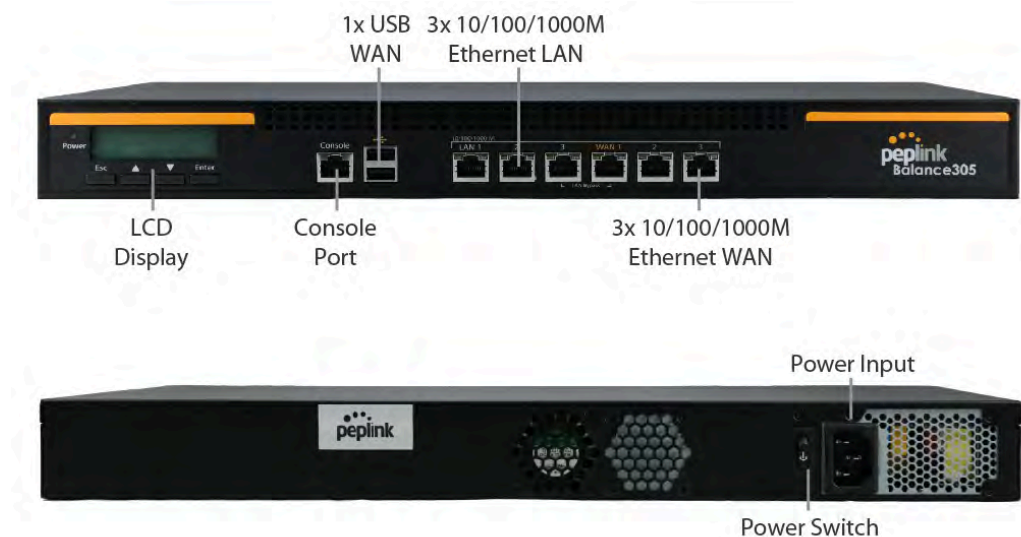

### 6.9.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                  |
|-----------------------------|------------------|
| <b>Power LED</b>            | OFF – Power off  |
|                             | GREEN – Power on |

| LAN Port, WAN 1 – 3 Ports |                                           |
|---------------------------|-------------------------------------------|
| <b>Right LED</b>          | ORANGE – 1000 Mbps                        |
|                           | GREEN – 100 Mbps                          |
|                           | OFF – 10 Mbps                             |
| <b>Left LED</b>           | Solid – Port is connected without traffic |
|                           | Blinking – Data is transferring           |
|                           | OFF – Port is not connected               |
| <b>Port Type</b>          | Auto MDI/MDI-X ports                      |

| Console and USB Ports |                                  |
|-----------------------|----------------------------------|
| <b>Console Port</b>   | Reserved for engineering use     |
| <b>USB Ports</b>      | For connecting a 4G/3G USB modem |

## 6.10 Peplink Balance 310

### 6.10.1 Front Panel Appearance

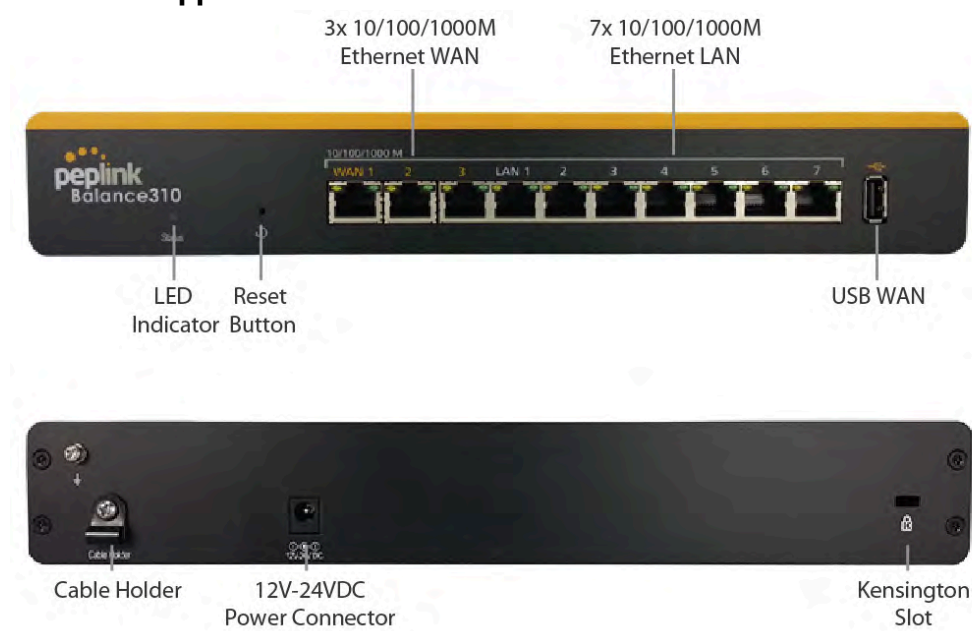

### 6.10.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| LAN and WAN Ports |                                 |
|-------------------|---------------------------------|
| <b>Green LED</b>  | ON – 10 / 100 / 1000 Mbps       |
| <b>Orange LED</b> | Blinking – Data is transferring |

|                  |                                                             |
|------------------|-------------------------------------------------------------|
|                  | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b> | Auto MDI/MDI-X ports                                        |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.11 Peplink Balance 310X

### 6.11.1 Front Panel Appearance



### 6.11.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Power</b>                | OFF – Power off              |
|                             | Green – Power on             |
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| WAN Ports         |                                                             |
|-------------------|-------------------------------------------------------------|
| <b>Green LED</b>  | ON - 1000 Mbps                                              |
|                   | OFF – 10 / 100 Mbps or port is not connected                |
| <b>Orange LED</b> | Blinking – Data is transferring                             |
|                   | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                        |

| LAN Ports         |                                                             |
|-------------------|-------------------------------------------------------------|
| <b>Green LED</b>  | ON – 1000 Mbps                                              |
|                   | OFF – 10 / 100 Mbps or port is not connected                |
| <b>Orange LED</b> | Blinking – 10 / 100 / 1000 Mbps with activity               |
|                   | OFF – No data is being transferred or port is not connected |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                                        |

| Cellular WAN Indicators |                 |                                |
|-------------------------|-----------------|--------------------------------|
| <b>Cellular</b>         | OFF             | Disabled                       |
|                         | Blinking slowly | Connecting to wireless network |
|                         | ON              | Connected to wireless network  |

| Wi-Fi AP Indicators |     |          |
|---------------------|-----|----------|
| <b>Wi-Fi AP</b>     | OFF | Disabled |
|                     | ON  | Enabled  |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.12 Peplink Balance 310 5G

### 6.12.1 Front Panel Appearance



## 6.12.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| <b>Power</b>                | OFF – Power off              |
|                             | Green – Power on             |
| <b>Status</b>               | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| WAN Port         |                                        |
|------------------|----------------------------------------|
| <b>Right LED</b> | GREEN - 1000 Mbps                      |
|                  | ORANGE - 100 Mbps                      |
|                  | OFF – 10 Mbps or port is not connected |
| <b>Left LED</b>  | Blinking – Data is transferring        |
|                  | OFF – Port is not connected            |
| <b>Port Type</b> | Auto MDI/MDI-X ports                   |


| LAN Ports        |                                        |
|------------------|----------------------------------------|
| <b>Right LED</b> | GREEN – 1000 Mbps                      |
|                  | ORANGE - 100 Mbps                      |
|                  | OFF – 10 Mbps or port is not connected |
| <b>Left LED</b>  | Blinking – Data is transferring        |
|                  | OFF – Port is not connected            |
| <b>Port Type</b> | Auto MDI/MDI-X ports                   |

| Cellular WAN Indicators |                 |                                |
|-------------------------|-----------------|--------------------------------|
| Cellular                | OFF             | Disabled                       |
|                         | Blinking slowly | Connecting to wireless network |
|                         | ON              | Connected to wireless network  |

| USB Port  |                                  |
|-----------|----------------------------------|
| USB Ports | For connecting a 4G/3G USB modem |

## 6.13 Peplink Balance 310 Fiber 5G

### 6.13.1 Front Panel Appearance

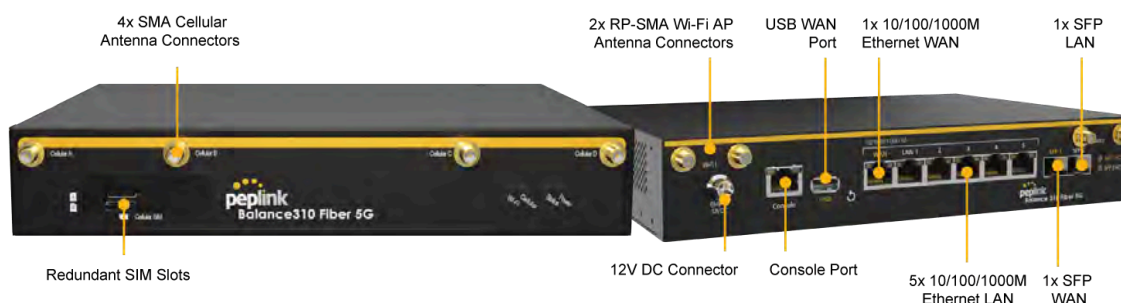

### 6.13.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Power                       | OFF – Power off              |
|                             | Green – Power on             |
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |

|               |
|---------------|
| Green – Ready |
|---------------|

| WAN Port         |                                                                                  |
|------------------|----------------------------------------------------------------------------------|
| <b>Right LED</b> | Green - 1000 Mbps<br>Orange - 100 Mbps<br>OFF – 10 Mbps or port is not connected |
| <b>Left LED</b>  | Blinking – Data is transferring<br>OFF – Port is not connected                   |
| <b>Port Type</b> | Auto MDI/MDI-X ports                                                             |

| LAN Ports        |                                                                                  |
|------------------|----------------------------------------------------------------------------------|
| <b>Right LED</b> | Green – 1000 Mbps<br>Orange - 100 Mbps<br>OFF – 10 Mbps or port is not connected |
| <b>Left LED</b>  | Blinking – Data is transferring<br>OFF – Port is not connected                   |
| <b>Port Type</b> | Auto MDI/MDI-X ports                                                             |


| Cellular WAN Indicators |                 |                                |
|-------------------------|-----------------|--------------------------------|
| <b>Cellular</b>         | OFF             | Disabled                       |
|                         | Blinking slowly | Connecting to wireless network |
|                         | ON              | Connected to wireless network  |

| Wi-Fi AP Indicators |     |          |
|---------------------|-----|----------|
| <b>Wi-Fi AP</b>     | OFF | Disabled |
|                     | ON  | Enabled  |

| USB Port         |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |

## 6.14 Peplink Balance 380

### 6.14.1 Panel Appearance

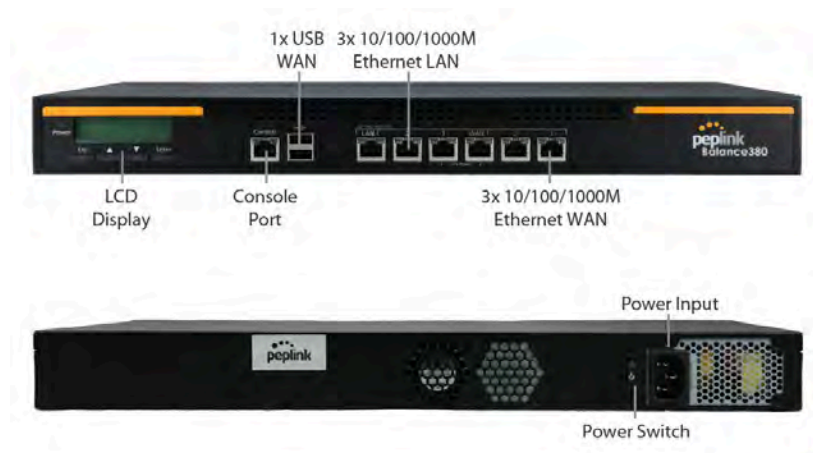

## 6.14.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                  |
|-----------------------------|------------------|
| <b>Power LED</b>            | OFF – Power off  |
|                             | Green – Power on |

| LAN Port, WAN 1 – 3 Ports |                                           |
|---------------------------|-------------------------------------------|
| <b>Right LED</b>          | Orange – 1000 Mbps                        |
|                           | Green – 100 Mbps                          |
|                           | OFF – 10 Mbps                             |
| <b>Left LED</b>           | Solid – Port is connected without traffic |
|                           | Blinking – Data is transferring           |
|                           | OFF – Port is not connected               |
| <b>Port Type</b>          | Auto MDI/MDI-X ports                      |

| Console and USB Ports |                                  |
|-----------------------|----------------------------------|
| <b>Console Port</b>   | Reserved for engineering use     |
| <b>USB Ports</b>      | For connecting a 4G/3G USB modem |

## 6.15 Peplink Balance 380X

### 6.15.1 Panel Appearance

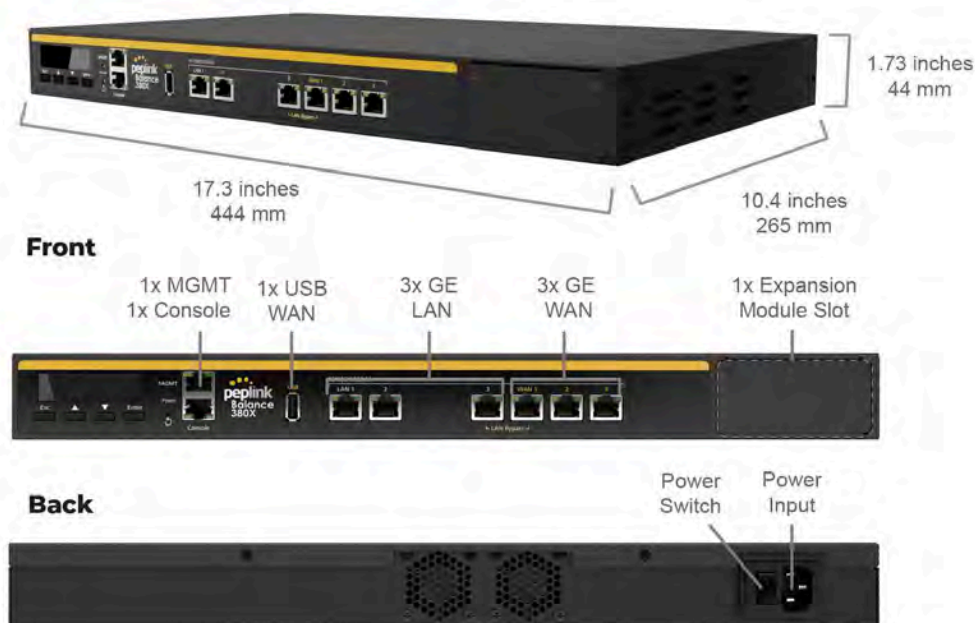

### 6.15.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                                           |
|-----------------------------|-------------------------------------------|
| <b>Power LED</b>            | OFF – Power off                           |
|                             | Green – Power on                          |
| LAN Port, WAN 1 – 3 Ports   |                                           |
| <b>Right LED</b>            | Green – 1000 Mbps                         |
|                             | OFF – 10 / 100 Mbps                       |
| <b>Left LED</b>             | Solid – Port is connected without traffic |
|                             | Blinking – Data is transferring           |
|                             | OFF – Port is not connected               |
| <b>Port Type</b>            | Auto MDI/MDI-X ports                      |
| Console and USB Ports       |                                           |
| <b>Console Port</b>         | Reserved for engineering use              |

**USB Ports** For connecting a 4G/3G USB modem

### 6.15.3 Flex Module Mini



| 1x LTE-A Module                   |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <b>Interface</b>                  | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b>         | 2x SMA Cellular Antenna Connectors                         |
| <b>Downlink / Uplink Datarate</b> | 300Mbps/50Mbps (CAT-6)<br>600Mbps/150Mbps (CAT-12)         |
| <b>Power Consumption</b>          | 10W                                                        |
| <b>Weight</b>                     | 0.83 pounds   375 grams                                    |

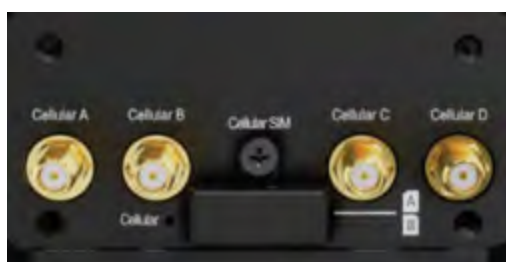


| 1xLTE-A Module                    |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <b>Interface</b>                  | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b>         | 4x SMA Cellular Antenna Connectors                         |
| <b>Downlink / Uplink Datarate</b> | 1.2 Gbps/150 Mbps (CAT-18)                                 |
| <b>Power Consumption</b>          | 10W                                                        |

|               |                         |
|---------------|-------------------------|
| <b>Weight</b> | 0.83 pounds   375 grams |
|---------------|-------------------------|

## 6.16 Peplink Balance 580

### 6.16.1 Panel Appearance

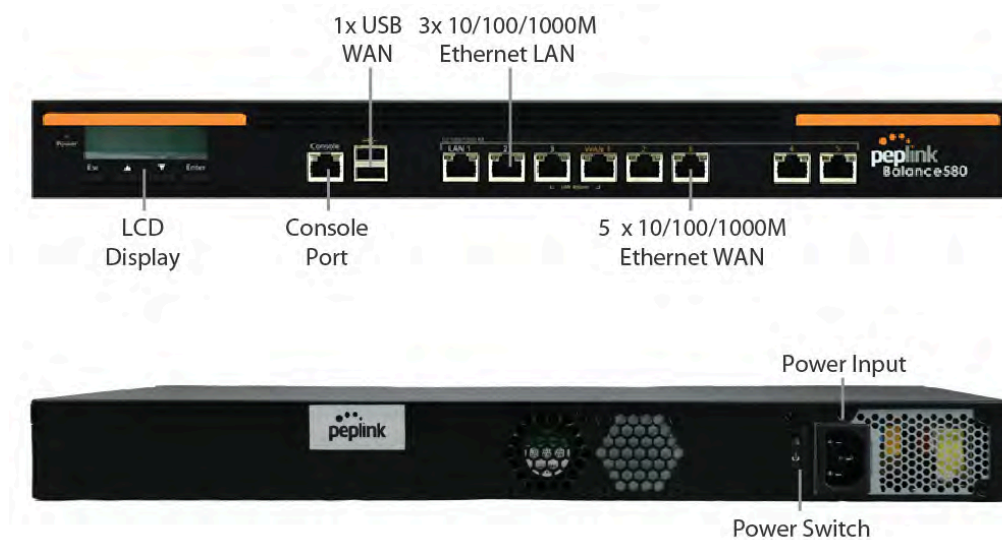

### 6.16.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Power and Status Indicators |                  |
|-----------------------------|------------------|
| <b>Power LED</b>            | OFF – Power off  |
|                             | Green – Power on |

| LAN Port, WAN 1 – 5 Ports |                                           |
|---------------------------|-------------------------------------------|
| <b>Right LED</b>          | Orange – 1000 Mbps                        |
|                           | Green – 100 Mbps                          |
|                           | OFF – 10 Mbps                             |
| <b>Left LED</b>           | Solid – Port is connected without traffic |
|                           | Blinking – Data is transferring           |
|                           | OFF – Port is not connected               |
| <b>Port Type</b>          | Auto MDI/MDI-X ports                      |


## Console and USB Ports

**Console Port** Reserved for engineering use

**USB Ports** For connecting a 4G/3G USB modem

## 6.17 Peplink Balance 580X

### 6.17.1 Panel Appearance

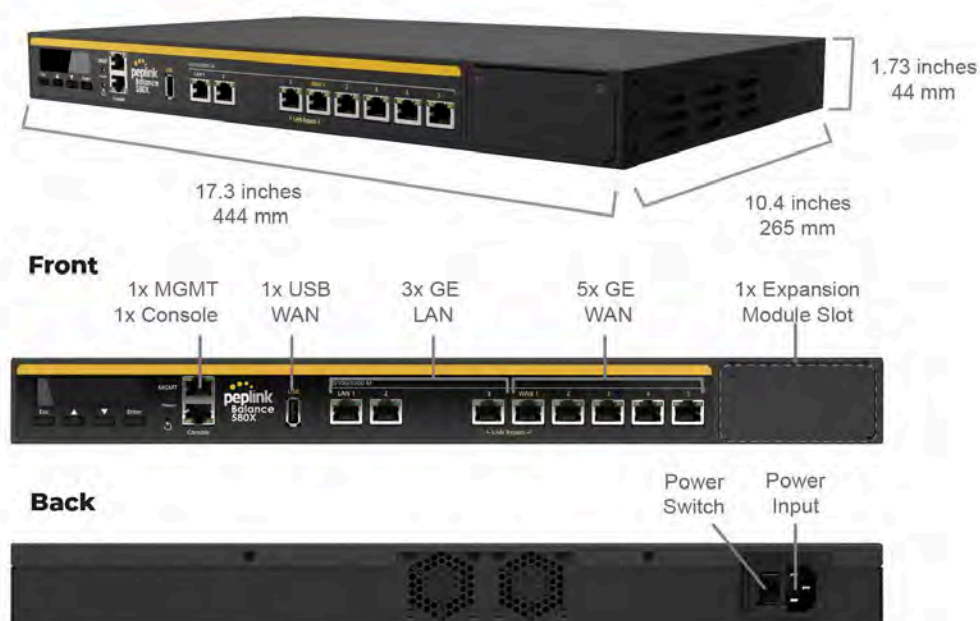

### 6.17.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:

#### Power and Status Indicators

**Power LED**

- OFF – Power off
- Green – Power on

#### LAN Port, WAN 1 – 5 Ports

**Right LED**

- Green – 1000 Mbps
- OFF – 10 / 100 Mbps


|                  |                                           |
|------------------|-------------------------------------------|
| <b>Left LED</b>  | Solid – Port is connected without traffic |
|                  | Blinking – Data is transferring           |
|                  | OFF – Port is not connected               |
| <b>Port Type</b> | Auto MDI/MDI-X ports                      |

| Console and USB Ports |                                  |
|-----------------------|----------------------------------|
| <b>Console Port</b>   | Reserved for engineering use     |
| <b>USB Ports</b>      | For connecting a 4G/3G USB modem |

### 6.17.3 Flex Module Mini




| 1x LTEA Module                    |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <b>Interface</b>                  | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b>         | 2x SMA Cellular Antenna Connectors                         |
| <b>Downlink / Uplink Datarate</b> | 300Mbps/50Mbps (CAT-6)<br>600Mbps/150Mbps (CAT-12)         |
| <b>Power Consumption</b>          | 10W                                                        |
| <b>Weight</b>                     | 0.83 pounds   375 grams                                    |

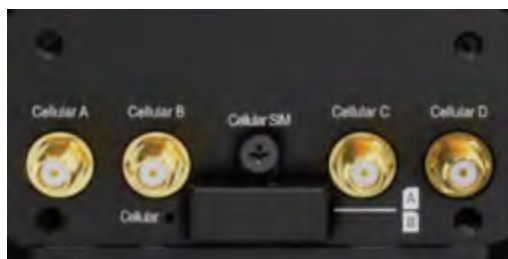

| 1xLTEA Module                     |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <b>Interface</b>                  | 1x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b>         | 4x SMA Cellular Antenna Connectors                         |
| <b>Downlink / Uplink Datarate</b> | 1.2 Gbps/150 Mbps (CAT-18)                                 |
| <b>Power Consumption</b>          | 10W                                                        |
| <b>Weight</b>                     | 0.83 pounds   375 grams                                    |

## 6.18 Peplink Balance 710

### 6.18.1 Front Panel Appearance

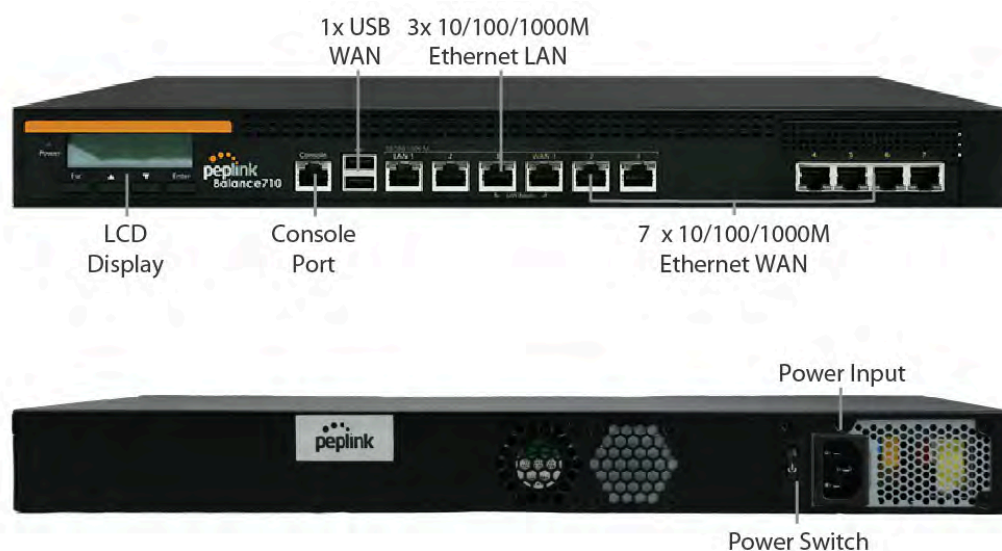

## 6.18.2 LED Indicators

Status indicated in the front panel is as follows:


| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN Port, WAN 1 – 7 Ports |                                           |
|---------------------------|-------------------------------------------|
| <b>Green LED</b>          | Orange – 1000 Mbps                        |
|                           | Green – 100 Mbps                          |
|                           | OFF – 10 Mbps                             |
| <b>Orange LED</b>         | Solid – Port is connected without traffic |
|                           | Blinking – Data is transferring           |
|                           | OFF – Port is not connected               |
| <b>Port Type</b>          | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                  |
|---------------------|----------------------------------|
| <b>Console Port</b> | Reserved for engineering use     |
| <b>USB Ports</b>    | For connecting a 4G/3G USB modem |

## 6.19 Peplink Balance 1350

### 6.19.1 Panel Appearance

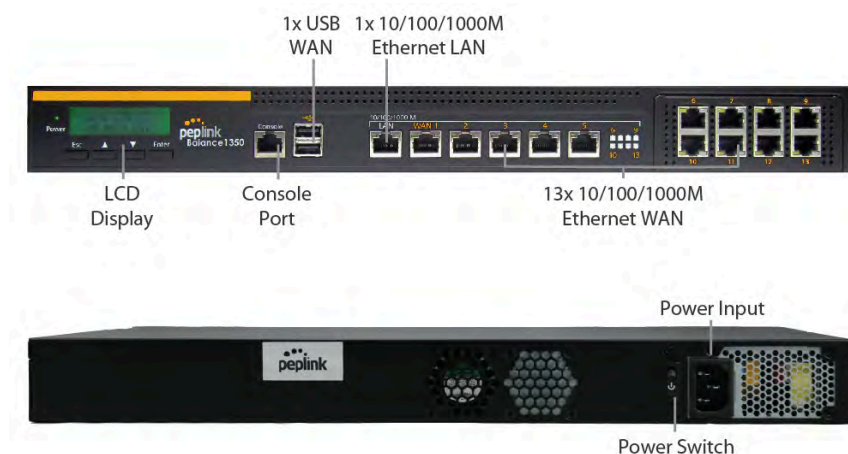

### 6.19.2 LED Indicators

Status indicated in the front panel is as follows:


| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN Port, WAN 1 – 13 Ports |                                           |
|----------------------------|-------------------------------------------|
| <b>Right LED</b>           | Orange – 1000 Mbps                        |
|                            | Green – 100 Mbps                          |
|                            | OFF – 10 Mbps                             |
| <b>Left LED</b>            | Solid – Port is connected without traffic |
|                            | Blinking – Data is transferring           |
|                            | OFF – Port is not connected               |
| <b>Port Type</b>           | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                  |
|---------------------|----------------------------------|
| <b>Console Port</b> | Reserved for engineering use     |
| <b>USB Ports</b>    | For connecting a 4G/3G USB modem |

## 6.20 Peplink Balance 1350 EC

### 6.20.1 Panel Appearance

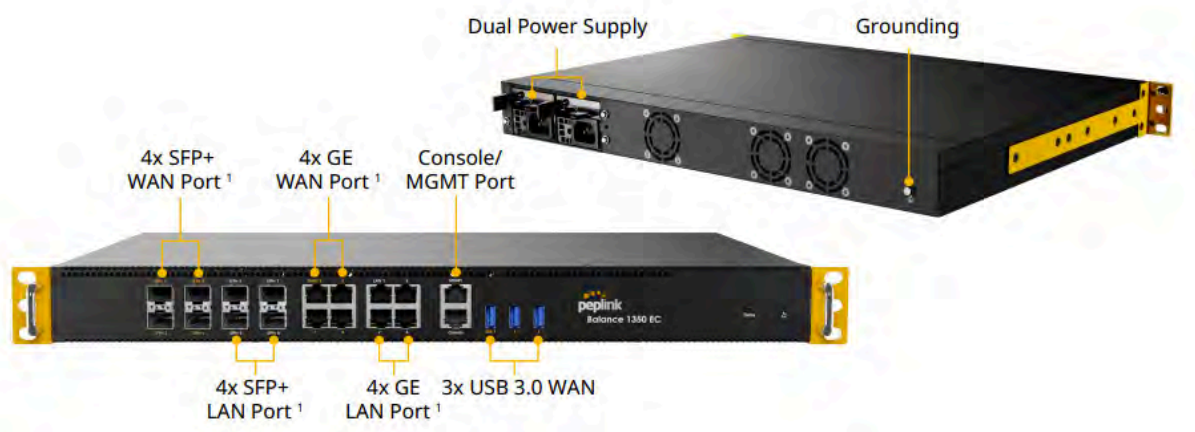

### 6.20.2 LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Power and Status Indicators |                              |
|-----------------------------|------------------------------|
| Status                      | OFF – Upgrading firmware     |
|                             | Red – Booting up or busy     |
|                             | Blinking red – Boot up error |
|                             | Green – Ready                |

| WAN and LAN Ports (10GBASE-T) |                                           |
|-------------------------------|-------------------------------------------|
| Right                         | OFF - 10Mbps                              |
|                               | Orange - 100Mbps                          |
|                               | Green - 1000Mbps                          |
| Left                          | Blinking - Data is transferring           |
|                               | Solid - Port is connected without traffic |
|                               | OFF - Port is not connected               |

| Console and USB Ports |                                  |
|-----------------------|----------------------------------|
| Console Port          | Reserved for engineering use     |
| USB Ports             | For connecting a 4G/3G USB modem |

## 6.21 Peplink Balance 2500

### 6.21.1 Panel Appearance

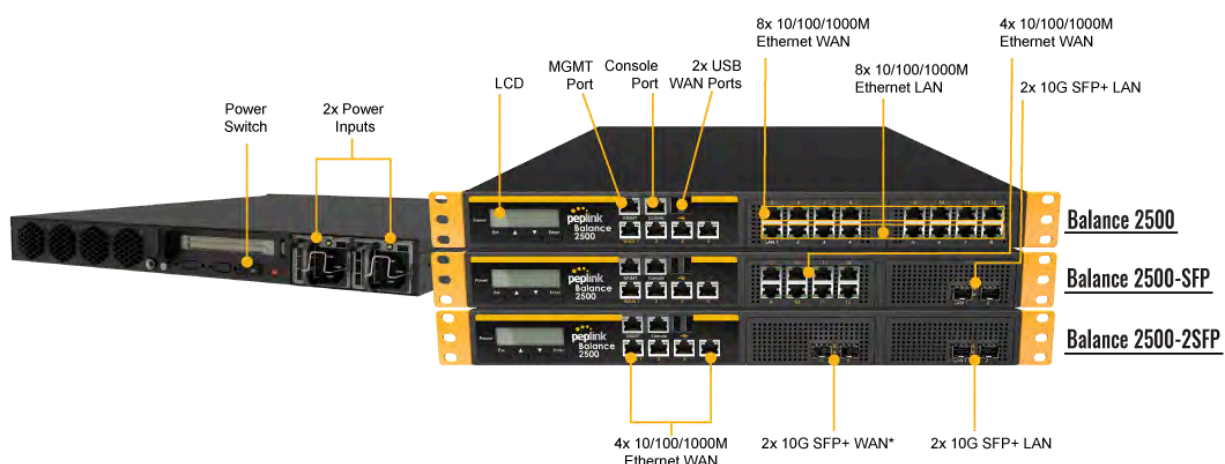

\*Balance 2500 is available in two configurations with different LAN interfaces.

### 6.21.2 LED Indicators

Status indicated in the front panel is as follows:


| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN and WAN Ports |                                           |
|-------------------|-------------------------------------------|
| <b>Right LED</b>  | Orange – 1000 Mbps                        |
|                   | Green – 100 Mbps                          |
|                   | OFF – 10 Mbps                             |
| <b>Left LED</b>   | Solid – Port is connected without traffic |
|                   | Blinking – Data is transferring           |
|                   | OFF – Port is not connected               |
| <b>Port Type</b>  | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                  |
|---------------------|----------------------------------|
| <b>Console Port</b> | Reserved for engineering use     |
| <b>USB Ports</b>    | For connecting a 4G/3G USB modem |

## 6.22 Peplink Balance 2500 EC

### 6.22.1 Panel Appearance

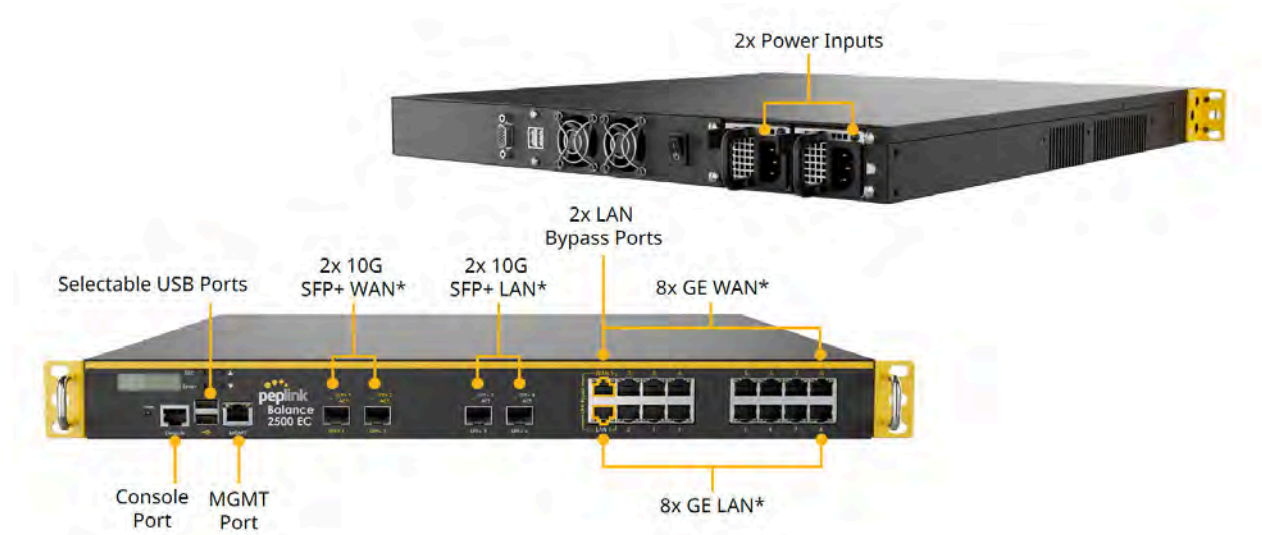

### 6.22.2 LED Indicators

Status indicated in the front panel is as follows:

| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN and WAN Ports |                                           |
|-------------------|-------------------------------------------|
| <b>Right LED</b>  | Orange – 1000 Mbps                        |
|                   | Green – 100 Mbps                          |
|                   | OFF – 10 Mbps                             |
| <b>Left LED</b>   | Solid – Port is connected without traffic |
|                   | Blinking – Data is transferring           |
|                   | OFF – Port is not connected               |


|                  |                      |
|------------------|----------------------|
| <b>Port Type</b> | Auto MDI/MDI-X ports |
|------------------|----------------------|

## Console & USB Ports


|                  |                                  |
|------------------|----------------------------------|
| <b>USB Ports</b> | For connecting a 4G/3G USB modem |
|------------------|----------------------------------|

## 6.23 Peplink Balance 5000 EC

### 6.23.1 Panel Appearance

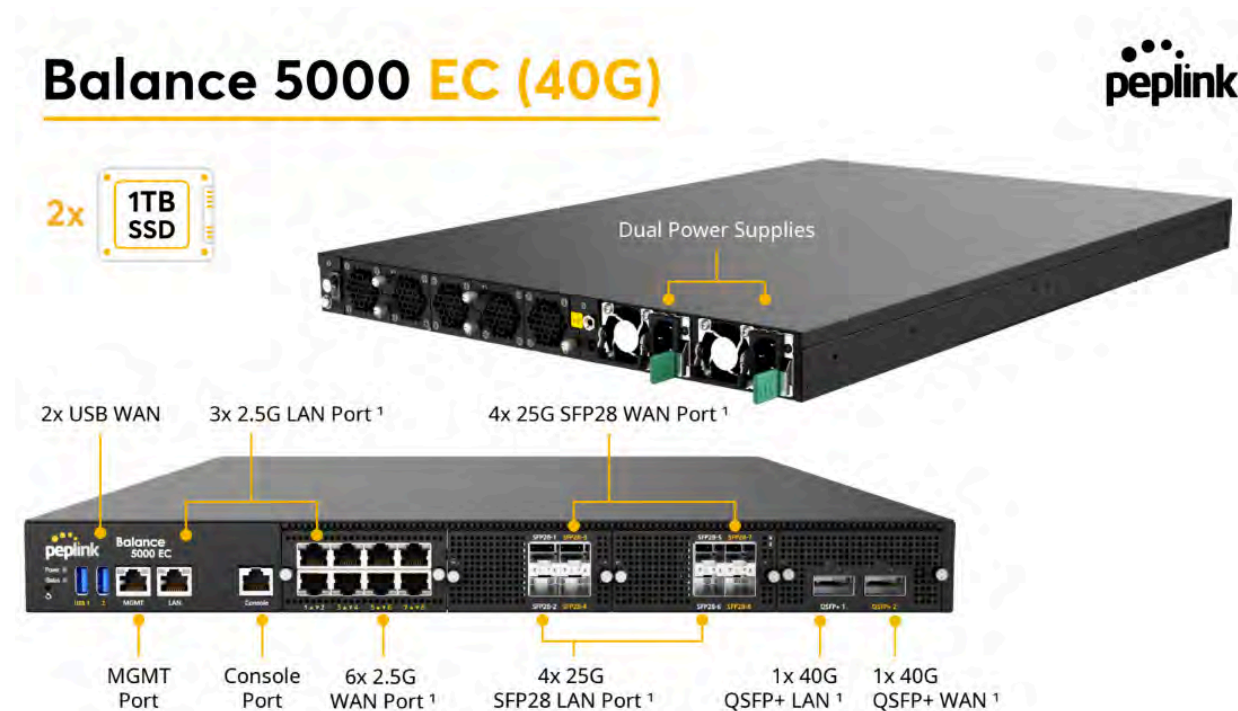

## Balance 5000 EC (100G)

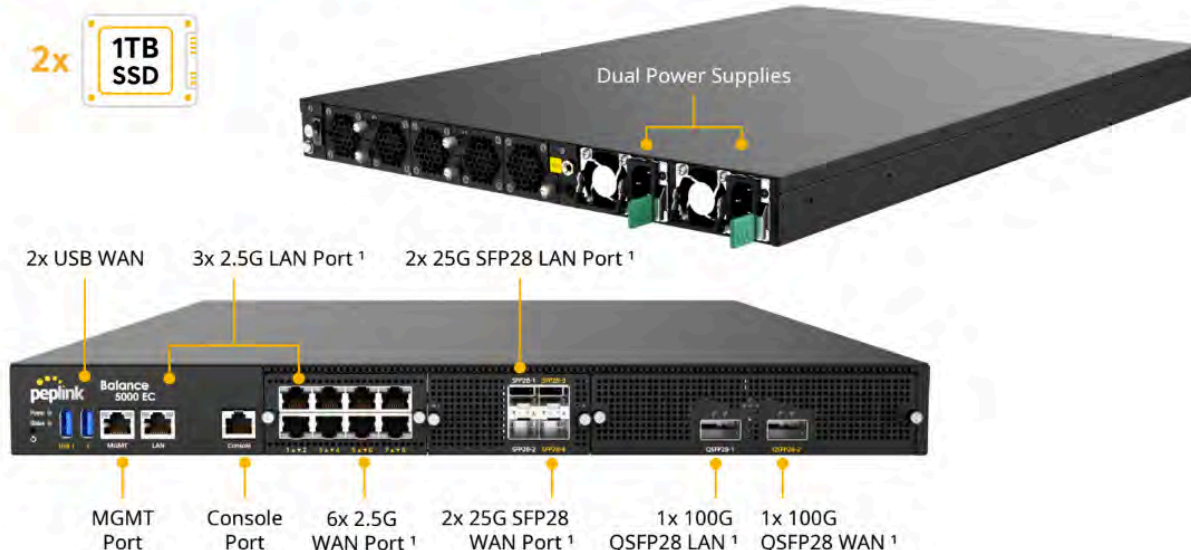

### 6.23.2 LED Indicators

Status indicated in the front panel is as follows:

| LED Indicator              |                                           |
|----------------------------|-------------------------------------------|
| <b>Power LED</b>           | OFF – Power off                           |
|                            | Green – Power on                          |
| Ethernet LAN and WAN Ports |                                           |
| <b>Right LED</b>           | Orange – 1000 Mbps                        |
|                            | Green – 2500 Mbps                         |
|                            | OFF – 100/10 Mbps                         |
| <b>Left LED</b>            | Solid – Port is connected without traffic |
|                            | Blinking – Data is transferring           |
|                            | OFF – Port is not connected               |
| <b>Port Type</b>           | Auto MDI/MDI-X ports                      |

| SFP28/QSFP+/QSFP28 Ports |                                           |
|--------------------------|-------------------------------------------|
| Right LED                | Solid – Link Up                           |
|                          | OFF – Link Down                           |
| Left LED                 | Solid – Port is connected without traffic |
|                          | Blinking – Data is transferring           |
|                          | OFF – Port is not connected               |


  

| Console & USB Ports |                            |
|---------------------|----------------------------|
| USB Ports           | For connecting a USB modem |

## 7 Peplink MediaFast Overview

### 7.1 Peplink MediaFast 200

#### 7.1.1 Panel Appearance

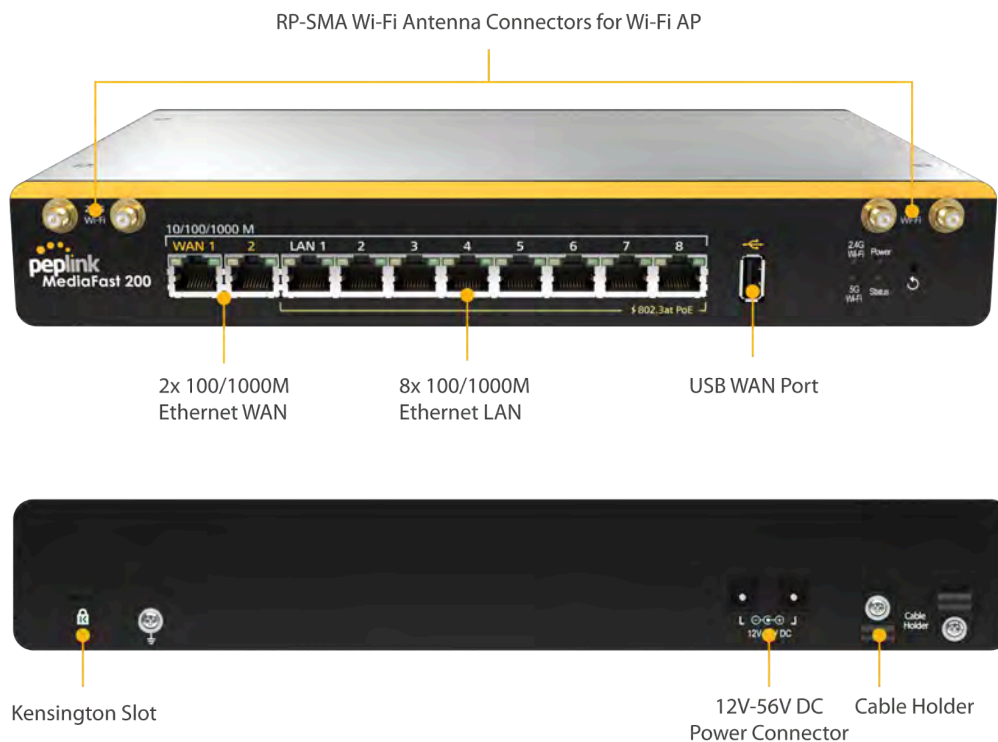

## 7.1.2 LED Indicators

Status indicated in the front panel is as follows:


| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN 1-3 Ports, WAN 1-5 Ports |                                           |
|------------------------------|-------------------------------------------|
| <b>Right LED</b>             | Orange – 1000 Mbps                        |
|                              | Green – 100 Mbps                          |
|                              | OFF – 10 Mbps                             |
| <b>Left LED</b>              | Solid – Port is connected without traffic |
|                              | Blinking – Data is transferring           |
|                              | OFF – Port is not connected               |
| <b>Port Type</b>             | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                 |
|---------------------|---------------------------------|
| <b>Console Port</b> | Reserved for engineering use    |
| <b>USB Ports</b>    | For connecting 4G/3G USB modems |

## 7.2 Peplink MediaFast 500

### 7.2.1 Panel Appearance

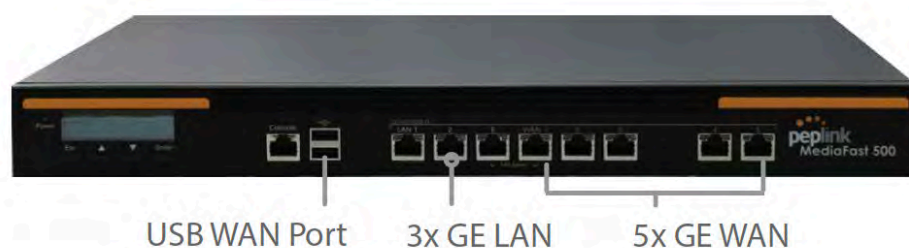



## 7.2.2 LED Indicators

Status indicated in the front panel is as follows:

| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN 1-3 Ports, WAN 1-5 Ports |                                           |
|------------------------------|-------------------------------------------|
| <b>Right LED</b>             | Orange – 1000 Mbps                        |
|                              | Green – 100 Mbps                          |
|                              | OFF – 10 Mbps                             |
| <b>Left LED</b>              | Solid – Port is connected without traffic |
|                              | Blinking – Data is transferring           |
|                              | OFF – Port is not connected               |
| <b>Port Type</b>             | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                 |
|---------------------|---------------------------------|
| <b>Console Port</b> | Reserved for engineering use    |
| <b>USB Ports</b>    | For connecting 4G/3G USB modems |

## 7.3 Peplink MediaFast 750

### 7.3.1 Panel Appearance





### 7.3.2 LED Indicators

Status indicated in the front panel is as follows:

| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| LAN 1-3 Ports, WAN 1-5 Ports |                                           |
|------------------------------|-------------------------------------------|
| <b>Right LED</b>             | Orange – 1000 Mbps                        |
|                              | Green – 100 Mbps                          |
|                              | OFF – 10 Mbps                             |
| <b>Left LED</b>              | Solid – Port is connected without traffic |
|                              | Blinking – Data is transferring           |
|                              | OFF – Port is not connected               |
| <b>Port Type</b>             | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                 |
|---------------------|---------------------------------|
| <b>Console Port</b> | Reserved for engineering use    |
| <b>USB Ports</b>    | For connecting 4G/3G USB modems |

## 8 Peplink Flex-Module Supported Models

### 8.1 Peplink EPX


The EPX is a rapidly deployable, powerful, and versatile SD-WAN router that connects a wide range of WAN options from LTE-A, satellite modems, to fixed line networks this can be used simultaneously to allow bonding using our SpeedFusion technology. With its modular construction, the EPX is suitable for any deployment.

#### 8.1.1 Main Chassis


| EPX Main Chassis                                   |                                                                                                                                                                                     |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Input</b>                                 | AC Input 100V - 240V                                                                                                                                                                |
| <b>Power Consumption (Main Chassis only)</b>       | 215W                                                                                                                                                                                |
| <b>Throughput</b>                                  | 30Gbps                                                                                                                                                                              |
| <b>PepVPN/SpeedFusion Throughput (256-bit AES)</b> | 2Gbps                                                                                                                                                                               |
| <b>Dimensions</b>                                  | 18.9 x 21.7 x 3.6 inches - 480 x 550 x 90 mm                                                                                                                                        |
| <b>Weight (No Modules)</b>                         | 31.3 pounds - 14.2 kilograms                                                                                                                                                        |
| <b>Operating Temperature</b>                       | 32° – 113°F (0° – 45°C)                                                                                                                                                             |
| <b>Humidity</b>                                    | 5% – 90% (non-condensing)                                                                                                                                                           |
| <b>Certifications</b>                              | FCC, IC, CE-RED<br>EN 50155: Railway Applications<br>EN 61373:1999 IEC 61373:1999 : Shock and Vibration Resistance<br>EN 50121: Rolling Stock EMC, Signalling and Telecom Apparatus |
| <b>Warranty</b>                                    | 1-Year Limited Warranty                                                                                                                                                             |

## 8.1.2 Panel Appearance

### Front

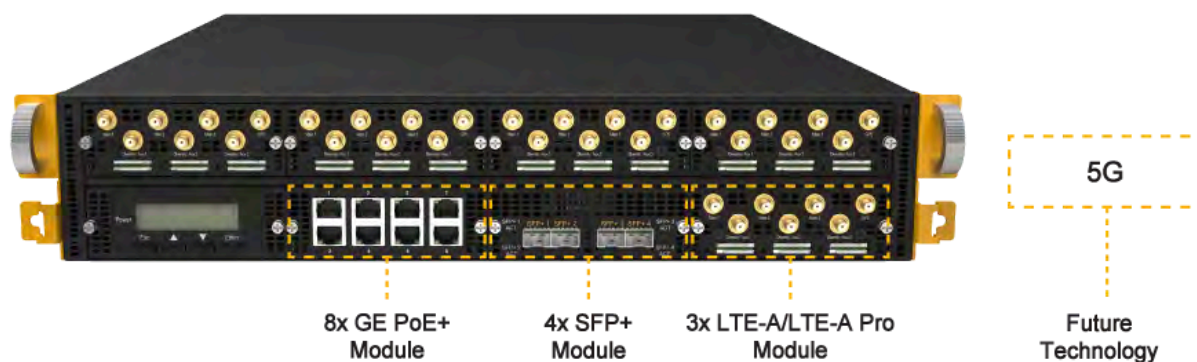

### Back

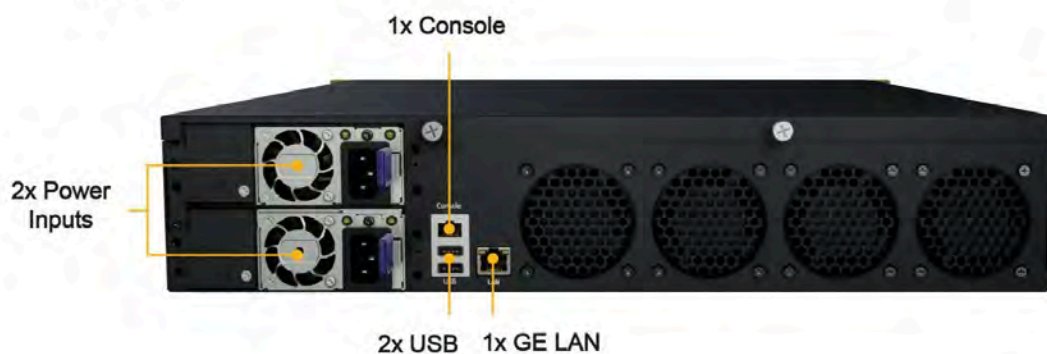

## 8.1.3 LED Indicators

Status indicated in the LAN/WAN port module is as follows:

Note: some EPX configurations are not shipped with this module

| LED Indicator |                  |
|---------------|------------------|
| Power LED     | OFF – Power off  |
|               | Green – Power on |

| LAN Port, WAN Ports |                                           |
|---------------------|-------------------------------------------|
| <b>Right LED</b>    | Orange – Enabled as WAN port              |
|                     | Green – PoE enabled                       |
|                     | OFF – PoE is disabled                     |
| <b>Left LED</b>     | Solid – Port is connected without traffic |
|                     | Blinking – Data is transferring           |
|                     | OFF – Port is not connected               |
| <b>Port Type</b>    | Auto MDI/MDI-X ports                      |

| Console & USB Ports |                                  |
|---------------------|----------------------------------|
| <b>Console Port</b> | CLI Console connection           |
| <b>USB Ports</b>    | For connecting a 4G/3G USB modem |

## 8.2 Peplink SDX

The SDX is a Modular Enterprise Grade Router. In addition to popular features such as SpeedFusion SD-WAN and InControl centralized management, the SDX has an expandable module that you can change according to your needs.

The SDX includes two integrated SFP+ WAN Ports, as well as eight PoE-enabled LAN Ports. These ports are available no matter which module you use.


### 8.2.1 Main Chassis

| SDX Main Chassis                     |                                                |
|--------------------------------------|------------------------------------------------|
| <b>Power Input</b>                   | AC Input 100V - 240V                           |
| <b>Power Consumption</b>             | 80W System* , 330W PoE+ Power Budget           |
| <b>Throughput</b>                    | 12 Gbps                                        |
| <b>PepVPN/SpeedFusion Throughput</b> | No Encryption: 1 Gbps<br>256-bit AES: 600 Mbps |
| <b>Dimensions</b>                    | 17.2 x 13.3 x 1.7 inches - 438 x 340 x 44 mm   |
| <b>Weight (No Modules)</b>           | 11.7 pounds - 5.3 kilograms                    |
| <b>Operating Temperature</b>         | 32° – 104°F (0° – 40°C)                        |
| <b>Humidity</b>                      | 5% – 90% (non-condensing)                      |
| <b>Certifications</b>                | FCC, IC, CE                                    |

\* 80W consumption for the main chassis, 20W consumption for the optional module.

## 8.2.2 Panel Appearance

Front:

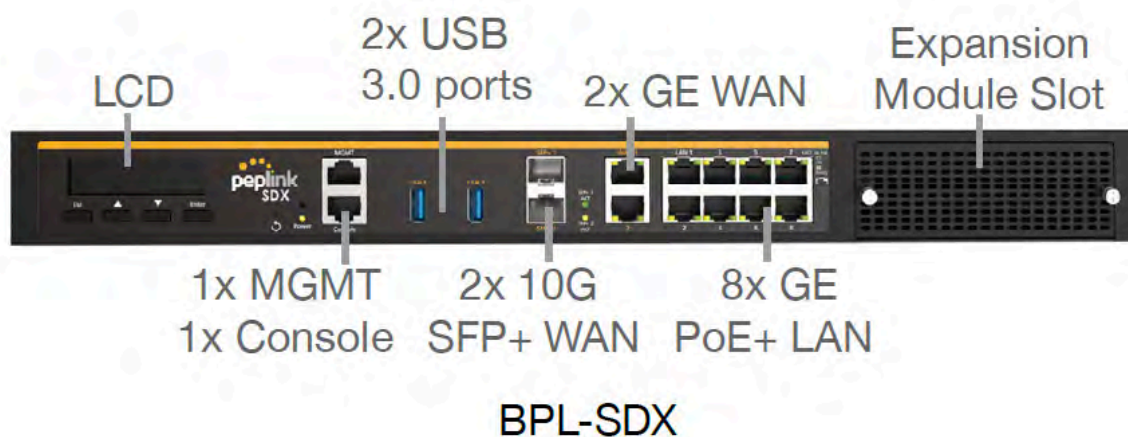

Back:



## 8.2.3 LED Indicators

| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| WAN Ports        |                                                       |
|------------------|-------------------------------------------------------|
| <b>Right LED</b> | Green – 1000 Mbps                                     |
|                  | OFF – 10 Mbps / 100 Mbps or the port is not connected |
| <b>Left LED</b>  | Solid – Port is connected without traffic             |
|                  | Blinking – Data is transferring                       |

|                  |                             |
|------------------|-----------------------------|
|                  | OFF – Port is not connected |
| <b>Port Type</b> | Auto MDI/MDI-X ports        |

| LAN Ports        |                                           |
|------------------|-------------------------------------------|
| <b>Right LED</b> | Green – PoE enabled                       |
|                  | OFF – PoE is disabled                     |
| <b>Left LED</b>  | Solid – Port is connected without traffic |
|                  | Blinking – Data is transferring           |
|                  | OFF – Port is not connected               |
| <b>Port Type</b> | Auto MDI/MDI-X ports                      |

| Console, MGMT & USB Ports |                                                                |
|---------------------------|----------------------------------------------------------------|
| <b>Console Port</b>       | CLI console connection                                         |
| <b>USB Ports</b>          | For connecting 4G/3G USB modems for additional WAN connections |
| <b>MGMT Port</b>          | Management port                                                |

## 8.3 Peplink SDX Pro

In addition to the power of the SDX, the SDX Pro offers greater flexibility and functionality. It has two FlexModule slots, enabling you to customize the device with different modules to suit any deployment. It supports edge computing so it can deliver websites, applications, and docker containers to connected devices.

### 8.3.1 Main Chassis

| SDX Pro Main Chassis                 |                                                |
|--------------------------------------|------------------------------------------------|
| <b>Power Input</b>                   | AC Input 100V - 240V                           |
| <b>Power Consumption</b>             | 140W System* , 420W PoE+ Power Budget          |
| <b>Throughput</b>                    | 24 Gbps                                        |
| <b>PepVPN/SpeedFusion Throughput</b> | No Encryption: 1 Gbps<br>256-bit AES: 600 Mbps |
| <b>Dimensions</b>                    | 17.2 x 13.8 x 1.7 inches - 438 x 350 x 44 mm   |
| <b>Weight (No Modules)</b>           | 15.9 pounds - 7.2 kilograms                    |
| <b>Operating Temperature</b>         | 32° – 104°F (0° – 40°C)                        |
| <b>Humidity</b>                      | 10% – 85% (non-condensing)                     |
| <b>Certifications</b>                | FCC, IC, CE                                    |

\* 140W consumption for the main chassis, 20W consumption for the optional module.

## 8.3.2 Panel Appearance



\* WAN ports are configured as a LAN ports by default, configuration is changeable on the Web Admin

## 8.3.3 LED Indicators


| LED Indicator    |                  |
|------------------|------------------|
| <b>Power LED</b> | OFF – Power off  |
|                  | Green – Power on |

| WAN Ports        |                                                   |
|------------------|---------------------------------------------------|
| <b>Right LED</b> | Green – 1000 Mbps                                 |
|                  | OFF – 10 Mbps / 100 Mbps or port is not connected |
| <b>Left LED</b>  | Solid – Port is connected without traffic         |
|                  | Blinking – Data is transferring                   |
|                  | OFF – Port is not connected                       |
| <b>Port Type</b> | Auto MDI/MDI-X ports                              |

| Console, MGMT & USB Ports |                                                                |
|---------------------------|----------------------------------------------------------------|
| <b>Console Port</b>       | CLI console connection                                         |
| <b>USB Ports</b>          | For connecting 4G/3G USB modems for additional WAN connections |
| <b>MGMT Port</b>          | Management port                                                |

## 8.4 Flex Module Expansion Modules

### 8.4.1 8x GE PoE+ Module (EXM-8C)

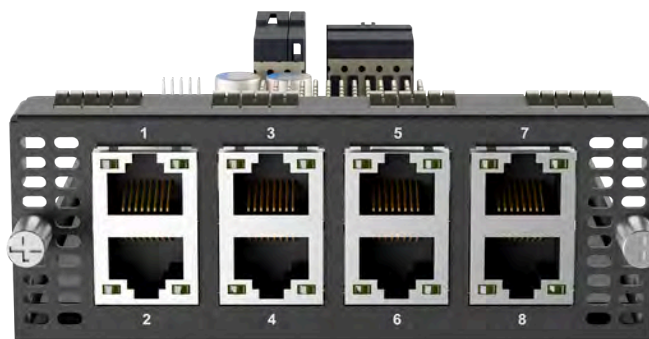

| 8x GE PoE Module         |                                                     |
|--------------------------|-----------------------------------------------------|
| <b>Interface</b>         | 8x 10/100/1000M Ethernet Ports *<br>Capable of PoE+ |
| <b>Power Consumption</b> | 15W (255W max. with 802.3at/af PoE+ Output)         |
| <b>Dimensions</b>        | 4.1 x 7.4 x 1.5 inches<br>103 x 188 x 38 mm         |
| <b>Weight</b>            | 1.1 pounds (475 grams)                              |

\* Module can be configured with LAN or WAN ports as needed.

#### LED Indicator:

| Ethernet Ports   |                                           |
|------------------|-------------------------------------------|
| <b>Right LED</b> | Orange – Enabled as WAN port              |
|                  | Green – PoE enabled                       |
|                  | OFF – PoE is disabled                     |
| <b>Left LED</b>  | Solid – Port is connected without traffic |
|                  | Blinking – Data is transferring           |
|                  | OFF – Port is not connected               |
| <b>Port Type</b> | Auto MDI/MDI-X ports                      |

## 8.4.2 4x SFP+ Module (EXM-4F)



| 4x SFP+ Module           |                         |
|--------------------------|-------------------------|
| <b>Interface</b>         | 4x SFP+ Ports *         |
| <b>Power Consumption</b> | 11W                     |
| <b>Dimensions</b>        | 4.1 x 7.4 x 1.5 inches  |
|                          | 103 x 188 x 38 mm       |
| <b>Weight</b>            | 0.83 pounds (375 grams) |

### 8.4.3 3x LTE-A Module (EXM-3LTEA)



| 3x LTE-A Module           |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Interface</b>          | 3x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b> | 6x SMA Cellular Antenna Connectors                         |
|                           | 1x SMA GPS Antenna Connector                               |
| <b>Power Consumption</b>  | 20W                                                        |
| <b>Dimensions</b>         | 4.1 x 7.4 x 1.5 inches                                     |
|                           | 103 x 188 x 38 mm                                          |
| <b>Weight</b>             | 0.83 pounds (375 grams)                                    |

#### 8.4.4 4x LTE-A Module (EXM-4LTEA)



| 3x LTE-A Module           |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Interface</b>          | 4x Embedded LTE-A Cellular Modems with Redundant SIM Slots |
| <b>Antenna Connectors</b> | 8x SMA Cellular Antenna Connectors                         |
|                           | 1x SMA GPS Antenna Connector                               |
| <b>Power Consumption</b>  | 20W                                                        |
| <b>Dimensions</b>         | 4.1 x 7.4 x 1.5 inches                                     |
|                           | 103 x 188 x 38 mm                                          |
| <b>Weight</b>             | 0.83 pounds (375 grams)                                    |

### 8.4.5 CAT-18. 2x LTE-A Module (EXM-2GLTE-G)



| 2x LTE-A Module           |                                                                     |
|---------------------------|---------------------------------------------------------------------|
| <b>Interface</b>          | 2x Embedded LTE-A Cellular Modems with Redundant 4FF Nano SIM Slots |
| <b>Antenna Connectors</b> | 8x SMA Cellular Antenna Connectors                                  |
|                           | 1x SMA GPS Antenna Connector                                        |
| <b>Power Consumption</b>  | 20W                                                                 |
| <b>Dimensions</b>         | 4.1 x 7.4 x 1.5 inches                                              |
|                           | 103 x 188 x 38 mm                                                   |
| <b>Weight</b>             | 0.83 pounds (375 grams)                                             |

#### 8.4.6 SIM Injector FlexModule (EXM-SIM-BK56)

\* Compatible with EPX, SDX Pro



| SIM Injector FlexModule  |                         |
|--------------------------|-------------------------|
| <b>SIM Slot Capacity</b> | 56 4FF Nano SIM Cards   |
| <b>Power Consumption</b> | 15W                     |
| <b>Dimensions</b>        | 4.1 x 7.4 x 1.5 inches  |
|                          | 103 x 188 x 38 mm       |
| <b>Weight</b>            | 1.30 pounds (600 grams) |

### 8.4.7 2x 5G Module (EXM-2X5GD)



| 2x 5G Module              |                                                               |
|---------------------------|---------------------------------------------------------------|
| <b>Interface</b>          | 2x Embedded Cellular Modems with Redundant 4FF Nano SIM Slots |
| <b>Antenna Connectors</b> | 8x SMA Cellular Antenna Connectors                            |
|                           | 1x SMA GPS Antenna Connector                                  |
| <b>Power Consumption</b>  | 20W                                                           |
| <b>Dimensions</b>         | 4.1 x 7.4 x 1.5 inches                                        |
|                           | 103 x 188 x 38 mm                                             |
| <b>Weight</b>             | 0.83 pounds (375 grams)                                       |

## 9 OLED Display Menu

- > HA State: Master/Slave
  - > LAN IP
  - > VIP
- > System Status
  - > System
    - > Firmware ver. (shows firmware version)
    - > Serial number (shows serial number)
    - > System time (shows current time)
    - > System uptime (shows system uptime since last reboot)
    - > CPU load (shows current CPU loading, 0-100%)
    - > LAN
      - > Status (shows LAN port physical status)
      - > IP address (shows LAN IP address)
      - > Subnet mask (shows LAN subnet mask)
  - > Link status
    - > WAN1
    - > WAN2
    - > WAN3\* (shows Connected/Disconnected, IP address list)
  - > VPN status (shows Connected/Disconnected)
    - > VPN Profile 1
    - > VPN Profile 2
    - > ...
    - > VPN Profile n
  - > Link usage
    - > Throughput in (shows transfer rate in Kbps)
      - > WAN1
      - > WAN2
      - > WAN3\*
    - > Throughput out (shows transfer rate in Kbps)
      - > WAN1
      - > WAN2
      - > WAN3\*
  - > Data Transferred (shows volume transferred since last reboot in MB)
    - > WAN1
    - > WAN2
    - > WAN3\*
- > Maintenance
  - > Reboot > Reboot? (Yes/No) (to reboot the unit)
  - > Factory default > Factory default? (Yes/No) (to restore factory defaults)
- > LAN config
  - > Port speed (shows port speed: Auto, 10baseT-FD, 10baseT-HD, 100baseTx-FD, 100baseTx-HD, 1000baseTx-FD)
    - > LAN
    - > WAN1
    - > WAN2
    - > WAN3\*



\*Layout continues as such for all available WAN ports

## 10 Installation

The following section details connecting the Peplink Balance to your network:

### 10.1 Preparation

Before installing your Peplink Balance, please prepare the following:

- At least one Internet/WAN access account
- For each network connection, one 10/100BaseT UTP cable with RJ45 connector, one 1000BaseT Cat5E UTP cable for the Gigabit port, or one USB modem for the USB WAN port
- A computer with the TCP/IP network protocol and a web browser installed— Supported browsers include Microsoft Internet Explorer 11 or above, Mozilla Firefox 24 or above, Apple Safari 7 or above, and Google Chrome 18 or above.

### 10.2 Constructing the Network

At the high level, construct the network according to the following steps:

1. With an Ethernet cable, connect a computer to one of the LAN ports on the Peplink Balance. For Peplink Balance models that support multiple connections, repeat with different cables connect up to 4 computers.
2. With another Ethernet cable, connect the WAN/broadband modem to one of the WAN ports on the Peplink Balance. Repeat using different cables to connect from two to 13 WAN/broadband connections or connect a USB modem to the USB WAN port.
3. Connect the provided power adapter or cord to the power connector on the Peplink Balance, and then plug the power adapter into a power outlet.

## 11 Basic Configuration

Please refer to this [link](#) for more information on how to connect to the Web Admin interface and how to configure using the Setup Wizard.

## 12 Network Tab

Please refer to this [link](#).

## 13 System Tab

Please refer to this [link](#).

## 14 Status Tab

Please refer to this [link](#).

## Appendix A. Restoration of Factory Defaults

To restore the factory default settings on a Peplink Balance unit, perform the following:

### For Balance models with a reset button:

1. Locate the reset button on the Peplink Balance unit.
2. With a paperclip, press and keep the reset button pressed.

Hold for approximately 10 seconds for factory reset (Note: The LED status light shows in RED, until the status light off and release the button)

After the Peplink Balance router finishes rebooting, the factory default settings will be restored.

### For Balance/MediaFast models with an OLED menu:

- Use the buttons on the front panel to control the OLED menu to go to **Maintenance>Factory Defaults**, and then choose **Yes** to confirm.

Afterwards, the factory default settings will be restored.

### Important Note

All previous configurations and bandwidth usage data will be lost after restoring factory default settings. Regular backup of configuration settings is strongly recommended.

## Appendix B. Routing under DHCP, Static IP, and PPPoE


The information in this appendix applies only to situations where the Peplink Balance operates a WAN connection under DHCP, Static IP, or PPPoE.

### B.1 Routing Via Network Address Translation (NAT)

When the Peplink Balance is operating under NAT mode, the source IP addresses of outgoing IP packets are translated to the WAN IP address of the Peplink Balance. With NAT, all LAN devices share the same WAN IP address to access the Internet (i.e., the WAN IP address of the Peplink Balance).

Operating the Peplink Balance in NAT mode requires only one WAN (Internet) IP address. In addition, operating in NAT mode also has security advantages because LAN devices are hidden behind the Peplink Balance. They are not directly accessible from the Internet and hence less vulnerable to attacks.


The following figure shows the packet flow in NAT mode:

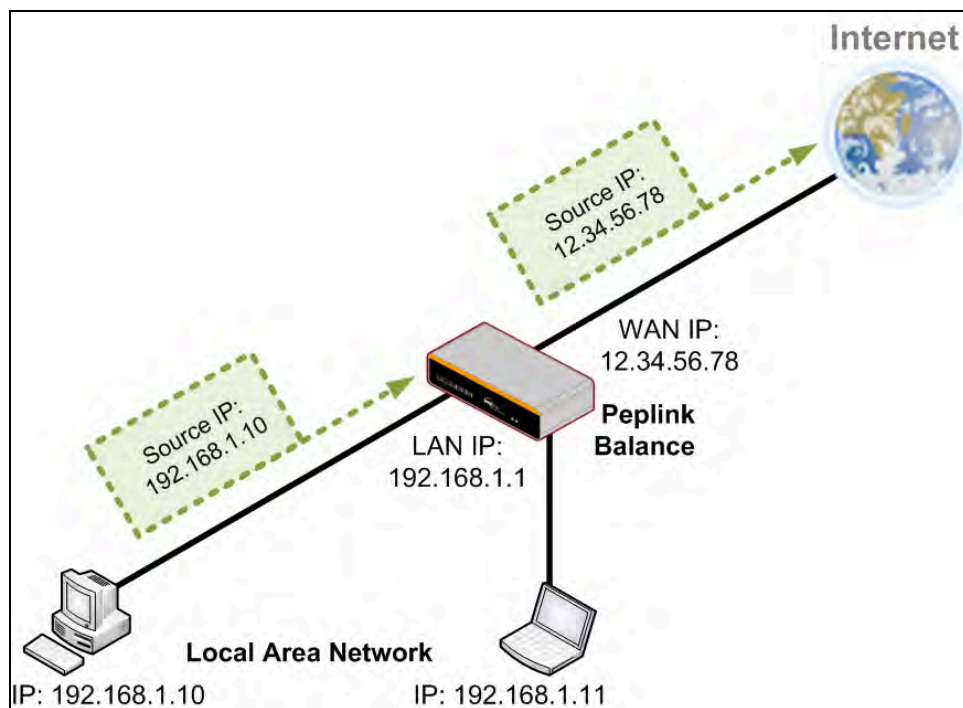

## B.2 Routing Via IP Forwarding

When the Peplink Balance is operating under IP forwarding mode, the IP addresses of IP packets are unchanged; the Peplink Balance forwards both inbound and outbound IP packets without changing their IP addresses.

The following figure shows the packet flow in IP forwarding mode:

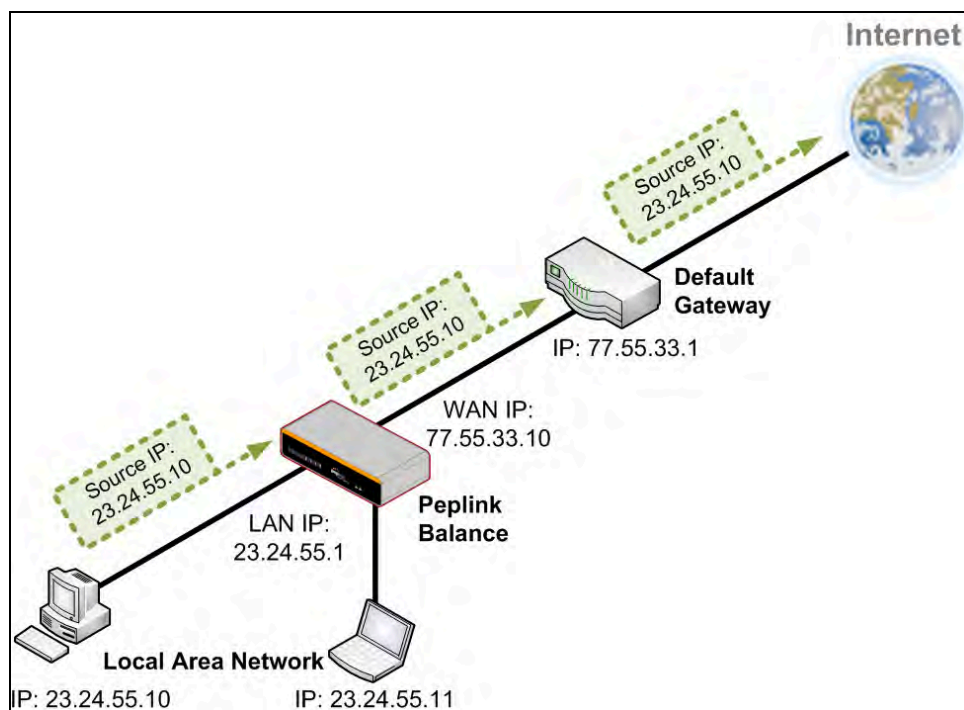

## Appendix C. FusionSIM Manual

Please refer to this [link](#) for details of the FusionSIM manual including various application scenarios.

## Appendix D. Case studies

Please follow this [link](#) for details on various case studies using Peplink routers.

## Appendix E. Overview of ports used by Peplink SD-WAN routers and other Peplink services

| Default Number                | Port | Usage                                         | Service                     | Inbound/Outbound       | Default Status |
|-------------------------------|------|-----------------------------------------------|-----------------------------|------------------------|----------------|
| UDP 5246                      |      | Data flow                                     | InControl                   | Outbound               | Enabled        |
| TCP 443                       |      | HTTPS service                                 | InControl                   | Outbound               | Enabled        |
| TCP 5246                      |      | Optional, used when TCP 443 is not responding | InControl                   | Outbound               | Enabled        |
| TCP 5246                      |      | Remote Web Admin                              | InControl Appliance Virtual | Outbound               | Enabled        |
| TCP 4500                      |      | VPN Data (TCP Mode)                           | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| TCP 32015                     |      | VPN handshake                                 | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| UDP 4500                      |      | VPN Data                                      | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| UDP 32015 <sup>o</sup>        |      | VPN Data (alternative)                        | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| TCP/UDP 4500+N-1 <sup>^</sup> |      | VPN Sub-Tunnels Data                          | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| UDP 32015+N-1 <sup>^</sup>    |      | VPN Sub-Tunnels Data (alternative)            | PepVPN SpeedFusion          | / Inbound<br>Outbound* | / Disabled     |
| UDP 4500                      |      | VPN Data                                      | IPsec                       | Inbound<br>Outbound*   | / Disabled     |

|               |                                           |                                          |                     |                    |
|---------------|-------------------------------------------|------------------------------------------|---------------------|--------------------|
| UDP 500       | VPN initiation                            | IPsec                                    | Inbound / Outbound* | Disabled           |
| UDP 500       | L2TP                                      | Remote User Access                       | Inbound             | Disabled           |
| UDP 1701      | L2TP                                      | Remote User Access                       | Inbound             | Disabled           |
| UDP 4500      | L2TP                                      | Remote User Access                       | Inbound             | Disabled           |
| UDP 1194      | OpenVPN                                   | Remote User Access                       | Inbound             | Disabled           |
| IP 47         | PPTP (GRE)                                | Remote User Access                       | Inbound             | Disabled           |
| TCP 2222      | Remote Assistance<br>Direct connection    | Peplink<br>Troubleshooting<br>Assistance | Outbound            | Enabled            |
| TCP 80        | HTTP traffic                              | Web Admin Interface<br>access            | Inbound             | Enabled            |
| TCP 443       | HTTPS traffic                             | Web Admin Interface<br>access (secure)   | Inbound             | Enabled            |
| TCP 8822      | SSH                                       | SSH                                      | Inbound             | Disabled           |
| UDP 161       | SNMP Get                                  | SNMP monitoring                          | Inbound             | Disabled           |
| UDP 162       | SNMP Trap                                 | SNMP monitoring                          | Outbound            | Disabled           |
| TCP, UDP 1812 | Radius Authentication                     | Radius                                   | Outbound            | Disabled           |
| TCP, UDP 1813 | Radius Accounting                         | Radius                                   | Outbound            | Disabled           |
| UDP 123       | Network Time Protocol                     | NTP                                      | Inbound / Outbound  | Disabled / Enabled |
| TCP 60660     | Real-time location data<br>in NMEA format | GPS                                      | Inbound             | Disabled           |

#### Disclaimer:

- By default, only TCP 32015 and UDP 4500 are needed for PepVPN / SpeedFusion.
- Inbound / Outbound\* - Inbound = For Server mode; Outbound = For Client mode
- UDP 32015° - If IPsec VPN or L2TP/IPsec RUA is enabled, the UDP 4500 is occupied, so PepVPN / SpeedFusion will automatically switch to UDP 32015 as VPN data port .
- UDP 32015+N-1^ / TCP/UDP 4500+N-1^ - When using Sub-Tunnels, multiple ports are in use (1 for each Sub-Tunnel profile).
- The default UDP data ports used when using (N number of Sub-Tunnel profiles) are: 4500...4500+N-1, or (when port 4500 is in use by IPsec or L2TP/IPsec) 32015... 32015+N-1".

## Appendix F. Troubleshooting

### Problem 1

Outbound load is only distributed over one WAN connection.

#### Solution

Outbound load balancing can only be distribute traffic evenly between available WAN connections if many outbound connections are made. If there is only one user on the LAN and only one download session is made from his/her browser, the WAN connections cannot be fully utilized.

For a single user, download management applications are recommended. The applications can split a file into pieces and download the pieces simultaneously. Examples include: DownThemAll (Firefox Extension), iGetter (Mac), etc.

If the outbound traffic is going across the SpeedFusion™ tunnel, (i.e., transferring a file to a VPN peer) the bandwidth of all WAN connections will be bonded. In this case, all bandwidth will be utilized and a file will be transferred across all available WAN connections.

For additional details, please refer to this FAQ:

<https://forum.peplink.com/t/speed-test-tool-for-combined-download-speed-in-multi-wan-environment/8457>

### Problem 2

I am using a download manager program (e.g., Download Accelerator Plus, DownThemAll, etc.). Why is the download speed still only that of a single link?

#### Solution

First, check whether all WAN connections are up. Second, ensure your download manager application has split the file into 3 parts or more. It is also possible that all of 2 or even 3 download sessions were being distributed to the same link by chance.

### Problem 3

I am using some websites to look up my public IP address, e.g., [www.whatismyip.com](http://www.whatismyip.com). When I press the browser's Refresh button, the server almost always returns the same address. Isn't the IP address supposed to be changing for every refresh?

#### Solution

The web server has enabled the **Keep Alive** function, which ensures that you use the same TCP session to query the server. Try to test with a website that does not enable **Keep Alive**.

### Problem 4

What can I do if I suspect a problem on my LAN connection?

#### Solution

You can test the LAN connection using ping. For example, if you are using DOS/Windows, at the command prompt, type `ping 192.168.1.1`. This pings the Peplink Balance device (provided

that Peplink Balance's IP is 192.168.1.1) to test whether the connection to the Peplink Balance is OK.

### Problem 5

What can I do if I suspect a problem on my Internet/WAN connection?

#### Solution

You can test the WAN connection using ping, as in the solution to Problem 4. As we want to isolate the problems from the LAN, ping will be performed from the Peplink Balance. By using **Ping/Traceroute** under the **Status** tab of the Peplink Balance, you may be able to find the source of the problem.

### Problem 6

When I upload files to a server via FTP, the transfer stalls after a few kilobytes of data are sent. What should I do?

#### Solution

The maximum transmission unit (MTU) or MSS setting may need to be adjusted. By default, the MTU is set at 1440. Choose **Auto** for all of your WAN connections. If that does not solve the problem, you can try the MTU 1492 if a connection is DSL. If the problem still persists, change the size to progressively smaller values until your problem is resolved (e.g., 1462, 1440, 1420, 1400, etc).

## Additional troubleshooting resources:

Peplink Community Forums: <https://forum.peplink.com/>

## Appendix G. Declaration

### Ethernet Cables

We recommend that you use a shielded cable to connect the Ethernet ports for the network.

### FCC Requirements for Operation in the United States Federal Communications Commission (FCC) Compliance Notice:

#### For Balance 30 Pro

#### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

#### Radiation Exposure Statement :

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 49 cm between the radiator and your body.

Note The country code selection is for non-US models only and is not available to all US models. Per FCC regulation, all WiFi products marketed in US must fixed to US operation channels only.

#### Battery Caution Statement

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

## CE Statement for Pepwave Routers ( Balance 30 Pro )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                 |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building<br>Phase 6, 481 Castle Peak Road<br>Cheung Sha Wan Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                            |
| Model name of the appliance             | Peplink Balance 30 Pro<br>BPL-031-LTEA-W-T<br>Balance 30 Pro<br>Pismo 811AC<br>B30 Pro                                                                                        |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                            |

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.1.1  
EN 301 893 V2.1.1  
EN 301908-1 V11.1.1  
EN 301 489-1 V2.2.1  
Draft EN 301 489-17 V3.2.0  
Draft EN 301 489-52 V1.1.0  
EN 55032: 2015 + AC:2016  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 55024: 2010 + A1 :2015  
EN 62311 : 2008  
EN 62368-1:2014/AC:2015

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

**2.4GHz ( 2412 - 2472 MHz ) : 19.93 dBm**

**5GHz ( 5150 - 5250 MHz ) : 22.88 dBm**

**WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )**

**Table 4-6: Conducted Tx (Transmit) Power Tolerances**

| Parameter                                                                                  | Conducted transmit power | Notes                   |
|--------------------------------------------------------------------------------------------|--------------------------|-------------------------|
| <b>LTE</b>                                                                                 |                          |                         |
| LTE Band 1,3,8,20                                                                          | +23 dBm $\pm$ 1 dB       |                         |
| LTE Band 7                                                                                 | +22 dBm $\pm$ 1 dB       |                         |
| <b>UMTS</b>                                                                                |                          |                         |
| Band 1 (IMT 2100 12.2 kbps)<br>Band 3 (UMTS 1800 12.2 kbps)<br>Band 8 (UMTS 900 12.2 kbps) | +23 dBm $\pm$ 1 dB       | Connectorized (Class 3) |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

**Contact as: <https://www.peplink.com/>**

## **FCC Requirements for Operation in the United States Federal Communications Commission (FCC) Compliance Notice:**

### **For Balance One**

#### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

#### **Radiation Exposure Statement**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

#### **Industry Canada Statement (Balance One)**

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le présent produit est conforme aux spécifications techniques applicables d'Innovation, Sciences et Développement économique Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio ex- empts de licence. L'exploitation est autorisee aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, meme si le brouillage est susceptible d'en

(i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potent for harmful interference to co-channel mobile satellite systems

(ii) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate and

The high-power radars are allocated as primary users (i.e. priority users) of the band 5725-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

(i) Le dispositif fonctionnant dans la bande 5150-5250 MHz est reserve uniquement pour utilisation a l'interieur afin de reduire les risques de brouillage prejudiciable aux systemes de satellites mobiles utilisant les memes canaux

(ii) Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant bande 5725-5850 MHz doit se conformer a la limitation P.I.R.E specifiee pour l'exploitation point a point et non point a point, selon le cas.

En outre, les utilisateurs devraient aussi etre avises que les utilisateurs de radars de haute puissance sont designes utilisateurs principaux (c.-a-d., qu'ils ont la priorite) pour les bande 5725-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

### **Radiation Exposure Statement**

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet equipement est conforme avec l'exposition aux radiations ISED definies pour un environnement non controle. Cet equipement doit etre installe et utilise a une distance minimum de 20 cm entre le radiateur et votre corps.

### **Battery Caution Statement (Balance One)**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

## CE Statement for Pepwave Routers ( Balance One )

# DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                                                     |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | Pismo Labs Technology Limited                                                                                                                                                                                       |
| Contact information of the manufacturer | Unit A5, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: <a href="mailto:cs@peplink.com">cs@peplink.com</a> |
| Description of the appliance            | Peplink / Pepwave / Pismo wireless product                                                                                                                                                                          |
| Model name of the appliance             | Balance One<br>Balance One AC,<br>Balance One Core                                                                                                                                                                  |
| Trade name of the appliance             | <br>PEPWAVE                                                                                                                      |

The construction of the appliance is in accordance with the following standards:

EN 55032:2015  
 EN 55024:2010+A1:2015  
 EN 61000-3-2:2014  
 EN 61000-3-3:2013  
 EN 301 489-1 V2.1.1  
 EN 301 489-3 V2.1.1  
 EN 301 489-17 V3.1.1  
 EN 300 328 V2.1.1  
 EN 301 893 V2.1.1  
 EN 300 440 V2.1.1  
 EN 50385:2017  
 EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

Yours sincerely,




Antony Chong  
 Director of Hardware Engineering  
 Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

**2.4GHz ( 2412 - 2472 MHz ) : 16.59 dBm**

**5GHz ( 5150 - 5250 MHz ) : 21.38 dBm**

**5GHz ( 5725 - 5850 MHz ) : 13.25 dBm**

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

**Contact as: <https://www.peplink.com/>**

**For Balance One Core, Balance 20, Balance 30 LTE, Balance 210, Balance 310X, Balance 310X 5G, Balance 310 5G, Balance 310 Fiber 5G, Balance 305, Balance 380, Balance 580, Balance 710, Balance 1350, Balance 1350 EC, Balance 2500, Balance 2500 EC, EPX, Balance SDX, Balance 5000 EC, MediaFast 500, MediaFast 750**

### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### **Radiation Exposure Statement (Balance 310 5G)**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 21cm between the radiator and your body.

**Innovation, Science and Economic Development Canada Statement (Balance One Core, Balance 20, Balance 30 LTE, Balance 310X, Balance 310X 5G, Balance 310 5G, Balance 310 Fiber 5G, Balance 305, Balance 380, Balance 580, Balance 710, Balance 1350, Balance 2500, Balance 2500 EC, EPX, Balance SDX, Balance 5000 EC, MediaFast 500, MediaFast 750)**

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le présent produit est conforme aux spécifications techniques applicables d'Innovation, Sciences et Développement économique Canada.

**For Balance 30 LTE, Balance 310X, Balance 310X 5G, Balance 310 5G, Balance 310 Fiber 5G**

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en

**Radiation Exposure Statement (Balance 30 LTE, Balance 310X, Balance 310X 5G, Balance 310 Fiber 5G)**

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme avec l'exposition aux radiations ISED définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à une distance minimum de 20 cm entre le radiateur et votre corps.

**Radiation Exposure Statement (Balance 310 5G)**

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 21cm between the radiator & your body.

Cet équipement est conforme avec l'exposition aux radiations ISED définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à une distance minimum de 21 cm entre le radiateur et votre corps.

**Battery Caution Statement (Balance 30 LTE, Balance 210, Balance 310 5G, Balance 310X, Balance 310X 5G, Balance 310 Fiber 5G, Balance SDX, EPX, Balance One Core, Balance 305, Balance 380, Balance 580, Balance 710, Balance 1350, Balance 2500, Balance 2500 EC, Balance 5000 EC)**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

### **Professional Installation Instruction**

This product must be installed only by personnel who have completed Peplink training and obtained Peplink certification. The general user shall not attempt to install or change the settings

## For Balance 310 5G

User should also be advised that:

- (i) the device for operation in the band 5150 - 5250 MHz is only for indoor use to reduce the potential for harmful interference to co - channel mobile satellite systems;
- (ii) the maximum antenna gain permitted for devices in the bands 5250 - 5350 MHz and 5470 - 5725 MHz shall comply with the e.i.r.p. limit; and
- (iii) the maximum antenna gain permitted for devices in the band 5725 - 5825 MHz shall comply with the e.i.r.p. limits specified for point - to - point and non point - to - point operation as appropriate. High - power radars are allocated as primary users (i.e. priority users) of the bands 5250 - 5350 MHz and 5650 - 5850 MHz and that these radars could cause interference and/or damage to LE - LAN devices.

Les utilisateurs devraient aussi être avisés que

- (i) les dispositifs fonctionnant dans la bande 5150 - 5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250 - 5350 MHz et 5470 - 5725 MHz doit se conformer à la limite de p.i.r.e.;
- (iii) le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725 - 5825 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

De plus, les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c. - à - d., qu'ils ont la priorité) pour les bandes 5250 - 5350 MHz et 5650 - 5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN - EL.

This radio transmitter IC: 35538-P1BE05 has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Cet émetteur radio IC: 35538-P1BE05 a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antennes énumérés ci - dessous avec le gain maximal admissible et impédance d'antenne requise pour chaque type d'antenne indiqué. Types d'antennes n'est pas inclus dans cette liste, ayant un gain supérieur au gain maximal indiqué pour ce type, sont strictement interdits pour une utilisation avec cet appareil.

Antenna Type: Omni-directional

Antenna Gain For Wi-Fi 2.4G: 2.25 dBi

Antenna Gain For Wi-Fi 5G (5150 - 5250 MHz): 2.55 dBi

Antenna Gain For Wi-Fi 5G (5725 - 5850 MHz): 3.36 dBi

## **Safety Statement (Balance SDX, EPX)**

Class I Equipment. This equipment must be earthed. The power plug must be connected to a properly wired earth ground socket outlet. An improperly wired socket outlet could place hazardous voltages on accessible metal parts.

All Ethernet cables are designed for intra-building connection to other equipment. Do not connect these ports directly to communication wiring or other wiring that exits the building where the appliance is located.

## **FCC Requirements for Operation in the United States Federal Communications Commission (FCC) Compliance Notice:**

### **For Balance Two**

#### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### **Battery Caution Statement**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

## **FCC Requirements for Operation in the United States**

### **Federal Communications Commission (FCC) Compliance Notice:**

#### **For Balance 20X**

#### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **Radiation Exposure Statement**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

#### **Industry Canada Statement (Balance 20X)**

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le présent produit est conforme aux spécifications techniques applicables d'Innovation, Sciences et Développement économique Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en

(i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems

(ii) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate and  
The high-power radars are allocated as primary users (i.e. priority users) of the band 5725-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

(i) Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux

(ii) Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant la bande 5725-5850 MHz doit se conformer à la limitation P.I.R.E. spécifiée pour l'exploitation point à point et non point à point, selon le cas.  
En outre, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour la bande 5725-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

## Radiation Exposure Statement

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme avec l'exposition aux radiations ISED définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à une distance minimum de 20 cm entre le radiateur et votre corps.

### **Battery Caution Statement**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

## CE Statement for Pepwave Routers ( Balance One Core )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                                                     |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | Pismo Labs Technology Limited                                                                                                                                                                                       |
| Contact information of the manufacturer | Unit A5, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: <a href="mailto:cs@peplink.com">cs@peplink.com</a> |
| Description of the appliance            | Peplink / Pepwave / Pismo wireless product                                                                                                                                                                          |
| Model name of the appliance             | Balance One Core                                                                                                                                                                                                    |
| Trade name of the appliance             | <br><b>PEPWAVE</b>                                                                                                               |

The construction of the appliance is in accordance with the following standards:

EN 55032:2015  
EN 55024:2010+A1:2015  
EN 61000-3-2:2014  
EN 61000-3-3:2013  
EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance Two )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                           |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                             |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Balance Product Dual-WAN Router                                                                                                                                         |
| Model name of the appliance             | Balance Two<br>BPL-TWO<br>PismoX09A                                                                                                                                                       |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                        |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + AC:2016

EN 61000-3-2: 2014

EN 61000-3-3: 2013

EN 55035: 2017

IEC 62368-1:2014 (Second Edition) and/or EN 62368-1:2014

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## UK Statement for Pepwave Routers ( Balance Two )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                                          |
| Model name of the appliance             | Balance Two<br>BPL-TWO                                                                                                                                                                      |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + AC:2016  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 55035: 2017  
IEC 62368-1:2014 (Second Edition) and/or EN 62368-1:2014

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 710 )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 710<br>BPL-710                                                                                                                                                           |
| Trade name of the appliance             | <br><b>PEPwave</b>                                                                           |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 / A1:2020  
EN 55035: 2017 / A11:2020  
EN IEC 61000-3-2: 2019 / A1:2021  
EN 61000-3-3: 2013 / A2:2021  
EN IEC 62368-1:2020+A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## UK Statement for Pepwave Routers ( Balance 710 )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 710<br>BPL-710                                                                                                                                                           |
| Trade name of the appliance             |                                                                                              |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + A1:2020  
EN 55035: 2017 + A11:2020  
EN IEC 61000-3-2: 2019 + A1:2021  
EN 61000-3-3: 2013 + A2:2021  
EN IEC 62368-1:2020+A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 2500 EC )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 2500 EC<br>BPL-2500-EC                                                                                                                                                   |
| Trade name of the appliance             | <br><b>PEPWAVE</b>                                                                           |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2:2014  
EN IEC 61000-3-2: 2019 + A1:2021  
EN 61000-3-3: 2013 + A2:2021  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

**UK Statement for Pepwave Routers ( Balance 2500 EC )**

## UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 2500 EC<br>BPL-2500-EC                                                                                                                                                   |
| Trade name of the appliance             | <br><b>PEPWAVE</b>                                                                           |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.


### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2:2014  
EN IEC 61000-3-2: 2019 + A1:2021  
EN 61000-3-3: 2013 + A2:2021  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

# CE Statement for Pepwave Routers ( Balance 20X for EC25-E)

## DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                 |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building<br>Phase 6, 481 Castle Peak Road<br>Cheung Sha Wan Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                            |
| Model name of the appliance             | Balance 20X<br>BPL-021X-LTE-E-T-PRM                                                                                                                                           |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                            |

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.2.2  
EN 301 893 V2.1.1  
EN 301 908-1 V15.1.1  
Draft EN 301 489-1 V2.2.1  
Draft EN 301 489-17 V3.2.0  
Draft EN 301 489-52 V1.1.0  
EN 55032: 2015 + AC:2016-07  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 55035: 2017  
EN 62311 : 2008  
EN 62368-1:2014/A11:2017  
EN 303 413 V1.1.1  
EN 301 489-19 V2.1.1

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

**2.4GHz ( 2412 - 2472 MHz ) : 19.84 dBm**

**5GHz ( 5150 - 5250 MHz ) : 22.89 dBm**

**WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )**

|              |                                                |
|--------------|------------------------------------------------|
| Output Power | Class 3 (23dBm±2dB) for LTE FDD                |
|              | Class 3 (23dBm±2dB) for LTE TDD                |
|              | Class 3 (24dBm +1/-3dB) for TD-SCDMA           |
|              | Class 3 (24dBm +1/-3dB) for UMTS               |
|              | Class E2 (27dBm ±3dB) for EDGE 850/900MHz      |
|              | Class E2 (26dBm +3/-4dB) for EDGE 1800/1900MHz |
|              | Class 4 (33dBm ±2dB) for GSM 850/900MHz        |
|              | Class 1 (30dBm ±2dB) for GSM 1800/1900MHz      |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

**contact as: <https://www.peplink.com/>**

## UK Statement for Pepwave Routers ( Balance 20X for EC25-E)

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Balance 20X<br>BPL-021X-LTE-E-T-PRM                                                                                                                                              |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Radio Equipment Regulations 2017

### **UK Designed Standard**

EN 301 908-1 V15.1.1  
EN 300 328 V2.2.2  
EN 301 893 V2.1.1  
EN 303 413 V1.1.1

### **Other Standards Applied**

EN 62311: 2008  
Draft EN 301 489-1 V2.2.1  
Draft EN 301 489-17 V3.2.0  
EN 301 489-19 V2.1.1  
Draft EN 301 489-52 V1.1.0  
EN 55032: 2015 +  
AC:2016-07 EN 55035: 2017  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1:2014/A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 20X for LN920A6-WW )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPLINK PEPWAVE Wireless Product                                                                                                                                                            |
| Model name of the appliance             | Balance 20X<br>BPL-021X-LTEA-B-T-PRM                                                                                                                                                        |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 301 908-1 V15.1.1  
EN 300 328 V2.2.2  
EN 301 893 V2.1.1  
EN 303 413 V1.2.1  
EN 62311: 2020  
EN 301 489-1 V2.2.3  
EN 301 489-17 V3.2.4  
EN 301 489-52 V1.2.1  
Draft EN 301 489-19 V2.2.0  
EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2019 + A1:2021  
EN 61000-3-3: 2013 + A1:2019  
EN 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

**2.4GHz ( 2412 - 2472 MHz ) : 19.84 dBm**

**5GHz ( 5150 - 5250 MHz ) : 22.89 dBm**

**WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )**

| Band                       | Power class    |
|----------------------------|----------------|
| 3G WCDMA                   | Class 3 (0.2W) |
| LTE All Bands (except B41) | Class 3 (0.2W) |
| LTE Band41 (HPUE support)  | Class 2 (0.4W) |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

**contact as: <https://www.peplink.com/>**

**UK Statement for Pepwave Routers ( Balance 20X for LN920A6-WW )**

## UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPLINK PEPWAVE Wireless Product                                                                                                                                                 |
| Model name of the appliance             | Balance 20X<br>BPL-021X-LTEA-B-T-PRM                                                                                                                                             |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Radio Equipment Regulations 2017

### **UK Designed Standard**

EN 301 908-1 V15.1.1  
EN 300 328 V2.2.2  
EN 301 893 V2.1.1  
EN 303 413 V1.2.1

### **Other Standards Applied**

EN 62311: 2020  
EN 301 489-1 V2.2.3  
EN 301 489-17 V3.2.4  
EN 301 489-52 V1.2.1  
Draft EN 301 489-19 V2.2.0  
EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2019 + A1:2021  
EN 61000-3-3: 2013 + A1:2019  
EN 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## NCC statement

### For Balance 20X

減少電磁波影響，請妥適使用。

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

高增益指向性天線只得應用於固定式點對點系統。

電波功率密度 MPE標準值: 1.0 mW/cm<sup>2</sup>, 送測產品實測值: 0.114 mW/cm<sup>2</sup>, 建議使用時設備天線至少距離人體20公分。

分頻雙工(FDD):

本設備- WCDMA 2100 (Band 1) FDD支援LTE上行1920MHz -1980MHz \ 下行2110MHz -2170MHz。

本設備- WCDMA 900 (Band 8) FDD支援LTE上行1885MHz -915MHz \ 下行930MHz -960MHz。

本設備- LTE 2100 (Band 1) FDD支援LTE上行1920MHz -1980MHz \ 下行2110MHz -2170MHz。

本設備- LTE 1800 (Band 3) FDD支援LTE上行1710MHz -1770MHz \ 下行1805MHz -1865MHz。

本設備- LTE 2600 (Band 7) FDD支援LTE上行2500MHz~2570MHz \ 下行2620MHz~2690MHz。

本設備- LTE 900 (Band 8) FDD支援LTE上行885MHz -915MHz \ 下行930MHz -960MHz。

本設備- LTE 700 (Band 28) FDD支援LTE上行703MHz -748MHz \ 下行758MHz -803MHz。

分時雙工(TDD):

本設備- LTE 2600 (Band 38) TDD支援頻段(2570MHz~2620MHz)。

本設備- LTE 2600 (Band 41) TDD支援頻段(2500MHz~2690MHz)。

為避免電磁干擾，本產品不應安裝或使用於住宅環境。

如果更換不正確之電池型式會有爆炸的風險，請依製造商說明書處理用過之電池。

## CE Statement for Pepwave Routers ( Balance 30 LTE )

# DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007<br>0588 e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Peplink Balance 30 LTE<br>BPL-031-LTE-E-T<br>Balance 30 LTE<br>Pismo 811AC<br>B30 LTE<br>Peplink Balance 30                                                                      |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

The construction of the appliance is in accordance with the following standards:

EN 301 908-1 V11.1.1  
 Draft EN 301 489-1 V2.2.0  
 Draft EN 301 489-52 V1.1.0  
 EN 55032: 2015 + AC:2016  
 EN 61000-3-2: 2014  
 EN 61000-3-3: 2013  
 EN 55035 : 2017  
 EN 62311 : 2008  
 EN 62368-1:2014/AC:2015

Yours sincerely,




Antony Chong  
 Director of Hardware Engineering  
 Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

### **WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )**

|                     |                                                |
|---------------------|------------------------------------------------|
| <b>Output Power</b> | Class 3 (23dBm $\pm$ 2dB) for LTE FDD          |
|                     | Class 3 (23dBm $\pm$ 2dB) for LTE TDD          |
|                     | Class 3 (24dBm +1/-3dB) for TD-SCDMA           |
|                     | Class 3 (24dBm +1/-3dB) for UMTS               |
|                     | Class E2 (27dBm $\pm$ 3dB) for EDGE 850/900MHz |
|                     | Class E2 (26dBm +3/-4dB) for EDGE 1800/1900MHz |
|                     | Class 4 (33dBm $\pm$ 2dB) for GSM 850/900MHz   |
|                     | Class 1 (30dBm $\pm$ 2dB) for GSM 1800/1900MHz |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

**contact as:** <https://www.peplink.com/>

## CE Statement for Pepwave Routers ( Balance 210 )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                 |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building<br>Phase 6, 481 Castle Peak Road<br>Cheung Sha Wan Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                            |
| Model name of the appliance             | Balance 210<br>Peplink 210<br>BPL-210<br>Peplink Balance Router 210<br>Peplink Balance SD-WAN Router<br>Peplink Balance 210<br>Pismo 809                                      |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                            |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + AC:2016-07

EN 61000-3-2: 2014

EN 61000-3-3: 2013

EN 55035: 2017

EN 62368-1:2014/A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 310 5G )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                                          |
| Model name of the appliance             | Balance 310 5G<br>BPL-310-5GD-K-T<br>BPL-310-5GH-K-T                                                                                                                                        |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 301 908-1 V13.1.1  
EN 301 489-1 V2.2.3  
Draft ETSI EN 301 489-52 V1.1.0  
EN 55032 : 2015 / A11:2020  
EN 55035 : 2017 / A11:2020  
EN 61000-3-2 : 2019  
EN 61000-3-3 : 2013/A1:2019  
EN 62311:2020  
IEC 62368-1:2018  
EN IEC 62368-1:2020+A11:2020  
BS EN IEC 62368-1:2020+A11:2020  
EN IEC 62368-3:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

|  |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|--|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|  | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

## WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )

### EM7565 module:

Table 3-6: Conducted Tx (Transmit) Power Tolerances

| Bands                                                      | Conducted Tx power                                             | Notes                                                           |
|------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------|
| <b>LTE</b>                                                 |                                                                |                                                                 |
| LTE bands 1,3,8,20,28                                      | +23 dBm $\pm$ 1 dB                                             |                                                                 |
| LTE bands 7                                                | Single cell: +22 dBm $\pm$ 1 dB<br>UL CA: +22.8 dBm $\pm$ 1 dB | 0.8 dB offset for UL CA<br>hardcoded by chipset<br>manufacturer |
| <b>UMTS</b>                                                |                                                                |                                                                 |
| Band 1 (IMT 2100 12.2 kbps)<br>Band 8 (UMTS 900 12.2 kbps) | +23 dBm $\pm$ 1 dB                                             | Connectorized<br>(Class 3)                                      |

### EM9191 module:

Table 4-11: Conducted Maximum Tx (Transmit) Power<sup>a</sup> Tolerances

| Bands                 | Conducted Tx Power      | Notes                         |
|-----------------------|-------------------------|-------------------------------|
| <b>5G</b>             |                         |                               |
| FR1 Sub-6G Bands      | +23 dBm $\pm$ 1.5 dB    | Power Class 3                 |
| <b>LTE</b>            |                         |                               |
| LTE B7, B38, B42      | +23 dBm +1.8 dB/-1.0 dB | Power Class 3                 |
| LTE all other bands   | +23 dBm $\pm$ 1 dB      | Power Class 3                 |
| <b>UMTS</b>           |                         |                               |
| All bands (12.2 kbps) | +23.5 dBm $\pm$ 1 dB    | Connectorized (Power Class 3) |

a. Tx Power is based on no maximum power reduction (MPR) configuration as 3GPP defined. For configurations that require MPR or additional MPR, refer to 3GPP for the power reduction.

## MV31-W module:

|    |                   |                                                                                                                                         |
|----|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 5G | Bands             | FR1 (Sub 6G):<br>FDD: n1, n3, n28<br>TDD: n41, n77, n78                                                                                 |
|    | Band combinations | For supported E-UTRAN New Radio Dual Connectivity (EN-DC) see [2]                                                                       |
|    | 4x4 MIMO          | n1, n3, n41, n77, n78                                                                                                                   |
|    | DSS               | n1, n3, n28                                                                                                                             |
|    | Category          | 3GPP Rel 15<br>256 QAM UL/DL                                                                                                            |
|    | Output Power      | FR1 (Sub 6G):<br>n41, n77, n78: 25.5dBm +1.5/-1dB (HPUE)<br>All other bands: 23dBm ±1dB                                                 |
| 4G | Bands             | FDD: B1, B3, B7, B8, B20, B28<br><br>TDD: B34, B38, B40, B42                                                                            |
|    | Band combinations | For supported carrier aggregations (CA) see [2]                                                                                         |
|    | 4x4 MIMO          | B1, B3, B7, B38, B40, B42                                                                                                               |
|    | RX Diversity      | All LTE bands                                                                                                                           |
|    | Category          | UE Cat. 13 (UL: 150Mbps) + UE Cat. 20 (DL: 2Gbps);<br>7xDL CA, 3xUL CA (Intra-band), 5xDL CA+4X4 MIMO (Up to UE Cat20)<br>256 QAM UL/DL |
|    | Output Power      | B42: 21 ±1dBm for US region<br>B1, B3, B7, B34, B38, B40: 23dBm ±1dBm<br>B8, B20, B28: 23.5dBm ±1dBm                                    |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 21cm between the radiator & your body.

**contact as:** <https://www.peplink.com/>

## UK Statement for Pepwave Routers ( Balance 310 5G )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Balance 310 5G<br>BPL-310-5GD-K-T<br>BPL-310-5GH-K-T                                                                                                                             |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Radio Equipment Regulations 2017

### **UK Designed Standard**

EN 301 908-1 V13.1.1

### **Other Standards Applied**

EN 62311: 2020

EN 301 489-1 V2.2.3

Draft ETSI EN 301 489-52 V1.1.0

EN 55032: 2015 + A11:2020

EN 55035: 2017 + A11:2020

EN 61000-3-2: 2019

EN 61000-3-3: 2013 + A1:2019

IEC 62368-1:2018

EN IEC 62368-1:2020+A11:2020

BS EN IEC 62368-1:2020+A11:2020

EN IEC 62368-3:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers (Balance 310X 5G)

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                                          |
| Model name of the appliance             | Balance 310X<br>Balance 310X 5G<br>BPL-310X-5GD-T<br>MBX Expansion Module<br>Expansion Module with 1x 5G modems<br>EXM-310X-5GD                                                             |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                         |

The construction of the appliance is in accordance with the following standards:

EN 301 908-1 V13.1.1  
 EN 303 413 V1.1.1  
 EN 62311: 2020  
 EN 301 489-1 V2.2.3  
 Draft EN 301 489-19 V2.2.0  
 Draft EN 301 489-52 V1.1.2  
 EN 55032: 2015 / A11: 2020  
 EN 55035: 2017 / A11: 2020  
 EN 61000-3-2: 2014  
 EN 61000-3-3: 2013 / A1:2019  
 EN 62368-1:2020 + A11:2020

Yours sincerely,




Antony Chong  
 Director of Hardware Engineering  
 Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

### WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )

|    |                   |                                                                                                                                         |
|----|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 5G | Bands             | FR1 (Sub 6G):<br>FDD: n28<br>TDD: n78                                                                                                   |
|    | Band combinations | For supported E-UTRAN New Radio Dual Connectivity (EN-DC) see <a href="#">Section 6.2</a>                                               |
|    | 4x4 MIMO          | n78                                                                                                                                     |
|    | DSS               | n28                                                                                                                                     |
|    | Category          | 3GPP Rel 15                                                                                                                             |
|    | Output Power      | FR1 (Sub 6G):<br>n78: 26dBm +2/-3dB<br>all other bands: 23dBm ±2dB                                                                      |
| 4G | Bands             | FDD: B1, B3, B7, B8, B20, B28<br><br>TDD: B38, B40                                                                                      |
|    | Band combinations | For supported carrier aggregations (CA) see <a href="#">Section 6.1</a>                                                                 |
|    | 4x4 MIMO          | B1, B3, B7, B40, B38                                                                                                                    |
|    | RX Diversity      | all LTE bands                                                                                                                           |
|    | Category          | UE Cat. 13 (UL: 150Mbps) + UE Cat. 20 (DL: 2Gbps);<br>7xUL CA, 3xUL CA (Intra-band), 5xUL CA+4x4 MIMO (Up to UE Cat20)                  |
|    | Output Power      | 23dBm ±2dB                                                                                                                              |
| 3G | Bands             | Bd.I, Bd.VIII                                                                                                                           |
|    | RX Diversity      | all 3G bands                                                                                                                            |
|    | Category          | DC-HSPA+ – DL Cat. 24 (42Mbps) / UL Cat. 6 (11Mbps)<br>HSUPA – UL 5.76Mbps<br>Compressed mode (CM) supported according to 3GPP TS25.212 |
|    | Output Power      | all bands: 24dBm +1.7/-3.7dB                                                                                                            |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

contact as: <https://www.peplink.com/>

## UK Statement for Pepwave Routers (Balance 310X 5G)

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Balance 310X<br>Balance 310X 5G<br>BPL-310X-5GD-T<br>MBX Expansion Module<br>Expansion Module with 1x 5G modems<br>EXM-310X-5GD                                                  |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Radio Equipment Regulations 2017

### **UK Designed Standard**

EN 301 908-1 V13.1.1  
EN 303 413 V1.1.1

### **Other Standards Applied**

EN 62311: 2020  
EN 301 489-1 V2.2.3  
Draft EN 301 489-19 V2.2.0  
Draft EN 301 489-52 V1.1.2  
EN 55032: 2015 / A11: 2020  
EN 55035: 2017 / A11: 2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013 / A1:2019  
EN 62368-1: 2020 + A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers (Balance 310 Fiber 5G)

# DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                                          |
| Model name of the appliance             | Balance 310 Fiber 5G<br>BPL-310-FBR-5GD-T-PRM                                                                                                                                               |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.2.2  
EN 301 893 V2.1.1  
EN 301 908-1 V13.1.1  
EN 62311: 2020  
EN 301 489-1 V2.2.3  
EN 301 489-17 V3.2.4  
Draft EN 301 489-52 V1.1.2  
EN 55032: 2015 / A11:2020  
EN 55035: 2017 / A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013 / A1:2019  
EN 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

|                                                                                   |    |    |    |    |    |    |    |    |    |    |    |    |    |        |
|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|
|  | AT | BE | BG | HR | CY | CZ | DK | EE | FI | FR | DE | EL | HU | IE     |
|                                                                                   | IT | LV | LT | LU | MT | NL | PL | PT | RO | SK | SI | ES | SE | UK(NI) |

**2.4GHz ( 2412 – 2472 MHz ) : 19.94 dBm**

**5GHz ( 5150 - 5250 MHz ) : 22.76 dBm**

**WWAN : Refer 3GPP TS 36.521 -1 ( UE Power class )**

|    |                   |                                                                                                                                         |
|----|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 5G | Bands             | FR1 (Sub 6G):<br>FDD: n28<br>TDD: n78                                                                                                   |
|    | Band combinations | For supported E-UTRAN New Radio Dual Connectivity (EN-DC) see <a href="#">Section 6.2</a>                                               |
|    | 4x4 MIMO          | n78                                                                                                                                     |
|    | DSS               | n28                                                                                                                                     |
|    | Category          | 3GPP Rel 15                                                                                                                             |
|    | Output Power      | FR1 (Sub 6G):<br>n78: 26dBm +2/-3dB<br>all other bands: 23dBm ±2dB                                                                      |
| 4G | Bands             | FDD: B1, B3, B7, B8, B20, B28<br><br>TDD: B38, B40                                                                                      |
|    | Band combinations | For supported carrier aggregations (CA) see <a href="#">Section 6.1</a>                                                                 |
|    | 4x4 MIMO          | B1, B3, B7, B40, B38                                                                                                                    |
|    | RX Diversity      | all LTE bands                                                                                                                           |
|    | Category          | UE Cat. 13 (UL: 150Mbps) + UE Cat. 20 (DL: 2Gbps);<br>7xDL CA, 3xUL CA (Intra-band), 5xDL CA+4X4 MIMO (Up to UE Cat20)                  |
|    | Output Power      | 23dBm ±2dB                                                                                                                              |
| 3G | Bands             | Bd.I, Bd.VIII                                                                                                                           |
|    | RX Diversity      | all 3G bands                                                                                                                            |
|    | Category          | DC-HSPA+ – DL Cat. 24 (42Mbps) / UL Cat. 6 (11Mbps)<br>HSUPA – UL 5.76Mbps<br>Compressed mode (CM) supported according to 3GPP TS25.212 |
|    | Output Power      | all bands: 24dBm +1.7/-3.7dB                                                                                                            |

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

**contact as:** <https://www.peplink.com/>

## UK Statement for Pepwave Routers (Balance 310 Fiber 5G)

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Balance 310 Fiber 5G<br>BPL-310-FBR-5GD-T-PRM                                                                                                                                    |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                              |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Radio Equipment Regulations 2017


### **UK Designed Standard**

EN 301 908-1 V13.1.1  
EN 300 328 V2.2.2  
EN 301 893 V2.1.1

### **Other Standards Applied**

EN 62311: 2020  
EN 301 489-1 V2.2.3  
EN 301 489-17 V3.2.4  
Draft EN 301 489-52 V1.2.1  
EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013 + A1:2019  
EN 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance SDX )

# DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial Building,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007<br>0588 e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Peplink Balance SDX<br>SDX Main Chassis (BPL-SDX)<br>SDX Main Chassis (BPL-SDX-F1)<br>SDX Main Chassis (BPL-SDX-C1)<br>BPL-SDX<br>BPL-SDX-F1<br>BPL-SDX-C1                       |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                              |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + AC:2016  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 55035 : 2017  
EN 62368-1:2014+A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## UK Statement for Pepwave Routers ( Balance SDX )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Peplink Balance SDX<br>SDX Main Chassis (BPL-SDX)<br>SDX Main Chassis (BPL-SDX-F1)<br>SDX Main Chassis (BPL-SDX-C1)<br>BPL-SDX<br>BPL-SDX-F1<br>BPL-SDX-C1                       |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + AC:2016  
EN 55035: 2017  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1: 2014+A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( EPX )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                                          |                                                                                                                                                                                                                |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                                     | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                                                  |
| Contact information of the manufacturer                  | A8, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: <a href="mailto:cs@peplink.com">cs@peplink.com</a> |
| Description of the appliance                             | SD-WAN Router                                                                                                                                                                                                  |
| Model name of the appliance (or selective Product Codes) | EPX<br>EPX-M8                                                                                                                                                                                                  |
| Trade name of the appliance                              |  <b>PEPWAVE</b>                                                                                                             |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 +AC: 2016

EN 61000-3-2: 2014

EN 61000-3-3: 2013

EN 61000-4-2: 2009

EN 61000-4-3: 2006 +A1: 2008 + A2: 2010

EN 61000-4-4: 2012

EN 61000-4-5: 2014

EN 61000-4-6:2014

EN 61000-4-11:2004

EN 301 489-1 V2.1.1

EN 62368-1:2014+A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## **FCC Requirements for Operation in the United States**

### **Federal Communications Commission (FCC) Compliance Notice:**

#### **For Balance SDX Pro**

##### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.


##### **Industry Canada Statement (Balance SDX Pro)**

This product meets the applicable Innovation, Science and Economic Development Canada technical Specifications.

Le présent produit est conforme aux spécifications techniques applicables d'Innovation, Sciences et Développement économique Canada.

##### **Battery Caution Statement (Balance SDX Pro)**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

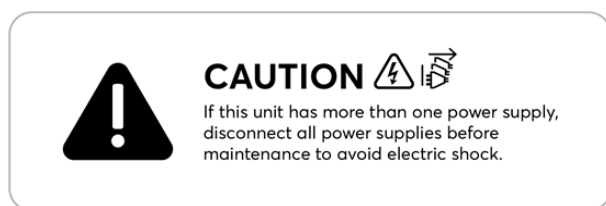

This caution label shows on the bottom of the device for Balance SDX Pro, EPX, Balance 2500 EC, Balance 1350 EC and Balance 5000 EC models, and near power supply position.

## CE Statement for Pepwave Routers ( Balance SDX Pro )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Balance Product                                                                                                                                                           |
| Model name of the appliance             | Balance SDX Pro<br>BPL-SDX-PRO-M2<br>BPL-SDX-PRO-M2-1TB<br>BPL-SDX-PRO-M2-2TB<br>Peplink Balance SDX Pro                                                                                    |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## UK Statement for Pepwave Routers ( Balance SDX Pro )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Balance Product                                                                                                                                                |
| Model name of the appliance             | Balance SDX Pro<br>BPL-SDX-PRO-M2<br>BPL-SDX-PRO-M2-1TB<br>BPL-SDX-PRO-M2-2TB<br>Peplink Balance SDX Pro                                                                         |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## **FCC Requirements for Operation in the United States**

### **Federal Communications Commission (FCC) Compliance Notice:**

#### **For Balance 380X, Balance 580X**

##### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **Industry Canada Statement (Balance 380X, Balance 580X)**

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Ce produit répond aux spécifications techniques applicables à l'innovation, Science et Développement économique Canada.

#### **Battery Caution Statement (Balance 380X, Balance 580X)**

Risk of explosion if the battery replaced by an incorrect type, place the battery into fire, a hot oven, extremely high temperature or low air pressure surrounding environment, the leakage of flammable liquid or gas, and mechanically crushing or cutting of the battery.

## CE Statement for Pepwave Routers ( Balance 380X / Balance 580X )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Electromagnetic Compatibility Directive 2014/30/EU, and Low Voltage Directive 2014/35/EU.

|                                         |                                                                                                                                                                                             |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                               |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Industrial. Building.,<br>Phase 6, 481 Castle Peak Road, Cheung<br>Sha Wan, Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                                          |
| Model name of the appliance             | Balance 380X<br>Balance 580X<br>Peplink Balance 380X<br>Peplink Balance 580X<br>BPL-380X<br>BPL-580X                                                                                        |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## UK Statement for Pepwave Routers ( Balance 380X / Balance 580X )

### UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | PEPWAVE / PEPLINK Wireless Product                                                                                                                                               |
| Model name of the appliance             | Balance 380X<br>Balance 580X<br>Peplink Balance 380X<br>Peplink Balance 580X<br>BPL-380X<br>BPL-580X                                                                             |
| Trade name of the appliance             |  <b>PEPWAVE</b>                                                                               |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 5000 EC )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 5000 EC<br>BPL-5000-EC-40G-PRM<br>BPL-5000-EC-100G-PRM                                                                                                                   |
| Trade name of the appliance             | <br><b>PEPWAVER</b>                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015+A11:2020

EN 55035: 2017+A11:2020

EN 61000-3-2: 2014

EN IEC 61000-3-2: 2019+A1:2021+A2:2024

EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022

EN IEC 62368-1:2024+A11:2024

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

**UK Statement for Pepwave Routers ( Balance 5000 EC )**

## UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 5000 EC<br>BPL-5000-EC-40G-PRM<br>BPL-5000-EC-100G-PRM                                                                                                                   |
| Trade name of the appliance             |                                                                                              |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015+A11:2020  
EN 55035: 2017+A11:2020  
EN 61000-3-2: 2014  
EN IEC 61000-3-2: 2019+A1:2021+A2:2024  
EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022  
EN IEC 62368-1:2024+A11:2024

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## CE Statement for Pepwave Routers ( Balance 1350 EC )

### DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 1350 EC<br>BPL-1350-EC-PRM                                                                                                                                               |
| Trade name of the appliance             | <br><b>PEPWAVER</b>                                                                          |

The construction of the appliance is in accordance with the following standards:

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN IEC 61000-3-2: 2019/A1:2021  
EN 61000-3-3: 2013  
EN 61000-3-3: 2013/A2:2021  
EN 62368-1:2014/A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

**UK Statement for Pepwave Routers ( Balance 1350 EC )**

## UK DECLARATION OF CONFORMITY

|                                         |                                                                                                                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name of manufacturer                    | PISMO LABS TECHNOLOGY LIMITED                                                                                                                                                    |
| Contact information of the manufacturer | A8, 5/F, HK Spinners Ind. Bldg., Phase 6,<br>481 Castle Peak Road, Cheung Sha Wan,<br>Kowloon, Hong Kong<br>tel. (852) 2990 7600, fax. (852) 3007 0588<br>e-mail: cs@peplink.com |
| Description of the appliance            | Peplink Pepwave Balance Product                                                                                                                                                  |
| Model name of the appliance             | Balance 1350 EC<br>BPL-1350-EC-PRM                                                                                                                                               |
| Trade name of the appliance             |                                                                                              |

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

### **UK legislation**

Electromagnetic Compatibility Regulations 2016  
Electrical Equipment (Safety) Regulations 2016

### **UK Designed Standard**

EN 55032: 2015 + A11:2020  
EN 55035: 2017 + A11:2020  
EN 61000-3-2: 2014  
EN IEC 61000-3-2: 2019/A1:2021  
EN 61000-3-3: 2013  
EN 61000-3-3: 2013/A2:2021  
EN 62368-1:2014/A11:2017

Yours sincerely,



Antony Chong  
Director of Hardware Engineering  
Peplink Pte. Limited

## USB WAN Modem Port Specification

### Balance Series

|               | 20X       | 30 LTE    | 30 Pro    | ONE       | TWO       | 210       | 5000 EC     | 1350 EC   |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-------------|-----------|
| Output Rating | 5V DC, 2A | 5V DC, 2A | 5V DC, 2A | 5V DC, 2A | 5V DC, 1A | 5V DC, 1A | 5V DC, 0.9A | 5V DC, 1A |

|               | 310X      | 380         | 380X      | 580         | 580X      | 710         | 1350        | 2500        | 2500 EC     |
|---------------|-----------|-------------|-----------|-------------|-----------|-------------|-------------|-------------|-------------|
| Output Rating | 5V DC, 2A | 5V DC, 0.5A | 5V DC, 1A | 5V DC, 0.5A | 5V DC, 1A | 5V DC, 2.5A | 5V DC, 2.5A | 5V DC, 2.5A | 5V DC, 2.5A |