



Blank Page

Don't Forget To Delete Me!

Notebook Co

Copyright©1998

All Rights Reserved - Printed in Taiwan

**Notebook Computer User's Guide
Original Issue: March, 1998**

This manual guides you in setting up and using your new notebook computer. Information in this manual has been carefully checked for accuracy and is subject to change without notice.

No part of this manual may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopy, recording, or otherwise, without prior written permission.

Trademarks

Product names used herein are for identification purposes only and may be the trademarks of their respective companies.

IBM, AT, PS/2, and Token Ring are registered trademarks and OS/2 is a trademark of International Business Machines Corporation.

Microsoft, MS-DOS, Windows, and Windows Sound System are trademarks of Microsoft Corporation.

Intel and Intel Pentium is a registered trademark of Intel Corporation.

Sound Blaster, Sound Blaster Pro are trademarks of Creative Technology.

All other brands or product names mentioned in this manual are trademarks or registered trademarks of their respective companies.

FCC Notice

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with instructions, may cause interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the device and receiver
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.


Shielded Cables Notice

All connections to other computing devices must be made using shielded cables to maintain compliance with FCC regulations.

Peripheral Devices Notice

Only peripherals (input/output devices, terminals, printers, etc) certified to comply with Class B limits may be attached to this equipment. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

About Your Notebook Computer




Congratulation for having purchased your new Professional Multimedia Notebook. This notebook incorporates the strongest features which integrate the latest technologies available in the notebook industry.

Your new notebook computer not only drives today's multimedia applications but also be ready for tomorrow's exciting new software.

This Professional Multimedia Notebook is a freedom, flexibility, and functionality notebook which users are demanding for a long time.

About Your User's Guide



Welcome to your Professional Multimedia Notebook User's Guide. This manual covers everything you need to know in learning how to use your computer. This manual also assumes that you know the basic concepts of DOS, Windows, and the PC. You will start doing a lot of great and fun things with your computer.

This manual is divided into eight chapters.

Chapter 1 gives introduction on your computer features.

Chapter 2 provides step-by-step instructions to help you begin using your notebook as quickly as possible.

Chapter 3 describes how to operate the standard features of your computer.

Chapter 4 illustrates how to integrate video and sound chips into impressive presentation.

Chapter 5 illustrates how to connect external device to your computer.

Chapter 6 explains how to use the System BIOS Setup program.

Chapter 7 explains how to use the device bay and internal module options of your computer.

Chapter 8 offers instructions on how to care and maintain your notebook.

Table of Contents

1 INTRODUCTION	1-1
1.1 FEATURE HIGHLIGHT	1-2
1.2 OPENING THE DISPLAY COVER	1-4
1.3 INSIDE THE NOTEBOOK	1-5
1.4 THE FRONT SIDE OF THE NOTEBOOK	1-7
1.5 THE RIGHT SIDE OF THE NOTEBOOK	1-8
1.6 THE LEFT SIDE OF THE NOTEBOOK	1-10
1.7 THE REAR SIDE OF THE NOTEBOOK	1-11
1.8 THE UNDERSIDE OF THE NOTEBOOK	1-13
1.9 NOTEBOOK ACCESSORIES	1-14
1.10 NOTEBOOK OPTIONS	1-15
2 GETTING STARTED	2-1
2.1 USING THE BATTERY PACK	2-2
<i>Extending Battery Life</i>	2-5
2.2 CONNECTING THE AC POWER SOURCE	2-5
2.3 STARTING YOUR COMPUTER	2-6
2.4 ADJUSTING THE DISPLAY CONTROLS	2-7
2.5 INSTALLING THE NOTEBOOK DEVICE DRIVERS	2-8
<i>Installing the CD-ROM/DVD-ROM Driver</i>	2-8
<i>Installing the VGA Device Driver</i>	2-11
<i>Installing the Audio Device Driver</i>	2-13
<i>Installing the PCMCIA Device Driver</i>	2-16
<i>Installing the Touchpad Mouse Driver</i>	2-17
<i>Installing the Fast IrDA Driver</i>	2-18
<i>Installing the USB Driver</i>	2-21
<i>Installing the Intel 430TX PCI Bridge Driver</i>	2-23
<i>Installing the AITech TV-Out Utility</i>	2-24


Installing the CCD Camera Driver (Optional)	2-25
Installing the LS-120 Driver (Optional)	2-26
2.6 TURNING OFF YOUR COMPUTER	2-27
3 USING YOUR NOTEBOOK	3-1
3.1 STARTING YOUR OPERATING SYSTEM	3-2
3.2 KNOWING THE STATUS OF YOUR COMPUTER	3-2
3.3 UNDERSTANDING THE KEYBOARD FUNCTIONS	3-4
Basic Keyboard Functions	3-4
Cursor Control Keys	3-6
Screen Control Keys	3-7
Windows 95 Hot Keys	3-7
Special Function Keys	3-8
3.4 USING THE TOUCHPAD POINTING DEVICE	3-9
3.5 CONFIGURING YOUR SCREEN DISPLAY	3-11
Possible Display Configurations	3-12
Changing the Display Properties under Windows 95	3-13
3.6 KNOWING THE POWER SAVING FEATURES	3-13
3.7 USING THE FDD IN DEVICE BAY 1	3-15
3.8 WORKING WITH THE BUILT-IN HDD	3-17
3.9 HOW TO ACCESS THE CD-ROM DRIVE	3-18
3.10 USING PCMCIA CARDS	3-19
What is PCMCIA?	3-19
What is CardBus?	3-20
What is ZV Port?	3-21
Setting Up the PCMCIA Controller	3-22
Inserting and Removing a PCMCIA Card	3-22
Making PC Cards Work	3-23
Hot Swapping PC Cards	3-24
4 FUN WITH MULTIMEDIA	4-1

4.1 NOTEBOOK MULTIMEDIA FEATURES	4-2
4.2 AUDIO SOUND SYSTEM FEATURES	4-2
4.3 SETTING UP THE AUDIO DRIVER PROPERTIES	4-3
4.4 WINDOWS MULTIMEDIA PROGRAMS	4-3
4.5 RECORDING SOUNDS	4-5
Using the Built-in Microphone	4-7
Using an External Microphone	4-8
Using the Built-in CD-ROM Drive	4-8
Using an External Audio Input Device	4-9
4.6 PLAYING AUDIO AND SOUND	4-10
Using the Media Player	4-10
4.7 PLAYING GAMES	4-11
4.8 PLAYING VIDEO AND MPEG FILES	4-11
4.9 USING PC CARDS WITH ZV PORT	4-12
4.10 USING DVD	4-13
4.11 USING THE CCD CAMERA	4-13
5 CONNECTING TO PERIPHERALS	5-1
5.1 USING A SERIAL MOUSE	5-2
5.2 USING AN EXTERNAL KEYBOARD (PS/2)	5-3
5.3 USING THE USB PORT	5-4
5.4 CONNECTING A PARALLEL PRINTER	5-5
5.5 USING THE GAME PORT	5-6
5.6 USING AN EXTERNAL MONITOR (VGA PORT)	5-7
5.7 CONNECTING TO YOUR TV	5-8
5.8 USING THE FAST IR PORT	5-9
6 CUSTOMIZING YOUR NOTEBOOK	6-1
6.1 RUNNING THE BIOS SETUP PROGRAM	6-2
6.2 USING THE MAIN MENU SETUP	6-4
6.2.1 Primary Master/Secondary Master/ Secondary Slave Sub-Menu	6-6

6.3	USING THE ADVANCED CMOS SETUP.....	6-7
6.4	SECURITY MENU SETUP	6-9
6.5	USING POWER SAVING SETUP	6-11
6.6	USING THE BOOT SETUP	6-14
	6.6.1 Hard Drive Sub-Menu Boot Sequence.....	6-15
	6.6.2 Removable Devices Sub-Menu Boot Sequence.....	6-16
6.7	HOW TO EXIT THE SETUP PROGRAM.....	6-17
6.8	HOW TO UPGRADE THE BIOS	6-18
7	USING OPTIONS.....	7-1
7.1	LAN MODULE OPTION.....	7-2
	Connecting the Internal LAN Module.....	7-2
7.2	MODEM MODULE OPTION	7-3
	Connecting the Internal Modem	7-3
7.3	DEVICE BAY OPTIONS	7-3
	Connecting to Device Bay 1.....	7-4
	Connecting to Device Bay 2.....	7-5
7.4	SYSTEM UPGRADE.....	7-7
	Memory Upgrade Procedure	7-7
	Installing Memory Module.....	7-8
8	CARING FOR YOUR NOTEBOOK.....	8-1
8.1	GENERAL SAFETY GUIDELINES	8-2
8.2	CLEANING YOUR COMPUTER	8-3
8.3	MAINTAINING THE LCD QUALITY	8-3
8.4	MAINTAINING YOUR HARD DISK	8-4
8.5	BATTERY CARE GUIDELINES	8-5
8.6	WHEN YOU TRAVEL.....	8-6
	APPENDIX A HARDWARE SYSTEM INFORMATION.....	A-1
A.1	SYSTEM SPECIFICATION	A-2

Processor Unit	A-2
System Memory	A-2
LCD Display	A-2
VGA System.....	A-2
VGA-to-TV Port	A-3
Disk Drives	A-3
Audio System.....	A-3
PCMCIA.....	A-4
TouchPad.....	A-4
Keyboard.....	A-4
Flash BIOS.....	A-5
I/O Ports.....	A-5
Infrared Port	A-5
AC/DC Power Supply Adapter.....	A-5
Battery.....	A-5
Weight and Dimension	A-6
Options.....	A-6
A.2 IRQ USAGE SUMMARY (WINDOWS 95)	A-6
A.3 DMA CHANNEL USAGE SUMMARY	A-7
A.4 I/O PORT USAGE SUMMARY (WINDOW 95).....	A-7
A.5 MEMORY USAGE SUMMARY (WINDOW 95).....	A-8
GLOSSARY	I

1 Introduction



Your Notebook PC is a fully IBM compatible portable personal computer. With the latest features in mobile computing and multimedia technology, this notebook even outperforms today's most desktop computers. Lightweight and compact, your Notebook PC runs on a whole wide range of general business, personal productivity, entertainment, and professional applications. It is ideal for use in the office, at home, and on the road.

Designed with an advanced modular architecture, your Notebook PC also allows you for several levels of customization and expansion that are previously available only on desktop PCs.

1.1 Feature Highlight

Before we go to identify each part of your Notebook PC, we will first introduce you to other notable features of your computer.

Processing Unit

- Your notebook runs on Intel Pentium MMX microprocessor, Intel PentiumII IMM CPU, and other compatible processor like AMD K6. Check with your dealer on the CPU type and speed.
- Fully compatible with an entire library of PC software based on operating systems such as MS-DOS, Windows 3.1, Windows for Workgroups 3.11, Windows 95, OS/2, SCO Unix, and Windows NT. It also runs on future versions of Windows.

Memory

Provides two memory slots for installing 144-pin SODIMM modules up to 128MB using 16MB, 32MB, and 64MB modules or 192MB using 16MB, 32MB, 64MB, and 128MB modules (the 128MB modules should be complied with 430 Pentium processor with MMX technology TX chip). Supports both SDRAM and EDO RAM type memory.

PCMCIA

Provides two PCMCIA slots that allows you to insert either one Type II and one Type III cards, or two Type II cards at the same time.

External Cache Memory

For performance enhancement, adequate amount of secondary cache is a must in utilizing the Pentium CPU power. Your computer provides an external 512KB of secondary (L2) pipelined-burst cache memory.

PCI Local Bus Architecture

- 128-bit PCI video local bus and Windows graphics accelerator with 2MB RAM. Supports Zoomed Video (ZV) Port technology for smooth full-screen motion picture playback capabilities.
- 32-bit PCI Enhanced IDE optimizes the data transfer between the CPU and disk drives. Support disk drives with ultra DMA and PIO Mode up to PIO Mode 4.
- 32-bit PCMCIA CardBus PCI technology that is also backward compatible with 16-bit PC cards.

Audio System

Full-duplex 16-bit stereo audio system with wavetable function and Plug-and-Play features. Sound Blaster and Sound Blaster Pro compatible.

Flash BIOS

Flash EPROM BIOS allows you to easily upgrade the System BIOS using the Phoenix Flash utility program.


Power and System Management

- Integrated SMM/SMI on system chipset that shuts down components not in use to reduce power consumption. Power Management user control on System BIOS SETUP allows you to activate and deactivate power saving features.

- Auto Suspend hot-key allows you to suspend the system operation instantly and resume at the press of the power button.
- System Password for User and Supervisor included on the BIOS SETUP Program to protect unauthorized use or your computer.


1.2 Opening the Display Cover

Open your computer display cover by sliding forward the display latches found on the left and right edges. Raise the cover and tilt the display screen to your desired viewing angle.

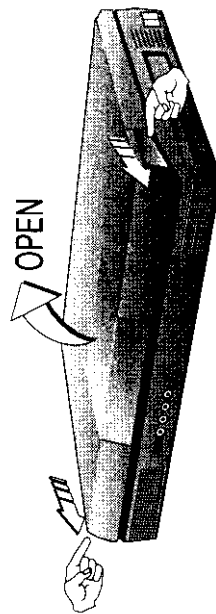

1.3 Inside the Notebook

After opening the display cover, you will find the following parts inside the notebook.

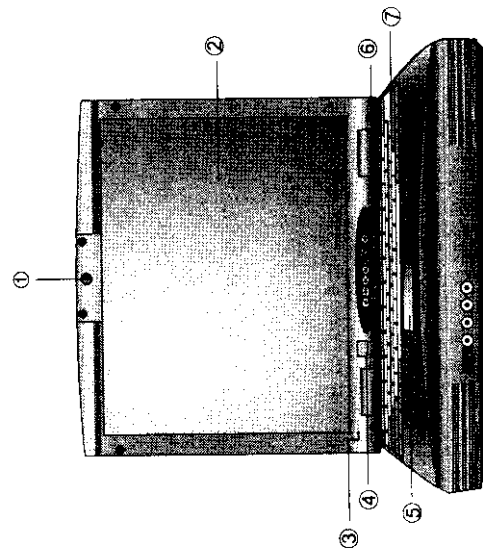


- ① CCD Camera Module
 - ② Color LCD Display
 - ③ Integrated Microphone
 - ④ Power On/Resume Button
 - ⑤ Touchpad Pointing Device
 - ⑥ Status LED Indicator Panel
 - ⑦ Keyboard
- CCD Camera Module
CCD Camera or Camcorder digital camera is built-in and can be used for videoconferencing. It also includes video capture and recording features for editing and playback.

- **Color LCD Display**
 - Flicker-free DSTN or TFT color LCD (liquid crystal display) with 1024x768 XGA or 800x600 SVGA resolution panels. TFT screens provide sharper display compared to DSTN screens but cost more.
 - Capable of displaying 64K colors (16-bit high color) on either SVGA or XGA LCD panels.
 - LCD display control hot-keys allow you to adjust the brightness and contrast of the LCD.
 - Simultaneous display capability for LCD and external desktop computer monitor.
 - LCD display can be upgraded from 12.1" DSTN/TFT or 13" DSTN to 13.3" TFT and 14.1" TFT.
- **Integrated Microphone**
 - Integrated mono microphone for instant voice recording and simultaneous voice conversation.
- **Power on/Resume Button**
 - Switches the computer power on and off, or resumes whenever it is in Suspend mode.
- **Touchpad Pointing Device**
 - Microsoft and IBM PS/2 mouse compatible with two select buttons. Supports tapping selection and dragging function.
- **Status LED Indicator Panel**
 - Informs you of the activity and power status in your computer.

- **Keyboard**
 - Full-sized 86/87 keys keyboard with Windows 95 hot-keys, embedded numeric keypad, 12 function keys, inverted "T" cursor arrow keys, and separate page screen control keys.
 - Wide extra space below the keyboard panel for your wrist or palm to sit-on comfortably during typing.

1.4 The Front Side of the Notebook

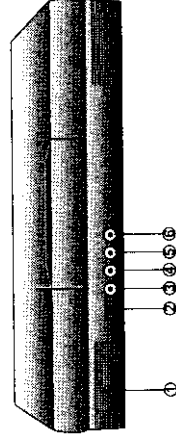


- ① Audio Speaker
- ② Volume Controller
- ③ Headphone Jack
- ④ Stereo Line-out Jack
- ⑤ Stereo Line-in Jack
- ⑥ Microphone Jack

- **Audio Speakers**
 - Integrated left and right mini stereo speakers for sound and audio output.
- **Thumb Wheel Volume Control**
 - Allows you to control the speaker volume.
- **Headphone Jack**
 - Lets you plug in a headphone or earphone set with 1/8 inch phono plug for personal listening.

- **Stereo Line-Out Jack**
Lets you connect an external amplified speaker such as a two-way stereo speaker, or headphones with 1/8 inch stereo phono plug.
- **Stereo Line-In Jack**
Lets you connect an external audio device such as CD player, a tape deck, or a synthesizer as an input source.
- **Microphone Jack**
Lets you connect an external microphone to record sound directly into your notebook computer or have voice conversation.


1.5 The Right Side of the Notebook

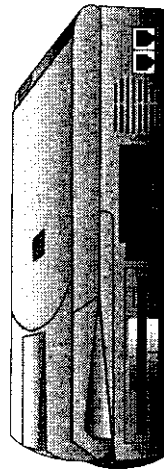

- ① Device Bay 1
- ② PCMCIA Slot
- ③ Cooling Fan Vent
- ④ RJ-11 Modem Jack
- ⑤ RJ-45 LAN Jack

- **Device Bay 1**
This ultra-versatile modular bay offers several configuration flexibility. You can insert the following device packs:
 - (1) FDD – standard option
 - (2) LS-120 Drive
 - (3) 2nd HDD
 - (4) 2nd Battery Pack
 The standard device bay is the 3.5" 1.44 MB FDD.
- **PCMCIA Slot**
 - Lets you connect various PC cards such as Modem cards, Ethernet LAN cards, and SCSI cards.
 - Double-deck PCMCIA slots that support two Type II PC cards, or one Type II and one Type III PC cards at the same time.
 - Supports both 5 V and 3V 32-bit CardBus and 16-bit PC cards including PC cards with ZV function.
- **Cooling Fan Vent**
Emits the heat out of your computer and keeps it within operating temperature.
- **RJ-11 Modem Jack**
This jack connects to the phone line and can only be used when the optional internal 33.6/56Kbps modem is installed.
- **RJ-45 LAN Jack**
This jack connects to the network line and can only be used when you have the optional internal LAN 10/100Base-T module installed.

1.6 The Left Side of the Notebook

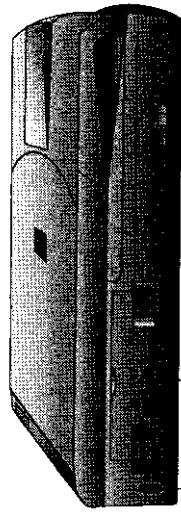


- ① Locking Device Keyhole
- ② Battery Compartment
- ③ Device Bay 2

- **Locking Device Keyhole**
Lets you attach a Kensington security system or a compatible lock to secure your notebook computer.
- **Battery Compartment**
Stores the Nickel Metal-Hydrate (NiMH) or Lithium-Ion (Li-Ion) battery pack for off-the-cord operation or battery recharging.
- **Device Bay 2**
This ultra-versatile modular bay offers several configuration flexibility. You can insert the following device packs:
 (1) CD-ROM Drive – standard option
 (2) DVD-ROM Drive
 (3) LS120 Drive
 (4) FDD
 (5) 2nd HDD

⚠ *You cannot insert the same drive pack on both device bay 1 and 2.*

1.7 The Rear Side of the Notebook

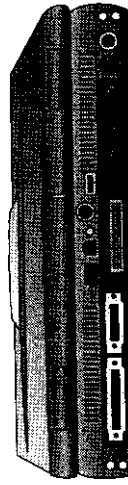


- ① Air Vent
- ② IR Port (FIR/SIR)
- ③ DC-In Port
- ④ PS/2 Port
- ⑤ USB Port

- **Air Vent**
Allows air to flow inside the computer.
- **IR Port (FIR/SIR)**
Wireless data transfer of files between your notebook computer and an IR-equipped device or notebook computer. You can also print to an IR-equipped printer without needing to attach the printer cable. The Fast IR (FIR) mode provides up to 4Mbps of data transfer rate.
- **DC-In Port**
Lets you connect the AC power adapter or Car Cigarette power cable in supplying continuous power to your notebook and recharging the battery.
- **PS/2 Port**
Lets you connect an external PS/2-style mouse, PS/2-style keyboard, or PS/2-style numeric keypad to the system. With an optional Y-cable adapter, you also can connect any combination on two of these devices simultaneously.

• USB (Universal Serial Bus) Port

Allows you to connect and daisy-chain various USB peripheral devices such as printer, monitor, or scanner to your notebook.

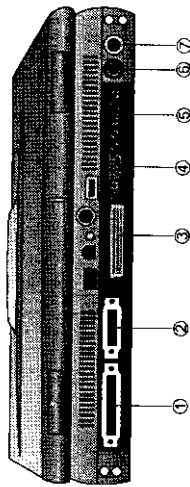

- ① Printer Port (LPT1) ⑤ VGA Port (CRT)
- ② Game/MIDI Port ⑥ TV Out Port (AV)
- ③ Docking Port ⑦ TV Out Port (S-Video)
- ④ Serial Port (COM1)

• Printer Port (LPT1)

Lets you connect a 25-pin parallel device such as printer, pocket LAN adapter, ZIP storage drive, or data cable for file transfer.

• Game/MIDI Port

Lets you connect an external standard PC game joystick or MIDI device.

• 240-Pin Docking Port

Lets you connect to the notebook Port Replicator or MINI docking station for full desktop function.

• Serial Port (COM1)

Lets you connect a 9-pin external pointing device such as a high-speed modem, mouse, or other serial devices.

• VGA Port (CRT)

Lets you attach an external CRT monitor for wider display. You can run the LCD display and the external CRT monitor simultaneously or switch it to CRT only using the display hot-key.


• TV Out Port (AV)

Provides one AV (RCA) jack for VGA output display to any NTSC/PAL television set.

• TV Out Port (S-Video)

Also provides one S Video jack for VGA output display to any NTSC/PAL television set.

1.8 The Underside of the Notebook

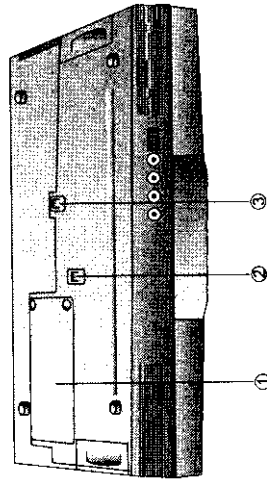

- ① Memory Compartment ③ Device Bay 2 Latch
- ② Device Bay 1 Latch

• Memory Compartment

- Provides two 64-bit 144-pin memory slots for inserting and upgrading the system memory.
- Supports Fastpage, EDO, and SDRAM SODIMM modules.

• Device Bay 1 latch

Lets you remove any device installed in device bay 1 by sliding the latch and pulling the device pack.

• Device Bay 2 latch

Lets you remove any device installed in device bay 2 by sliding the latch and pulling the device pack.