

INDUSTRY-LEADING SYSTEM BOARD TECHNOLOGY

Distinguishing TYAN from the competition is simple - engineering, time-to-market and quality. With local design centers located worldwide, TYAN engineers work closely with key suppliers and customers to provide high-quality designs and exceptional time-to-market advantages. To insure the highest levels of quality, all TYAN products are designed and manufactured in ISO9001/9002 certified facilities, and are covered by our industry-leading manufacturer's warranty.

TYAN Computer Corporation designs, develops and manufactures innovative Internet platforms for high-performance, mission-critical computing environments. Our award-winning product line includes a wide variety of single, dual, and multi-processor platforms that are perfectly suited to meet the performance requirements of today's most demanding server, workstation and desktop applications.

ABOUT TYAN

TYAN Computer Corporation, founded in 1989 by long-time Intel and IBM executive Dr. T. Symon Chang, designs, manufactures and markets advanced system board technology. Our products are sold to OEMs, Systems Integrators, VARs and Resellers worldwide. Over the last decade, TYAN has consistently been one of the fastest growing technology companies in the United States. TYAN was named to the prestigious INC 500 in 1997 and 1998 (19th fastest growing U.S. company in 1997). TYAN was also ranked by Deloitte & Touche as one of the USA's "Fast 500", as well as one of Silicon Valley's "Fast 50" companies in 1998. For more information, visit us on the World Wide Web site at: <http://www.tyan.com>

TYAN

TYAN Computer Corporation
3288 Laurelview Court
Fremont, CA 94538

High Performance Barebone System

TYAN

B2094T15 Transport GS10

#D 1532-100
Revision 1.00

User's Manual



Transport GS10

/ / /

B2094T15

Revision 1.00

Copyright © TYAN Computer Corporation, 2003. All rights reserved. No part of this manual may be reproduced or translated without prior written consent from TYAN Computer Corp.

All registered and unregistered trademarks and company names contained in this manual are property of their respective owners including, but not limited to the following:

TYAN, Transport GS10 B2094T15 are trademarks of TYAN Computer Corporation.

Intel, Xeon, and combinations thereof are trademarks of Intel Corporation.

Phoenix BIOS are trademarks of Phoenix Technology.

Microsoft, Windows are trademarks of Microsoft Corporation.

IBM, PC, AT, PS/2 are trademarks of IBM Corporation.

Promise is a trademark of Promise Technology.

ATI, ATI RAGE is a trademark of ATI Technologies Incorporated.

Winbond is a trademark of Winbond Electronics Corporation.

Portable Document Format (PDF) is a trademark of Adobe Corporation.

Information contained in this document is furnished by TYAN Computer Corporation and has been reviewed for accuracy and reliability prior to printing. TYAN assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TYAN products including liability or warranties relating to fitness for a particular purpose or merchantability. TYAN retains the right to make changes to product descriptions and/or specifications at any time, without notice. In no event will TYAN be held liable for any direct or indirect, incidental or consequential damage, loss of use, loss of data or other malady resulting from errors or inaccuracies of information contained in this document.

Table of Contents

	Safety Precautions	4
1	Introduction	5
1.1	Before You Begin	5
	Unpacking	5
1.2	Product Description	6
1.3	Specifications	7
1.4	System View	8
	Front View	8
	Rear View	9
2	Cabinet Installation	11
	System Assembly Flowchart	12
2.1	System Assembly	13
	Opening the Cover	13
	Installing the CPU	13
	Installing System Memory	15
	Installing a Hard Disk Drive	16
	Installing a Riser Card	17
2.2	Rack Mounting	18
	Cabinet Slides and Ears	18
	Cabinet into the Rack	20
	Locking Tab	20
3	Setting Up the System	21
3.1	System Requirements	21
3.2	Placing the System	21
3.3	Making the Connection	22
3.4	Configuring the System	23
	Before You Begin	23
	Using the LCD Console	23
	Setting the Configuration	24
	Setting Up With the Web Browser	26
3.5	Rebooting the System	26
3.6	Powering Down the System	26
3.7	Linux RedHat Installation Notes	27

4	Configuring the System	29
4.1	BIOS Setup Program	29
	Starting BIOS Setup	29
	Main Menu	30
	Advanced Menu	30
	Security Menu	32
	Power Menu	32
	Boot Menu	33
	Exit Menu	33
4.2	Jumper Settings	34
5	Installing Software Drivers	35
5.1	Installation Instructions for Windows	35
5.2	Installation Instructions for Linux RedHat	36
	LCD Driver	36
	RAID (Redundant Arrays of Inexpensive Disks) Driver	36
6	Expanding the System	39
6.1	Opening the Cover	39
6.2	Installing an Expansion Card	40
6.3	Adding a Secondary Hard Disk Drive	41
6.4	Adding a CD Drive (for test purpose)	43
	With a Secondary Hard Disk Drive Installed	43
	Without a Secondary Hard Disk Drive Installed	44
7	Using RAID	45
7.1	About RAID	45
7.2	Creating an Array	46
	Creating an Array for Performance (RAID 0)	47
	Creating a Security Array (RAID 1) with New Drives	47
	Creating a Security Array (RAID 1) With an Existing Data Drive and a New Drive	47
7.3	Viewing Drive Assignments	48
7.4	Changing the Array	49
	Deleting an Array	49
	Rebuilding a Mirrored Array	49
8	Appendix	51
	Caution Texts Concerning Lithium Batteries	51
	Technical Support	52

Safety Precautions

- Use the type of power indicated on the marking label.
- Ensure electrical circuits are not overloaded; consider the nameplate ratings of all the connected equipment and ensure you have over current protection.
- Do not disable the power cord ground feature. This equipment was designed to connect to a grounded (earthed) power outlet. The grounding plug is an important safety feature.
- Ensure that the power outlet is located or installed near the equipment and is easily accessible.
- Do not allow anything to rest on the power cord. Do not locate this product where persons will walk on the cord.
- Ensure the ambient temperature around the equipment (which may be higher than the room temperature) is within the limits specified in section 1.3.
- Slots and openings in the cabinet are provided for ventilation. Do not block or cover these openings. Do not push objects of any kind into cabinet slots or openings.
- Do not allow USB devices to be hot plugged during installation of the Linux operating system.
- Use the command '**expert**' to start Linux installation during '**boot:**' when prompted, if you want to use the RAID function on your system. Insert the RAID driver diskette for Linux when prompted into the USB floppy drive, and follow the onscreen instructions to complete the installation process.

1 Introduction

This chapter introduces the features and functions of the product.


1.1 Before You Begin

This manual provides hardware-related information of the system for administrators who use it to develop and host web sites. The administrators should be familiar with operating systems and web browsers.

Depending on the model purchased, your system may come with pre-installed software. For software information, refer to the documentation accompanying the software.

Unpacking

After unpacking the shipping carton, you should find these standard items:



1x Transport GS10 chassis



1x heatsink



2x two-headed IDE cable




1x three-headed IDE cable



1x three-headed power cable



1 pair mounting ears



Rack slides (option)



Mounting screws



1x User's Manual



1x driver CD



1x software driver floppy disk for RAID


Inspect all the items. If any item is damaged or missing, notify your dealer immediately.

Keep the shipping carton and packing materials in case you need to ship or store the computer in the future.

1.2 Product Description

Congratulations on purchasing the system. It is a server appliance providing a dedicated web-hosting platform, pre-packaged in an industry standard 1U rackmount enclosure.

With appropriate application software, the system offers a full suite of Internet services including web publishing, file transfer and email services. And through a browser, the administrator can easily maintain the server through any client device.

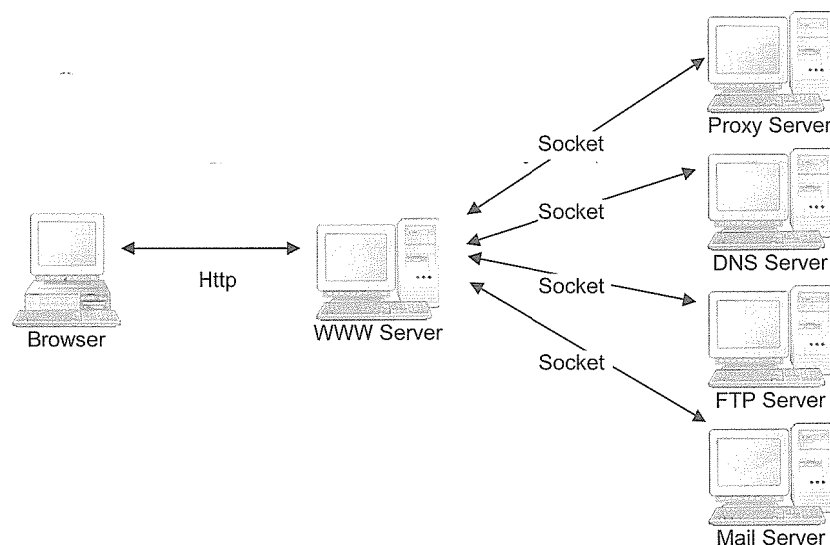

1.3 Specifications

NOTE: Specifications are subject to change without notice.

Processor

- Single socket 478
- Intel® Pentium 4 processor up to 3.06 GHz
- Supports 400/533 MHz FSB

Chipset

- Intel 845E MCH
- MCH + ICH-4
- NS PC87366 Super I/O chip

Memory

- Dual channel memory bus
- Two 184-pin DDR DIMM slots
- DDR 200/266 support
- Up to 2 GB of unbuffered DDR
- Supports non-ECC/ECC type memory modules

Expansion Slot

- 32-bit/33MHz PCI v2.2 slot

Integrated PCI Graphics

- ATI® Rage™ XL PCI graphics controller
- 8 MB frame buffer of video memory

External I/O Ports (Rear)

- One 9-pin UART serial port
- One VGA port
- Two RJ-45 LAN connectors
- Two USB 2.0 ports

Front Panel Features

- LED Indicators
 - Power
 - LAN 1 and LAN 2 Link/Activity
 - HDD
- LCD interface
 - 2 x 16 digits
 - Connected via COM2
 - Four direction buttons plus one "Select" and one "Cancel" button

Networking

- Two 10/100Base-TX Ethernet LAN ports (Intel 82551QM controller)
- Supports TCP, UDP, IPv4 Checksum off-load

Storage Interface

- Integrated two master IDE RAID controller (Promise PDC20276)
- Supports RAID level 0, 1

Storage Capacity

- Up to two IDE drives

Integrated Hardware Monitoring

- Integrated in Super I/O
- CPU temperature and voltage monitoring
- CPU and system fan speed monitoring and control
- 3 x 3-Pin header for system fans

BIOS

- Phoenix BIOS on 4 MB Flash (FWH)
- ACPI 1.0b / APM 1.2
- Detect function of H/W monitoring
- Auto configuration of IDE hard disk types
- Quick boot and multiple boot options
- LAN remote boot (PXE) support
- Power Management: S1 and S5-type

Environment

- Operating temperature:
0 °C (32 °F) to 40 °C (104 °F)
- Operating humidity:
0 % to 80 % non-condensing

Cabinet Form Factor

- Sub-1U rack-mountable chassis
- Dimension:
W16.7 x D15.3 x H1.7 inch
W424 x D387.7 x H43.5mm
- Weight: 7 kg

Power Supply

- ATX12V 250W with PFC

Accessory

- One 32-bit single PCI riser card

Regulatory

- FCC Class A (Declaration of Conformity)
- CE (Declaration of Conformity)