


Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

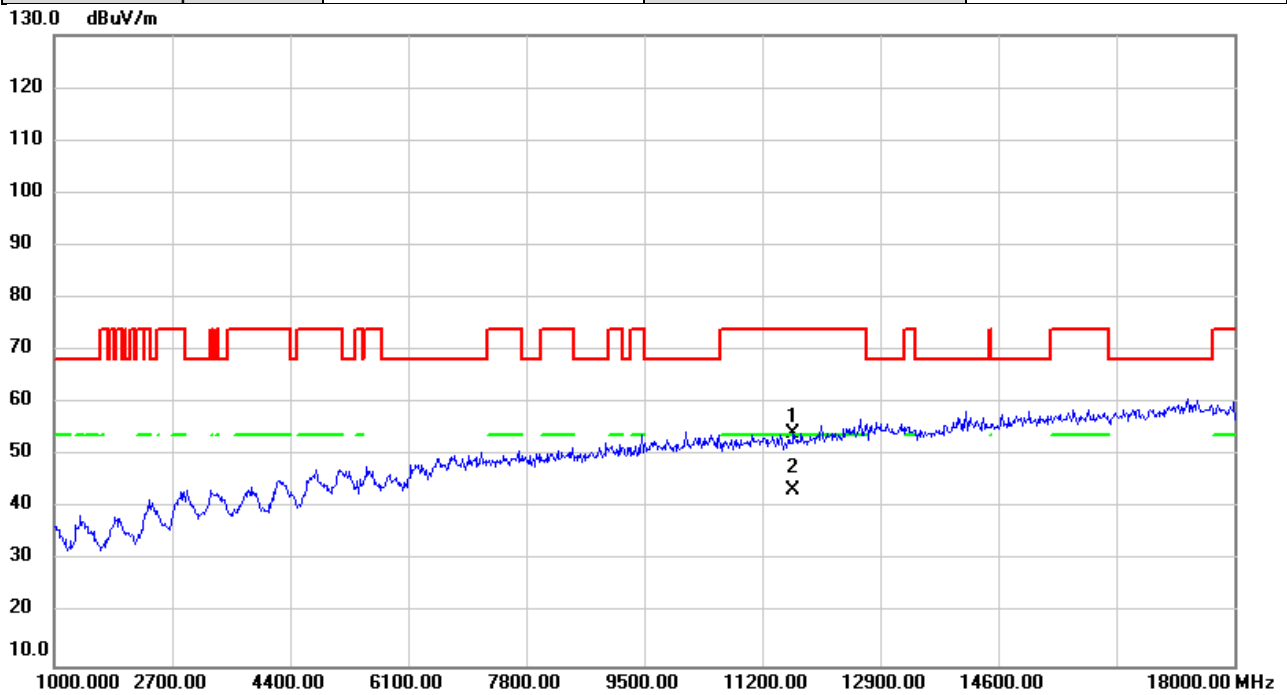


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	47.56	6.59	54.15	74.00	-19.85	peak	
2	*	11650.00	36.88	6.59	43.47	54.00	-10.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) $\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}.$

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

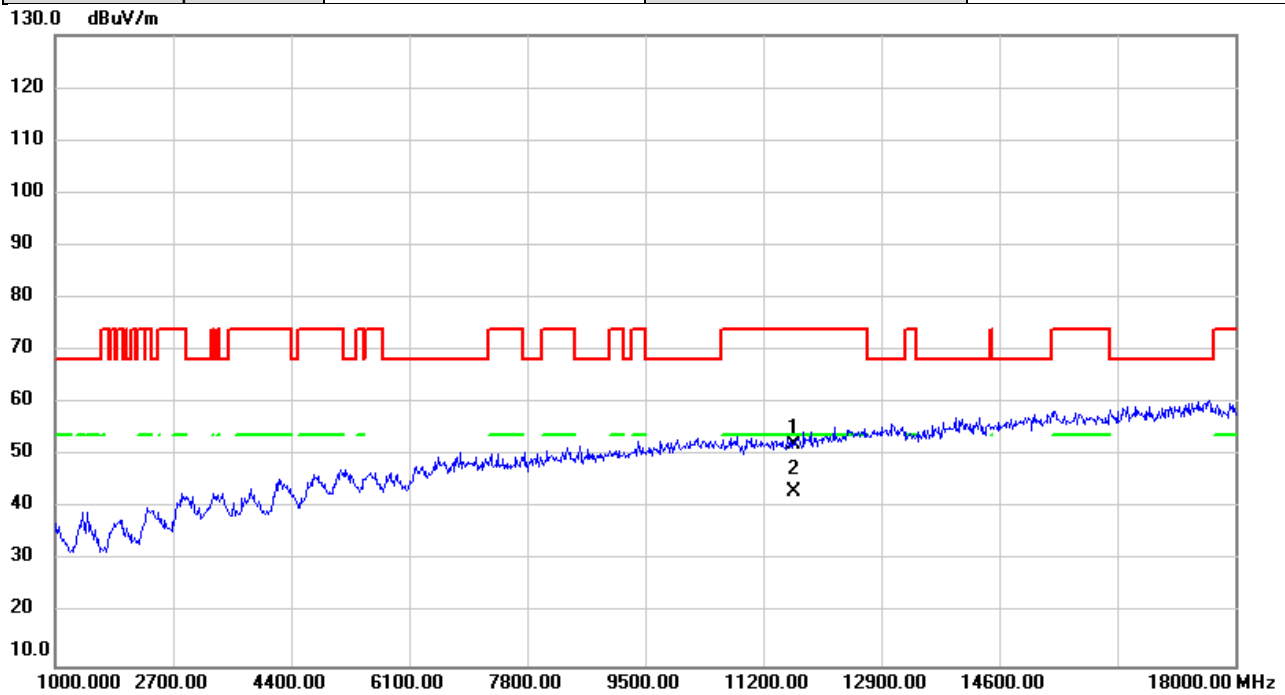


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	45.67	6.59	52.26	74.00	-21.74	peak	
2	*	11650.00	36.51	6.59	43.10	54.00	-10.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

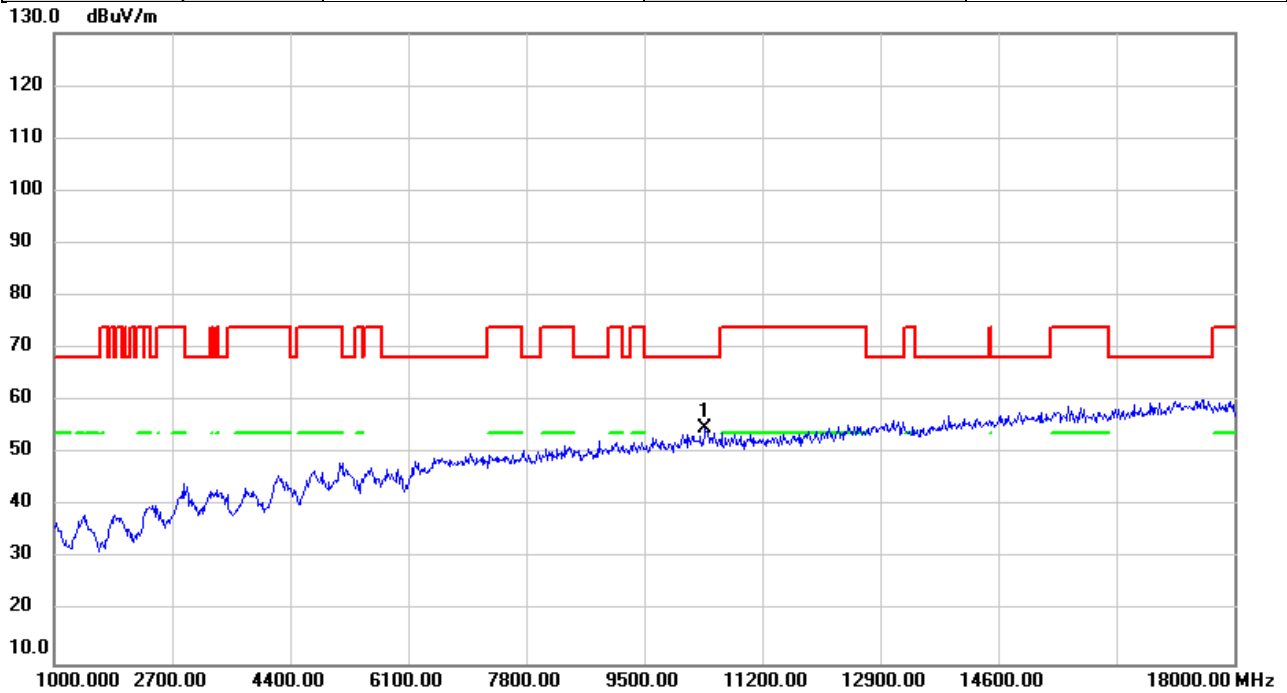


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	47.75	7.08	54.83	68.20	-13.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

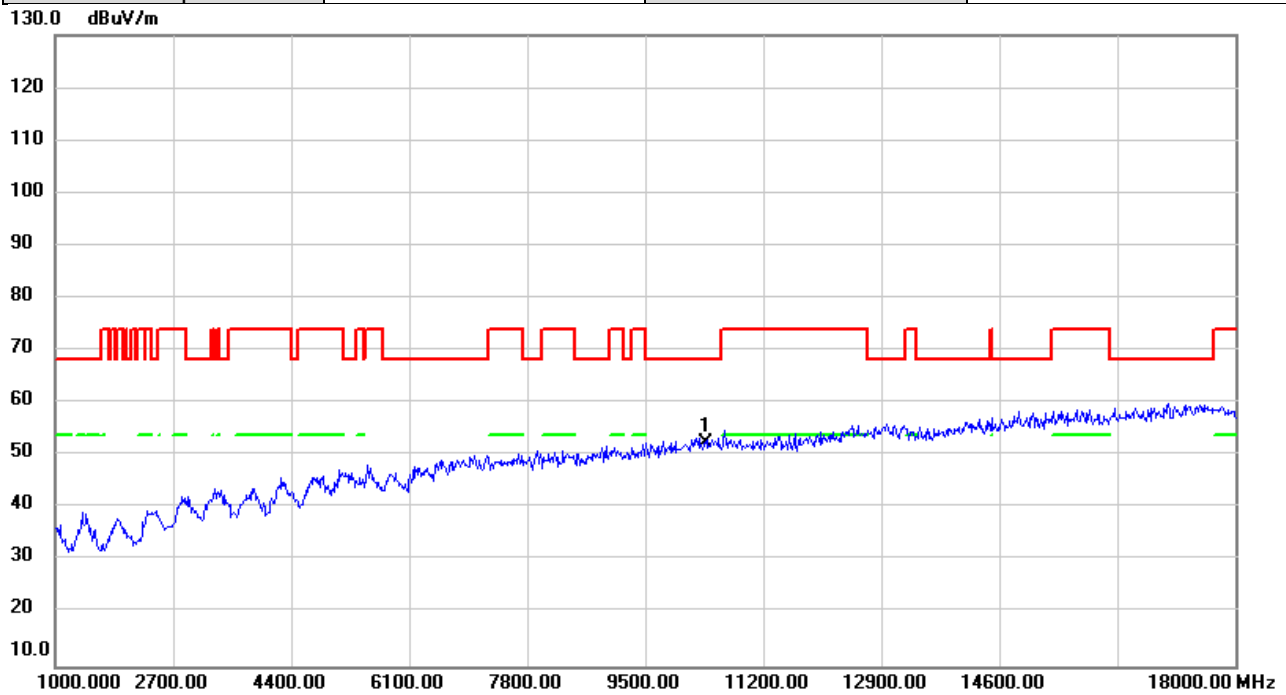


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	45.46	7.08	52.54	68.20	-15.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

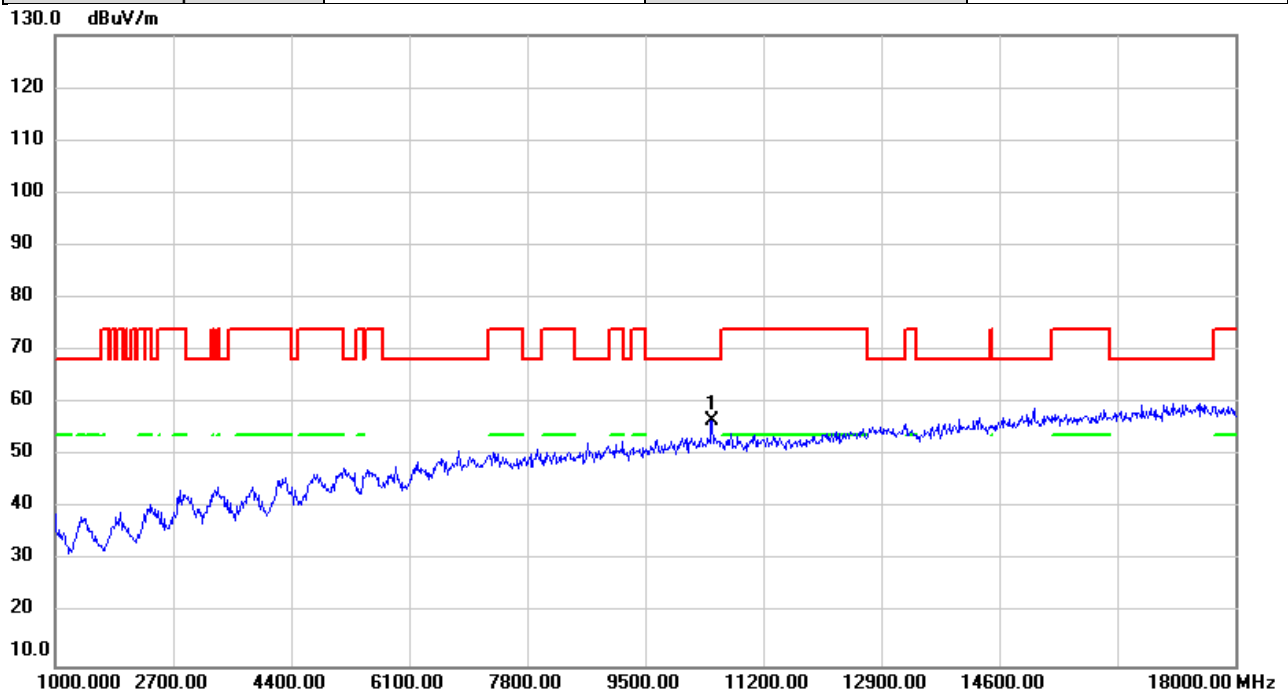


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	49.68	7.10	56.78	68.20	-11.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

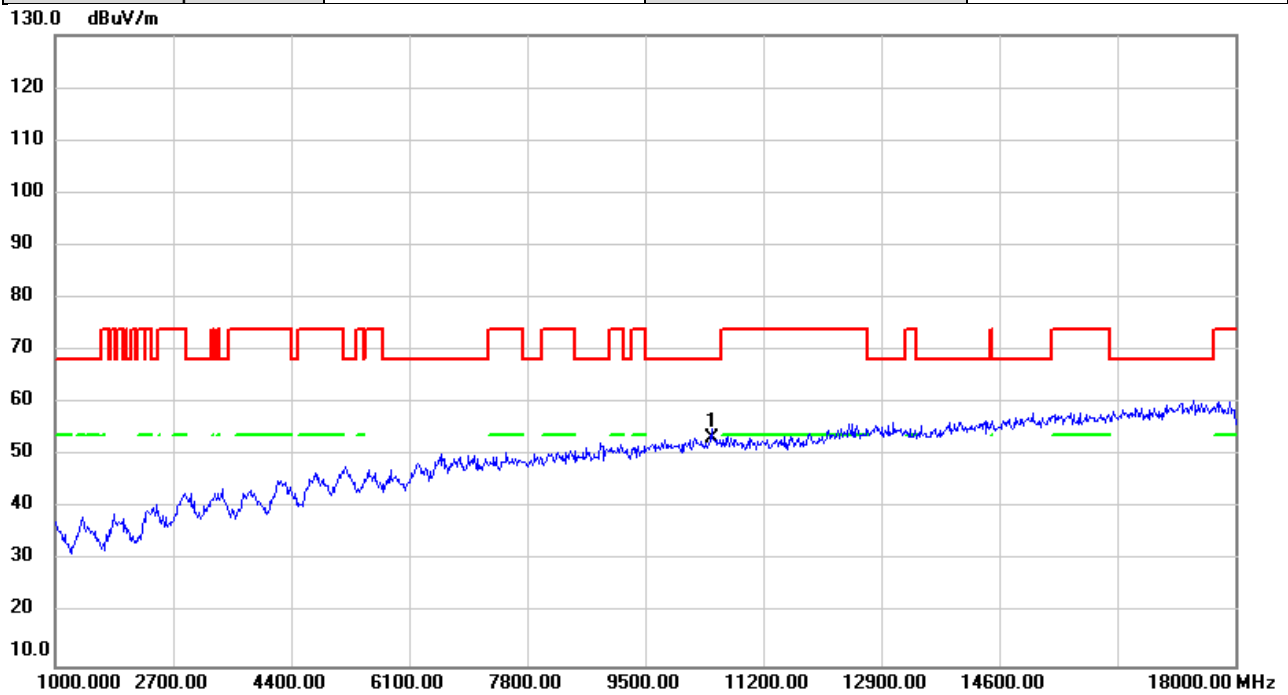


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	46.21	7.10	53.31	68.20	-14.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

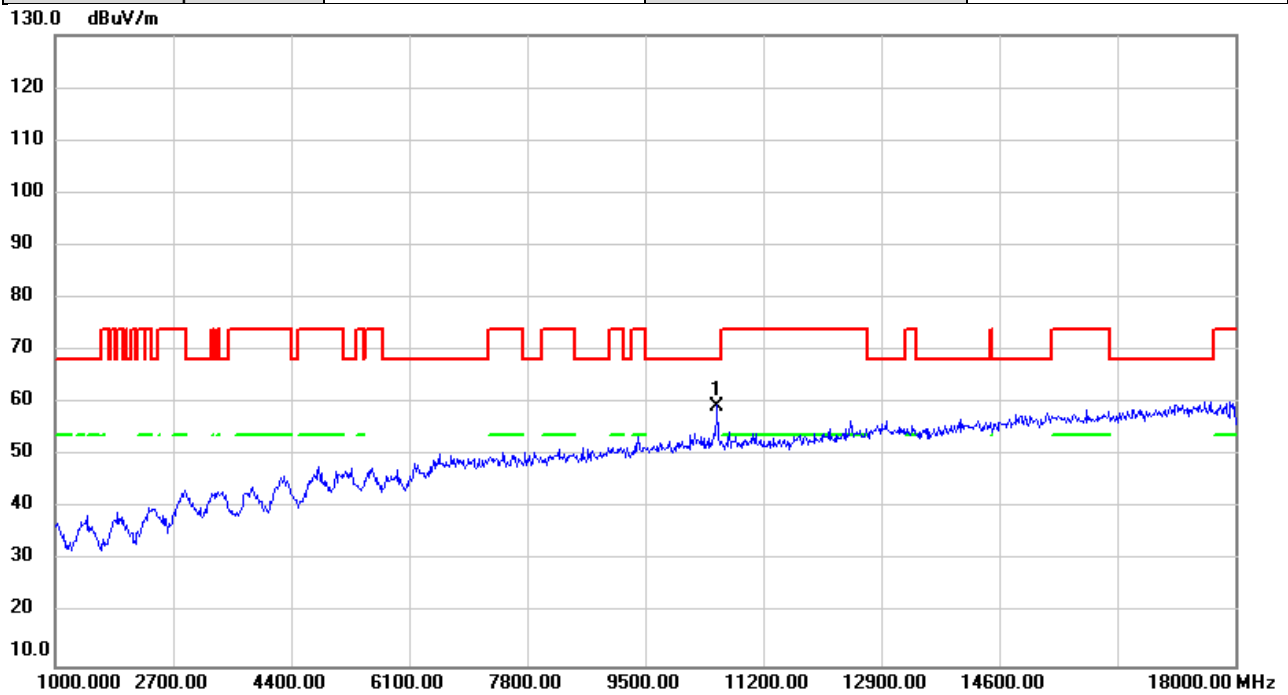


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	52.46	7.04	59.50	68.20	-8.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

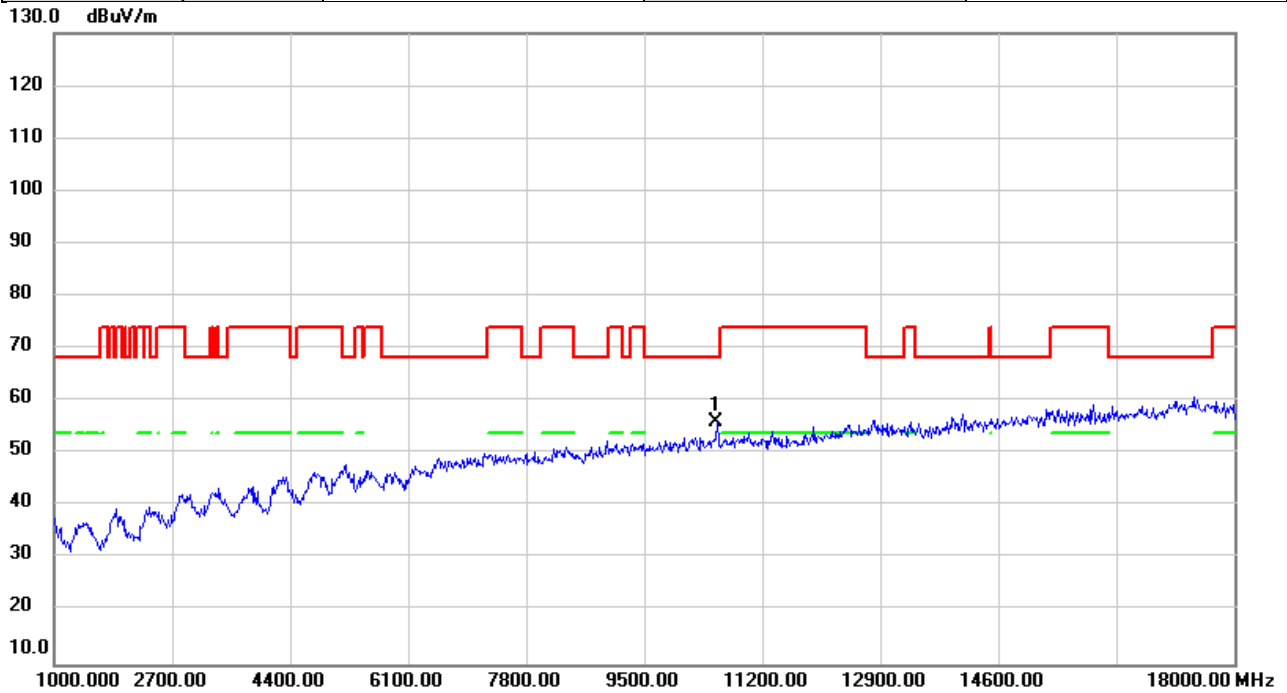


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	49.12	7.04	56.16	68.20	-12.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

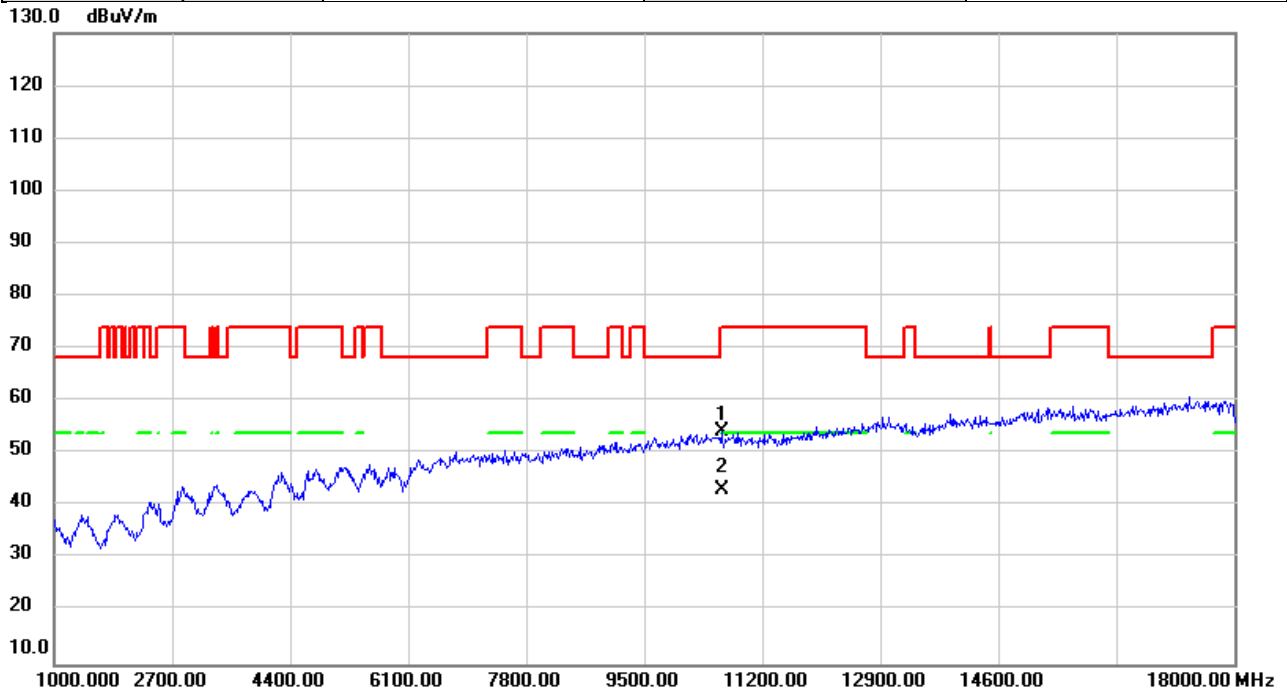


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	47.26	6.92	54.18	74.00	-19.82	peak	
2	*	10620.00	36.24	6.92	43.16	54.00	-10.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

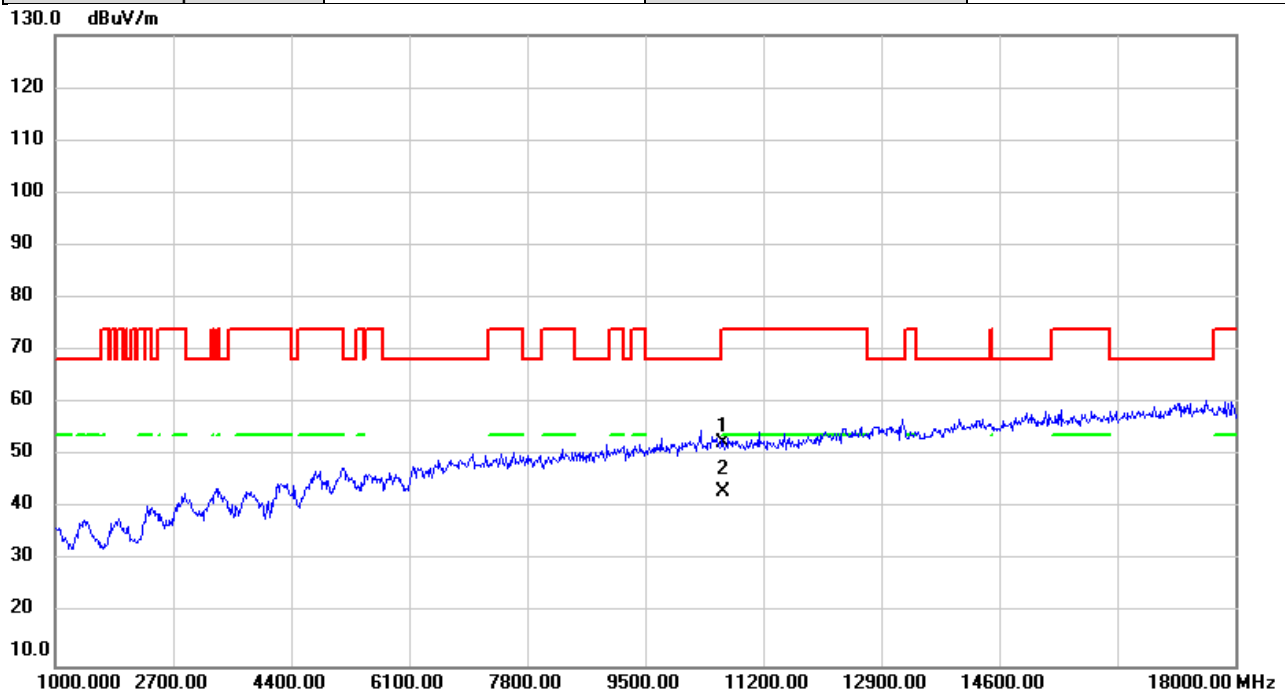


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	45.67	6.92	52.59	74.00	-21.41	peak	
2	*	10620.00	36.11	6.92	43.03	54.00	-10.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

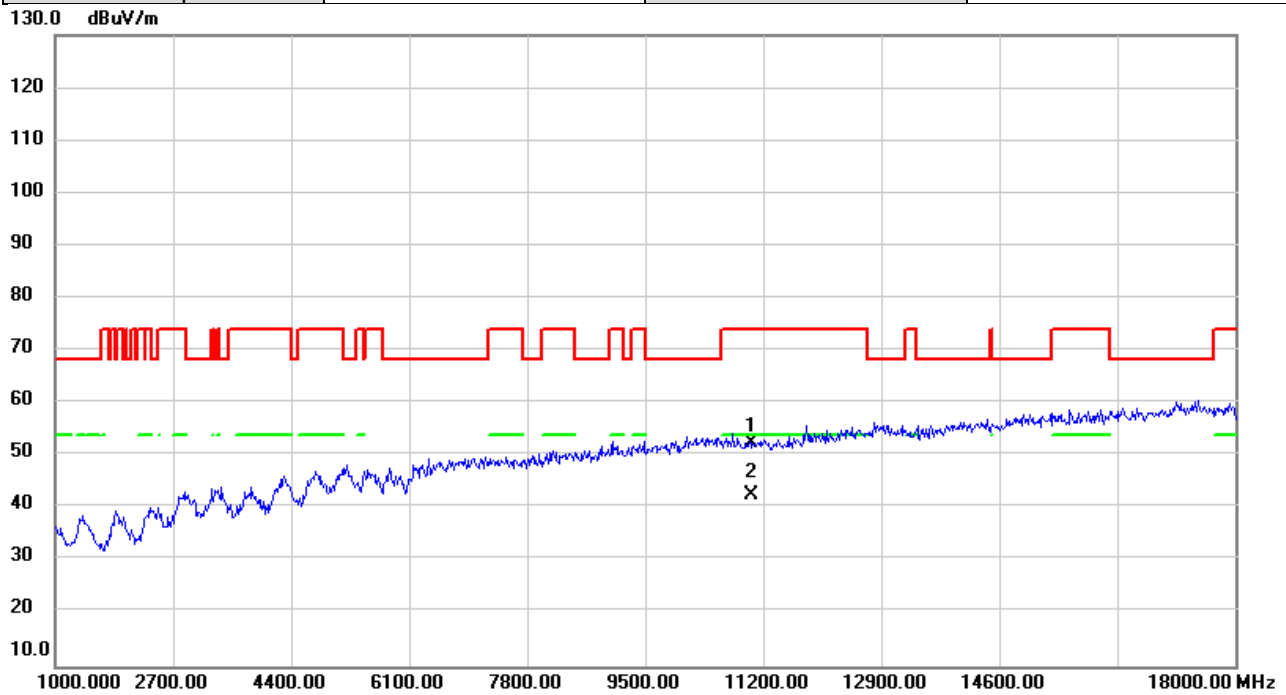


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	45.98	6.36	52.34	74.00	-21.66	peak	
2	*	11020.00	36.24	6.36	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

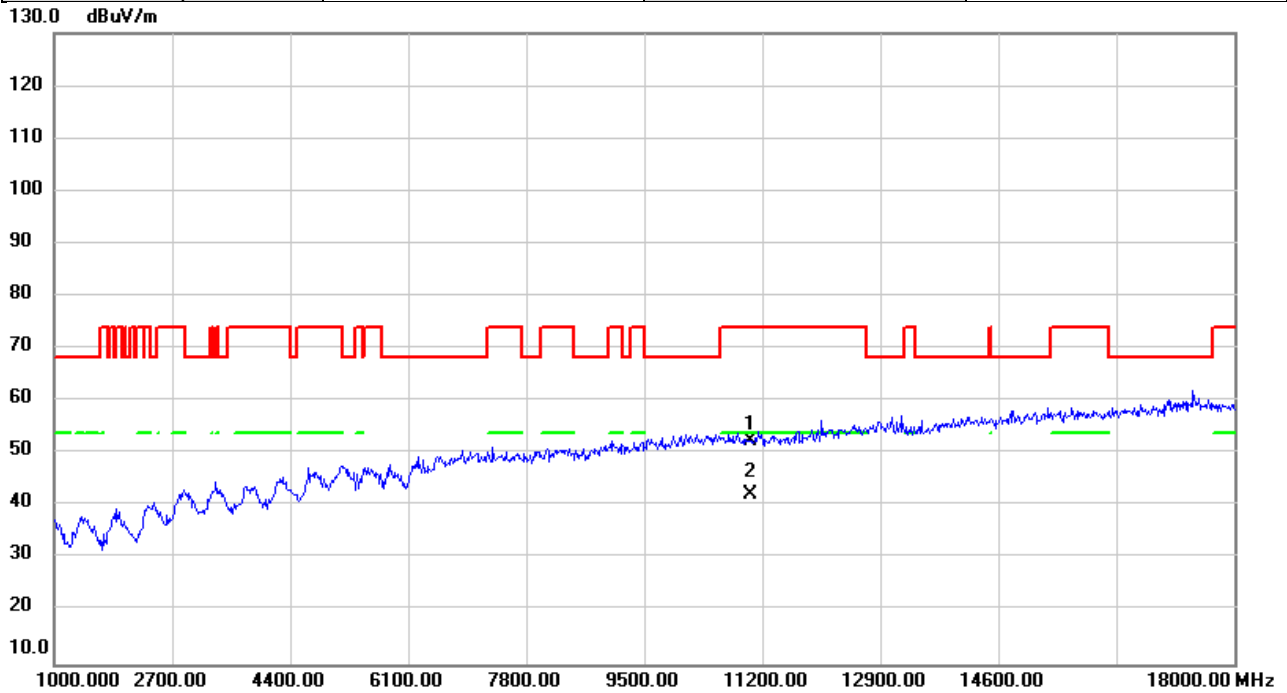


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.10	6.36	52.46	74.00	-21.54	peak	
2	*	11020.00	35.92	6.36	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5550MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

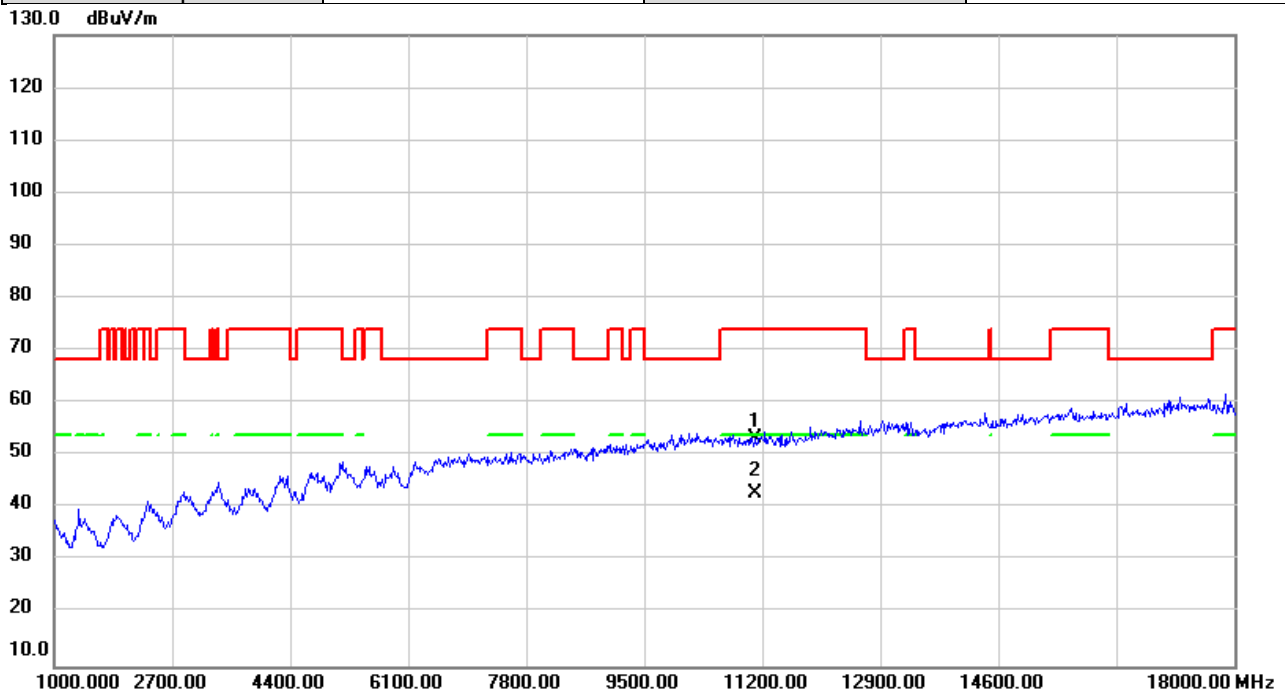


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	47.06	6.37	53.43	74.00	-20.57	peak	
2	*	11100.00	36.38	6.37	42.75	54.00	-11.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5550MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

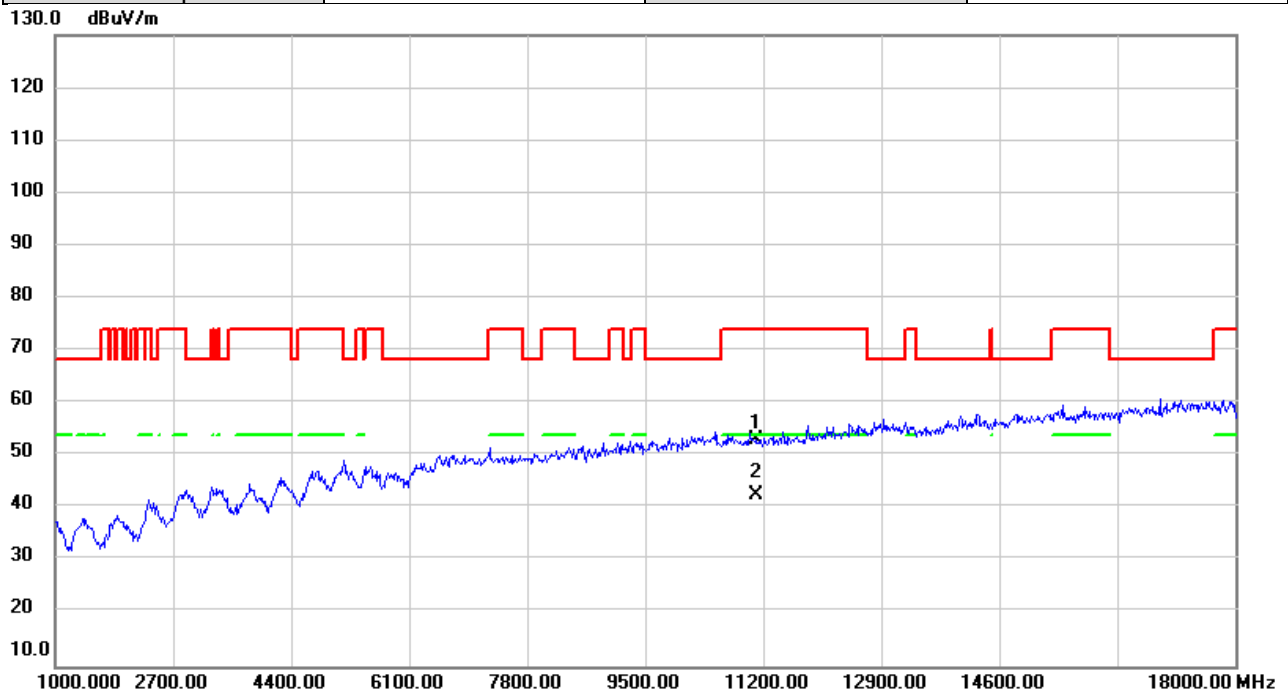


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	46.54	6.37	52.91	74.00	-21.09	peak	
2	*	11100.00	36.16	6.37	42.53	54.00	-11.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

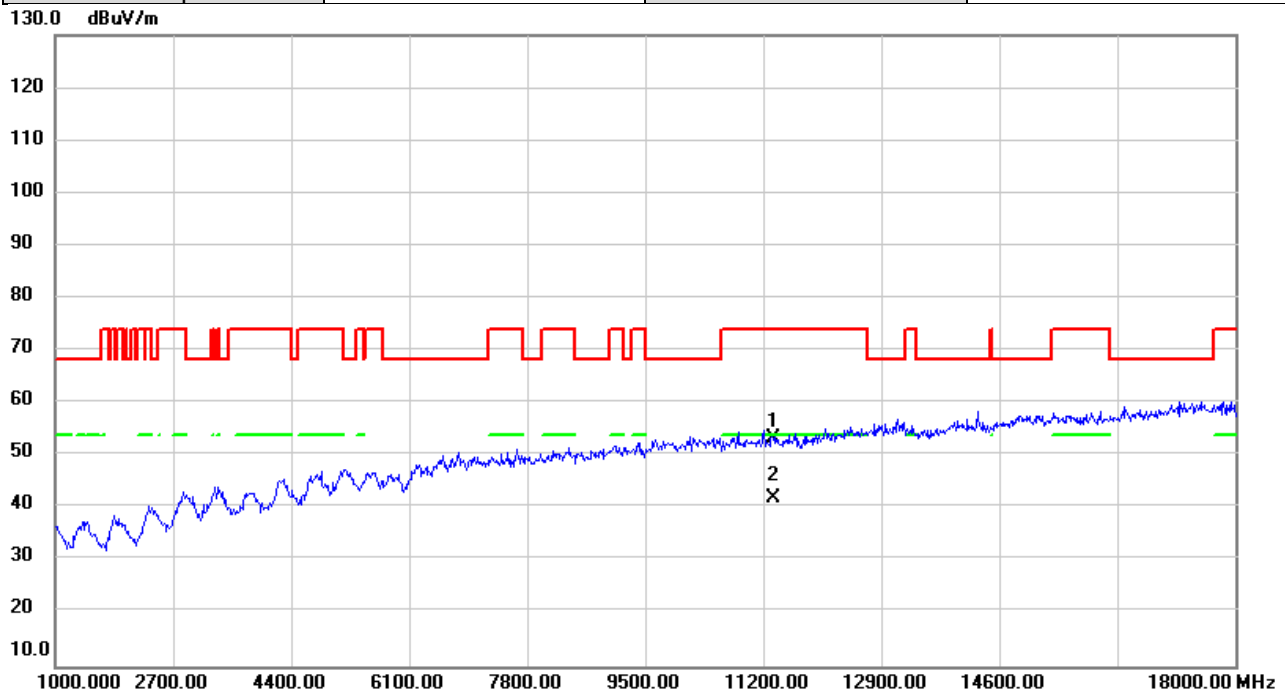


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	47.08	6.40	53.48	74.00	-20.52	peak	
2	*	11340.00	35.57	6.40	41.97	54.00	-12.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

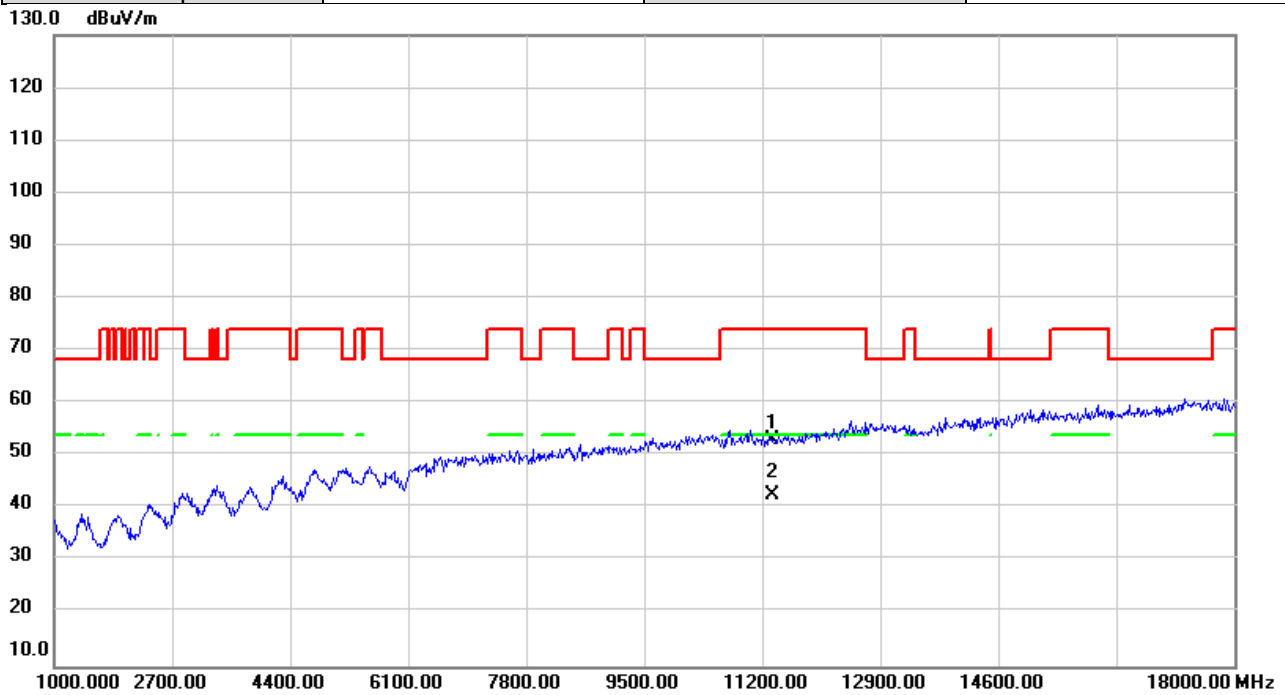


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	46.57	6.40	52.97	74.00	-21.03	peak	
2	*	11340.00	36.19	6.40	42.59	54.00	-11.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5710MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

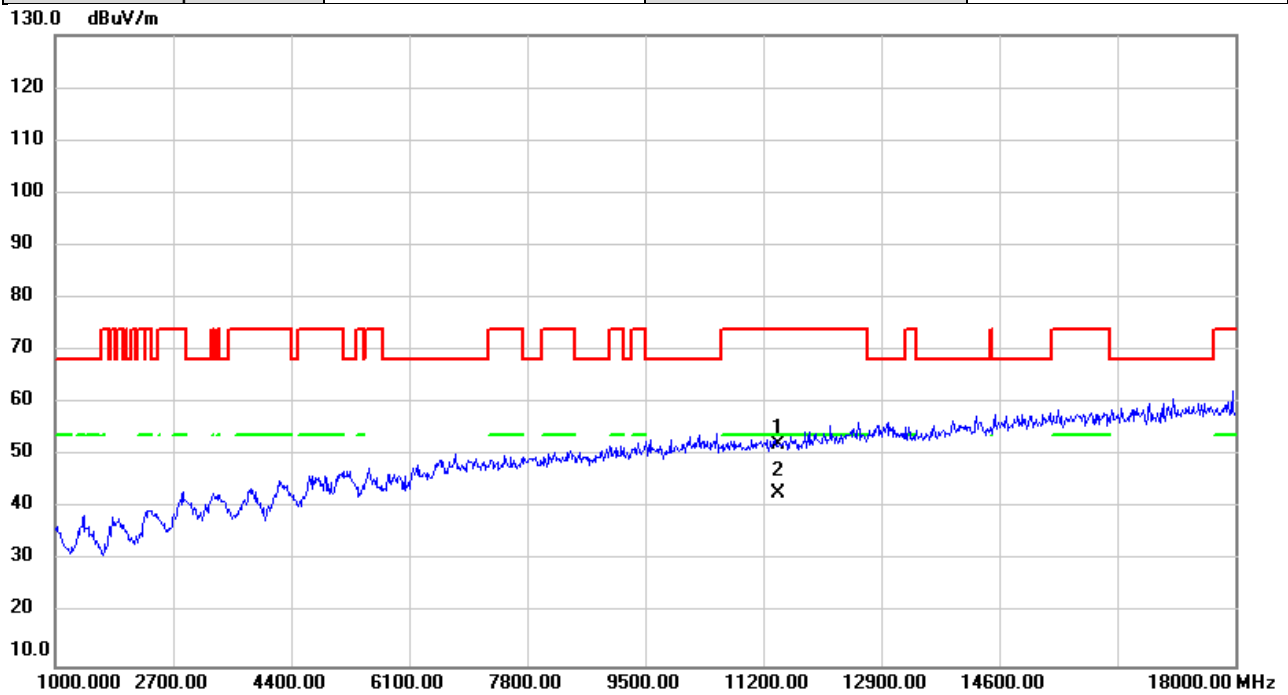


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	45.86	6.41	52.27	74.00	-21.73	peak	
2	*	11420.00	36.57	6.41	42.98	54.00	-11.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5710MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

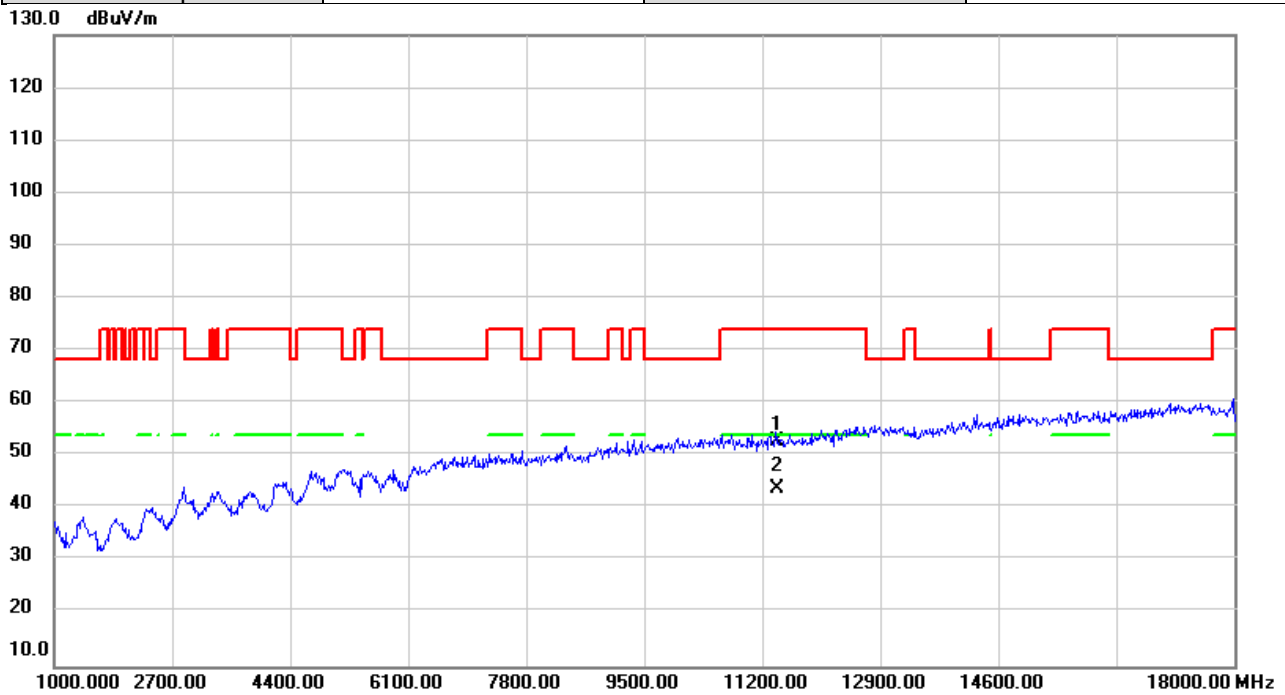


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	46.34	6.41	52.75	74.00	-21.25	peak	
2	*	11420.00	37.38	6.41	43.79	54.00	-10.21	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

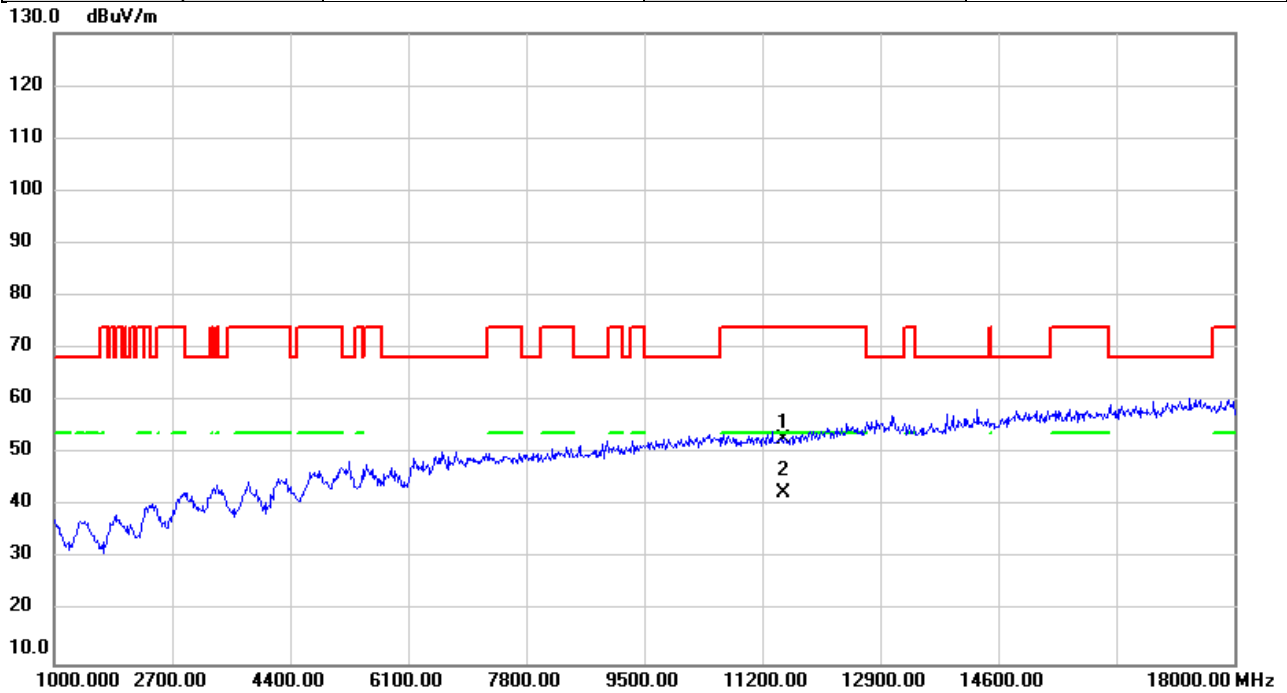


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	46.43	6.43	52.86	74.00	-21.14	peak	
2	*	11510.00	36.25	6.43	42.68	54.00	-11.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

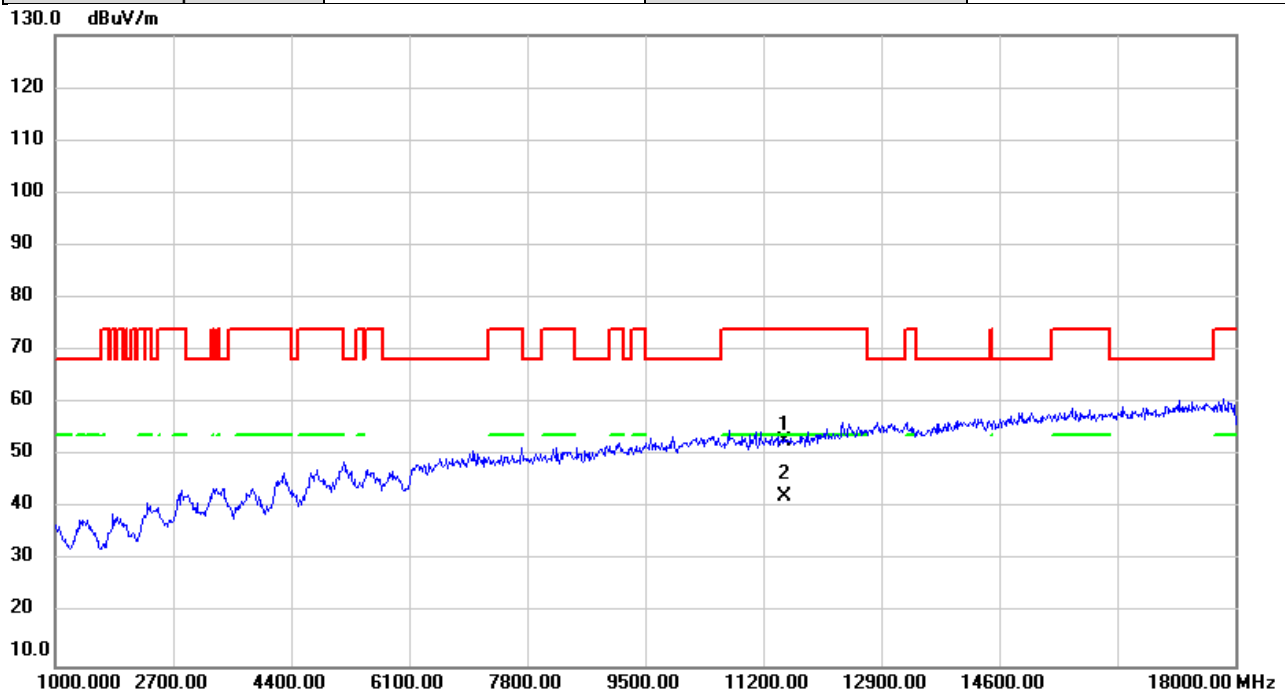


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	46.46	6.43	52.89	74.00	-21.11	peak	
2	*	11510.00	35.96	6.43	42.39	54.00	-11.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

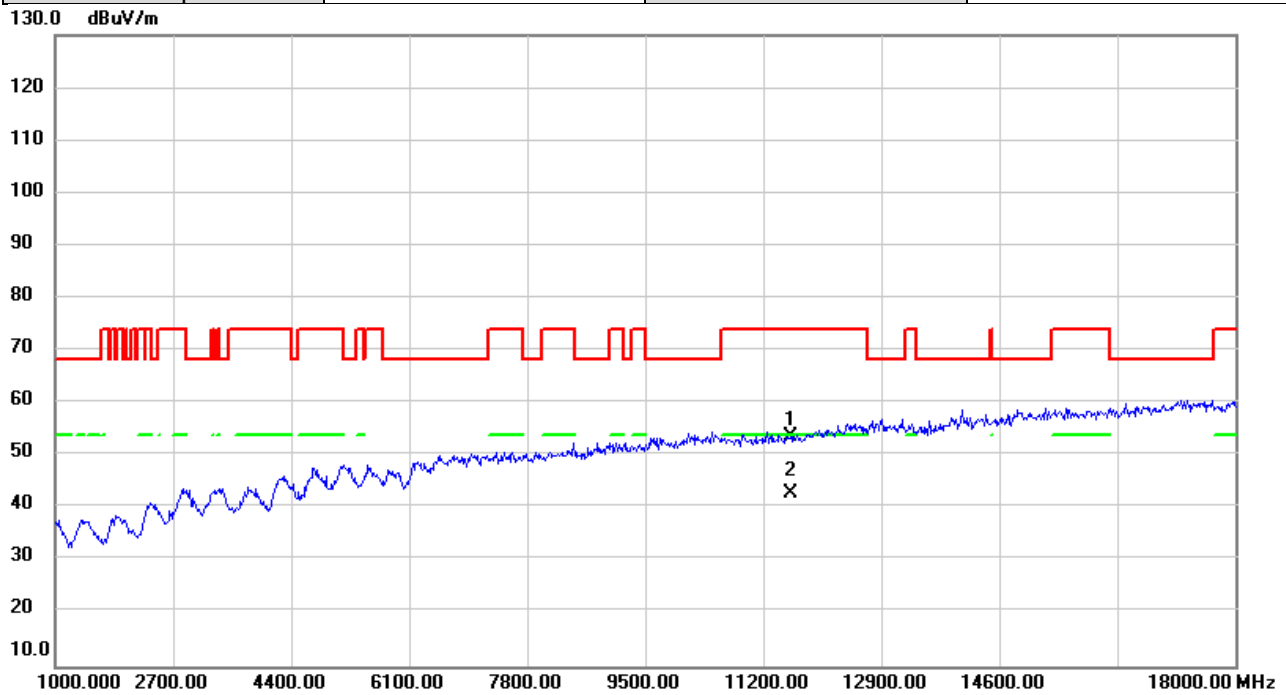


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	47.20	6.53	53.73	74.00	-20.27	peak	
2	*	11590.00	36.47	6.53	43.00	54.00	-11.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

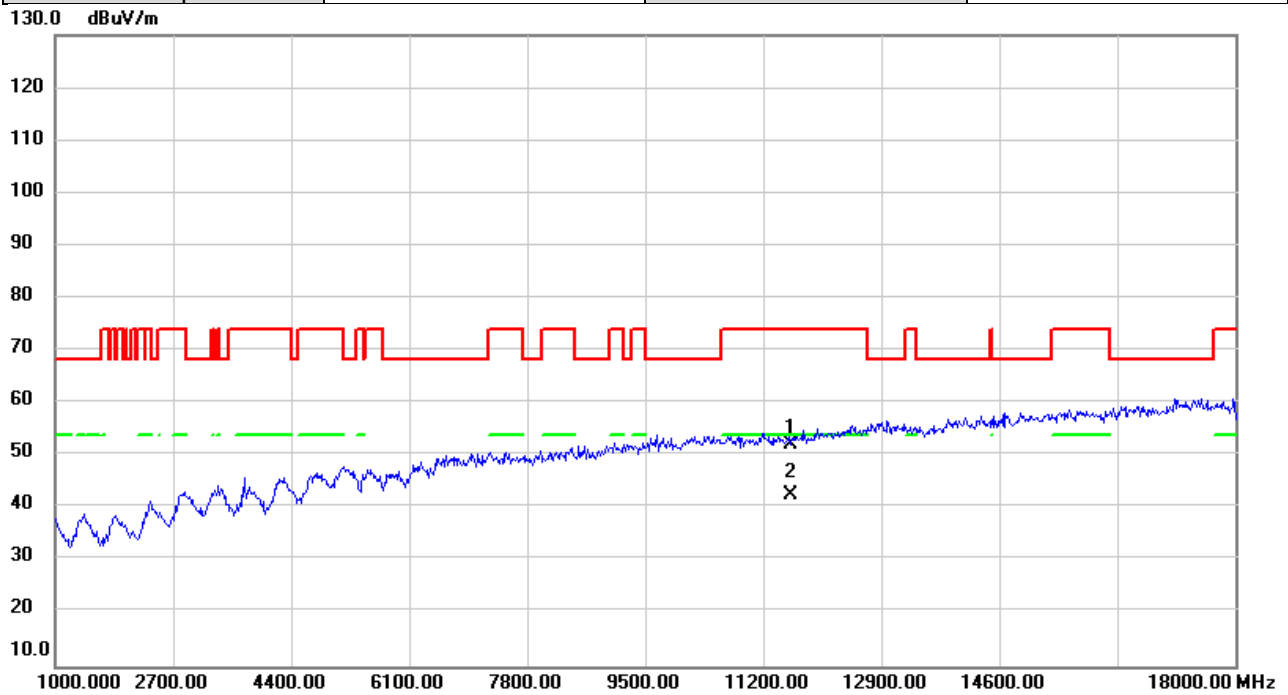


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	45.64	6.53	52.17	74.00	-21.83	peak	
2	*	11590.00	35.90	6.53	42.43	54.00	-11.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

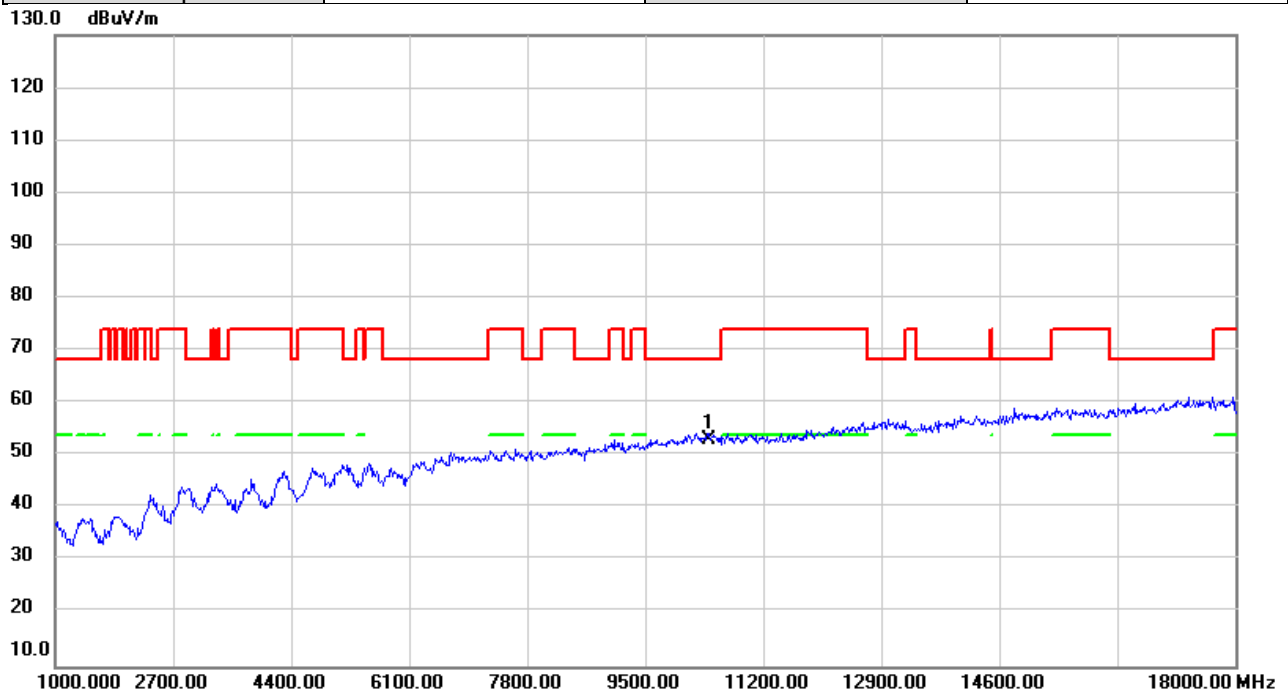


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	46.03	7.08	53.11	68.20	-15.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

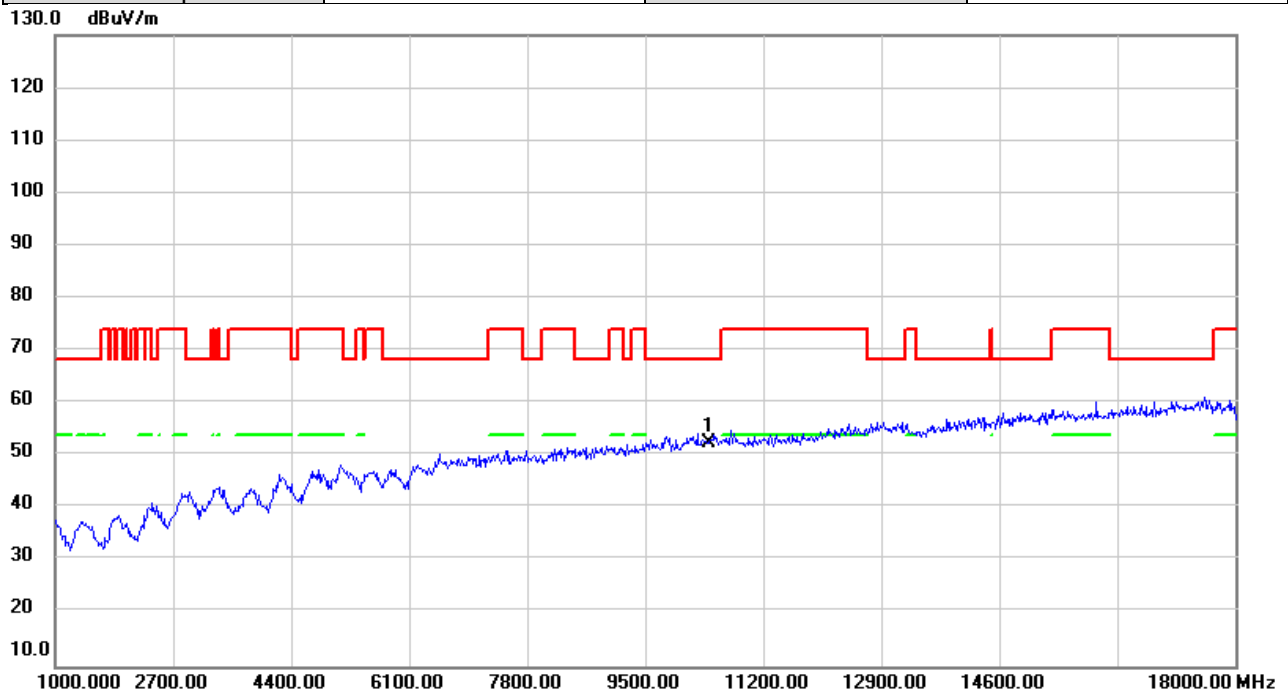


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	45.33	7.08	52.41	68.20	-15.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

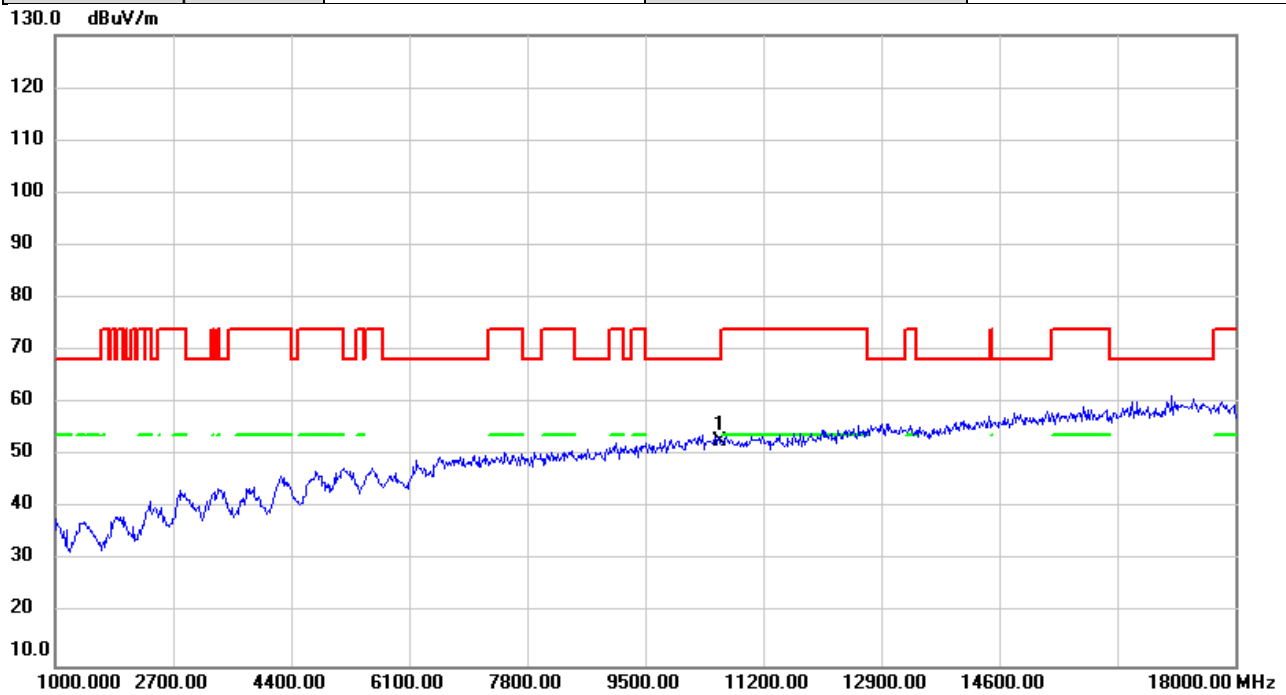


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	45.88	6.99	52.87	68.20	-15.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

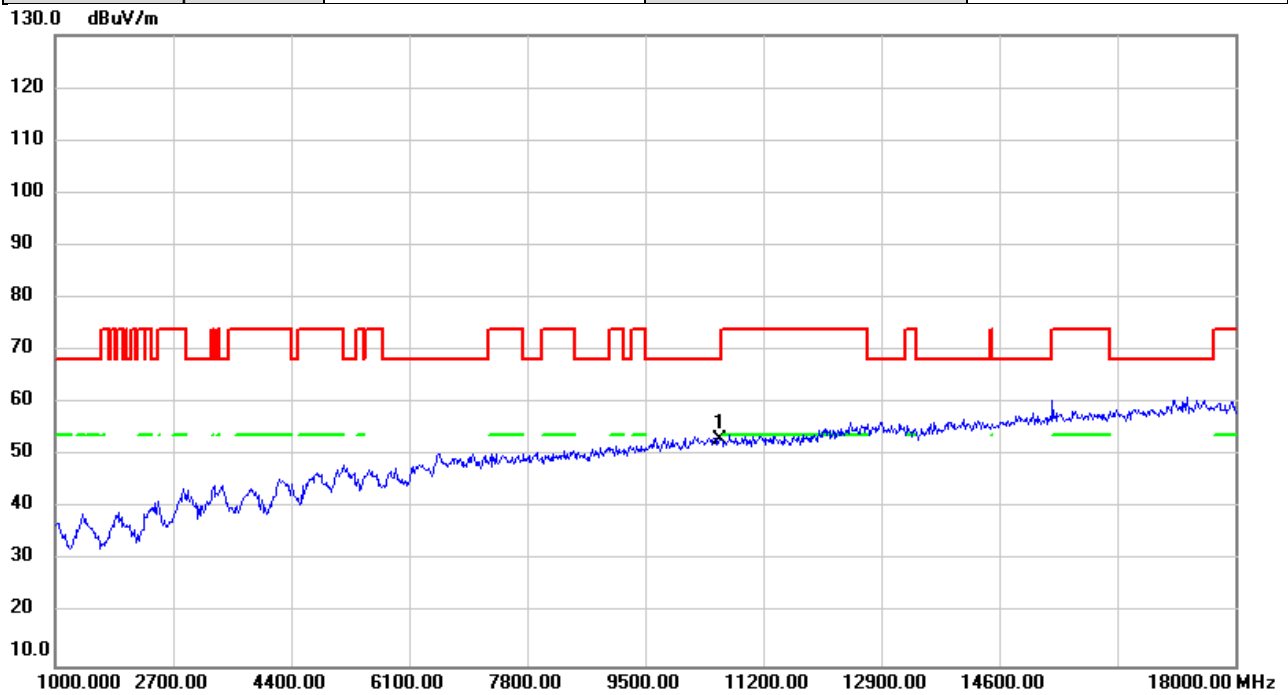


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	45.99	6.99	52.98	68.20	-15.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

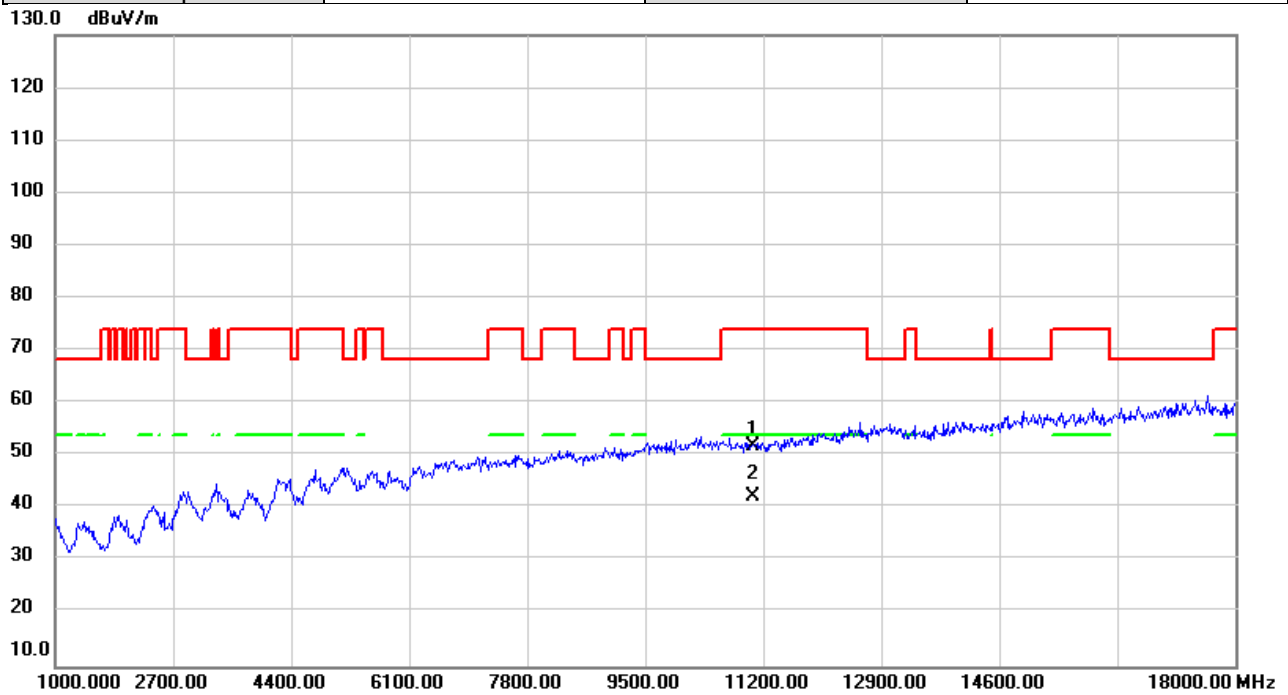


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	45.60	6.37	51.97	74.00	-22.03	peak	
2	*	11060.00	35.91	6.37	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

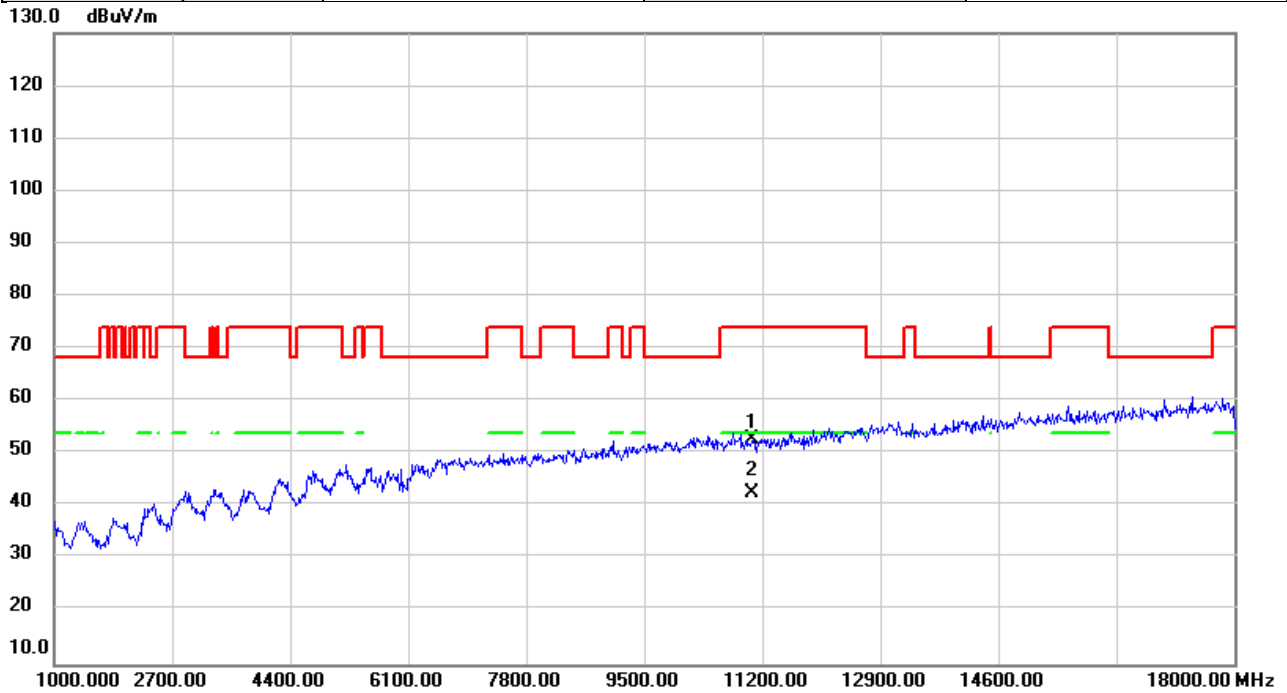


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.45	6.37	52.82	74.00	-21.18	peak	
2	*	11060.00	36.17	6.37	42.54	54.00	-11.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

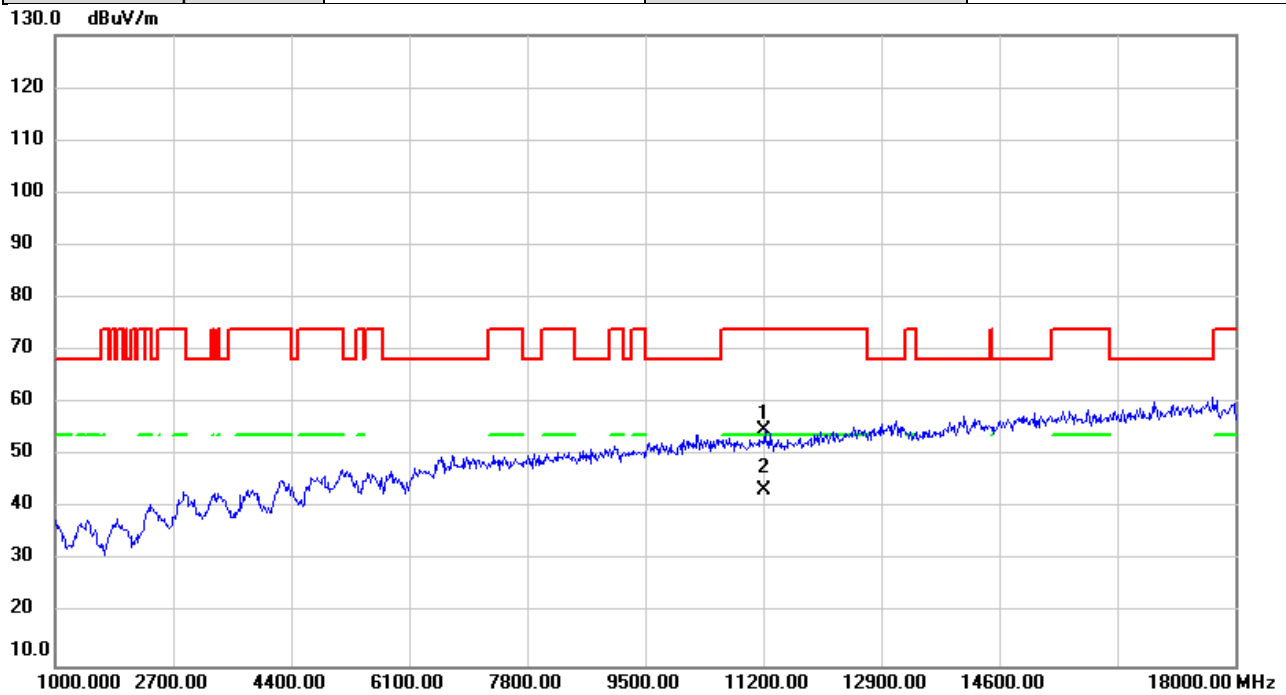


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	48.33	6.39	54.72	74.00	-19.28	peak	
2	*	11220.00	37.09	6.39	43.48	54.00	-10.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

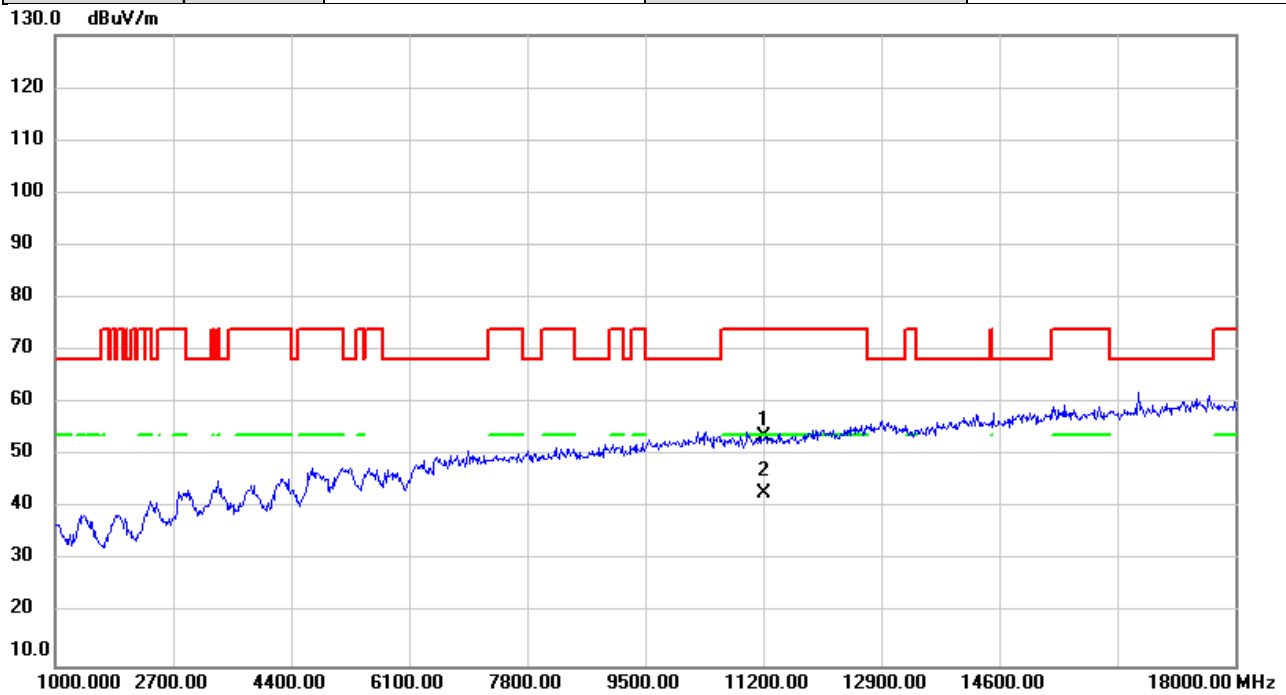


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	47.13	6.39	53.52	74.00	-20.48	peak	
2	*	11220.00	36.46	6.39	42.85	54.00	-11.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5690MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

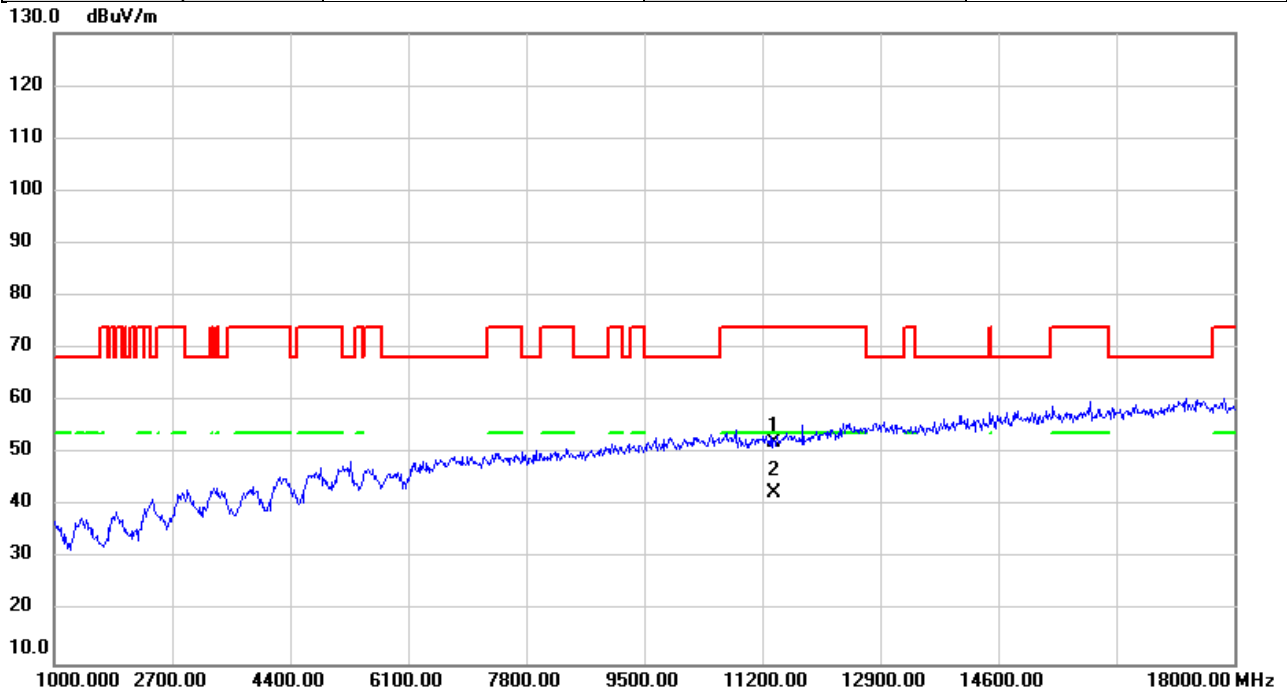


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	45.87	6.41	52.28	74.00	-21.72	peak	
2	*	11380.00	36.26	6.41	42.67	54.00	-11.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5690MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

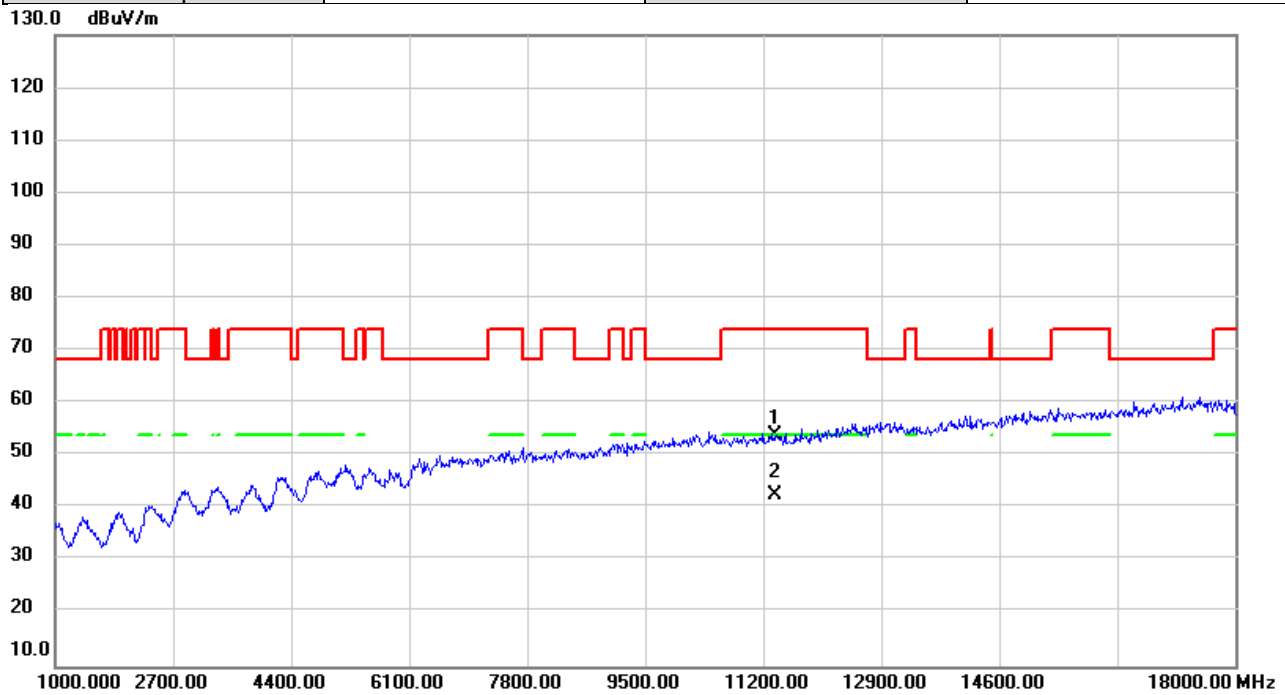


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	47.41	6.41	53.82	74.00	-20.18	peak	
2	*	11380.00	36.09	6.41	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

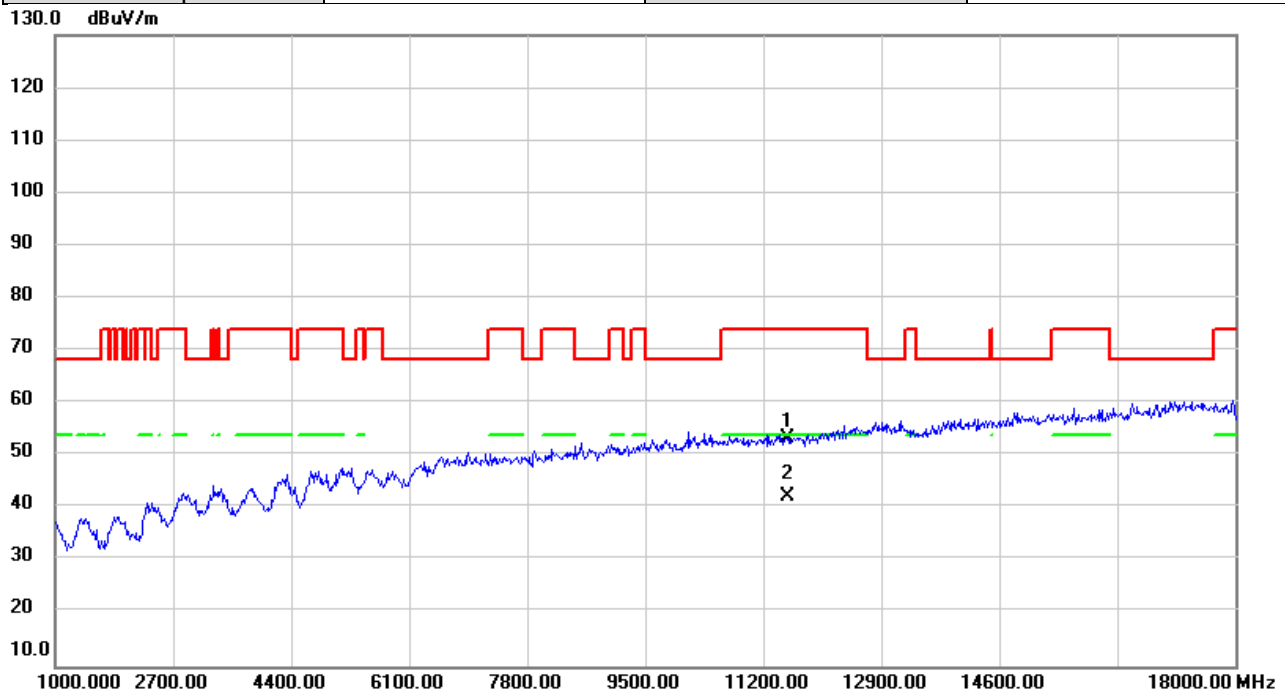


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	46.85	6.47	53.32	74.00	-20.68	peak	
2	*	11550.00	35.92	6.47	42.39	54.00	-11.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

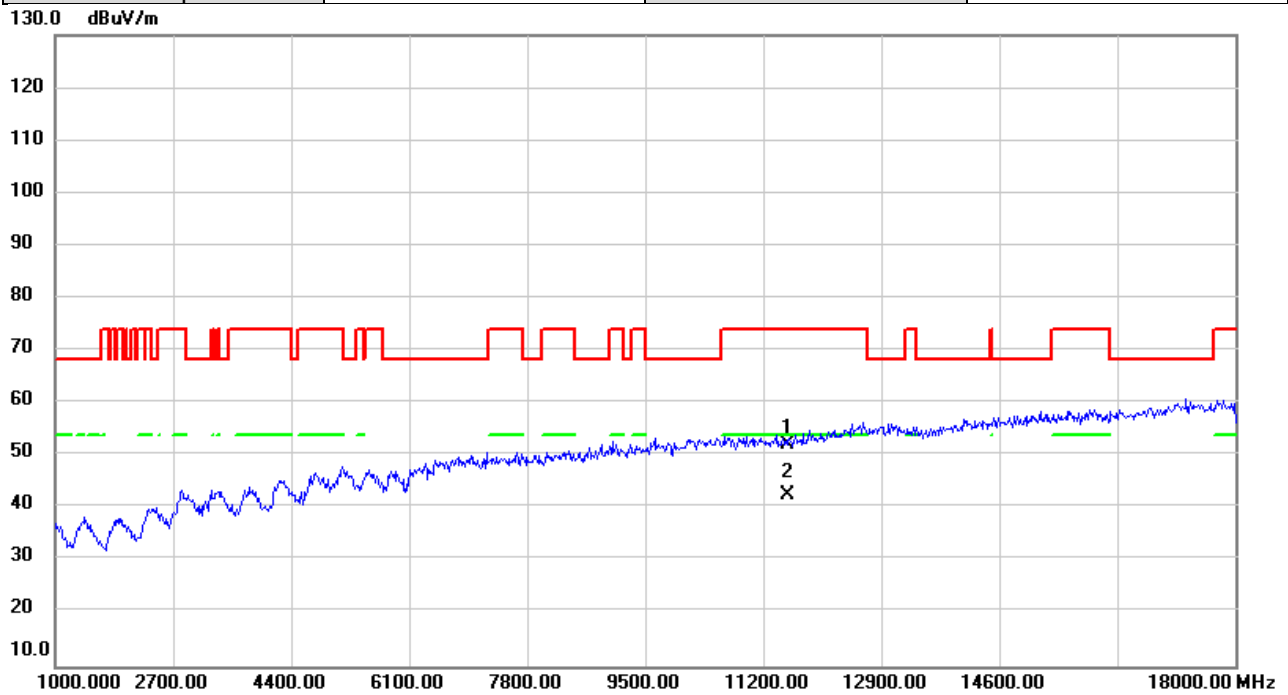


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	45.69	6.47	52.16	74.00	-21.84	peak	
2	*	11550.00	35.95	6.47	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/5
Test Frequency	5250MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

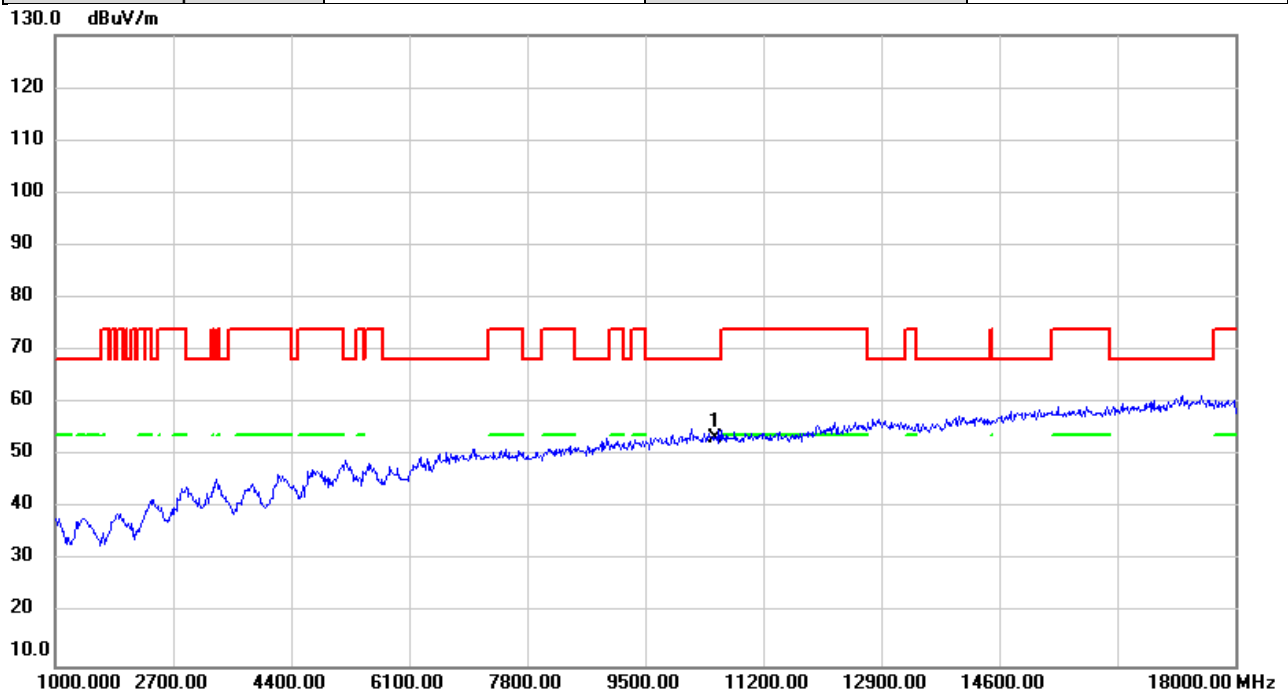


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	46.16	7.10	53.26	68.20	-14.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/5
Test Frequency	5250MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

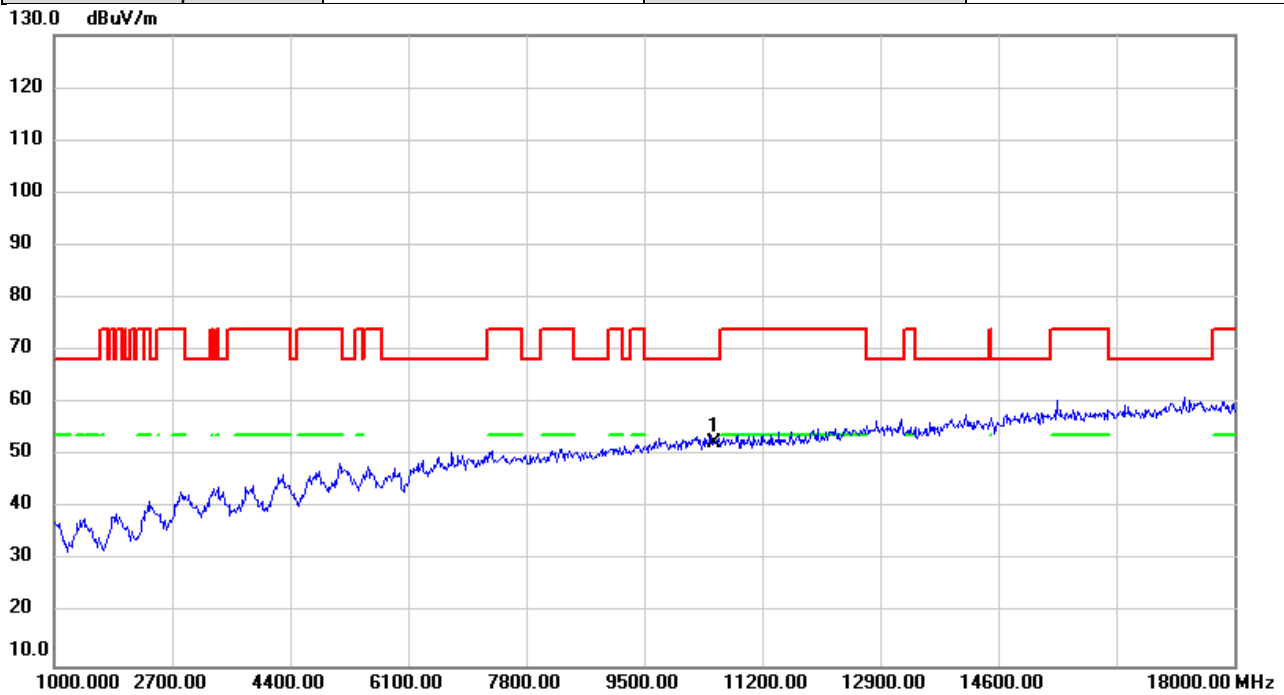


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	45.34	7.10	52.44	68.20	-15.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/5
Test Frequency	5570MHz	Polarization	Vertical
Temp	23°C	Hum.	62%

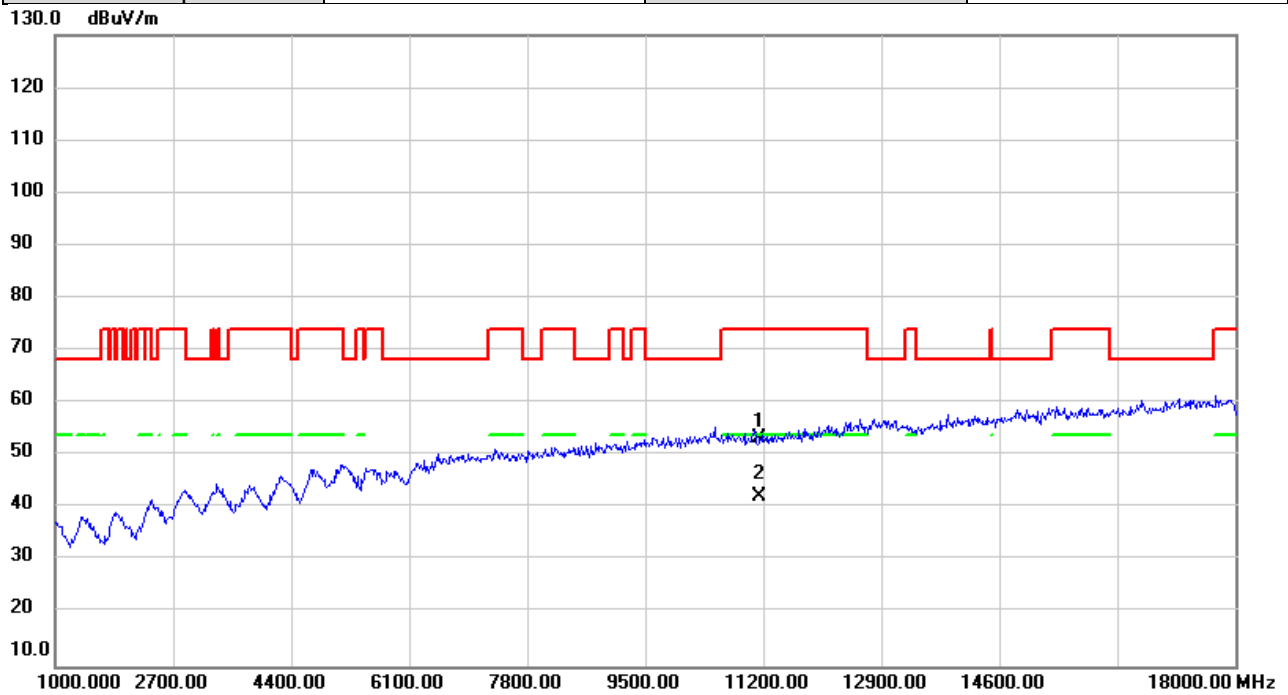


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	46.83	6.38	53.21	74.00	-20.79	peak	
2	*	11140.00	36.02	6.38	42.40	54.00	-11.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/5
Test Frequency	5570MHz	Polarization	Horizontal
Temp	23°C	Hum.	62%

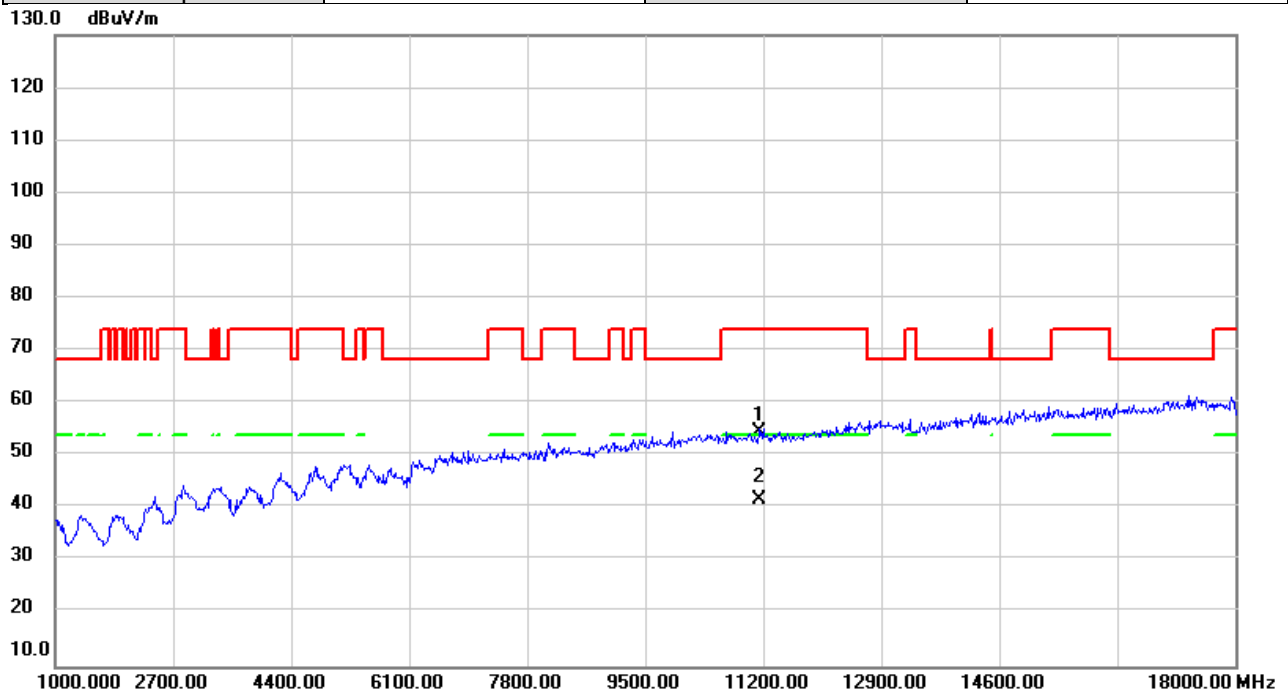


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	48.23	6.38	54.61	74.00	-19.39	peak	
2	*	11140.00	35.17	6.38	41.55	54.00	-12.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	64%

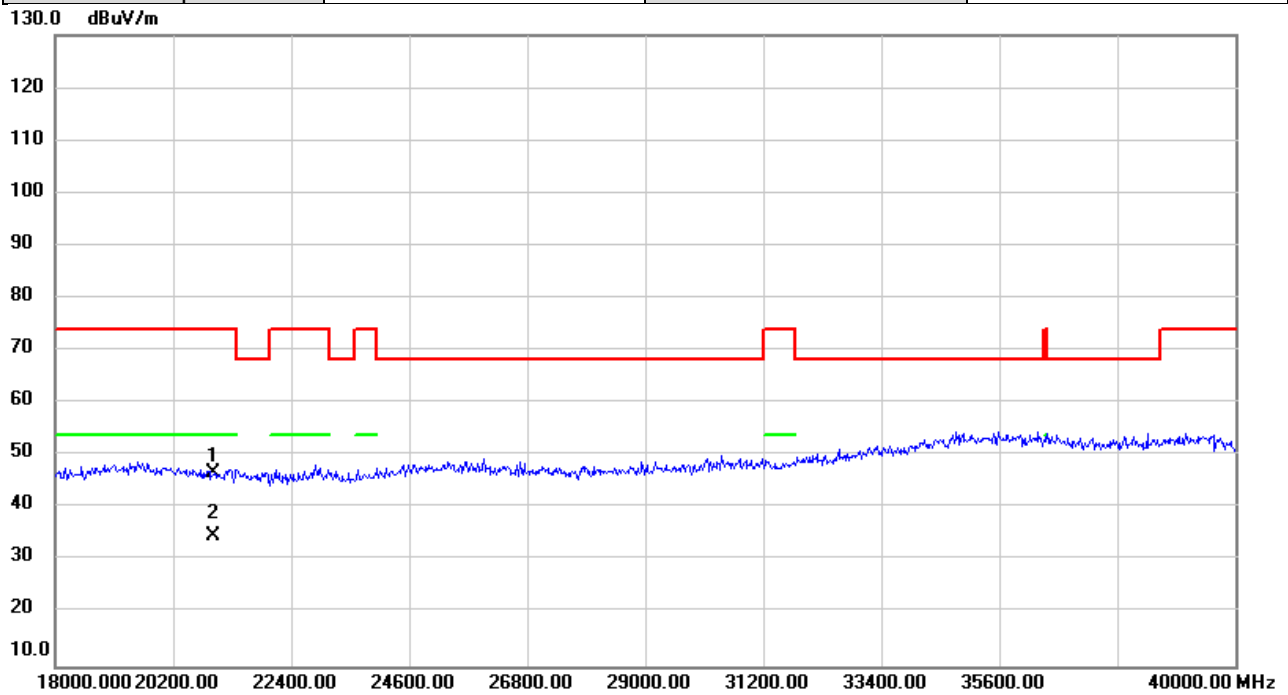


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20960.00	53.01	-6.15	46.86	74.00	-27.14	peak	
2	*	20960.00	40.83	-6.15	34.68	54.00	-19.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	64%

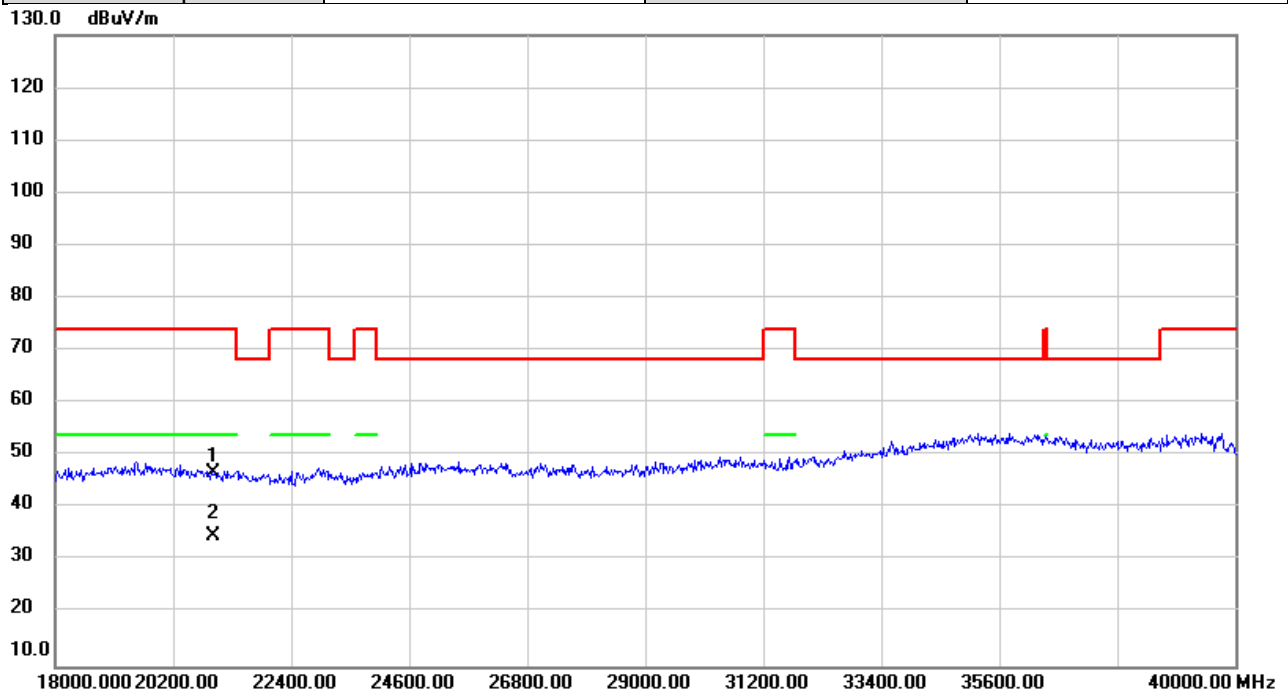

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20960.00	52.95	-6.15	46.80	74.00	-27.20	peak	
2	*	20960.00	40.76	-6.15	34.61	54.00	-19.39	AVG	



REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E BANDWIDTH

Test Mode	IEEE 802.11a_Ant. 1
-----------	---------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	39.60	21.96	No limit
5200	40.44	23.40	No limit
5240	42.24	22.68	No limit

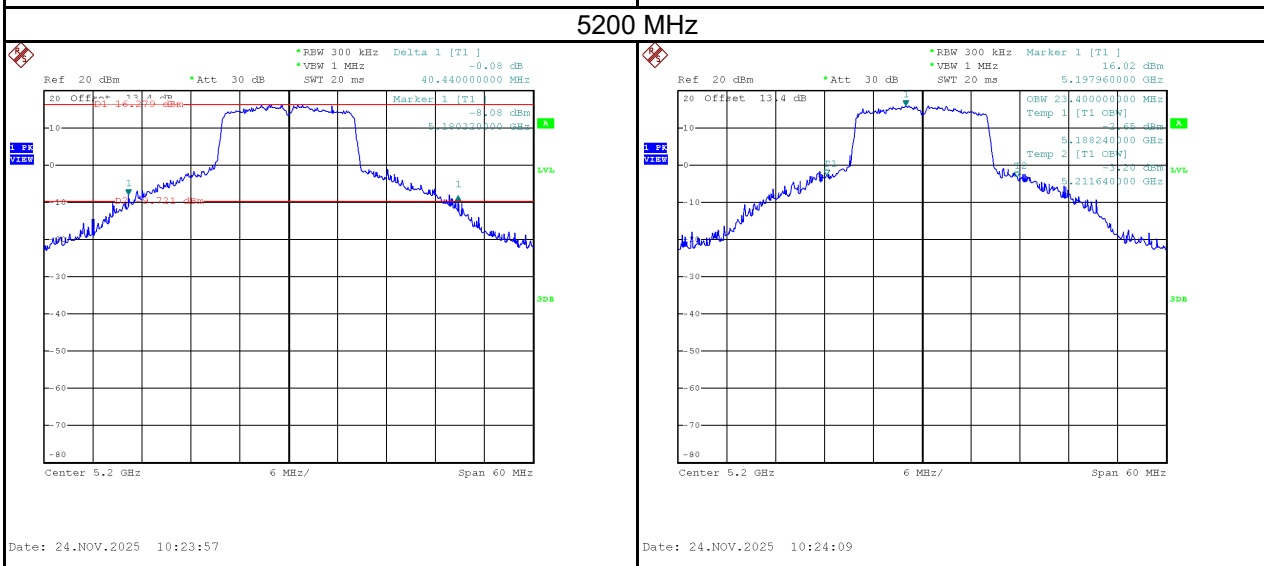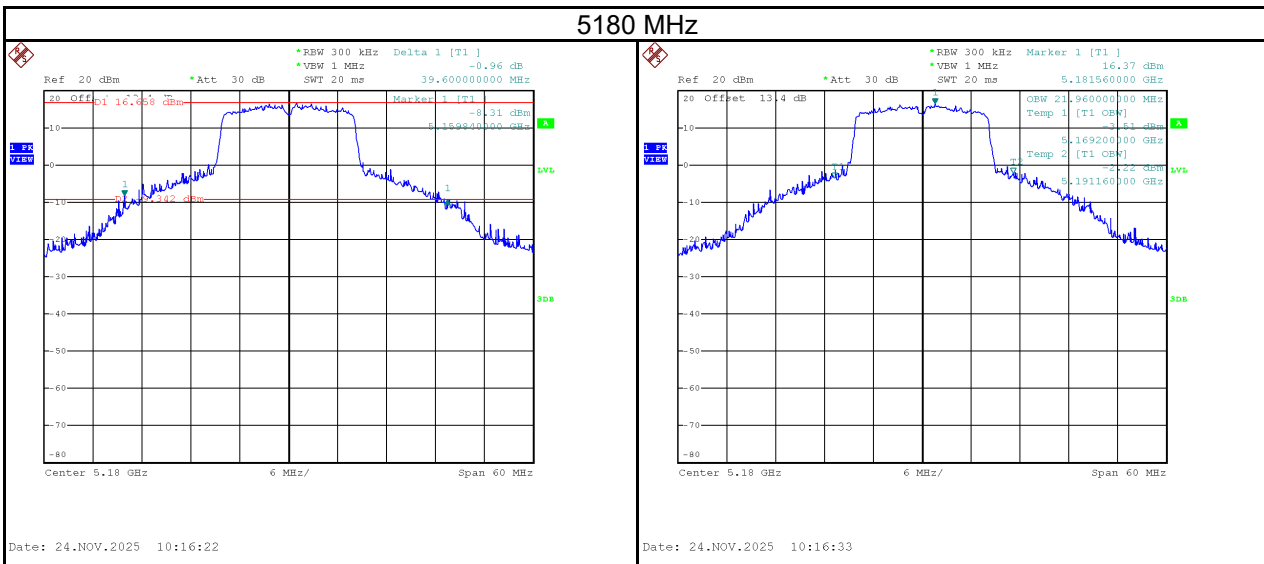

5240 MHz


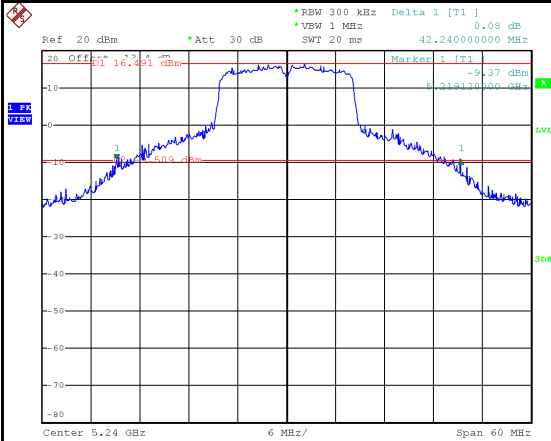


Date: 24.NOV.2025 10:25:16

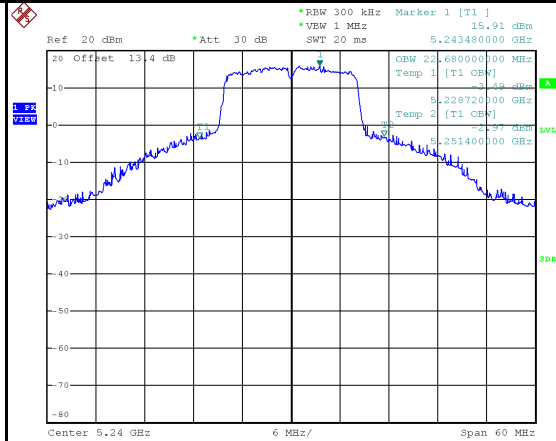


Date: 24.NOV.2025 10:25:27


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	18.48	16.56	No limit
5300	21.84	16.56	No limit
5320	23.88	16.56	No limit

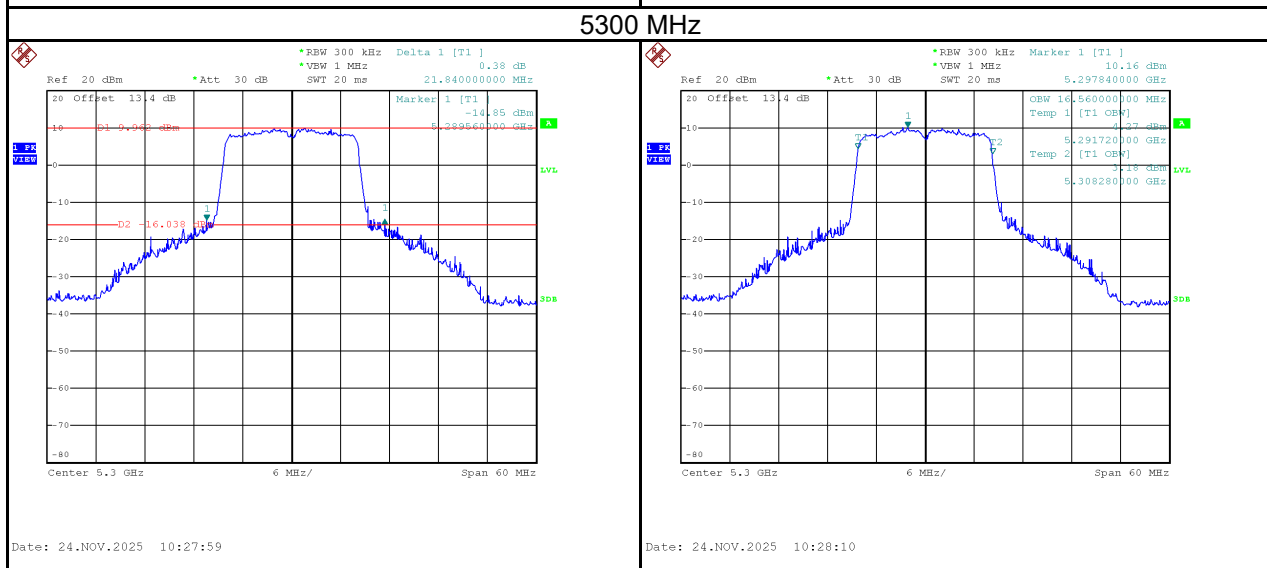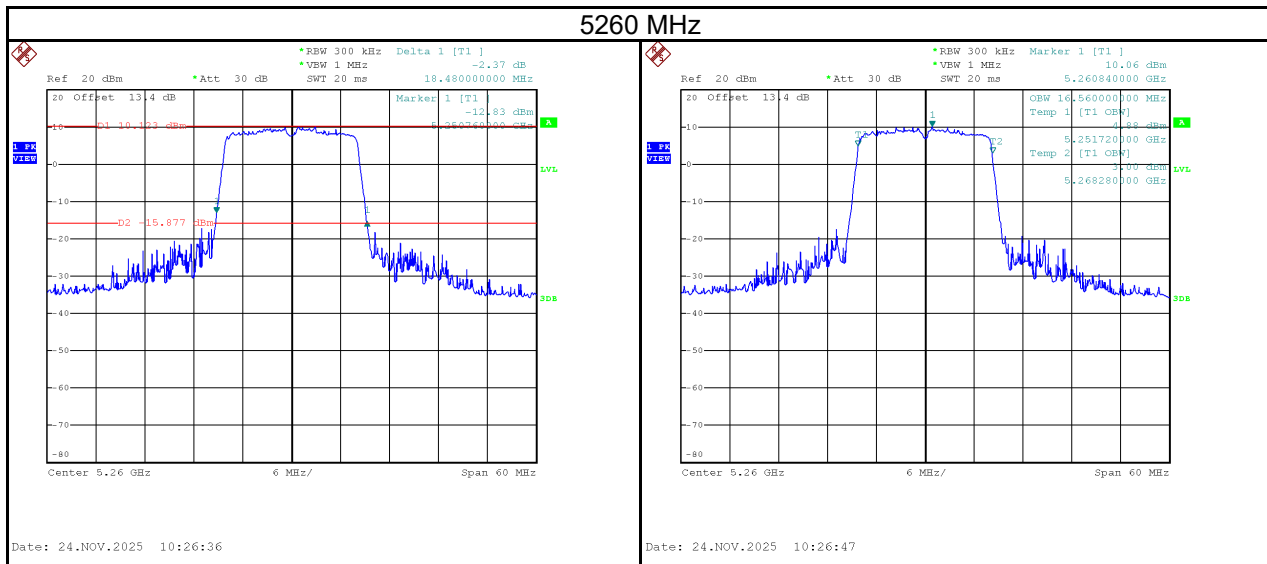

5320 MHz

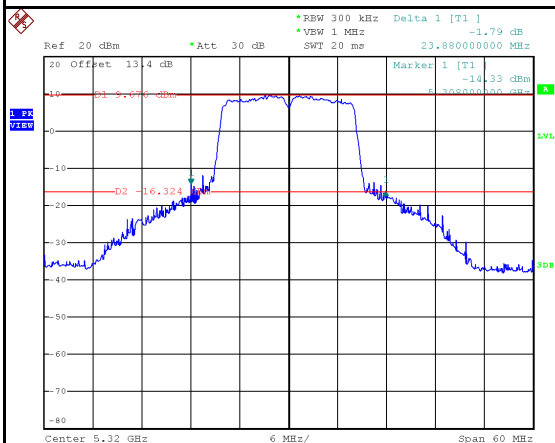


Date: 24.NOV.2025 10:29:15

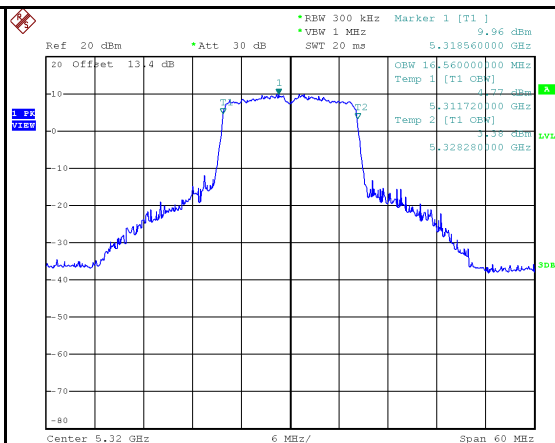


Date: 24.NOV.2025 10:29:26

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	23.28	16.56	No limit
5580	19.92	16.56	No limit
5700	22.32	16.68	No limit

5500 MHz

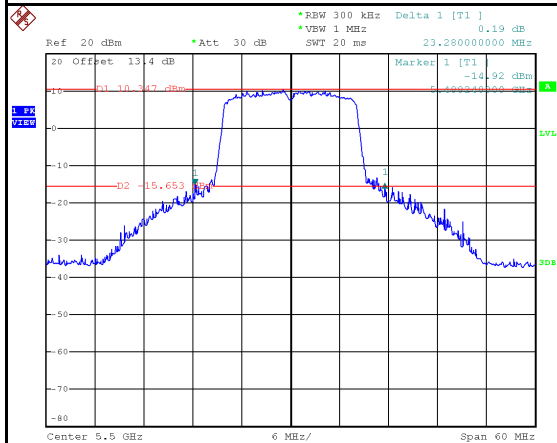


Date: 24.NOV.2025 10:30:38

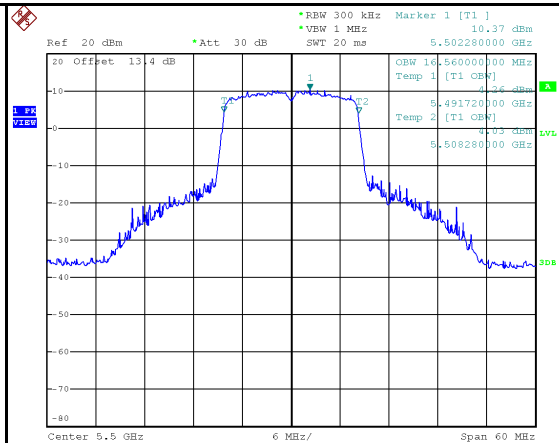


Date: 24.NOV.2025 10:30:49

5580 MHz

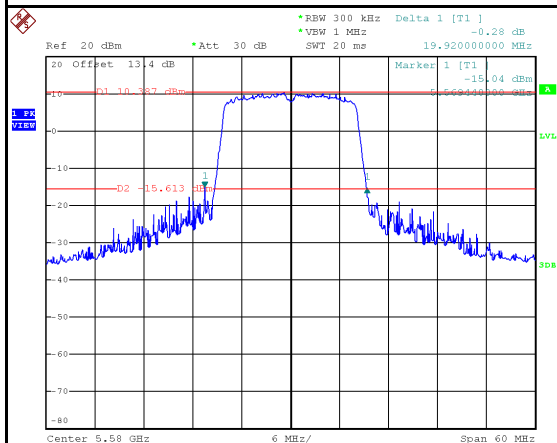


Date: 24.NOV.2025 10:31:55

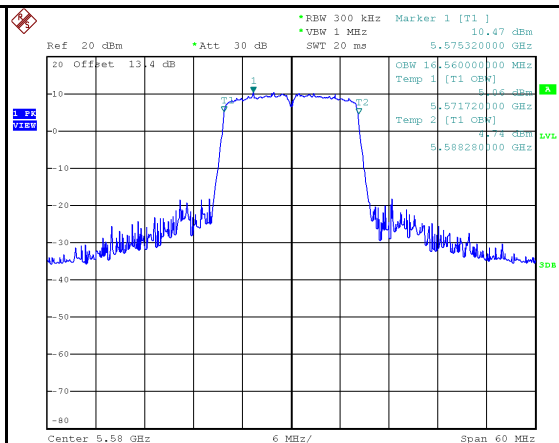


Date: 24.NOV.2025 10:32:06

5700 MHz

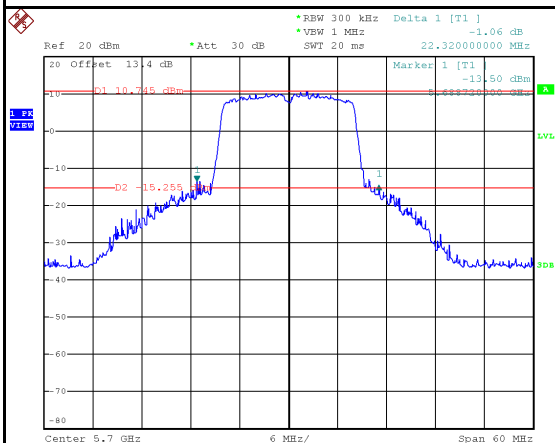


Date: 24.NOV.2025 10:37:01

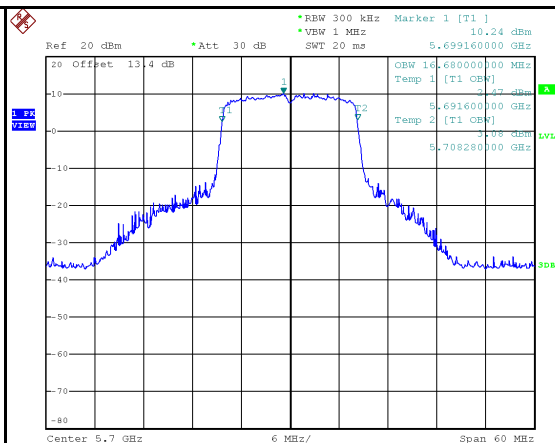


Date: 24.NOV.2025 10:37:12

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	16.32	43.32	500	Pass
5785	16.32	43.08	500	Pass
5825	16.32	42.36	500	Pass

5745 MHz

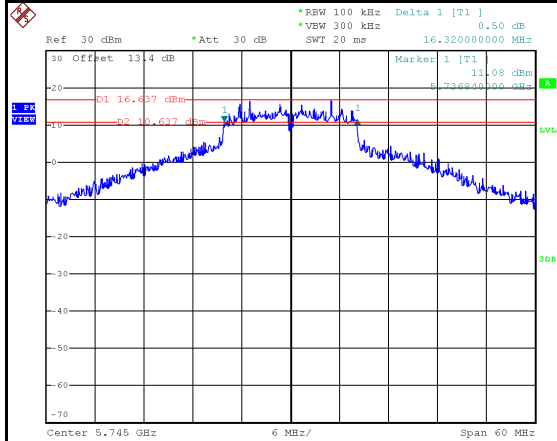


Date: 24.NOV.2025 10:44:31

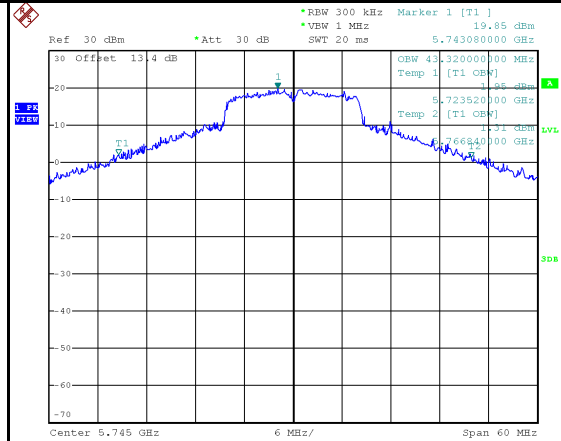


Date: 24.NOV.2025 10:44:42

5785 MHz

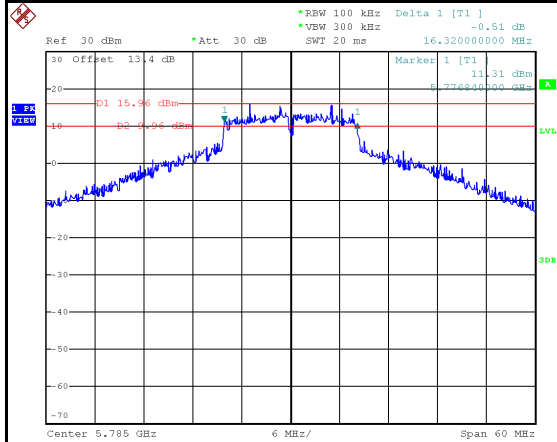


Date: 24.NOV.2025 10:46:40

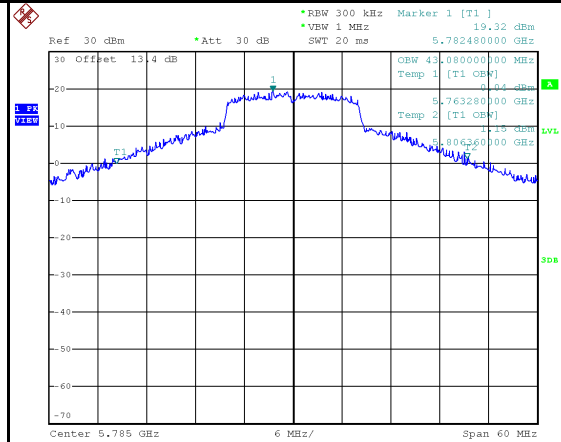


Date: 24.NOV.2025 10:46:51

5825 MHz

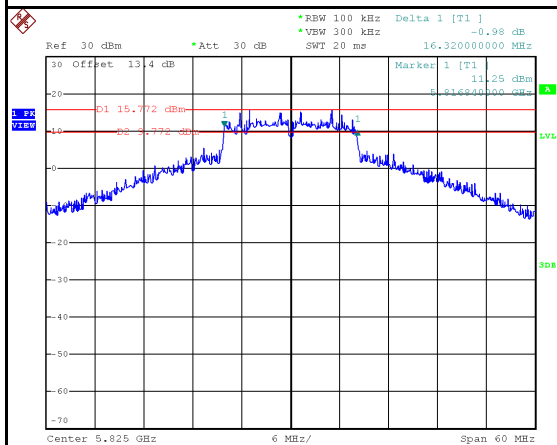



Date: 24.NOV.2025 10:47:46

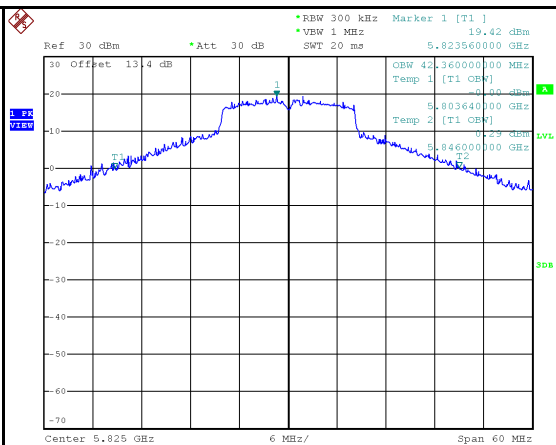


Date: 24.NOV.2025 10:47:57

Test Mode	IEEE 802.11n (HT20)_Ant. 1
-----------	----------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	44.88	27.24	No limit
5200	44.28	26.40	No limit
5240	45.36	27.60	No limit

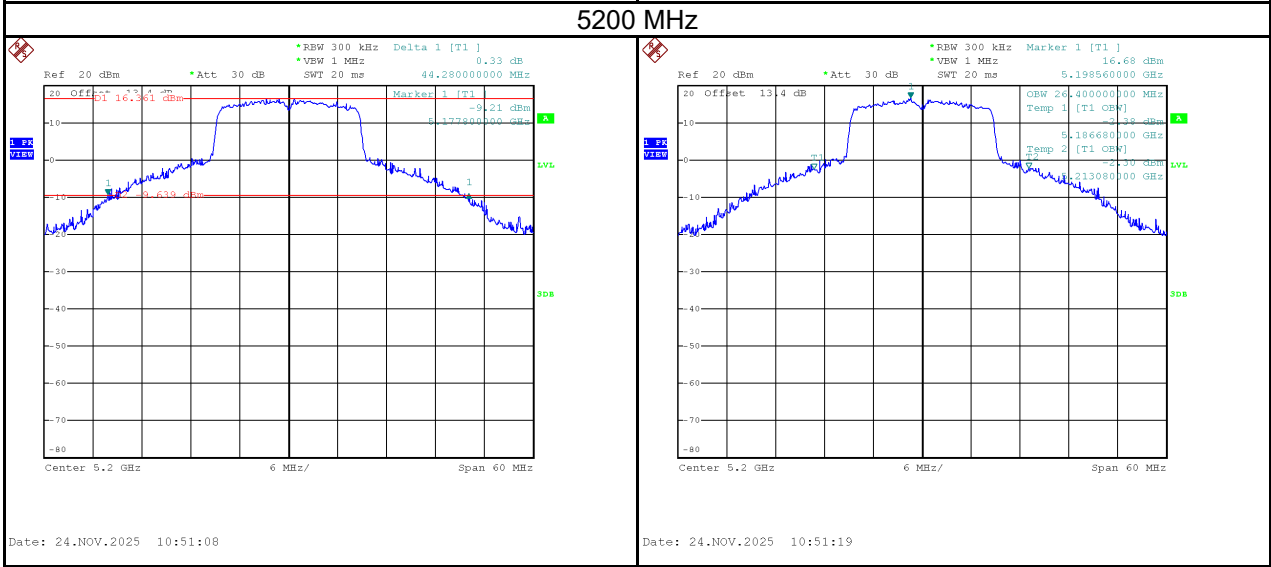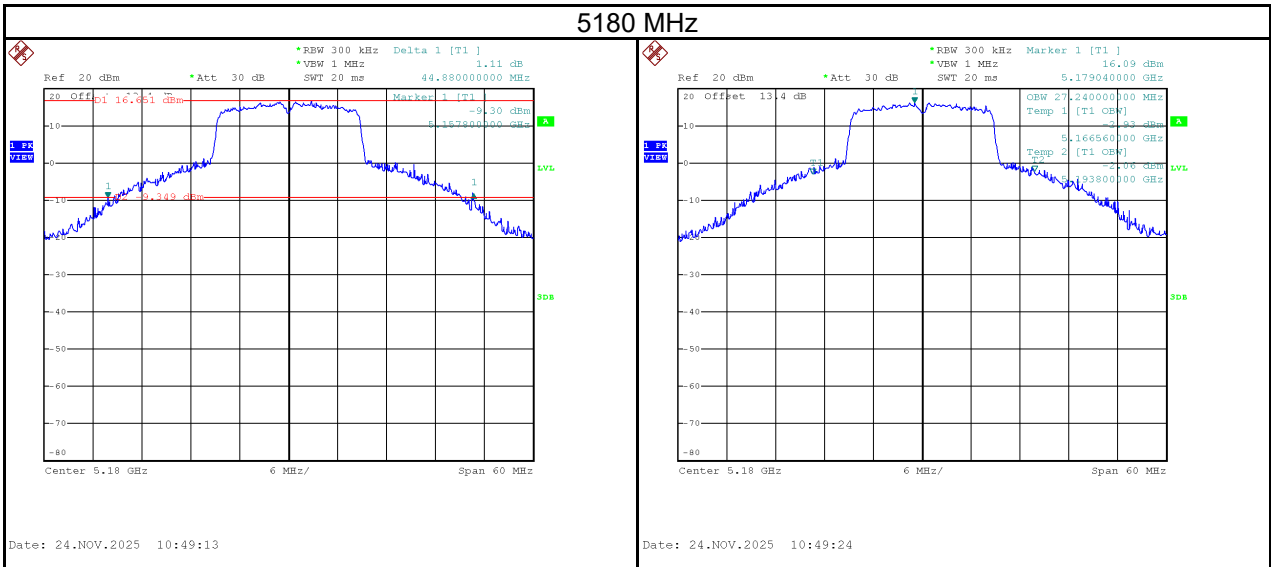

5240 MHz


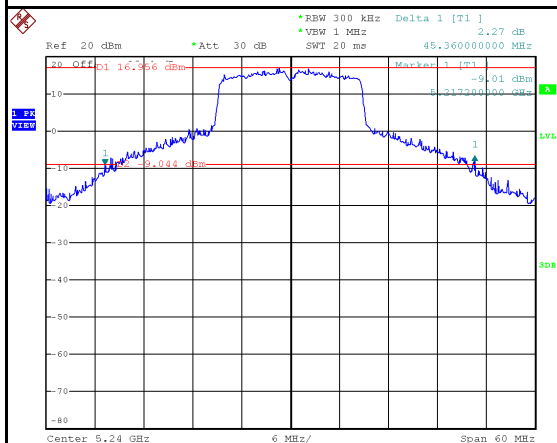


Date: 24.NOV.2025 10:52:40

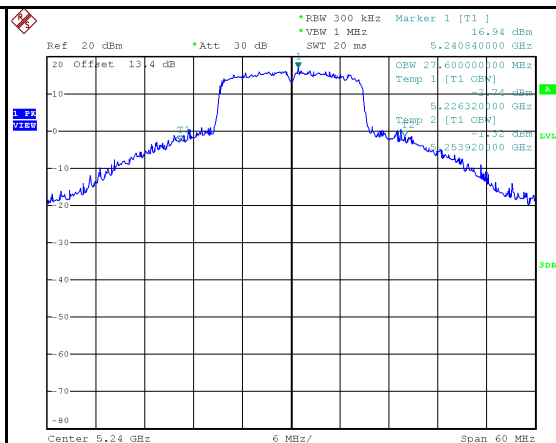


Date: 24.NOV.2025 10:52:51


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	19.20	17.52	No limit
5300	23.40	17.76	No limit
5320	25.08	17.76	No limit

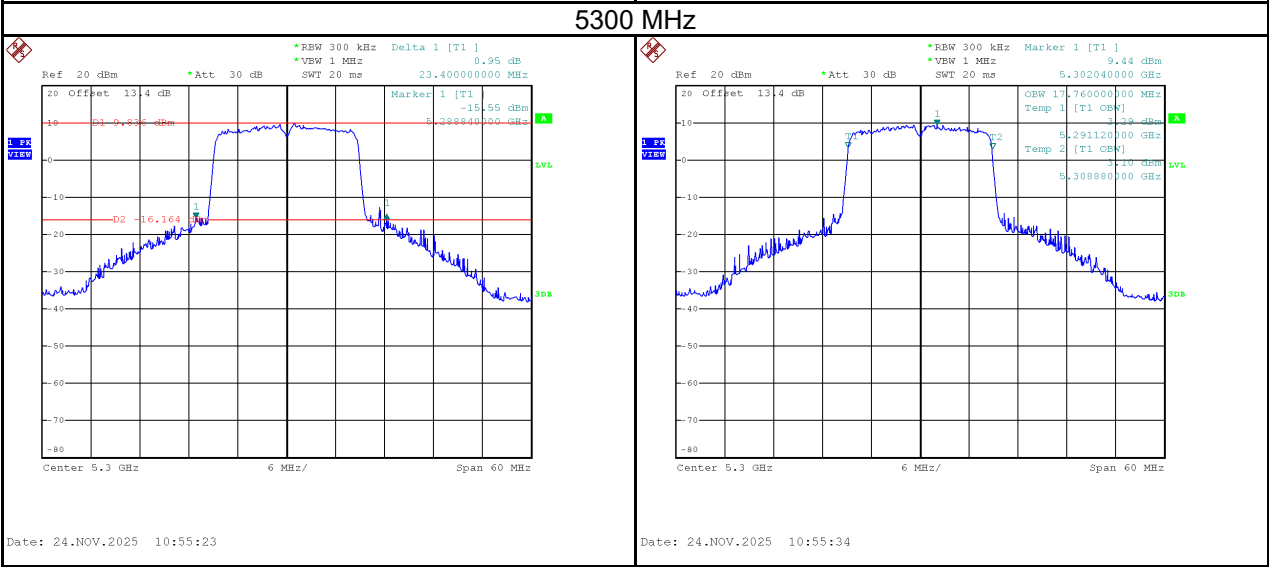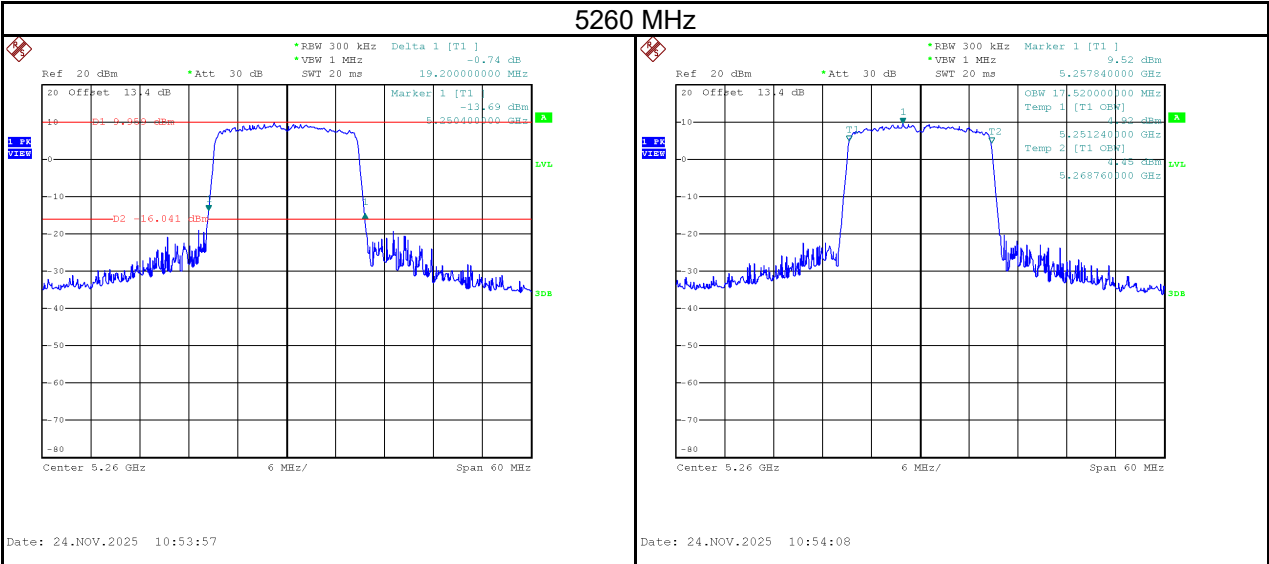

5320 MHz

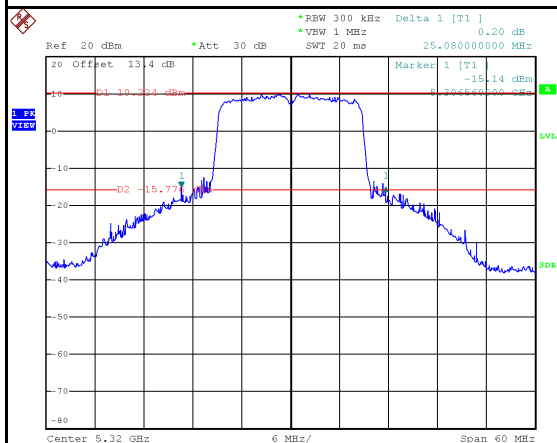


Date: 24.NOV.2025 10:56:53

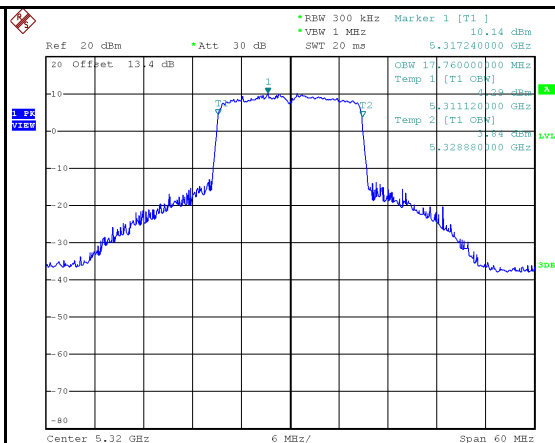


Date: 24.NOV.2025 10:57:05

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	24.36	17.76	No limit
5580	19.32	17.64	No limit
5700	22.56	17.76	No limit

5500 MHz

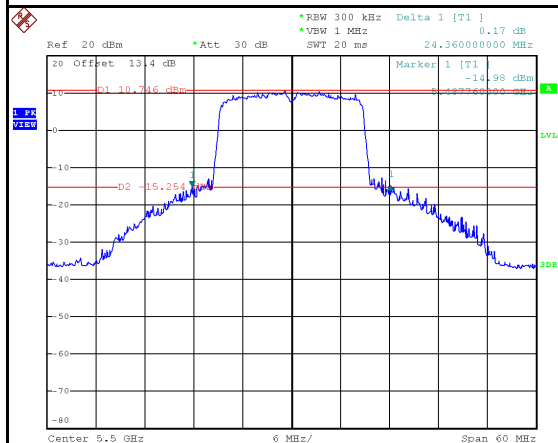


Date: 24.NOV.2025 10:58:15

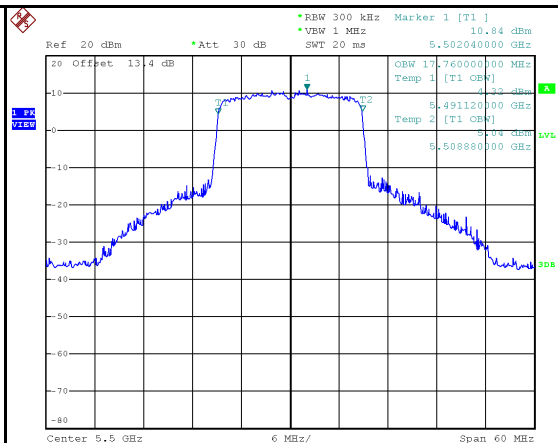


Date: 24.NOV.2025 10:58:26

5580 MHz

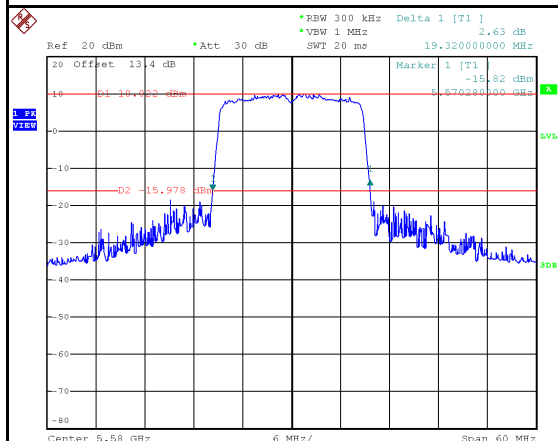


Date: 24.NOV.2025 10:59:39

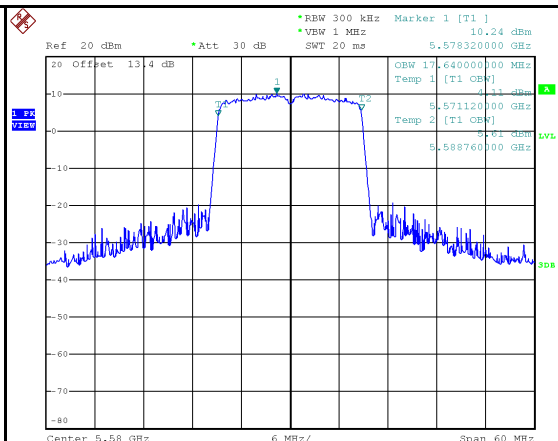


Date: 24.NOV.2025 10:59:50

5700 MHz

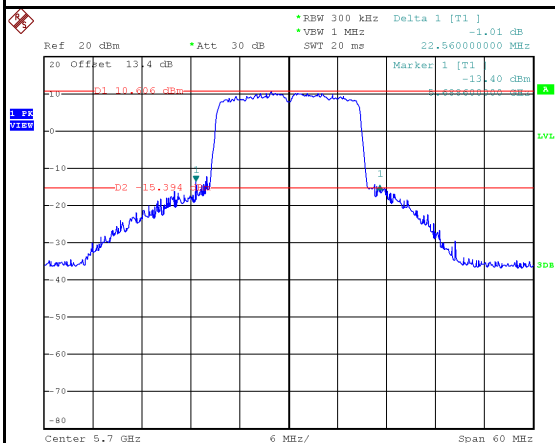


Date: 24.NOV.2025 11:06:16

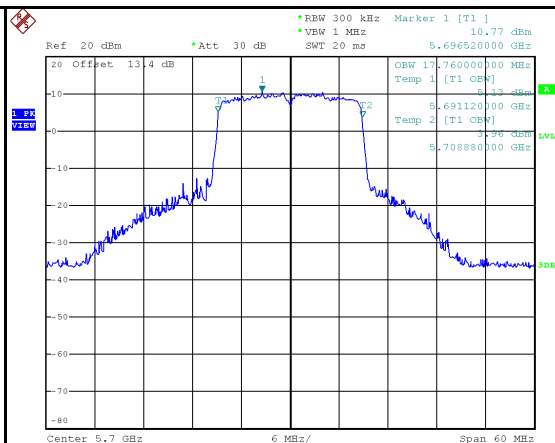


Date: 24.NOV.2025 11:06:27

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	17.52	44.40	500	Pass
5785	17.52	44.76	500	Pass
5825	17.52	43.92	500	Pass

5745 MHz

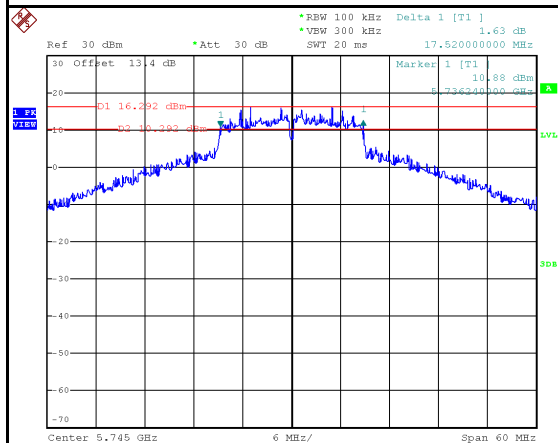


Date: 24.NOV.2025 11:07:41

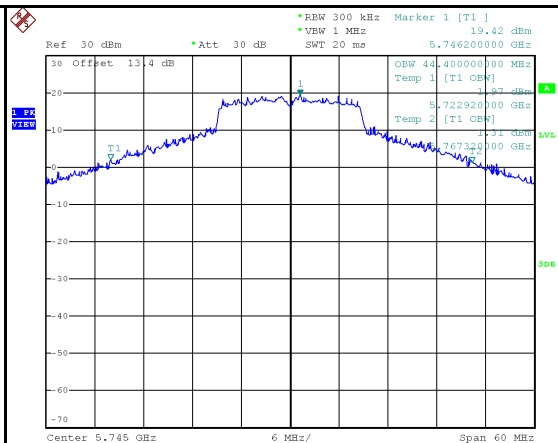


Date: 24.NOV.2025 11:07:52


5785 MHz

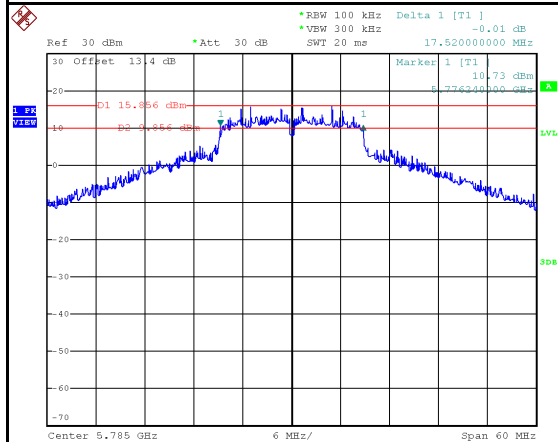

Date: 24.NOV.2025 11:08:41


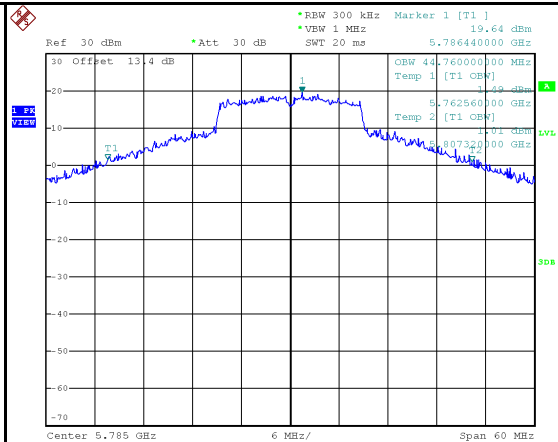


Date: 24.NOV.2025 11:08:52

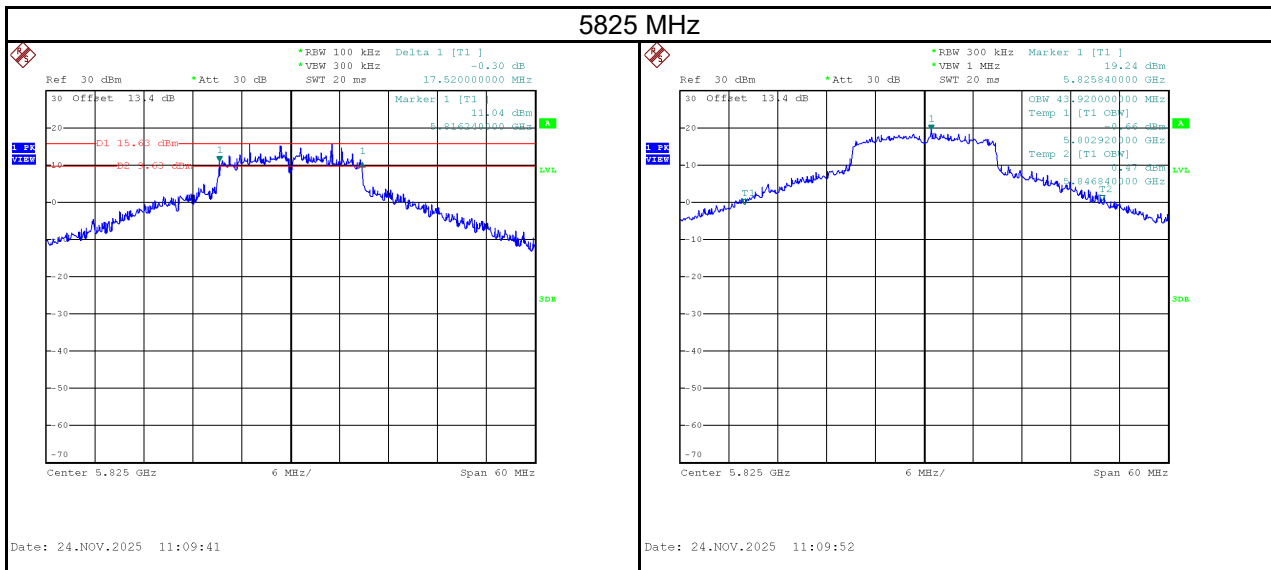


Test Mode	IEEE 802.11n (HT40)_Ant. 1
-----------	----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	99.40	69.20	No limit
5230	99.40	69.80	No limit

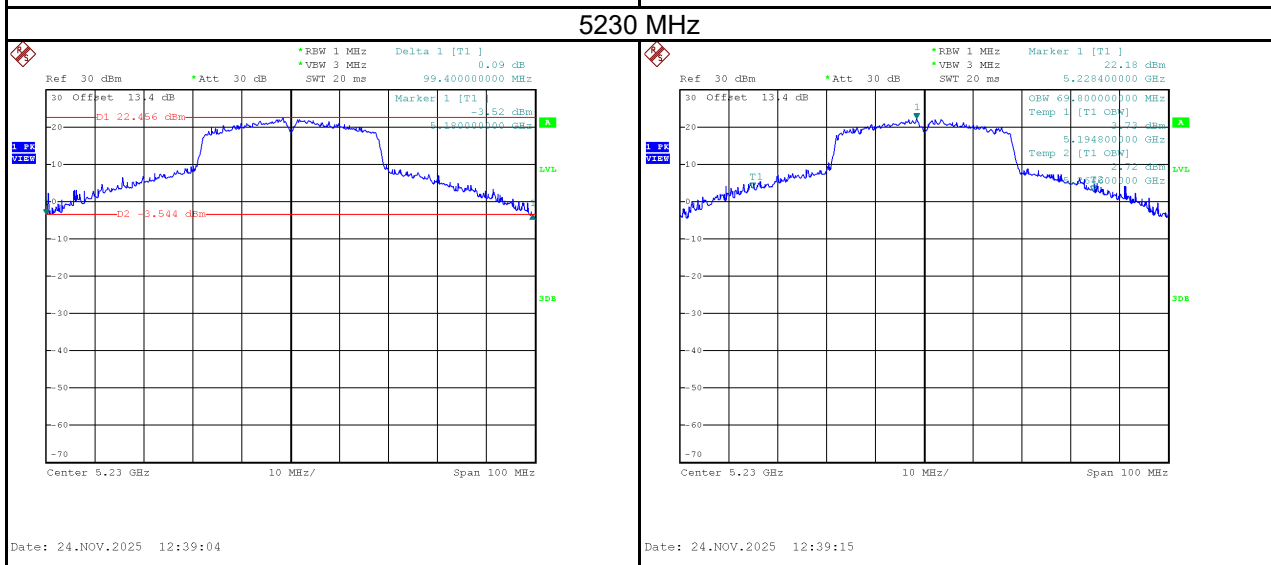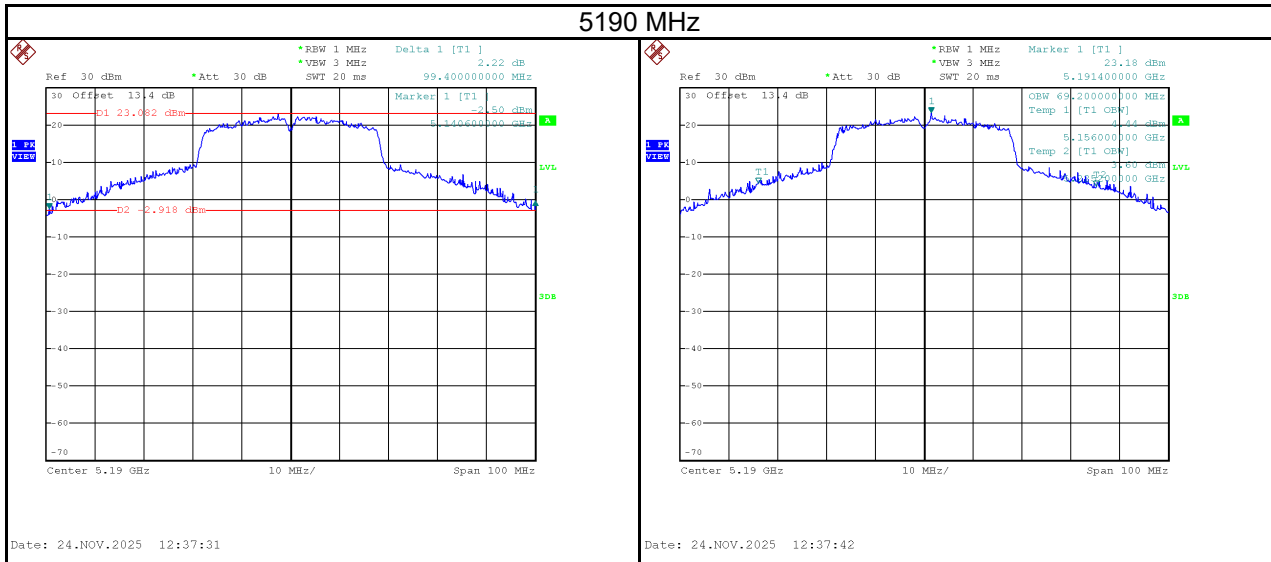


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	38.20	36.20	No limit
5310	39.00	36.40	No limit

5270 MHz

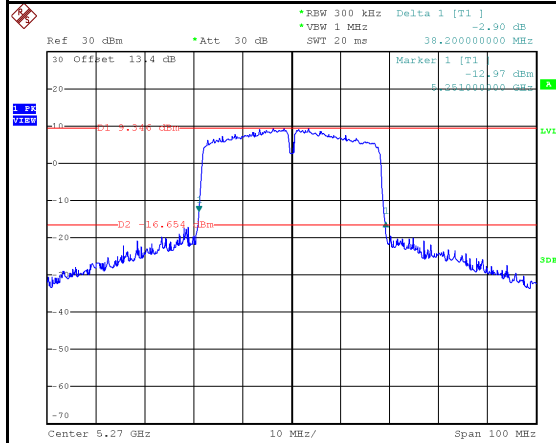


Date: 24.NOV.2025 12:42:29

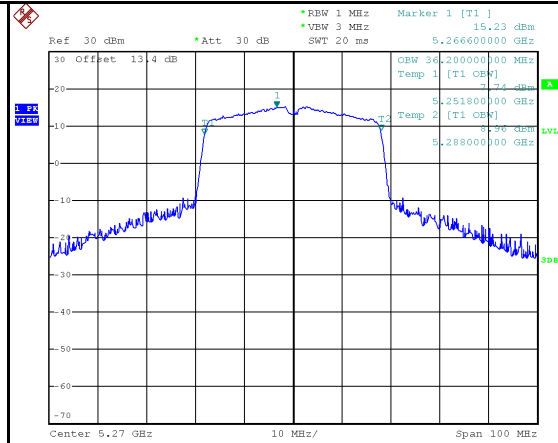


Date: 24.NOV.2025 12:42:40

5310 MHz


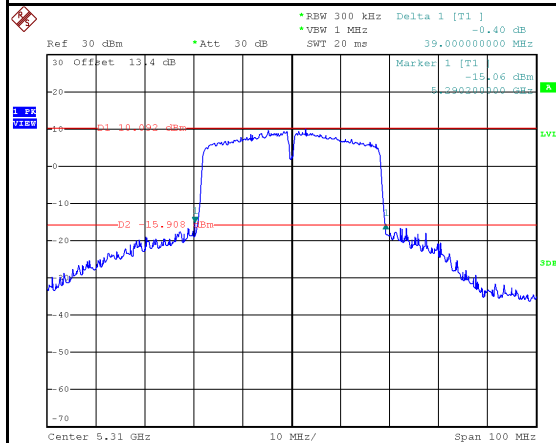



Date: 24.NOV.2025 12:43:52

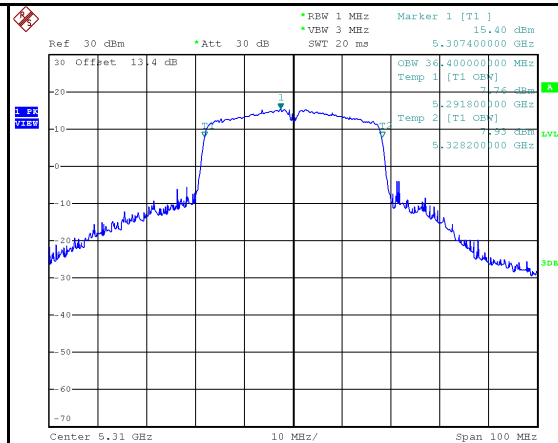

Date: 24.NOV.2025 12:44:03


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	43.00	36.40	No limit
5550	40.20	36.40	No limit
5670	41.40	36.40	No limit

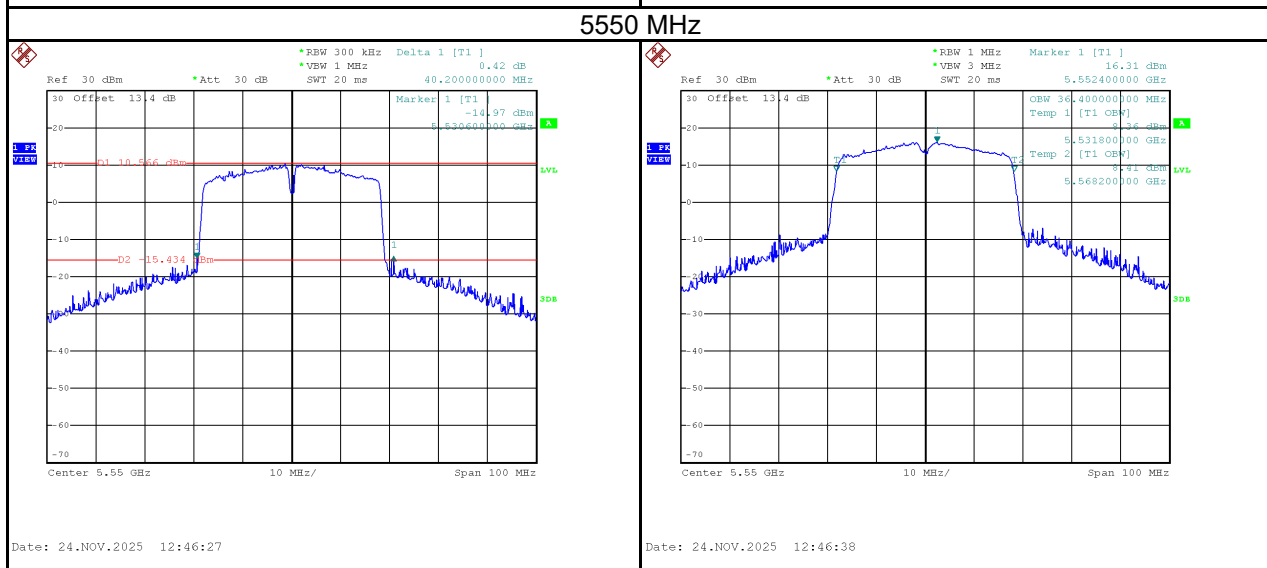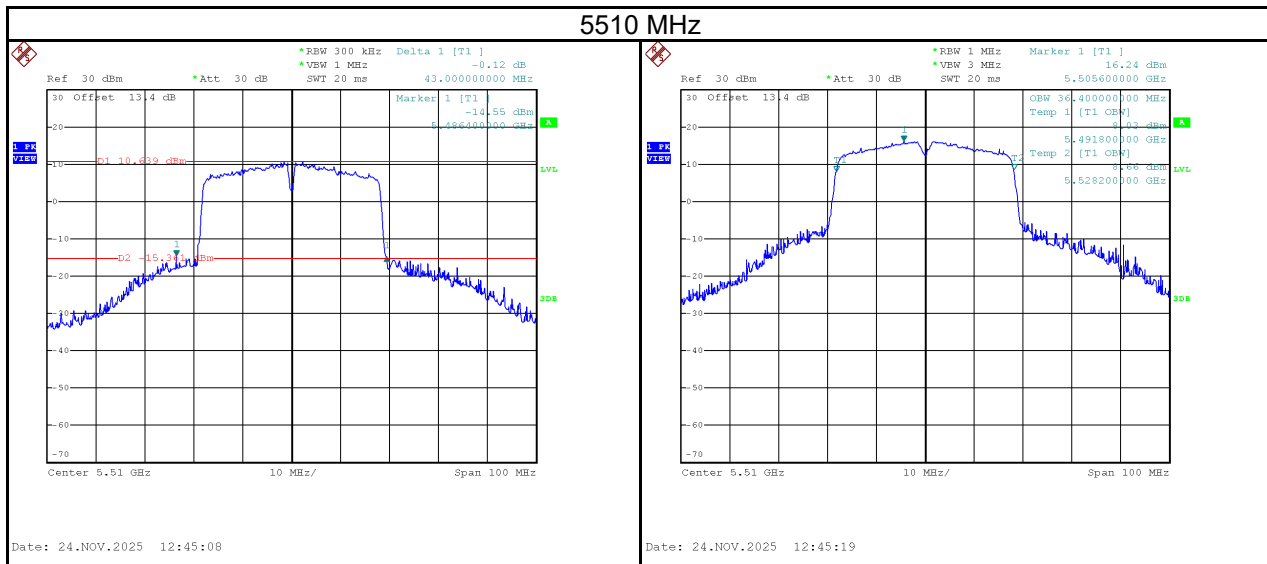

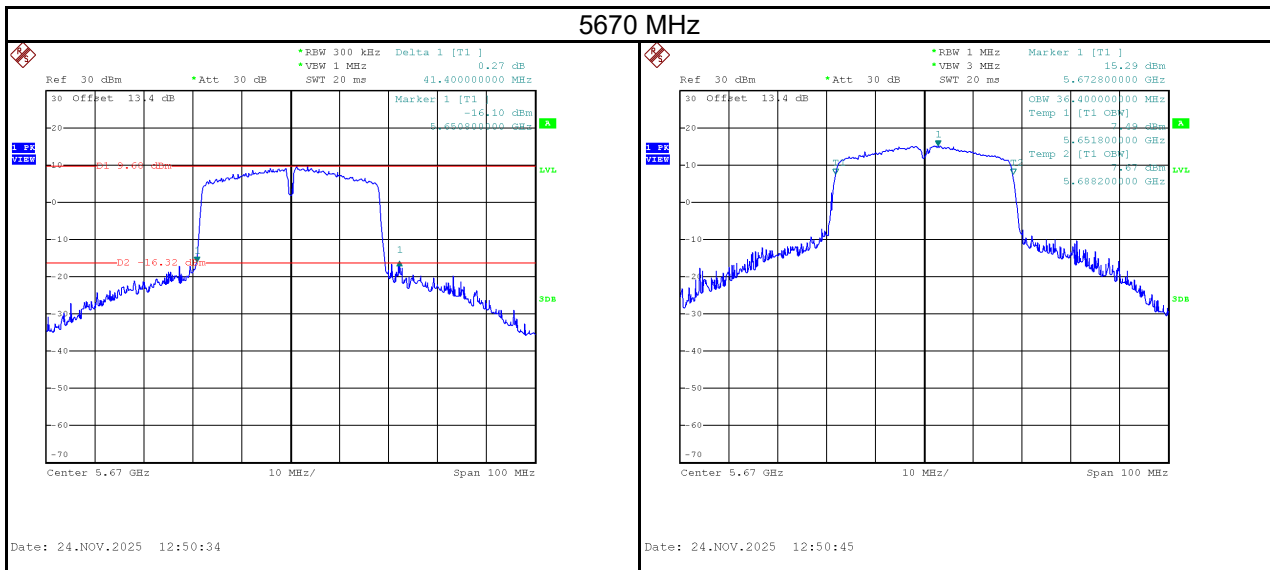


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	26.40	78.20	500	Pass
5795	30.60	79.00	500	Pass

5755 MHz

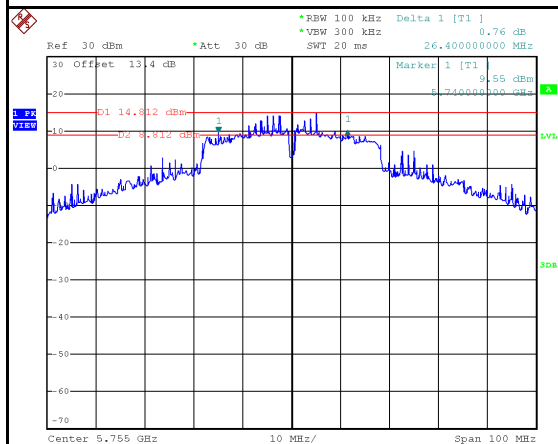


Date: 24.NOV.2025 12:51:41

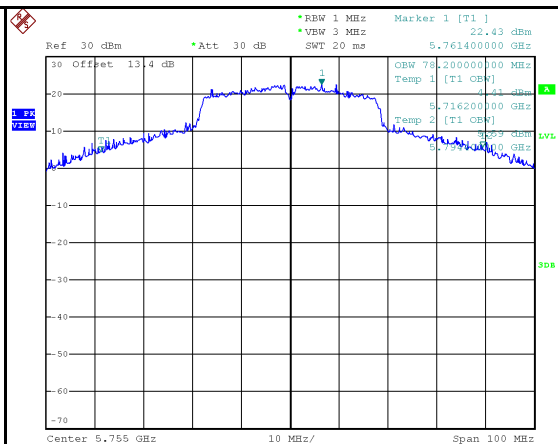


Date: 24.NOV.2025 12:51:52

5795 MHz

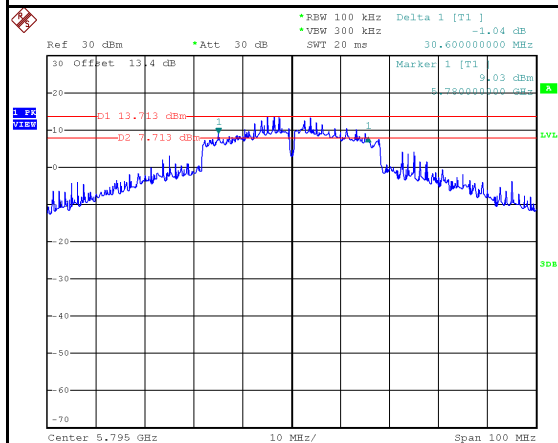


Date: 24.NOV.2025 12:52:35

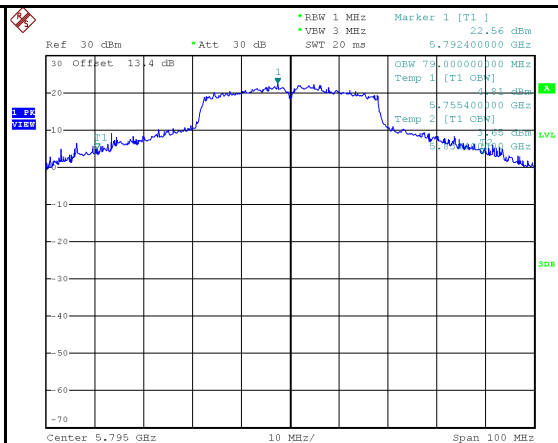


Date: 24.NOV.2025 12:52:46

Test Mode	IEEE 802.11ac (VHT80)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	194.00	124.40	No limit

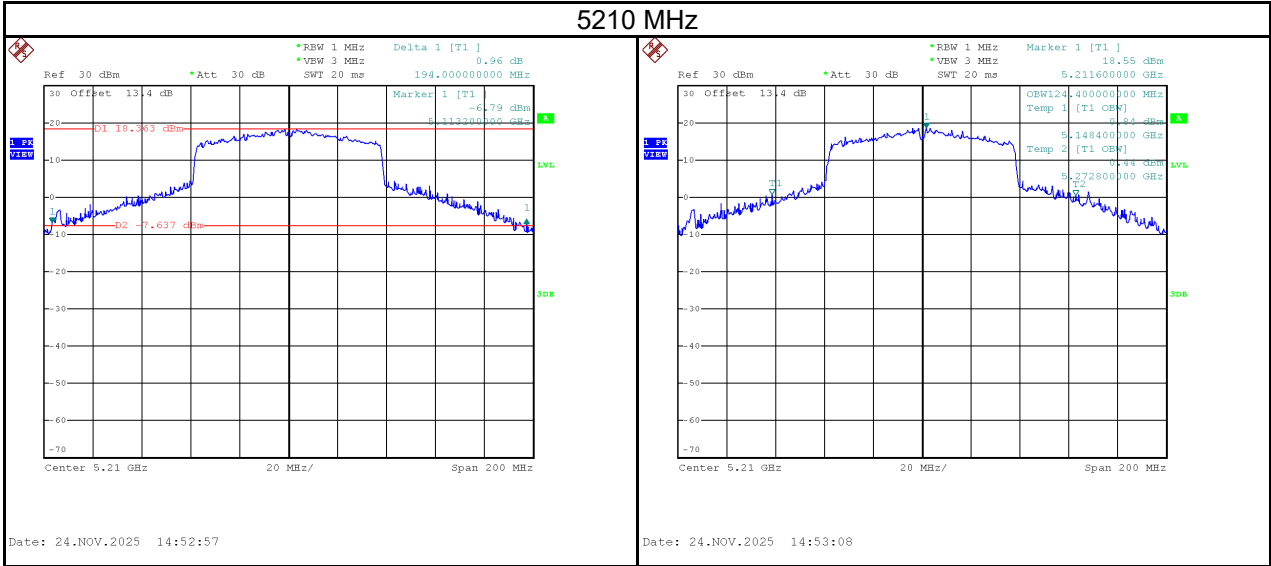


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	168.40	84.40	No limit

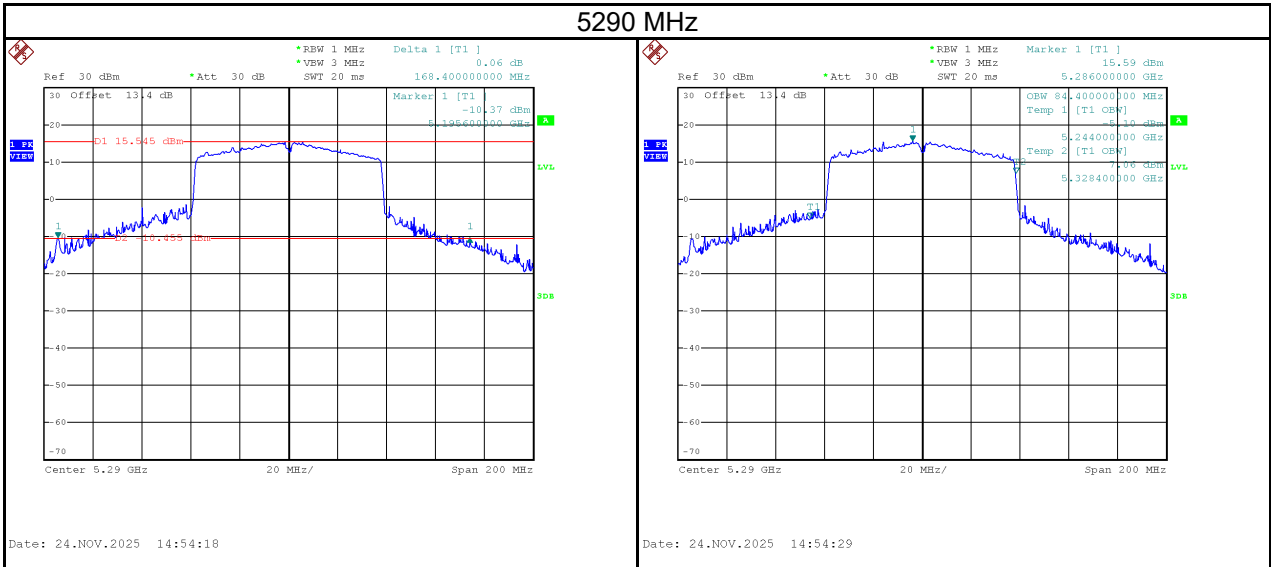


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	158.00	85.20	No limit
5610	150.00	78.00	No limit

5530 MHz

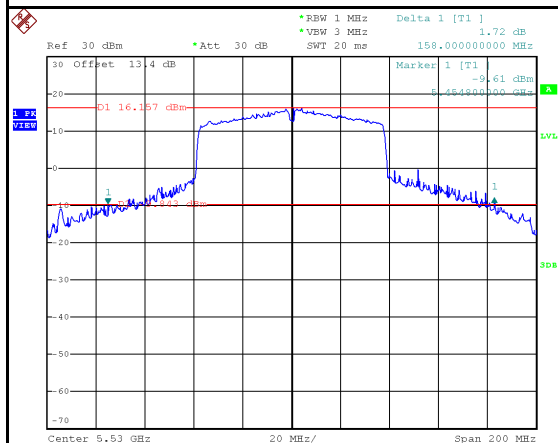


Date: 24.NOV.2025 14:55:34

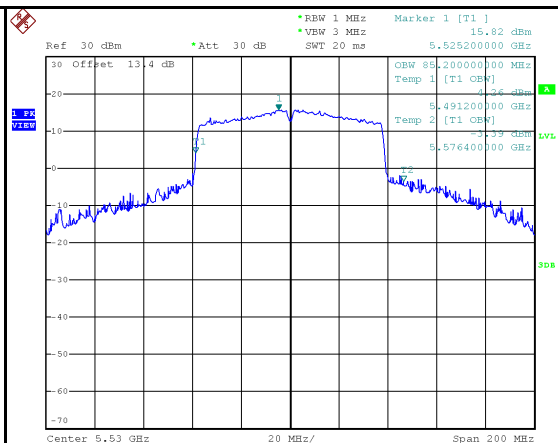


Date: 24.NOV.2025 14:55:45

5610 MHz

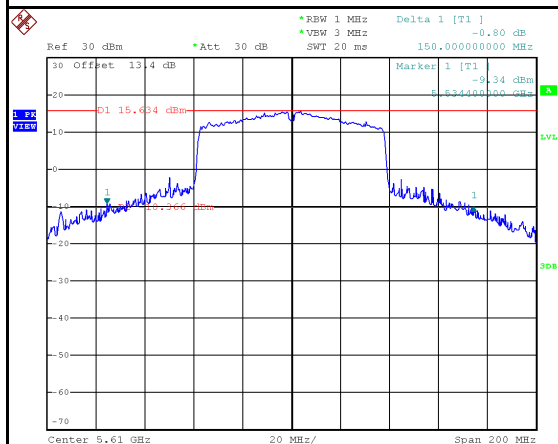


Date: 24.NOV.2025 14:56:54

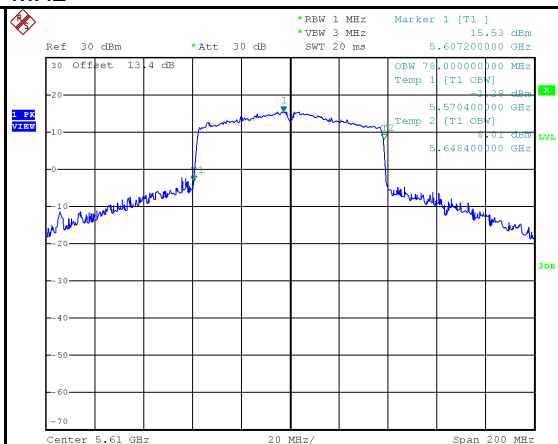



Date: 24.NOV.2025 14:57:05

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	62.80	158.40	500	Pass

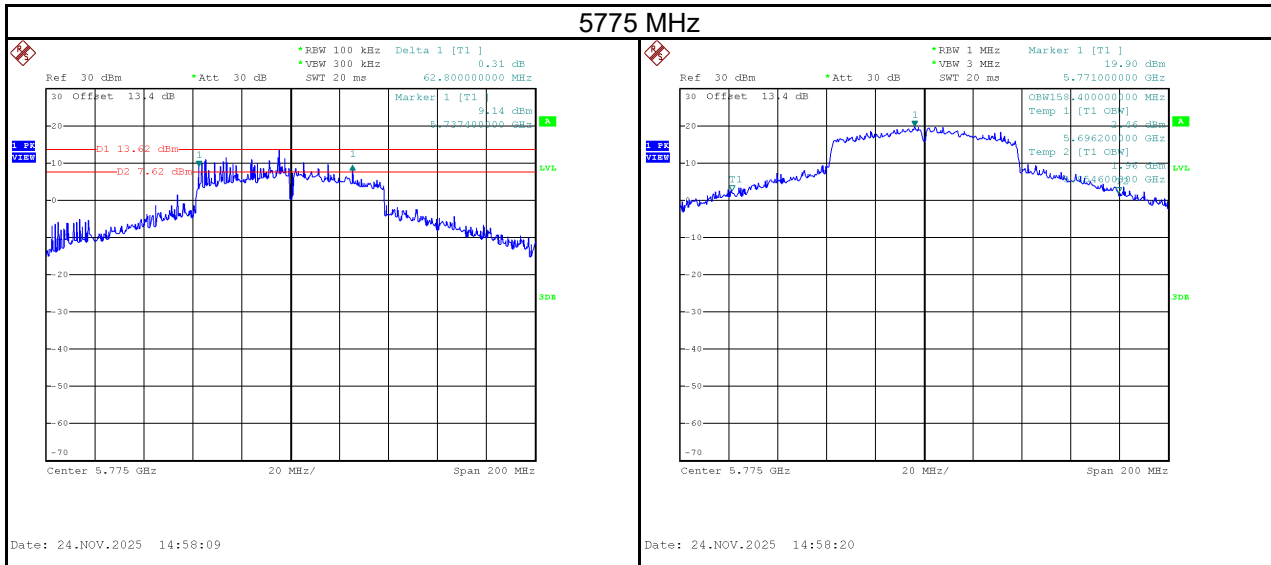


Test Mode	IEEE 802.11ax (HE20)_Ant. 1
-----------	-----------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	43.44	25.80	No limit
5200	44.88	22.56	No limit
5240	44.16	23.16	No limit

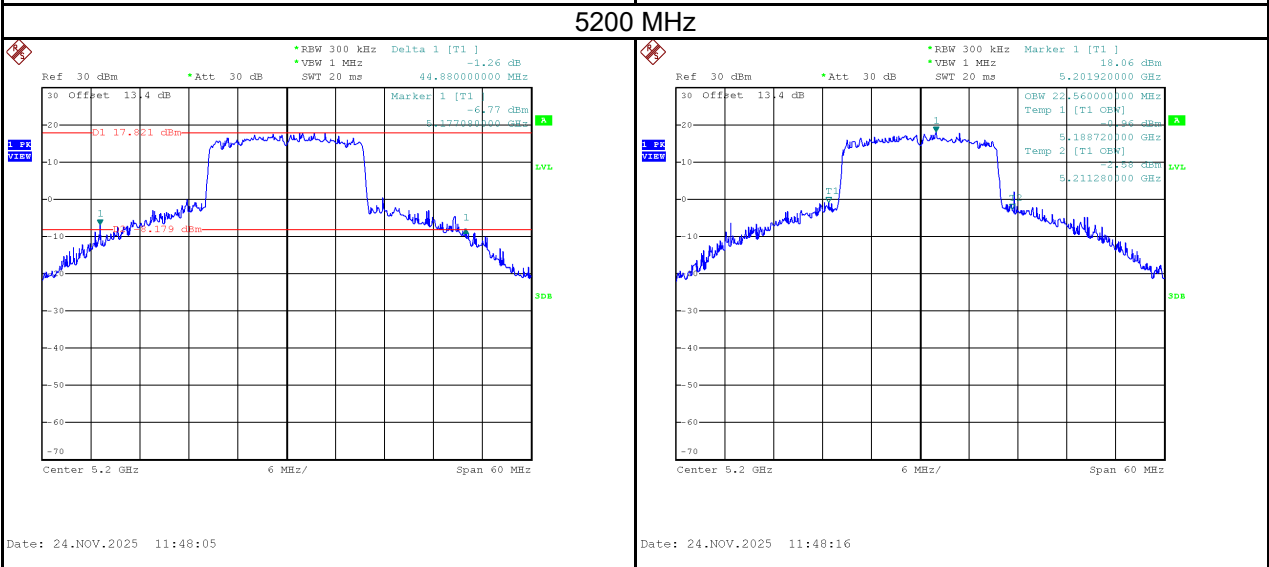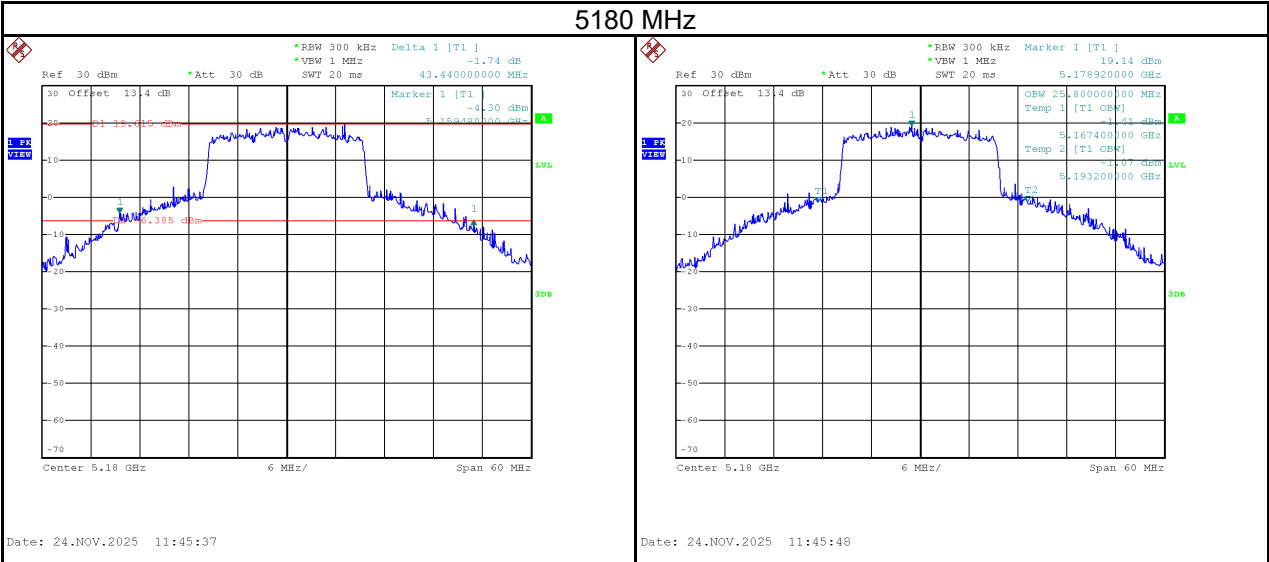

5240 MHz


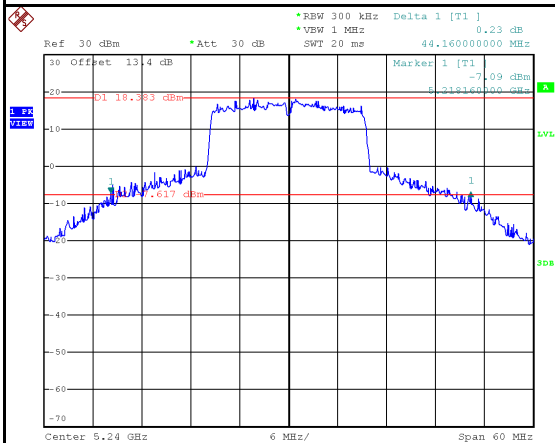


Date: 24.NOV.2025 11:50:41

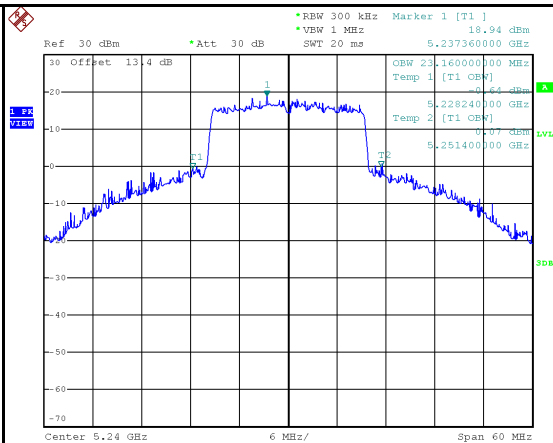


Date: 24.NOV.2025 11:50:52


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	20.16	18.96	No limit
5300	21.48	18.96	No limit
5320	20.28	18.96	No limit

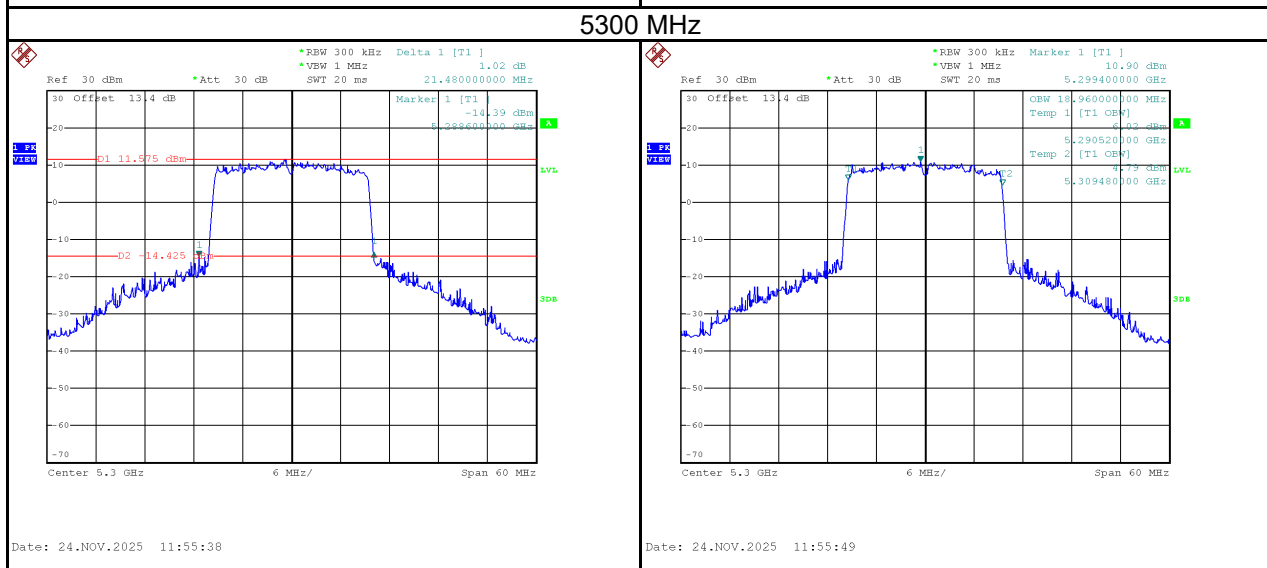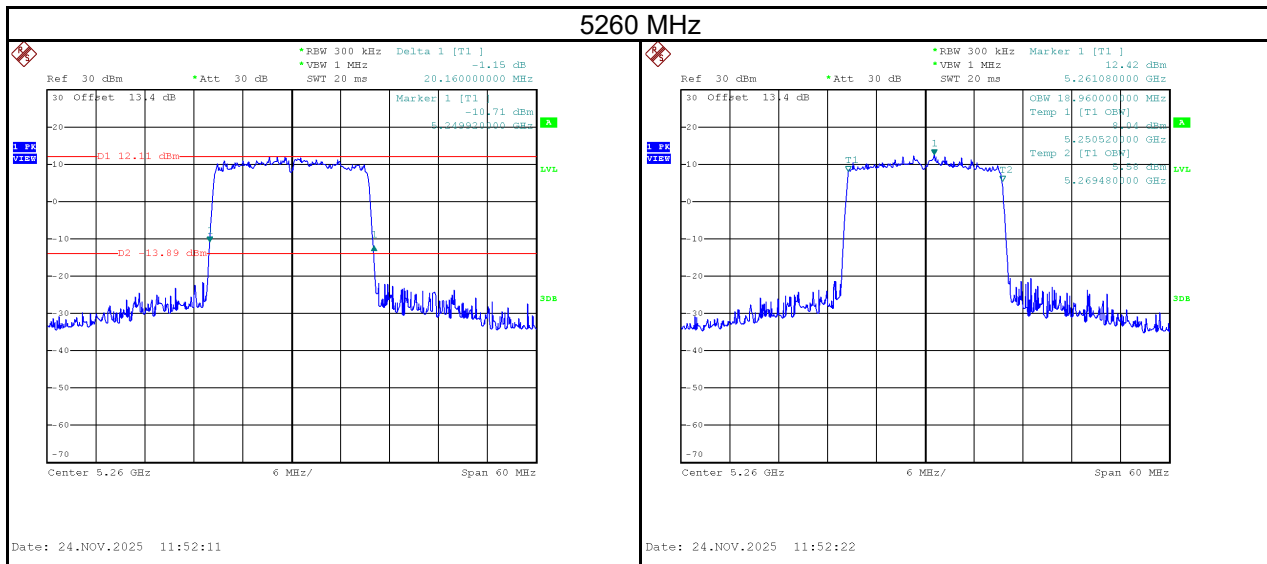

5320 MHz


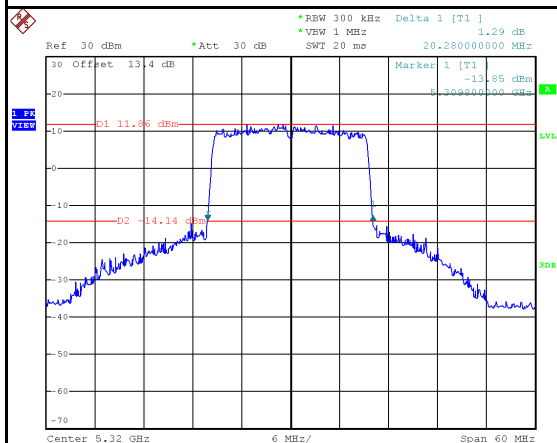



Date: 24.NOV.2025 11:57:16

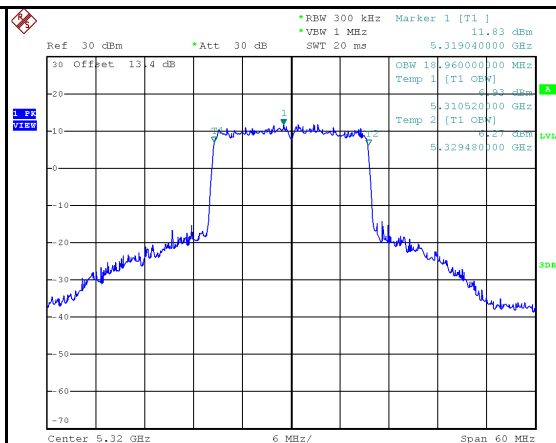

Date: 24.NOV.2025 11:57:27


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	20.40	18.96	No limit
5580	20.16	18.96	No limit
5700	20.52	18.96	No limit

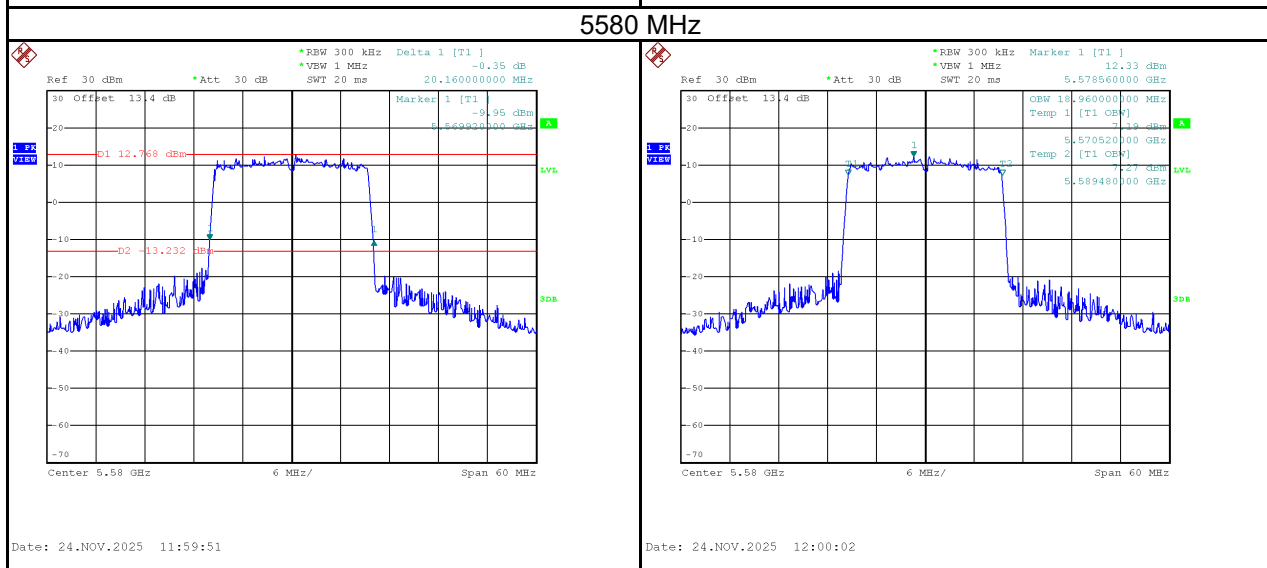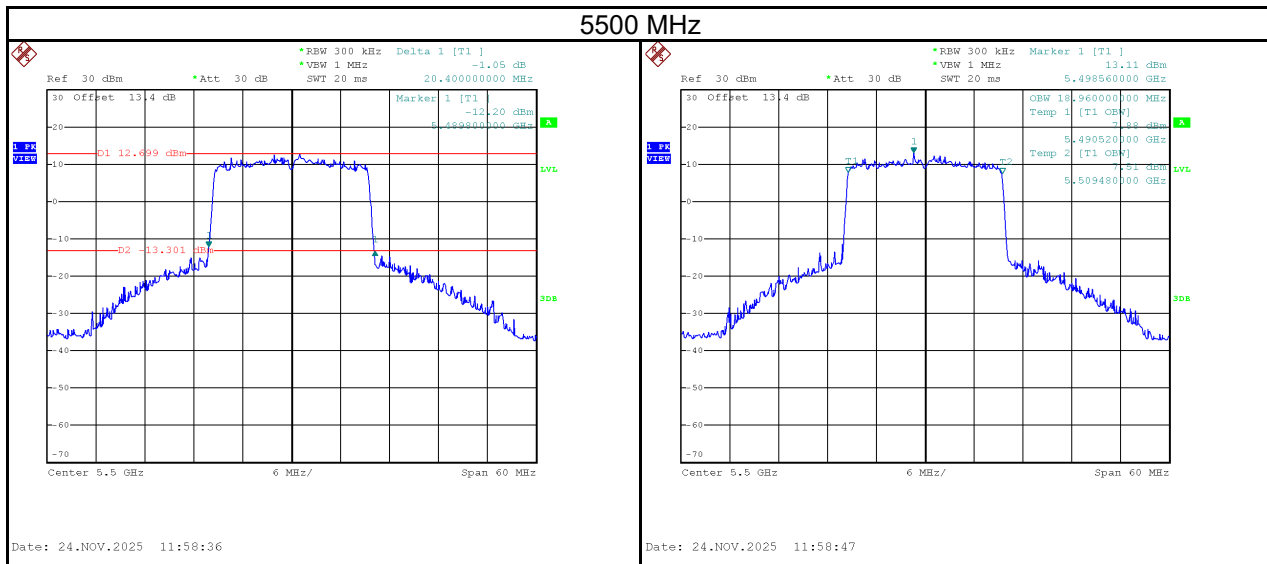

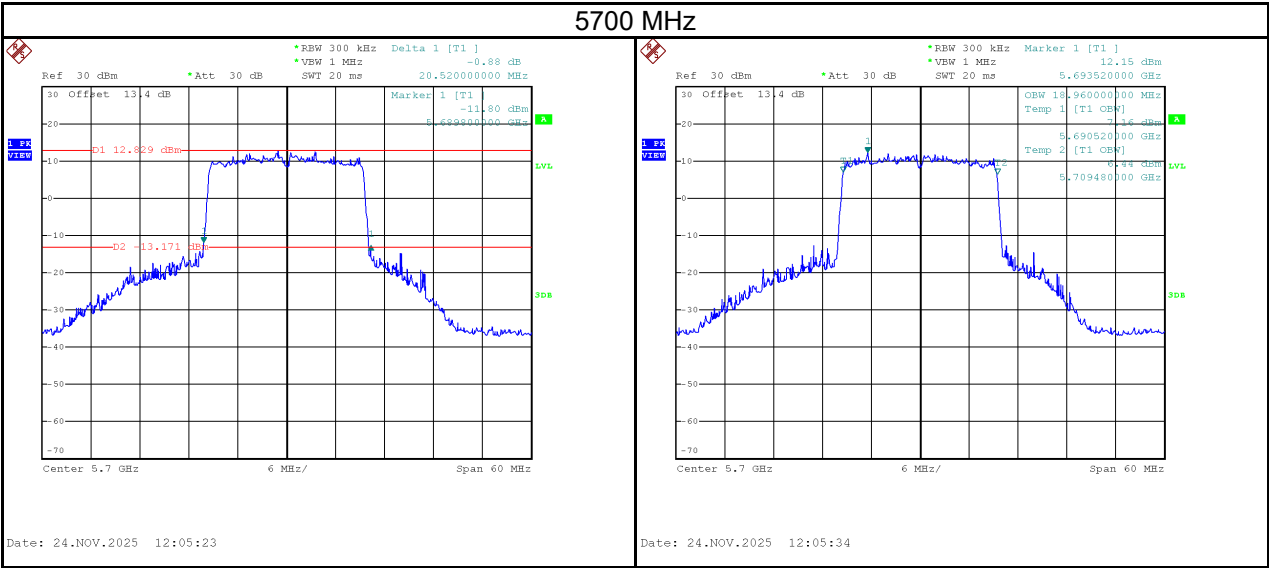


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	18.48	44.28	500	Pass
5785	18.48	44.64	500	Pass
5825	18.72	44.28	500	Pass

5745 MHz

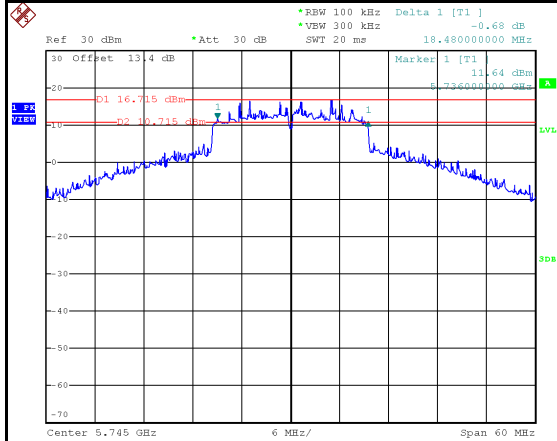


Date: 24.NOV.2025 12:06:36

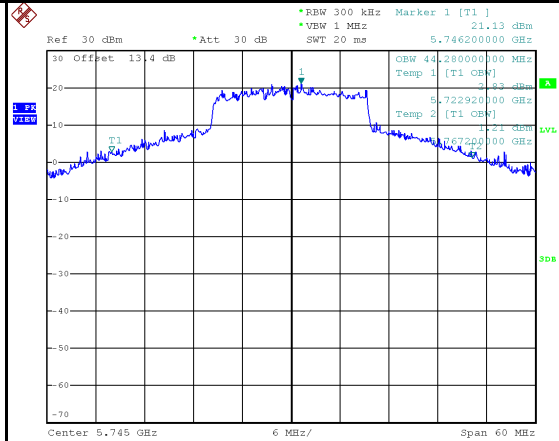


Date: 24.NOV.2025 12:06:48


5785 MHz

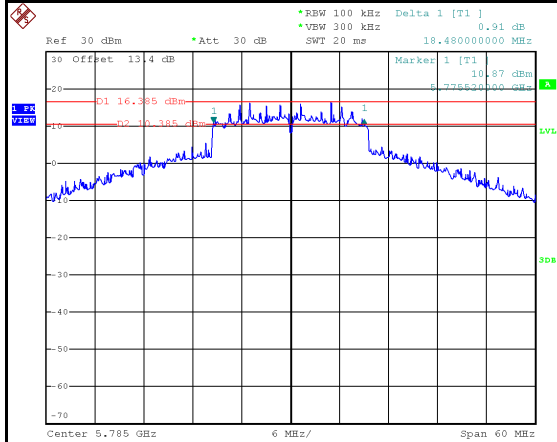

Date: 24.NOV.2025 12:07:39


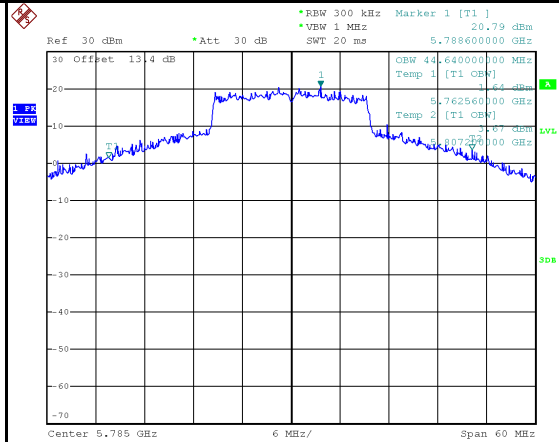


Date: 24.NOV.2025 12:07:50

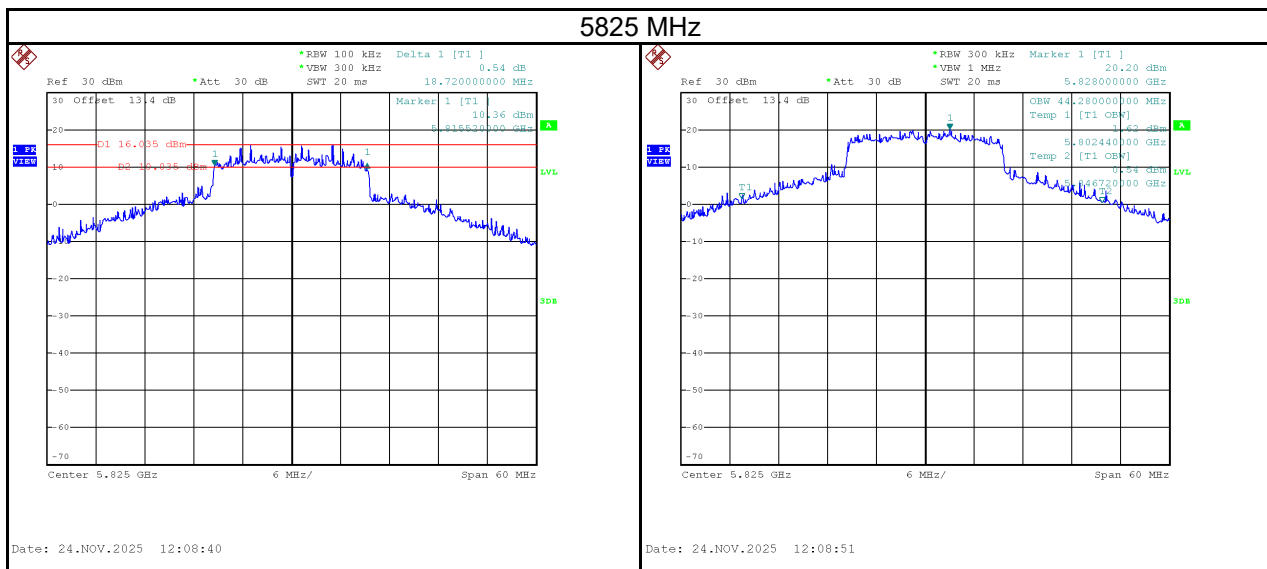


Test Mode	IEEE 802.11ax (HE40)_Ant. 1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	99.80	70.00	No limit
5230	99.40	69.80	No limit

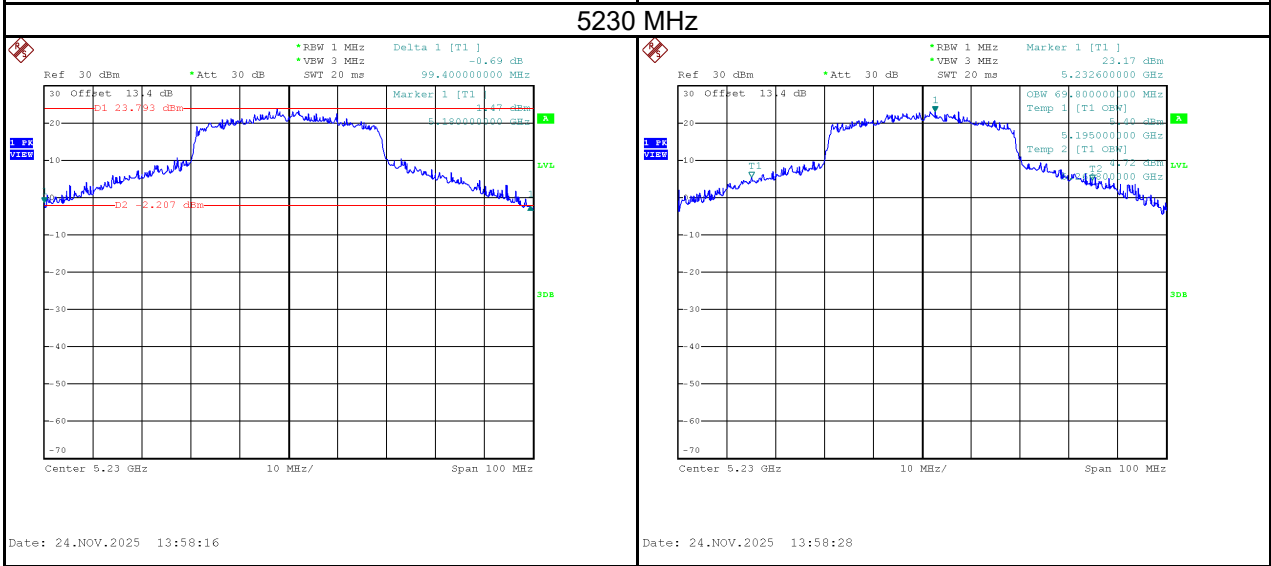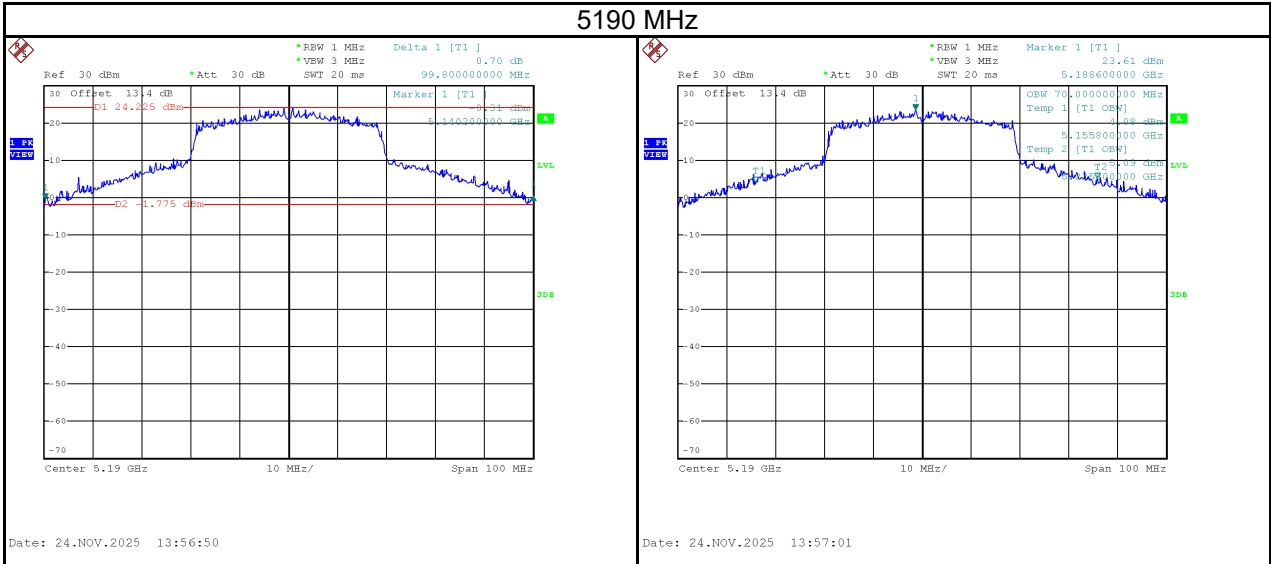


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	39.60	38.00	No limit
5310	45.20	38.20	No limit

5270 MHz

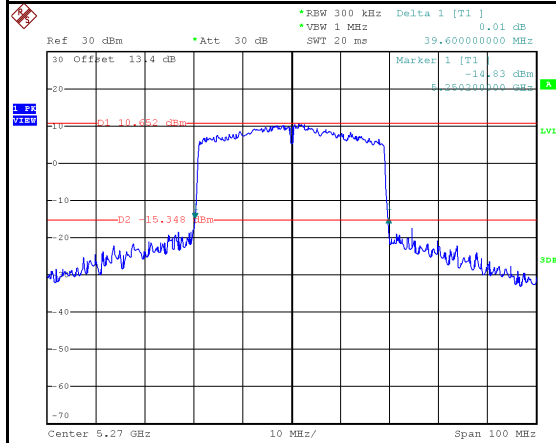


Date: 24.NOV.2025 13:59:49

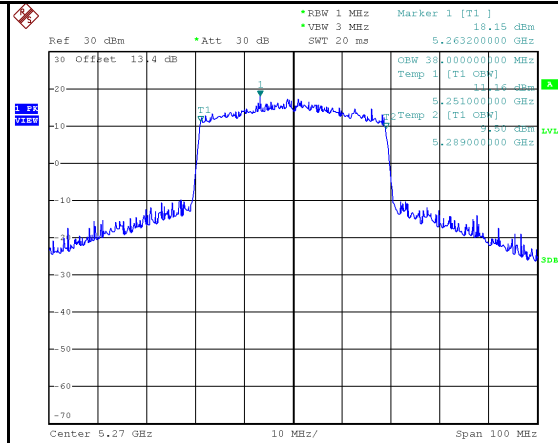


Date: 24.NOV.2025 14:00:00

5310 MHz


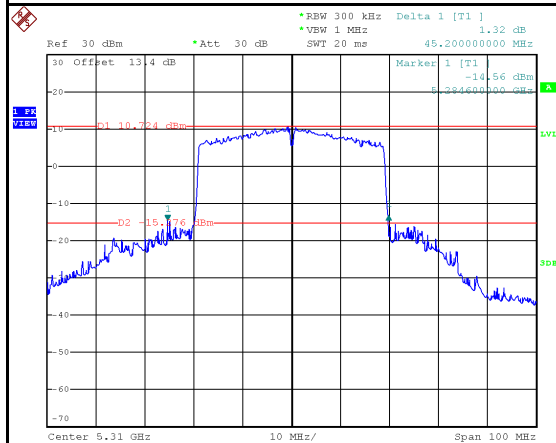


Date: 24.NOV.2025 14:01:07

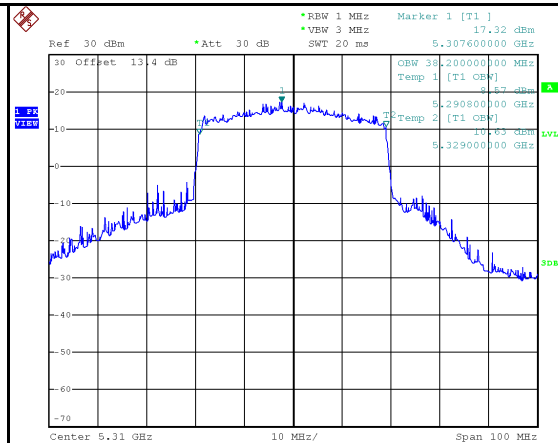


Date: 24.NOV.2025 14:01:18


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	39.60	38.20	No limit
5550	40.00	38.00	No limit
5670	39.60	38.20	No limit

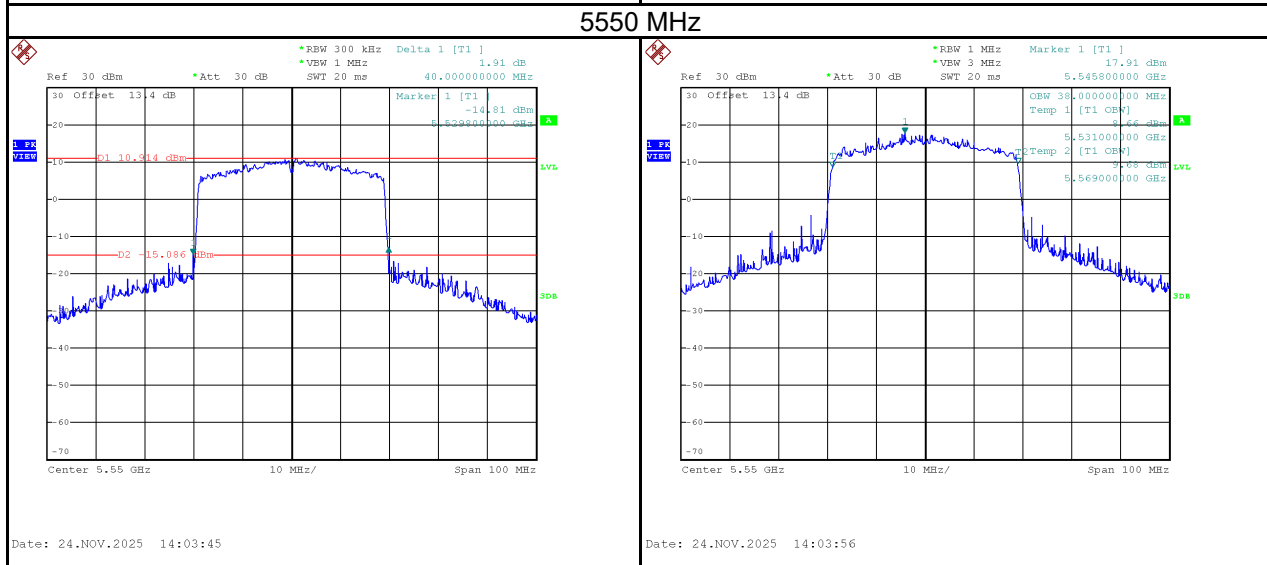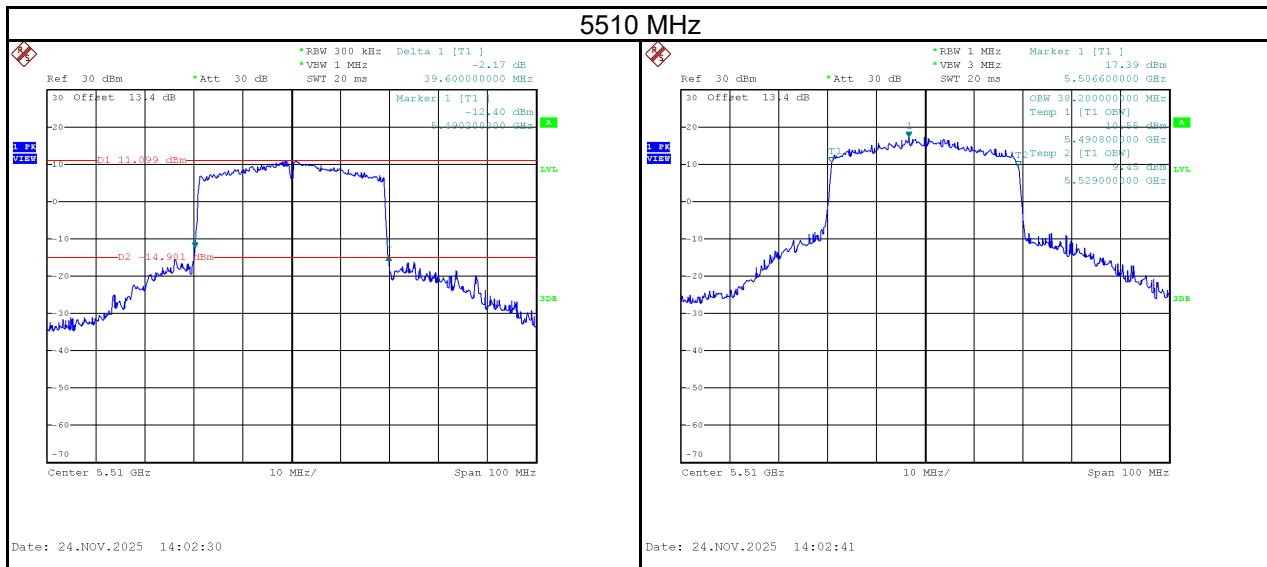

5670 MHz


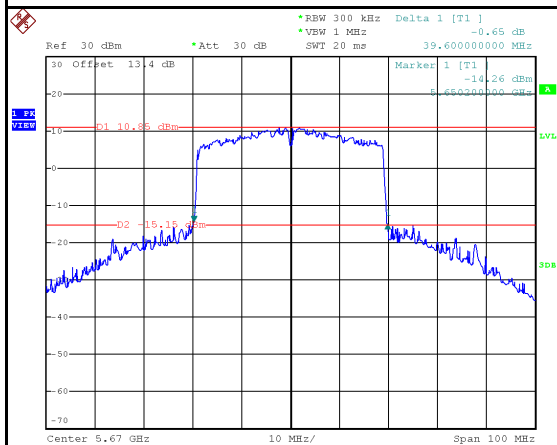


Date: 24.NOV.2025 14:06:21

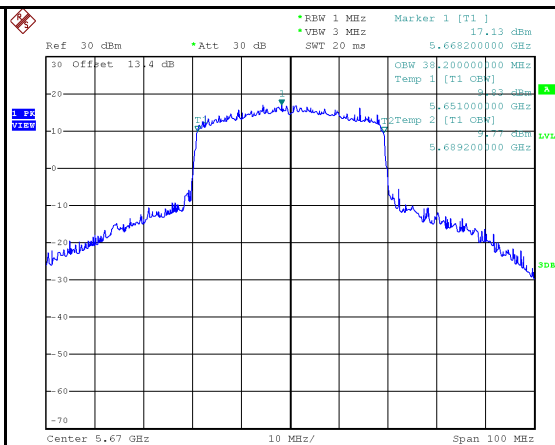


Date: 24.NOV.2025 14:06:32

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	33.80	78.20	500	Pass
5795	30.00	78.80	500	Pass

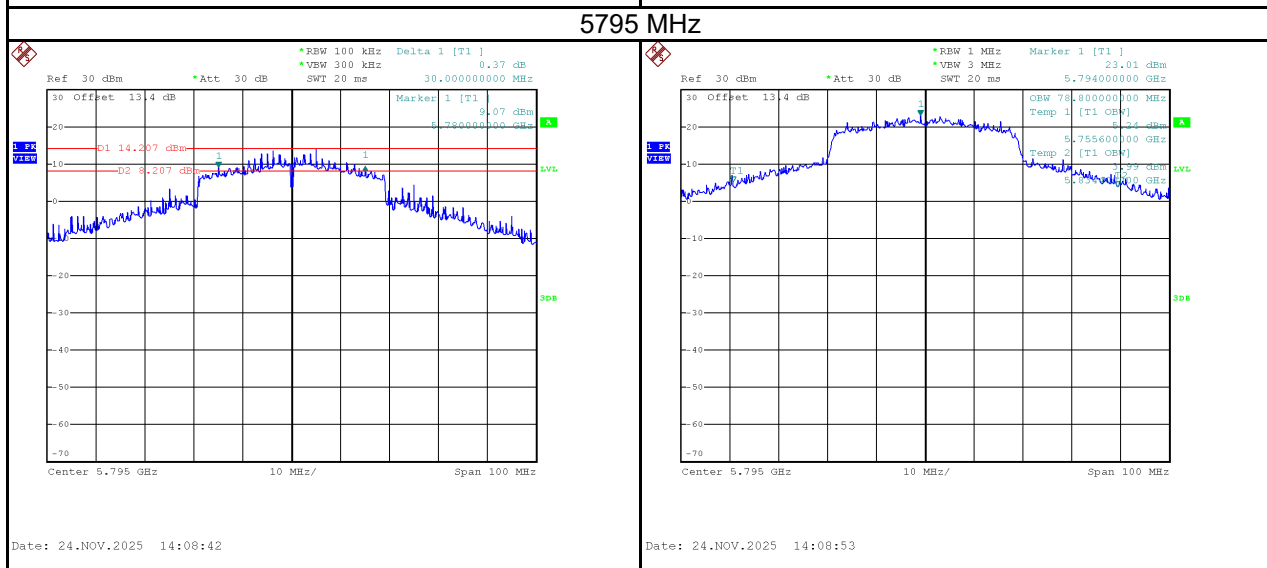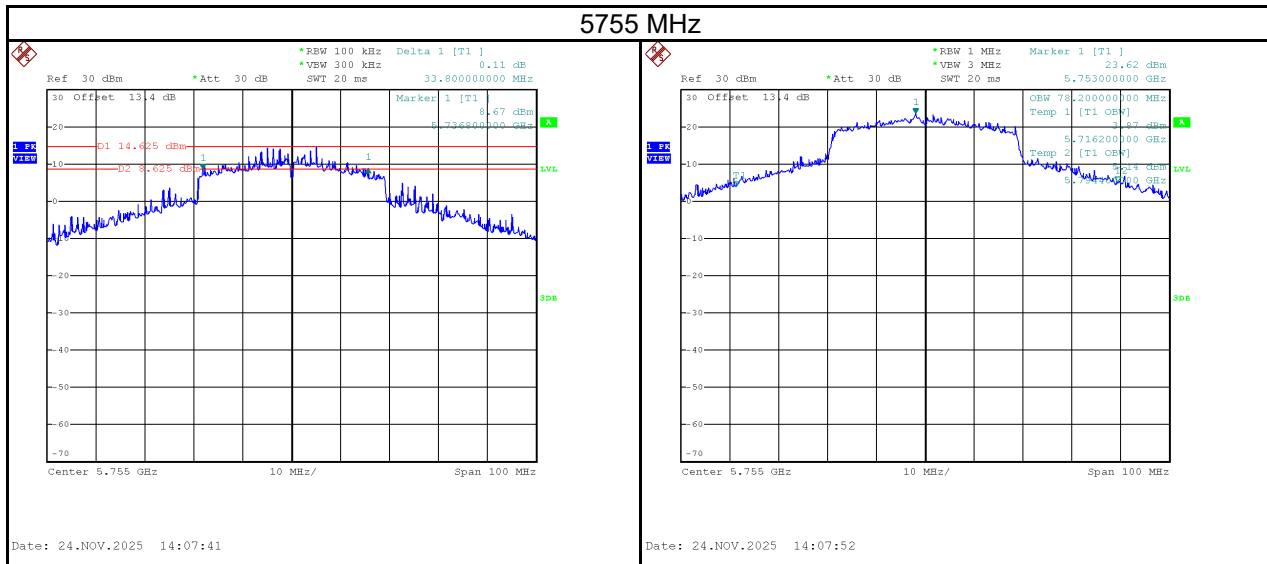


Test Mode	IEEE 802.11ax (HE80)_Ant. 1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	199.20	133.20	No limit

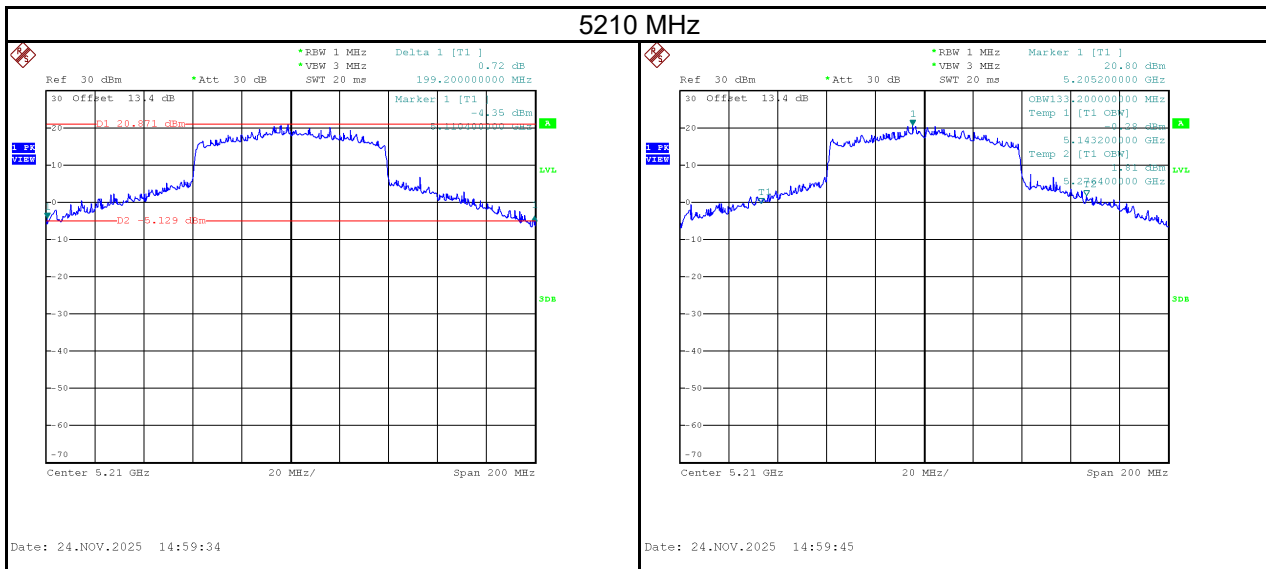


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	116.40	78.00	No limit

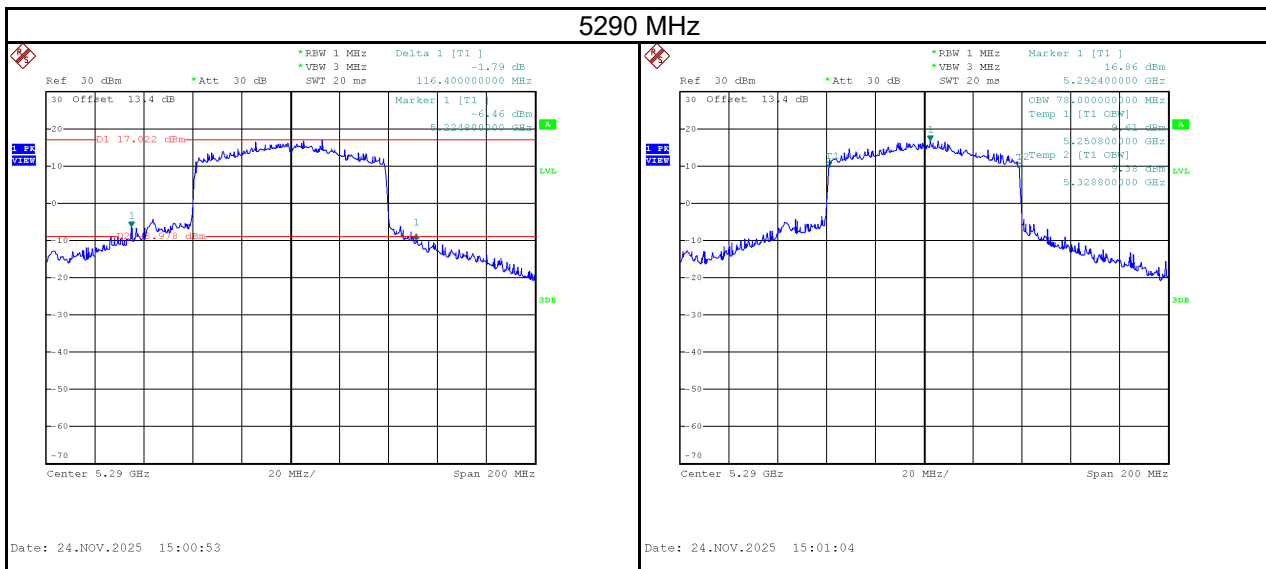


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	134.00	78.40	No limit
5610	143.20	78.40	No limit

5530 MHz

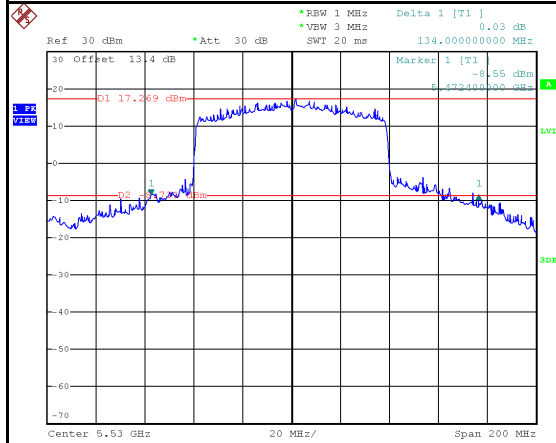


Date: 24.NOV.2025 15:02:11

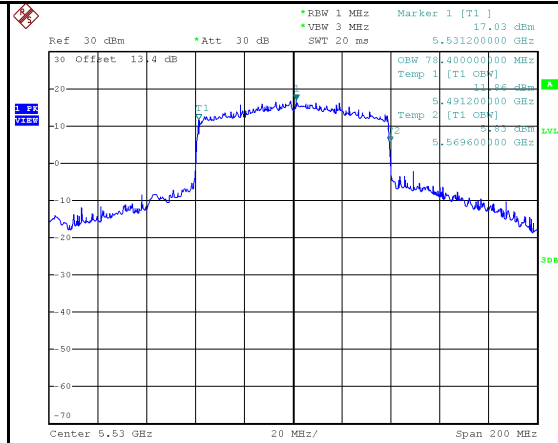


Date: 24.NOV.2025 15:02:22

5610 MHz

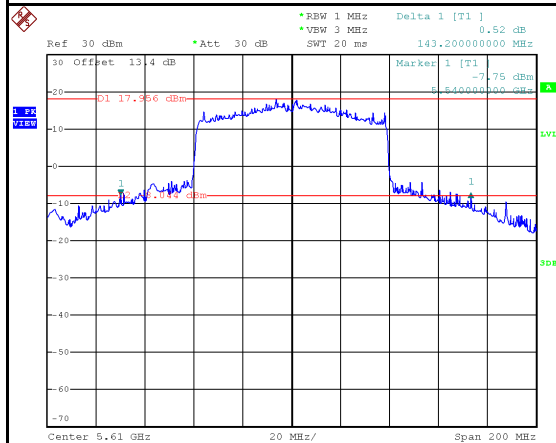


Date: 24.NOV.2025 15:03:47

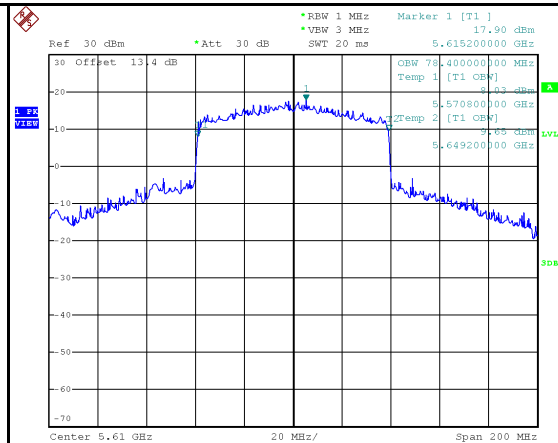


Date: 24.NOV.2025 15:03:58

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	65.20	156.40	500	Pass

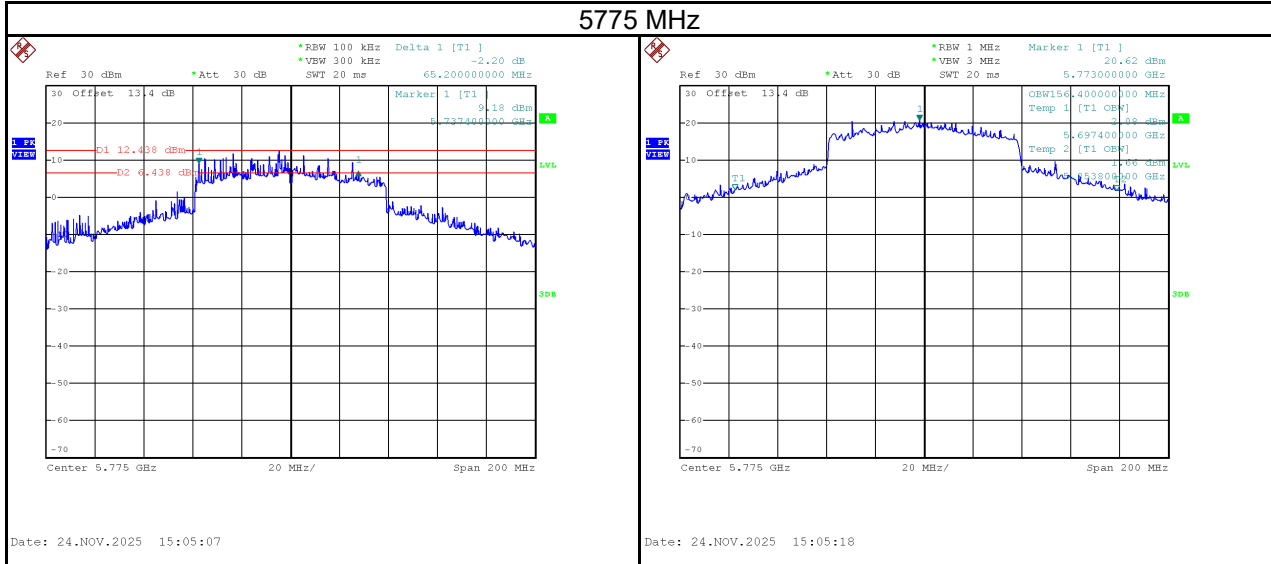


Test Mode	IEEE 802.11ax (HE160)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	393.60	240.80	No limit


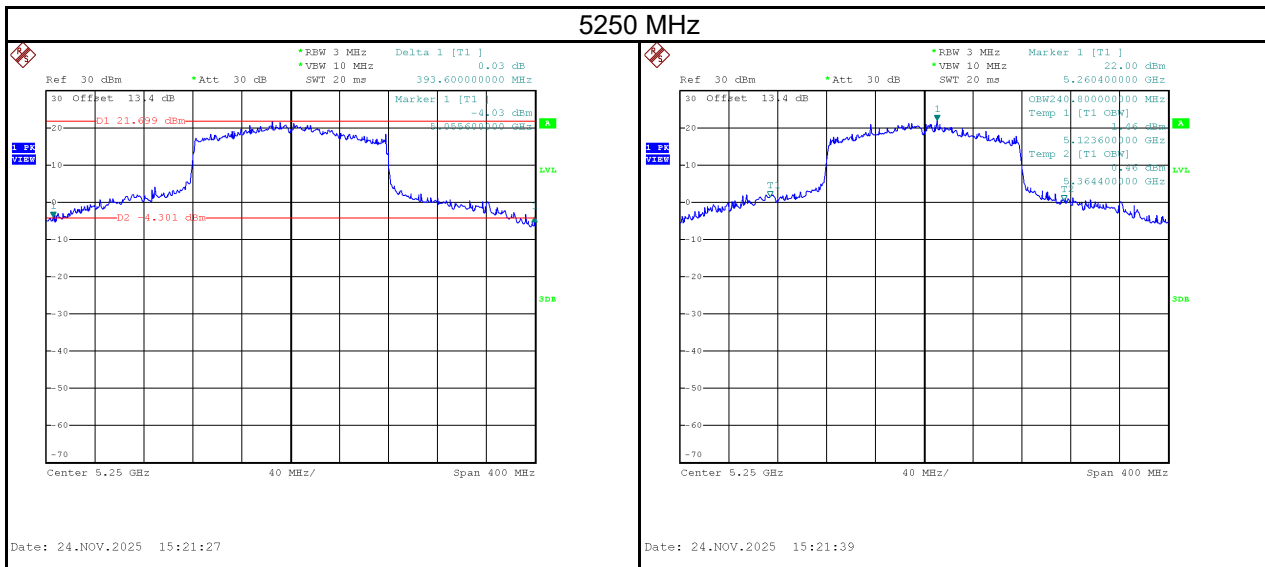


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	379.20	242.40	No limit

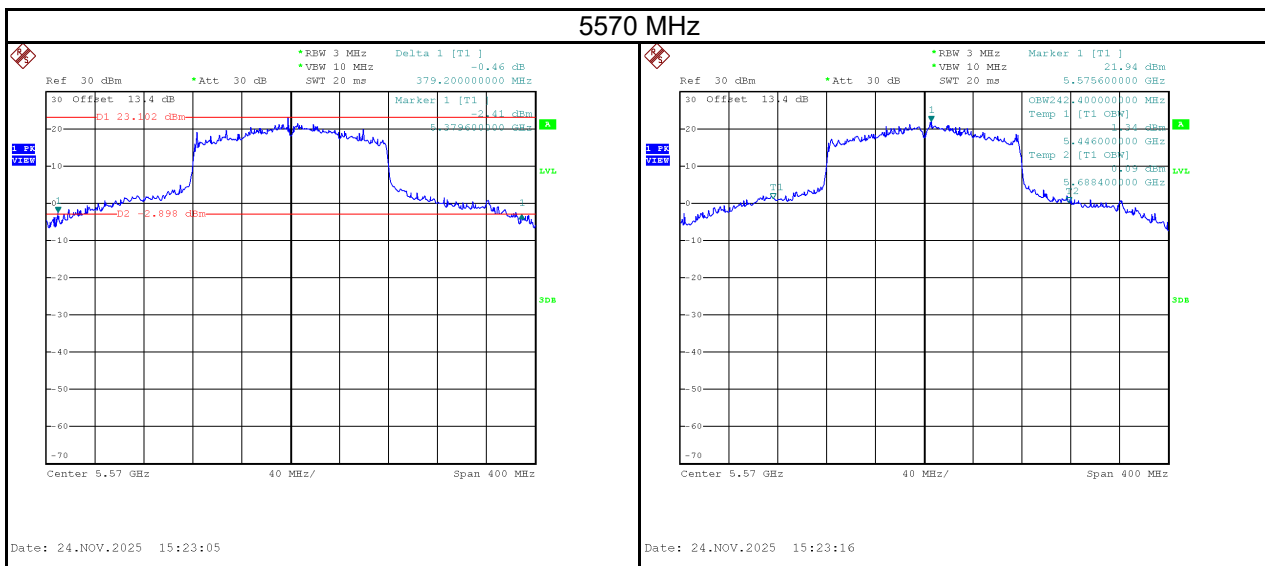


Test Mode	IEEE 802.11be (EHT20)_Ant. 1
-----------	------------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	45.84	23.40	No limit
5200	42.36	23.64	No limit
5240	45.84	23.52	No limit

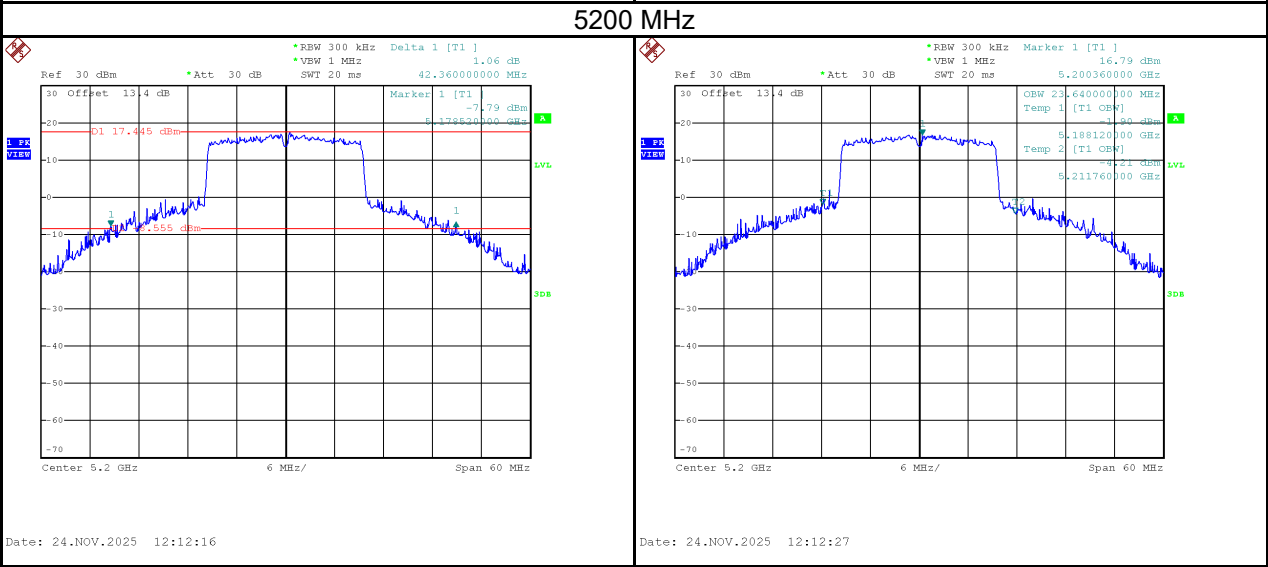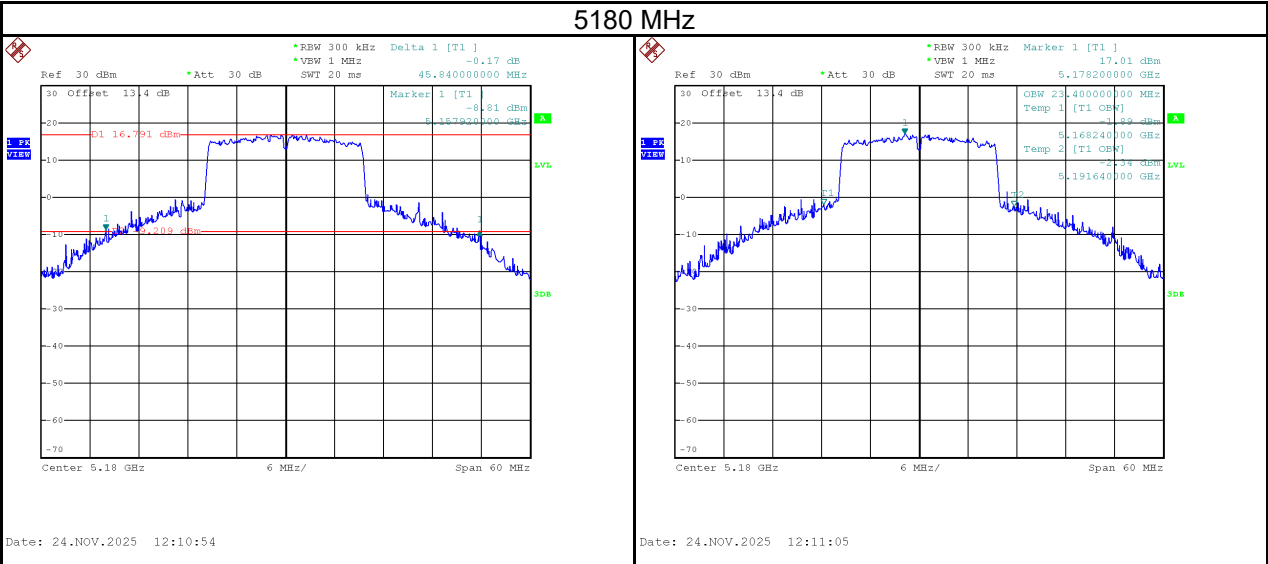

5240 MHz


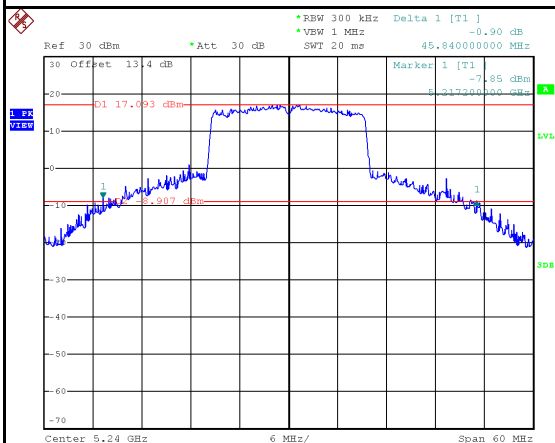


Date: 24.NOV.2025 12:13:37

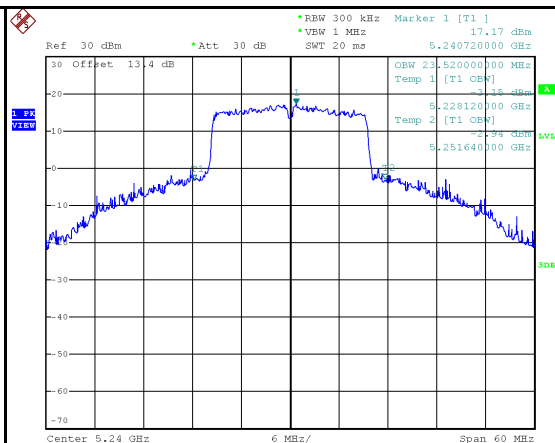


Date: 24.NOV.2025 12:13:48


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	20.16	18.96	No limit
5300	24.00	18.96	No limit
5320	25.08	18.96	No limit

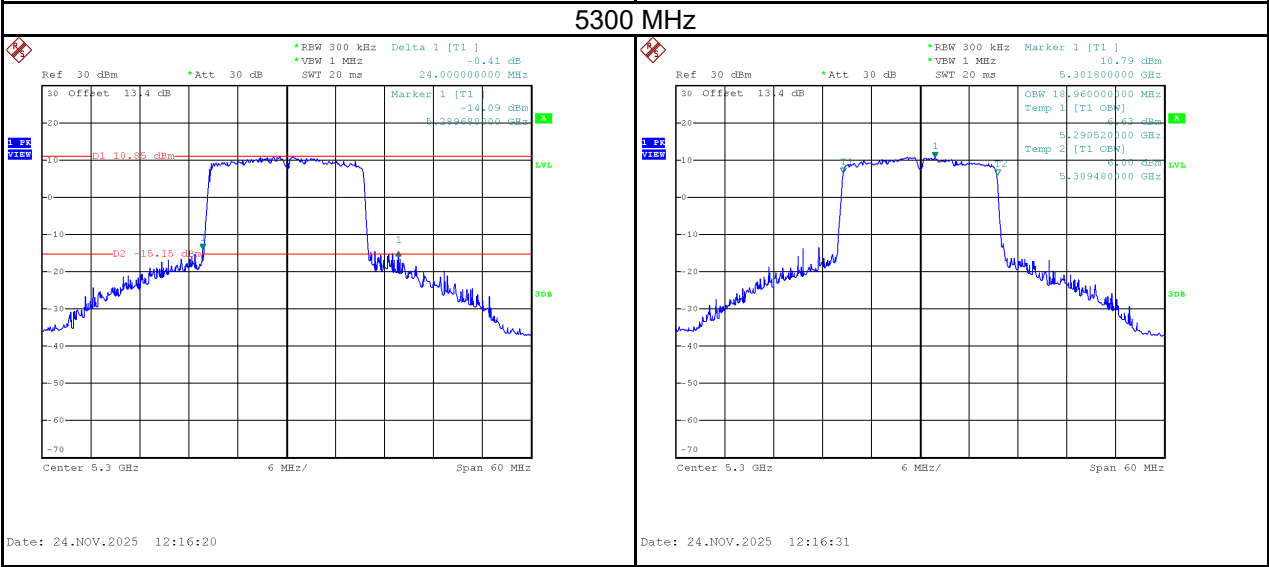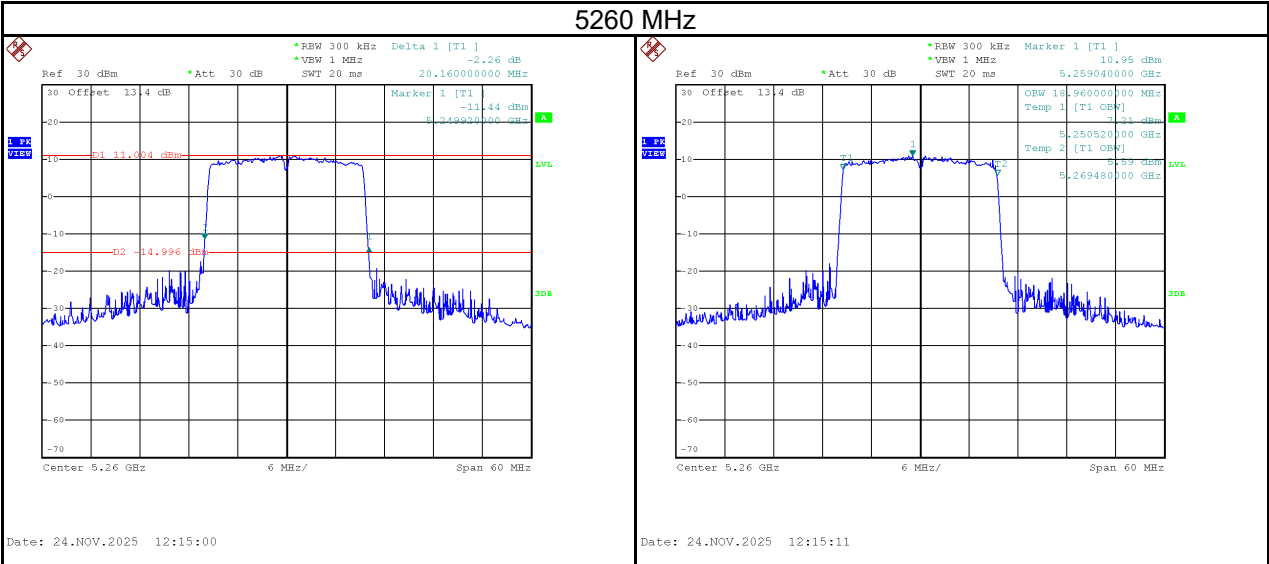

5320 MHz


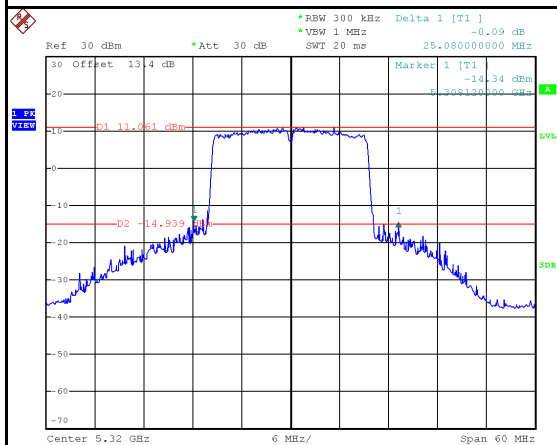



Date: 24.NOV.2025 12:17:40

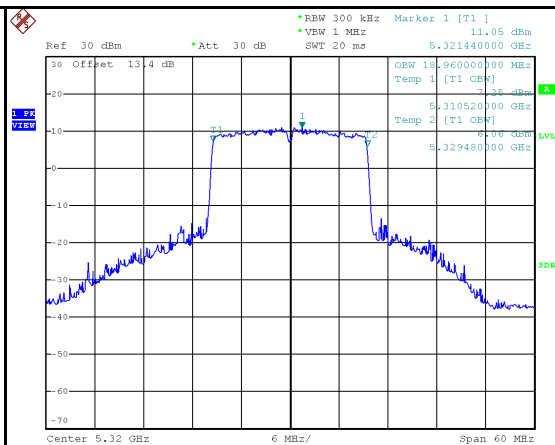

Date: 24.NOV.2025 12:17:51


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	23.16	18.96	No limit
5580	20.16	18.96	No limit
5700	24.00	18.96	No limit

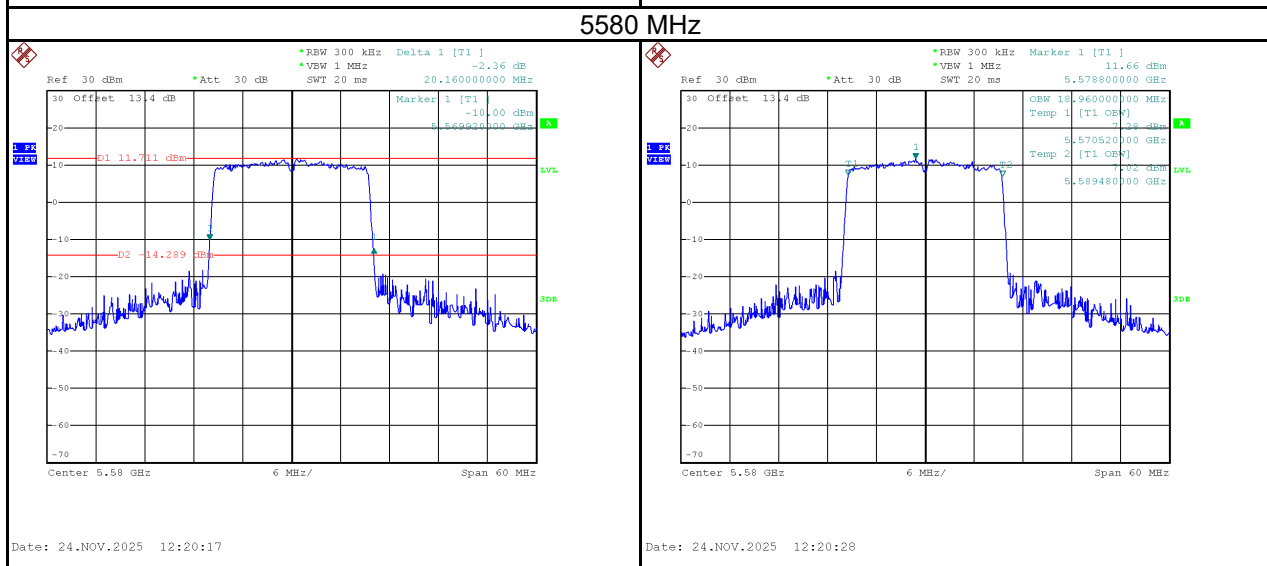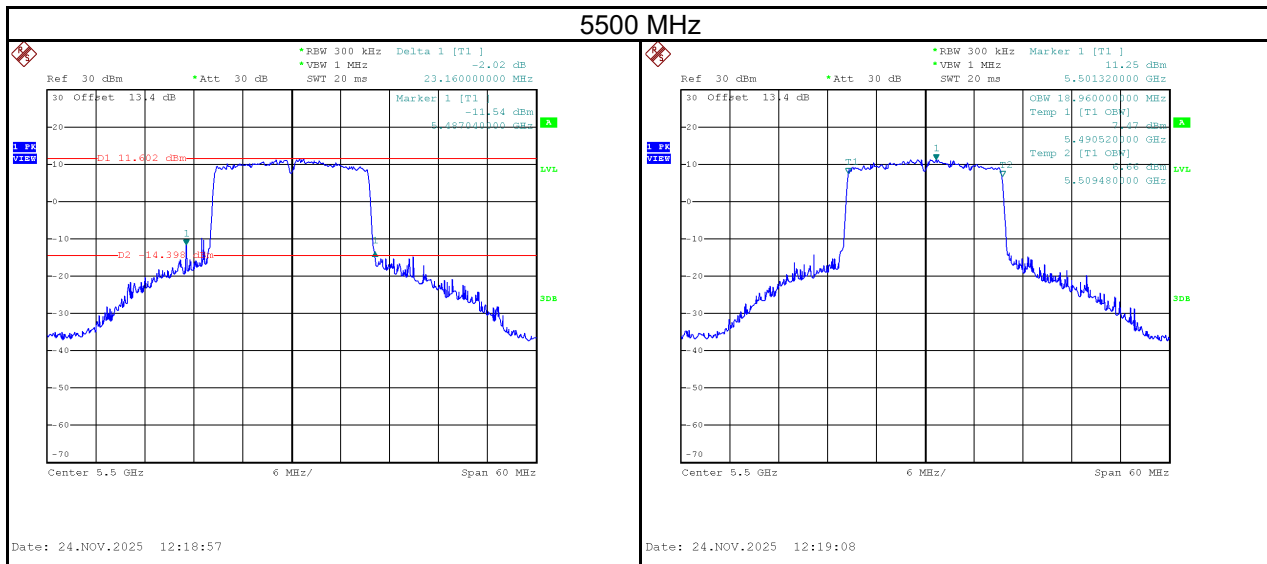

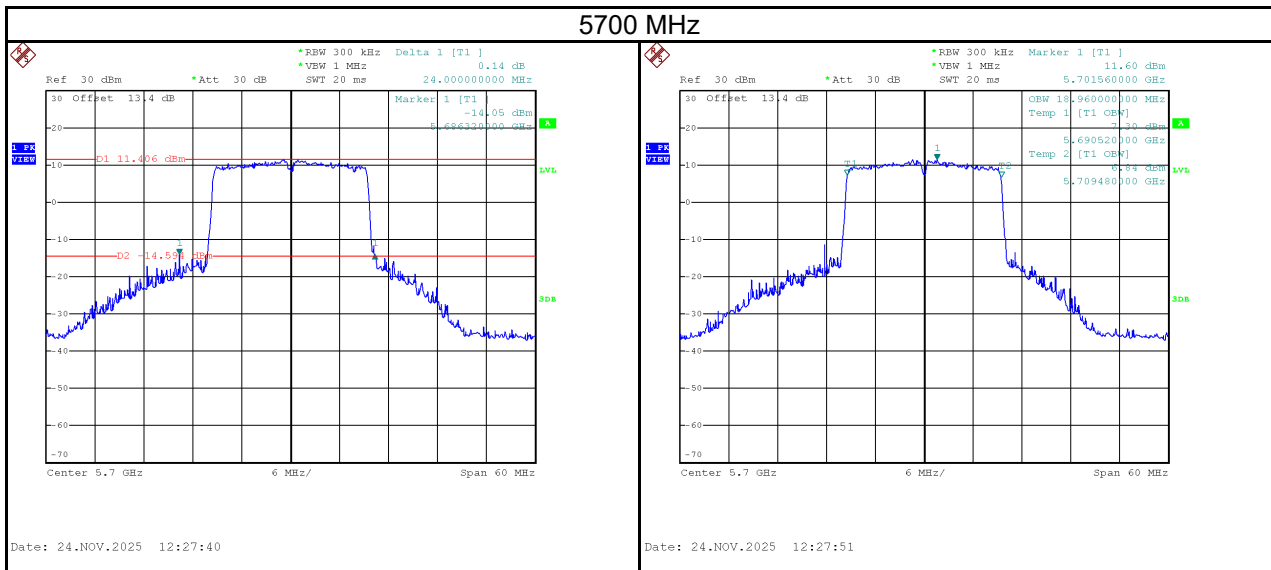


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	18.84	44.64	500	Pass
5785	18.60	44.40	500	Pass
5825	18.84	43.68	500	Pass

5745 MHz

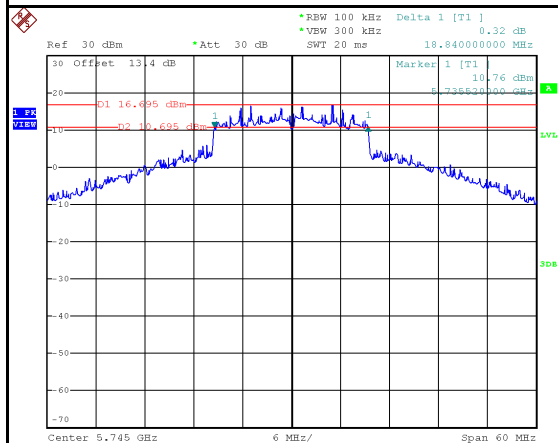


Date: 24.NOV.2025 12:29:30

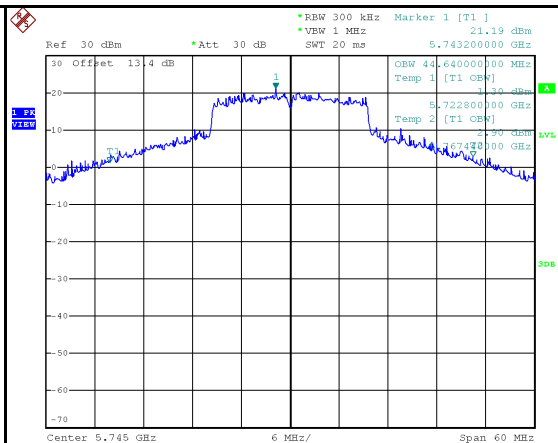


Date: 24.NOV.2025 12:29:41


5785 MHz

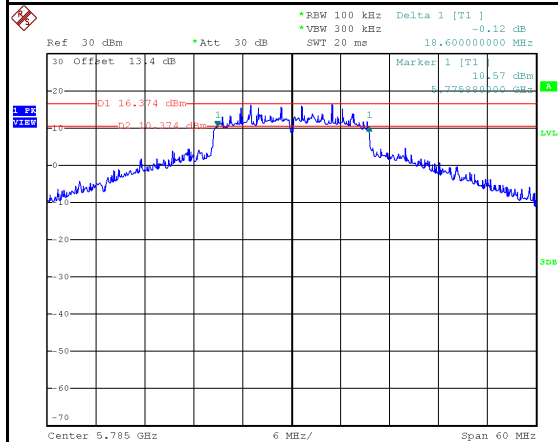

Date: 24.NOV.2025 12:30:34


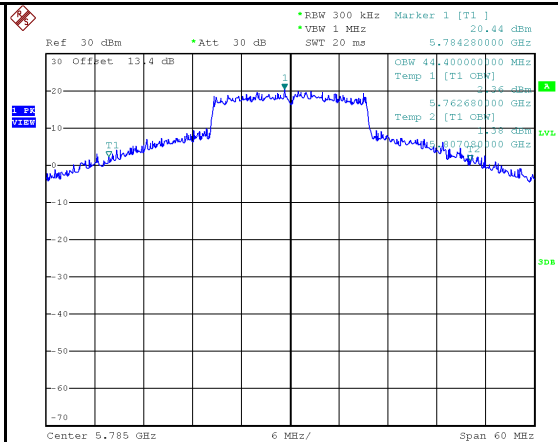


Date: 24.NOV.2025 12:30:45

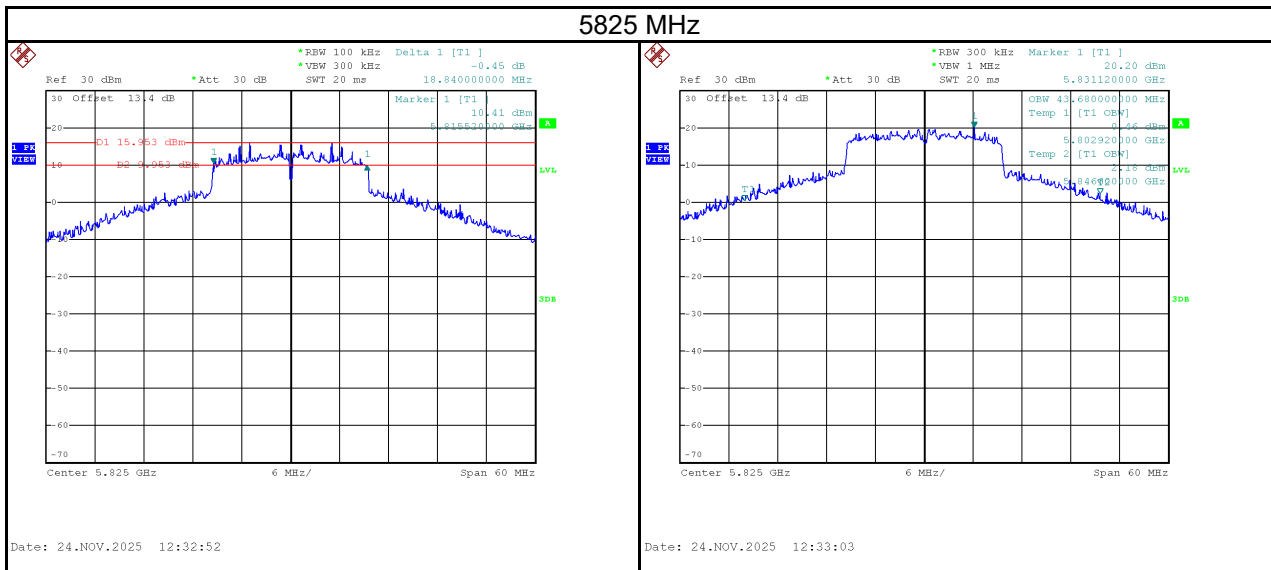


Test Mode	IEEE 802.11be (EHT40)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	99.80	67.80	No limit
5230	99.40	69.00	No limit

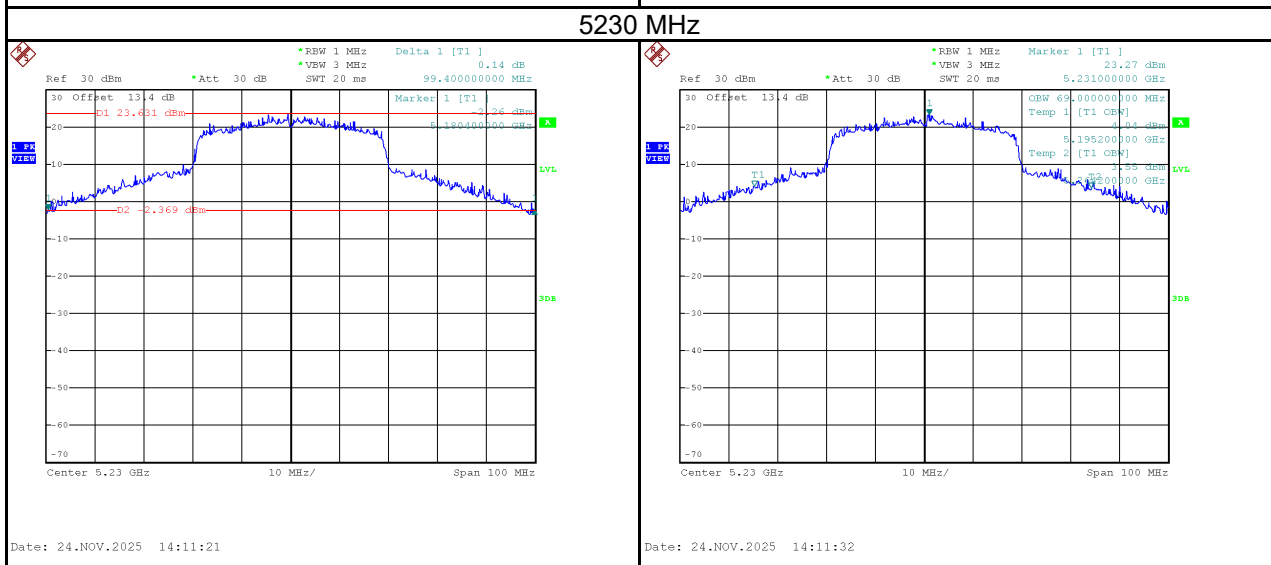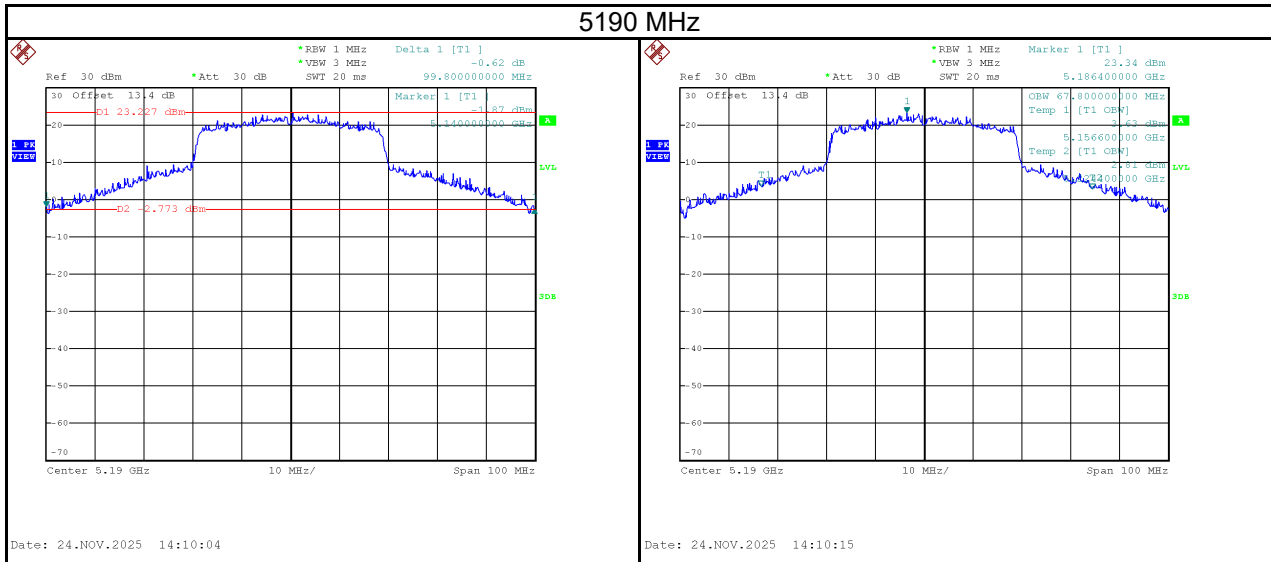


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	39.20	38.00	No limit
5310	39.60	38.20	No limit

5270 MHz

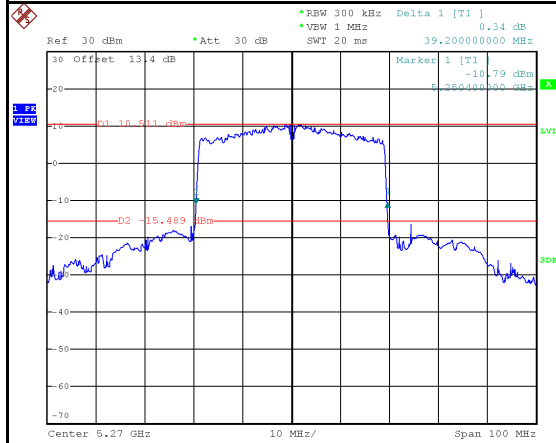


Date: 24.NOV.2025 14:14:41

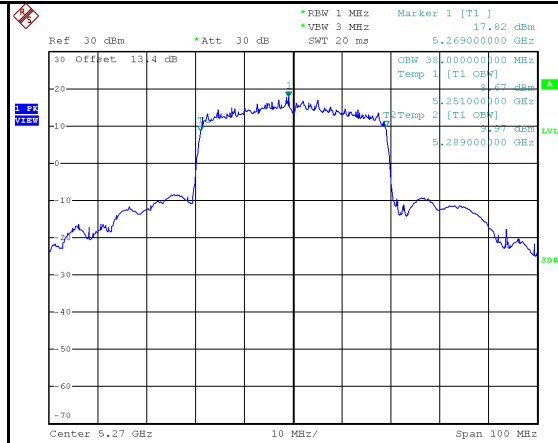


Date: 24.NOV.2025 14:14:53

5310 MHz

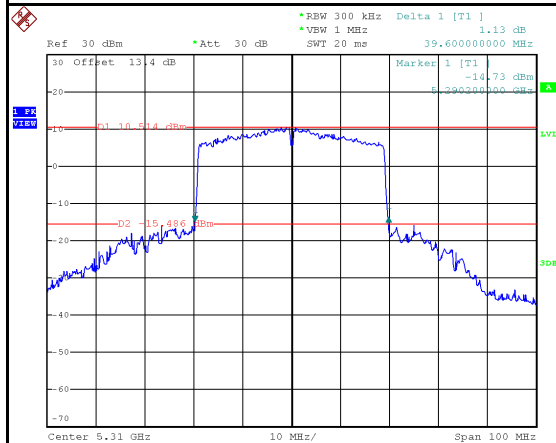


Date: 24.NOV.2025 14:16:09

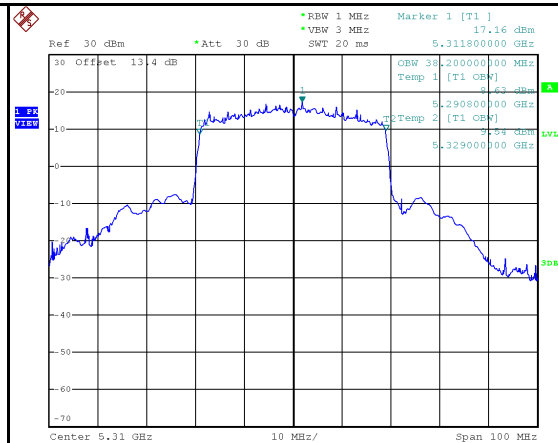


Date: 24.NOV.2025 14:16:20

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	42.40	38.00	No limit
5550	39.40	38.00	No limit
5670	39.40	38.00	No limit

5510 MHz

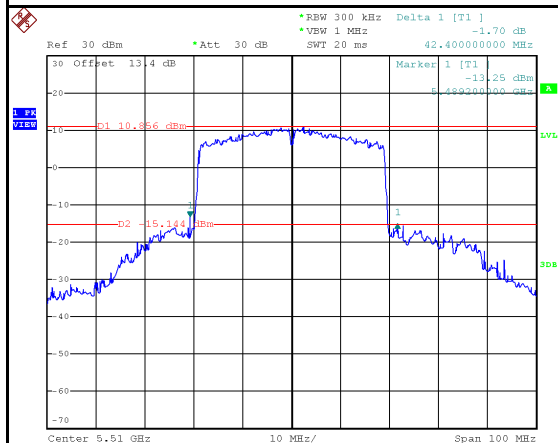


Date: 24.NOV.2025 14:17:28

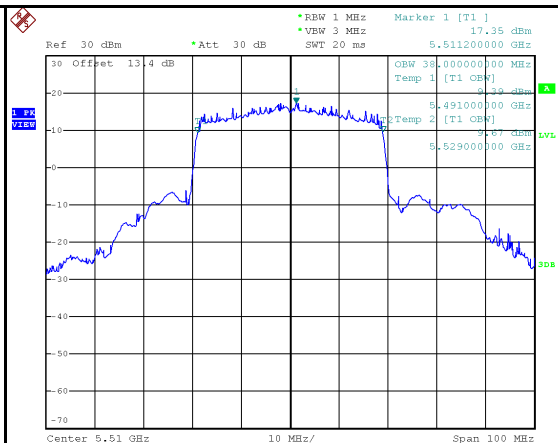


Date: 24.NOV.2025 14:17:39

5550 MHz

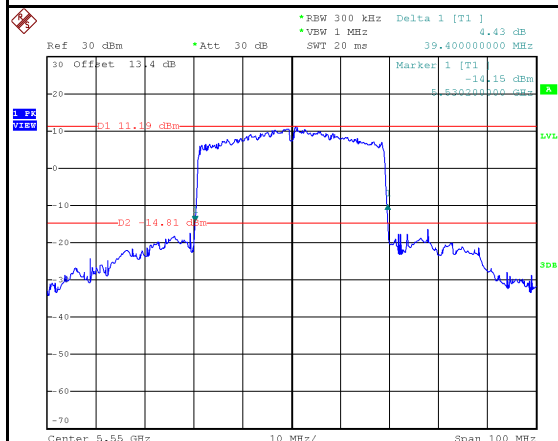


Date: 24.NOV.2025 14:18:45

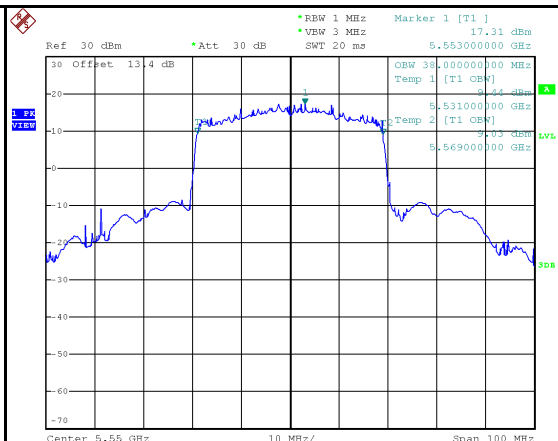


Date: 24.NOV.2025 14:18:56

5670 MHz

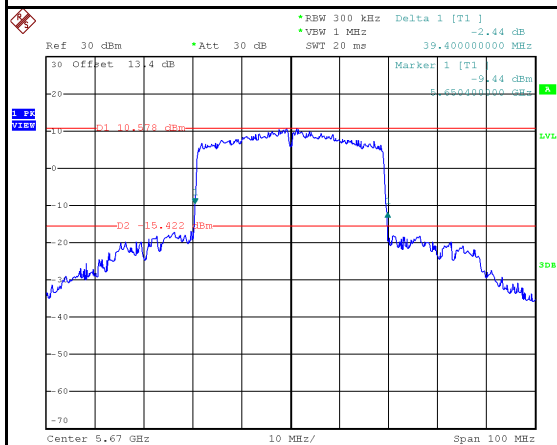


Date: 24.NOV.2025 14:21:53

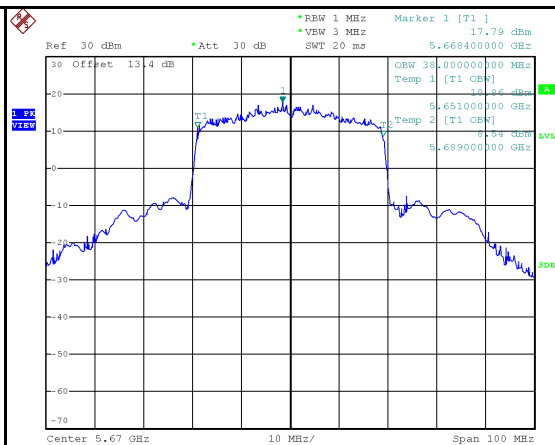


Date: 24.NOV.2025 14:22:04

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	30.00	78.20	500	Pass
5795	31.80	78.60	500	Pass

5755 MHz

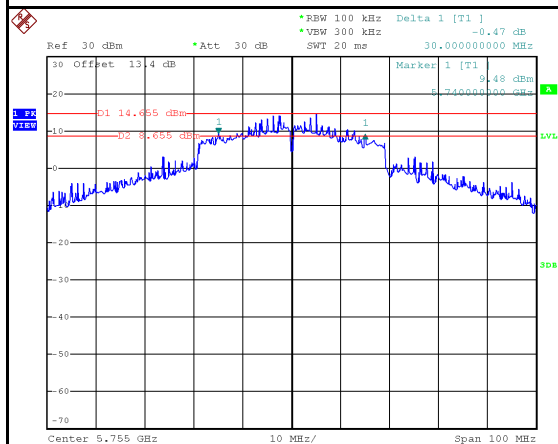


Date: 24.NOV.2025 14:23:32

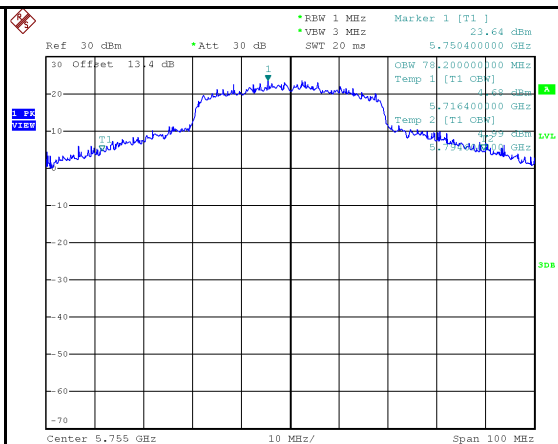


Date: 24.NOV.2025 14:23:43

5795 MHz

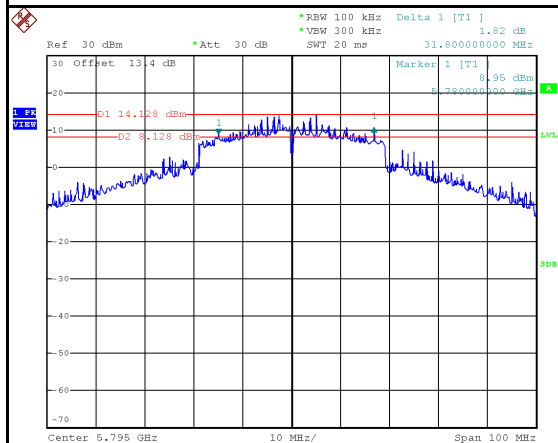


Date: 24.NOV.2025 14:24:42

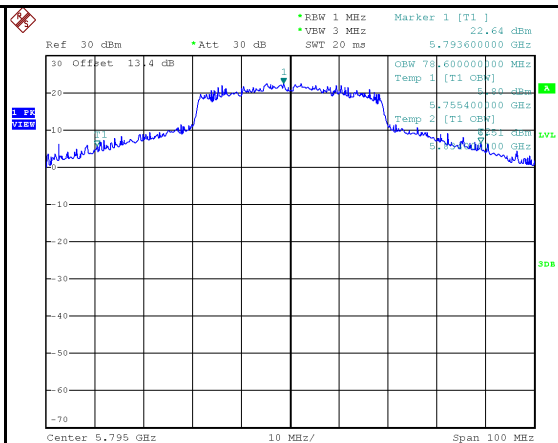


Date: 24.NOV.2025 14:24:53

Test Mode	IEEE 802.11be (EHT80)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	171.60	104.80	No limit

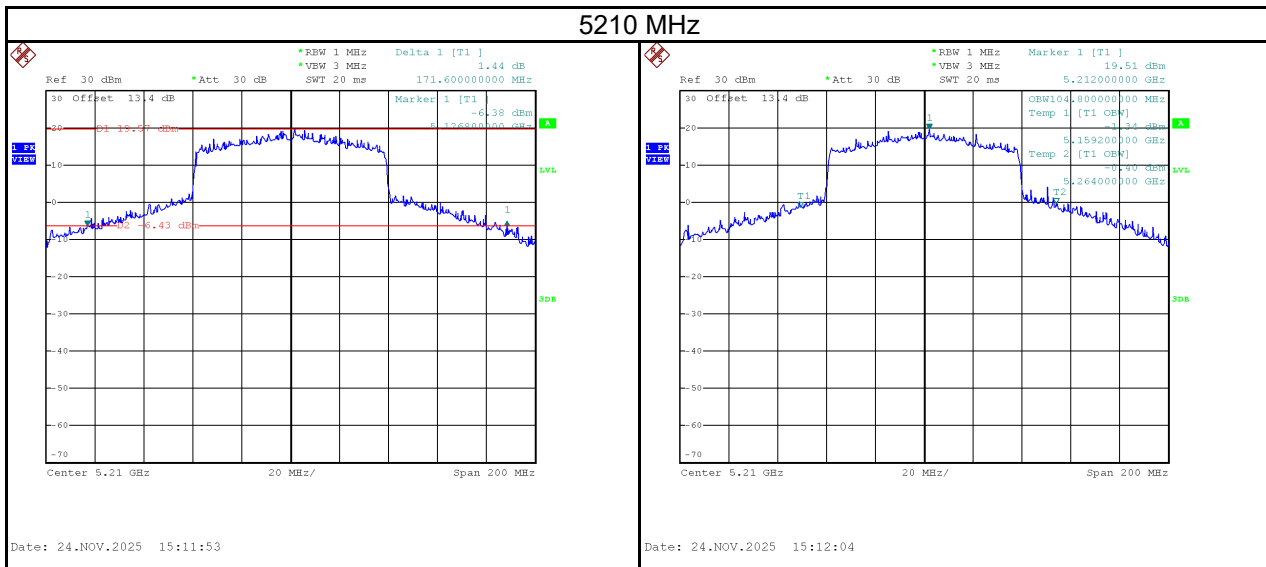


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	138.00	82.40	No limit

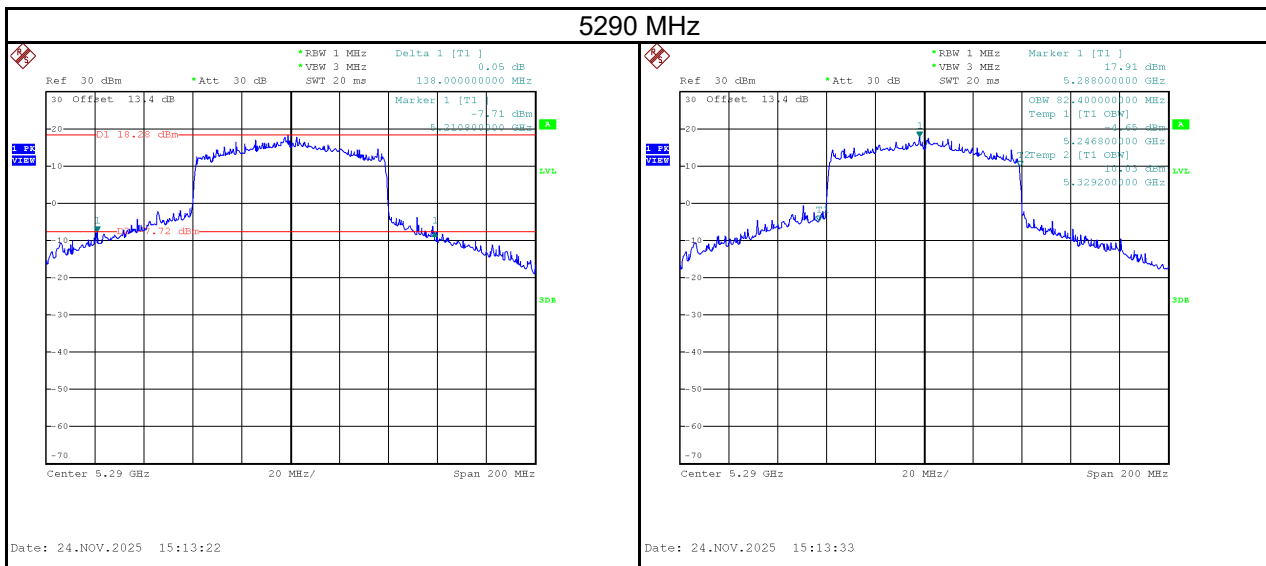


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	159.20	80.80	No limit
5610	116.80	78.40	No limit

5530 MHz

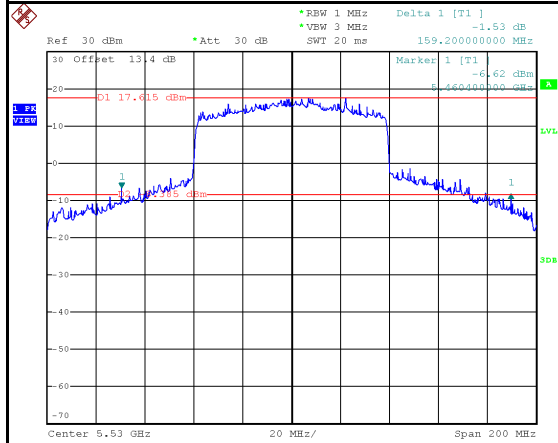


Date: 24.NOV.2025 15:16:11

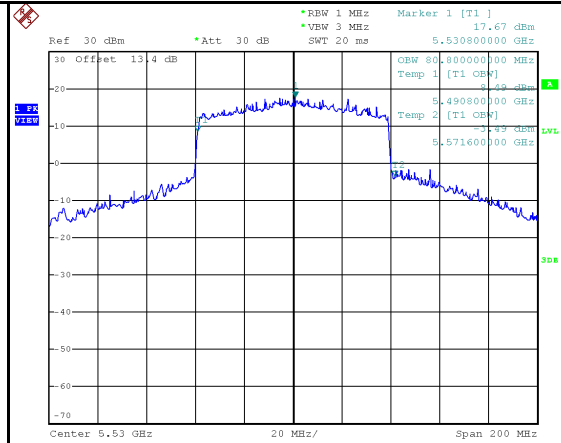


Date: 24.NOV.2025 15:16:22

5610 MHz

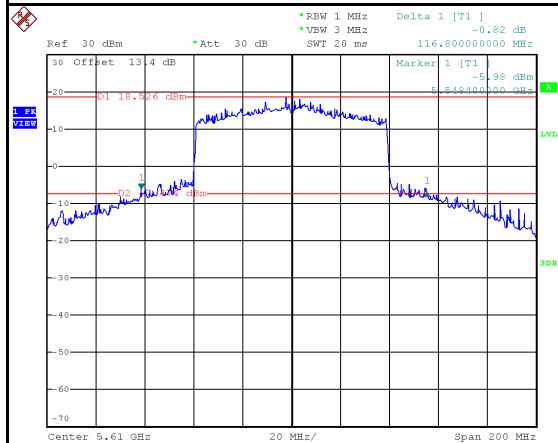


Date: 24.NOV.2025 15:17:31

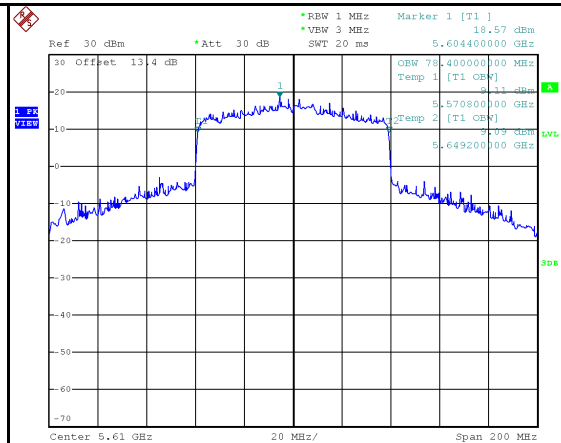


Date: 24.NOV.2025 15:17:42

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	70.00	156.40	500	Pass

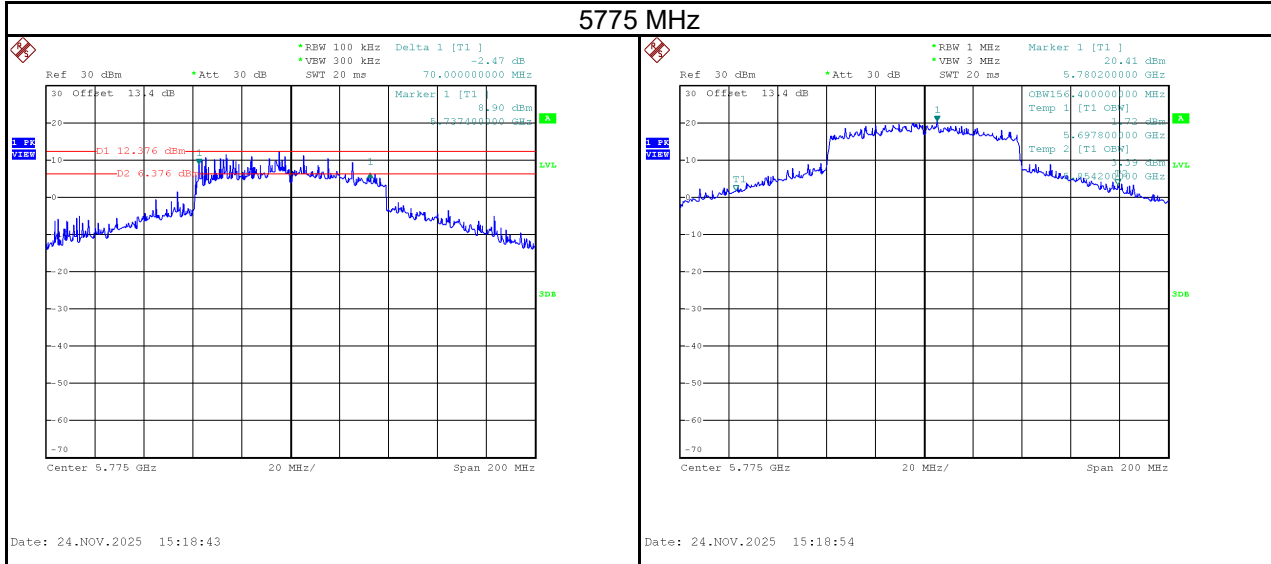


Test Mode	IEEE 802.11be (EHT160)_Ant. 1
-----------	-------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	398.40	244.80	No limit

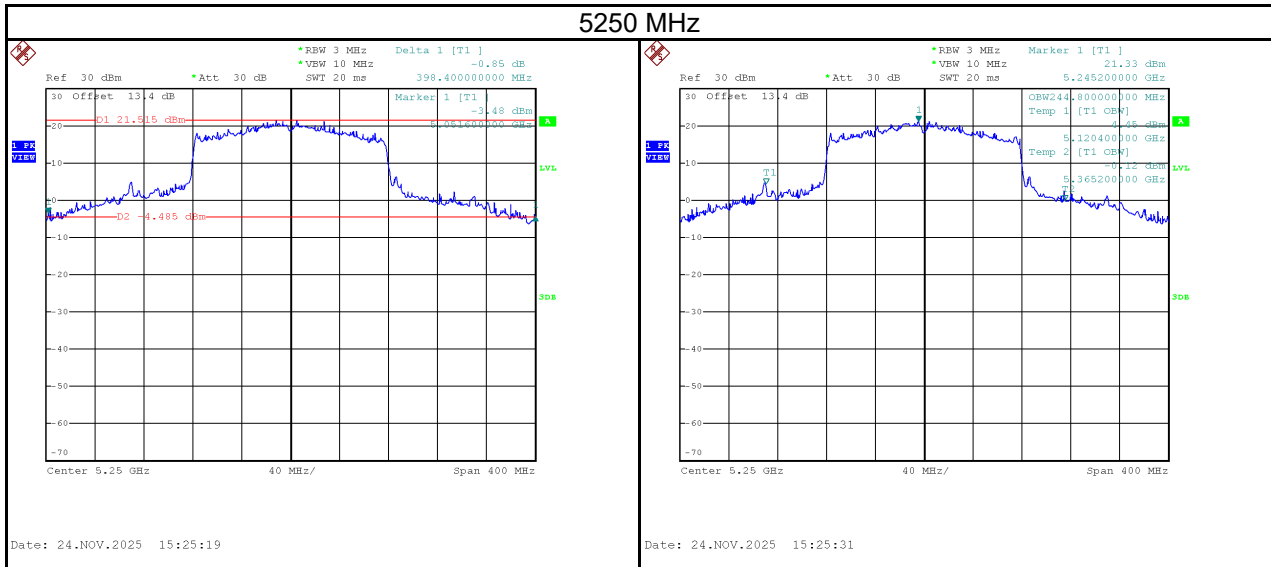


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	398.40	246.40	No limit

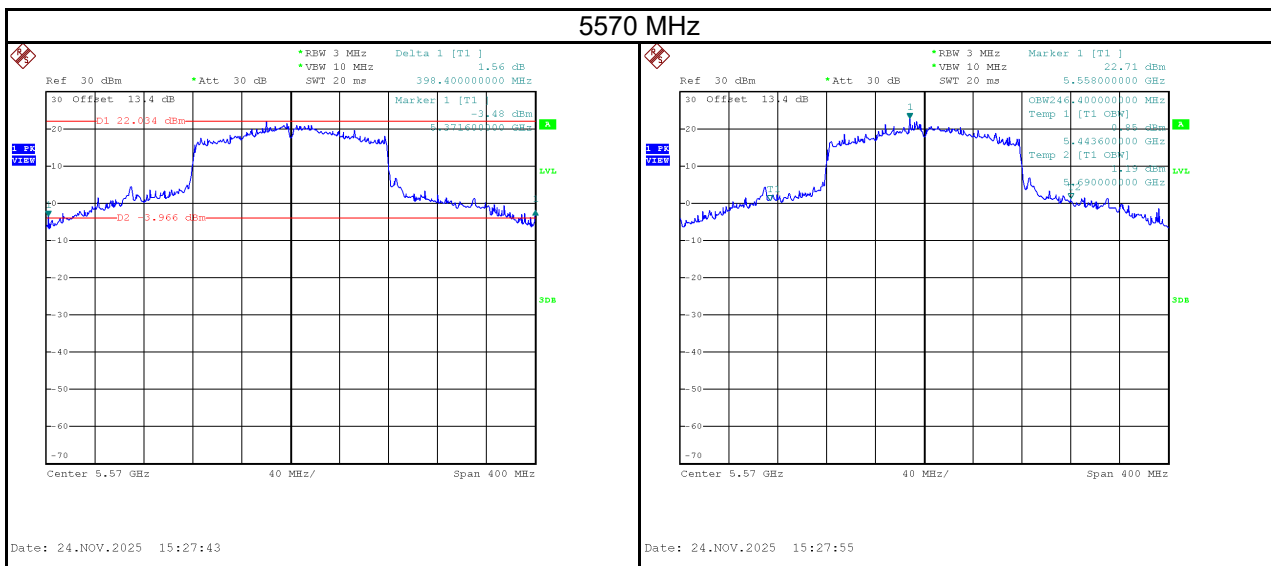


For Straddle Channel:

Test Mode	IEEE 802.11a_Ant. 1
-----------	---------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5720	14.48	16.56	No limit

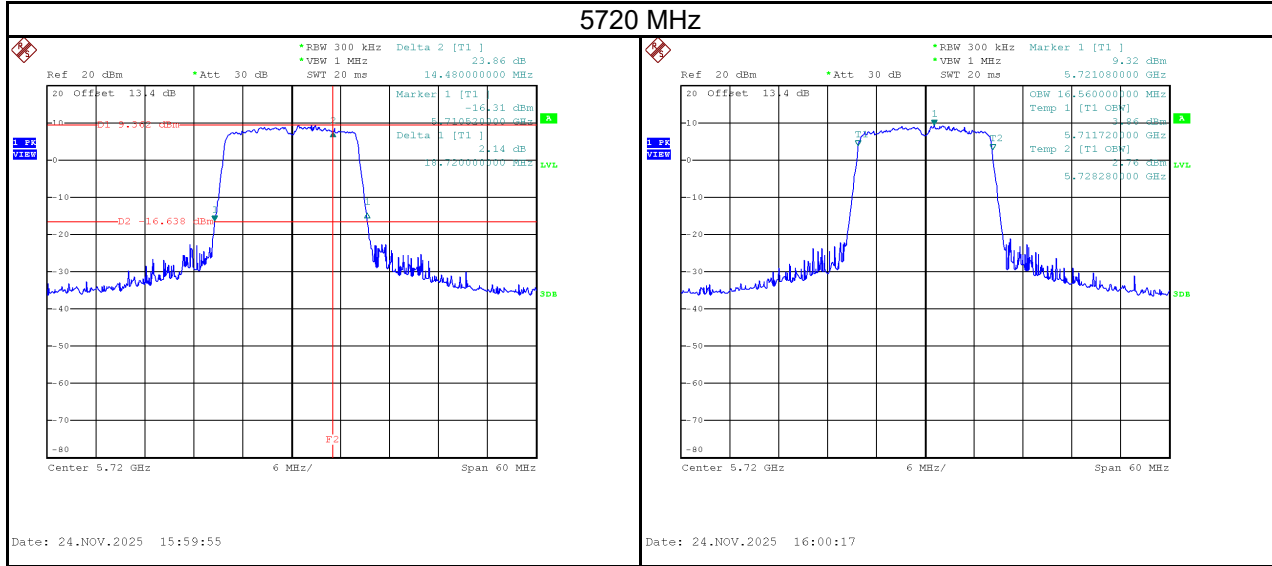


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5720	3.16	16.56	500	Pass

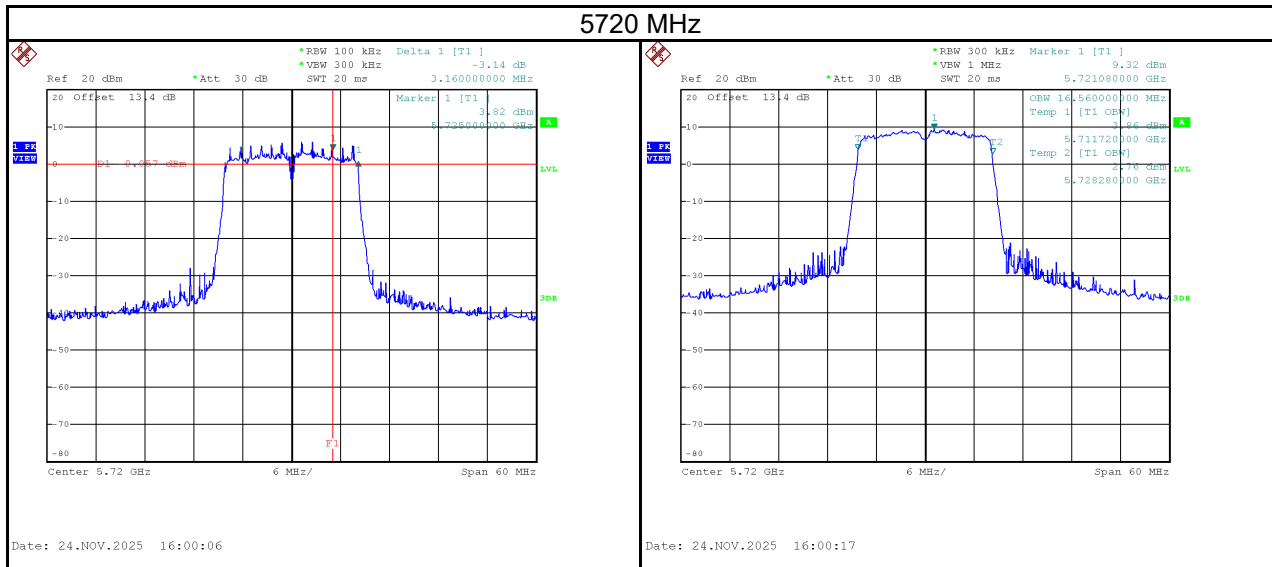


Test Mode	IEEE 802.11n (HT20)_Ant. 1
-----------	----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5720	14.60	17.52	No limit

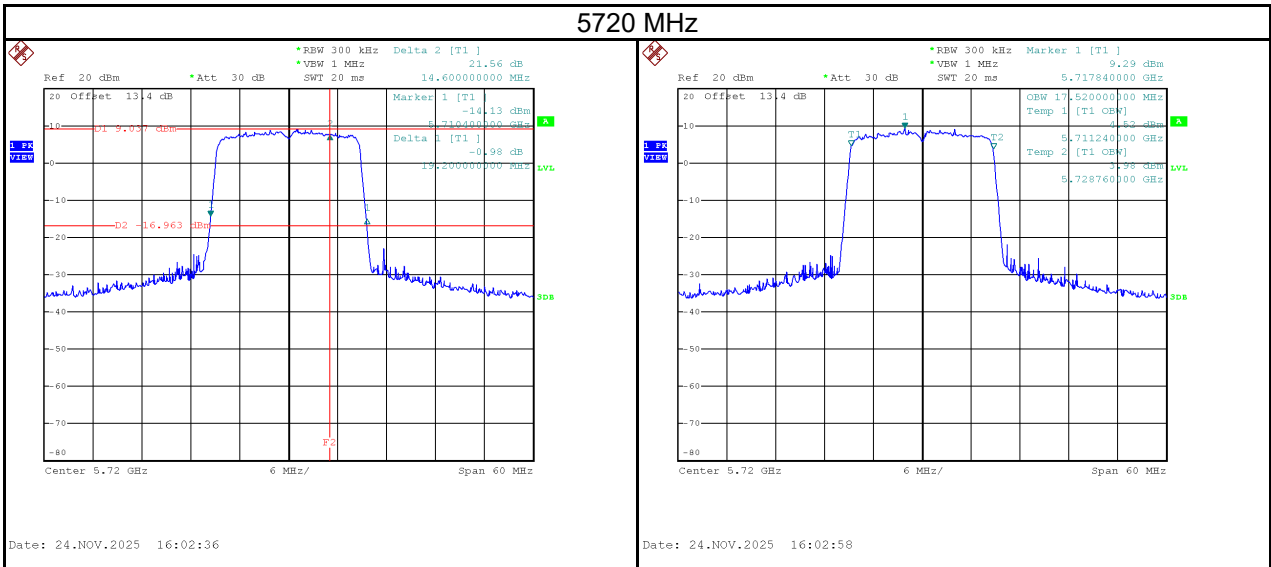


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5720	3.52	17.52	500	Pass

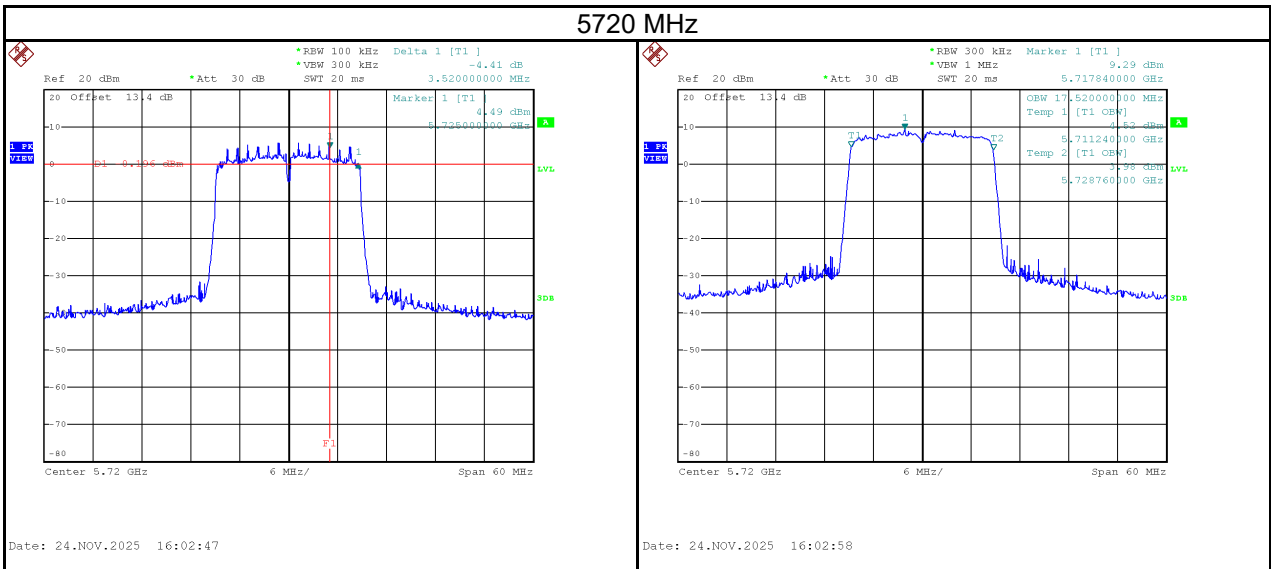


Test Mode	IEEE 802.11n (HT40)_Ant. 1
-----------	----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5710	34.20	36.20	No limit

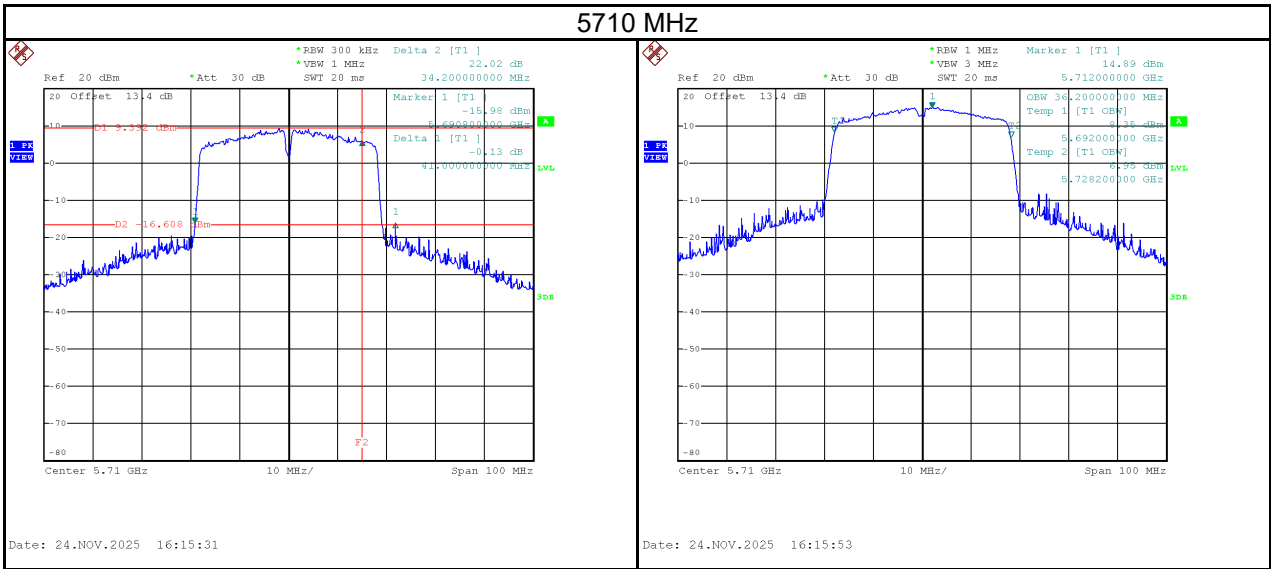


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5710	2.60	36.20	500	Pass

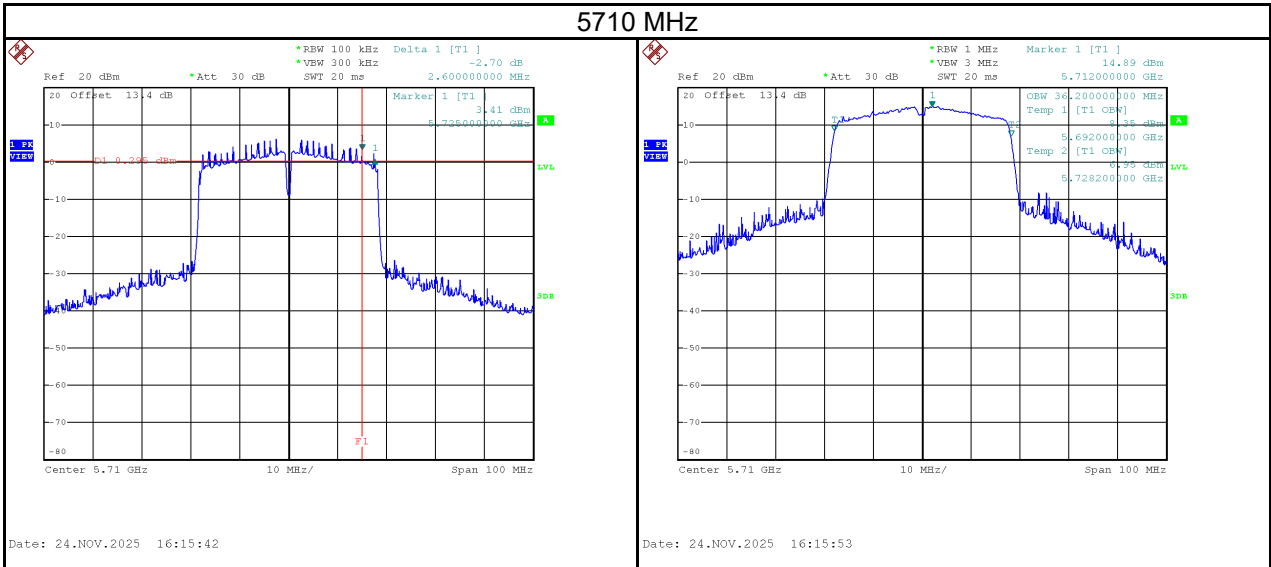


Test Mode	IEEE 802.11ac (VHT80)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5690	102.20	76.80	No limit

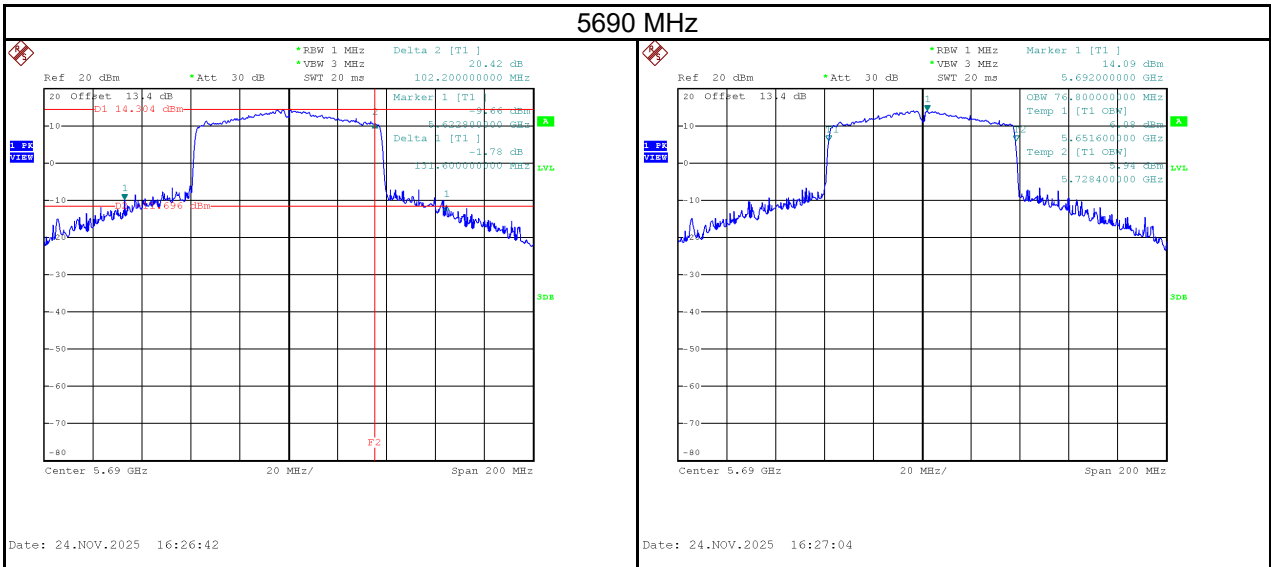


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5690	2.60	76.80	500	Pass

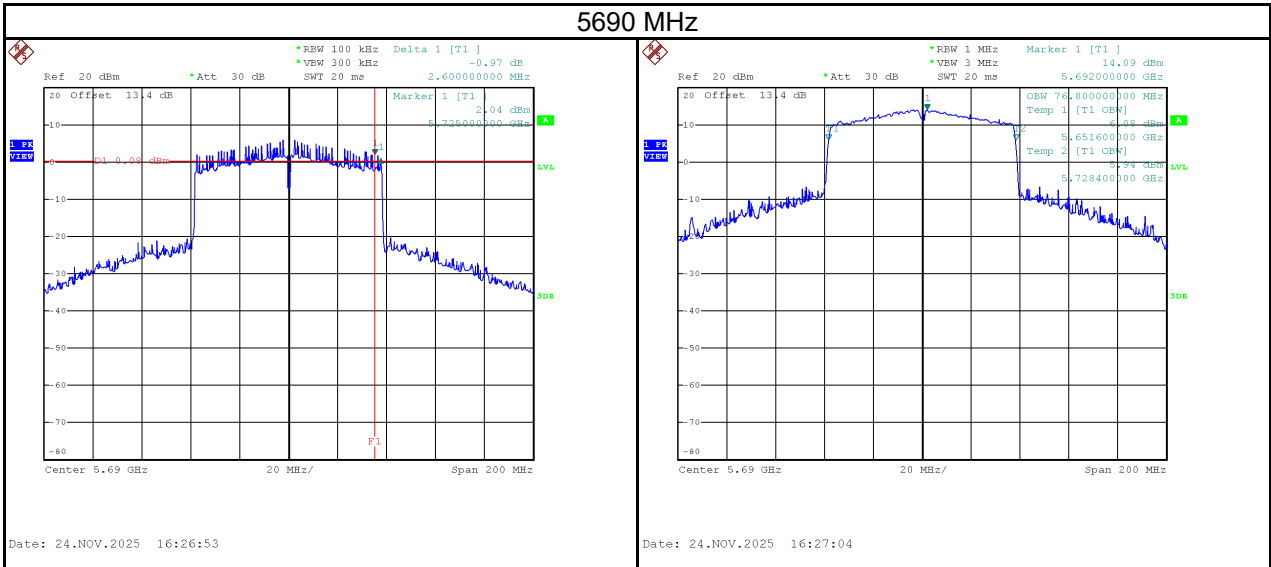


Test Mode	IEEE 802.11ax (HE20)_Ant. 1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5720	15.08	18.96	No limit

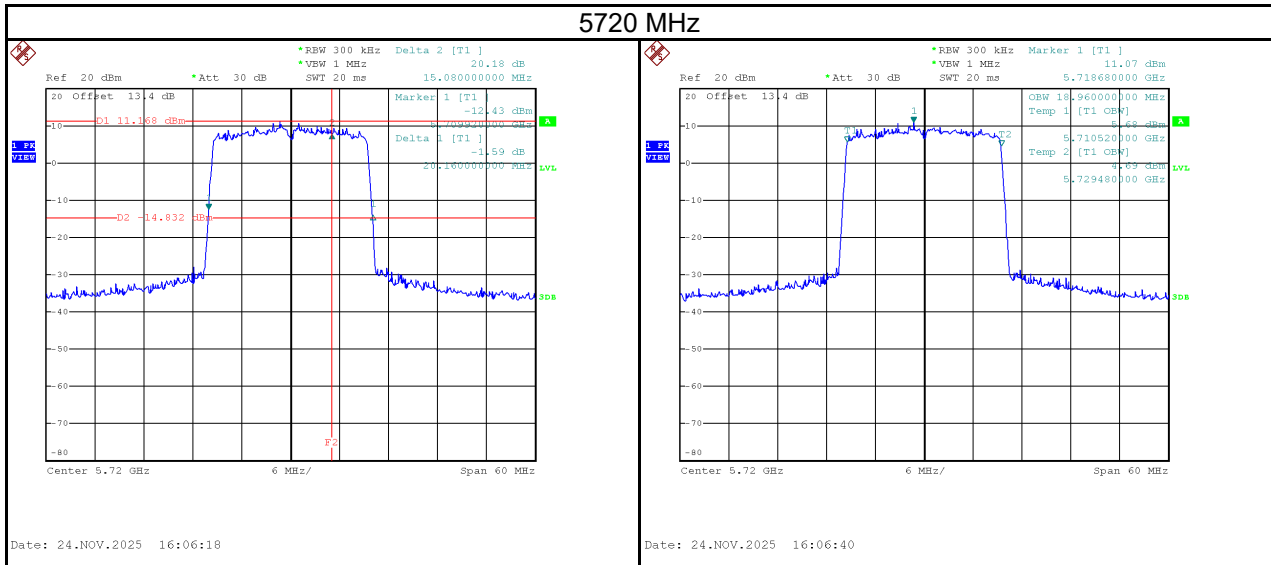


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5720	4.36	18.96	500	Pass

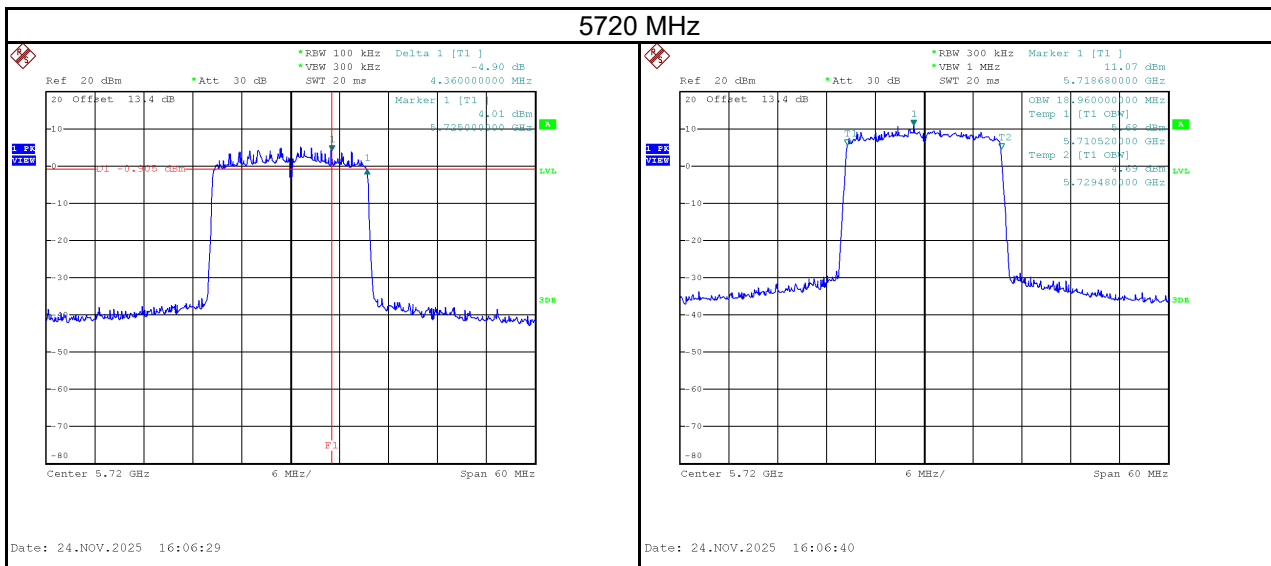


Test Mode	IEEE 802.11ax (HE40)_Ant. 1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5710	34.60	38.00	No limit

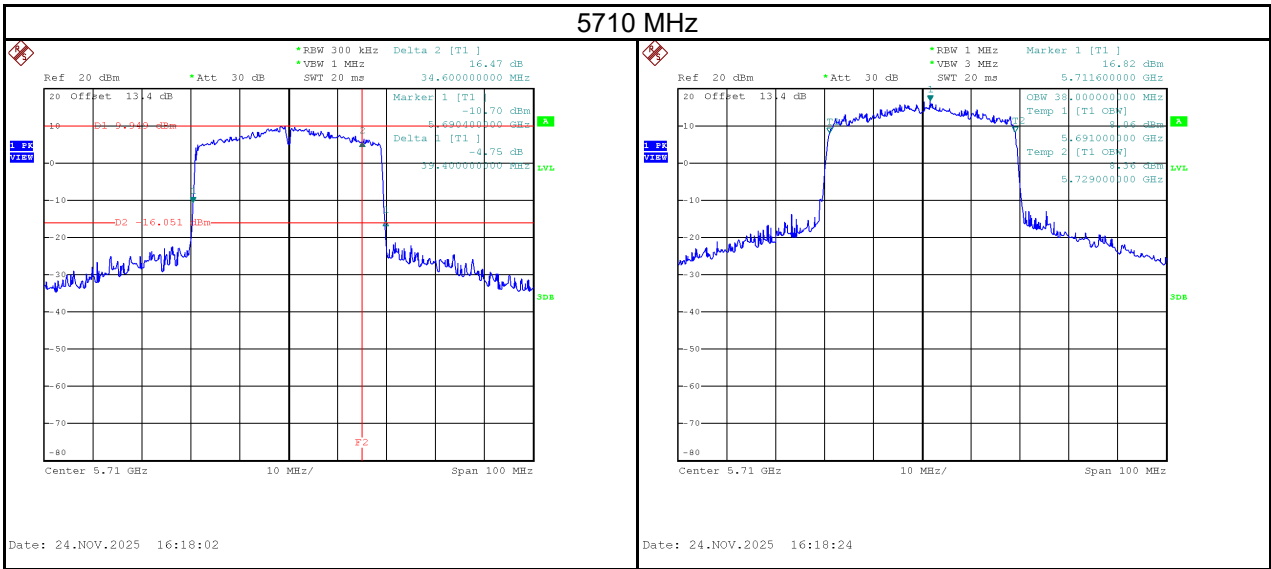


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5710	2.60	38.00	500	Pass

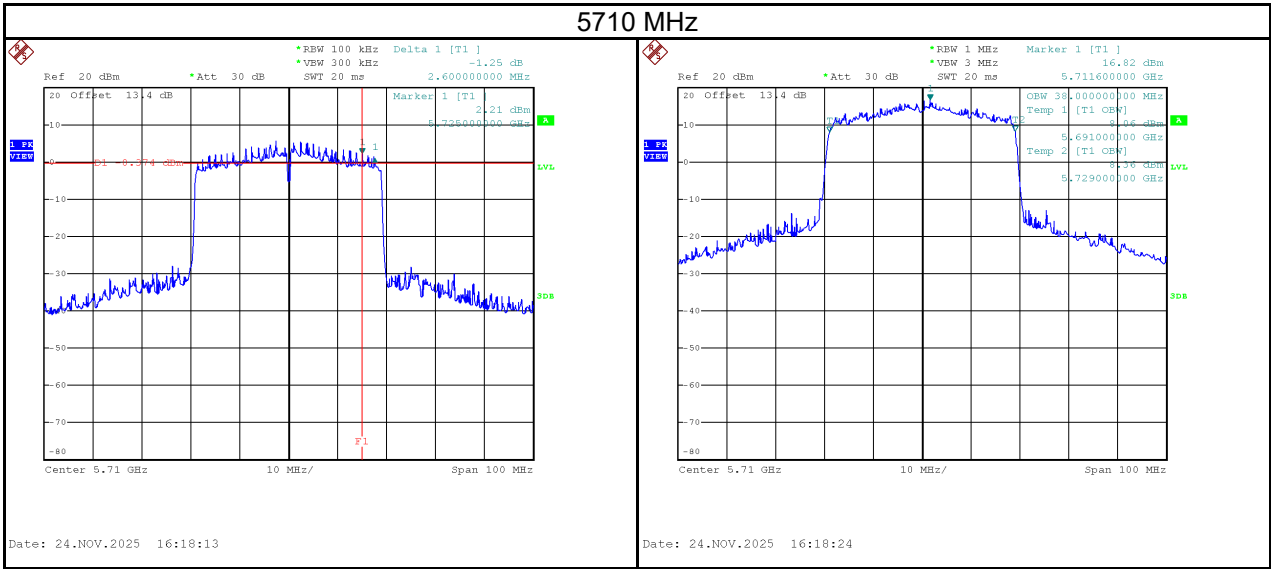


Test Mode	IEEE 802.11ax (HE80)_Ant. 1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5690	86.60	77.60	No limit

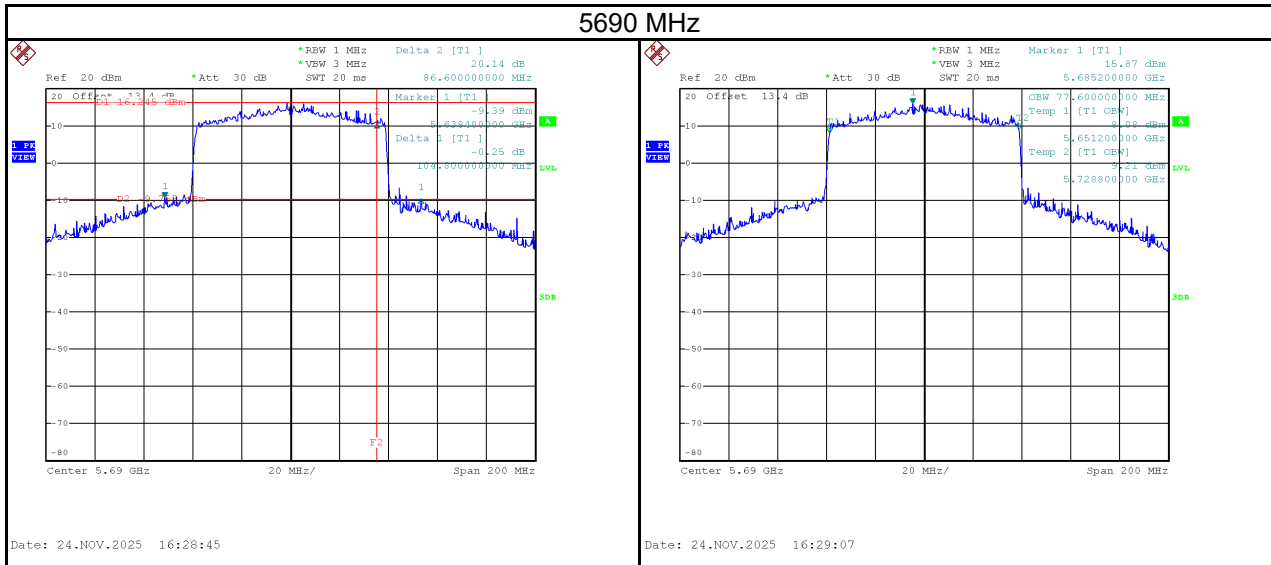


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5690	2.60	77.60	500	Pass

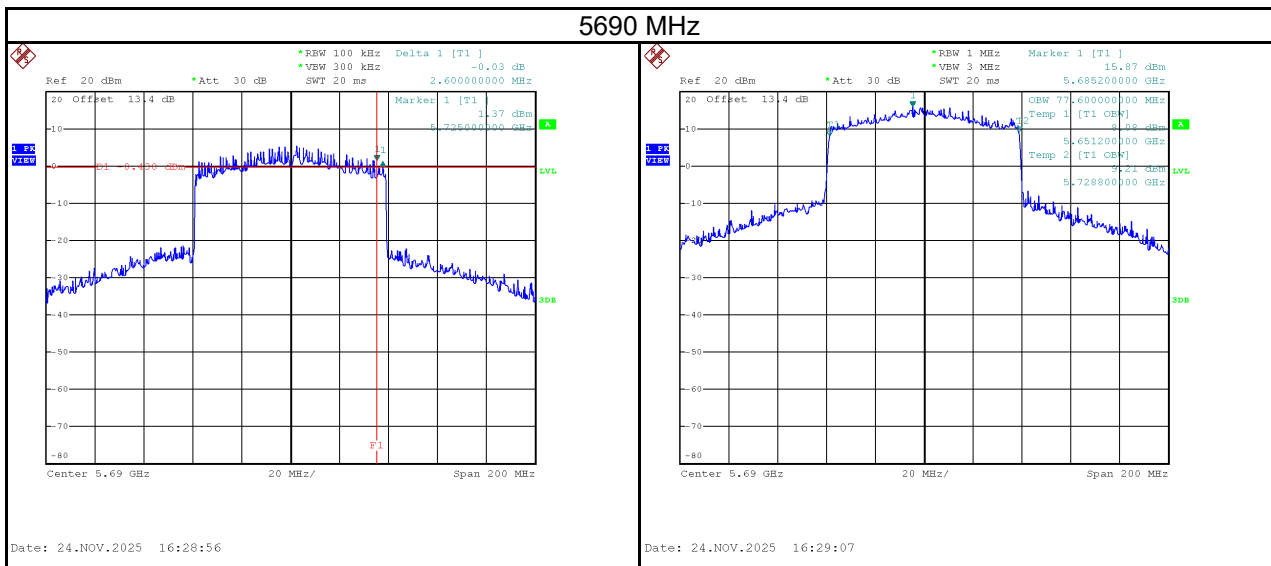


Test Mode	IEEE 802.11be (EHT20)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5720	15.08	18.96	No limit

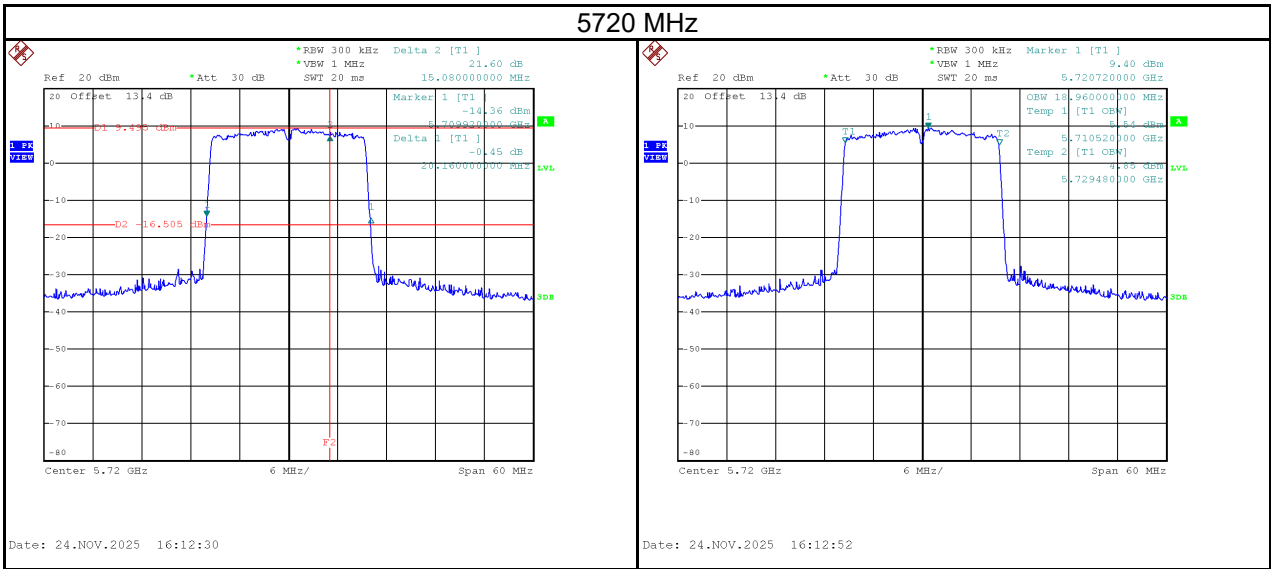


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5720	4.36	18.96	500	Pass

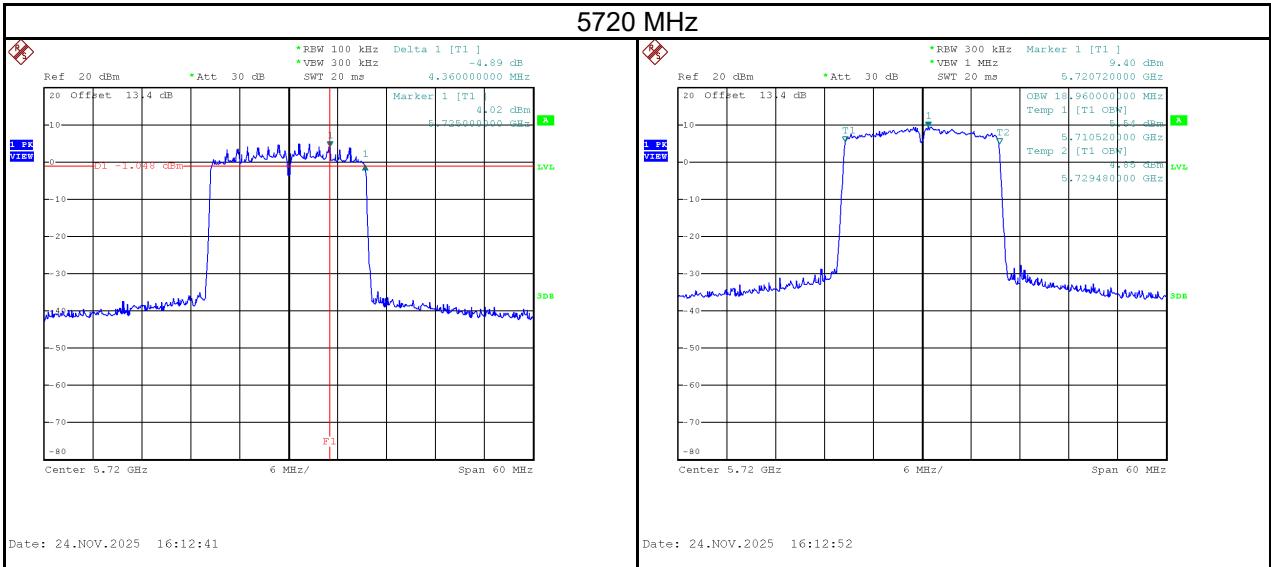


Test Mode	IEEE 802.11be (EHT40)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5710	34.80	38.00	No limit

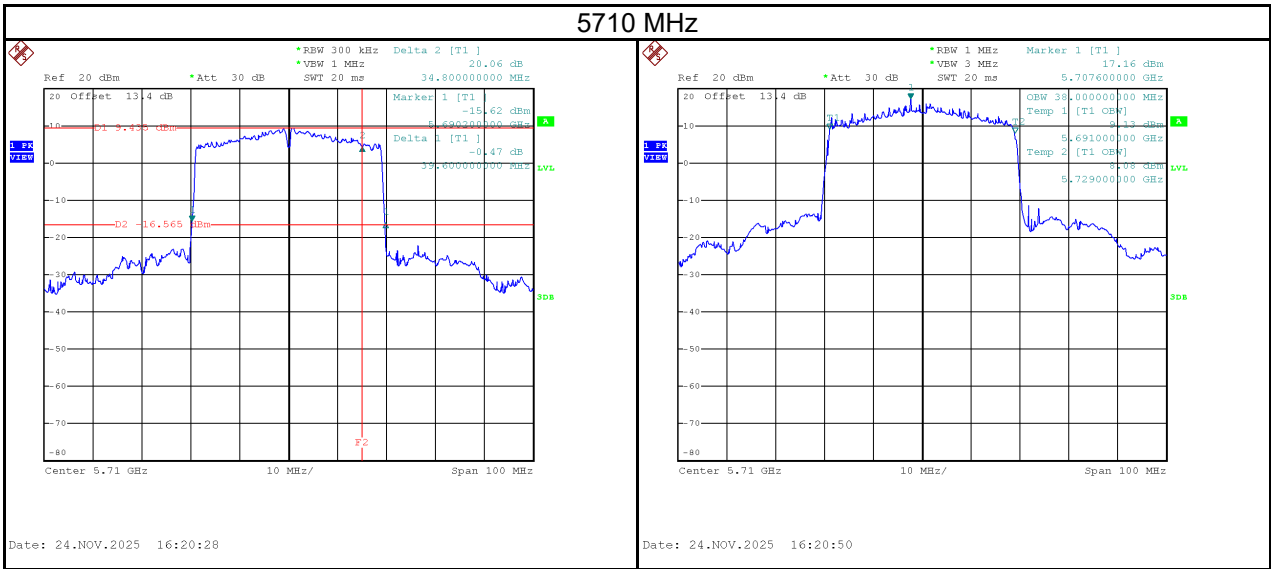


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5710	2.60	38.00	500	Pass

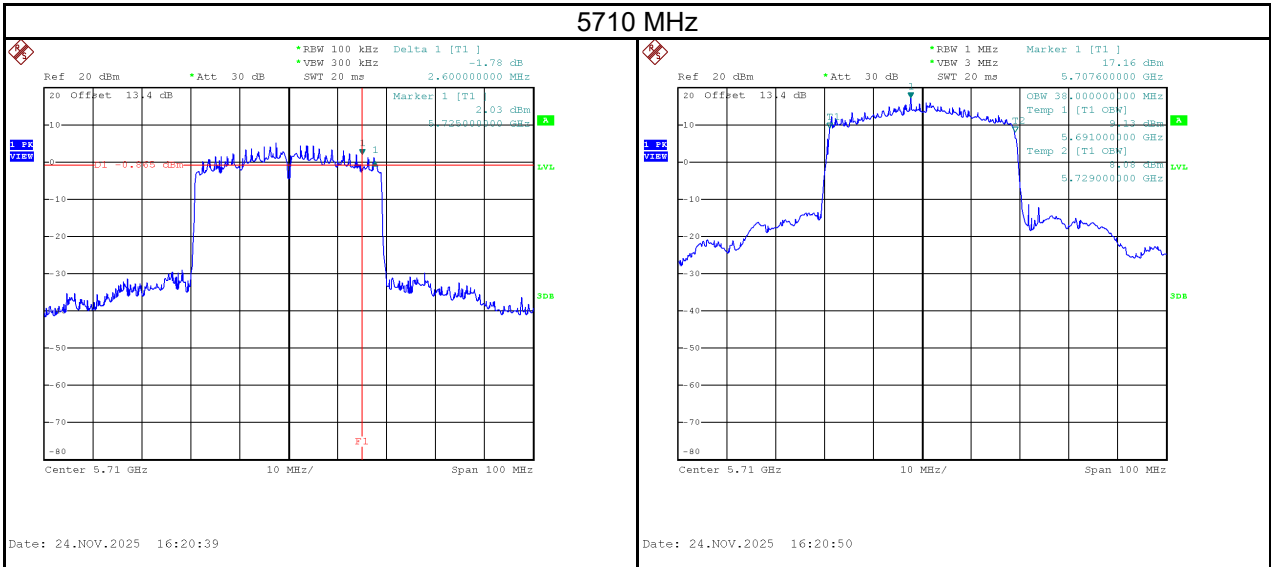


Test Mode	IEEE 802.11be (EHT80)_Ant. 1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5690	95.80	77.60	No limit

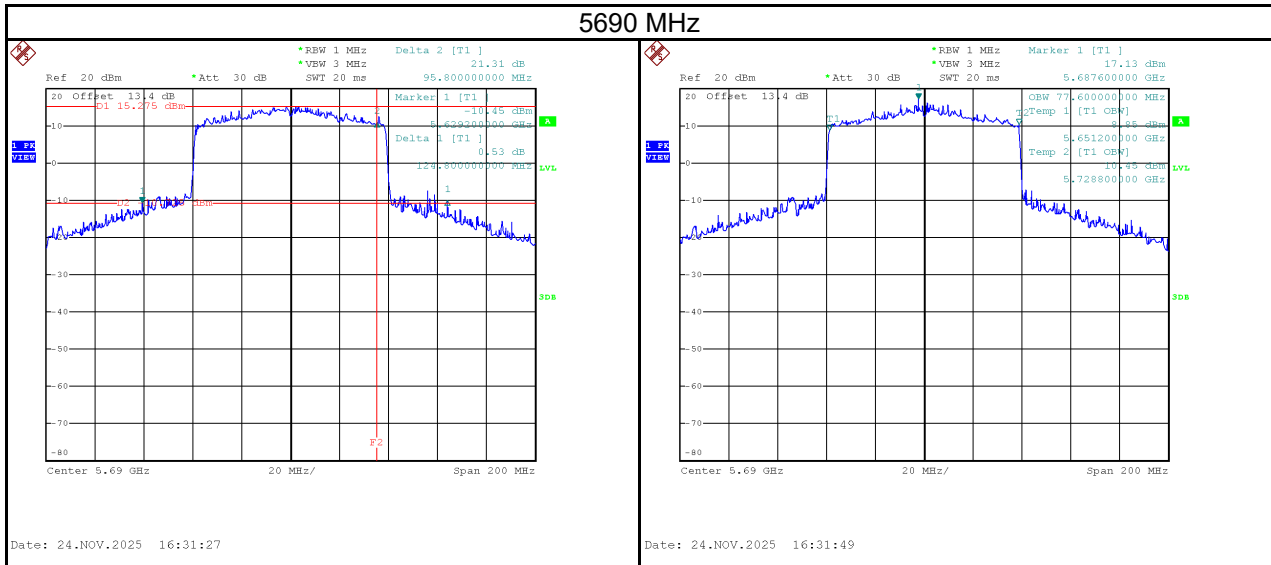

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5690	2.60	77.60	500	Pass

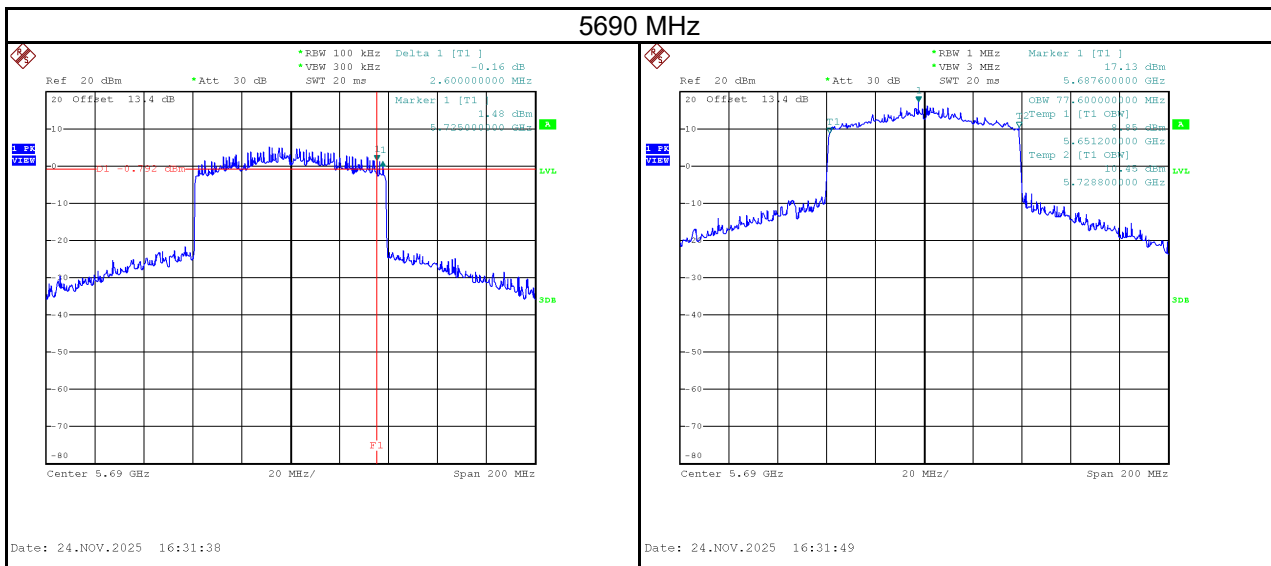

APPENDIX F CONDUCTED OUTPUT POWER

Test Mode	IEEE 802.11a_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	19.58	0.0908	29.34	0.8590	Pass
5200	20.81	0.1205	29.34	0.8590	Pass
5240	22.14	0.1637	29.34	0.8590	Pass
5260	17.58	0.0573	29.34	0.8590	Pass
5300	17.93	0.0621	29.34	0.8590	Pass
5320	17.86	0.0611	29.34	0.8590	Pass
5500	18.06	0.0640	29.54	0.8995	Pass
5580	18.17	0.0656	29.54	0.8995	Pass
5700	18.02	0.0634	29.54	0.8995	Pass
5745	21.14	0.1300	29.69	0.9311	Pass
5785	21.23	0.1327	29.69	0.9311	Pass
5825	21.53	0.1422	29.69	0.9311	Pass

Test Mode	IEEE 802.11a_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	19.75	0.0944	29.34	0.8590	Pass
5200	20.41	0.1099	29.34	0.8590	Pass
5240	21.85	0.1531	29.34	0.8590	Pass
5260	18.42	0.0695	29.34	0.8590	Pass
5300	18.64	0.0731	29.34	0.8590	Pass
5320	18.44	0.0698	29.34	0.8590	Pass
5500	18.24	0.0667	29.54	0.8995	Pass
5580	17.75	0.0596	29.54	0.8995	Pass
5700	18.12	0.0649	29.54	0.8995	Pass
5745	18.90	0.0776	29.69	0.9311	Pass
5785	18.77	0.0753	29.69	0.9311	Pass
5825	19.28	0.0847	29.69	0.9311	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	22.68	0.1852	29.34	0.8590	Pass
5200	23.62	0.2304	29.34	0.8590	Pass
5240	25.01	0.3168	29.34	0.8590	Pass
5260	21.03	0.1268	29.34	0.8590	Pass
5300	21.31	0.1352	29.34	0.8590	Pass
5320	21.17	0.1309	29.34	0.8590	Pass
5500	21.16	0.1307	29.54	0.8995	Pass
5580	20.98	0.1252	29.54	0.8995	Pass
5700	21.08	0.1283	29.54	0.8995	Pass
5745	23.17	0.2076	29.69	0.9311	Pass
5785	23.18	0.2081	29.69	0.9311	Pass
5825	23.56	0.2270	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	21.02	0.1265	29.34	0.8590	Pass
5200	16.62	0.0459	29.34	0.8590	Pass
5240	22.89	0.1945	29.34	0.8590	Pass
5260	17.60	0.0575	29.34	0.8590	Pass
5300	17.85	0.0610	29.34	0.8590	Pass
5320	18.29	0.0675	29.34	0.8590	Pass
5500	18.47	0.0703	29.54	0.8995	Pass
5580	17.53	0.0566	29.54	0.8995	Pass
5700	18.44	0.0698	29.54	0.8995	Pass
5745	23.01	0.2000	29.69	0.9311	Pass
5785	25.92	0.3908	29.69	0.9311	Pass
5825	23.72	0.2355	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20) _ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	20.71	0.1178	29.34	0.8590	Pass
5200	16.83	0.0482	29.34	0.8590	Pass
5240	22.47	0.1766	29.34	0.8590	Pass
5260	18.43	0.0697	29.34	0.8590	Pass
5300	18.49	0.0706	29.34	0.8590	Pass
5320	18.91	0.0778	29.34	0.8590	Pass
5500	18.65	0.0733	29.54	0.8995	Pass
5580	17.71	0.0590	29.54	0.8995	Pass
5700	18.56	0.0718	29.54	0.8995	Pass
5745	20.27	0.1064	29.69	0.9311	Pass
5785	25.96	0.3945	29.69	0.9311	Pass
5825	20.68	0.1169	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	23.88	0.2442	29.34	0.8590	Pass
5200	19.74	0.0941	29.34	0.8590	Pass
5240	25.70	0.3711	29.34	0.8590	Pass
5260	21.05	0.1272	29.34	0.8590	Pass
5300	21.19	0.1316	29.34	0.8590	Pass
5320	21.62	0.1453	29.34	0.8590	Pass
5500	21.57	0.1436	29.54	0.8995	Pass
5580	20.63	0.1156	29.54	0.8995	Pass
5700	21.51	0.1416	29.54	0.8995	Pass
5745	24.86	0.3064	29.69	0.9311	Pass
5785	28.95	0.7853	29.69	0.9311	Pass
5825	25.47	0.3525	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	17.01	0.0502	29.34	0.8590	Pass
5230	19.23	0.0838	29.34	0.8590	Pass
5270	19.82	0.0959	29.34	0.8590	Pass
5310	17.66	0.0583	29.34	0.8590	Pass
5510	18.01	0.0632	29.54	0.8995	Pass
5550	20.21	0.1050	29.54	0.8995	Pass
5670	19.63	0.0918	29.54	0.8995	Pass
5755	21.85	0.1531	29.69	0.9311	Pass
5795	26.09	0.4064	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	17.09	0.0512	29.34	0.8590	Pass
5230	18.78	0.0755	29.34	0.8590	Pass
5270	20.34	0.1081	29.34	0.8590	Pass
5310	17.58	0.0573	29.34	0.8590	Pass
5510	16.55	0.0452	29.54	0.8995	Pass
5550	20.39	0.1094	29.54	0.8995	Pass
5670	17.09	0.0512	29.34	0.8590	Pass
5755	19.03	0.0800	29.69	0.9311	Pass
5795	25.53	0.3573	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_ Total	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	20.06	0.1014	29.34	0.8590	Pass
5230	22.02	0.1593	29.34	0.8590	Pass
5270	23.10	0.2041	29.34	0.8590	Pass
5310	20.63	0.1156	29.34	0.8590	Pass
5510	20.35	0.1084	29.54	0.8995	Pass
5550	23.31	0.2143	29.54	0.8995	Pass
5670	23.01	0.2000	29.54	0.8995	Pass
5755	23.68	0.2331	29.69	0.9311	Pass
5795	28.83	0.7637	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	20.93	0.1239	29.34	0.8590	Pass
5200	16.54	0.0451	29.34	0.8590	Pass
5240	22.81	0.1910	29.34	0.8590	Pass
5260	17.54	0.0568	29.34	0.8590	Pass
5300	17.76	0.0597	29.34	0.8590	Pass
5320	18.21	0.0662	29.34	0.8590	Pass
5500	18.39	0.0690	29.54	0.8995	Pass
5580	17.46	0.0557	29.54	0.8995	Pass
5700	18.37	0.0687	29.54	0.8995	Pass
5745	22.92	0.1959	29.69	0.9311	Pass
5785	25.84	0.3837	29.69	0.9311	Pass
5825	23.63	0.2307	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20) _ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	20.62	0.1153	29.34	0.8590	Pass
5200	16.76	0.0474	29.34	0.8590	Pass
5240	22.41	0.1742	29.34	0.8590	Pass
5260	18.34	0.0682	29.34	0.8590	Pass
5300	18.42	0.0695	29.34	0.8590	Pass
5320	18.83	0.0764	29.34	0.8590	Pass
5500	18.58	0.0721	29.54	0.8995	Pass
5580	17.66	0.0583	29.54	0.8995	Pass
5700	18.49	0.0706	29.54	0.8995	Pass
5745	20.19	0.1045	29.69	0.9311	Pass
5785	25.88	0.3873	29.69	0.9311	Pass
5825	20.61	0.1151	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	23.79	0.2392	29.34	0.8590	Pass
5200	19.66	0.0925	29.34	0.8590	Pass
5240	25.62	0.3652	29.34	0.8590	Pass
5260	20.97	0.1250	29.34	0.8590	Pass
5300	21.11	0.1292	29.34	0.8590	Pass
5320	21.54	0.1426	29.34	0.8590	Pass
5500	21.50	0.1411	29.54	0.8995	Pass
5580	20.57	0.1141	29.54	0.8995	Pass
5700	21.44	0.1393	29.54	0.8995	Pass
5745	24.78	0.3004	29.69	0.9311	Pass
5785	28.87	0.7710	29.69	0.9311	Pass
5825	25.39	0.3458	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	16.93	0.0493	29.34	0.8590	Pass
5230	19.15	0.0822	29.34	0.8590	Pass
5270	19.74	0.0942	29.34	0.8590	Pass
5310	17.58	0.0573	29.34	0.8590	Pass
5510	17.94	0.0622	29.54	0.8995	Pass
5550	20.13	0.1030	29.54	0.8995	Pass
5670	19.52	0.0895	29.54	0.8995	Pass
5755	21.76	0.1500	29.69	0.9311	Pass
5795	25.97	0.3954	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	17.01	0.0502	29.34	0.8590	Pass
5230	18.71	0.0743	29.34	0.8590	Pass
5270	20.25	0.1059	29.34	0.8590	Pass
5310	17.51	0.0564	29.34	0.8590	Pass
5510	16.49	0.0446	29.54	0.8995	Pass
5550	20.31	0.1074	29.54	0.8995	Pass
5670	20.24	0.1057	29.54	0.8995	Pass
5755	18.95	0.0785	29.69	0.9311	Pass
5795	25.48	0.3532	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_ Total	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	19.98	0.0996	29.34	0.8590	Pass
5230	21.95	0.1565	29.34	0.8590	Pass
5270	23.01	0.2001	29.34	0.8590	Pass
5310	20.56	0.1136	29.34	0.8590	Pass
5510	20.29	0.1068	29.54	0.8995	Pass
5550	23.23	0.2104	29.54	0.8995	Pass
5670	22.91	0.1952	29.54	0.8995	Pass
5755	23.59	0.2285	29.69	0.9311	Pass
5795	28.74	0.7485	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	13.51	0.0224	29.34	0.8590	Pass
5290	15.02	0.0318	29.34	0.8590	Pass
5530	14.35	0.0272	29.54	0.8995	Pass
5610	18.79	0.0757	29.54	0.8995	Pass
5775	19.60	0.0912	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	13.05	0.0202	29.34	0.8590	Pass
5290	14.97	0.0314	29.34	0.8590	Pass
5530	12.83	0.0192	29.54	0.8995	Pass
5610	16.84	0.0483	29.54	0.8995	Pass
5775	17.12	0.0515	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_ Total	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	16.30	0.0426	29.34	0.8590	Pass
5290	18.01	0.0632	29.34	0.8590	Pass
5530	16.67	0.0464	29.54	0.8995	Pass
5610	20.93	0.1240	29.54	0.8995	Pass
5775	21.54	0.1427	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	18.72	0.0745	29.34	0.8590	Pass
5200	20.92	0.1236	29.34	0.8590	Pass
5240	23.81	0.2404	29.34	0.8590	Pass
5260	17.76	0.0597	29.34	0.8590	Pass
5300	17.69	0.0587	29.34	0.8590	Pass
5320	18.12	0.0649	29.34	0.8590	Pass
5500	18.23	0.0665	29.54	0.8995	Pass
5580	17.75	0.0596	29.54	0.8995	Pass
5700	18.18	0.0658	29.54	0.8995	Pass
5745	22.62	0.1828	29.69	0.9311	Pass
5785	26.23	0.4198	29.69	0.9311	Pass
5825	22.99	0.1991	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	18.96	0.0787	29.34	0.8590	Pass
5200	20.61	0.1151	29.34	0.8590	Pass
5240	23.82	0.2410	29.34	0.8590	Pass
5260	18.56	0.0718	29.34	0.8590	Pass
5300	18.35	0.0684	29.34	0.8590	Pass
5320	18.71	0.0743	29.34	0.8590	Pass
5500	18.24	0.0667	29.54	0.8995	Pass
5580	17.95	0.0624	29.54	0.8995	Pass
5700	18.32	0.0679	29.54	0.8995	Pass
5745	20.01	0.1002	29.69	0.9311	Pass
5785	26.22	0.4188	29.69	0.9311	Pass
5825	20.35	0.1084	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	21.85	0.1532	29.34	0.8590	Pass
5200	23.78	0.2387	29.34	0.8590	Pass
5240	26.83	0.4814	29.34	0.8590	Pass
5260	21.19	0.1315	29.34	0.8590	Pass
5300	21.04	0.1271	29.34	0.8590	Pass
5320	21.44	0.1392	29.34	0.8590	Pass
5500	21.25	0.1332	29.54	0.8995	Pass
5580	20.86	0.1219	29.54	0.8995	Pass
5700	21.26	0.1337	29.54	0.8995	Pass
5745	24.52	0.2830	29.69	0.9311	Pass
5785	29.24	0.8386	29.69	0.9311	Pass
5825	24.88	0.3075	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	15.68	0.0370	29.34	0.8590	Pass
5230	19.11	0.0815	29.34	0.8590	Pass
5270	18.01	0.0632	29.34	0.8590	Pass
5310	17.83	0.0607	29.34	0.8590	Pass
5510	17.38	0.0547	29.54	0.8995	Pass
5550	19.53	0.0897	29.54	0.8995	Pass
5670	18.61	0.0726	29.54	0.8995	Pass
5755	21.45	0.1396	29.69	0.9311	Pass
5795	21.38	0.1374	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	15.93	0.0392	29.34	0.8590	Pass
5230	18.67	0.0736	29.34	0.8590	Pass
5270	18.02	0.0634	29.34	0.8590	Pass
5310	17.88	0.0614	29.34	0.8590	Pass
5510	15.86	0.0385	29.54	0.8995	Pass
5550	19.76	0.0946	29.54	0.8995	Pass
5670	15.93	0.0392	29.34	0.8590	Pass
5755	18.75	0.0750	29.69	0.9311	Pass
5795	18.65	0.0733	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40) _ Total	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	18.82	0.0762	29.34	0.8590	Pass
5230	21.91	0.1551	29.34	0.8590	Pass
5270	21.03	0.1266	29.34	0.8590	Pass
5310	20.87	0.1220	29.34	0.8590	Pass
5510	19.70	0.0932	29.54	0.8995	Pass
5550	22.66	0.1844	29.54	0.8995	Pass
5670	20.82	0.1208	29.54	0.8995	Pass
5755	23.32	0.2146	29.69	0.9311	Pass
5795	23.24	0.2107	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	12.89	0.0195	29.34	0.8590	Pass
5290	14.20	0.0263	29.34	0.8590	Pass
5530	13.22	0.0210	29.54	0.8995	Pass
5610	18.68	0.0738	29.54	0.8995	Pass
5775	18.95	0.0785	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	12.49	0.0177	29.34	0.8590	Pass
5290	14.33	0.0271	29.34	0.8590	Pass
5530	11.66	0.0147	29.54	0.8995	Pass
5610	16.62	0.0459	29.54	0.8995	Pass
5775	16.57	0.0454	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80) _ Total	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	15.70	0.0372	29.34	0.8590	Pass
5290	17.28	0.0534	29.34	0.8590	Pass
5530	15.52	0.0356	29.54	0.8995	Pass
5610	20.78	0.1197	29.54	0.8995	Pass
5775	20.93	0.1239	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE160)_ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.41	0.0219	29.34	0.8590	Pass
5570	12.39	0.0173	29.54	0.8995	Pass

Test Mode	IEEE 802.11ax (HE160)_ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.09	0.0204	29.34	0.8590	Pass
5570	10.64	0.0116	29.54	0.8995	Pass

Test Mode	IEEE 802.11ax (HE160)_ Total	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	16.26	0.0423	29.34	0.8590	Pass
5570	14.61	0.0289	29.54	0.8995	Pass

Test Mode	IEEE 802.11be (EHT20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	20.46	0.1112	29.34	0.8590	Pass
5200	21.51	0.1416	29.34	0.8590	Pass
5240	23.81	0.2404	29.34	0.8590	Pass
5260	17.80	0.0603	29.34	0.8590	Pass
5300	18.19	0.0659	29.34	0.8590	Pass
5320	18.07	0.0641	29.34	0.8590	Pass
5500	18.17	0.0656	29.54	0.8995	Pass
5580	17.73	0.0593	29.54	0.8995	Pass
5700	18.28	0.0673	29.54	0.8995	Pass
5745	23.38	0.2178	29.69	0.9311	Pass
5785	26.12	0.4093	29.69	0.9311	Pass
5825	25.30	0.3388	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	20.01	0.1002	29.34	0.8590	Pass
5200	21.15	0.1303	29.34	0.8590	Pass
5240	23.84	0.2421	29.34	0.8590	Pass
5260	18.63	0.0729	29.34	0.8590	Pass
5300	18.81	0.0760	29.34	0.8590	Pass
5320	18.75	0.0750	29.34	0.8590	Pass
5500	18.30	0.0676	29.54	0.8995	Pass
5580	17.97	0.0627	29.54	0.8995	Pass
5700	18.44	0.0698	29.54	0.8995	Pass
5745	20.59	0.1146	29.69	0.9311	Pass
5785	26.15	0.4121	29.69	0.9311	Pass
5825	21.79	0.1510	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5180	23.25	0.2114	29.34	0.8590	Pass
5200	24.34	0.2719	29.34	0.8590	Pass
5240	26.84	0.4825	29.34	0.8590	Pass
5260	21.25	0.1332	29.34	0.8590	Pass
5300	21.52	0.1420	29.34	0.8590	Pass
5320	21.43	0.1391	29.34	0.8590	Pass
5500	21.25	0.1332	29.54	0.8995	Pass
5580	20.86	0.1220	29.54	0.8995	Pass
5700	21.37	0.1371	29.54	0.8995	Pass
5745	25.22	0.3323	29.69	0.9311	Pass
5785	29.15	0.8214	29.69	0.9311	Pass
5825	26.90	0.4899	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	17.25	0.0531	29.34	0.8590	Pass
5230	17.96	0.0625	29.34	0.8590	Pass
5270	18.86	0.0769	29.34	0.8590	Pass
5310	16.71	0.0469	29.34	0.8590	Pass
5510	17.68	0.0586	29.54	0.8995	Pass
5550	18.18	0.0658	29.54	0.8995	Pass
5670	19.58	0.0908	29.54	0.8995	Pass
5755	25.97	0.3954	29.69	0.9311	Pass
5795	21.72	0.1486	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40) _ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	16.92	0.0492	29.34	0.8590	Pass
5230	17.53	0.0566	29.34	0.8590	Pass
5270	18.95	0.0785	29.34	0.8590	Pass
5310	16.77	0.0475	29.34	0.8590	Pass
5510	16.31	0.0428	29.54	0.8995	Pass
5550	16.61	0.0458	29.54	0.8995	Pass
5670	19.97	0.0993	29.54	0.8995	Pass
5755	18.41	0.0693	29.69	0.9311	Pass
5795	19.16	0.0824	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40) _ Total	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5190	20.10	0.1023	29.34	0.8590	Pass
5230	20.76	0.1191	29.34	0.8590	Pass
5270	21.92	0.1554	29.34	0.8590	Pass
5310	19.75	0.0944	29.34	0.8590	Pass
5510	20.06	0.1014	29.54	0.8995	Pass
5550	20.48	0.1116	29.54	0.8995	Pass
5670	22.79	0.1901	29.54	0.8995	Pass
5755	26.67	0.4647	29.69	0.9311	Pass
5795	23.64	0.2310	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT80) _ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	13.71	0.0235	29.34	0.8590	Pass
5290	14.68	0.0294	29.34	0.8590	Pass
5530	14.11	0.0258	29.54	0.8995	Pass
5610	18.89	0.0774	29.54	0.8995	Pass
5775	19.28	0.0847	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT80)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5210	13.25	0.0211	29.34	0.8590	Pass
5290	14.65	0.0292	29.34	0.8590	Pass
5530	12.62	0.0183	29.54	0.8995	Pass
5610	16.93	0.0493	29.54	0.8995	Pass
5775	16.80	0.0479	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT80)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.50	0.0446	29.34	0.8590	Pass
5290	17.68	0.0586	29.34	0.8590	Pass
5530	16.44	0.0440	29.54	0.8995	Pass
5610	21.03	0.1268	29.54	0.8995	Pass
5775	21.22	0.1326	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT160)_ Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.83	0.0242	29.34	0.8590	Pass
5570	13.71	0.0235	29.54	0.8995	Pass

Test Mode	IEEE 802.11be (EHT160)_ Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.42	0.0220	29.34	0.8590	Pass
5570	12.04	0.0160	29.54	0.8995	Pass

Test Mode	IEEE 802.11be (EHT160)_ Total	Tested Date	2025/11/20 ~ 12/9
-----------	-------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	16.64	0.0461	29.34	0.8590	Pass
5570	15.97	0.0395	29.54	0.8995	Pass

For Straddle Channel:

Test Mode	IEEE 802.11a_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.63	0.0460	29.54	0.8995	Pass
5720	9.71	0.0094	29.69	0.9311	Pass

Test Mode	IEEE 802.11a_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	17.08	0.0511	29.54	0.8995	Pass
5720	10.38	0.0109	29.69	0.9311	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2025/11/20 ~ 12/9
-----------	--------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	19.87	0.0971	29.54	0.8995	Pass
5720	13.07	0.0203	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.56	0.0453	29.54	0.8995	Pass
5720	10.19	0.0104	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.81	0.0480	29.54	0.8995	Pass
5720	10.64	0.0116	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	19.70	0.0933	29.54	0.8995	Pass
5720	13.43	0.0220	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	19.78	0.0951	29.54	0.8995	Pass
5710	7.74	0.0059	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	20.10	0.1023	29.54	0.8995	Pass
5710	8.06	0.0064	29.69	0.9311	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	---------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	22.95	0.1974	29.54	0.8995	Pass
5710	10.91	0.0123	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.54	0.0451	29.54	0.8995	Pass
5720	10.12	0.0103	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.77	0.0475	29.54	0.8995	Pass
5720	10.57	0.0114	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	19.67	0.0926	29.54	0.8995	Pass
5720	13.36	0.0217	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	19.75	0.0944	29.54	0.8995	Pass
5710	7.65	0.0058	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	20.07	0.1016	29.54	0.8995	Pass
5710	7.94	0.0062	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT40)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	22.92	0.1960	29.54	0.8995	Pass
5710	10.81	0.0120	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	21.92	0.1556	29.54	0.8995	Pass
5690	6.72	0.0047	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	22.49	0.1774	29.54	0.8995	Pass
5690	7.61	0.0058	29.69	0.9311	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	25.22	0.3330	29.54	0.8995	Pass
5690	10.20	0.0105	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	15.77	0.0378	29.54	0.8995	Pass
5720	10.08	0.0102	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	15.88	0.0387	29.54	0.8995	Pass
5720	10.97	0.0125	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	18.84	0.0765	29.54	0.8995	Pass
5720	13.56	0.0227	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	19.36	0.0863	29.54	0.8995	Pass
5710	8.00	0.0063	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	19.39	0.0869	29.54	0.8995	Pass
5710	8.31	0.0068	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	22.39	0.1732	29.54	0.8995	Pass
5710	11.17	0.0131	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	21.66	0.1466	29.54	0.8995	Pass
5690	7.23	0.0053	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	22.10	0.1622	29.54	0.8995	Pass
5690	8.63	0.0073	29.69	0.9311	Pass

Test Mode	IEEE 802.11ax (HE80)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	24.90	0.3087	29.54	0.8995	Pass
5690	11.00	0.0126	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT20)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	15.72	0.0373	29.54	0.8995	Pass
5720	10.30	0.0107	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT20)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.09	0.0406	29.54	0.8995	Pass
5720	10.76	0.0119	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT20)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	18.92	0.0780	29.54	0.8995	Pass
5720	13.55	0.0226	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	18.85	0.0767	29.54	0.8995	Pass
5710	7.45	0.0056	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	18.92	0.0780	29.54	0.8995	Pass
5710	7.67	0.0058	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT40)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	21.90	0.1547	29.54	0.8995	Pass
5710	10.57	0.0114	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT80)_Ant. 1	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	21.86	0.1535	29.54	0.8995	Pass
5690	7.37	0.0055	29.69	0.9311	Pass

Test Mode	IEEE 802.11be (EHT80)_Ant. 2	Tested Date	2025/11/20 ~ 12/9
-----------	------------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	22.26	0.1683	29.54	0.8995	Pass
5690	8.55	0.0072	29.69	0.9311	Pass


Test Mode	IEEE 802.11be (EHT80)_Total	Tested Date	2025/11/20 ~ 12/9
-----------	-----------------------------	-------------	-------------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	25.07	0.3217	29.54	0.8995	Pass
5690	11.01	0.0126	29.69	0.9311	Pass


APPENDIX G POWER SPECTRAL DENSITY

Test Mode	IEEE 802.11a_Ant. 1
-----------	---------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	9.08	0.22	9.30	16.34	Pass
5200	10.11	0.22	10.33	16.34	Pass
5240	11.57	0.22	11.79	16.34	Pass

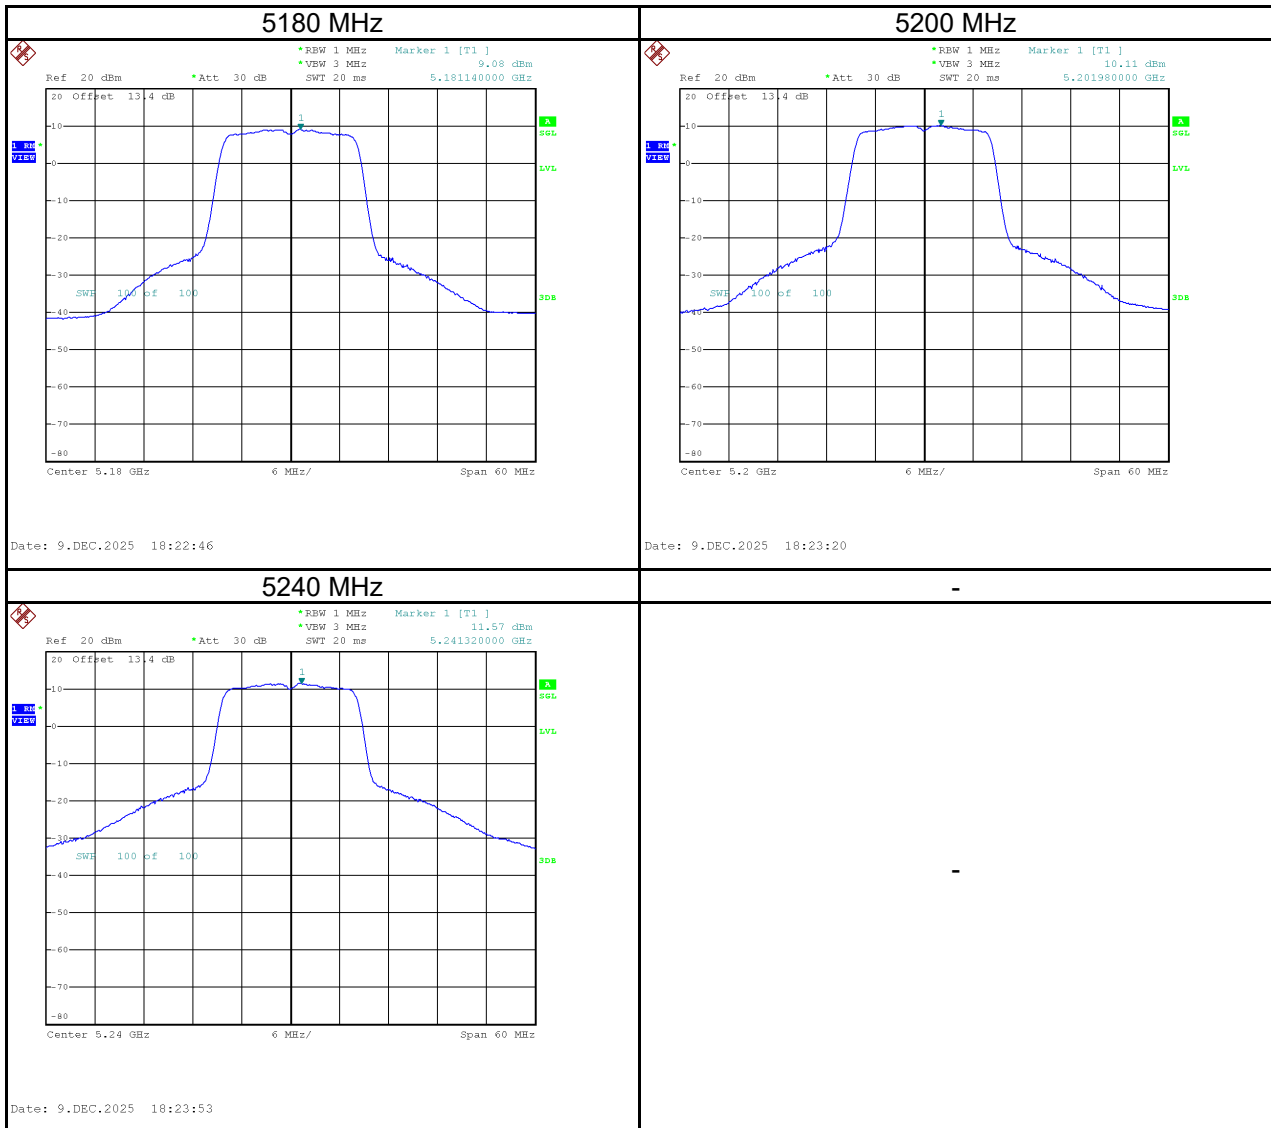

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	6.65	0.22	6.87	10.34	Pass
5300	6.62	0.22	6.84	10.34	Pass
5320	6.54	0.22	6.76	10.34	Pass

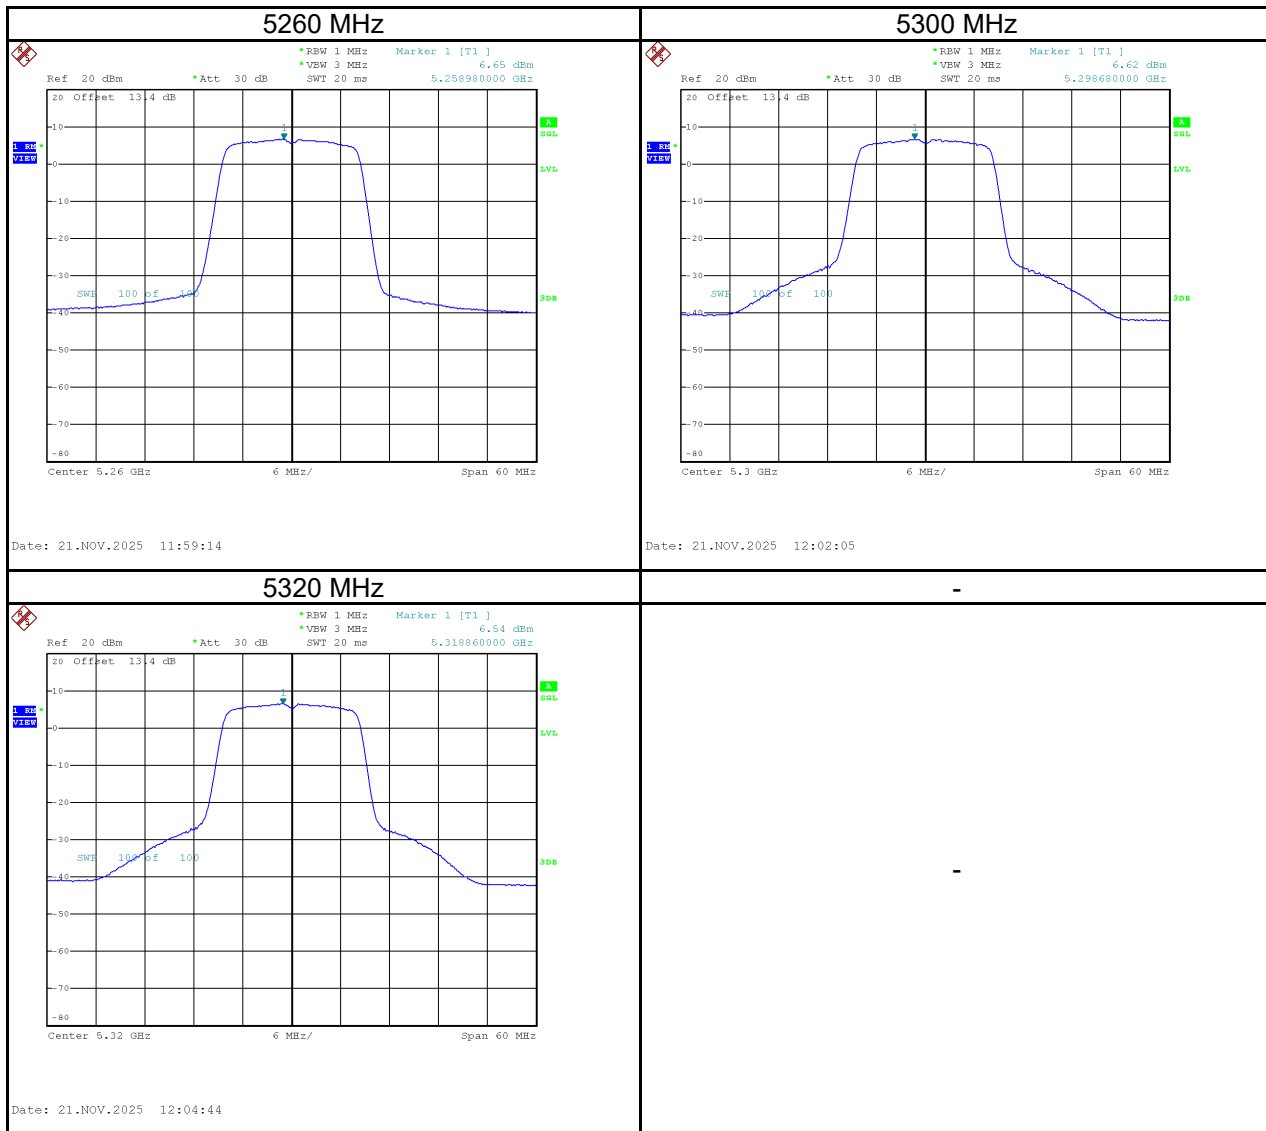


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	6.93	0.22	7.15	10.54	Pass
5580	7.17	0.22	7.39	10.54	Pass
5700	6.88	0.22	7.10	10.54	Pass

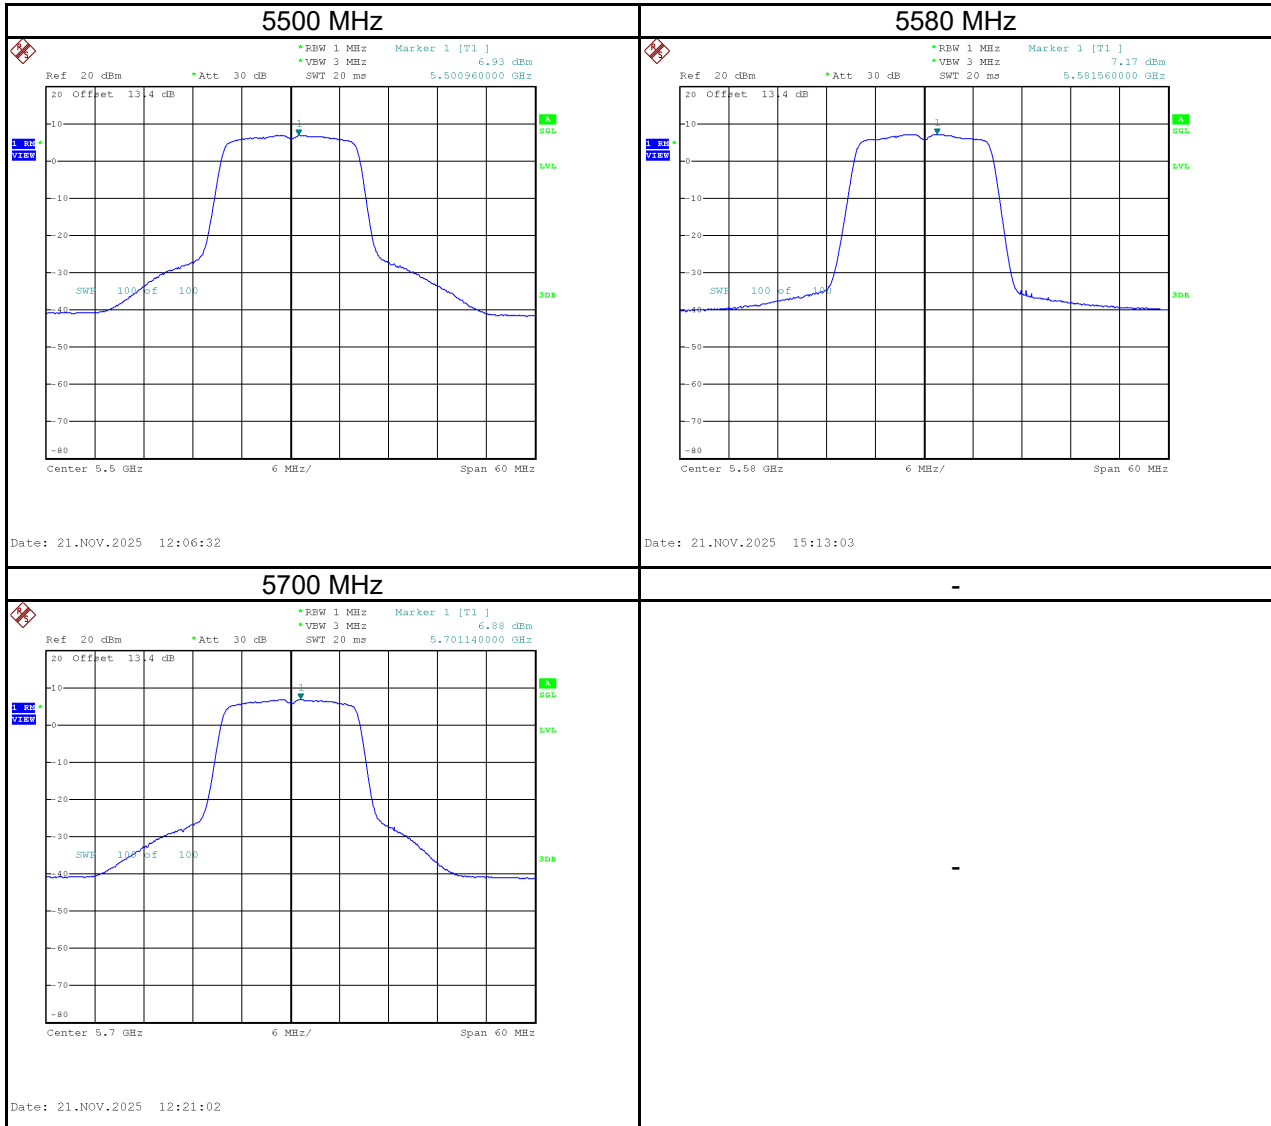


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	1.94	8.93	0.22	9.15	29.69	Pass
5785	1.65	8.64	0.22	8.86	29.69	Pass
5825	1.70	8.69	0.22	8.91	29.69	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

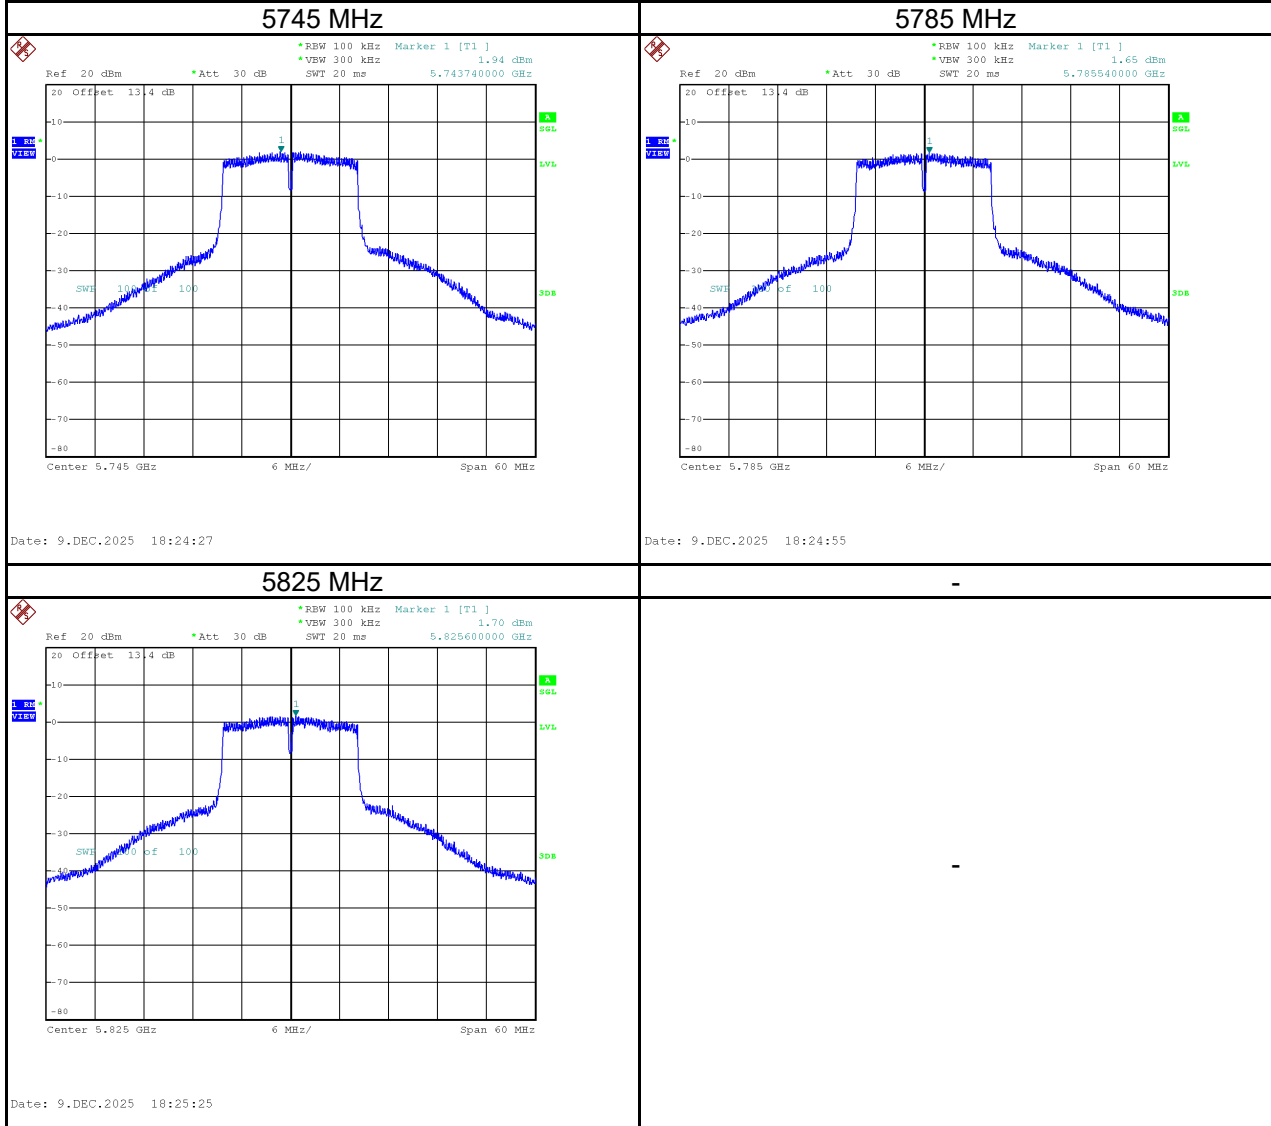


Test Mode	IEEE 802.11a_Ant. 2
-----------	---------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	8.80	0.22	9.02	16.34	Pass
5200	9.73	0.22	9.95	16.34	Pass
5240	11.20	0.22	11.42	16.34	Pass

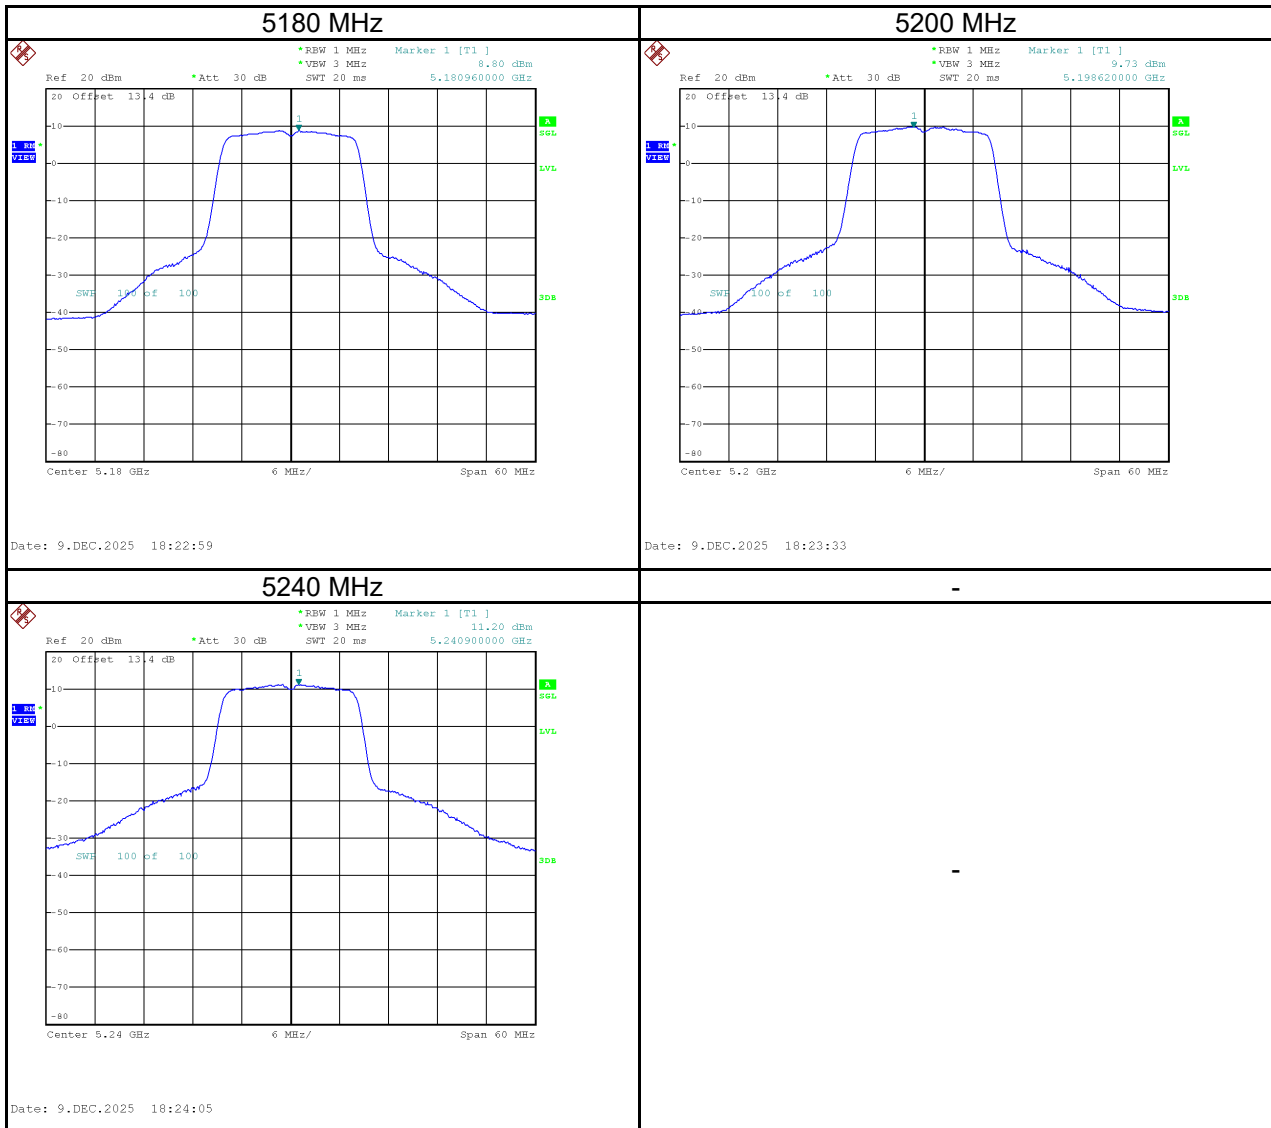

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	7.42	0.22	7.64	10.34	Pass
5300	7.27	0.22	7.49	10.34	Pass
5320	7.16	0.22	7.38	10.34	Pass

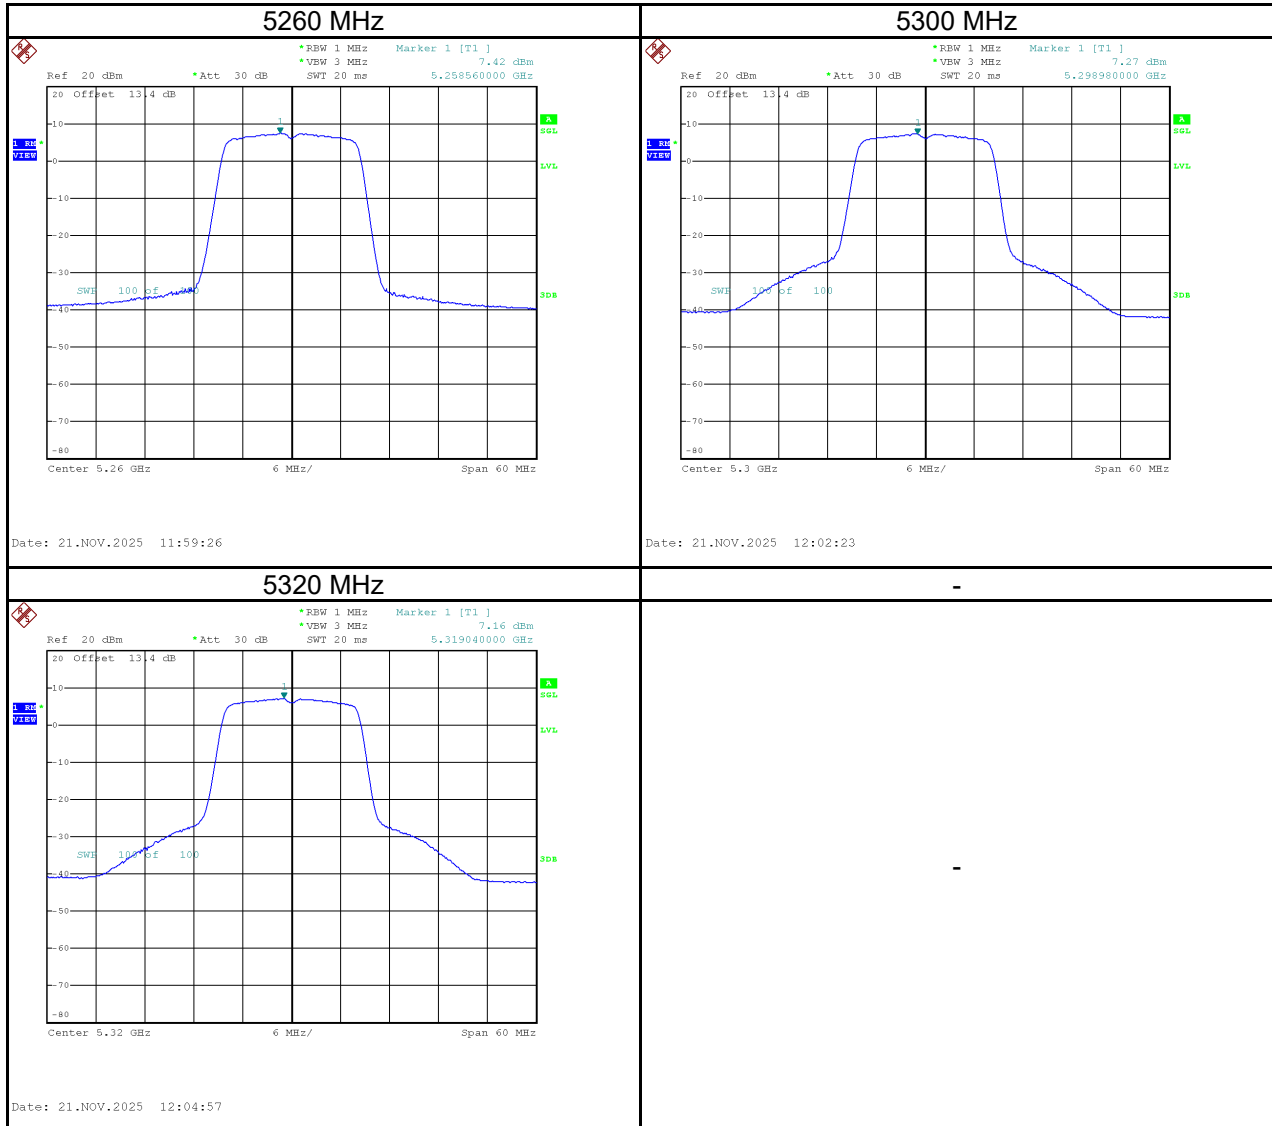


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	7.11	0.22	7.33	10.54	Pass
5580	7.29	0.22	7.51	10.54	Pass
5700	6.94	0.22	7.16	10.54	Pass

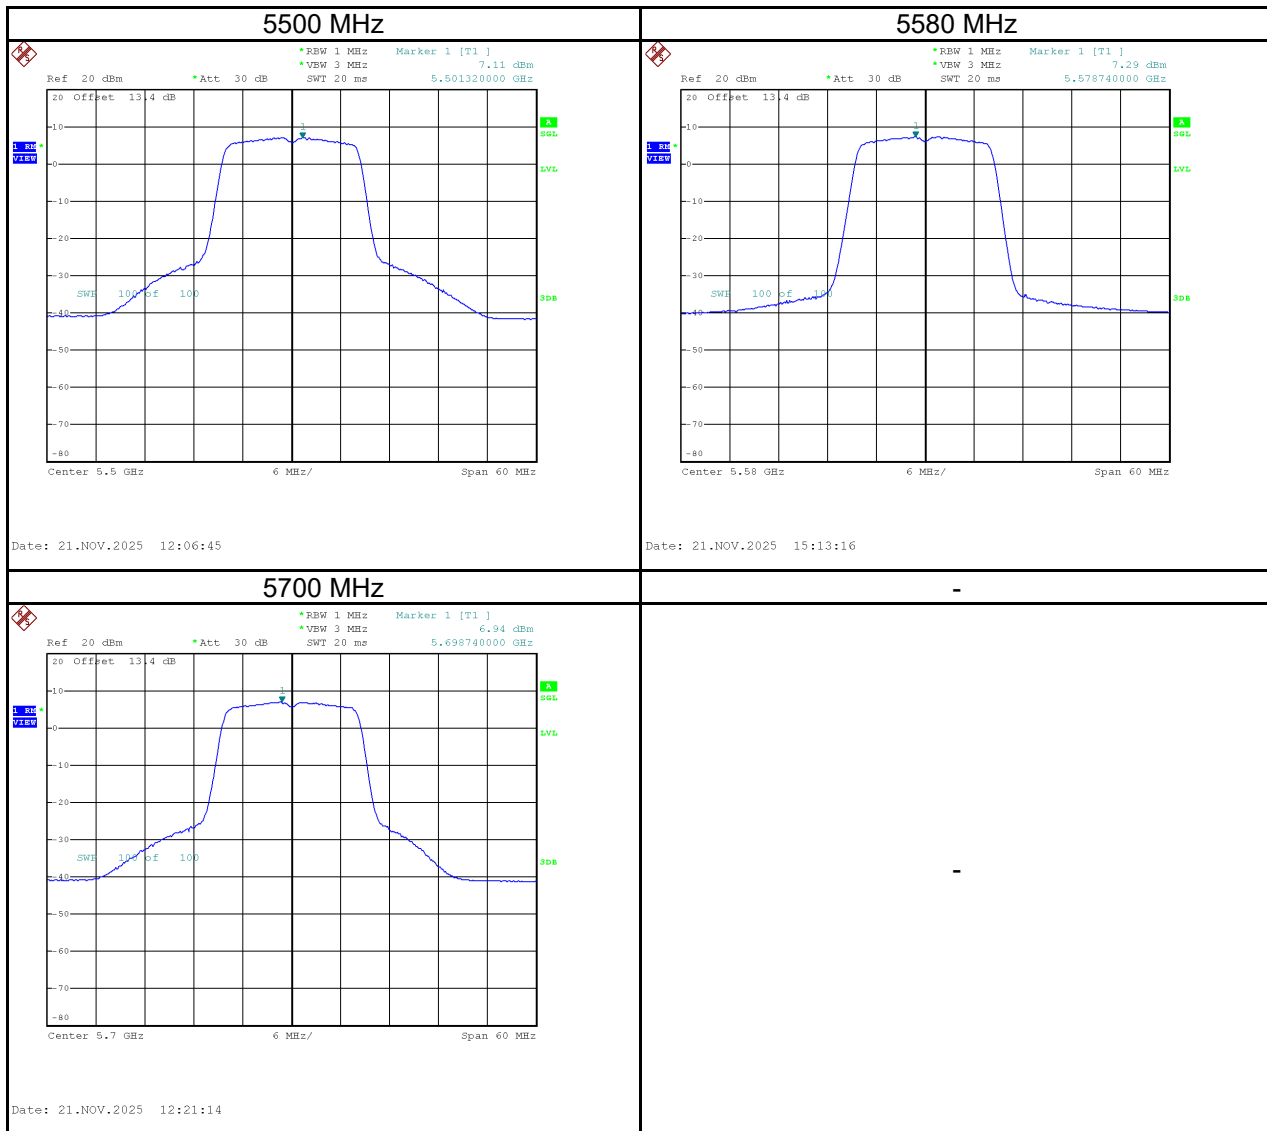

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-0.08	6.91	0.22	7.13	29.69	Pass
5785	-0.67	6.32	0.22	6.54	29.69	Pass
5825	-0.51	6.48	0.22	6.70	29.69	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

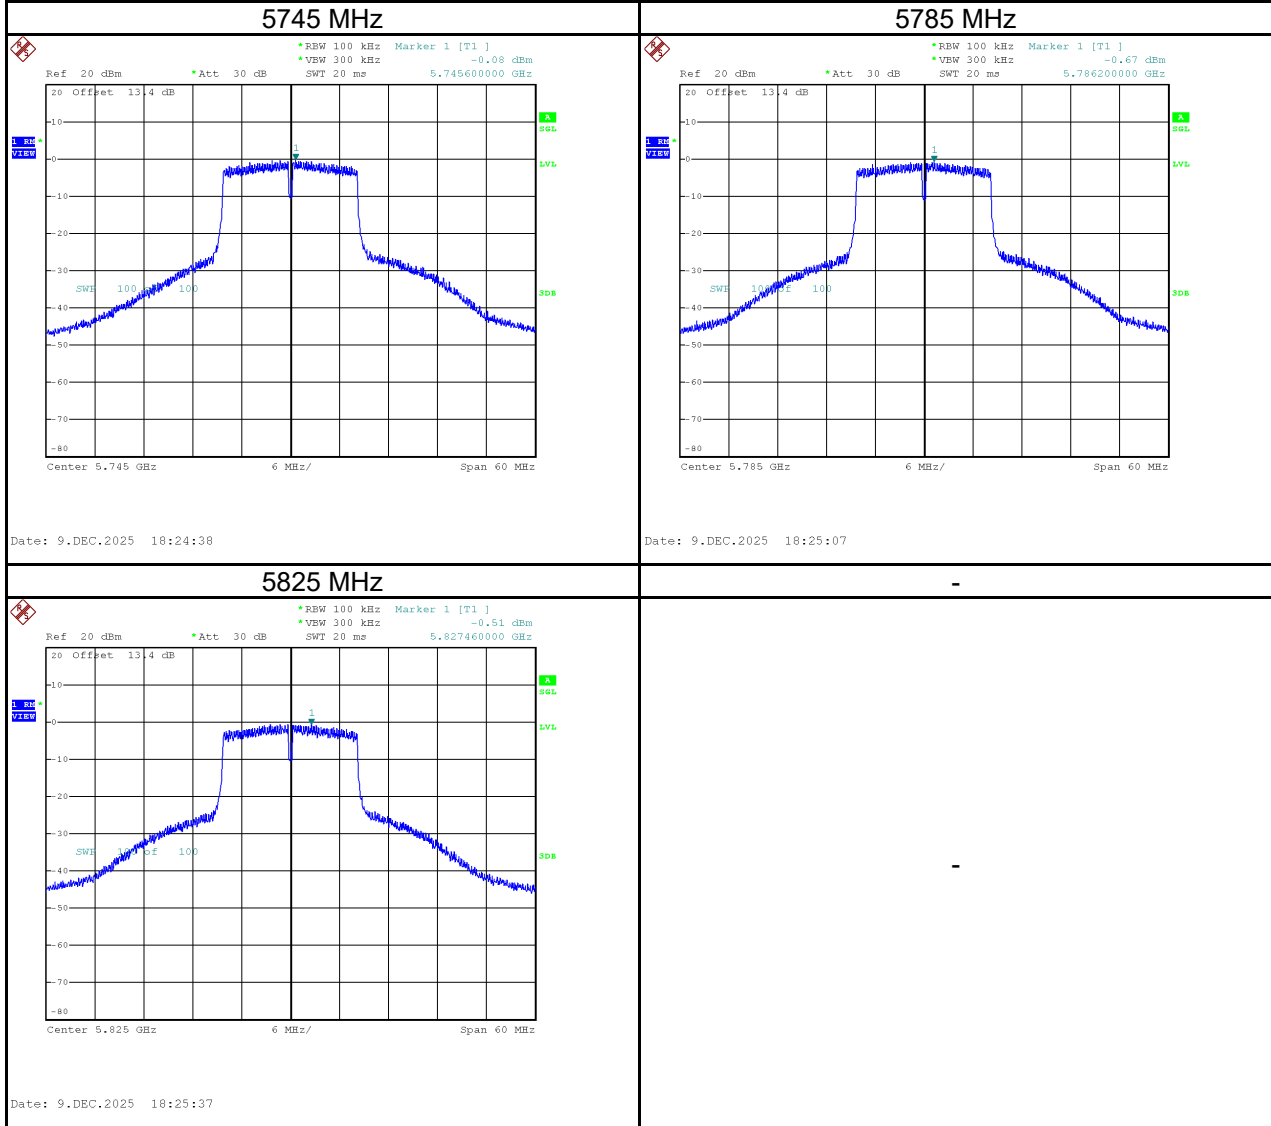

Test Mode	IEEE 802.11a _Total
-----------	---------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	11.95	0.22	12.17	16.34	Pass
5200	12.93	0.22	13.15	16.34	Pass
5240	14.40	0.22	14.62	16.34	Pass
5260	10.06	0.22	10.28	10.34	Pass
5300	9.97	0.22	10.18	10.34	Pass
5320	9.87	0.22	10.09	10.34	Pass
5500	10.03	0.22	10.25	10.54	Pass
5580	10.24	0.22	10.46	10.54	Pass
5700	9.92	0.22	10.14	10.54	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	4.06	11.05	0.22	11.26	29.69	Pass
5785	3.65	10.64	0.22	10.86	29.69	Pass
5825	3.74	10.73	0.22	10.95	29.69	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100KHz} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11n (HT20)_Ant. 1
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	10.12	0.23	10.35	16.34	Pass
5200	5.73	0.23	5.96	16.34	Pass
5240	11.99	0.23	12.22	16.34	Pass

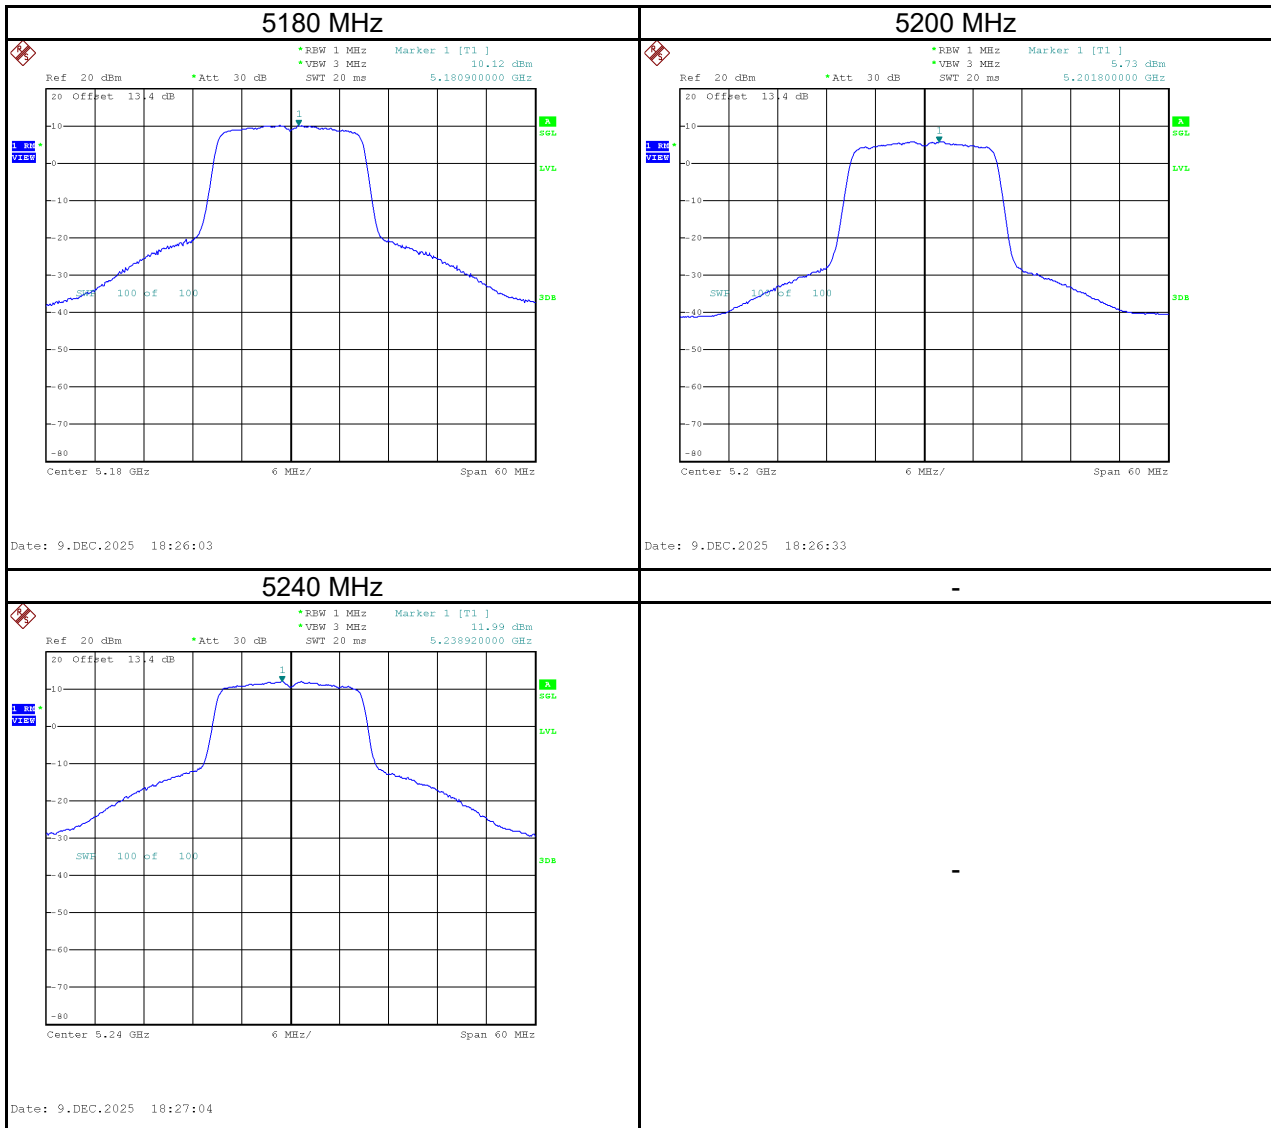

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	6.34	0.23	6.57	10.34	Pass
5300	6.38	0.23	6.61	10.34	Pass
5320	6.71	0.23	6.94	10.34	Pass

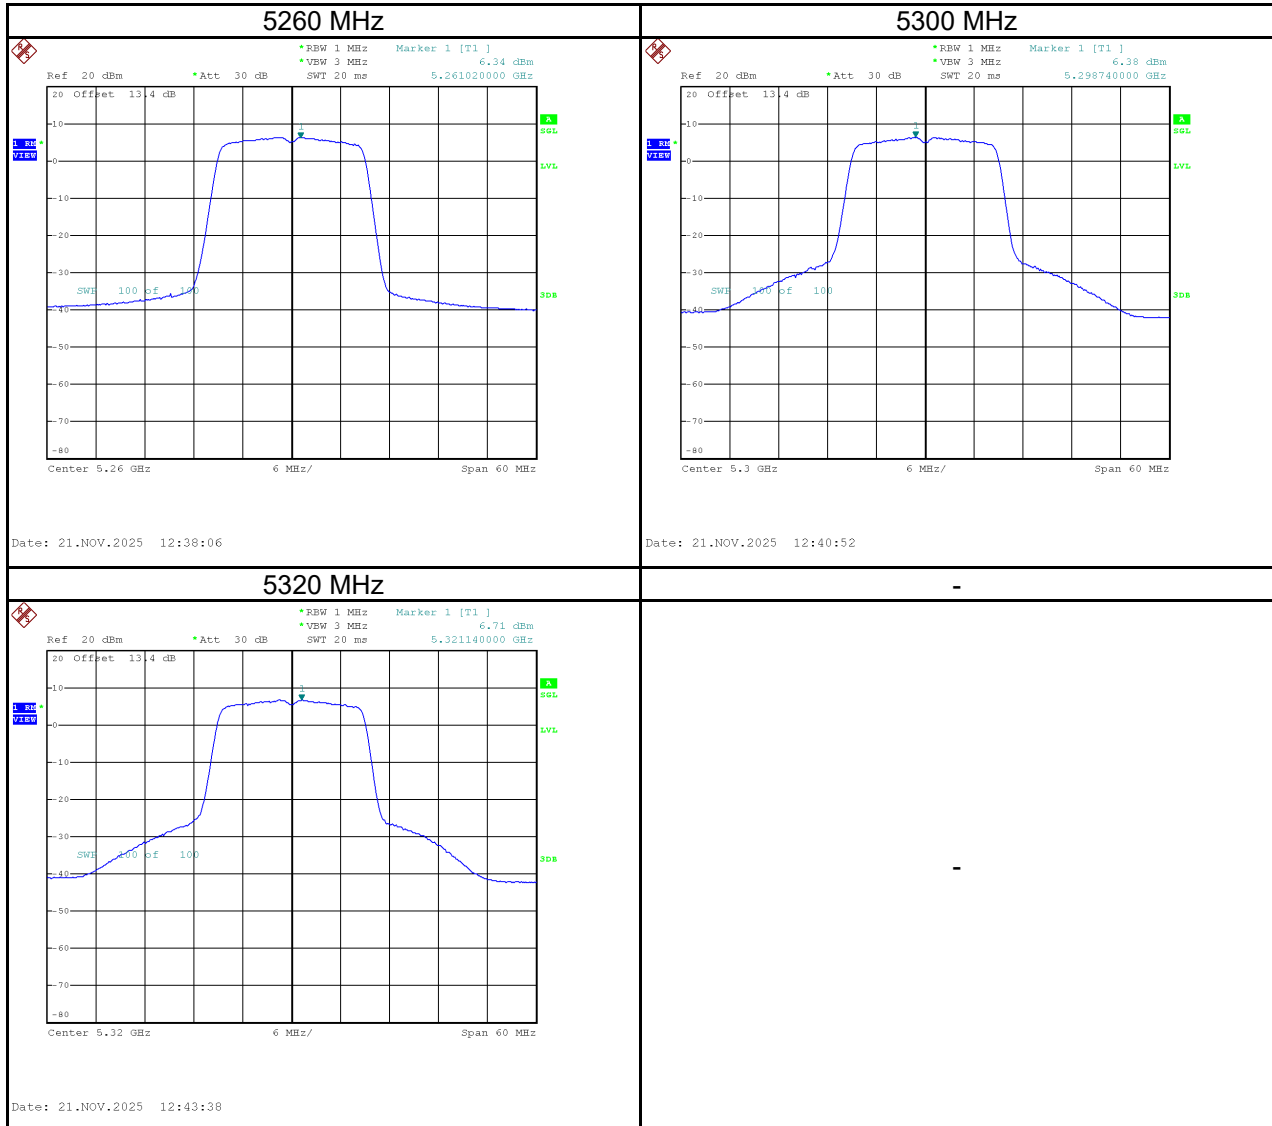


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	7.26	0.23	7.49	10.54	Pass
5580	6.75	0.23	6.98	10.54	Pass
5700	7.14	0.23	7.37	10.54	Pass

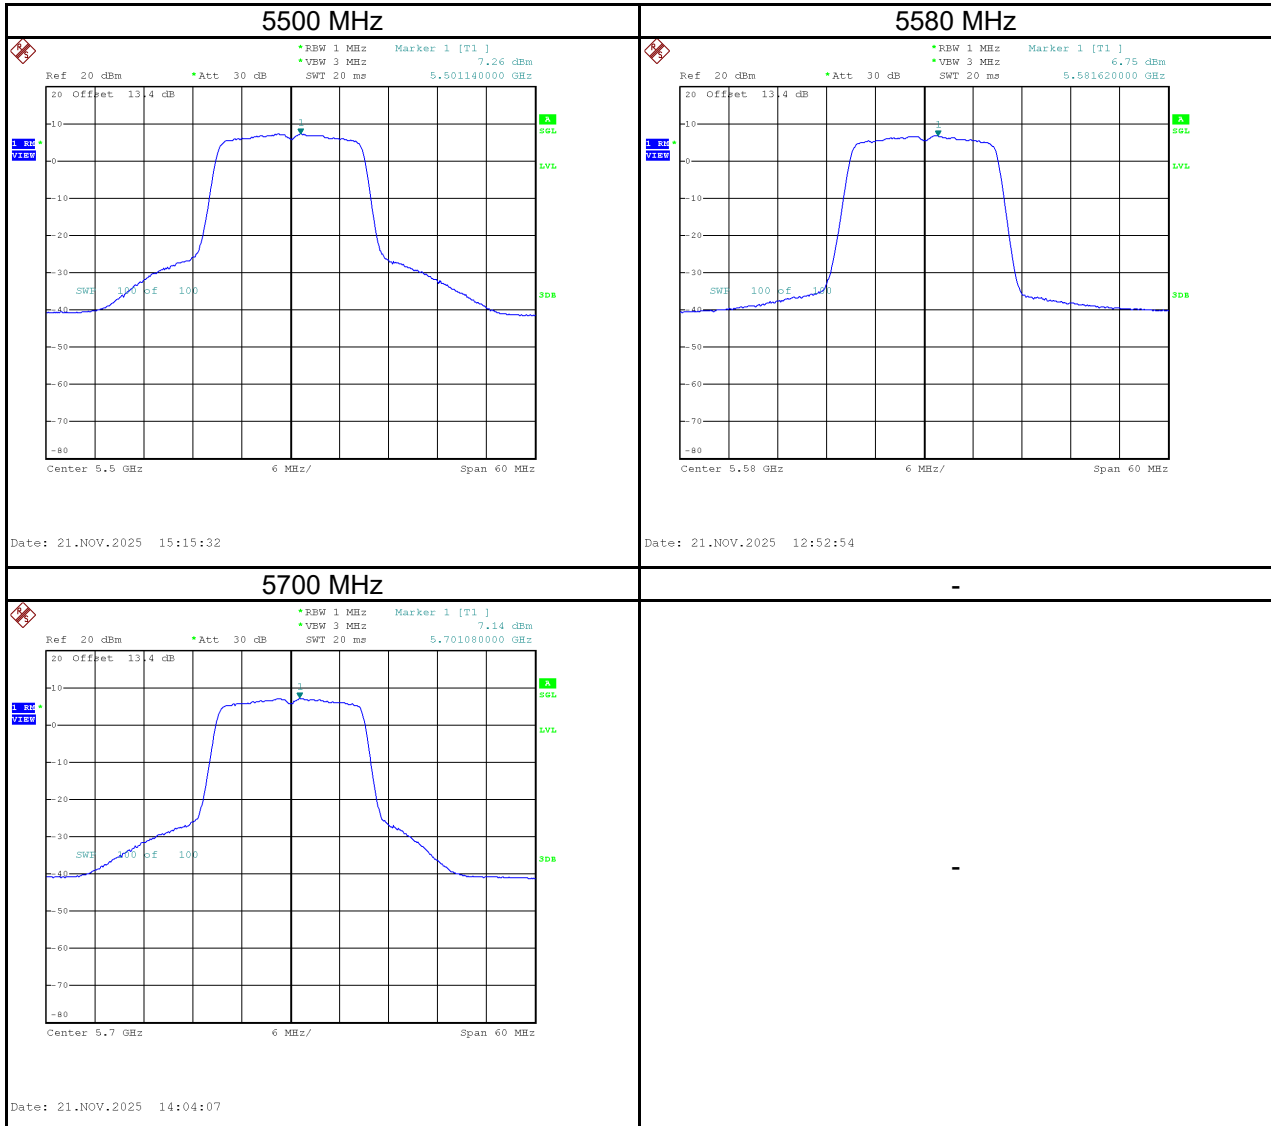


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	3.74	10.73	0.23	10.96	29.69	Pass
5785	5.72	12.71	0.23	12.94	29.69	Pass
5825	3.93	10.92	0.23	11.15	29.69	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

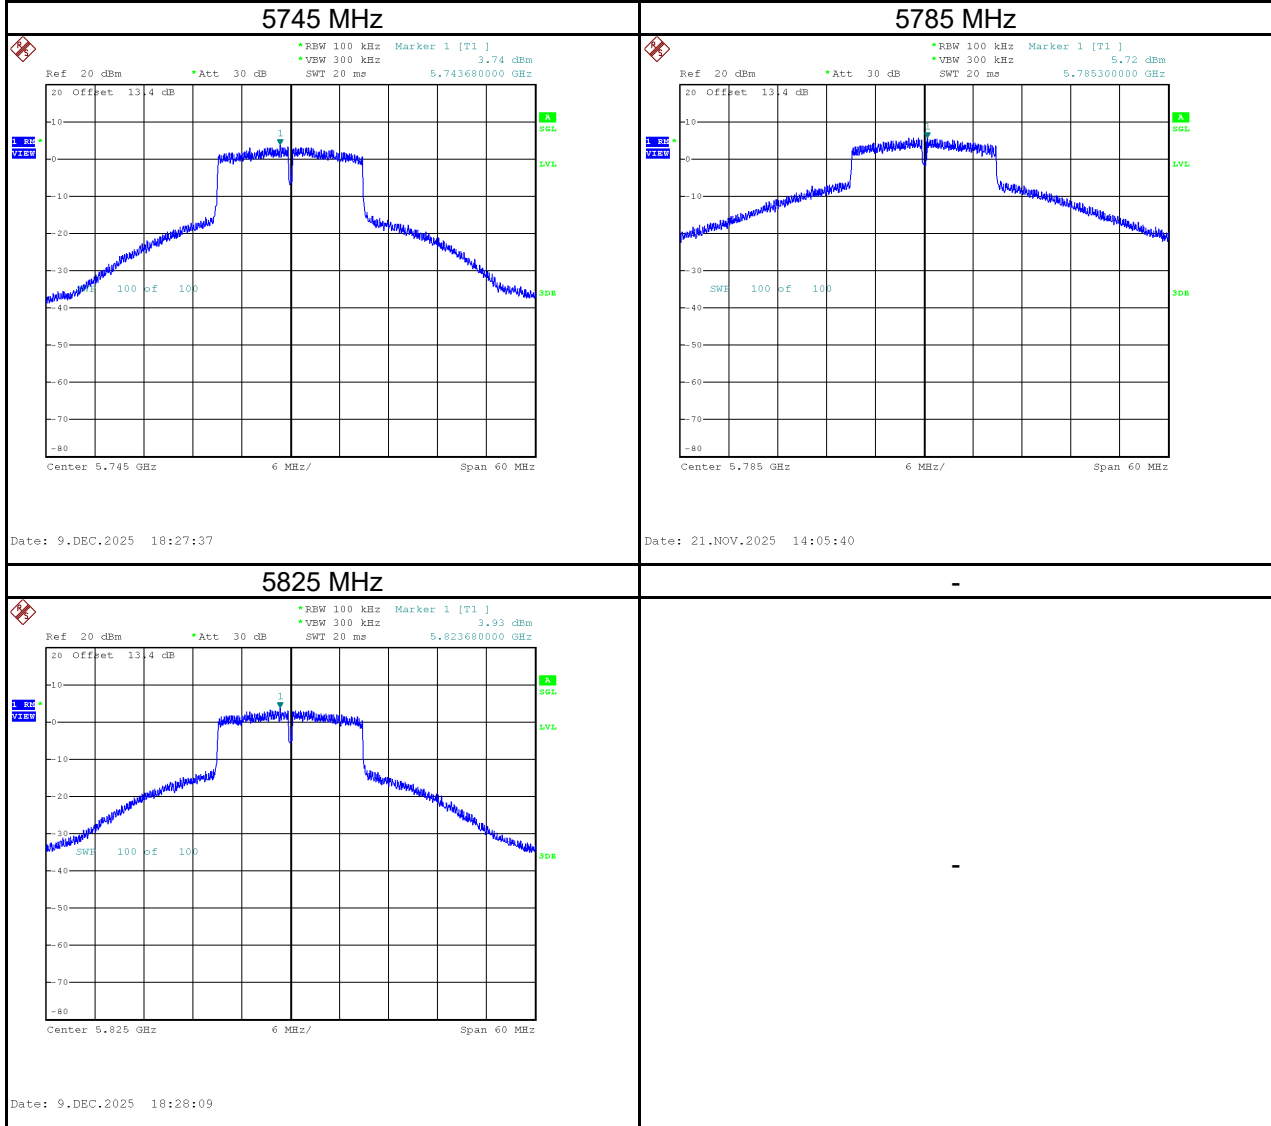


Test Mode	IEEE 802.11n (HT20)_Ant. 2
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	9.77	0.23	10.00	16.34	Pass
5200	5.47	0.23	5.70	16.34	Pass
5240	11.63	0.23	11.86	16.34	Pass

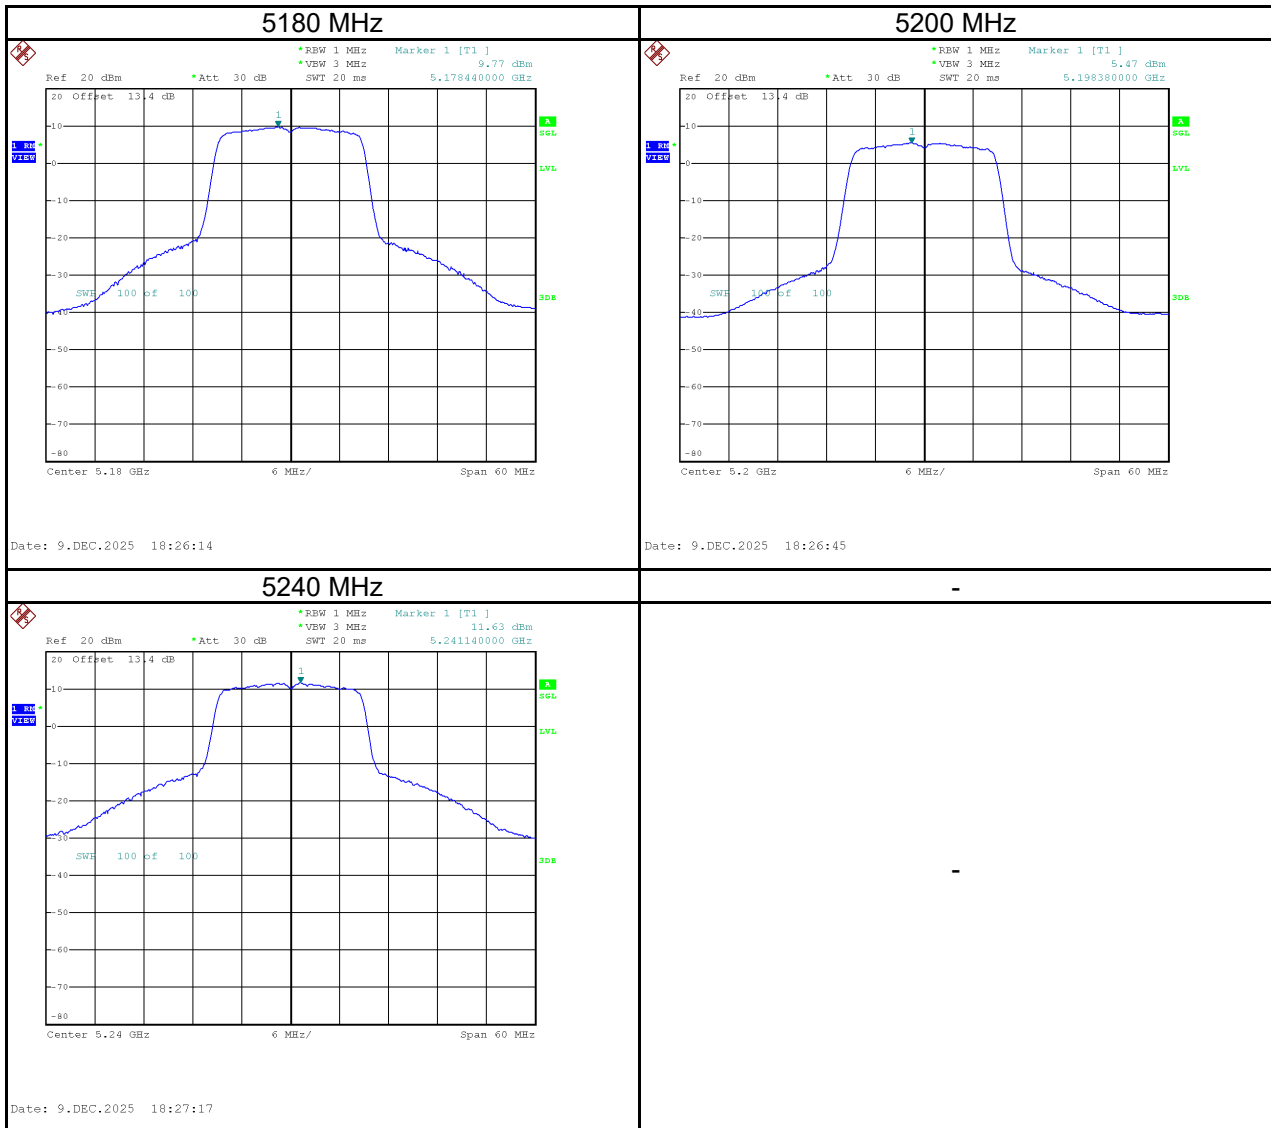

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	6.98	0.23	7.21	10.34	Pass
5300	6.92	0.23	7.15	10.34	Pass
5320	7.25	0.23	7.48	10.34	Pass

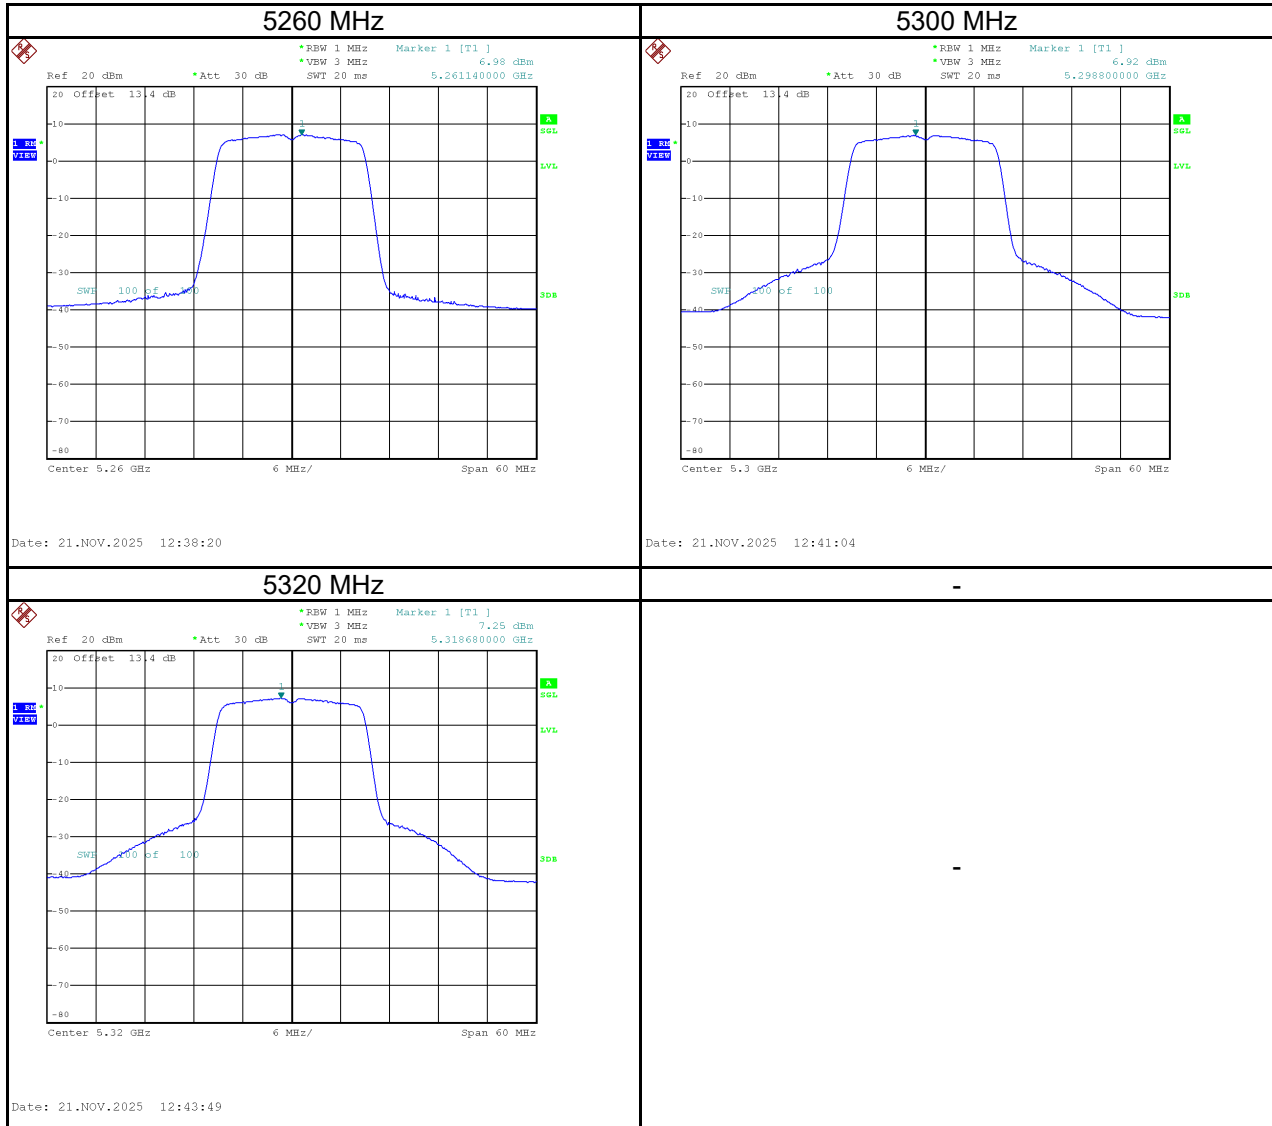


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	7.23	0.23	7.46	10.54	Pass
5580	6.80	0.23	7.03	10.54	Pass
5700	7.03	0.23	7.26	10.54	Pass

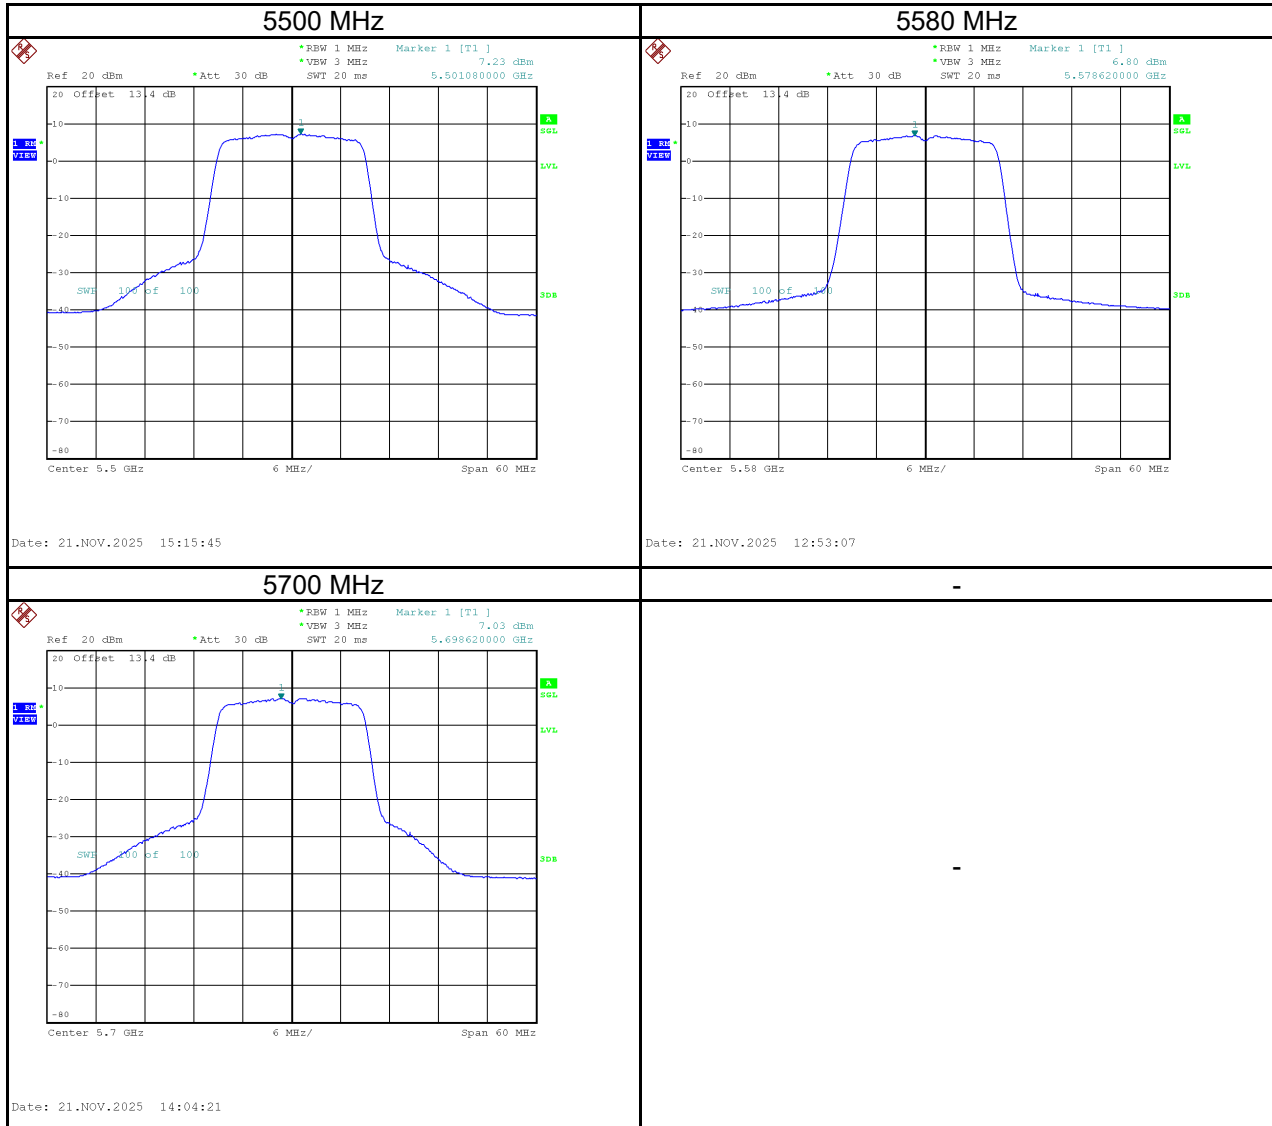

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	0.67	7.66	0.23	7.89	29.69	Pass
5785	5.71	12.70	0.23	12.93	29.69	Pass
5825	0.87	7.86	0.23	8.09	29.69	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

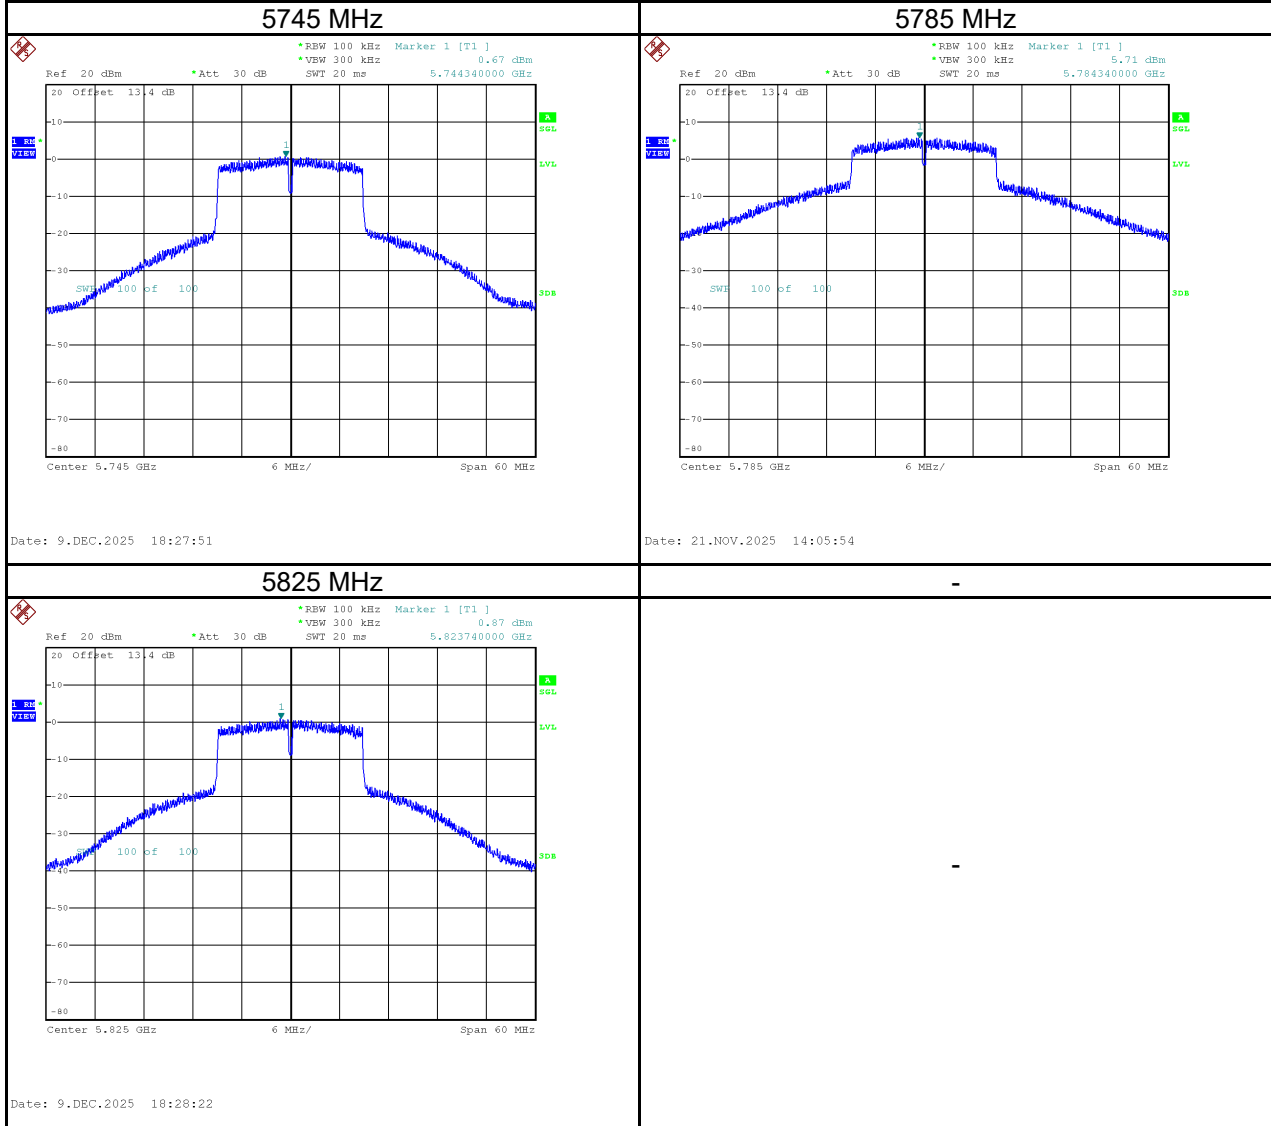

Test Mode	IEEE 802.11n (HT20)_Total
-----------	---------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	12.96	0.23	13.19	16.34	Pass
5200	8.61	0.23	8.85	16.34	Pass
5240	14.82	0.23	15.06	16.34	Pass
5260	9.68	0.23	9.92	10.34	Pass
5300	9.67	0.23	9.90	10.34	Pass
5320	10.00	0.23	10.23	10.34	Pass
5500	10.26	0.23	10.49	10.54	Pass
5580	9.79	0.23	10.02	10.54	Pass
5700	10.10	0.23	10.33	10.54	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	5.48	12.47	0.23	12.70	29.69	Pass
5785	8.73	15.72	0.23	15.95	29.69	Pass
5825	5.67	12.66	0.23	12.90	29.69	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100KHz} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11n (HT40)_Ant. 1
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	3.69	0.47	4.16	16.34	Pass
5230	5.96	0.47	6.43	16.34	Pass

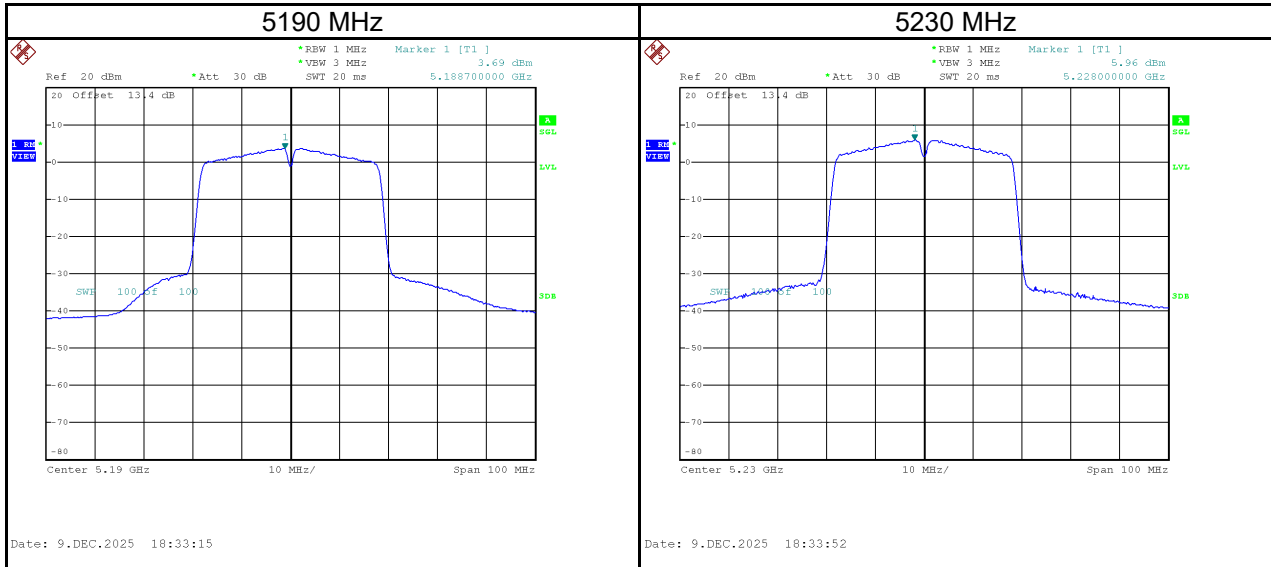

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	6.08	0.47	6.55	10.34	Pass
5310	3.52	0.47	3.99	10.34	Pass

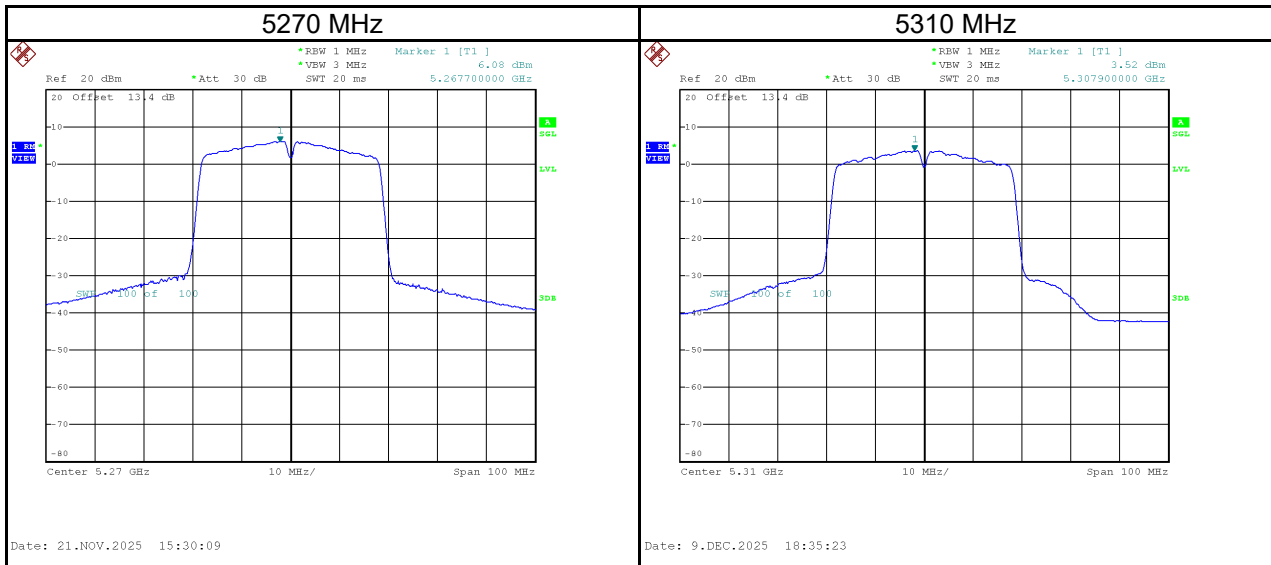


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5510	4.53	0.47	5.00	10.54	Pass
5550	6.92	0.47	7.39	10.54	Pass
5670	6.40	0.47	6.87	10.54	Pass

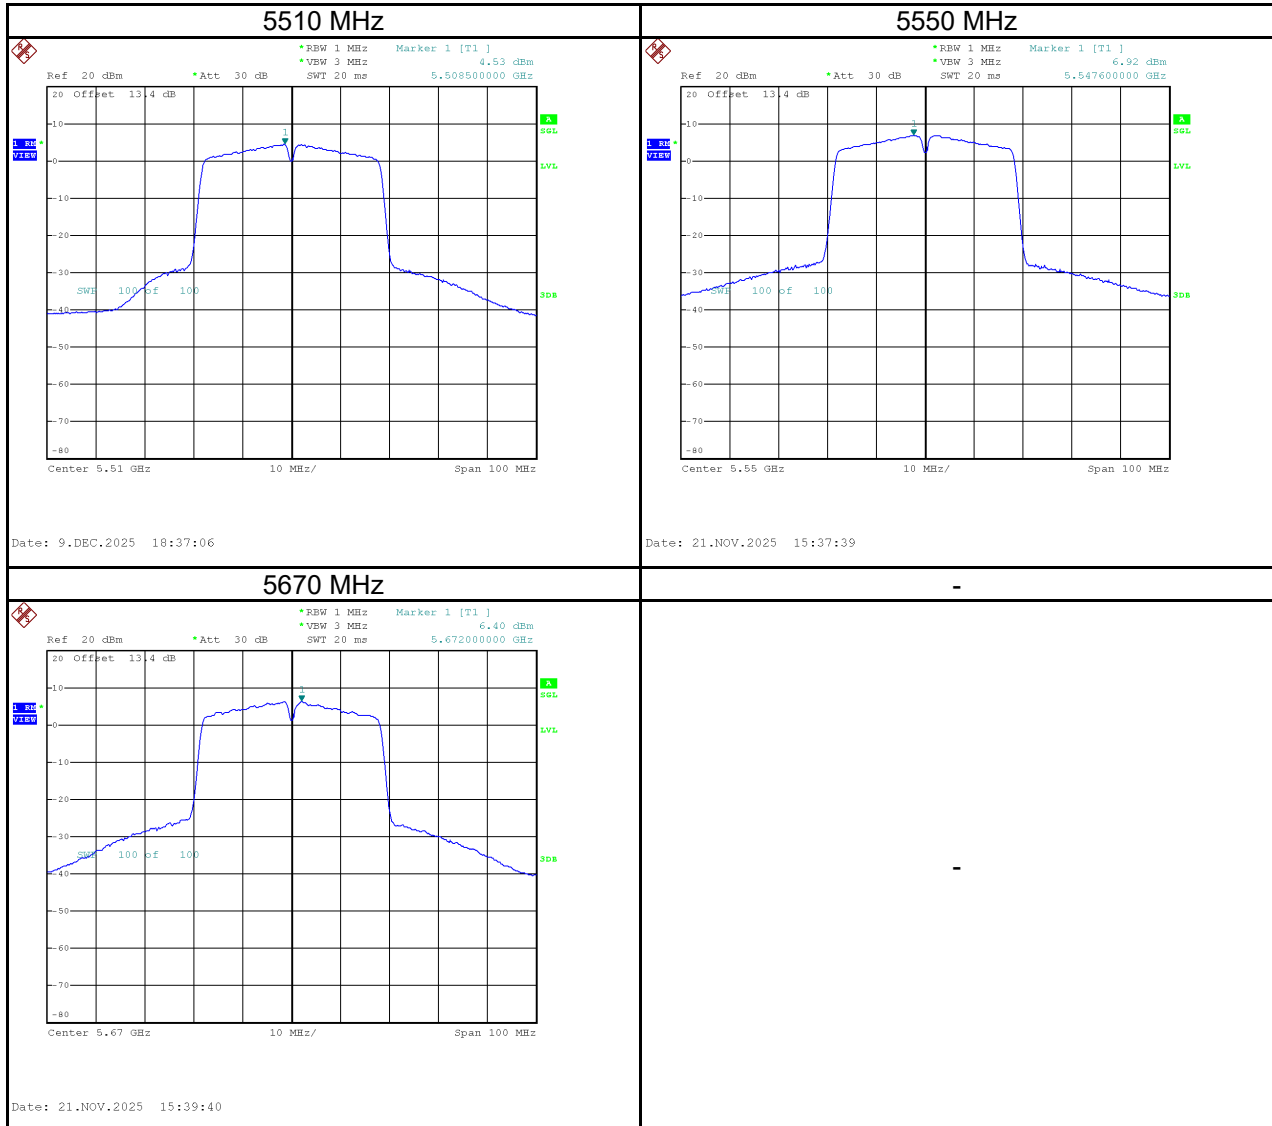


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-0.22	6.77	0.47	7.24	29.69	Pass
5795	3.23	10.22	0.47	10.69	29.69	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

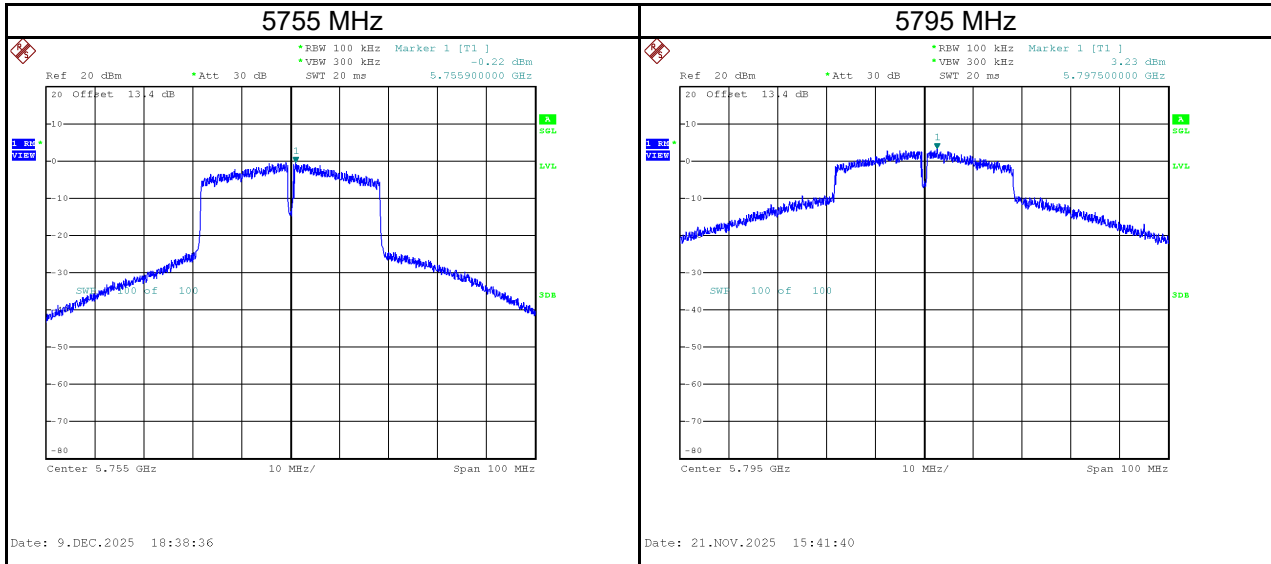

Test Mode	IEEE 802.11n (HT40)_Ant. 2
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	3.46	0.47	3.93	16.34	Pass
5230	5.28	0.47	5.75	16.34	Pass

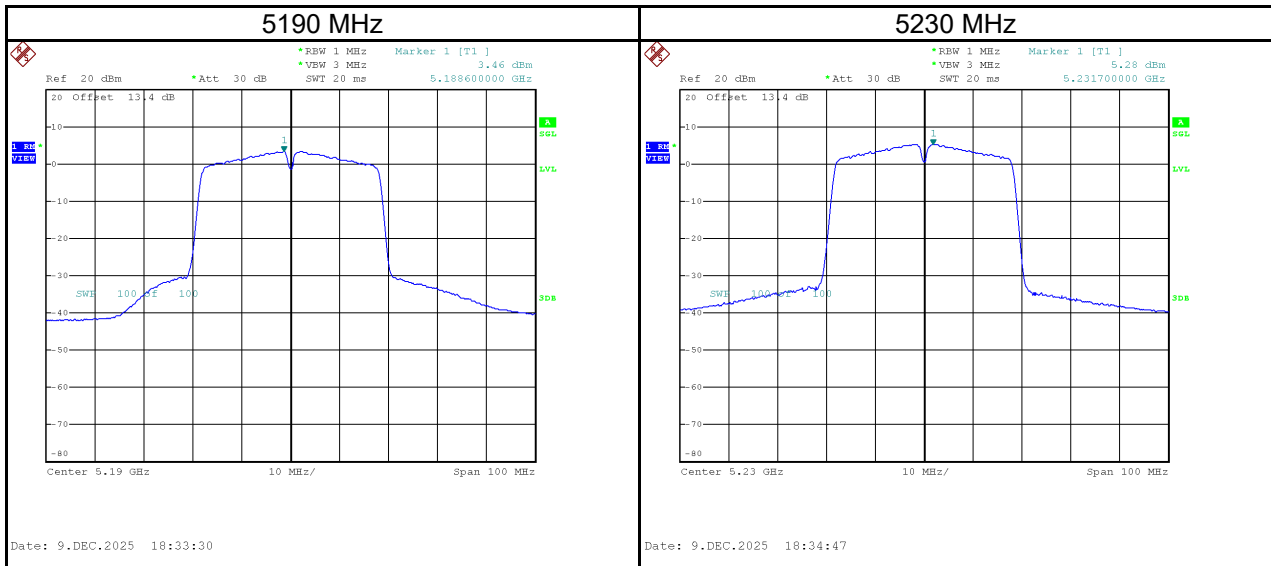

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	6.76	0.47	7.23	10.34	Pass
5310	3.80	0.47	4.27	10.34	Pass

