




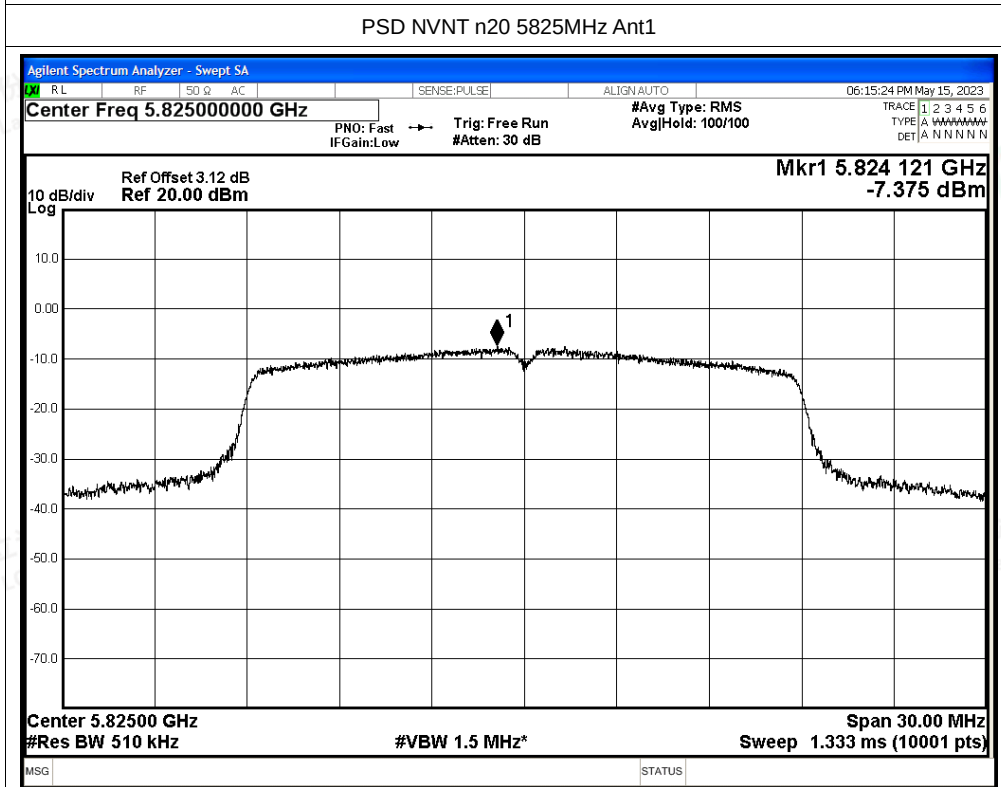
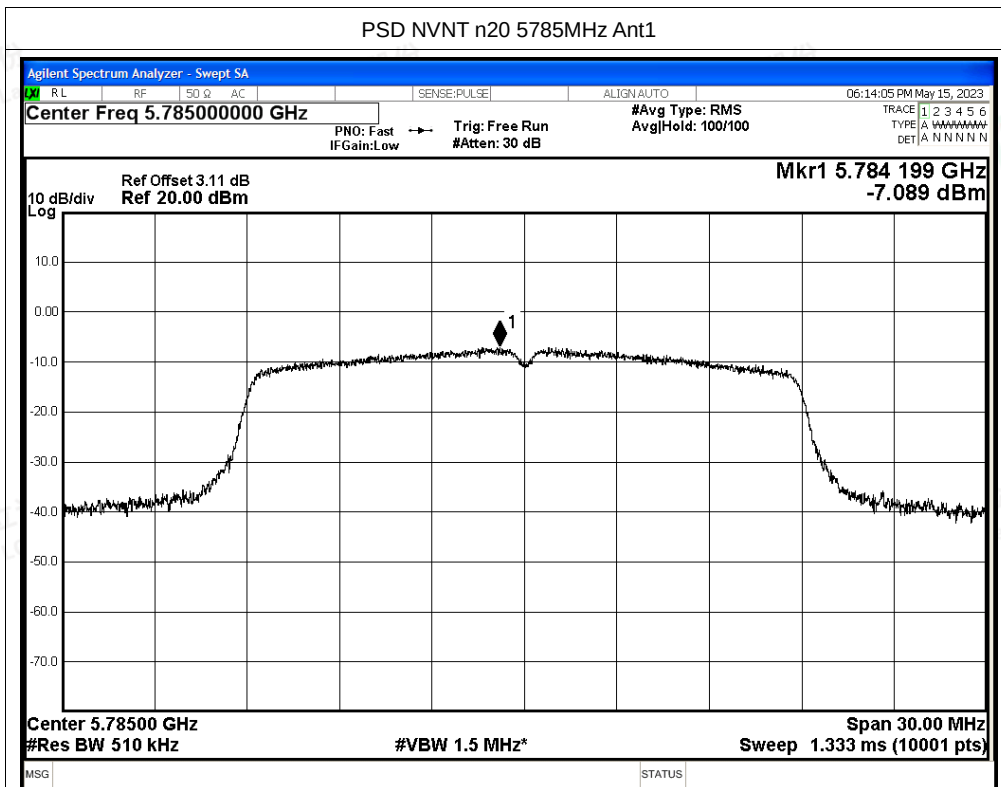
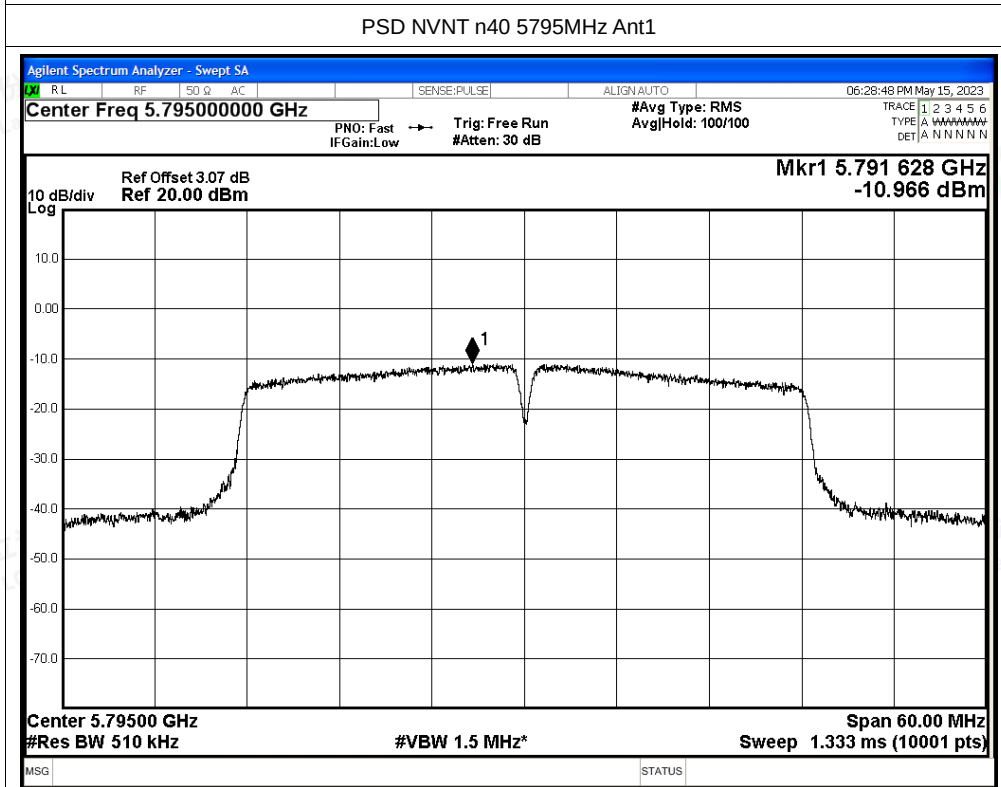
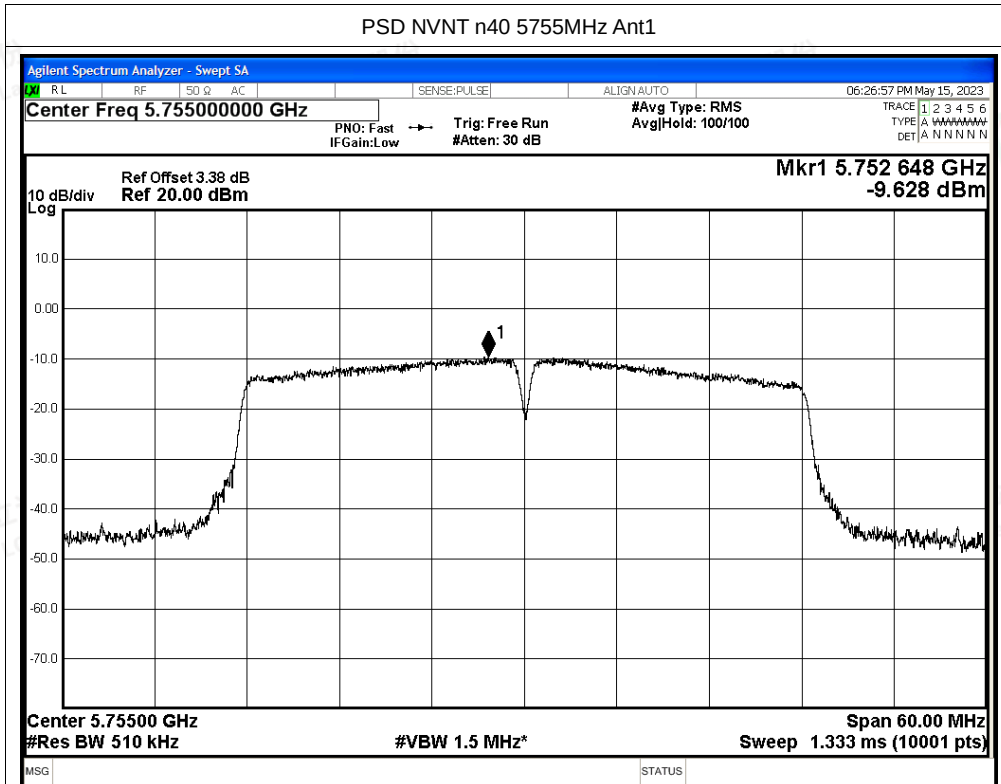
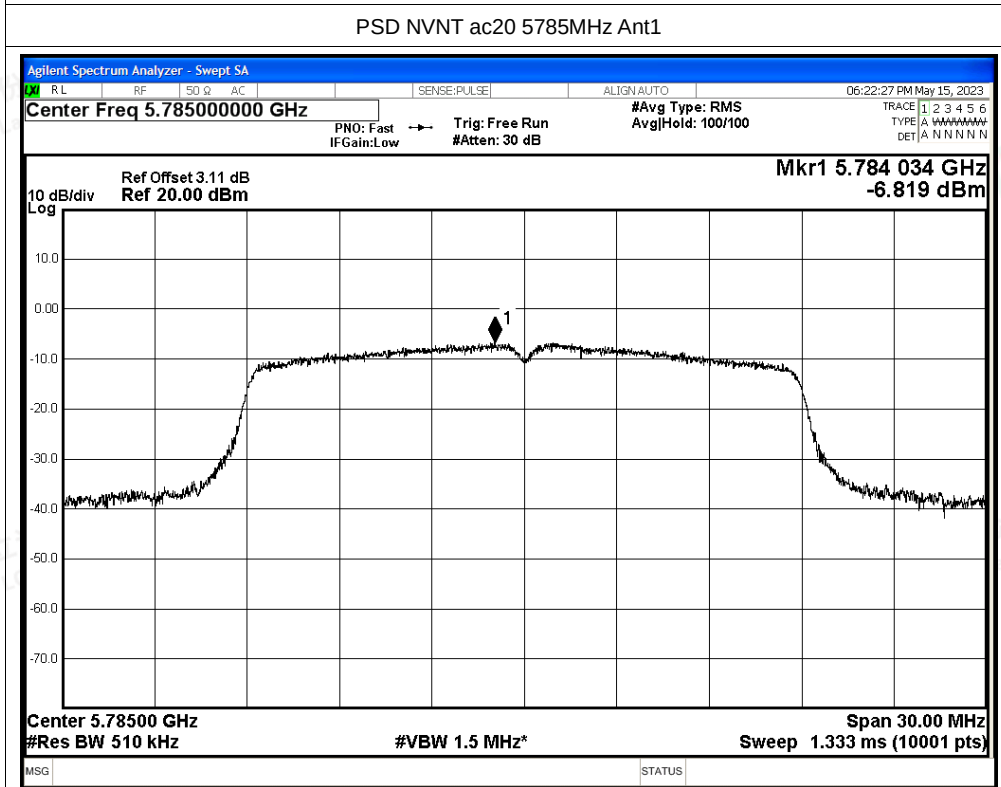


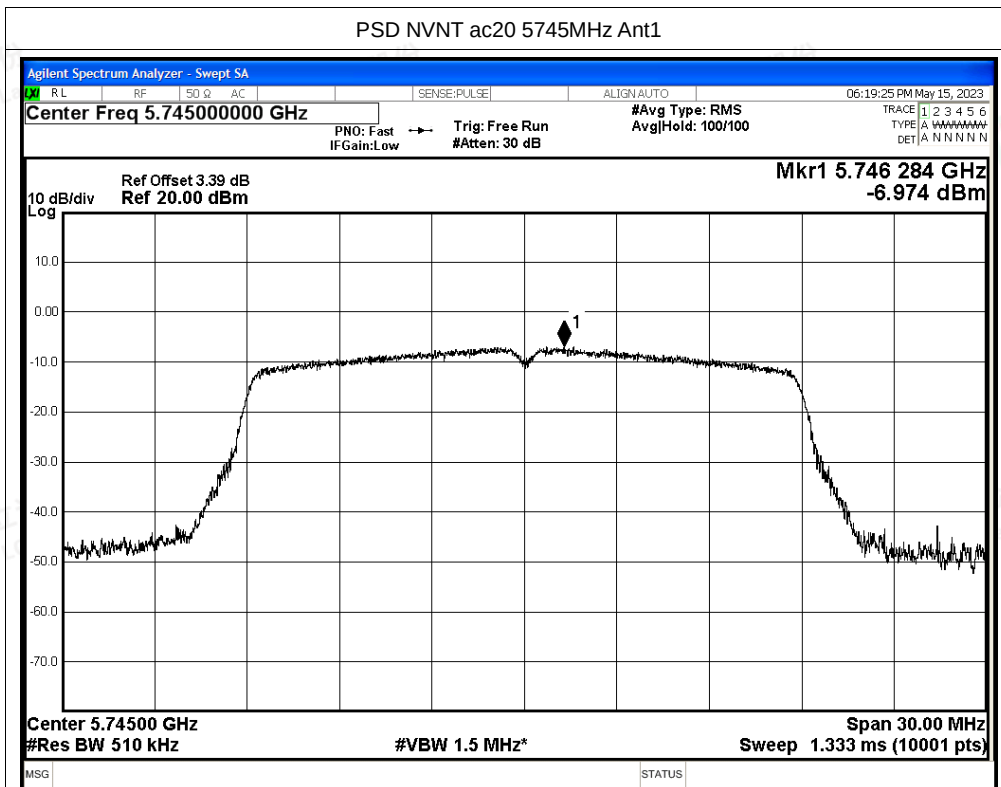

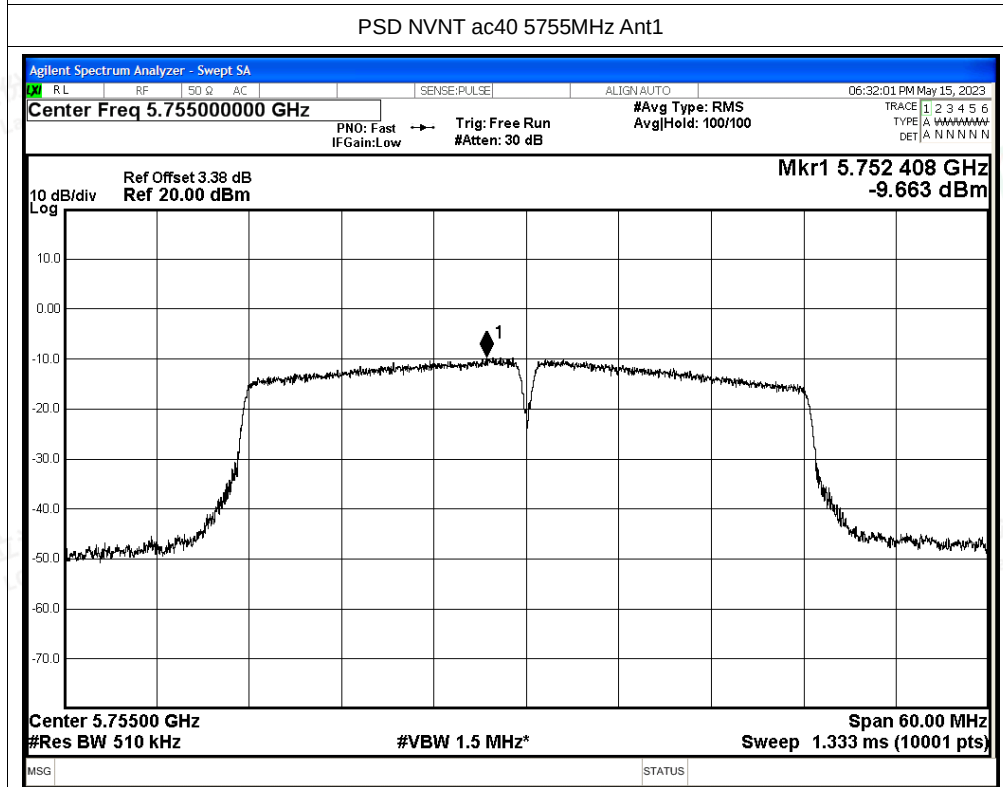

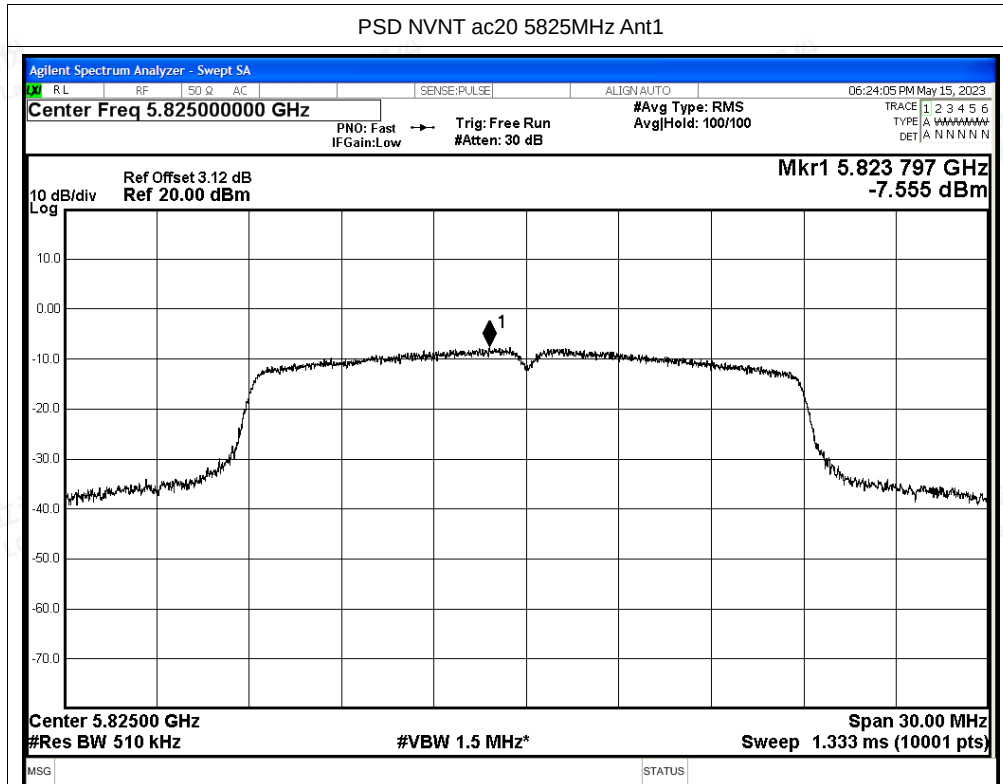

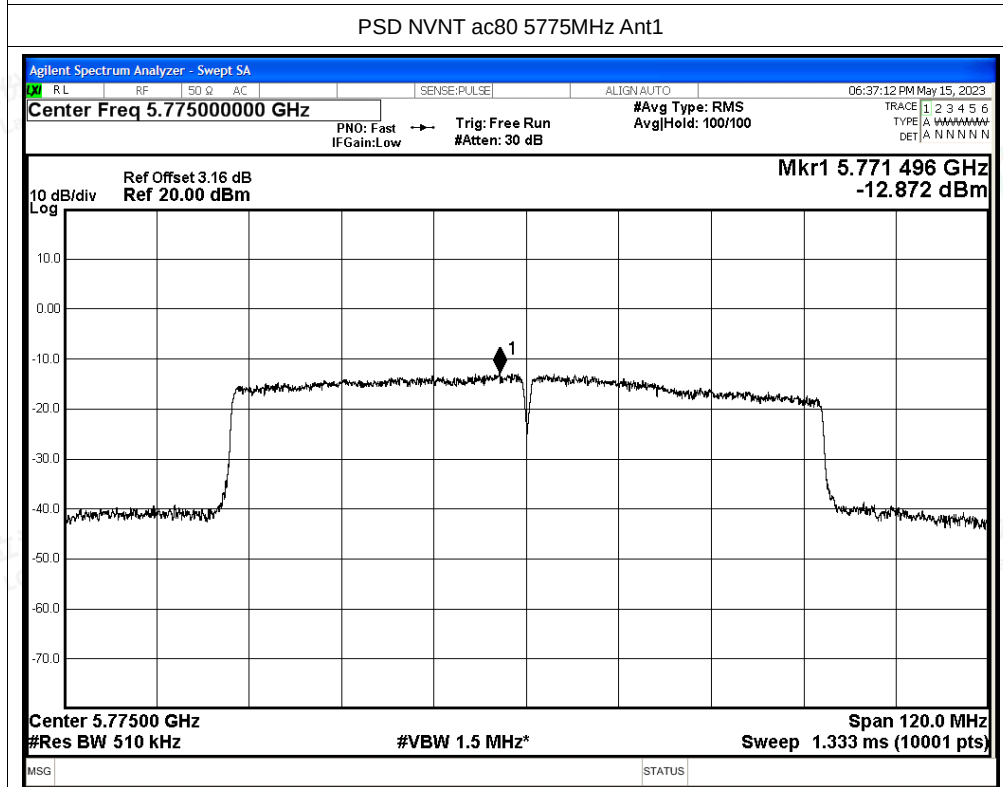

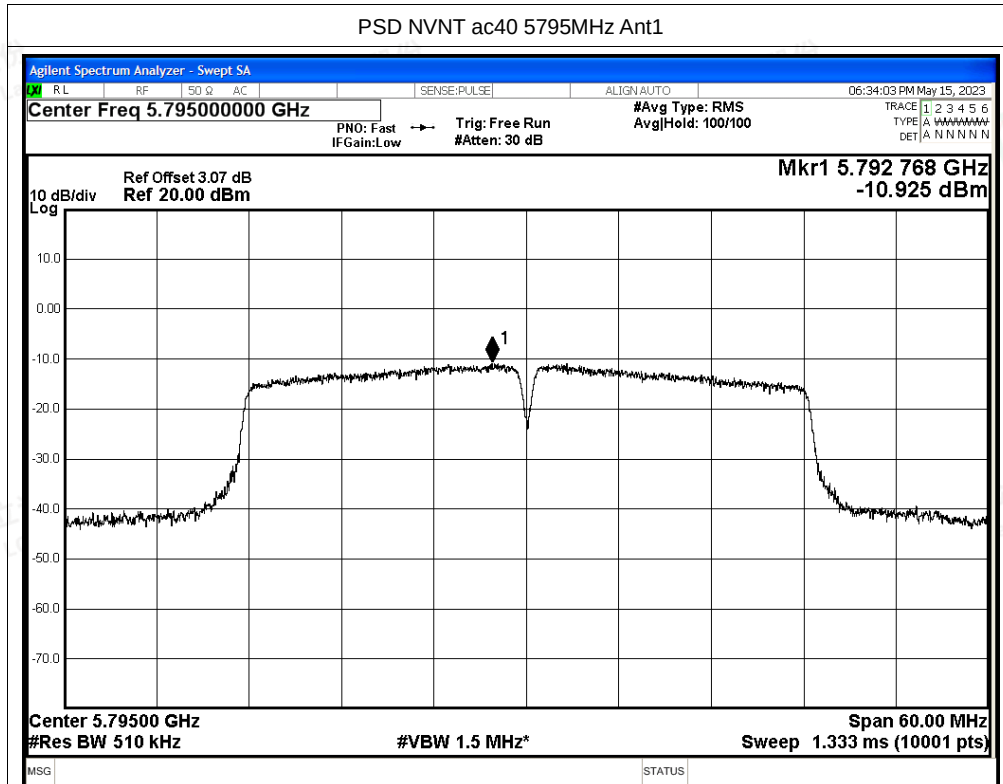



G.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	5650	-49.4	3.3	-46.1	Peak	-27	Pass
NVNT	a	5745	5650	-56.09	3.3	-52.79	Average	-27	Pass
NVNT	a	5745	5700	-47.68	3.3	-44.38	Peak	10	Pass
NVNT	a	5745	5700	-54.83	3.3	-51.53	Average	10	Pass
NVNT	a	5745	5720	-34.98	3.3	-31.68	Peak	15.6	Pass
NVNT	a	5745	5720	-49.21	3.3	-45.91	Average	15.6	Pass
NVNT	a	5745	5725	-36.43	3.3	-33.13	Peak	27	Pass
NVNT	a	5745	5725	-45.82	3.3	-42.52	Average	27	Pass
NVNT	a	5825	5850	-42.88	3.3	-39.58	Peak	27	Pass
NVNT	a	5825	5850	-51.53	3.3	-48.23	Average	27	Pass
NVNT	a	5825	5855	-44.49	3.3	-41.19	Peak	15.6	Pass
NVNT	a	5825	5855	-53.97	3.3	-50.67	Average	15.6	Pass
NVNT	a	5825	5875	-48.46	3.3	-45.16	Peak	10	Pass
NVNT	a	5825	5875	-56.43	3.3	-53.13	Average	10	Pass
NVNT	a	5825	5925	-48.84	3.3	-45.54	Peak	-27	Pass
NVNT	a	5825	5925	-56.7	3.3	-53.4	Average	-27	Pass
NVNT	n20mimo	5745	5650	-48.85	6.31	-42.54	Peak	-27	Pass
NVNT	n20mimo	5745	5650	-56.2	6.31	-49.89	Average	-27	Pass
NVNT	n20mimo	5745	5700	-46.81	6.31	-40.5	Peak	10	Pass
NVNT	n20mimo	5745	5700	-54.71	6.31	-48.4	Average	10	Pass
NVNT	n20mimo	5745	5720	-37.59	6.31	-31.28	Peak	15.6	Pass
NVNT	n20mimo	5745	5720	-48.75	6.31	-42.44	Average	15.6	Pass
NVNT	n20mimo	5745	5725	-34.81	6.31	-28.5	Peak	27	Pass
NVNT	n20mimo	5745	5725	-45.34	6.31	-39.03	Average	27	Pass
NVNT	n20mimo	5825	5850	-42.68	6.31	-36.37	Peak	27	Pass
NVNT	n20mimo	5825	5850	-50.88	6.31	-44.57	Average	27	Pass
NVNT	n20mimo	5825	5855	-45	6.31	-38.69	Peak	15.6	Pass
NVNT	n20mimo	5825	5855	-53.8	6.31	-47.49	Average	15.6	Pass
NVNT	n20mimo	5825	5875	-49.82	6.31	-43.51	Peak	10	Pass
NVNT	n20mimo	5825	5875	-56.46	6.31	-50.15	Average	10	Pass
NVNT	n20mimo	5825	5925	-49.5	6.31	-43.19	Peak	-27	Pass
NVNT	n20mimo	5825	5925	-56.66	6.31	-50.35	Average	-27	Pass
NVNT	n40mimo	5755	5650	-48.29	6.31	-41.98	Peak	-27	Pass
NVNT	n40mimo	5755	5650	-55.68	6.31	-49.37	Average	-27	Pass
NVNT	n40mimo	5755	5700	-40.57	6.31	-34.26	Peak	10	Pass
NVNT	n40mimo	5755	5700	-48.2	6.31	-41.89	Average	10	Pass
NVNT	n40mimo	5755	5720	-30.58	6.31	-24.27	Peak	15.6	Pass
NVNT	n40mimo	5755	5720	-41.23	6.31	-34.92	Average	15.6	Pass
NVNT	n40mimo	5755	5725	-28.44	6.31	-22.13	Peak	27	Pass





NVNT	n40mimo	5755	5725	-39.74	6.31	-33.43	Average	27	Pass
NVNT	n40mimo	5795	5850	-44.97	6.31	-38.66	Peak	27	Pass
NVNT	n40mimo	5795	5850	-52.37	6.31	-46.06	Average	27	Pass
NVNT	n40mimo	5795	5855	-46.38	6.31	-40.07	Peak	15.6	Pass
NVNT	n40mimo	5795	5855	-53.62	6.31	-47.31	Average	15.6	Pass
NVNT	n40mimo	5795	5875	-48.77	6.31	-42.46	Peak	10	Pass
NVNT	n40mimo	5795	5875	-55.6	6.31	-49.29	Average	10	Pass
NVNT	n40mimo	5795	5925	-48.93	6.31	-42.62	Peak	-27	Pass
NVNT	n40mimo	5795	5925	-56.37	6.31	-50.06	Average	-27	Pass
NVNT	ac20mimo	5745	5650	-49.37	6.31	-43.06	Peak	-27	Pass
NVNT	ac20mimo	5745	5650	-56.04	6.31	-49.73	Average	-27	Pass
NVNT	ac20mimo	5745	5700	-44.57	6.31	-38.26	Peak	10	Pass
NVNT	ac20mimo	5745	5700	-54.88	6.31	-48.57	Average	10	Pass
NVNT	ac20mimo	5745	5720	-36.96	6.31	-30.65	Peak	15.6	Pass
NVNT	ac20mimo	5745	5720	-50.26	6.31	-43.95	Average	15.6	Pass
NVNT	ac20mimo	5745	5725	-32.22	6.31	-25.91	Peak	27	Pass
NVNT	ac20mimo	5745	5725	-46.97	6.31	-40.66	Average	27	Pass
NVNT	ac20mimo	5825	5850	-40.81	6.31	-34.5	Peak	27	Pass
NVNT	ac20mimo	5825	5850	-51.88	6.31	-45.57	Average	27	Pass
NVNT	ac20mimo	5825	5855	-45.28	6.31	-38.97	Peak	15.6	Pass
NVNT	ac20mimo	5825	5855	-54.48	6.31	-48.17	Average	15.6	Pass
NVNT	ac20mimo	5825	5875	-51	6.31	-44.69	Peak	10	Pass
NVNT	ac20mimo	5825	5875	-56.4	6.31	-50.09	Average	10	Pass
NVNT	ac20mimo	5825	5925	-49.86	6.31	-43.55	Peak	-27	Pass
NVNT	ac20mimo	5825	5925	-56.69	6.31	-50.38	Average	-27	Pass
NVNT	ac40mimo	5755	5650	-48.63	6.31	-42.32	Peak	-27	Pass
NVNT	ac40mimo	5755	5650	-55.65	6.31	-49.34	Average	-27	Pass
NVNT	ac40mimo	5755	5700	-40.04	6.31	-33.73	Peak	10	Pass
NVNT	ac40mimo	5755	5700	-48.23	6.31	-41.92	Average	10	Pass
NVNT	ac40mimo	5755	5720	-28.58	6.31	-22.27	Peak	15.6	Pass
NVNT	ac40mimo	5755	5720	-40.83	6.31	-34.52	Average	15.6	Pass
NVNT	ac40mimo	5755	5725	-29.29	6.31	-22.98	Peak	27	Pass
NVNT	ac40mimo	5755	5725	-40.3	6.31	-33.99	Average	27	Pass
NVNT	ac40mimo	5795	5850	-46.74	6.31	-40.43	Peak	27	Pass
NVNT	ac40mimo	5795	5850	-52.83	6.31	-46.52	Average	27	Pass
NVNT	ac40mimo	5795	5855	-43.56	6.31	-37.25	Peak	15.6	Pass
NVNT	ac40mimo	5795	5855	-53.87	6.31	-47.56	Average	15.6	Pass
NVNT	ac40mimo	5795	5875	-49	6.31	-42.69	Peak	10	Pass
NVNT	ac40mimo	5795	5875	-55.62	6.31	-49.31	Average	10	Pass
NVNT	ac40mimo	5795	5925	-49.38	6.31	-43.07	Peak	-27	Pass
NVNT	ac40mimo	5795	5925	-56.37	6.31	-50.06	Average	-27	Pass
NVNT	ac80mimo	5775	5650	-44.34	6.31	-38.03	Peak	-27	Pass
NVNT	ac80mimo	5775	5650	-50.5	6.31	-44.19	Average	-27	Pass






NVNT	ac80mimo	5775	5700	-33.5	6.31	-27.19	Peak	10	Pass
NVNT	ac80mimo	5775	5700	-41.82	6.31	-35.51	Average	10	Pass
NVNT	ac80mimo	5775	5720	-33.21	6.31	-26.9	Peak	15.6	Pass
NVNT	ac80mimo	5775	5720	-39.88	6.31	-33.57	Average	15.6	Pass
NVNT	ac80mimo	5775	5725	-32.86	6.31	-26.55	Peak	27	Pass
NVNT	ac80mimo	5775	5725	-39.84	6.31	-33.53	Average	27	Pass
NVNT	ac80mimo	5775	5850	-34.58	6.31	-28.27	Peak	27	Pass
NVNT	ac80mimo	5775	5850	-42.11	6.31	-35.8	Average	27	Pass
NVNT	ac80mimo	5775	5855	-34.41	6.31	-28.1	Peak	15.6	Pass
NVNT	ac80mimo	5775	5855	-42.67	6.31	-36.36	Average	15.6	Pass
NVNT	ac80mimo	5775	5875	-40.14	6.31	-33.83	Peak	10	Pass
NVNT	ac80mimo	5775	5875	-48.3	6.31	-41.99	Average	10	Pass
NVNT	ac80mimo	5775	5925	-48.46	6.31	-42.15	Peak	-27	Pass
NVNT	ac80mimo	5775	5925	-54.83	6.31	-48.52	Average	-27	Pass






Test Graphs

Restrict Band NVNT a 5745MHz Ant0 Peak

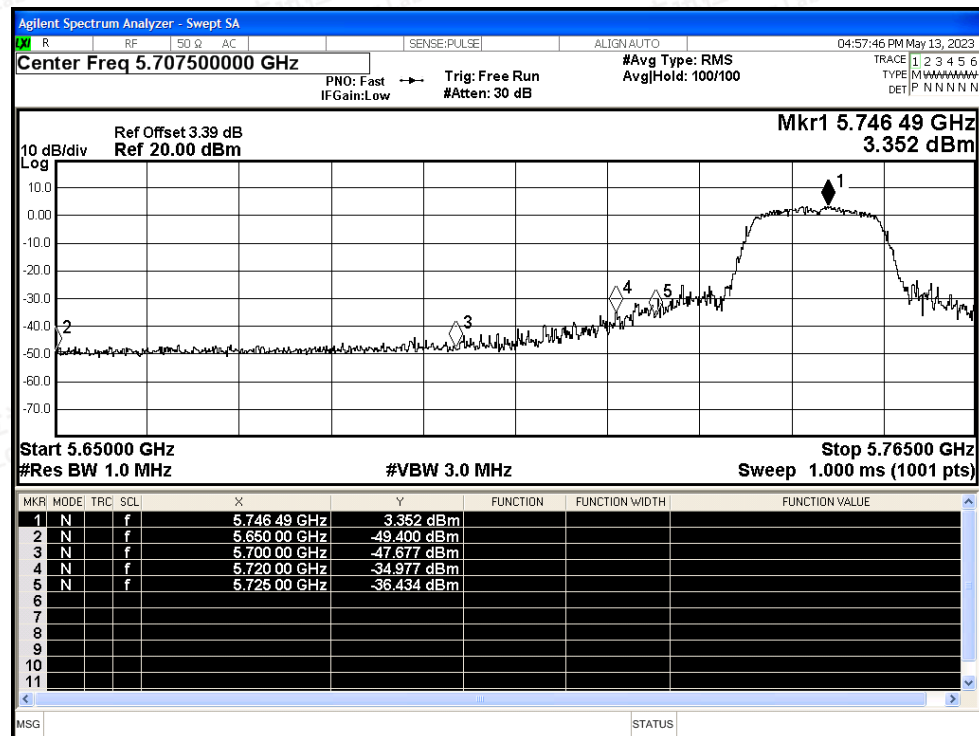

Restrict Band NVNT a 5745MHz Ant0 Average


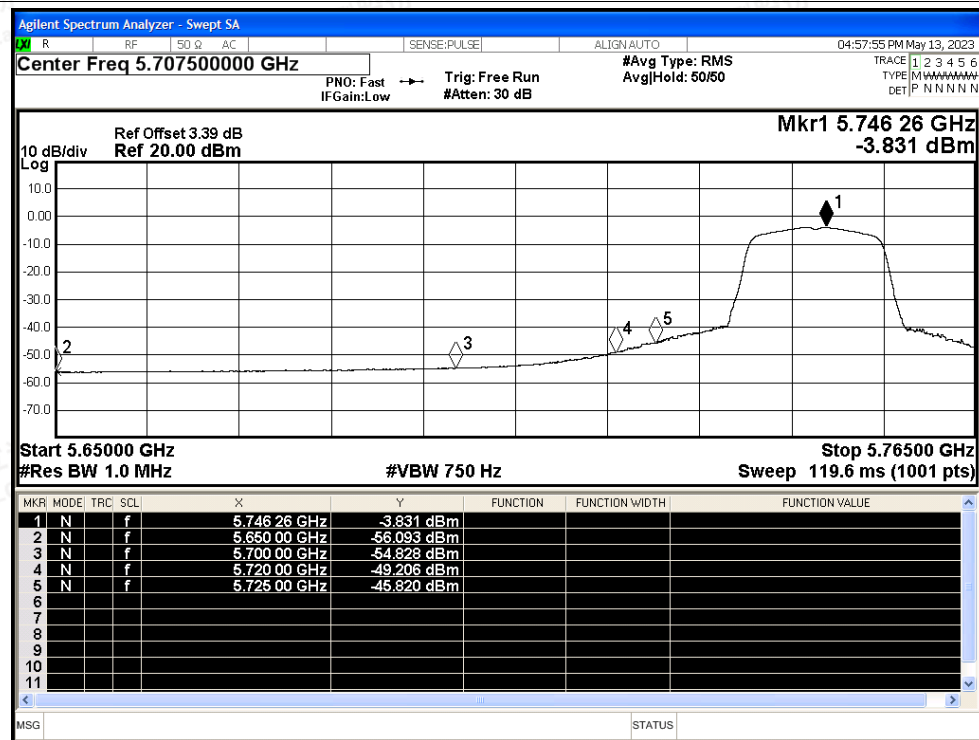


Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China



Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com



Scan code to check authenticity

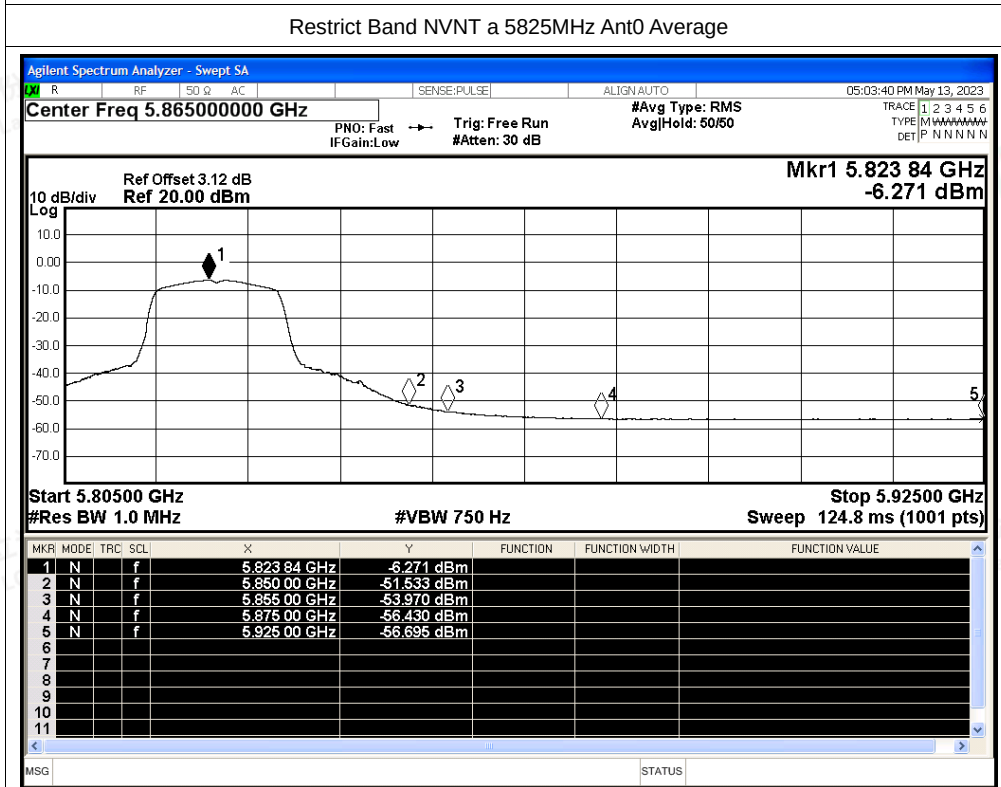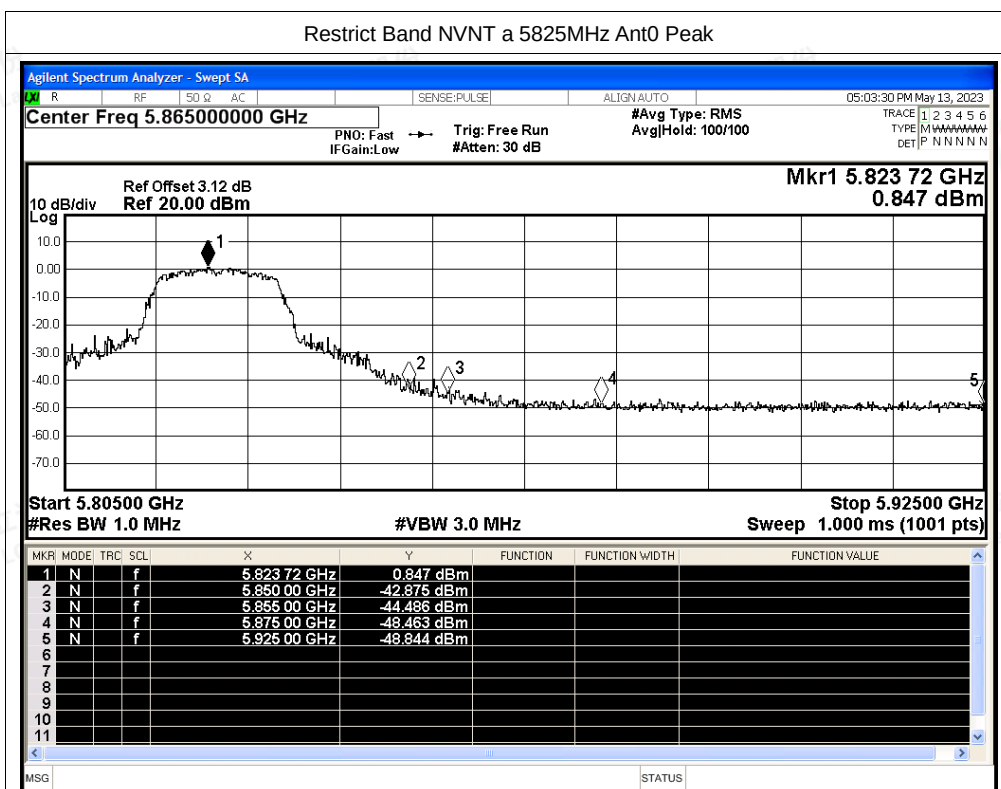

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

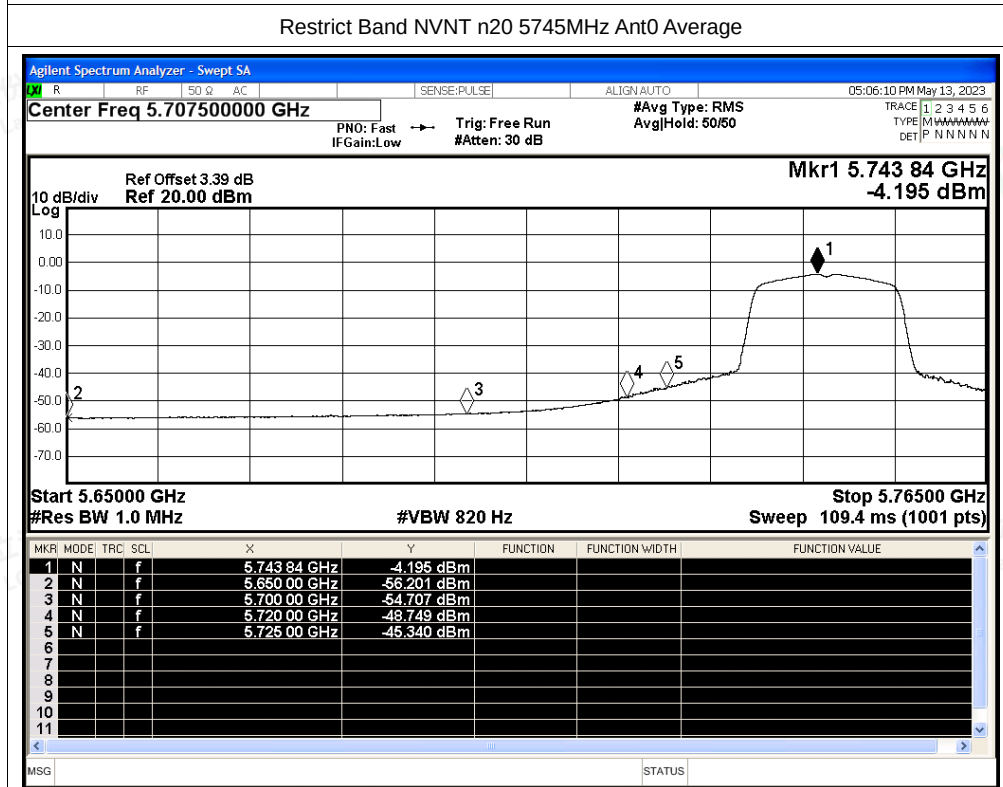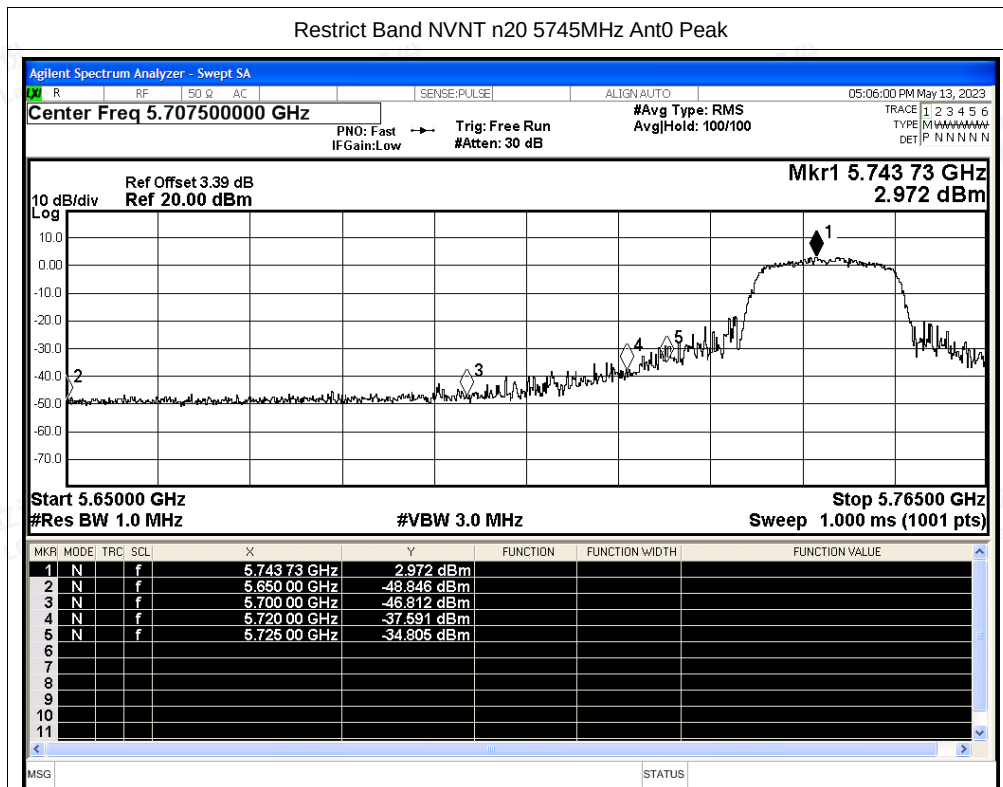


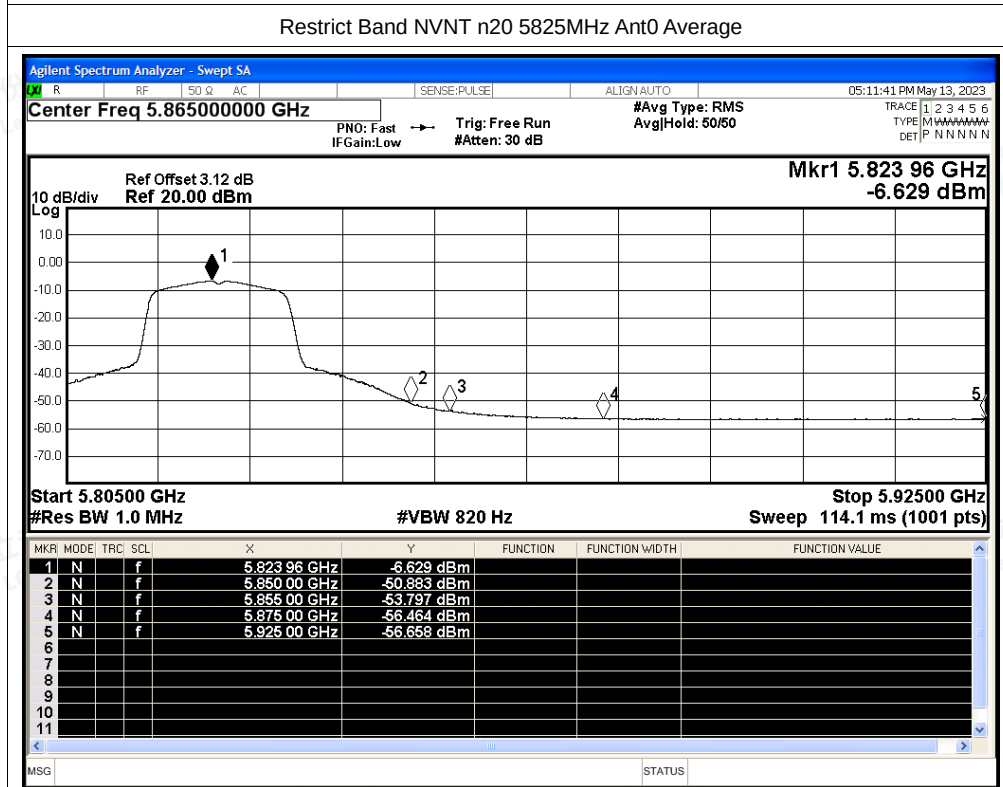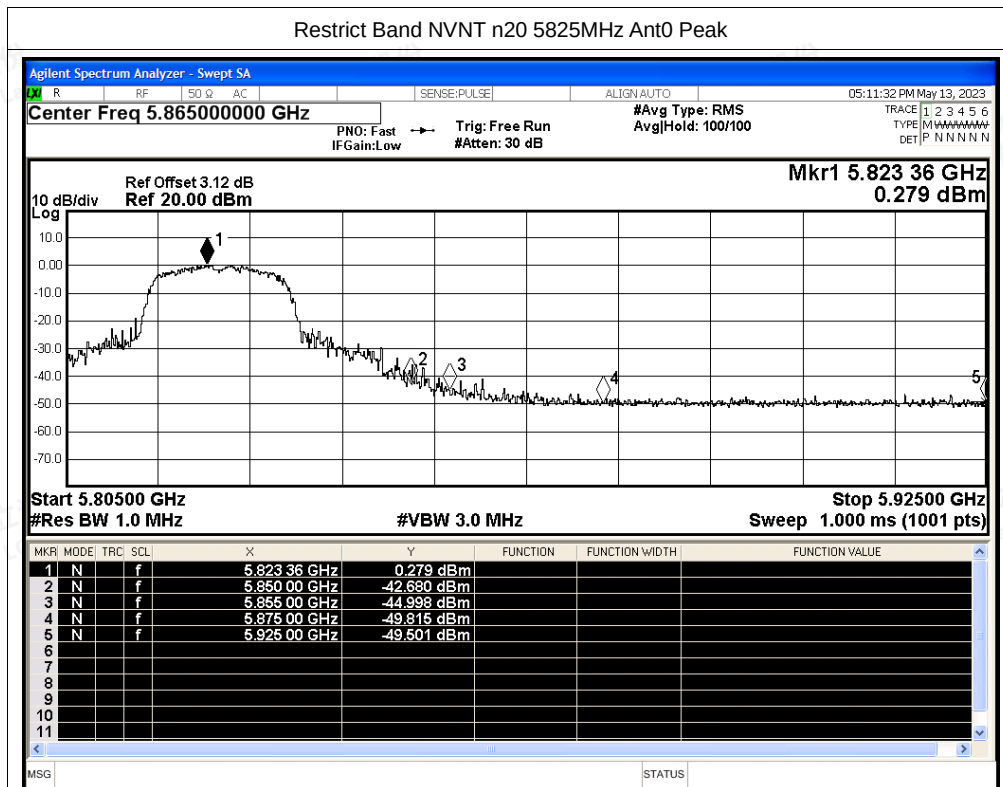

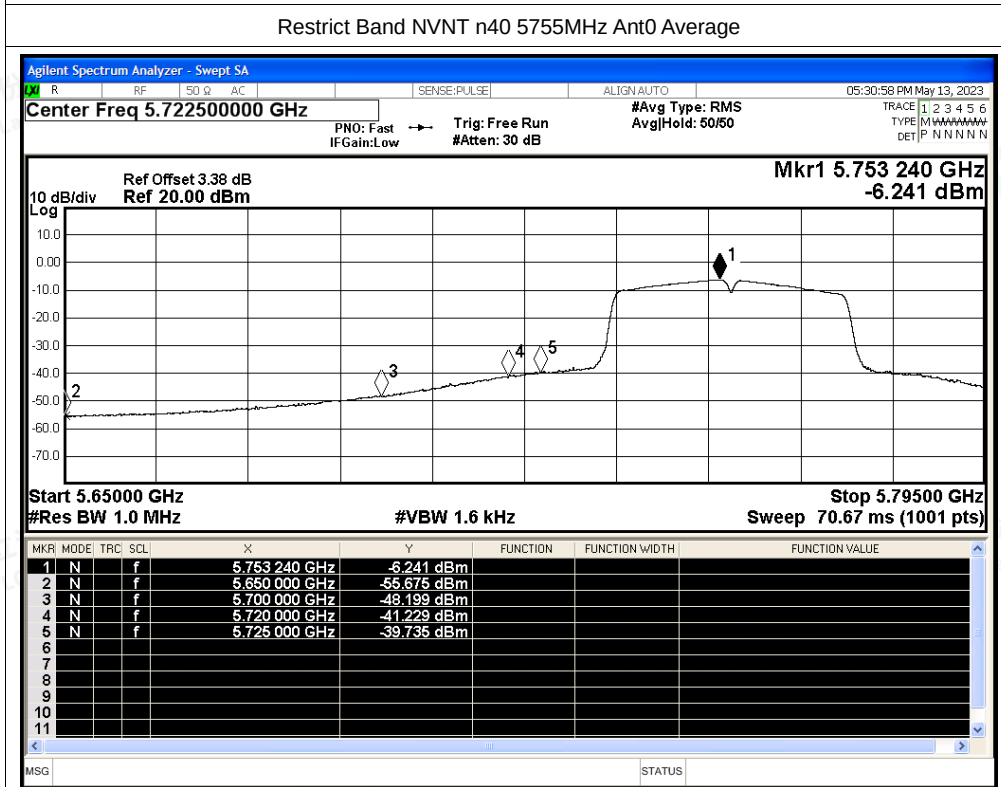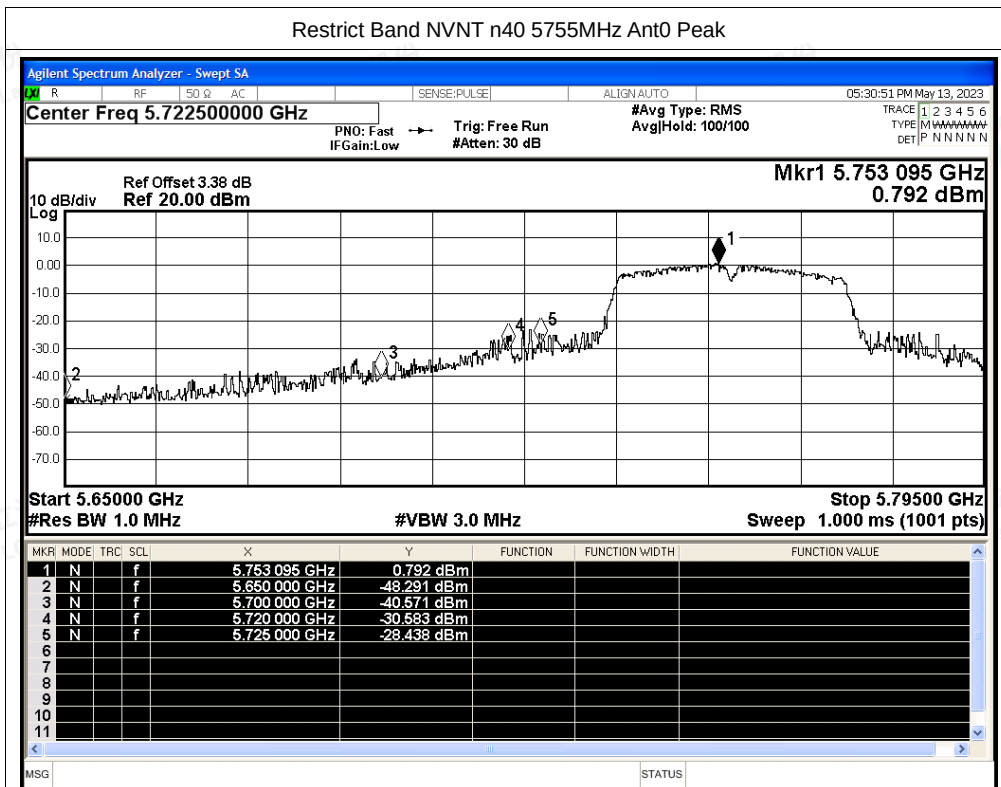








Restrict Band NVNT n40 5795MHz Ant0 Peak


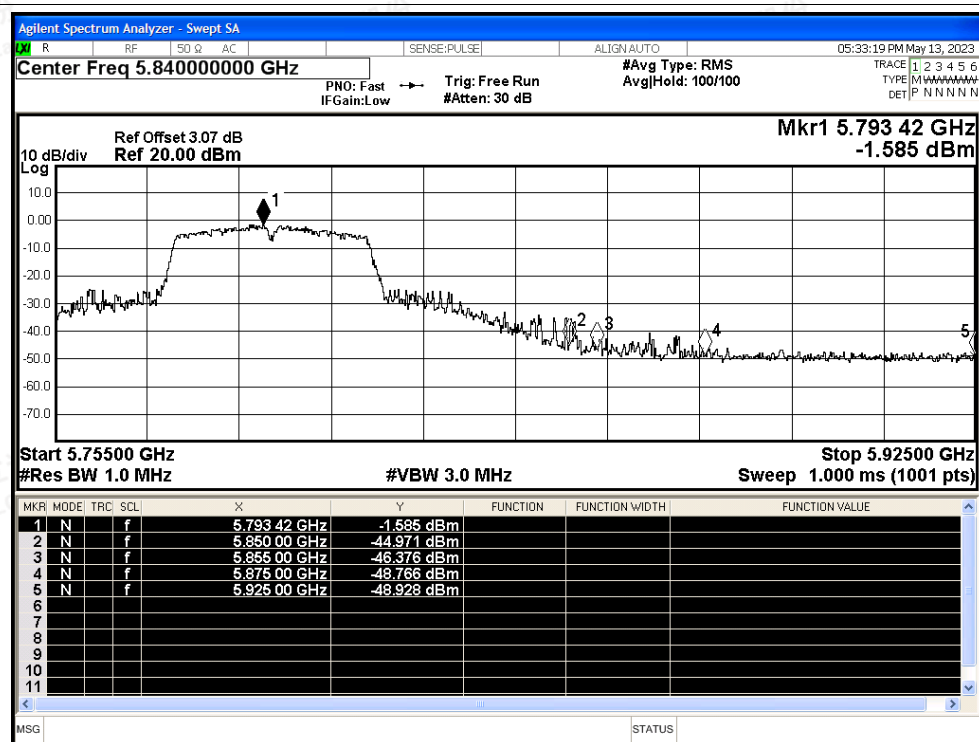




Restrict Band NVNT n40 5795MHz Ant0 Average


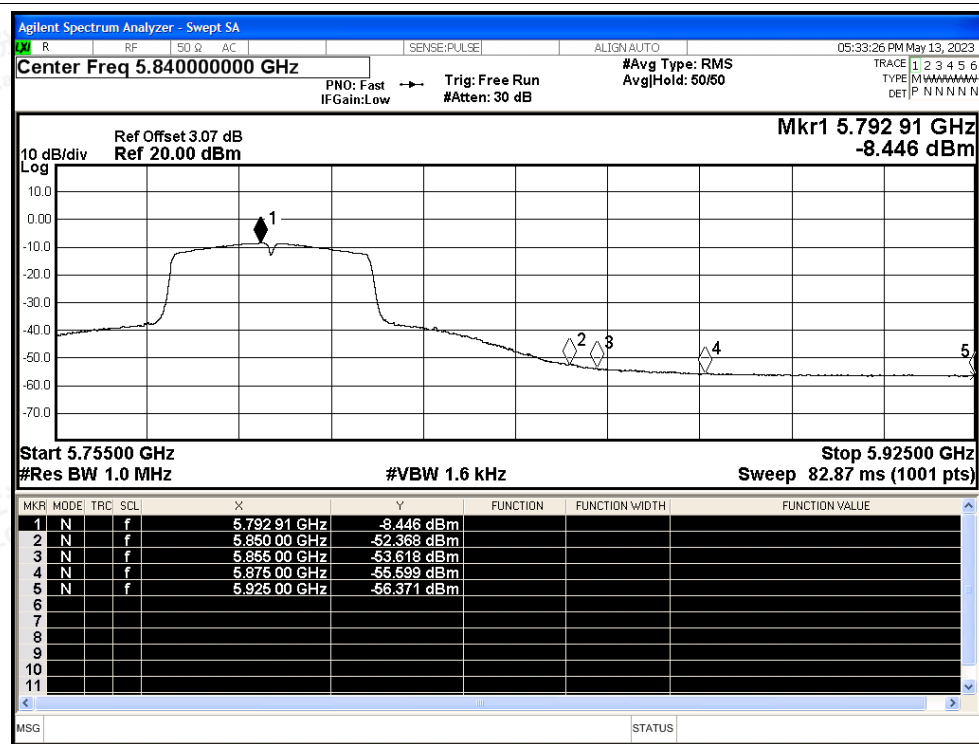


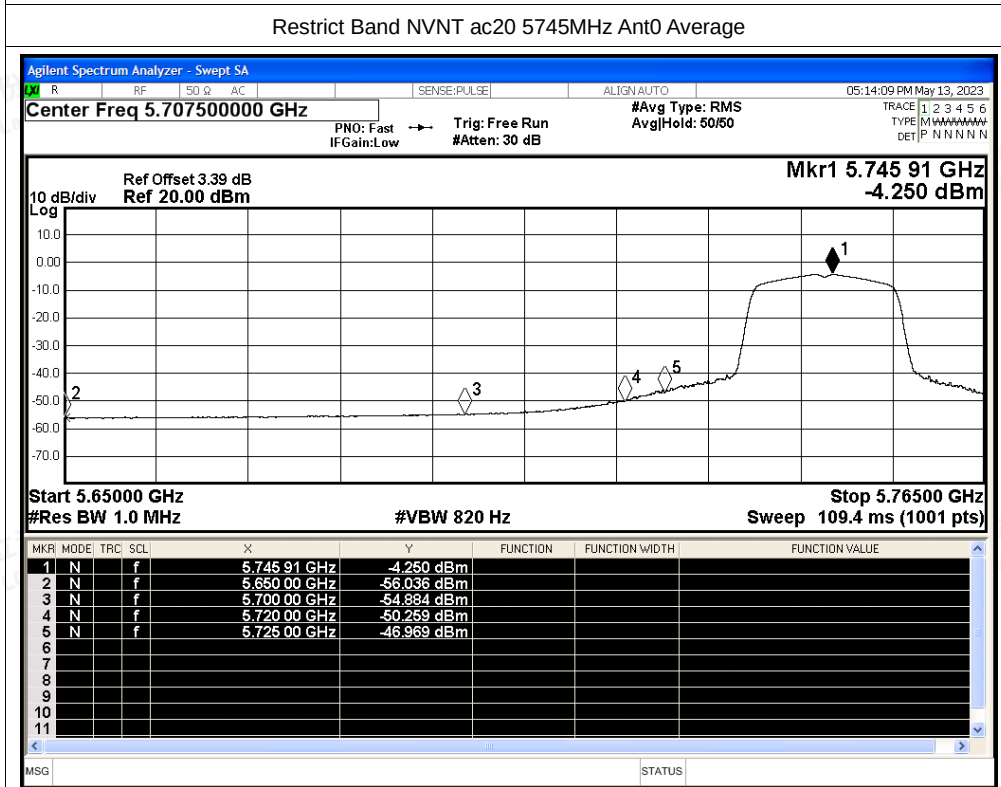
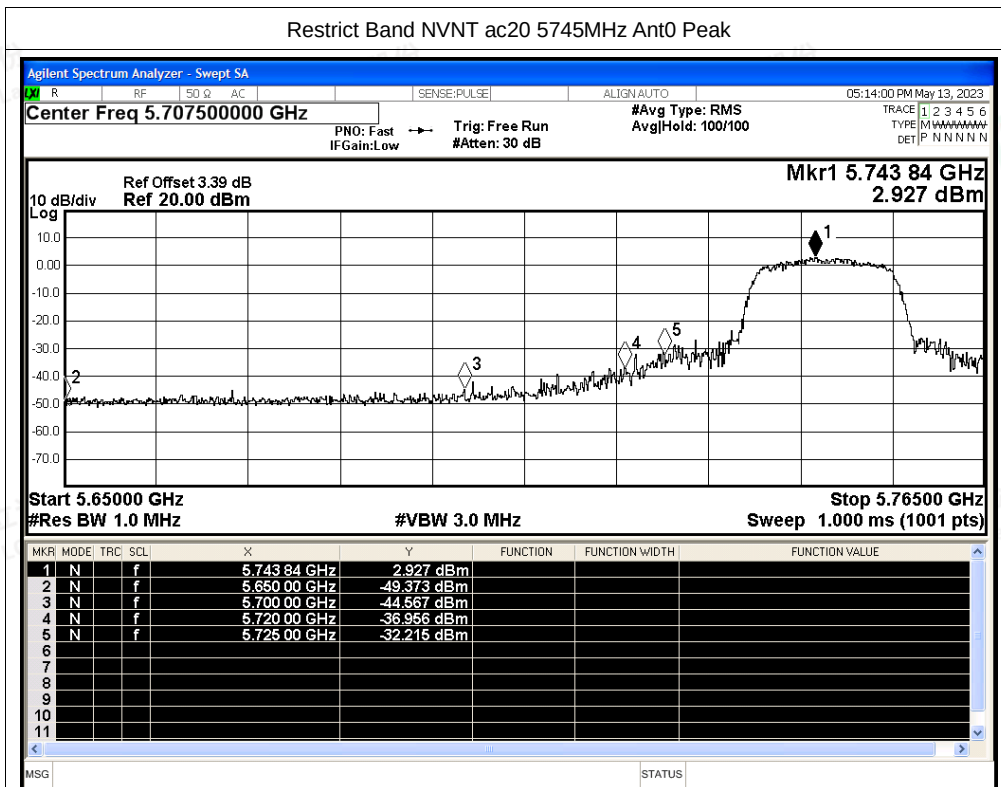


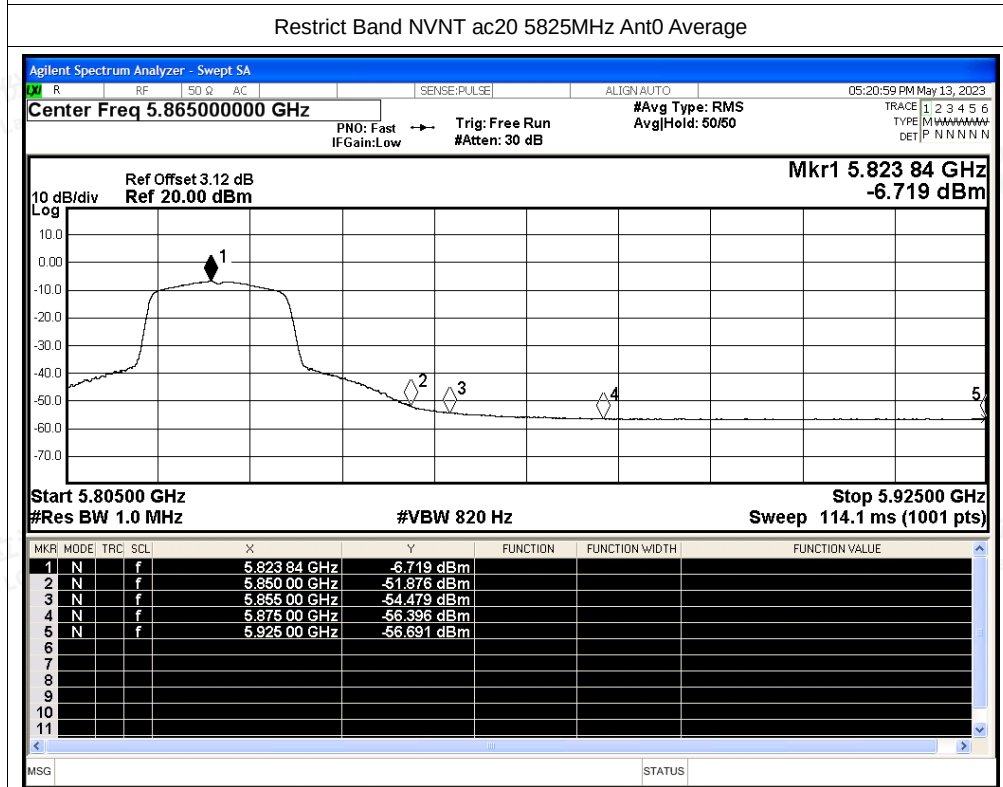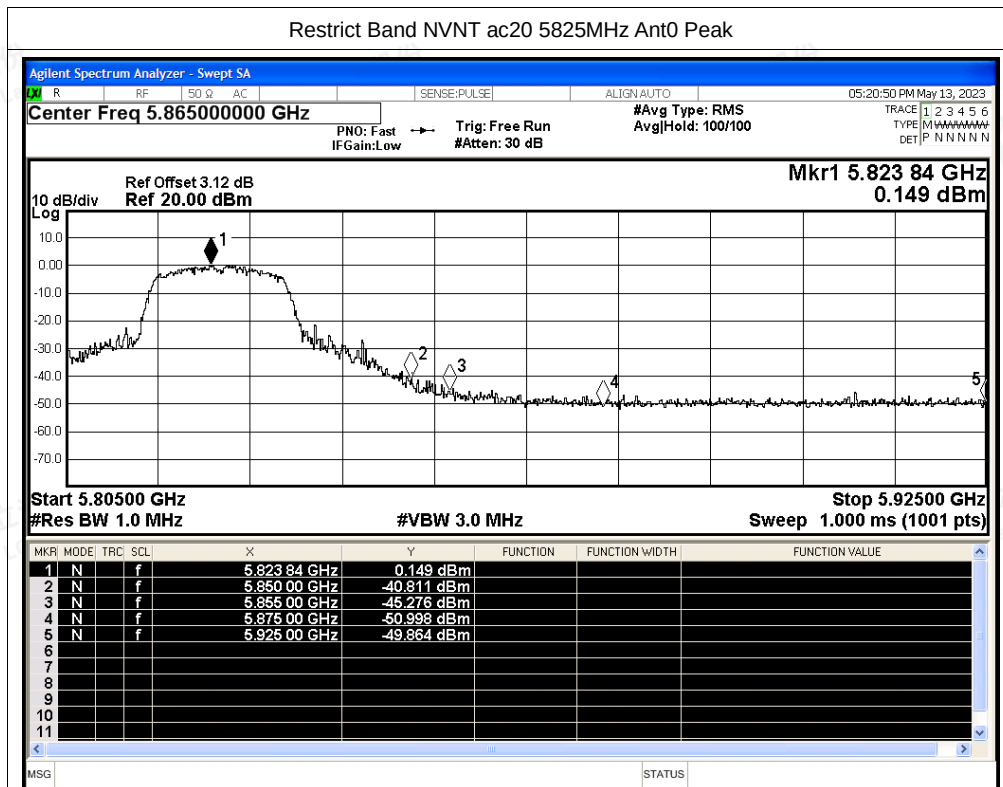

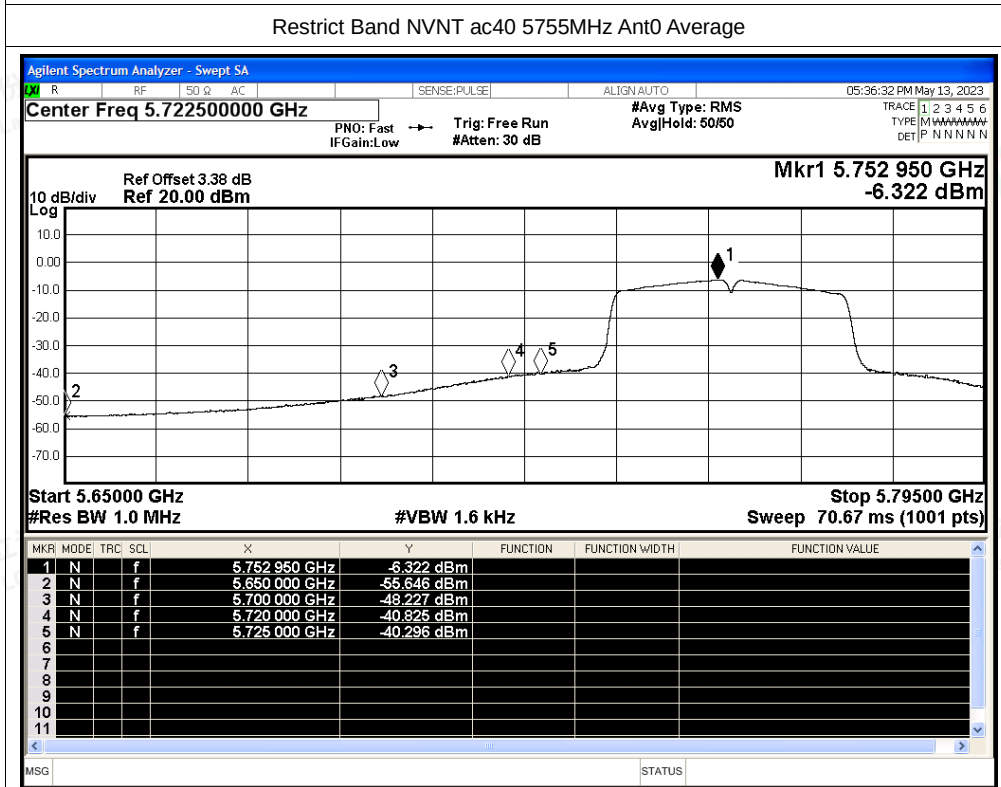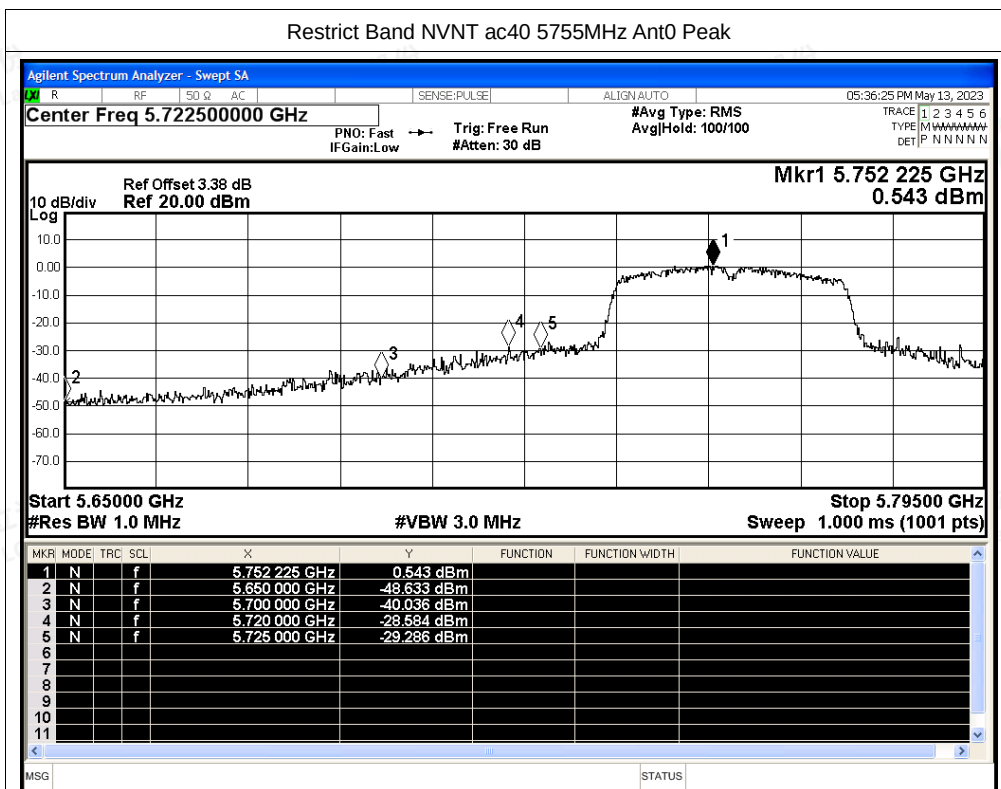

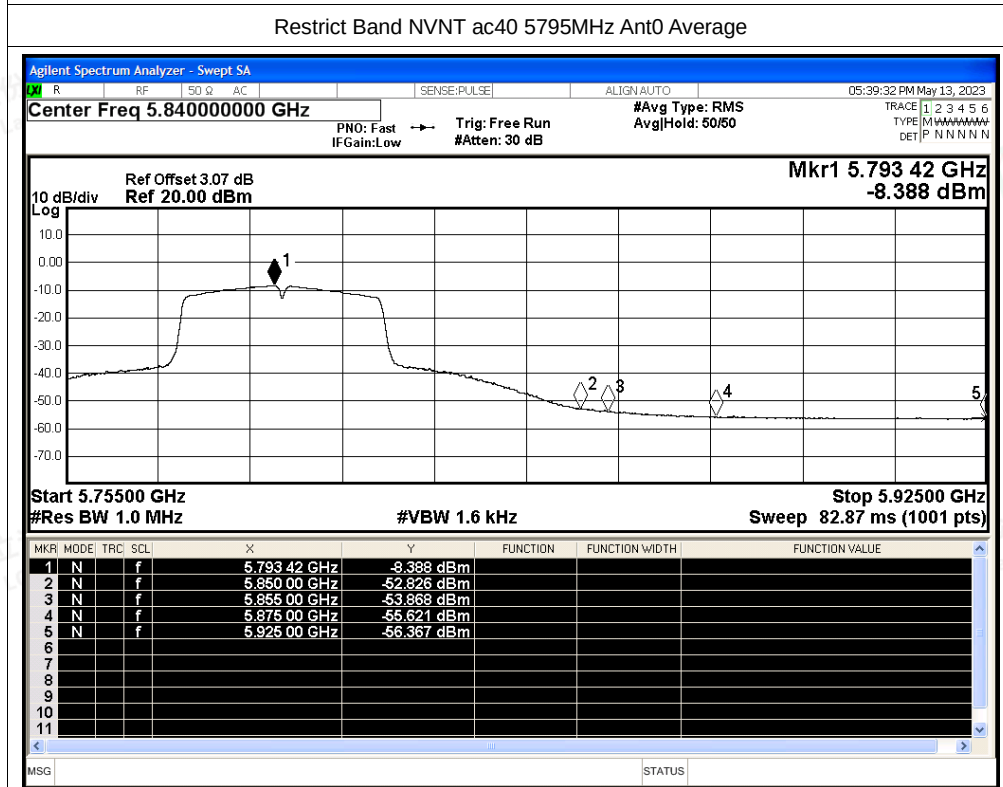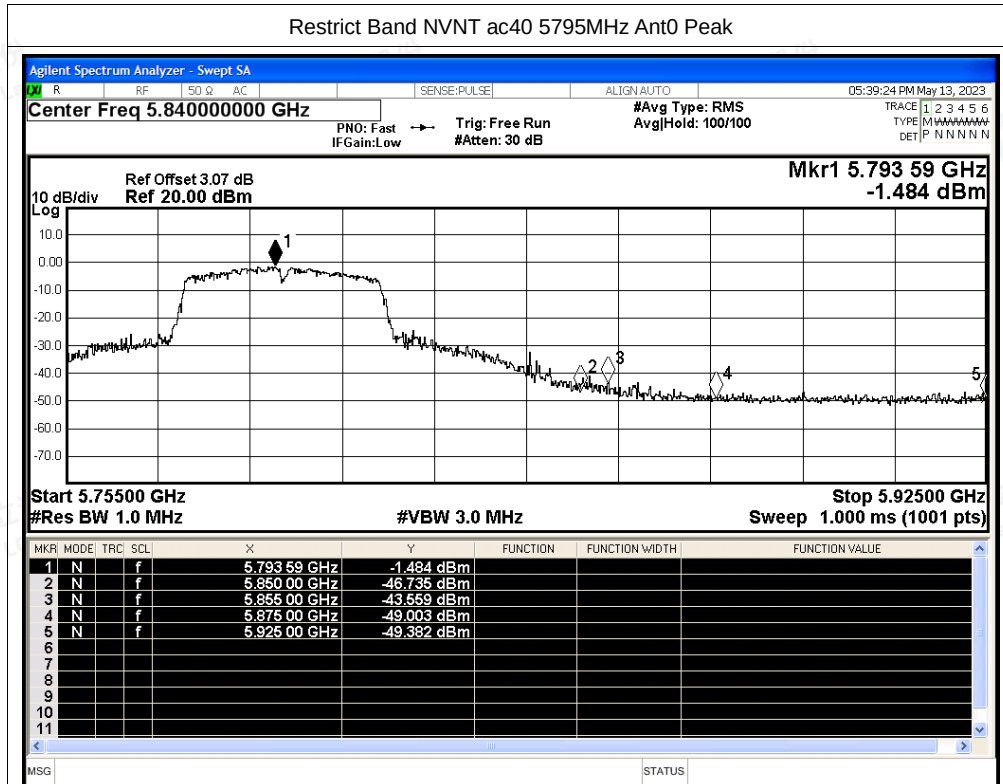

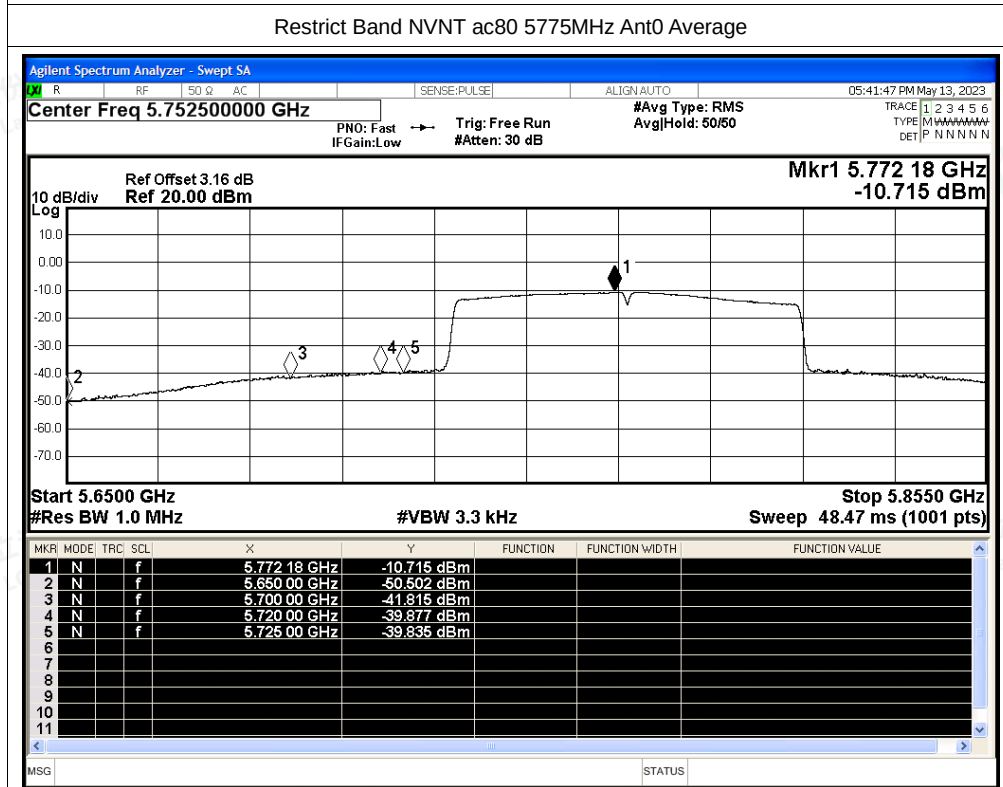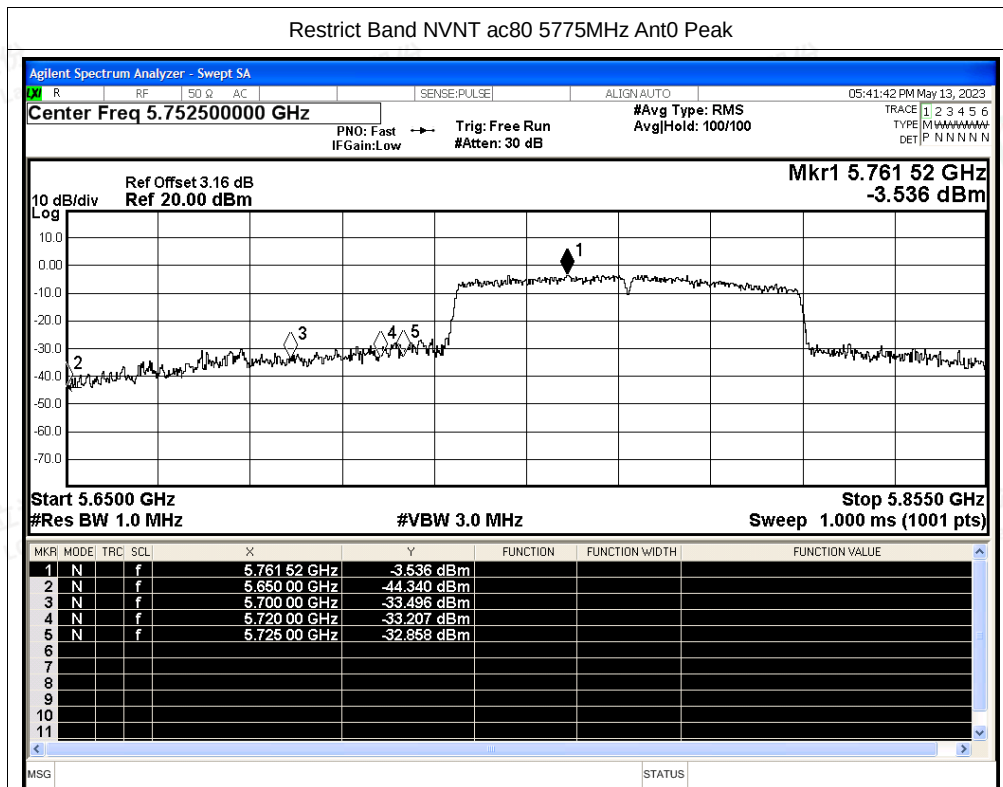

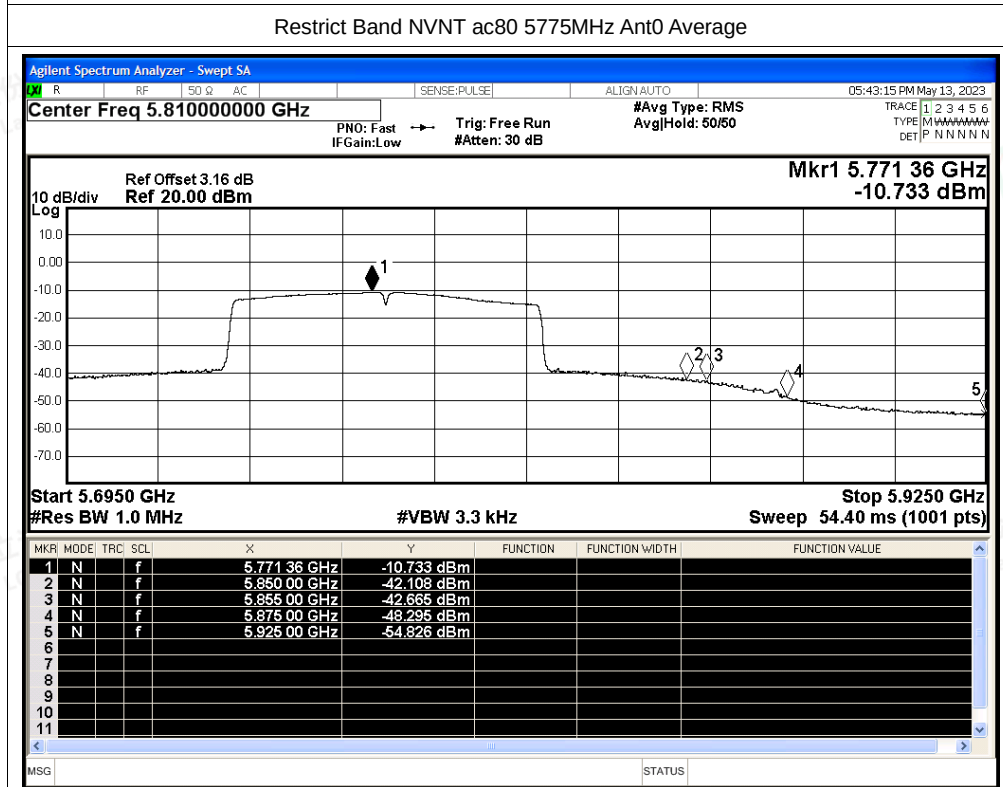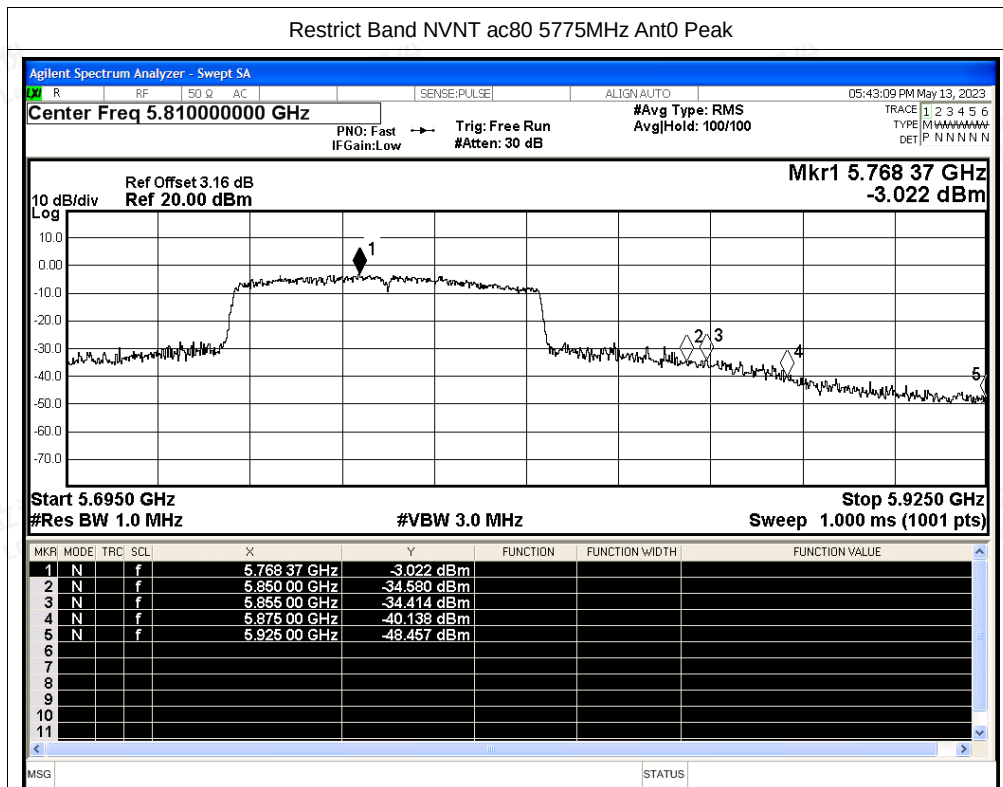



G.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	n40	5755	Ant0	5754.96	-40000	-6.95	25	Pass
NVNT	n40	5795	Ant0	5795.04	40000	6.9	25	Pass
NVNT	ac20	5745	Ant0	5745.02	20000	3.48	25	Pass
NVNT	ac20	5785	Ant0	5785	0	0	25	Pass
NVNT	ac20	5825	Ant0	5824.96	-40000	-6.87	25	Pass
NVNT	ac40	5755	Ant0	5755	0	0	25	Pass
NVNT	ac40	5795	Ant0	5795	0	0	25	Pass
NVNT	ac80	5775	Ant0	5775	0	0	25	Pass





Test Graphs

Freq. Stability NVNT n40 5755MHz Ant0

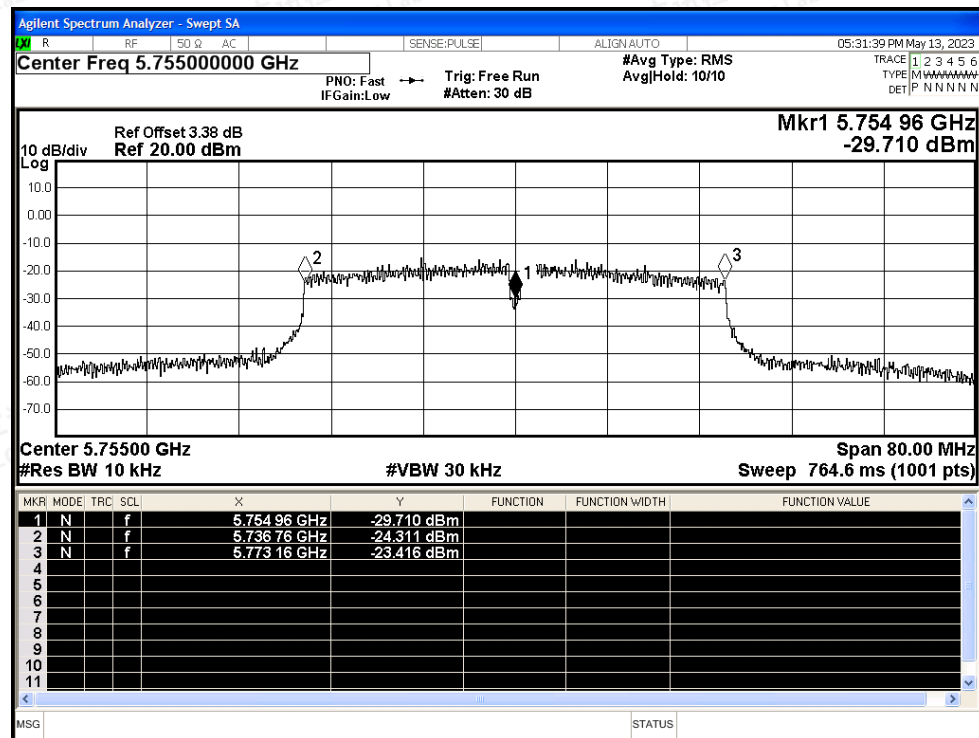

Freq. Stability NVNT n40 5795MHz Ant0

