

User Guide



Wireless N300 Universal Range Extender

Copyright Statement

Tenda is the registered trademark of Shenzhen Tenda Technology Co., Ltd. All the products and product names mentioned herein are the trademarks or registered trademarks of their respective holders. Copyright of the whole product as integration, including its accessories and software, belongs to Shenzhen Tenda Technology Co., Ltd. No part of this publication can be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the prior written permission of Shenzhen Tenda Technology Co., Ltd. If you would like to know more about our product information, please visit our website at <http://www.tendacn.com>.

Disclaimer of Warranties

Pictures, images and product specifications herein are for references only. To improve internal design, operational function, and/or reliability, Tenda reserves the right to make changes to the products described in this document without obligation to notify any person or organization of such revisions or changes. Tenda does not assume any liability that may occur due to the use or application of, the product or circuit layout(s) described herein. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information and recommendations in this document do not constitute the warranty of any kind, express or implied.

Preface

Thank you for purchasing Tenda wireless range extender. This guide applies to A300/A301. As they share many similarities in many aspects, here we take A300 for example. Before configuring it, please read this user guide carefully.

Conventions



Note: Information you need to pay attention to.



Tip: Additional information to help you save time or resources.

Technical Support

Website: <http://www.tendacn.com>

Technical Support: support@tenda.com.cn

Telephone: (86 755) 2765 7180

Email: sales@tenda.com.cn

Skype: tendasz

YouTube: Tendasz1999

Contents

Chapter 1 Product Overview	1
1.1 Package Contents.....	1
1.2 Getting to Know Your Wireless Range Extender	1
LED	2
Port & Button	2
Label	2
1.3 Position Your Wireless Range Extender	2
Chapter 2 Internet Connection Setup	4
2.1 Hardware Installation	4
2.2 Configure the Range Extender	4
Method One: Setup by Web-based Management Page	4
Method Two: Setup by Button	7
2.3 Internet Connection Setup.....	8
Configure IP	8
Web Login	8
2.4 Verify Internet Connection	10
2.5 Join Your Wireless Connection	11
Win7 OS	11
Windows XP OS	13
Chapter 3 Advanced Settings	15
3.1 Wizard.....	15
3.2 System Status	15
3.3 Wireless	16
3.3.1 Wireless Basic Settings.....	16
3.3.2 Wireless Security	17
3.3.3 Access Control	18
3.3.4 Wireless Connection Status.....	20
3.4 Tools.....	20
3.4.1 Time Settings	20
3.4.2 Upgrade	21
3.4.3 Backup/Restore	22
3.4.4 Restore to Factory Default	22
3.4.5 Change Password	23
3.4.6 Syslog	24
3.4.7 Reboot	24
Chapter 4 Appendix	25
Appendix 1 Configure IP	25
Win7 OS	25
Windows XP OS	27

Appendix 2 Default Settings	29
Appendix 3 FAQs.....	30
Appendix 4 Remove Wireless Network from your PC.....	31
Appendix 5 Safety and Emission Statement	33

Chapter 1 Product Overview


1.1 Package Contents

Unpack the package carefully and verify the following items are included:

- Wireless Range Extender
- Install Guide
- Ethernet Cable
- Resource CD

If any of the above items are incorrect, missing, or damaged, please contact your Tenda reseller for immediate replacement.

1.2 Getting to Know Your Wireless Range Extender

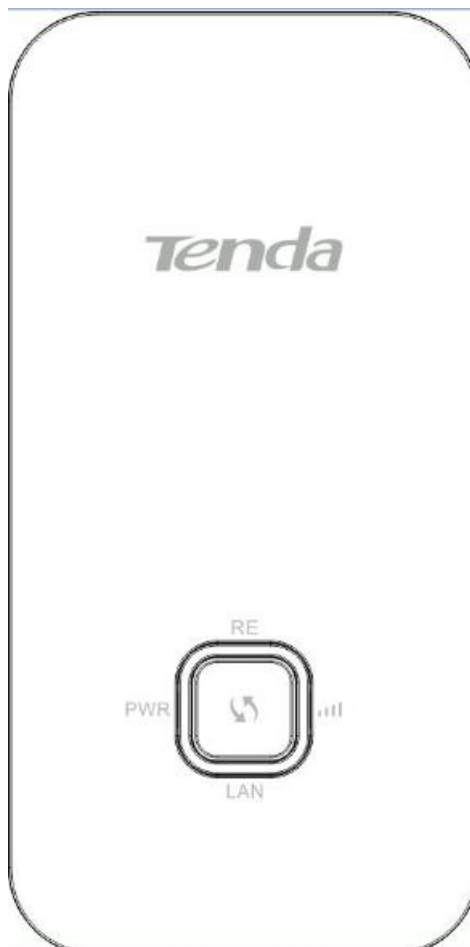


LED

LED	Status	Description
PWR	Solid	Proper connection to power supply
RE(Range Extender)	Solid	Bridged successfully
	Blinking	Negotiating key
	Off	Not bridged
Signal Strength	Solid Green	Strong signal
	Solid Orange	Weak signal
	Off	Not bridged
LAN	Solid	Proper connection is established on the LAN port.
	Blinking	Data transmitting on the LAN port

Port & Button

- 1 **LAN:** Port for connecting to a PC, switch or router.
- 2 **RESET:** Press it for over 7 seconds until the PWR LED is no longer blinking to restore factory default settings. For default settings, please refer to [Appendix 2](#).
- 3 : Range Extender button for wireless extension.

Label

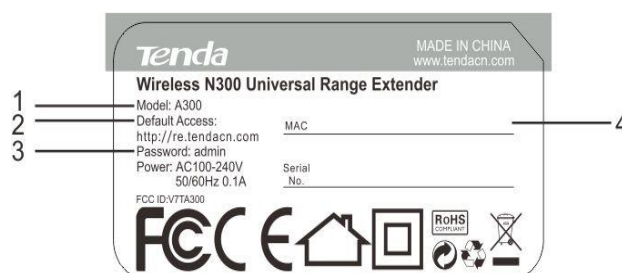

You can acquire the following information from Label:

1. **Model:** Displays the product model.
2. **Default Access:** The default web login is <http://re.tendacn.com>.
3. **Password:** The default password is admin.
4. **MAC:** Displays the device's default MAC address. By default, this device's wireless network name (SSID) is Tenda_XXXXXX, where XXXXXX is the last six characters of the MAC address.

1.3 Position Your Wireless Range Extender

For best performance, follow rules below to place your wireless range extender:

The Best Way is Half-Way

Generally, the ideal location for the range extender is half-way between your wireless router and your Wi-Fi enabled devices. If that is not impossible, placing the range extender closer to your wireless router will ensure better performance.

**Solid Green LED**

Choose a location that lights up the green signal strength LED .

Less Interference = More Stability

Try to position your range extender away from electrical devices that are potential sources of interference, such as ceiling fans, home security systems, microwaves, PCs, refrigerators, the base of a cordless phone, or a 2.4 GHz cordless phone.


Less Obstacles = Better Performance

Try to choose a location that minimizes obstacles between the range extender and your wireless router. Open corridors and other spacious locations will typically provide better conditions for performance than a crowded room.


Chapter 2 Internet Connection Setup

2.1 Hardware Installation

1. Position the wireless range extender close to a wireless router or access point and then plug it into a power outlet nearby.

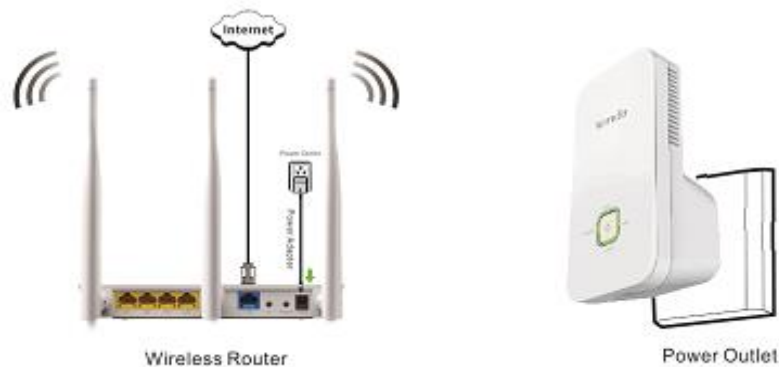

2. Connect your Wireless Clients (such as notebook, pad, smart phone, etc.) to the range extender wirelessly. Or you can connect your PC to the sole LAN port of Range Extender with an Ethernet cable.

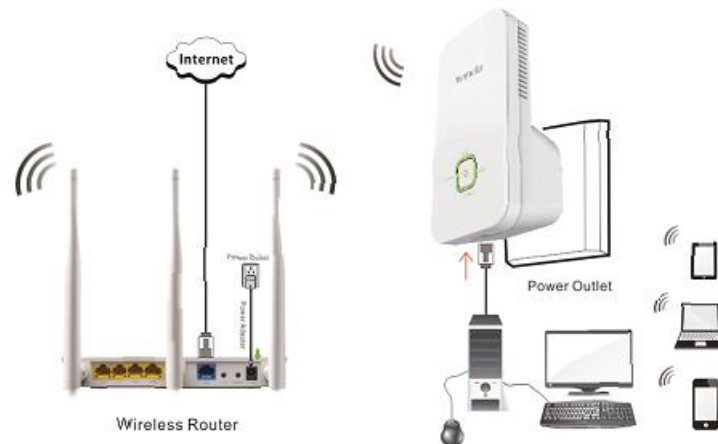

2.2 Configure the Range Extender

Method One: Setup by Web-based Management Page

Application example:

Assuming the remote wireless router has the following information:

SSID: Tenda_881218

Security Mode: WPA-PSK


Cipher Type: AES

Security Key: 12345678


LAN IP Address: 192.168.0.1

Configuration procedures:


1. On the Wizard screen, click **Open Scan**, select the remote router's wireless network (SSID), say Tenda_881218, click **OK**.

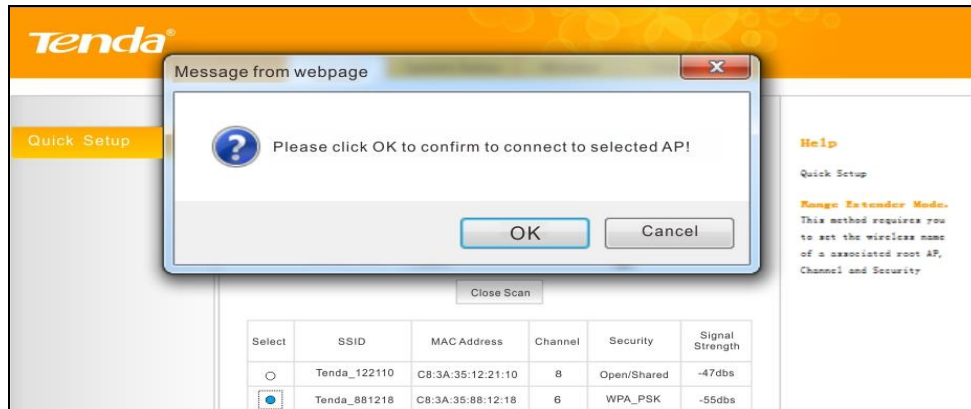


2. Enter the remote device's security key and click **Save**;

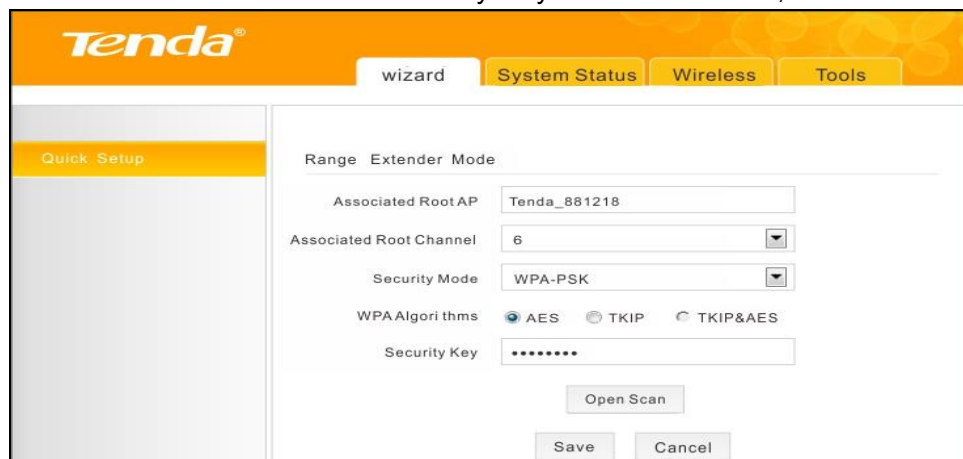

3. In the appearing dialogue box click **OK**;

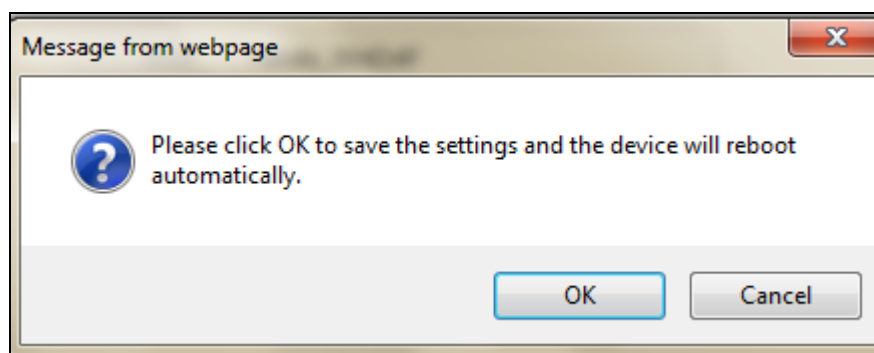

- Click **System Status** to check the bridge status. When the bridge status displays **Connected**, bridged successfully.

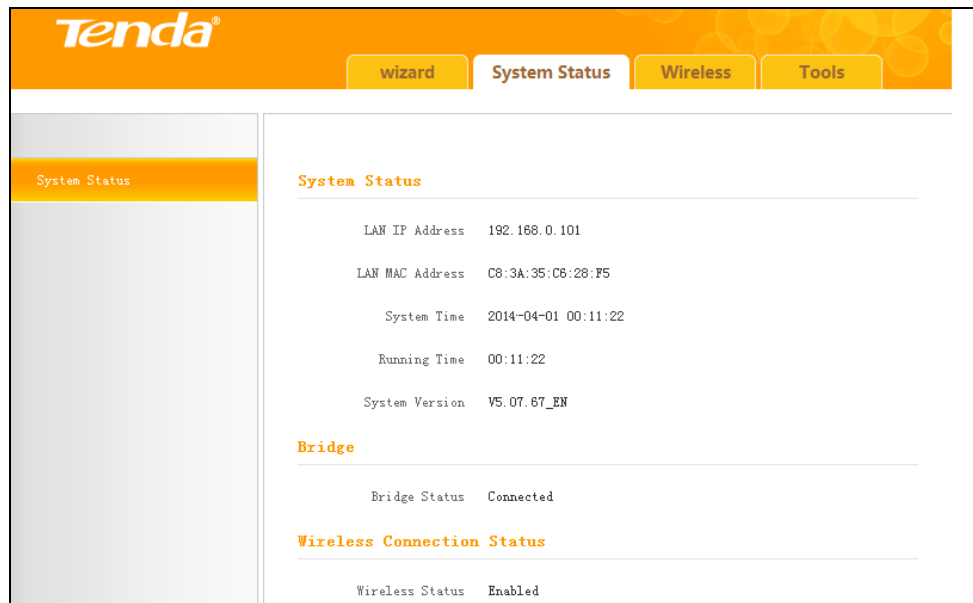**Tip**

- If the wireless range extender is connected to the remote router within 20 seconds, the wireless range extender's DHCP server will be disabled automatically. Thus, the wireless range extender will get the IP assigned from the remote router and then you can access to the Internet.
- If the wireless range extender isn't connected to the remote router within 20 seconds, the wireless range extender's DHCP server will be enabled automatically. The wireless range extender will get the IP assigned from the wireless range extender itself. Thus, you can't access to the Internet.
- When bridged successfully, the range extender's SSID and security mode will be the same as that of the remote router.

Method Two: Setup by Button

By pressing the RE button, you can achieve wireless bridging for extending wireless network without complicated procedures.

Configuration procedures:

1. Press the WPS or QSS button on your wireless router for 1~3 seconds;



2. Press the RE button  on the wireless range extender for 1~3 seconds within 2 minutes;



3. When the RE LED displays a solid light, the wireless range extender will be connected to your desired router successfully. You can also login to the web management interface to check bridge status.

**Note**

1. Ensure the wireless range extender is placed near the wireless router for better performance.
2. AS the latest WPS 2.0 only supports WPA2 security mode, we recommend you use **Method One** to configure this device or set your wireless router's security mode to WPA2.
3. To implement the WPS feature, your wireless router must support and enable this feature.


2.3 Internet Connection Setup

Configure IP


Configure your PC obtain IP address automatically. If you are not clear about this, please refer to [Appendix 1 Configure IP](#).

Web Login


1. Launch a browser, and usually it will login automatically. If not, input re.tendacn.com in the address bar and press **Enter**.

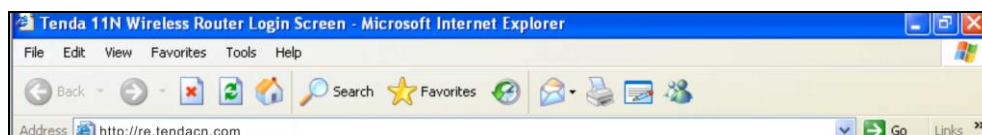

2. Enter the default password **admin** and click **OK**.

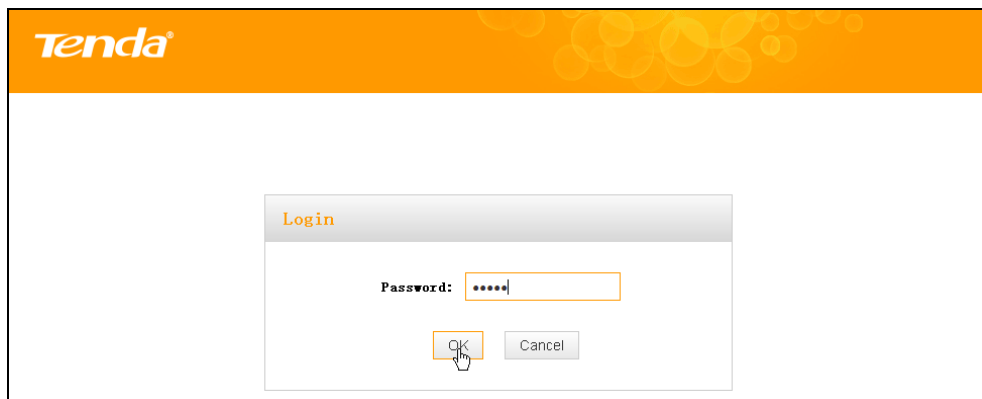

3. Then the following page will appear.

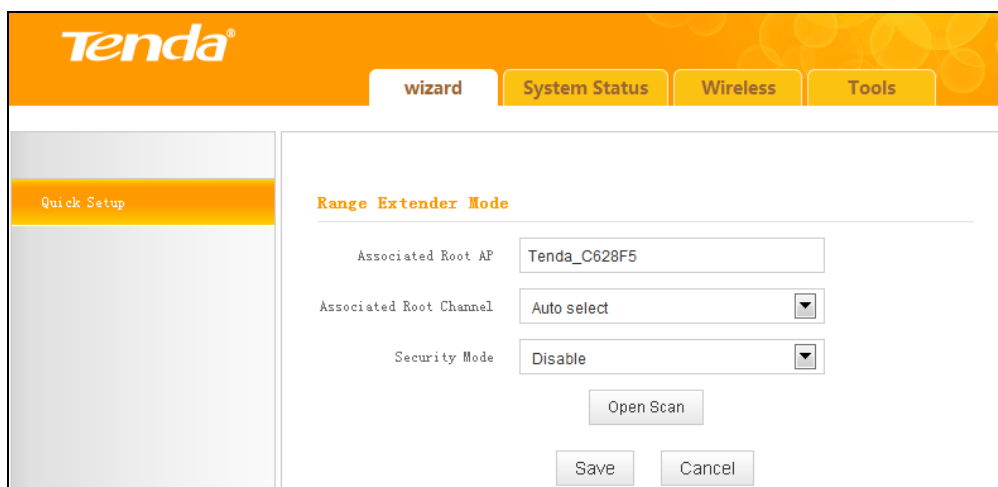

Internet Connection Setup

Wireless bridging allows a wireless network to be expanded using multiple access points. The network topology is shown below:



**Tip**

Before configuring it by web-based management page, make sure you have the following information:


1. Remote router's SSID, security mode, cipher type and security key.
2. Remote router's LAN IP address.

As for specific procedures, please refer to [Method One: Setup by Web-based Management Page](#).

2.4 Verify Internet Connection

After the above configurations, you can verify the connection by pinging the remote router's IP. Steps are described as follows (Take Win7 OS for example):

1. Click **Start** and input "cmd" in the marked field;

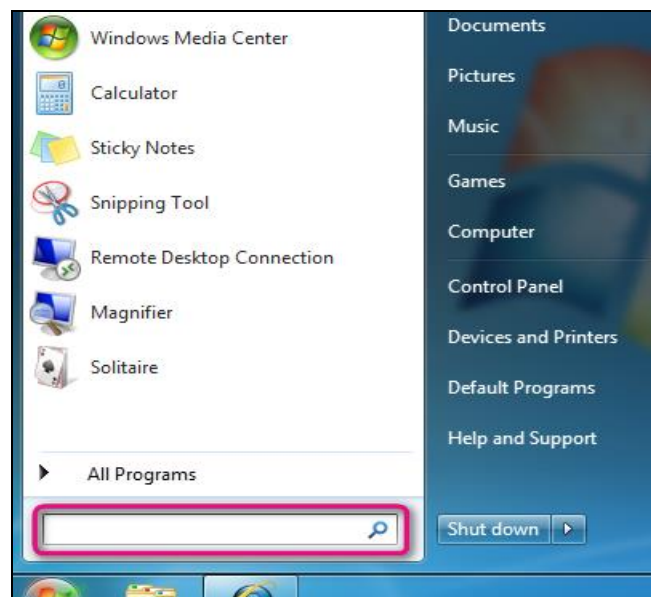

2. Enter "ping 192.168.0.1" (remote router's IP) and press **Enter**. If you see a similar screen as shown below, the bridge is established successfully.

```
C:\Windows\system32\cmd.exe
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\TendaWin7x64en>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:
Reply from 192.168.0.1: bytes=32 time<1ms TTL=64
Reply from 192.168.0.1: bytes=32 time<1ms TTL=64
Reply from 192.168.0.1: bytes=32 time<1ms TTL=64
Reply from 192.168.0.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\TendaWin7x64en>
```

**Tip**

If ping failed, repair the IP address on your PC to ensure the gateway is assigned from the remote router.

2.5 Join Your Wireless Connection

Having finished above settings, you can search for the device's default wireless network (SSID) from your wireless devices (notebook, iPad, iPhone, etc) and enter a security key to connect to it wirelessly.

**Tip**

-
1. By default, the range extender's SSID is Tenda_XXXXXX, where XXXXXX is the last six characters of the device's MAC address. You can find its MAC address on the label on the bottom of the range extender.
 2. To join your wireless network, the PC you use must have an installed wireless network adapter. If not, install one.
-

Win7 OS


1. Click on the icon  at the bottom of the right corner on your desktop;

**Tip**


If you cannot find the  icon, try disabling the wired network adapter or unplug the Ethernet cable from the wired network adapter of your PC and refresh your desktop. If the problem remains unsolved, click **Start>Control Panel>Network and Internet>Network and Sharing Center**, right click **Wireless Network Connection** and select **Connect/Disconnect**. Steps for follow-up are similar to the following.




2. Select the wireless network you wish to connect and click **Connect**.

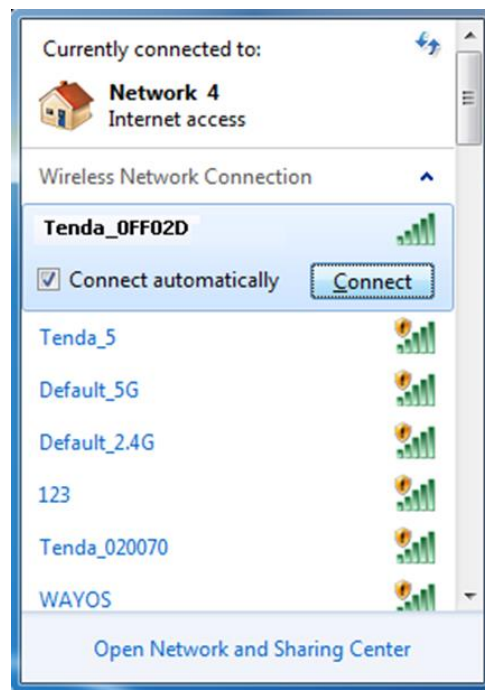

3. Enter the security key and click **OK**.

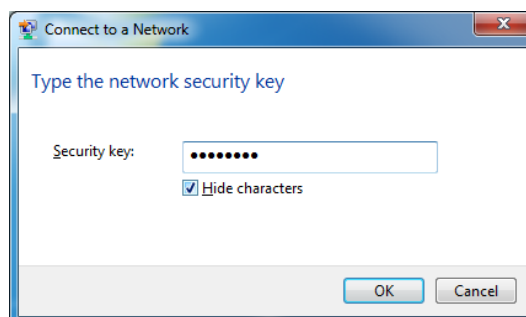

- When you see **Connected** displayed next to the wireless network you selected, you have connected to the wireless network successfully.

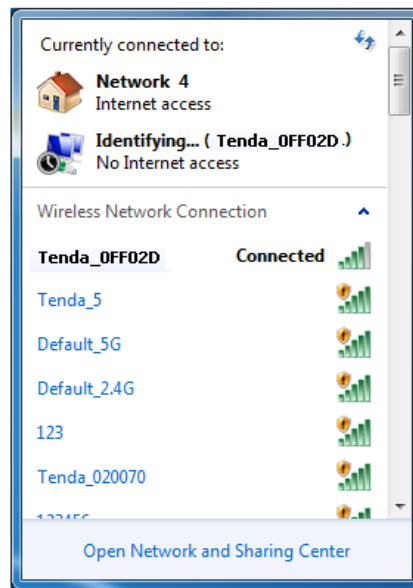


Windows XP OS


- Right click **My Network Places** from your PC's desktop and select **Properties**.



2. Right click **Wireless Network Connection** and select **View Available Wireless Networks**.

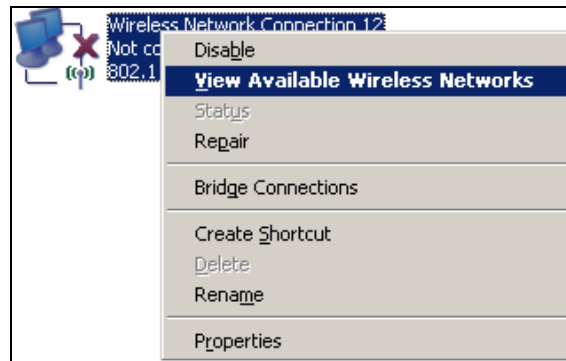


3. Double click the wireless network you wish to connect.

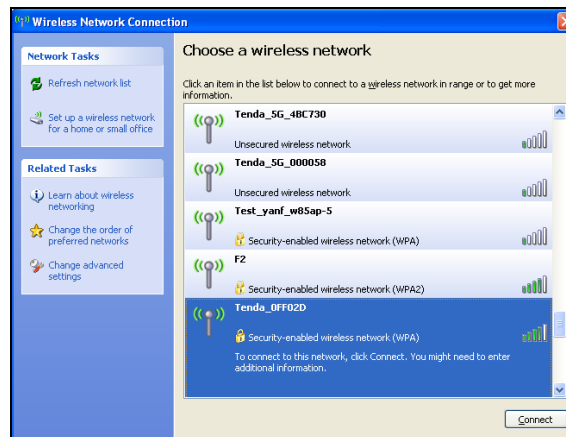

4. Enter the security key and click **Connect**.



5. When you see **Connected** displayed next to the wireless network you selected, you have connected to the wireless network successfully.

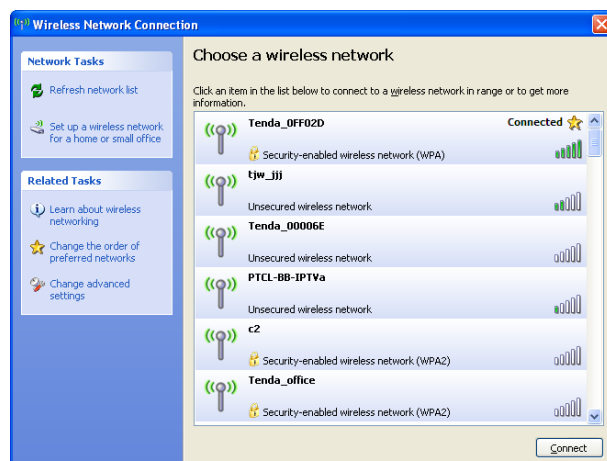

Chapter 3 Advanced Settings

3.1 Wizard

Here you can configure the device's working mode. For specific configurations, please refer to [Chapter 2 Internet Connection Setup](#).

The screenshot shows the Tenda web interface with the 'wizard' tab selected. The left sidebar has 'Quick Setup' highlighted. The main content area is titled 'Range Extender Mode' and contains the following fields:

Associated Root AP	Tenda_C628F5
Associated Root Channel	Auto select
Security Mode	Disable

Below these fields are three buttons: 'Open Scan', 'Save', and 'Cancel'.

3.2 System Status

This section displays the device's current system info.

The screenshot shows the Tenda web interface with the 'System Status' tab selected. The left sidebar has 'System Status' highlighted. The main content area is titled 'System Status' and displays the following information:

LAN IP Address	192.168.0.254
LAN MAC Address	C8:3A:35:C8:28:F5
System Time	2014-02-08 17:12:42
Running Time	00:04:58
System Version	V5.07.67_EN

Below this is a section titled 'Bridge' with the following information:

Bridge Status	Disconnected
---------------	--------------

Below that is a section titled 'Wireless Connection Status' with the following information:

Wireless Status	Enabled
-----------------	---------

3.3 Wireless

3.3.1 Wireless Basic Settings

This section allows you to manage your wireless network.

The screenshot shows the Tenda web management interface. At the top, there's an orange header with the Tenda logo and four tabs: 'wizard', 'System Status', 'Wireless', and 'Tools'. The 'Wireless' tab is selected. On the left, a sidebar contains four menu items: 'Wireless Basic Settings' (highlighted in orange), 'Wireless Security', 'Access Control', and 'Wireless Connection Status'. The main content area is titled 'Wireless Basic Settings' and contains the following configuration options:

- Primary SSID: Text input field containing 'Tenda_C628F5'.
- Secondary SSID: Text input field containing 'Tenda_C628F5'.
- Network Mode: Dropdown menu showing '11b/g/n mixed mode'.
- SSID Broadcast: Two radio buttons, 'Enable' (selected) and 'Disable'.
- AP Isolation: Two radio buttons, 'Enable' and 'Disable' (selected).
- Channel: Dropdown menu showing 'Auto Select'.
- Channel Bandwidth: Two radio buttons, '20' and '20/40' (selected).
- Extension Channel: Dropdown menu showing 'Auto Select'.
- WMM Capable: Two radio buttons, 'Enable' (selected) and 'Disable'.

1. **SSID:** This is the public name of your wireless network. It is preset to "Tenda_XXXXXX" (where "XXXXXX" represents the last six characters in device MAC address.) by default. Please change it for better security. Note that this field should not be left blank.
2. **Network Mode:** Select a correct mode according to your wireless clients.
11b mode: Select it if you have only 11b wireless devices in your wireless network. Up to 11Mbps wireless rate is supported on this mode.
11g mode: Select it if you have only 11g wireless devices in your wireless network. Up to 54Mbps wireless rate is supported on this mode.
11b/g mixed mode: Select it if you have 11b and 11g wireless devices in your wireless network. Up to 54Mbps wireless rate is supported on this mode.
11b/g/n mixed mode: Select it if you have 11b, 11g and 11n wireless devices in your wireless network. In this mode wireless connection rate is negotiated. Up to 300Mbps wireless rate is supported on this mode.
3. **SSID Broadcast:** Select Enable/Disable to make your wireless network visible/ invisible to any wireless clients within coverage when they perform a scan to available networks. When disabled, wireless clients will have to first know this SSID and manually enter it on their devices if they want to connect to the SSID.

4. **AP Isolation:** When it's enabled, clients connected to the same SSID will be isolated.
5. **Channel:** For optimal wireless performance, you may select the least used channel. It is advisable that you select an unused channel from the drop down list, or "Auto" to let the range extender detect and select the best possible channel for your wireless network to operate on.
6. **Channel Bandwidth:** Select a proper channel bandwidth to enhance wireless performance. Available only in 11b/g/n mixed mode.
7. **Extension Channel:** Available only in 11b/g/n mixed mode.
8. **WMM-Capable:** WMM is QoS for your wireless network. Enabling this option may better stream wireless multimedia data (such as video or audio).
9. **ASPD Capable:** Select to enable/disable the auto power saving mode. We recommend you disable it.

**Tip** -----

1. The default primary SSID is Tenda_XXXXXX. XXXXXX is the last 6 characters of the MAC address, which you can get from the label on the device.
 2. If you are not familiar with these configurations, it is advisable that only the primary SSID and channel should be modified.
-

3.3.2 Wireless Security

This section allows you to encrypt your wireless network to block unauthorized accesses and malicious packet sniffing.

To secure your wireless network:

1. Select the SSID you wish to secure;
2. Configure its security mode, WPA Algorithms and security key;
3. Click **OK** to save your settings.

1. **Open:** Wireless speed rate can reach up to 54Mbps if Open is selected.
2. **Shared:** Wireless speed rate can reach up to 54Mbps if Shared is selected.
3. **Default Key:** Select a key to be effective for the current WEP encryption. For example, if you select Key 1, wireless clients must join your wireless network using this Key 1.
4. **WPA-PSK:** WPA personal, supports AES, TKIP and TKIP+AES cipher types. Note: Usually TKIP&AES is not optional.
5. **WPA2-PSK:** WPA2 personal, support AES, TKIP and TKIP+AES cipher types.
6. **Mixed WPA/WPA2-PSK:** If selected, both WPA-PSK and WPA2-PSK secured wireless clients can join your wireless network.
7. **AES:** If selected, wireless speed can reach up to 300Mbps.
8. **TKIP:** If selected, wireless speed can reach up to 54Mbps.
9. **TKIP+AES:** If selected, both AES and TKIP secured wireless clients can join your wireless network.
10. **Security Key:** Must be between 8~63 case-sensitive ASCII characters or 8~64 Hex characters.



Tip


For better security, compatibility and wireless speed, we recommend the WPA-PSK and AES.

3.3.3 Access Control

Specify a list of devices to "Permit" or "Forbid" a connection to your wireless network via the devices' MAC Addresses. Click **Wireless -> Access Control**

to enter the configuration screen.

There are three options available: **Disable**, **Forbid** and **Permit**.

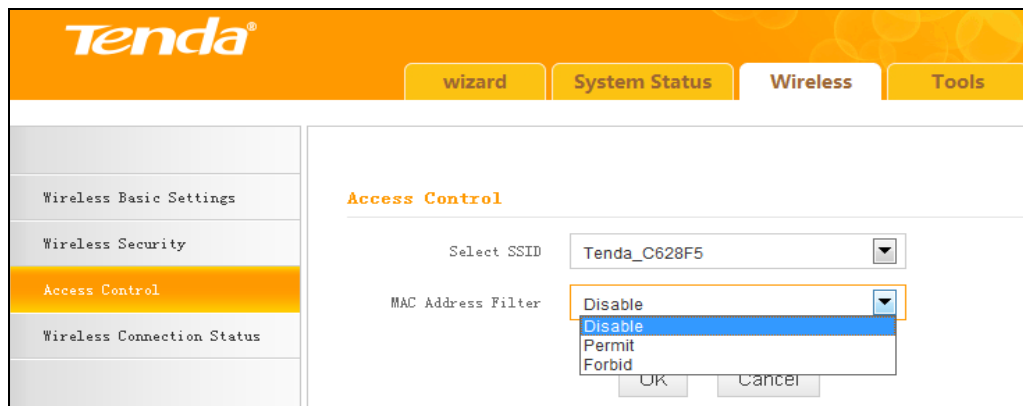


Wireless Access Control Application Example:

To only allow your own notebook at the MAC address of C8:3A:35:C2:CA:E7 to join your wireless network.

Configuration procedures:

1. Select the SSID you wish to configure access control;
2. Select **Permit**;
3. Enter the MAC address.
4. Click **Add**;

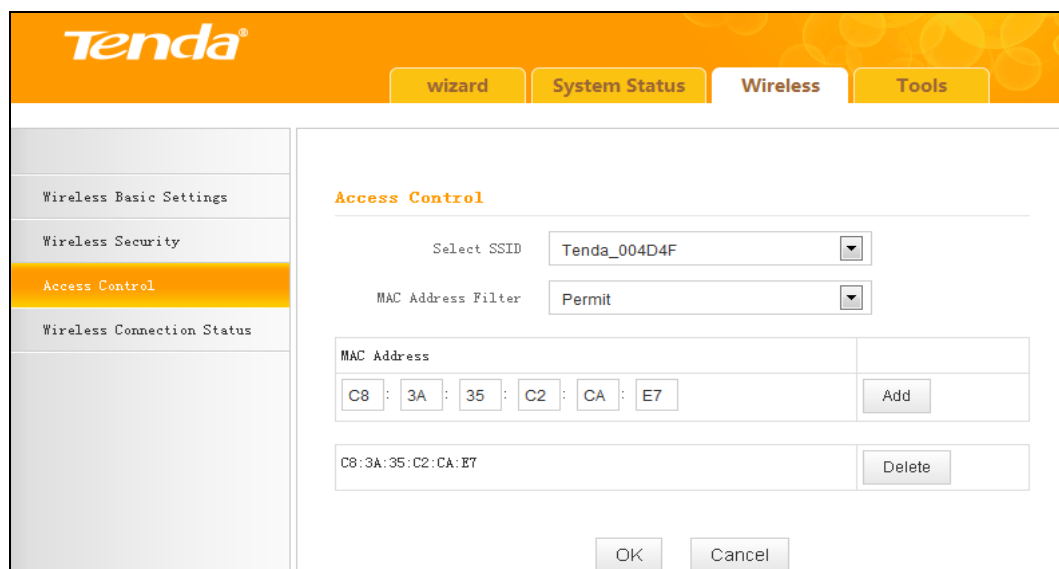

5. Click **OK** to save your settings;



Tip

1. Up to 16 wireless MAC addresses can be configured.
2. If you don't want to configure the complex wireless security settings and want to disallow others to join your wireless network, you can configure a wireless access control rule to allow only your own wireless device.

3.3.4 Wireless Connection Status

Click **Wireless > Wireless Connection Status**, here you can see a list of wireless devices connected to the range extender.

Wireless Connection Status

Select SSID: Tenda_004D4F

The currently connected hosts list: Refresh

NO.	MAC Address	Bandwidth
-----	-------------	-----------

Help

Here you can see a list of wireless devices connected to Range Extender.

Bandwidth: The channel frequency width of each connection. 40M is required for 802.11n speeds.



Tip

You can know whether there are unauthorized accesses to your wireless network by viewing the wireless client list.

3.4 Tools

3.4.1 Time Settings

This section lets you configure, update, and maintain the correct time on the internal system clock. You can either select to set the time and date manually or automatically obtain the GMT time from Internet. Note that the GMT time is obtained only when the range extender is connected to the Internet.

Time Settings

Time Zone: (GMT+01:00) Amsterdam, Berlin, Bern, Rome, Stockholm, Vienna

Note: System time will not be accurate unless there is an access to the Internet or you select "Customized Time" below.

☐ Customized Time

2013 Year 9 Month 28 Day 19 Hour 39 Minute 12 Second

OK Cancel


1. **Time Zone:** Select your current time zone.
2. **Customized Time:** Check it to customize time.

**Tip**

When the device is disconnected from power supply, time settings on this page will be lost. However, it will be updated automatically when the device reconnects to the Internet.

3.4.2 Upgrade

Upgrade is released periodically to improve the functionality of your device, and also to add any new features. If you run into a problem with a specific feature of the range extender you could log on to our website (www.tendacn.com) to download the latest firmware to update your device.

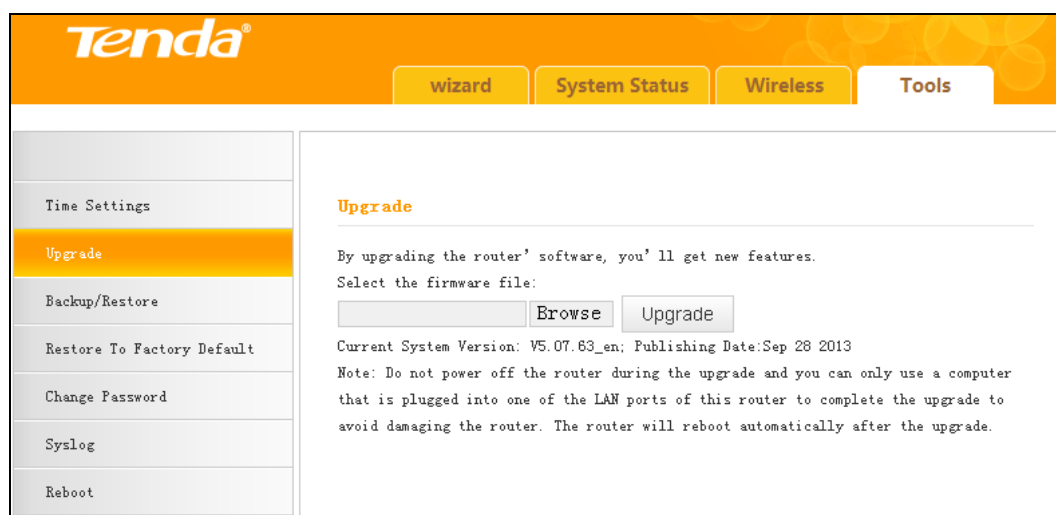

To upgrade firmware, do the following:


1. Click **Browse** to locate and select the firmware file and click **Upgrade** to update your range extender.
2. Device restarts automatically when the upgrade process is completed.

**Note**

1. Please verify the firmware is correct.
2. Do not power off the device when the upgrade is in process otherwise the device may be permanently damaged. When the upgrade is completed, the device will automatically reboot. The firmware upgrade may take a few minutes to complete so please wait for the process to finish. you need to update the device's firmware via a wired connection.

3.4.3 Backup/Restore


This feature allows you to backup and restore current settings. Once you have configured the range extender, you can save these settings to a configuration file on your local hard drive. The configuration file can later be imported to your range extender in case the range extender is reset to factory default settings.

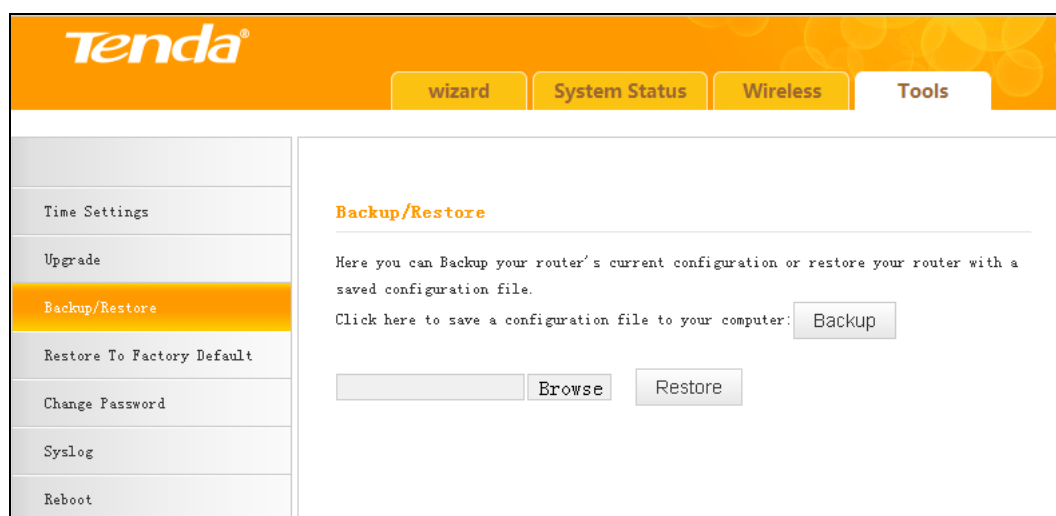

Tip-----

The default configuration file name is "RouterCfm.cfg". You can change it as you like. For safety purpose, do not change the file extension.

3.4.4 Restore to Factory Default

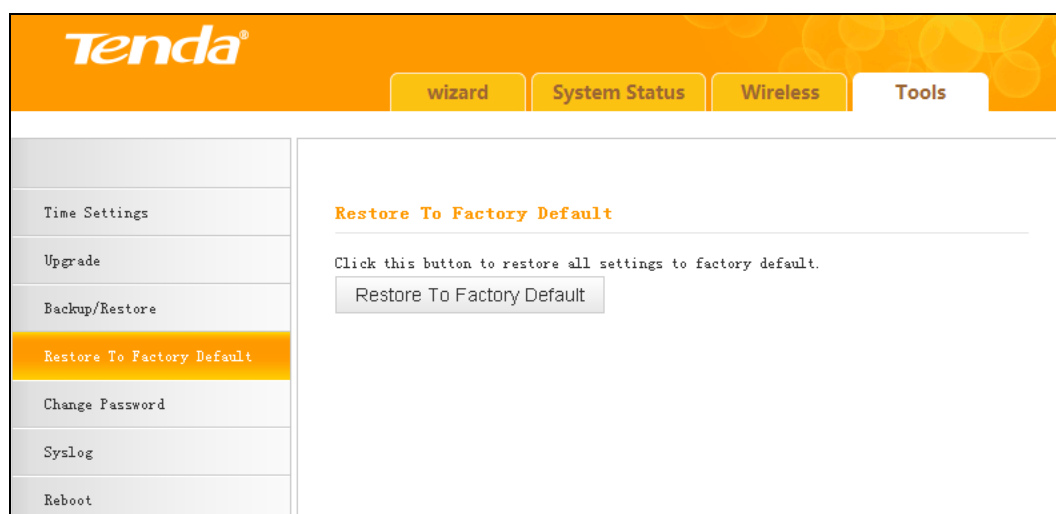

Click the **Restore To Factory Default** button to reset the range extender to its factory default settings.

1. Default IP Address: 192.168.0.254
2. Default Subnet Mask: 255.255.255.0
3. Default Password: admin

**Note**

1. Once this device is restored to factory default, you need to reconfigure the device for Internet access as well as many other settings including wireless settings.
2. It is not advisable to restore the device to factory default settings unless our technical supporters recommend you to do so.

3.4.5 Change Password

This section allows you to change login password and user name for accessing the device's Web-based management interface.

1. **Old Password:** Enter the old password. If you use the device for the first time, the password is admin by default. (Note: Password cannot be retrieved once forgot) If you already changed the password and unfortunately forget, restore the device to factory defaults.
2. **New Password:** Input a new password. Password must include 1 ~ 12 characters without any space.
3. **Confirm New Password:** Re-enter the new password for confirmation.


**Tip**

1. For security purpose, it is highly recommended that you change the default login password as part of the initial configuration of your range extender.

- Only numbers and alphabets can be included in the password (1~12 characters). If no character entered, it has no password.
-

3.4.6 Syslog

Here you can view the history of the device's actions. After 150 entries, the earliest logs will be cleared automatically.

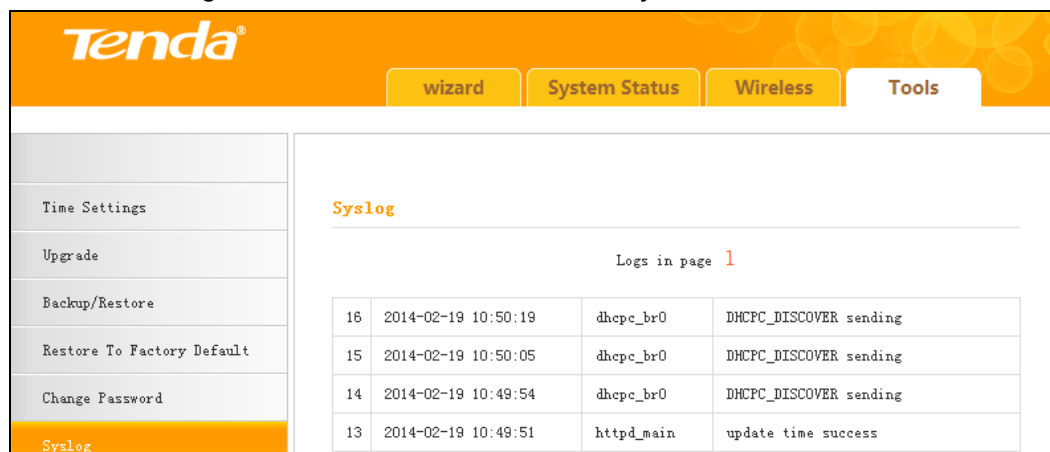


The screenshot shows the Tenda web interface with the 'Tools' tab selected. The 'Syslog' option is highlighted in the left sidebar. The main content area displays the 'Syslog' title and 'Logs in page 1'. A table lists the following log entries:

ID	Time	Source	Message
16	2014-02-19 10:50:19	dhcpc_br0	DHCPC_DISCOVER sending
15	2014-02-19 10:50:05	dhcpc_br0	DHCPC_DISCOVER sending
14	2014-02-19 10:49:54	dhcpc_br0	DHCPC_DISCOVER sending
13	2014-02-19 10:49:51	httpd_main	update time success

3.4.7 Reboot

This section allows you to reboot the device. Rebooting the device will activate any modified settings on this device. While rebooting, all connections will be lost and reconnected automatically later.

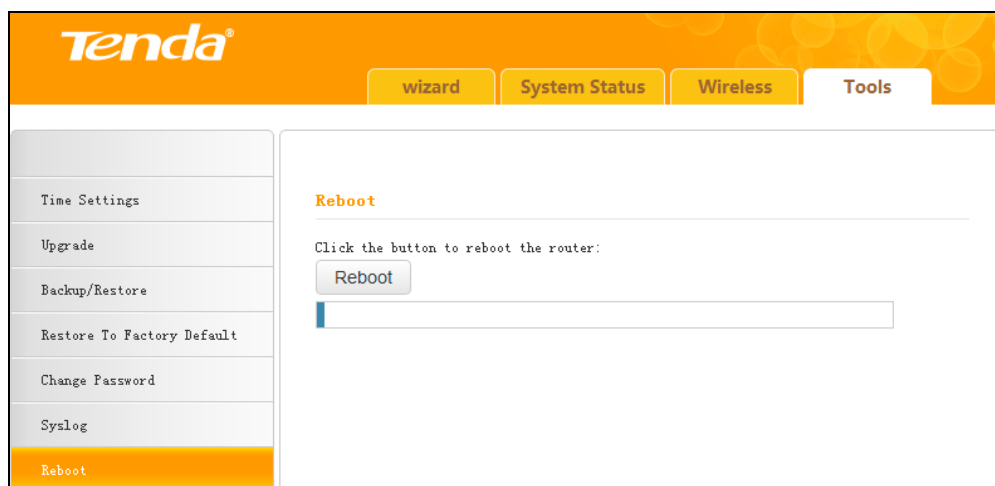

The screenshot shows the Tenda web interface with the 'Tools' tab selected. The 'Reboot' option is highlighted in the left sidebar. The main content area displays the 'Reboot' title and the instruction 'Click the button to reboot the router:'. A 'Reboot' button is visible, followed by a progress bar.


Chapter 4 Appendix

Appendix 1 Configure IP


In this section we explain how to configure your PC's TCP/IP settings.

Win7 OS


1. Click **Start ->Control Panel**;

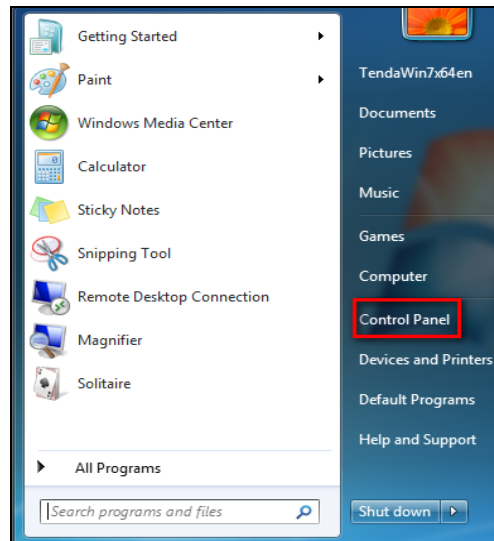


2. Enter **Control Panel** and click **Network and Internet**;

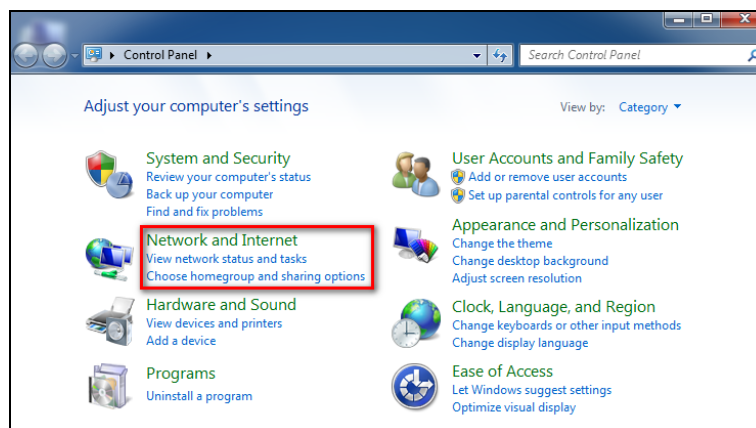


3. Click **Network and Sharing Center**;

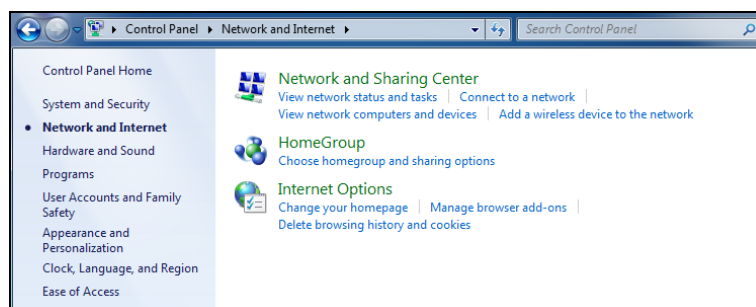


4. Click **Change adapter settings**;

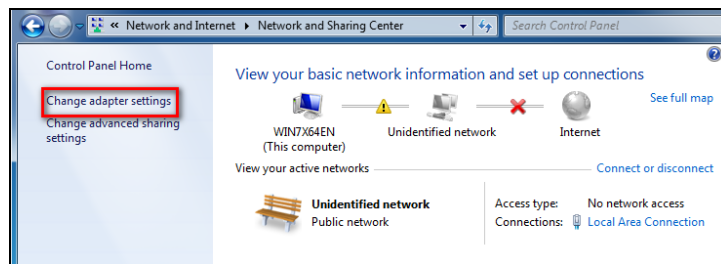


5. Right click **Local Area Connection** and select **Properties**;

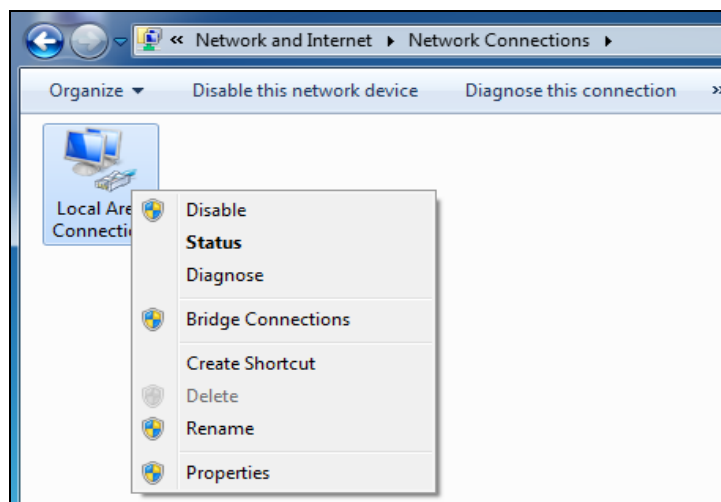

6. Select **Internet Protocol Version 4(TCP/IPv4)** and click **Properties**;

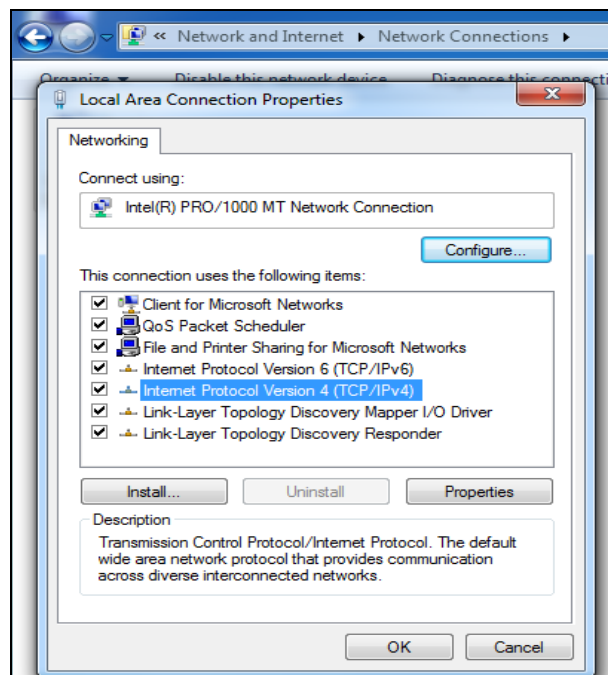


7. Select **Obtain an IP address automatically** and click **OK** to save the configurations.

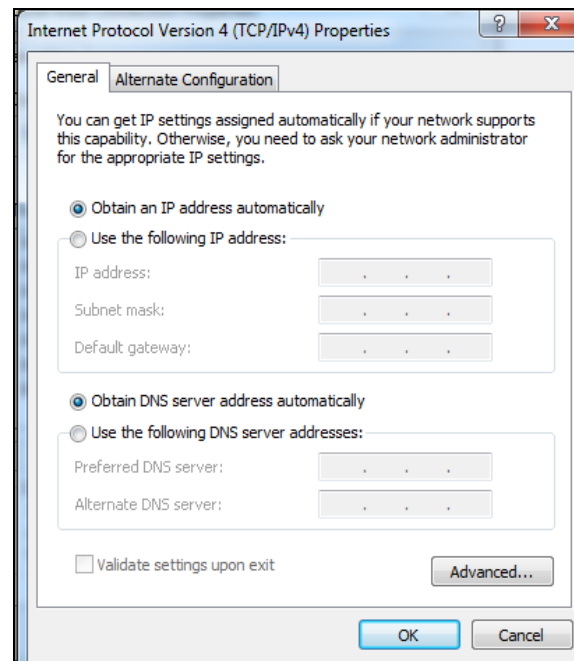


Windows XP OS


1. Right click **My Network Places** and select **Properties**;

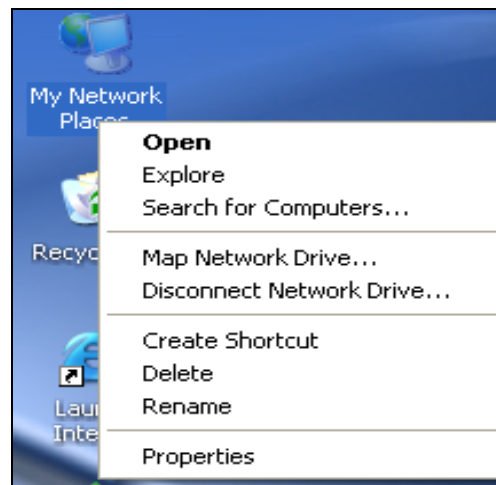


2. Right click **Local** and select **Properties**;

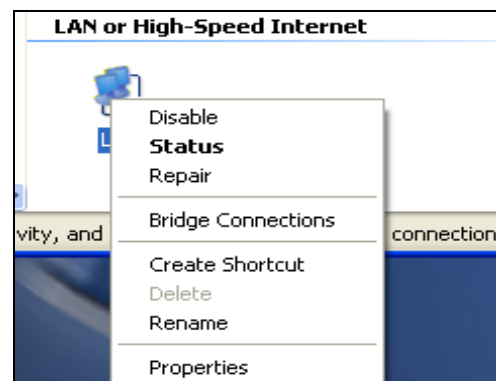

3. Select **Internet Protocol (TCP/IP)** and click **Properties**;

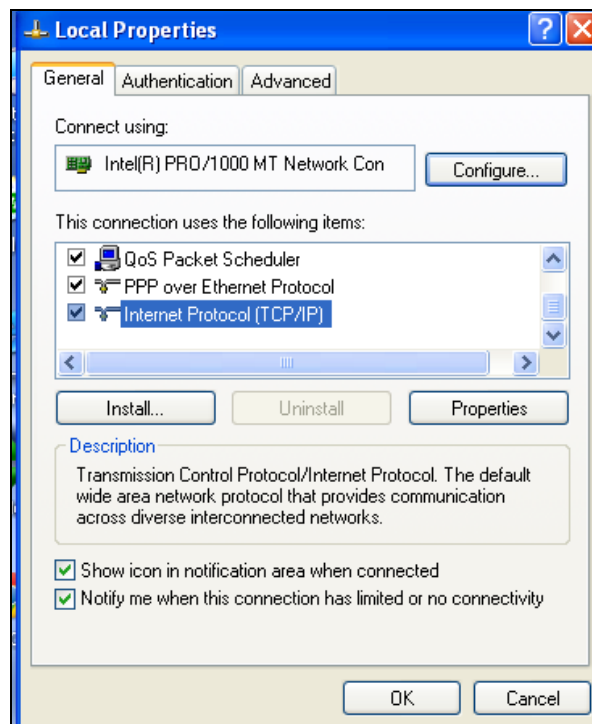

4. Select **Obtain an IP address automatically** and click **OK** to save the settings.

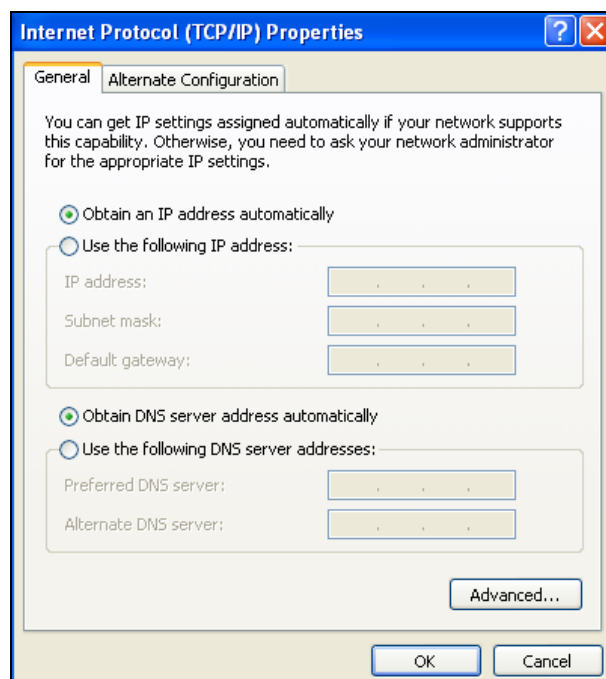

Appendix 2 Default Settings

Parameters		Default Settings
Web Login	Default Access	http://re.tendacn.com
	Default Password	admin
Wireless Settings	Wireless Setup	Enabled
	Primary SSID	Tenda_XXXXXX (XXXXXX is the last 6 characters of the MAC address)
	Working Mode	11/b/g/n Mixed
	SSID Broadcast	Enabled
	AP Isolation	Disabled
	Channel	Auto
	Channel Bandwidth	20/40
	Extension Channel	Auto
	WMM Capable	Enabled
	APSD Capable	Disabled
	Security Mode	Disabled
Tools	Time	(GMT+08:00) Beijing, Chongqing, Hong Kong, Urumqi

Appendix 3 FAQs

This section provides solutions to problems that may occur during installation and operation of the device. Read the following if you are running into problems. If your problem is not covered here, please feel free to go to www.tendacn.com to find a solution or email your problems to: support@tenda.com.cn. We will be more than happy to help you out as soon as possible.

Q: I entered the device's default access "re.tendacn.com" in the web browser but cannot access the utility. What should I do?

- a. Check whether device is functioning correctly. The PWR LED should blink after device is powered up. If it does not light up, then some internal faults may have occurred.
- b. Verify physical connectivity by checking whether a corresponding port's link LED lights up. If not, try a different cable.
- c. Verify your PC obtains IP address automatically or configure the IP manually by keeping the IP in the same network segment with the device's LAN IP (192.168.0.1~192.168.0.253).
- d. Press the RESET button with something pointed for about 7 seconds to restore the device to factory default settings and re-login.

Q: What should I do if I forget the login password to my device?

Reset your device by pressing the RESET button for over 7 seconds.

Q: My computer shows an IP address conflict error after having connected to the device. What should I do?


- a. Check if there are other DHCP servers present in your LAN. If there are other DHCP servers except your range extender, disable them immediately.
- b. The default IP address of the device is <http://re.tendacn.com>; make sure this address is not used by another PC or device. In case that two computers or devices share the same IP addresses, change either to a different address.

Appendix 4 Remove Wireless Network from your PC


If you change wireless settings on your wireless device, you must remove them accordingly from your PC; otherwise, you may not be able to wirelessly connect to the device.

If you are using Windows XP, do as follows:


1. Right click **My Network Places** and select **Properties**.

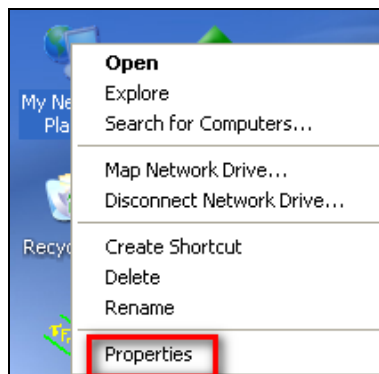

2. Click **Wireless Network Connection** and then select **Properties**.

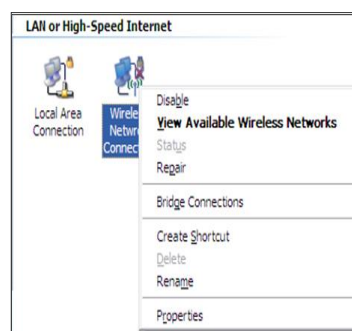


3. Click **Wireless Networks**, select the item under **Preferred networks** and then click the **Remove** button.

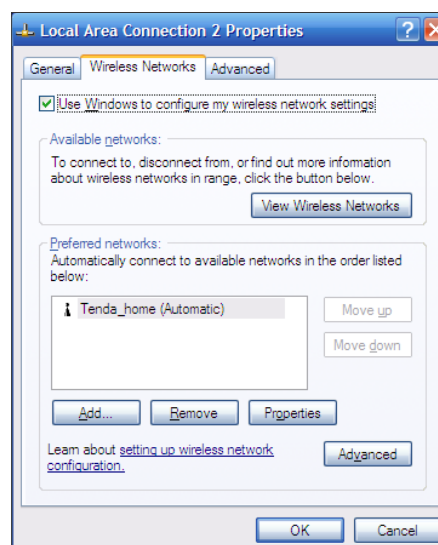


If you are using Windows 7, do as follows:


1. Click **Network** from your desktop and select **Properties**.

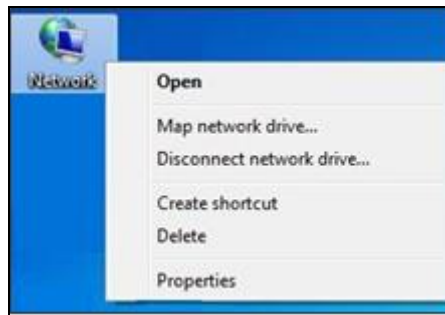

2. Select **Manage Wireless Networks**.

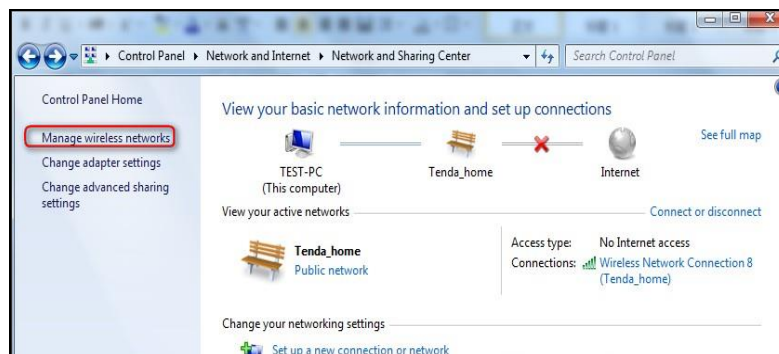

3. Click the wireless connection and select **Remove network**.

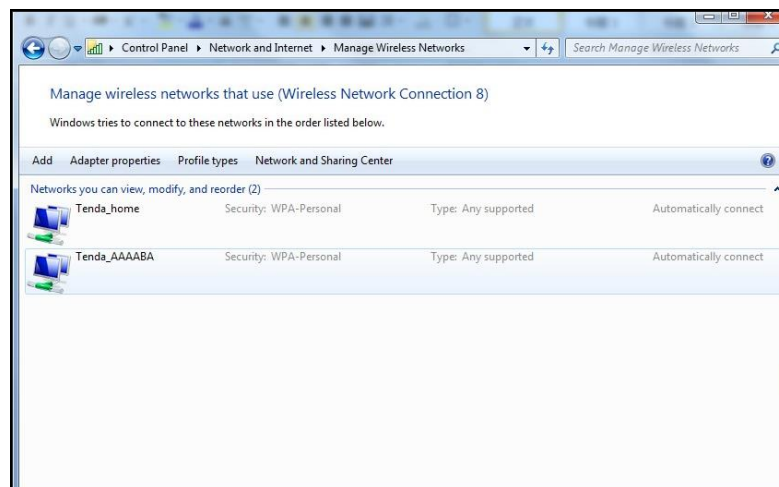

Appendix 5 Safety and Emission Statement



CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures. This device complies with EU 1999/5/EC.

NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.



FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.

(2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.