

User Manual

Ceiling AP Series

i29 is used for demonstration in this User Manual unless otherwise stipulated.

Please read this manual before you start with the quick setup upon the first use.
For product or function details, please go to www.tendacn.com or scan the **Product Documents** QR code in this user manual to download the user guide.

Copyright
© 2022 Shenzhen Tenda Technology Co., Ltd. All rights reserved.
Tenda is a registered trademark legally held by Shenzhen Tenda Technology Co., Ltd. Other brand and product names mentioned herein are trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice.


Technical Support
Shenzhen Tenda Technology Co., Ltd.
Floor 6-8, Tower E3, No.1001, Zhongshan Road, Nanshan District, Shenzhen, China. 518052
USA hotline: 1-800-570-5892
Toll Free: 7 × 24 hours
Canada hotline: 1-888-998-8966
Toll Free: Mon - Fri 9 am - 6 pm PST
HongKong hotline: 00852-81931998
Global hotline: +86 755-2765 7180 (China Time Zone)
Website: www.tendacn.com
E-mail: support@tenda.com



1. Installing your AP


Ceiling mounting

- ① (Optional) Remove the bracket from the AP.
- ② Position the bracket on the ceiling and mark screw holes on the ceiling with a marker. Drill holes in the marked positions using a hammer drill.

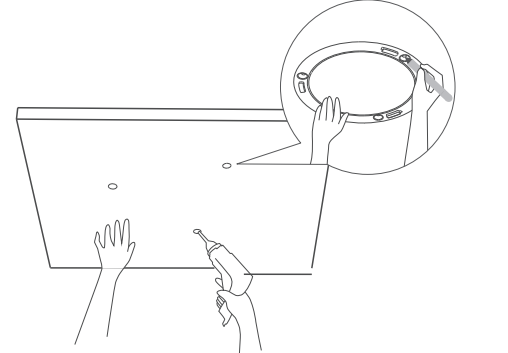


Wall mounting

- ① (Optional) Remove the bracket from the AP.
- ② Position the bracket on the wall, and mark screw holes on the wall with a marker. Drill holes in the marked positions using a hammer drill.

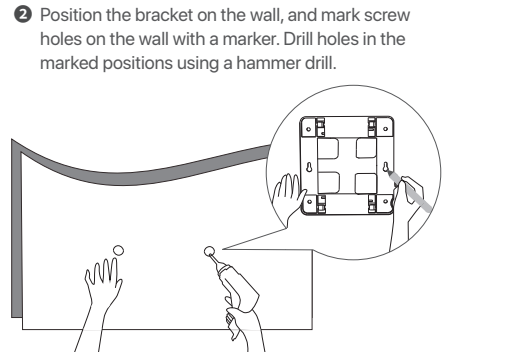


2. Supplying power to your APs

Method 1: Power the AP with a standard PoE power supply device

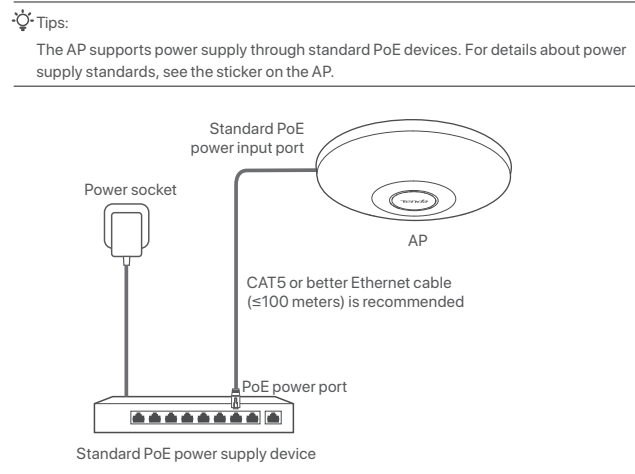


Method 2: Power the AP with a power adapter

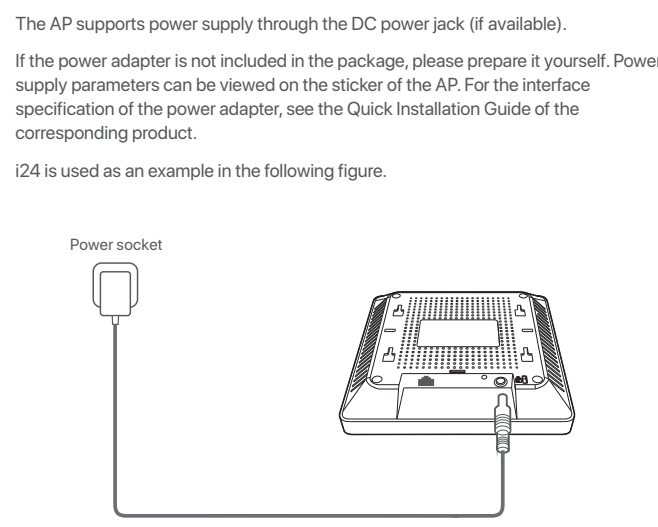


3. Connecting and configuring your APs

Scenario 1: Deploying your network without a management device for Tenda AP

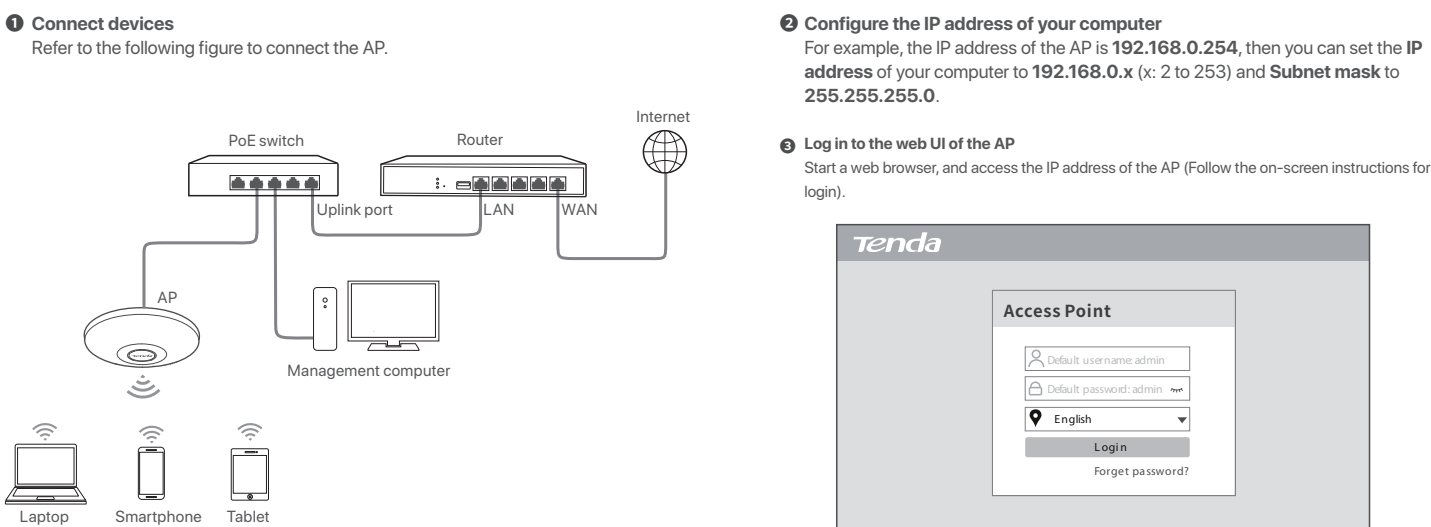


- ① **Connect devices.**
Refer to the following figure to connect the AP.
- ② **Configure the IP address of your computer.**
For example, the IP address of the AP is 192.168.0.254, then you can set the IP address of your computer to 192.168.0.x (x: 2 to 253) and Subnet mask to 255.255.255.0.
- ③ **Log in to the web UI of the AP.**
Start a web browser, and access the IP address of the AP. Follow the on-screen instructions for login.

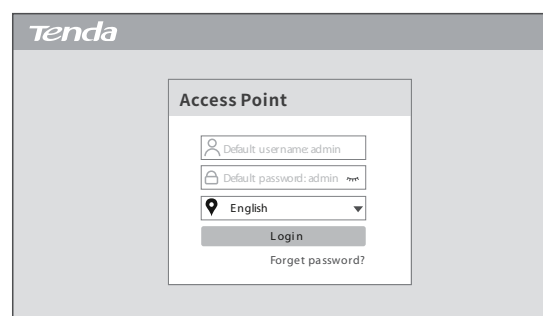


Scenario 2: Deploying your network with a Tenda access controller (AC)

If a Tenda AC is deployed in the network, you can log in to the web UI of the **AC** on your computer to set up the AP. Please refer to the user guide of the corresponding AC for details.

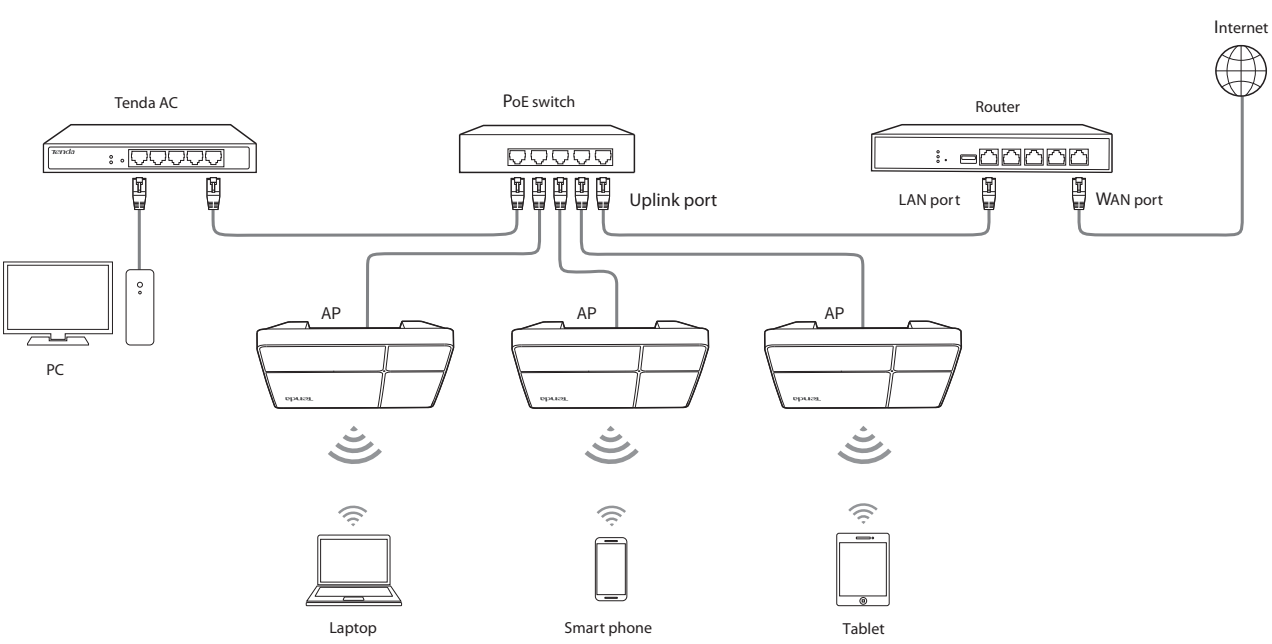

Scenario 3: Deploying your network with a Tenda router that includes the AC functionality

If a Tenda router with AC functionality is deployed in the network, you can log in to the web UI of the **router** on your computer to set up the AP. Please refer to the user guide of the corresponding router for details.

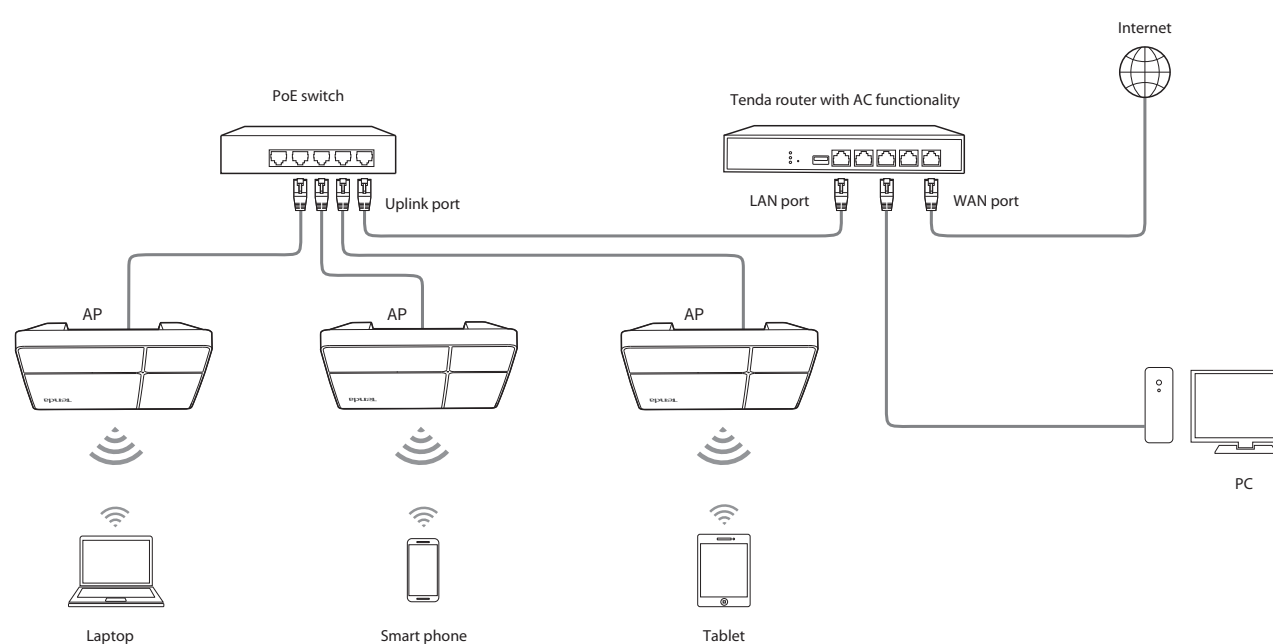

Get support and services

Scan the **Product Documents** QR code to get related documents for quick installation.
* Specific product model can be found in the label on the device.



Product Documents
(such as Quick Installation Guide and User Guide)

Safety precautions

- Before performing an operation, read the operation instructions and precautions to be taken, and follow them to prevent accidents. The warning and danger items in other documents do not cover all the safety precautions that must be followed. They are only supplementary information, and the installation and maintenance personnel need to understand the basic safety precautions to be taken.
- Do not use the AP in a place where wireless devices are not allowed.
- Please use the included power adapter.
- The AP should be powered off during installation.
- The power socket shall be installed near the device and easily accessible.
- Operating environment: Temperature: -10 °C ~ 40 °C; Humidity: 10% ~ 90% RH, non-condensing; Storage environment: Temperature: -30 °C ~ 70 °C; Humidity: (5% ~ 90%) RH, non-condensing.
- Keep the AP away from water, fire, high electric field, high magnetic field, and inflammable and explosive items.
- Unplug this AP and disconnect all cables during lightning storms or when the ap is unused for long periods.
- Do not block the ventilation opening of the AP.
- Do not use the power adapter if its plug or cord is damaged.
- Use a power adapter with required specifications.
- Clean with dry cloth only when the AP is powered off.
- If such phenomena as smoke, abnormal sound or smell appear when you use the device, immediately stop using it and disconnect its power supply, unplug all connected cables, and contact the after-sales service personnel.
- Disassembling or modifying the device or its accessories without authorization voids the warranty, and might cause safety hazards.



CE Mark Warning
This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.
Operations in the 5.15-5.25 GHz band are restricted to indoor use only (EN12124/EN12129).
This equipment should be installed and operated with minimum distance 20cm between the device and your body.
NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.
Declaration of Conformity
Hereby, SHENZHEN TENDA TECHNOLOGY CO., LTD. declares that the radio equipment type 8121/24/25/27/29 is in compliance with Directive 2014/53/EU.
The full text of the EU declaration of conformity is available at the following internet address: <http://www.tendacn.com/download/8121-8129>
Operating Frequency:
2.4 GHz: EU(2400 - 2483.5MHz (CH1 - CH13))
5 GHz: EUS(5150 - 5250MHz (CH36 - CH48)) (21/04/25/27/29)
ESIP Power (Max.):
2.4GHz: < 20 dBm
5GHz: < 23 dBm (21, 24, 25, 27, 29)
Software Version: V1.0.0.0



RECYCLING
This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.
User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.



FCC Statement
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
— Reorient or relocate the receiving antenna.
— Increase the separation between the equipment and receiver.
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
— Consult the dealer or an experienced radio/TV technician for help.
The device is for indoor usage only.
Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Radiation Exposure Statement
This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules.
This equipment should be installed and operated with minimum distance 20cm between the device and your body.
Caution:
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
Operating frequency: 2412 ~ 2462 MHz; 5150 ~ 5250 MHz (21/04/25/27/29); 5725-5850 MHz (21/24/25)
NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.



8121/24
Adapter Model: BN073-A12012E, BN073-A12012B
Manufacturer: SHENZHEN HEWESHUN NETWORK TECHNOLOGY CO., LTD.
Input: 100 ~ 240V AC, 50/60Hz, 0.4A
Output: 12V DC, 1.5A
::: DC Voltage

i25
Adapter Model: BN074-A18048B, BN074-A18048E
Manufacturer: SHENZHEN HEWESHUN NETWORK TECHNOLOGY CO., LTD.
Input: 100 ~ 240V AC, 50/60Hz, 0.6A
Output: 48V DC, 0.8A
::: DC Voltage

i27/29
Adapter Model: BN031-A65051
Manufacturer: SHENZHEN HEWESHUN NETWORK TECHNOLOGY CO., LTD.
Input: 100 ~ 240V AC, 50/60Hz, 1.5A
Output: 51V DC, 1.25A
::: DC Voltage

For EUREPA (21/04/25/27/29), this product can be used in the following countries:

BE	BZ	CZ	DK	DE	FR	EL	ES	FR	HR	IT	CY	LV
LT	LU	HU	MT	NL	AT	PL	PT	RO	SI	SK	FI	SE
UK												



LA OPERACIÓN DE ESTE DISPOSITIVO ESTA SUJETA A LAS SIGUIENTES CONDICIONES: a) Es posible que este equipo o dispositivo no cause interferencia perjudicial. b) Este equipo o dispositivo debe aceptar cualquier tipo de interferencia, incluyendo la que pueda causar su operación no deseada. Estimado usuario: Antes de utilizar este producto lo invitamos a leer el siguiente manual para que conozca todas sus funciones y características.	
Producto	NOMBRE DEL PRODUCTO: Punto de acceso inalámbrico/Punto de Acceso de Banda Ancha/PC100 Wave2 Uplink/Punto de Acceso MODELO: 8121/24
Alimentador de Energía	Alimentación: 100V ~ 240V ca 50Hz/60Hz, 0.4A Salida: 12V ca 1.5A
PAIS DE ORIGEN: CHINA	
Producto	NOMBRE DEL PRODUCTO: ACT155 Wave2 Punto de Acceso de Montaje en Torno de Banda Ancha MODELO: i25
Alimentador de Energía	Alimentación: 100V ~ 240V ca 50Hz/60Hz, 0.6A Salida: 48V DC, 0.8A
PAIS DE ORIGEN: CHINA	
Producto	NOMBRE DEL PRODUCTO: Wi-Fi 6 AX3000 Punto de Acceso AX3000 Wi-Fi Punto de Acceso de Largo Alcance MODELO: i27/29
Alimentador de Energía	Alimentación: 100V ~ 240V ca 50Hz/60Hz, 1.5A Salida: 51V ca 1.25A
PAIS DE ORIGEN: CHINA	
Producto	NOMBRE DEL PRODUCTO: Wi-Fi 6 AX3000 Punto de Acceso AX3000 Wi-Fi Punto de Acceso de Largo Alcance MODELO: i29
Alimentador de Energía	Alimentación: 100V ~ 240V ca 50Hz/60Hz, 1.5A Salida: 51V ca 1.25A
PAIS DE ORIGEN: CHINA	