

Shenzhen Huaxunshitong Technology Co., Ltd.

Antenna Specifications

Client Name: Muedo Technology

Project Name		Antenna frequency band	BT
Specifications	☐ Bracket + Spring	☐ Single Spring	☐ Bracket+FPC+Ejector Pin
	☐ FPC	☐ FM Antenna	☐ GPS Antenna
	Bluetooth /WIFI cable: 25mm		
	☐ Coaxial cable	☐ WIFI Antenna: ☐ FPC+Wires: ☐ PCB+Cable length	
Customer Confirmation			


Supplier Confirmation	RF Confirmation	Structural Verification	Review
Contact	Wang Pengchao	cell phone	13480925226
Phone	0755-23705212	Fax	0755-23705213
Email	szhuaxunshitong@126.com		
Address: Room 3005, 3rd Floor, Hongfenghua Internet Creative Park, No. 1 Huangtian Damen Road, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong Province			

1. Test Items and Equipment

	Test Items	Equipment
1. S-parameter	1. Return Loss 2. Voltage Standing Wave Ratio	Network Analyzer :AgilentE5071B HP 8753D
2. Active testing	1. Transmit power 2. Receiving sensitivity	1. Darkroom : ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. Comprehensive Tester : Agilent8960 E5515B ×2 StarPointSP6011
3. Passive Testing	1. Antenna gain 2. Antenna efficiency	1. Darkroom : ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. Network Analyzer : AgilentE5071B HP 8753D




2. Matching Circuit - BT Antenna:

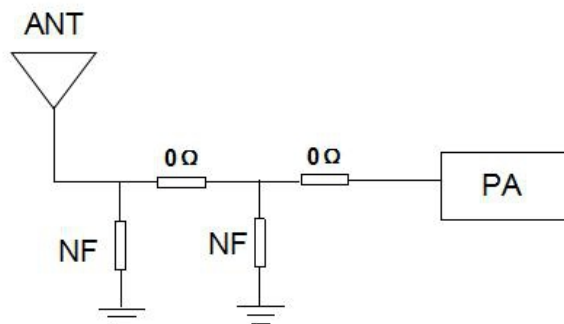

Our company has not made any modifications to the matching circuit.

3. Efficiency and Gain

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHIS (%)	DHIS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	16.58	-7.8	-3.59	-5.74	8.505	8.079	-3.59	-17.89	55.76	57.21
2410	18.06	-7.43	-4.08	-6.23	10.078	7.981	-4.08	-19.83	55.83	58.53
2420	18.11	-7.42	-3.53	-5.68	9.534	8.578	-3.53	-15.99	56.07	58.09
2430	20.43	-6.9	-4.03	-6.18	11.073	9.357	-4.03	-16.34	56.25	58.05
2440	20.51	-6.88	-3.68	-5.83	11.024	9.489	-3.68	-22.22	56.61	58.56
2450	21.7	-6.64	-3.61	-5.76	11.534	10.168	-3.61	-17.94	56.87	58.64
2460	20.77	-6.82	-3.84	-5.99	11.417	9.357	-3.84	-16.42	56.54	57.97
2470	20.35	-6.92	-3.15	-5.3	11.26	9.087	-3.15	-15.42	56.17	58.01
2480	19.98	-6.99	-3.86	-6.01	11.332	8.645	-3.86	-20.29	56.4	57.83
2490	20.57	-6.87	-3.29	-5.44	11.469	9.1	-3.29	-15.71	56.48	57.83
2500	20.8	-6.82	-3.37	-5.52	11.886	8.919	-3.37	-14.87	56.61	58.07

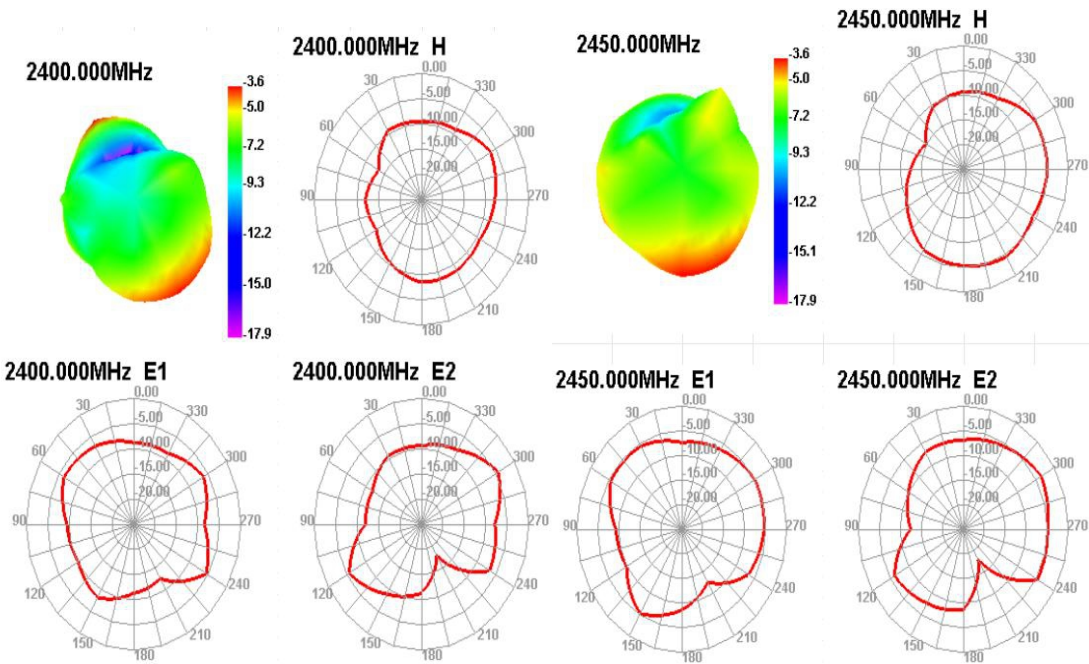

4. Structural Drawings

