

FCC Appendix RF Test Data for 5.2GWIFI

Product Name: W6C Tablet

Test Model: W6C

Environmental Conditions


Temperature:	24.1°C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Zoey Cao
Supervised by:	Eric Wang


1 Emission Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	34.800	5163.640	5198.440	---	---
		5200	35.240	5183.200	5218.440	---	---
		5240	35.920	5222.400	5258.320	---	---
11N20SISO	Ant1	5180	37.920	5161.840	5199.760	---	---
		5200	38.360	5181.160	5219.520	---	---
		5240	37.160	5222.080	5259.240	---	---
11N40SISO	Ant1	5190	78.320	5151.440	5229.760	---	---
		5230	78.960	5191.040	5270.000	---	---
11AC20SISO	Ant1	5180	37.560	5160.800	5198.360	---	---
		5200	38.320	5181.480	5219.800	---	---
		5240	36.640	5222.320	5258.960	---	---
11AC40SISO	Ant1	5190	78.880	5151.120	5230.000	---	---
		5230	76.400	5192.800	5269.200	---	---
11AC80SISO	Ant1	5210	157.440	5132.560	5290.000	---	---

Test Graphs

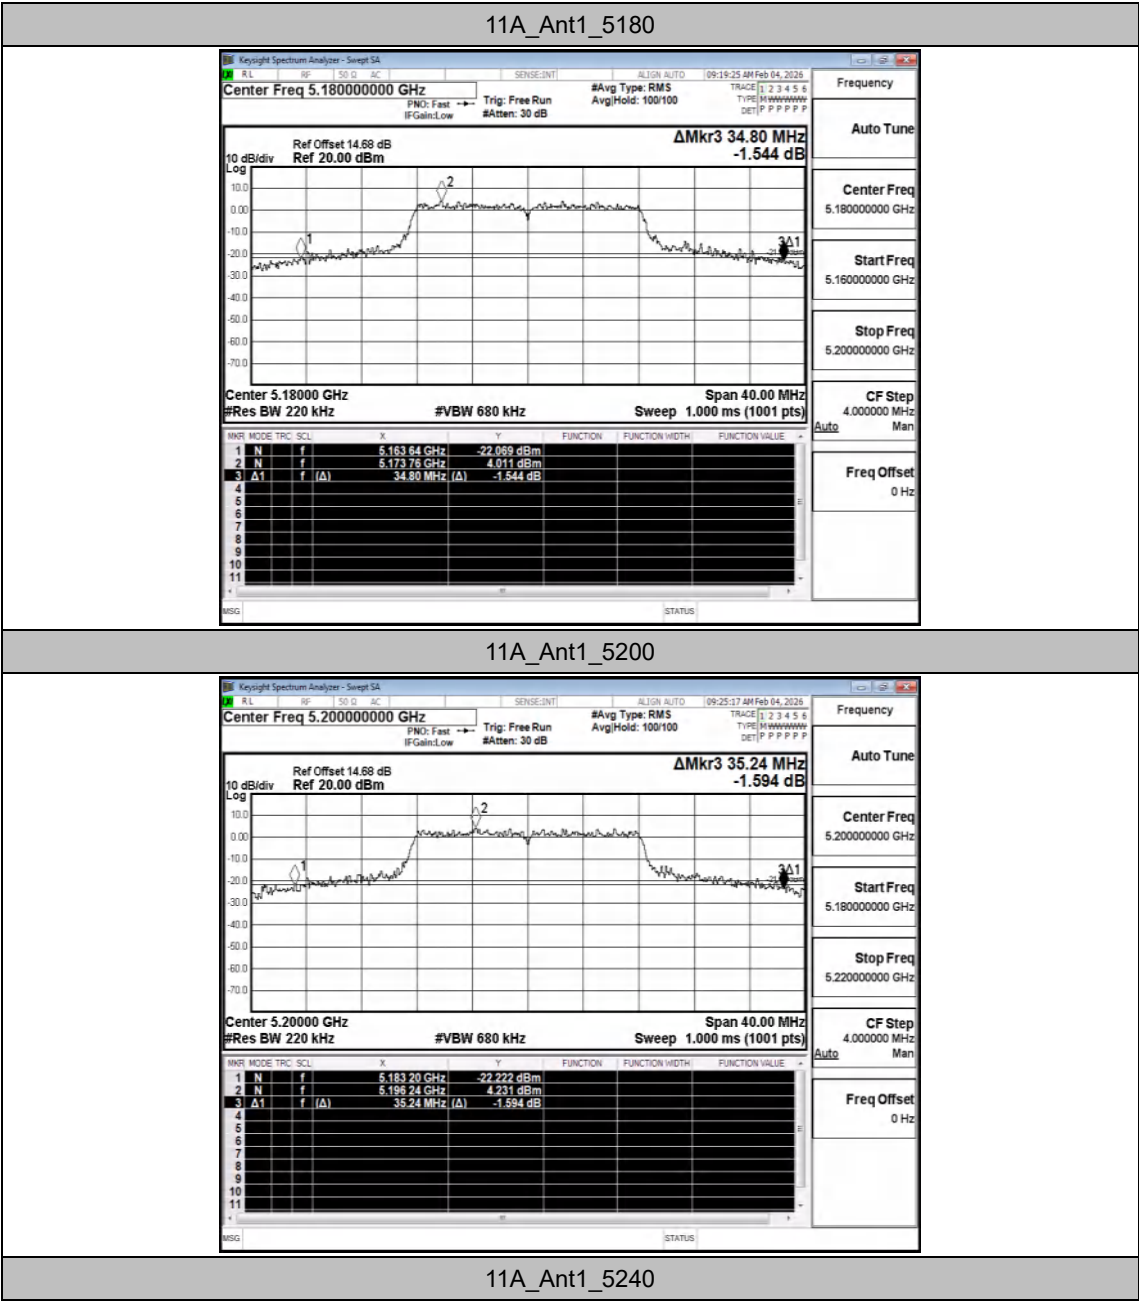


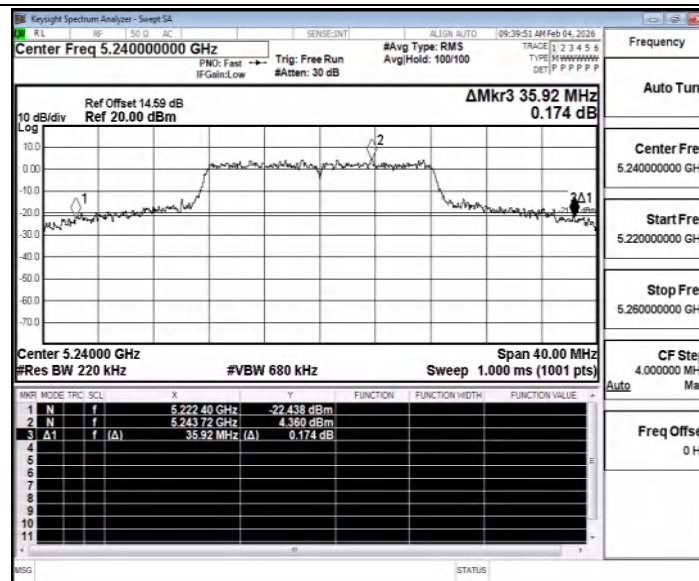


11N20SISO_Ant1_5180

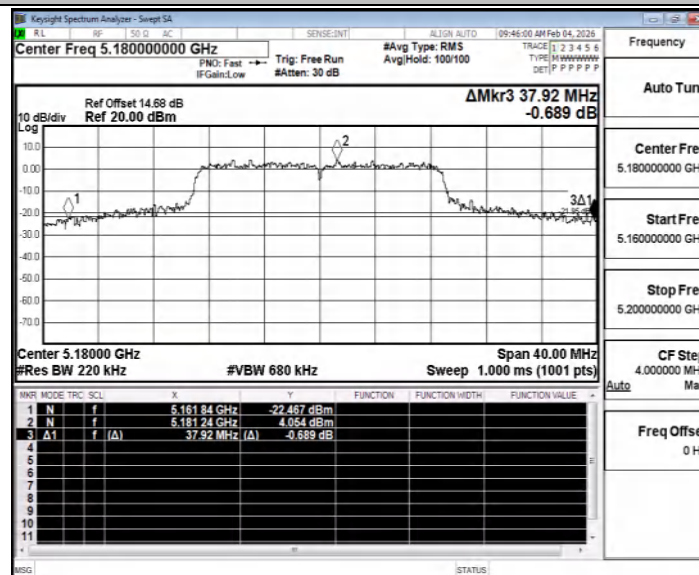


11N20SISO_Ant1_5200

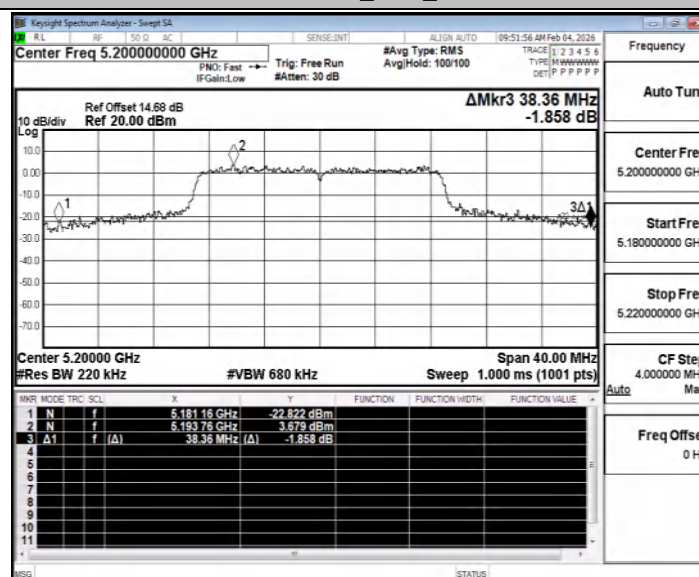


11N20SISO_Ant1_5240

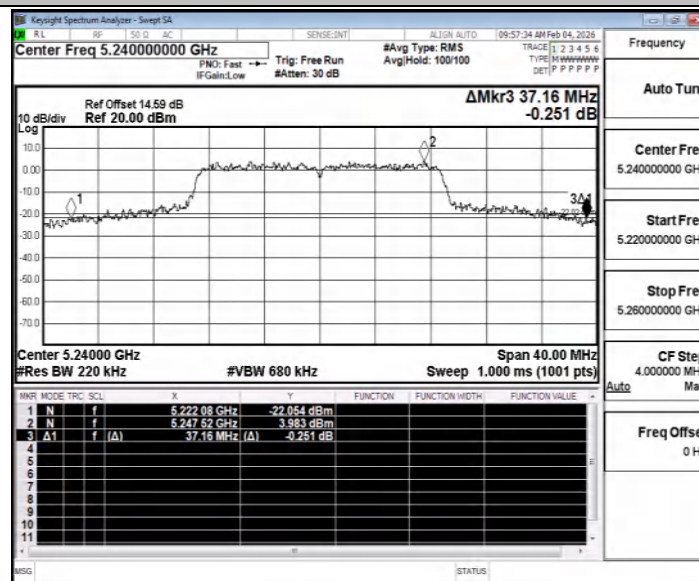


11N40SISO_Ant1_5190

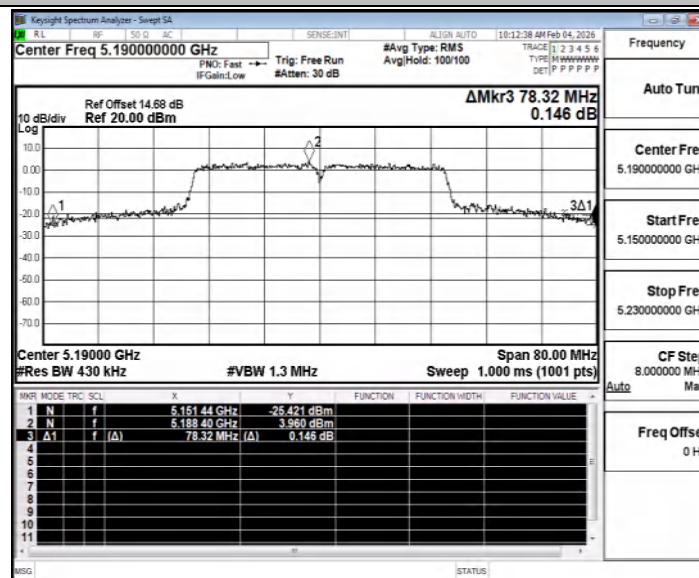


11N40SISO_Ant1_5230

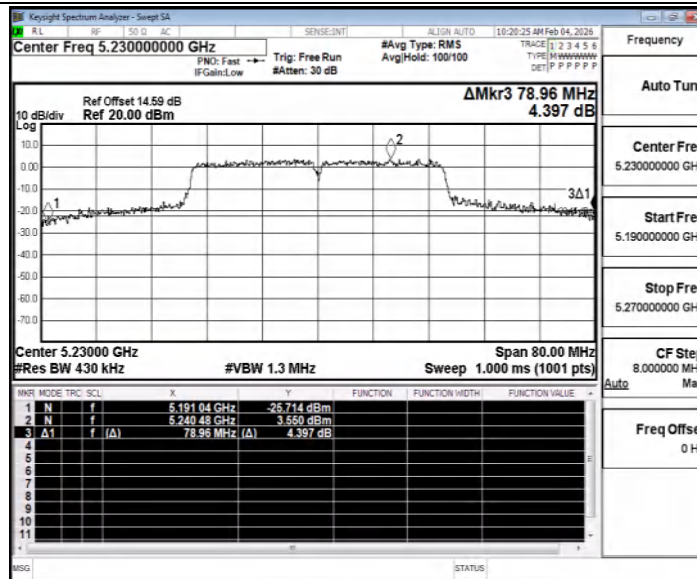



11AC20SISO_Ant1_5180

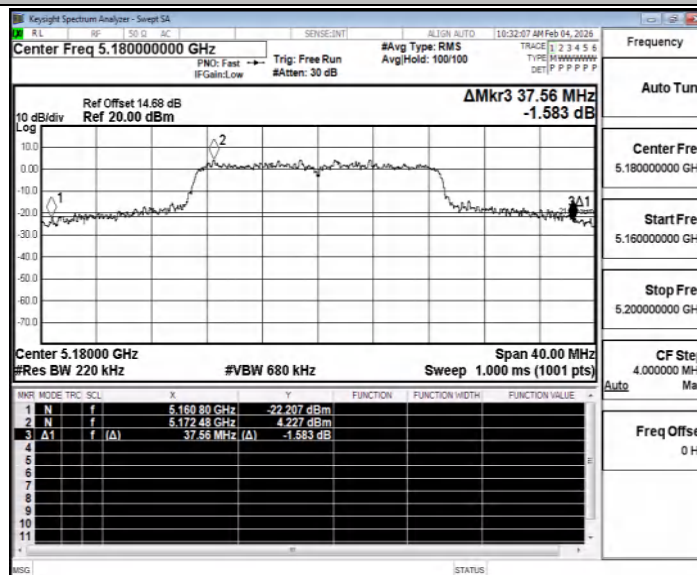

11AC20SISO_Ant1_5200

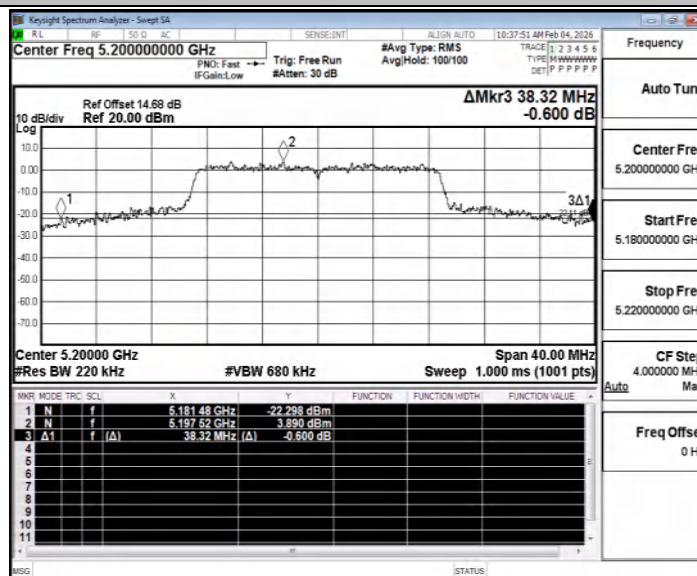

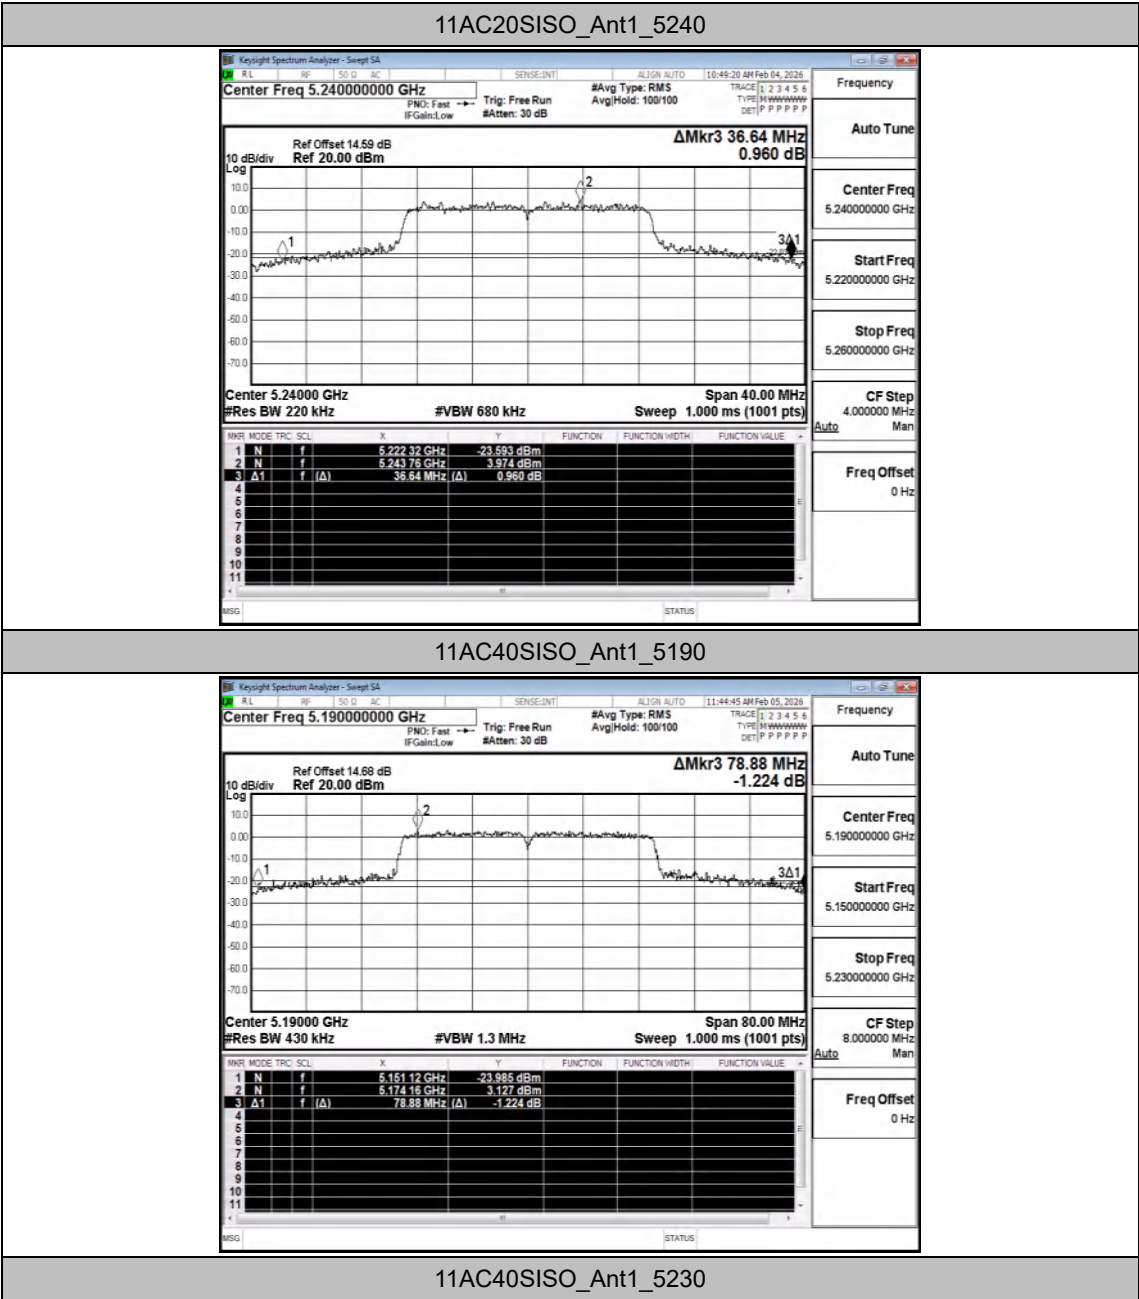

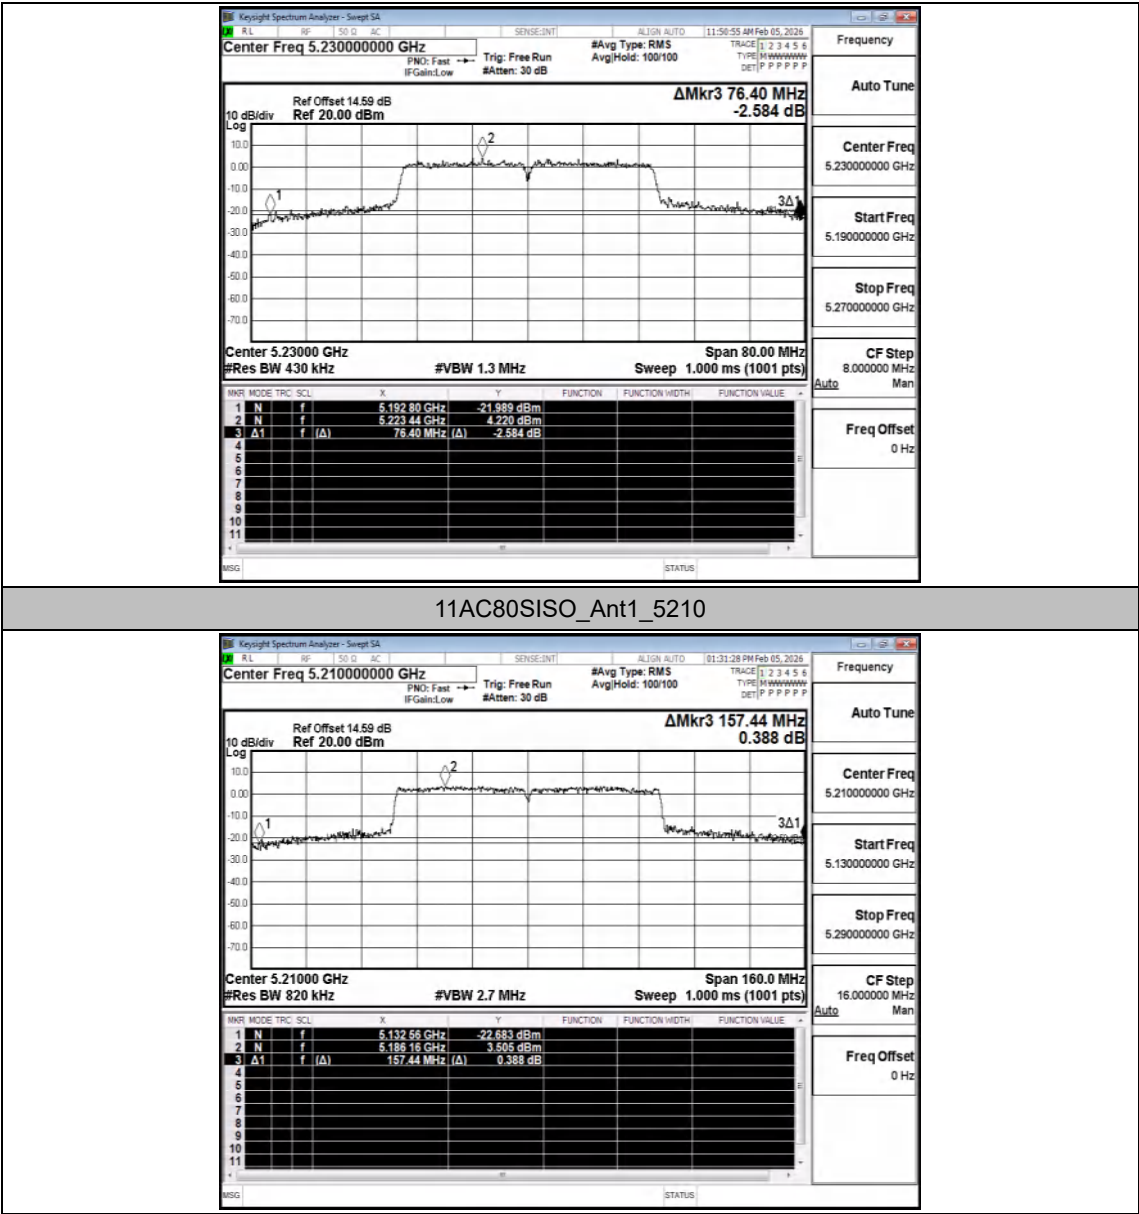

2 Maximum Conducted Output Power

Test Result Channel Power


Test Mode	Antenna	Freq(MHz)	Measured Power [dBm]	DC Factor [dB]	Result [dBm]	Limit Conducted (dBm)	Verdict
11A	Ant1	5180	15.08	0.69	15.77	24	PASS
		5200	15.22	0.69	15.91	24	PASS
		5240	14.90	0.69	15.59	24	PASS
11N20SISO	Ant1	5180	15.09	0.77	15.86	24	PASS
		5200	15.06	0.77	15.83	24	PASS
		5240	14.72	0.77	15.49	24	PASS
11N40SISO	Ant1	5190	14.95	1.36	16.31	24	PASS
		5230	14.68	1.36	16.04	24	PASS
11AC20SISO	Ant1	5180	15.17	0.56	15.73	24	PASS
		5200	15.08	0.56	15.64	24	PASS
		5240	14.80	0.56	15.36	24	PASS
11AC40SISO	Ant1	5190	15.01	1.06	16.07	24	PASS
		5230	14.82	1.06	15.88	24	PASS
11AC80SISO	Ant1	5210	14.26	2.43	16.69	24	PASS


3 Maximum Power Spectral Density Level

Test Result


TestMode	Antenna	Freq (MHz)	Conducted PSD (dBm/MHz)	DC Factor	Total PSD (dBm/MHz)]	Limit (dBm/MHz)	Verdict
11A	Ant1	5180	2.52	0.50	3.02	11	PASS
		5200	2.22	0.50	2.72	11	PASS
		5240	2.58	0.69	3.27	11	PASS
11N20SISO	Ant1	5180	2.3	0.74	3.04	11	PASS
		5200	1.74	0.70	2.44	11	PASS
		5240	2.01	0.77	2.78	11	PASS
11N40SISO	Ant1	5190	-0.78	1.08	0.30	11	PASS
		5230	-1.08	1.36	0.28	11	PASS
11AC20SISO	Ant1	5180	2.23	0.53	2.76	11	PASS
		5200	1.66	0.53	2.19	11	PASS
		5240	1.87	0.56	2.43	11	PASS
11AC40SISO	Ant1	5190	-1.11	1.00	-0.11	11	PASS
		5230	-1.33	1.06	-0.27	11	PASS
11AC80SISO	Ant1	5210	-4.54	2.43	-2.11	11	PASS

Test Graphs

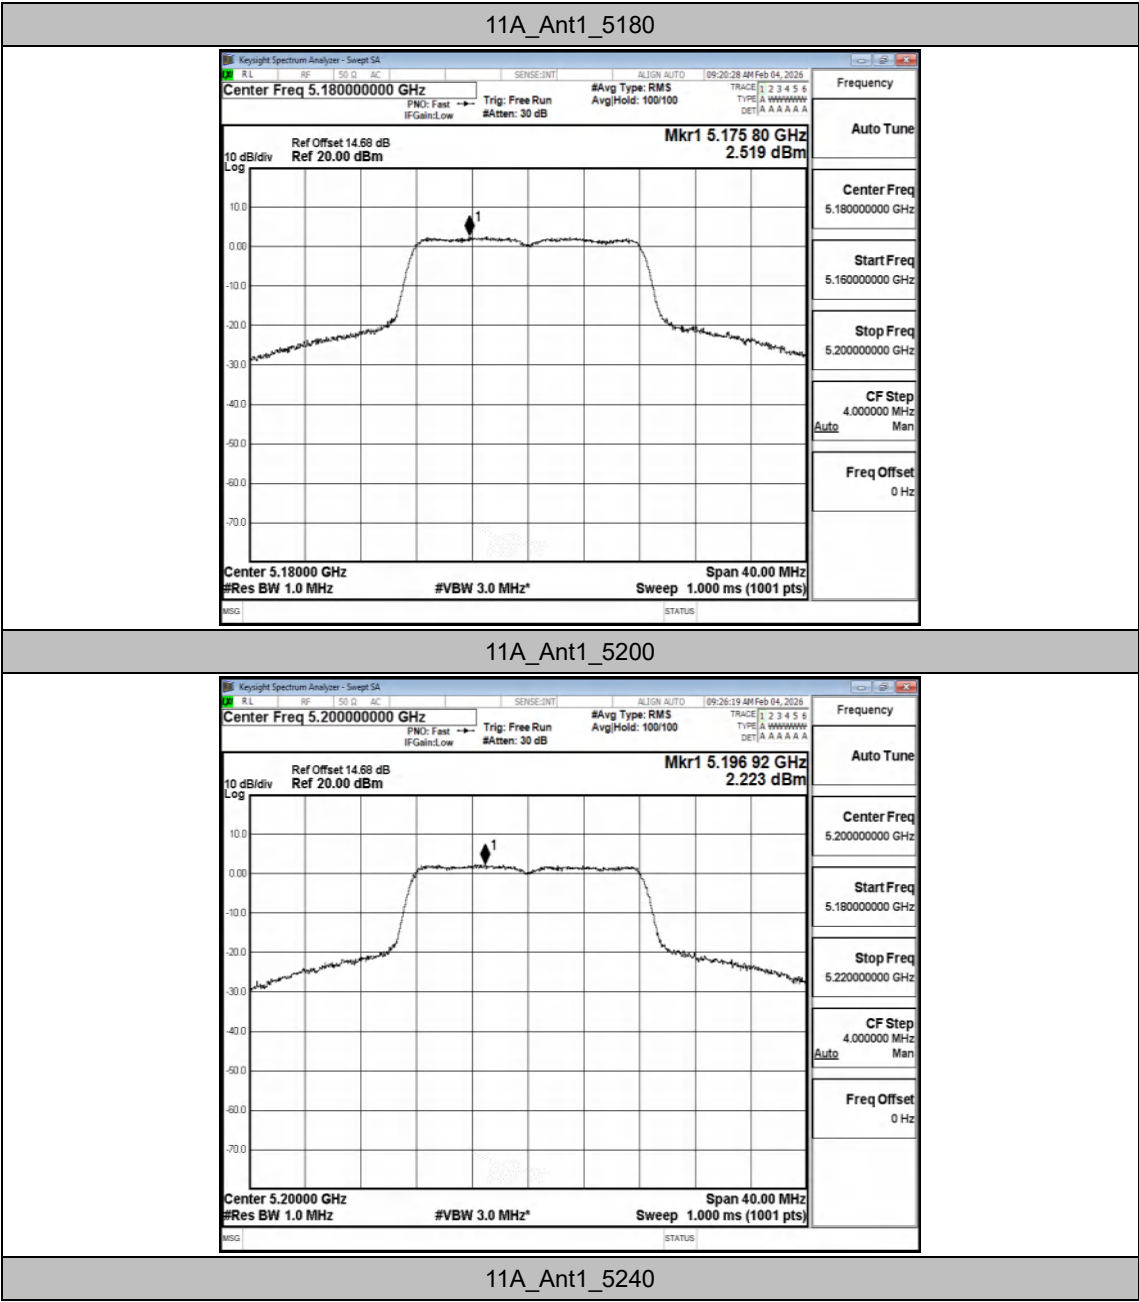


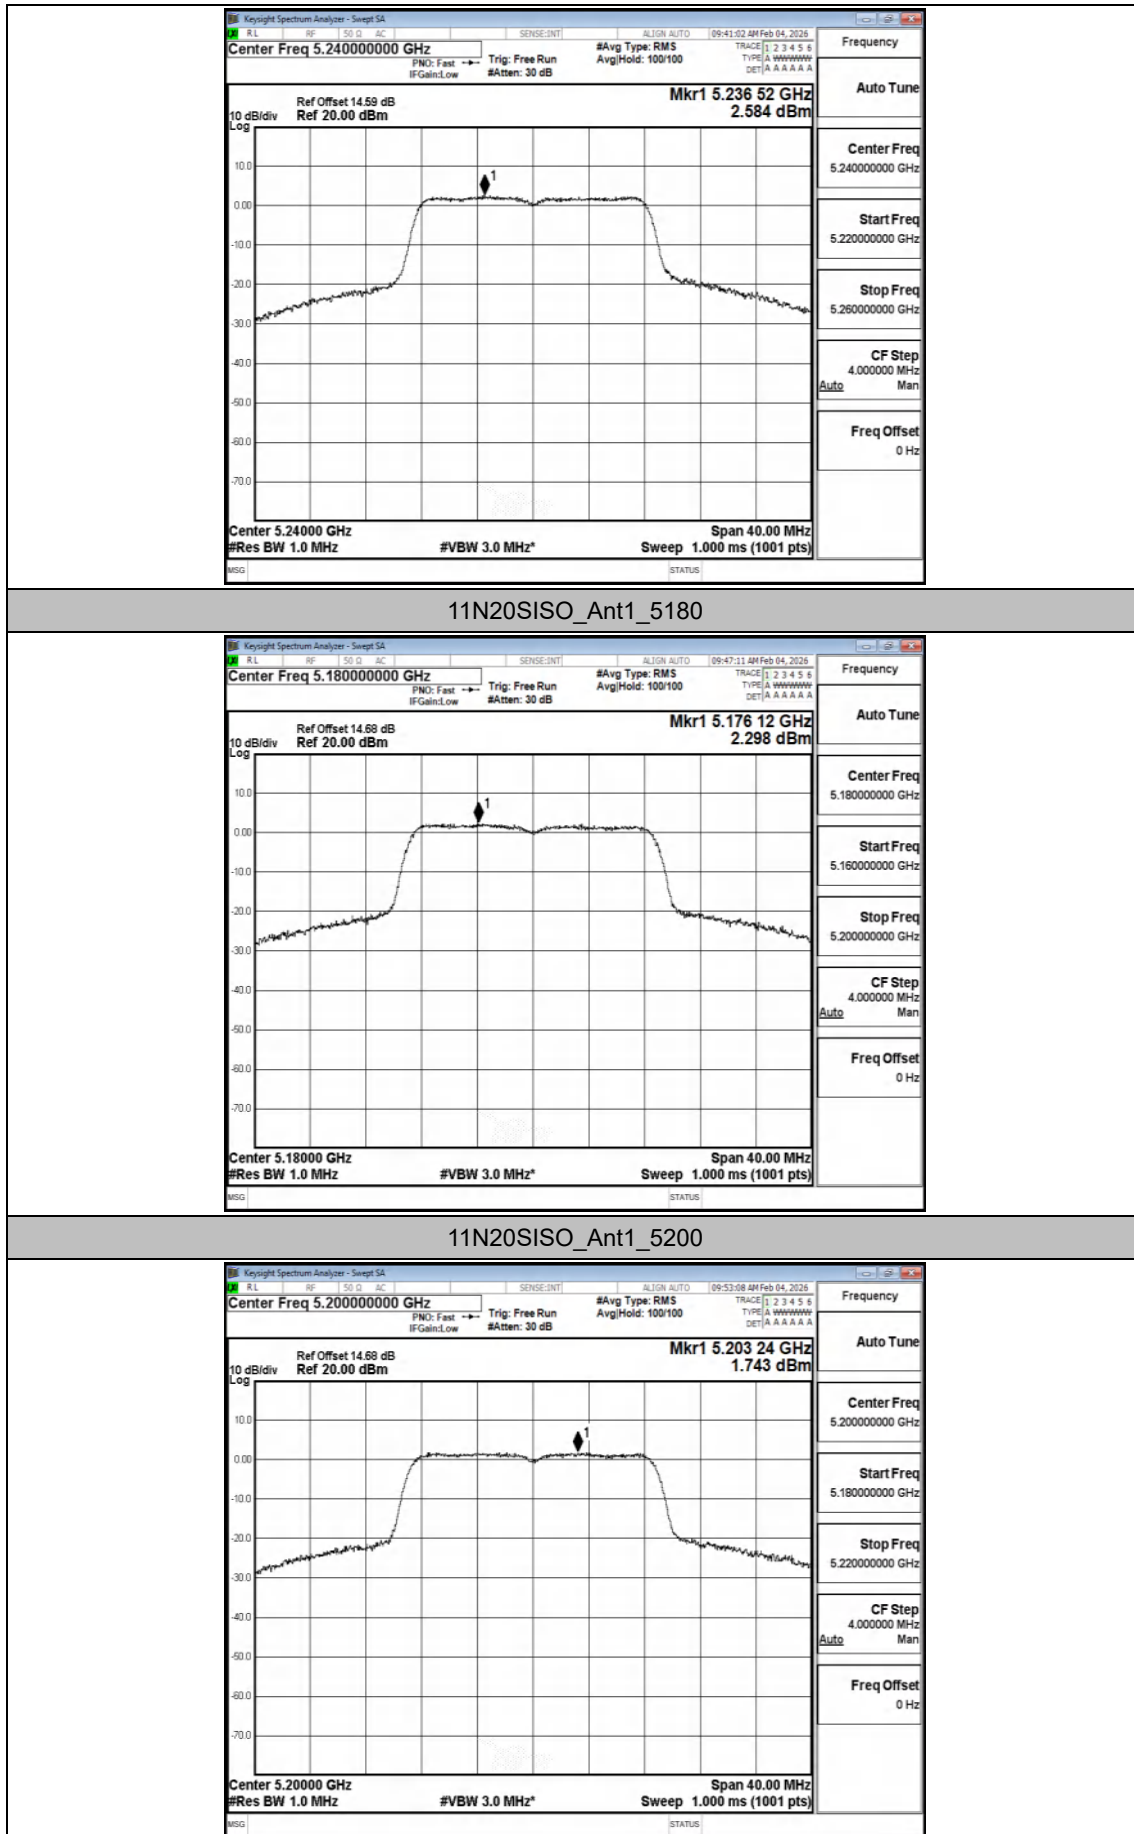


11N20SISO_Ant1_5240

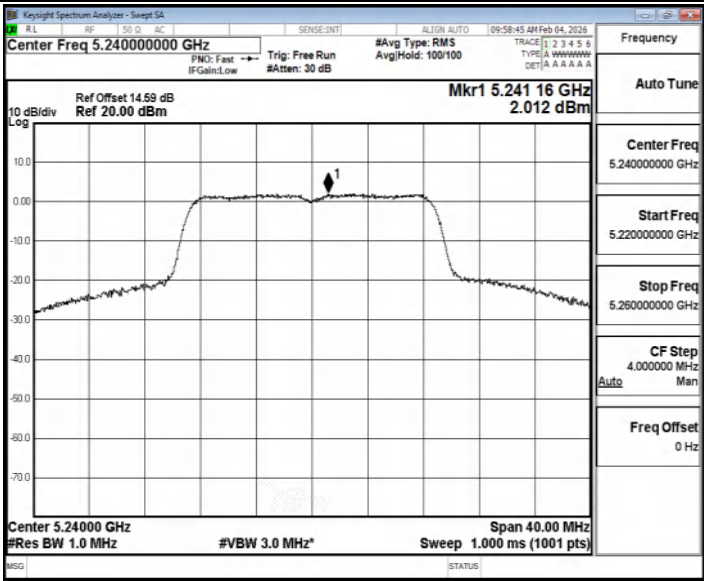



11N40SISO_Ant1_5190

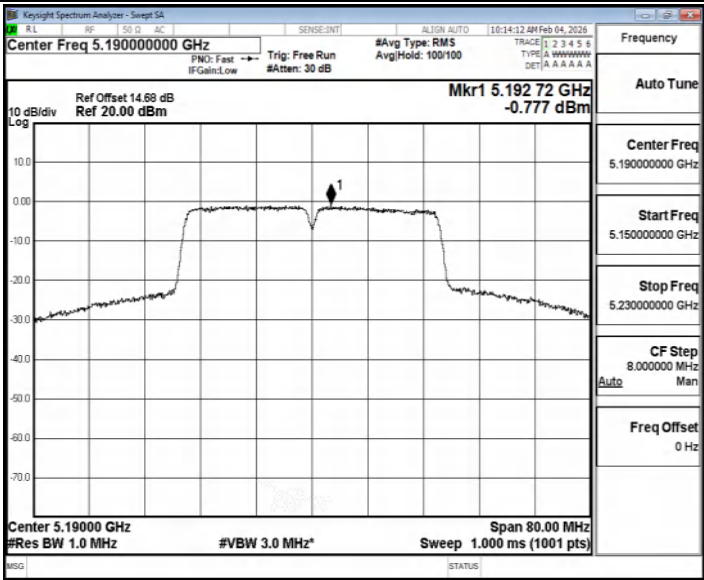

11N40SISO_Ant1_5230

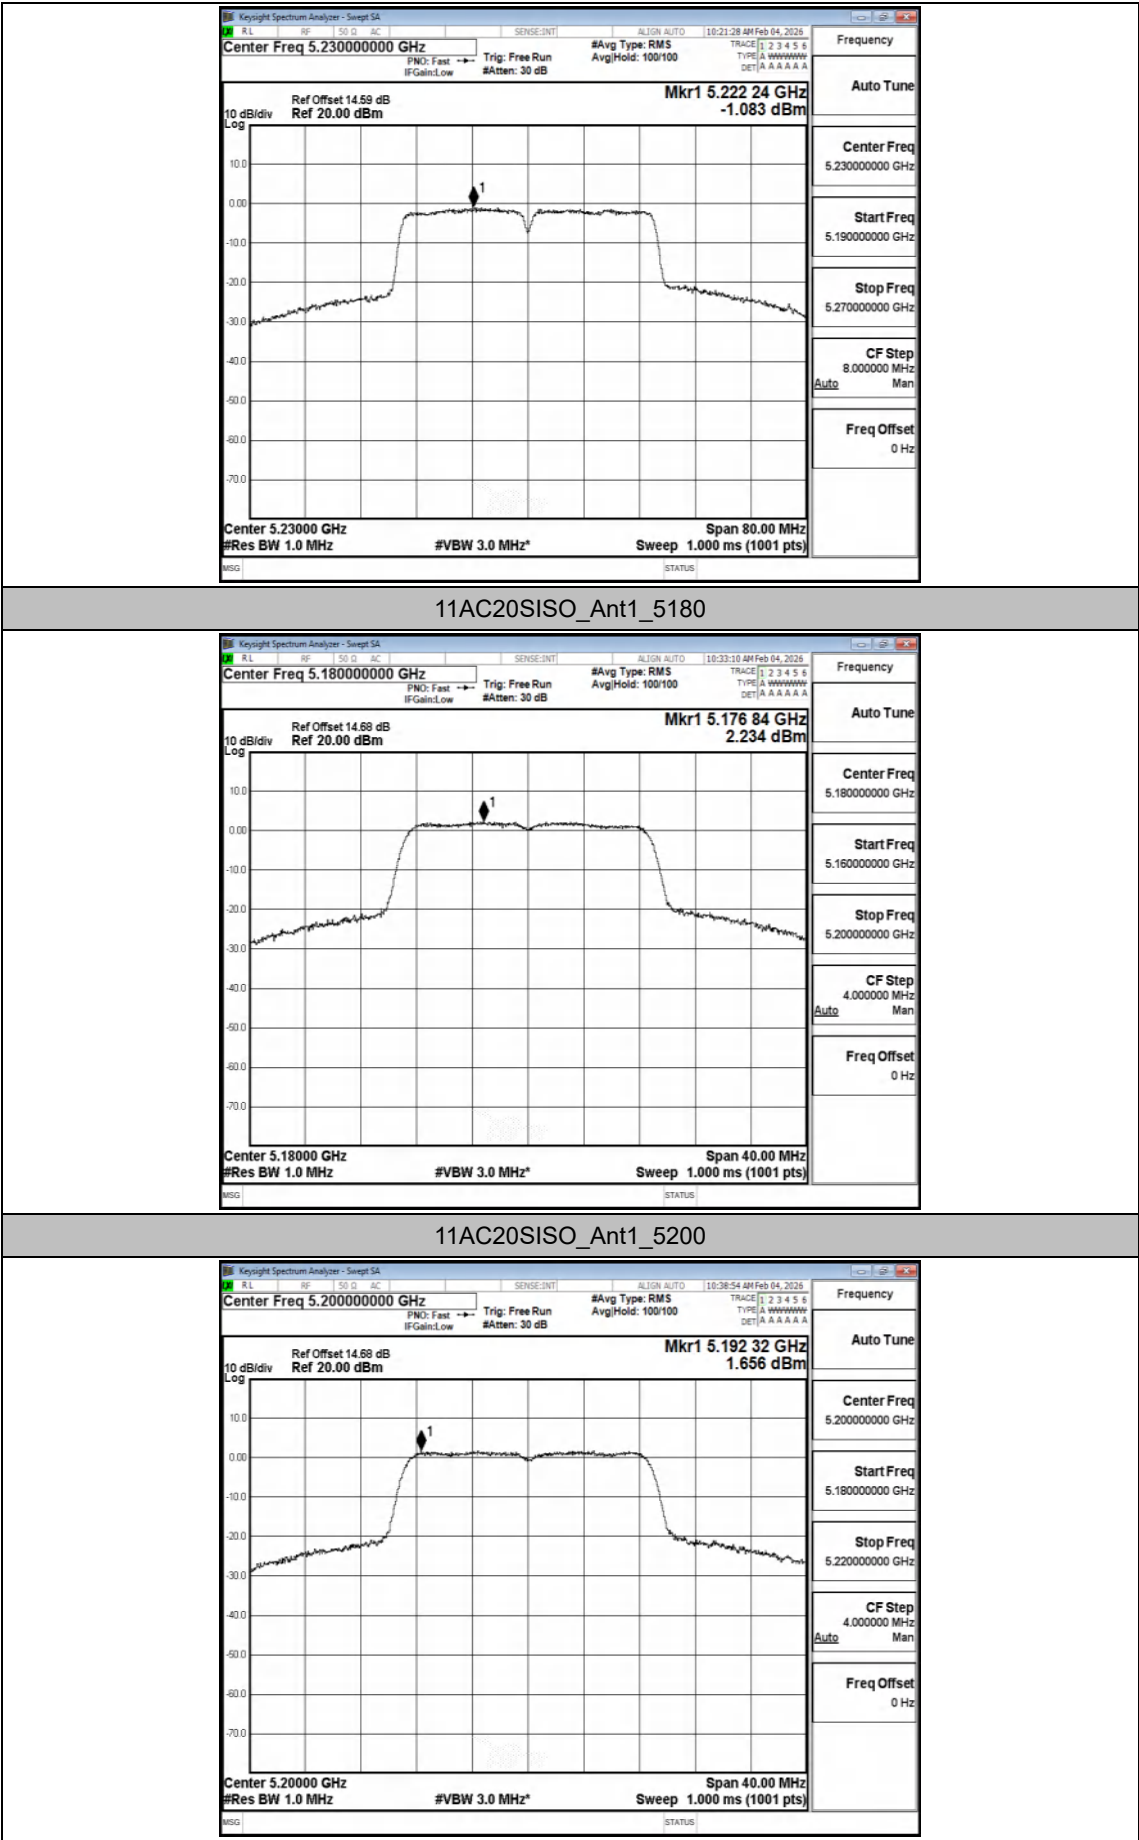

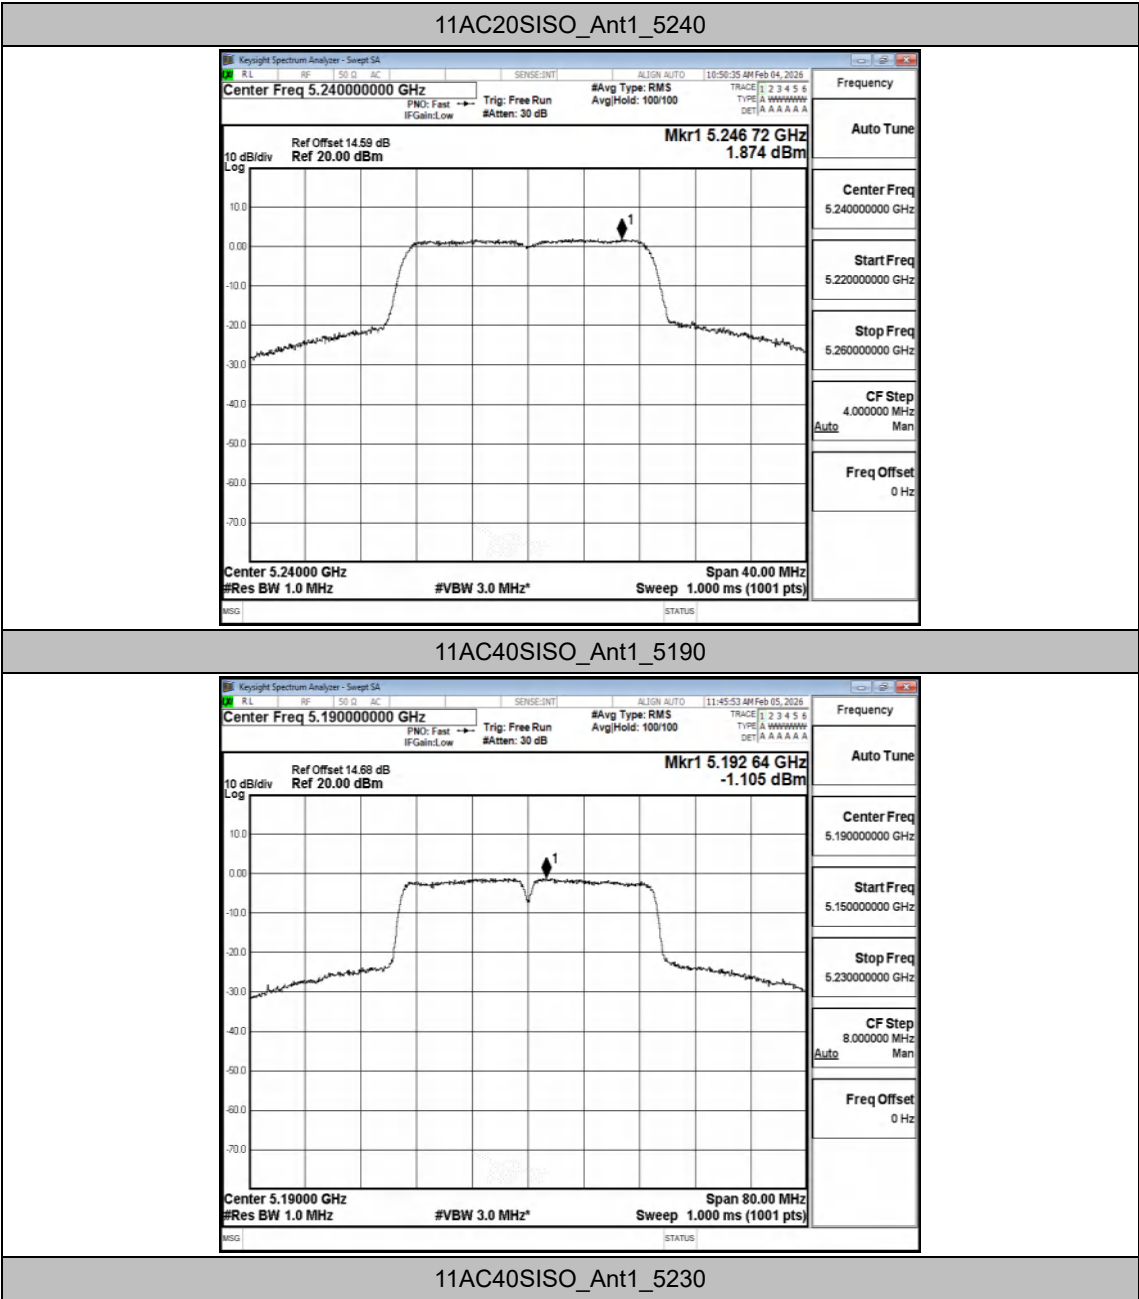

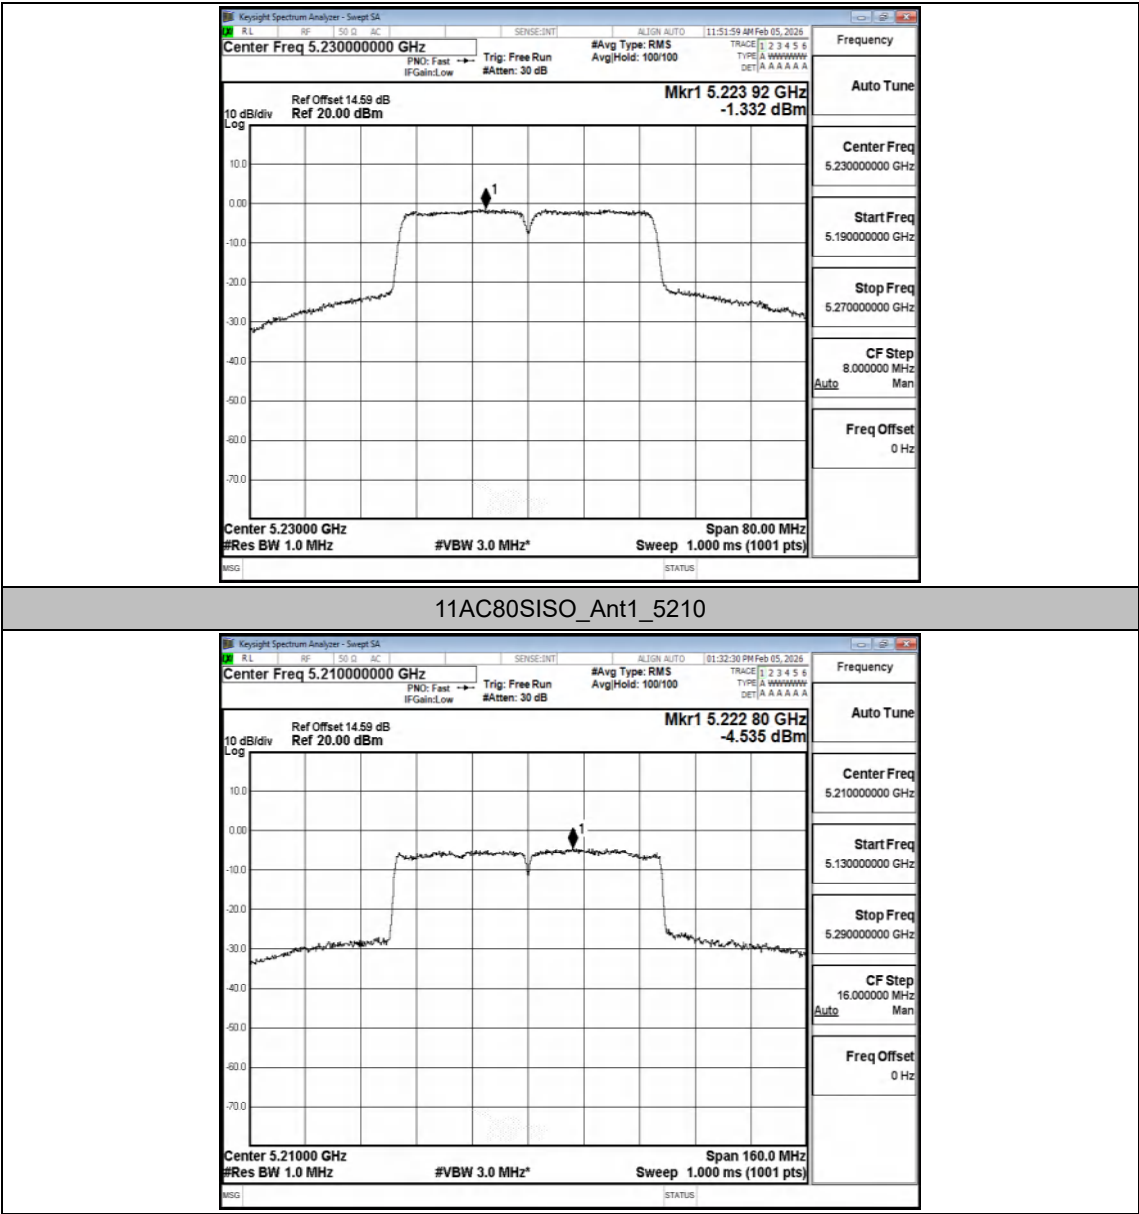

4 Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Freq (MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-61.18	≤-45.20	2.00	2.00	38.02	≤54	PASS
				AV	5148.900	-50.4	≤-45.20	2.00	2.00	48.80	≤54	PASS
				AV	5150.000	-50.45	≤-45.20	2.00	2.00	48.75	≤54	PASS
				Peak	4500.000	-53.05	≤-23.20	2.00	0.00	44.15	≤68.2	PASS
				Peak	5149.600	-39.45	≤-23.20	2.00	0.00	57.75	≤68.2	PASS
				Peak	5150.000	-39.41	≤-23.20	2.00	0.00	57.79	≤68.2	PASS
		High	5240	AV	5350.000	-63.89	≤-43.89	2.00	0.69	34.00	≤54	PASS
				AV	5356.800	-63.34	≤-43.89	2.00	0.69	34.55	≤54	PASS
				AV	5460.000	-65.43	≤-43.89	2.00	0.69	32.46	≤54	PASS
				Peak	5350.000	-55.99	≤-23.20	2.00	0.00	41.21	≤68.2	PASS
				Peak	5358.480	-52.55	≤-23.20	2.00	0.00	44.65	≤68.2	PASS
				Peak	5460.000	-57.11	≤-23.20	2.00	0.00	40.09	≤68.2	PASS
11N20SISO	Ant1	Low	5180	AV	4500.000	-60.87	≤-45.20	2.00	2.00	38.33	≤54	PASS
				AV	5149.600	-49.9	≤-45.20	2.00	2.00	49.30	≤54	PASS
				AV	5150.000	-49.85	≤-45.20	2.00	2.00	49.35	≤54	PASS
				Peak	4500.000	-52.4	≤-23.20	2.00	0.00	44.80	≤68.2	PASS
				Peak	5138.400	-37.26	≤-23.20	2.00	0.00	59.94	≤68.2	PASS
				Peak	5150.000	-38.36	≤-23.20	2.00	0.00	58.84	≤68.2	PASS
		High	5240	AV	5350.000	-63.74	≤-43.97	2.00	0.77	34.23	≤54	PASS
				AV	5351.520	-63.15	≤-43.97	2.00	0.77	34.82	≤54	PASS
				AV	5460.000	-65.66	≤-43.97	2.00	0.77	32.31	≤54	PASS
				Peak	5350.000	-53.73	≤-23.20	2.00	0.00	43.47	≤68.2	PASS
				Peak	5352.240	-51.68	≤-23.20	2.00	0.00	45.52	≤68.2	PASS
				Peak	5460.000	-58.19	≤-23.20	2.00	0.00	39.01	≤68.2	PASS
11N40SISO	Ant1	Low	5190	AV	4500.000	-66.76	≤-45.89	2.00	2.69	33.13	≤54	PASS
				AV	5148.200	-49.8	≤-45.89	2.00	2.69	50.09	≤54	PASS
				AV	5150.000	-49.25	≤-45.89	2.00	2.69	50.64	≤54	PASS
				Peak	4500.000	-59.01	≤-23.20	2.00	0.00	38.19	≤68.2	PASS
				Peak	5149.600	-38.66	≤-23.20	2.00	0.00	58.54	≤68.2	PASS
				Peak	5150.000	-38.82	≤-23.20	2.00	0.00	58.38	≤68.2	PASS
		High	5230	AV	5350.000	-54.4	≤-44.56	2.00	1.36	44.16	≤54	PASS
				AV	5350.020	-54.4	≤-44.56	2.00	1.36	44.16	≤54	PASS
				AV	5460.000	-65.06	≤-44.56	2.00	1.36	33.50	≤54	PASS
				Peak	5350.000	-43.32	≤-23.20	2.00	0.00	53.88	≤68.2	PASS
				Peak	5351.060	-42.27	≤-23.20	2.00	0.00	54.93	≤68.2	PASS
				Peak	5460.000	-58.8	≤-23.20	2.00	0.00	38.40	≤68.2	PASS


11AC20SISO	Ant1	Low	5180	AV	4500.000	-60.71	≤-44.85	2.00	1.65	38.14	≤54	PASS
				AV	5149.600	-49.64	≤-44.85	2.00	1.65	49.21	≤54	PASS
				AV	5150.000	-49.18	≤-44.85	2.00	1.65	49.67	≤54	PASS
				Peak	4500.000	-52.38	≤-23.20	2.00	0.00	44.82	≤68.2	PASS
				Peak	5149.600	-39.07	≤-23.20	2.00	0.00	58.13	≤68.2	PASS
				Peak	5150.000	-39.07	≤-23.20	2.00	0.00	58.13	≤68.2	PASS
		High	5240	AV	5350.000	-59.55	≤-43.76	2.00	0.56	38.21	≤54	PASS
				AV	5361.600	-58.92	≤-43.76	2.00	0.56	38.84	≤54	PASS
				AV	5460.000	-60.44	≤-43.76	2.00	0.56	37.32	≤54	PASS
				Peak	5350.000	-51.13	≤-23.20	2.00	0.00	46.07	≤68.2	PASS
				Peak	5353.200	-48.62	≤-23.20	2.00	0.00	48.58	≤68.2	PASS
				Peak	5460.000	-52.07	≤-23.20	2.00	0.00	45.13	≤68.2	PASS
11AC40SISO	Ant1	Low	5190	AV	4500.000	-61.35	≤-45.63	2.00	2.43	38.28	≤54	PASS
				AV	5148.900	-47.46	≤-45.63	2.00	2.43	52.17	≤54	PASS
				AV	5150.000	-46.57	≤-45.63	2.00	2.43	53.06	≤54	PASS
				Peak	4500.000	-51.52	≤-23.20	2.00	0.00	45.68	≤68.2	PASS
				Peak	5146.100	-33.53	≤-23.20	2.00	0.00	63.67	≤68.2	PASS
				Peak	5150.000	-37.26	≤-23.20	2.00	0.00	59.94	≤68.2	PASS
		High	5230	AV	5350.000	-55.13	≤-44.26	2.00	1.06	43.13	≤54	PASS
				AV	5351.060	-54.52	≤-44.26	2.00	1.06	43.74	≤54	PASS
				AV	5460.000	-60.12	≤-44.26	2.00	1.06	38.14	≤54	PASS
				Peak	5350.000	-44.67	≤-23.20	2.00	0.00	52.53	≤68.2	PASS
				Peak	5351.320	-41.53	≤-23.20	2.00	0.00	55.67	≤68.2	PASS
				Peak	5460.000	-52.85	≤-23.20	2.00	0.00	44.35	≤68.2	PASS
11AC80SISO	Ant1	Low	5210	AV	4500.000	-61.29	≤-46.56	2.00	3.36	39.27	≤54	PASS
				AV	5147.250	-48.48	≤-46.56	2.00	3.36	52.08	≤54	PASS
				AV	5150.000	-47.68	≤-46.56	2.00	3.36	52.88	≤54	PASS
				Peak	4500.000	-52.25	≤-23.20	2.00	0.00	44.95	≤68.2	PASS
				Peak	5145.750	-35.39	≤-23.20	2.00	0.00	61.81	≤68.2	PASS
				Peak	5150.000	-38.03	≤-23.20	2.00	0.00	59.17	≤68.2	PASS
		High	5210	AV	5350.000	-53.73	≤-46.56	2.00	3.36	46.83	≤54	PASS
				AV	5357.800	-53.77	≤-46.56	2.00	3.36	46.79	≤54	PASS
				AV	5460.000	-60.6	≤-46.56	2.00	3.36	39.96	≤54	PASS
				Peak	5350.000	-41.44	≤-23.20	2.00	0.00	55.76	≤68.2	PASS
				Peak	5355.560	-40.83	≤-23.20	2.00	0.00	56.37	≤68.2	PASS
				Peak	5460.000	-51.43	≤-23.20	2.00	0.00	45.77	≤68.2	PASS

Note:


- For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

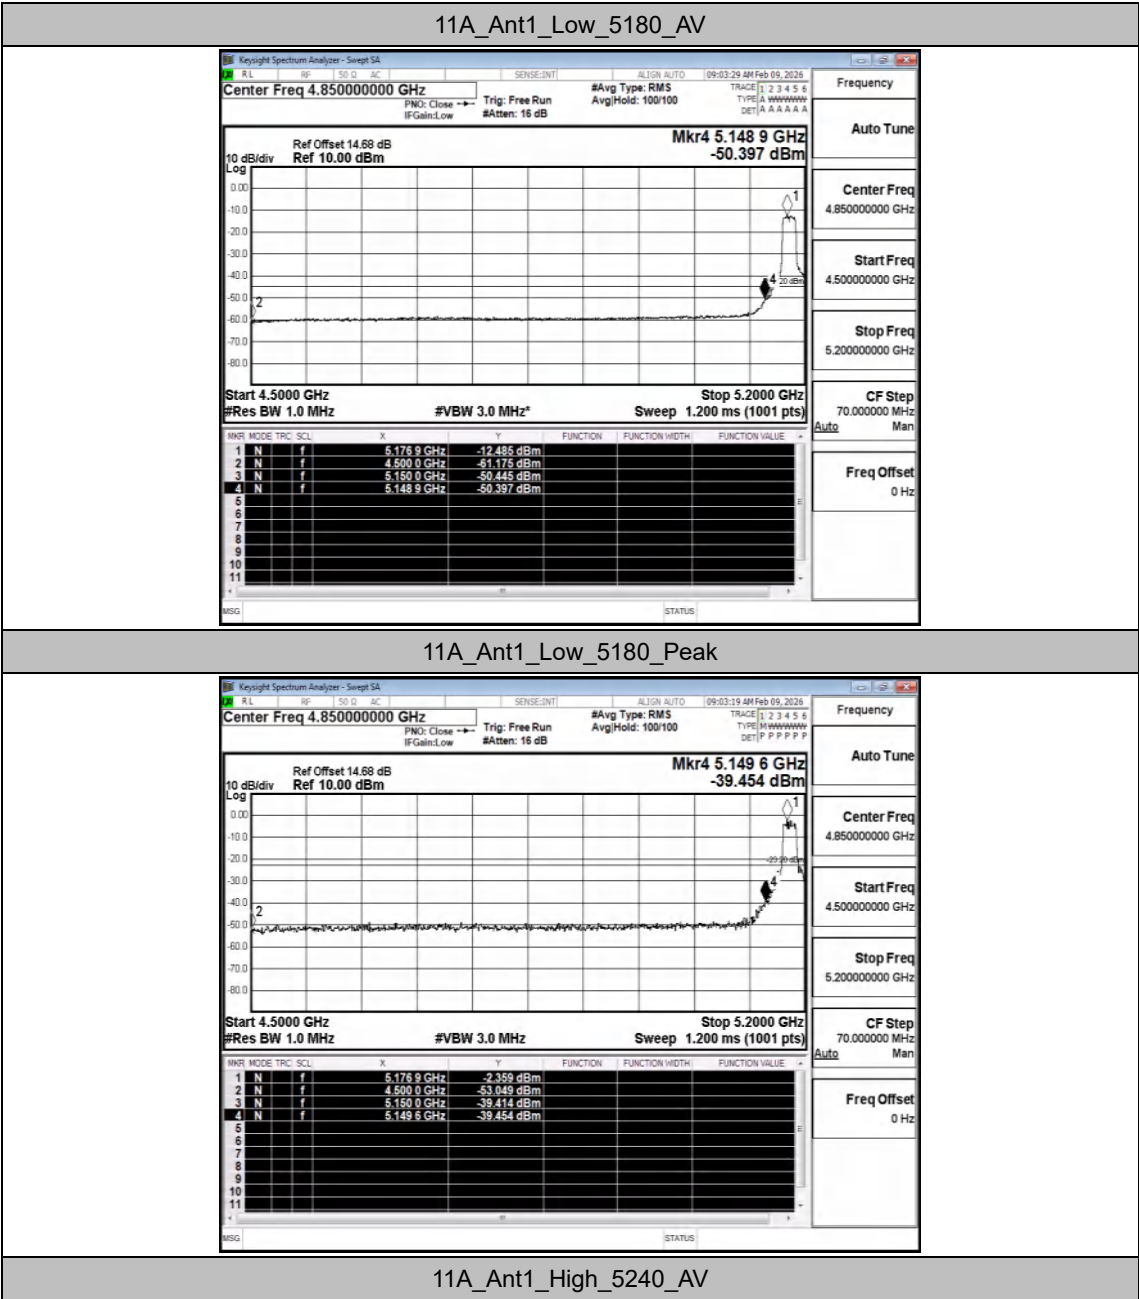


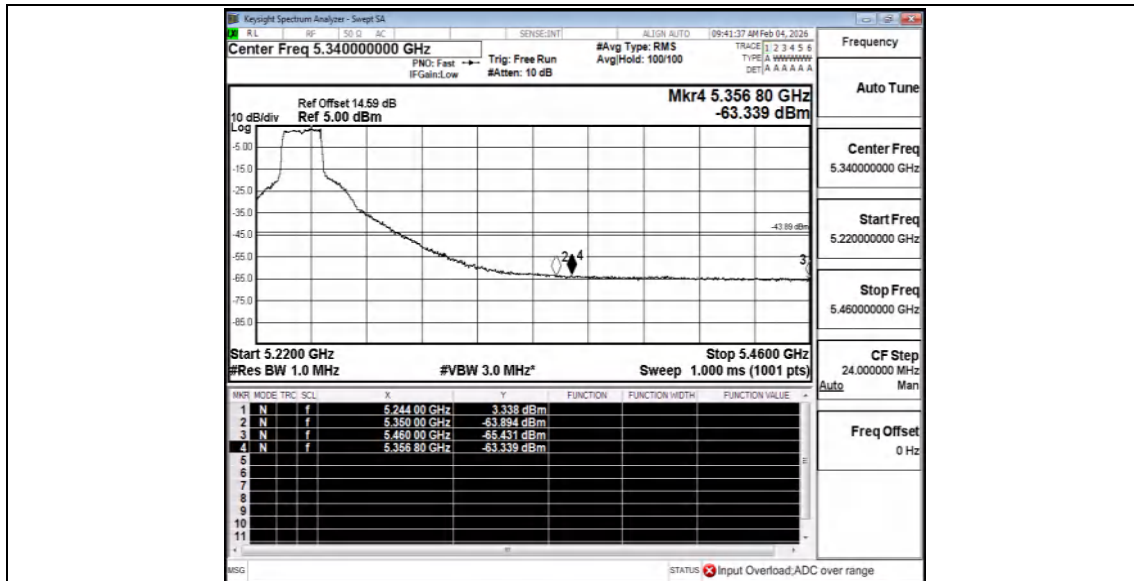



11A_Ant1_High_5240_Peak

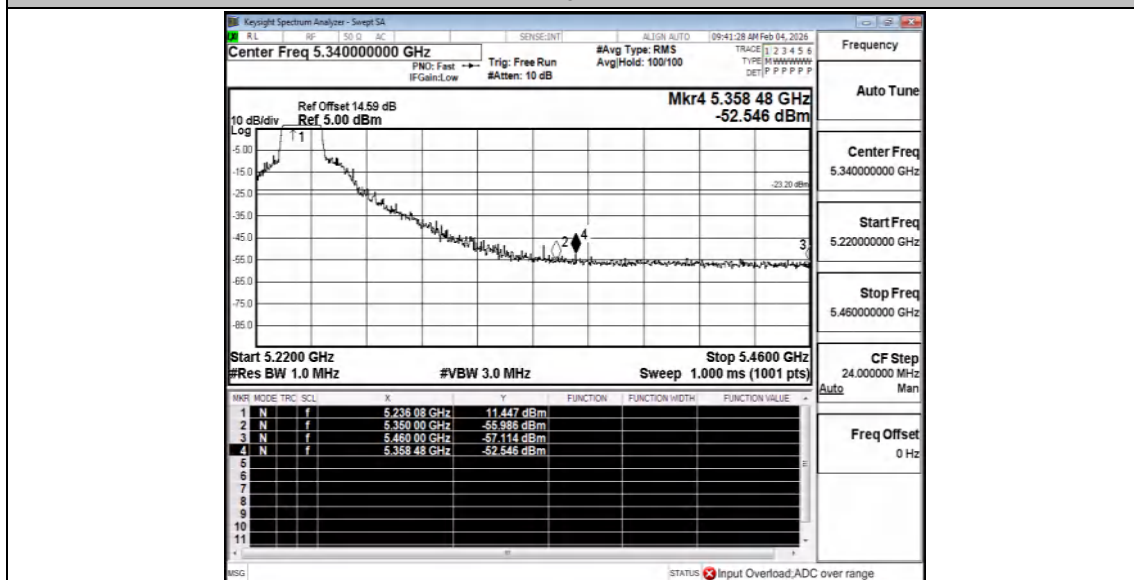


11N20SISO_Ant1_Low_5180_AV

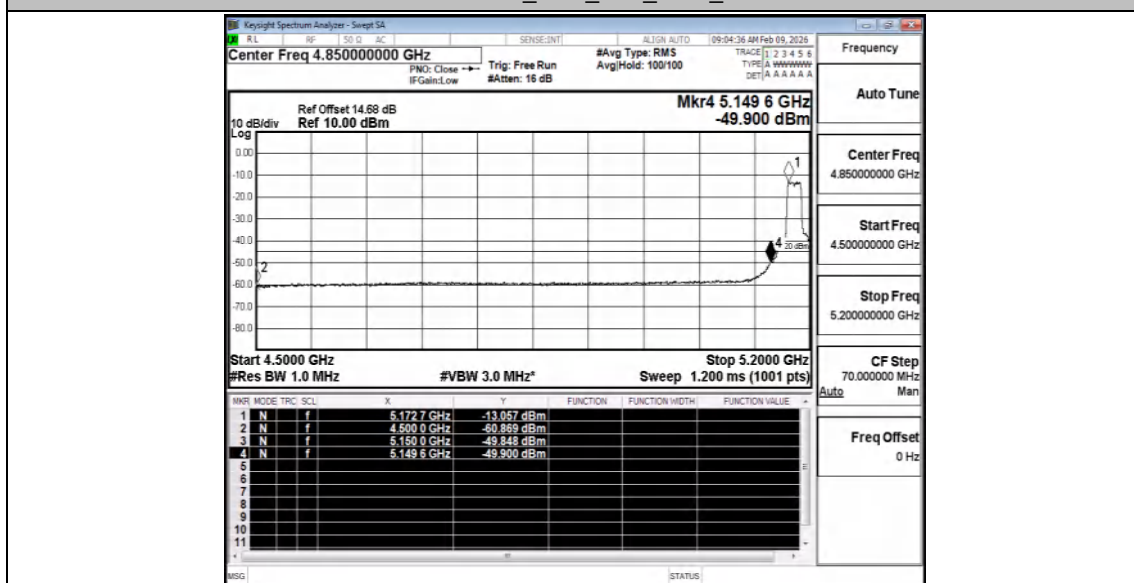

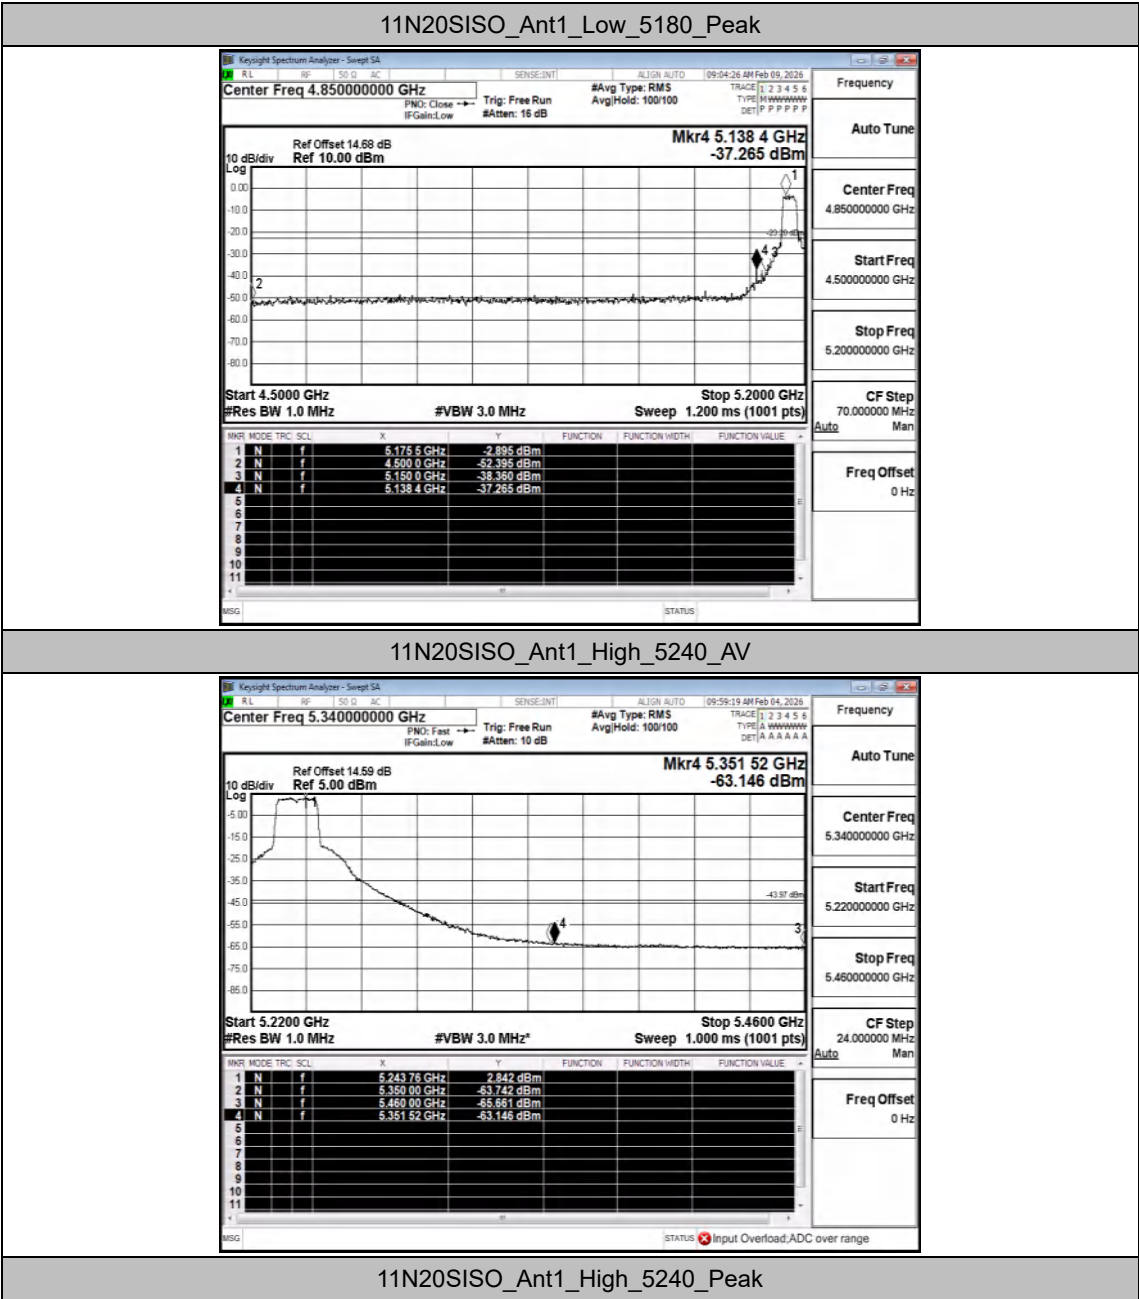


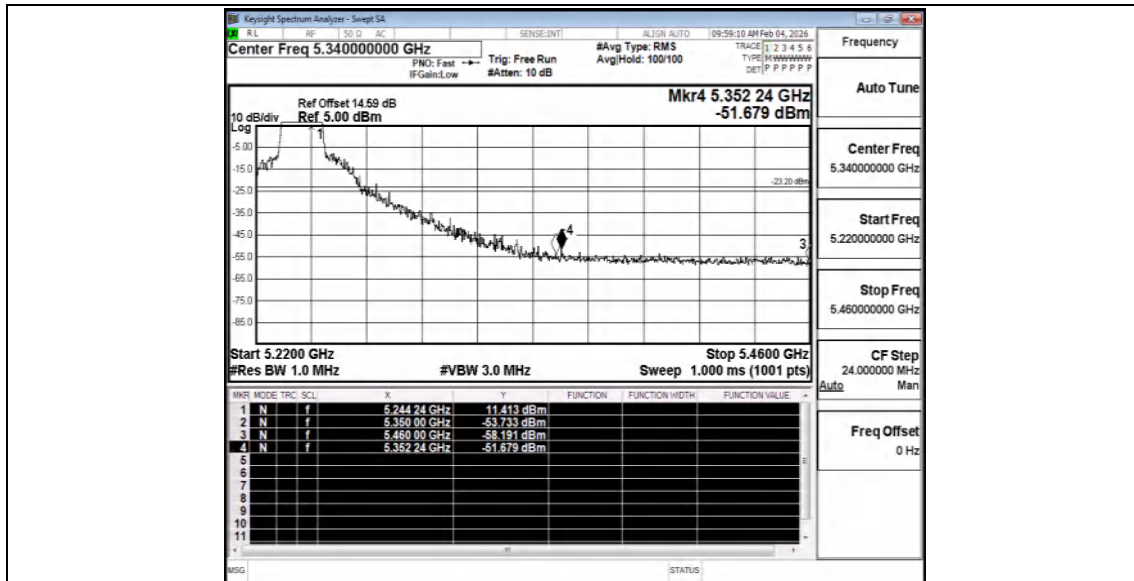



11N40SISO_Ant1_Low_5190_AV

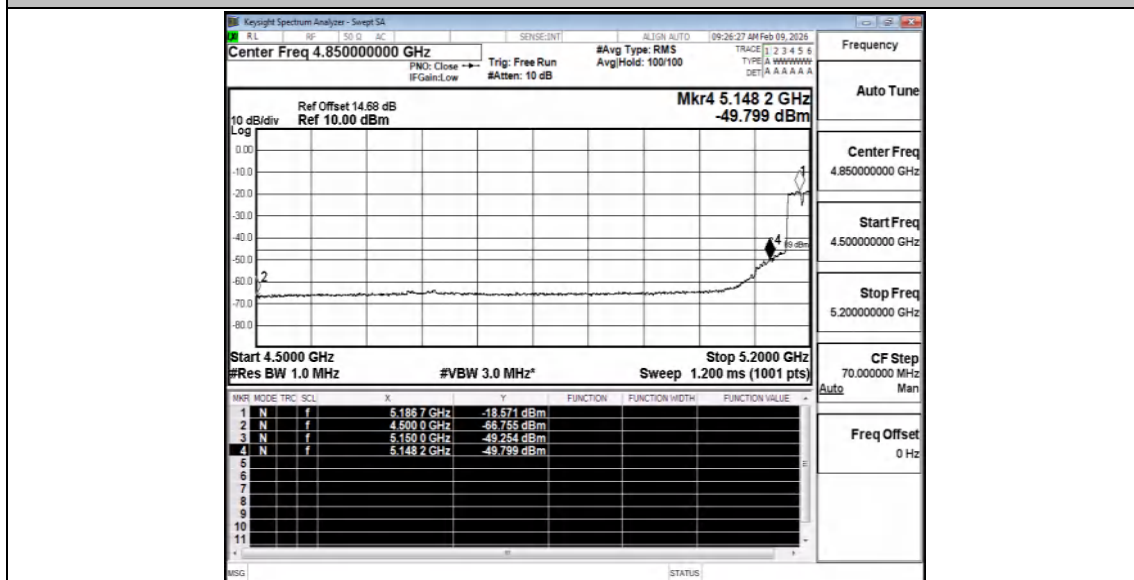


11N40SISO_Ant1_Low_5190_Peak

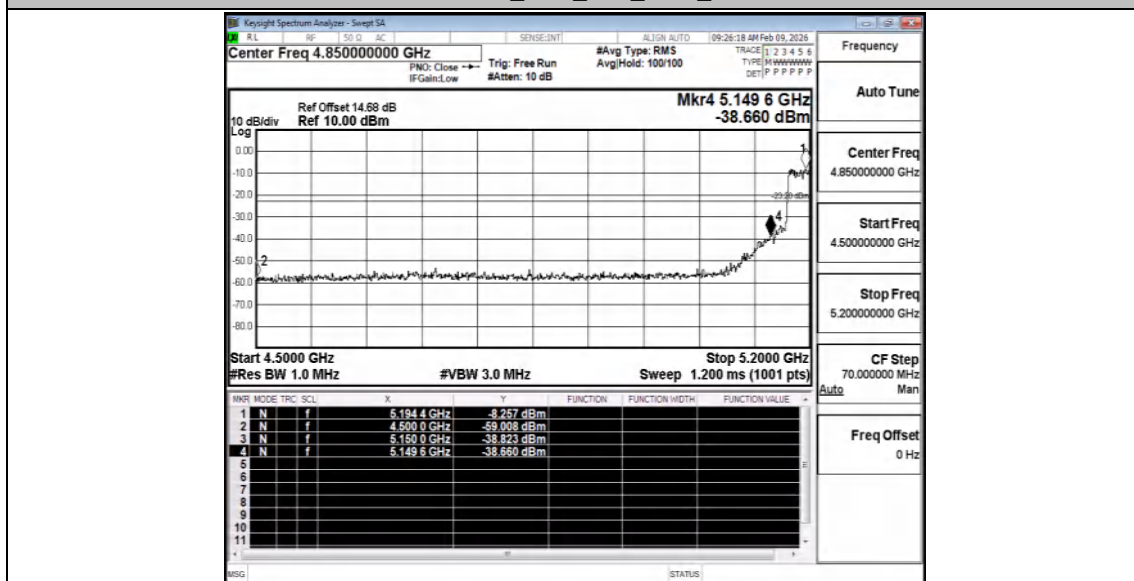

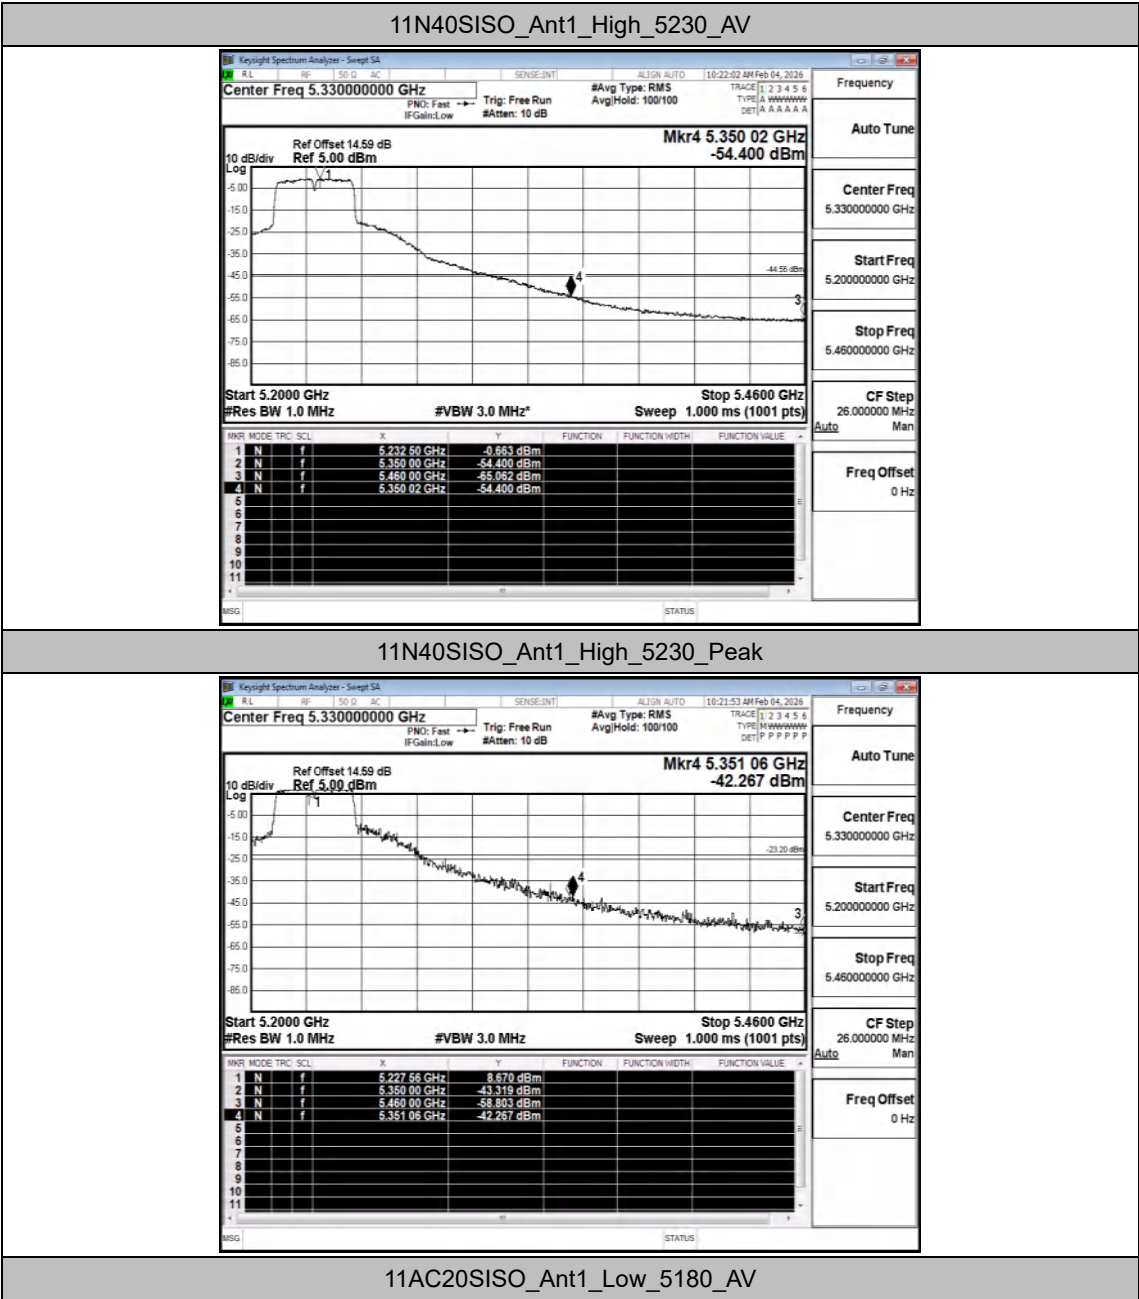


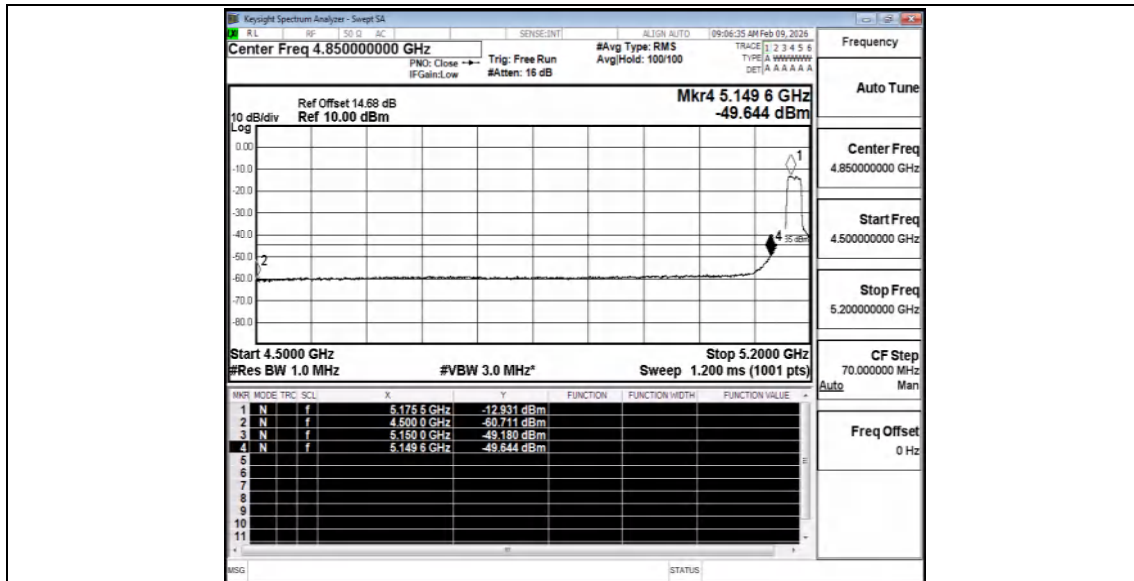



11AC20SISO_Ant1_Low_5180_Peak

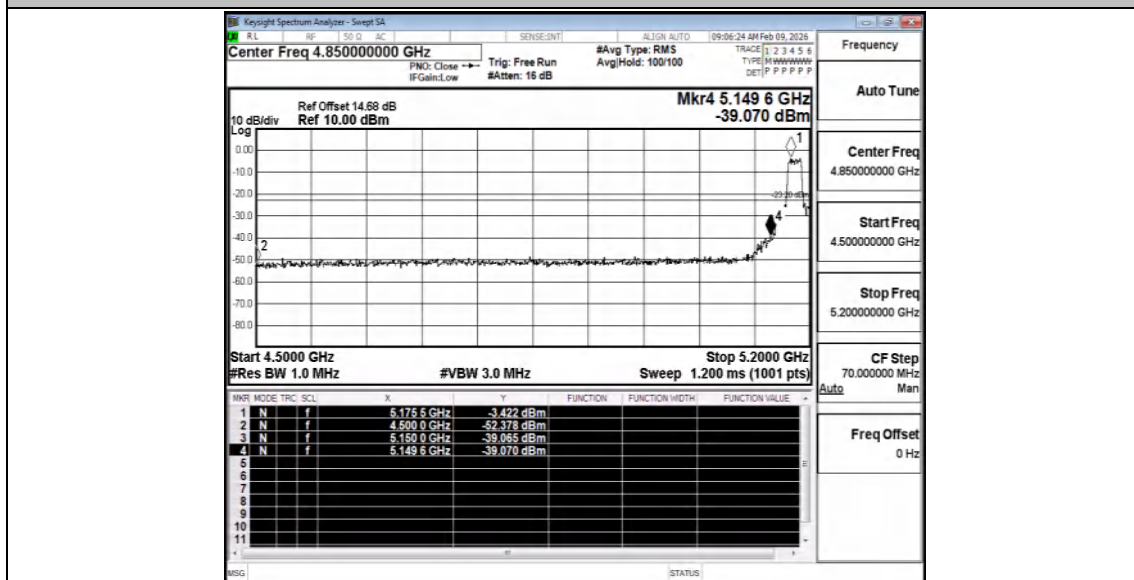


11AC20SISO_Ant1_High_5240_AV

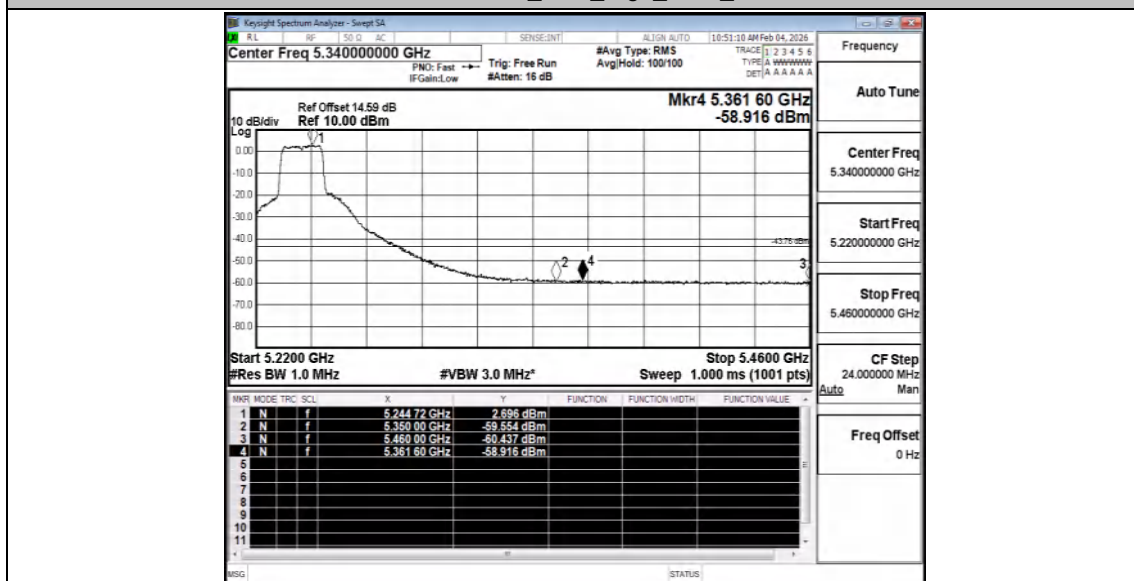

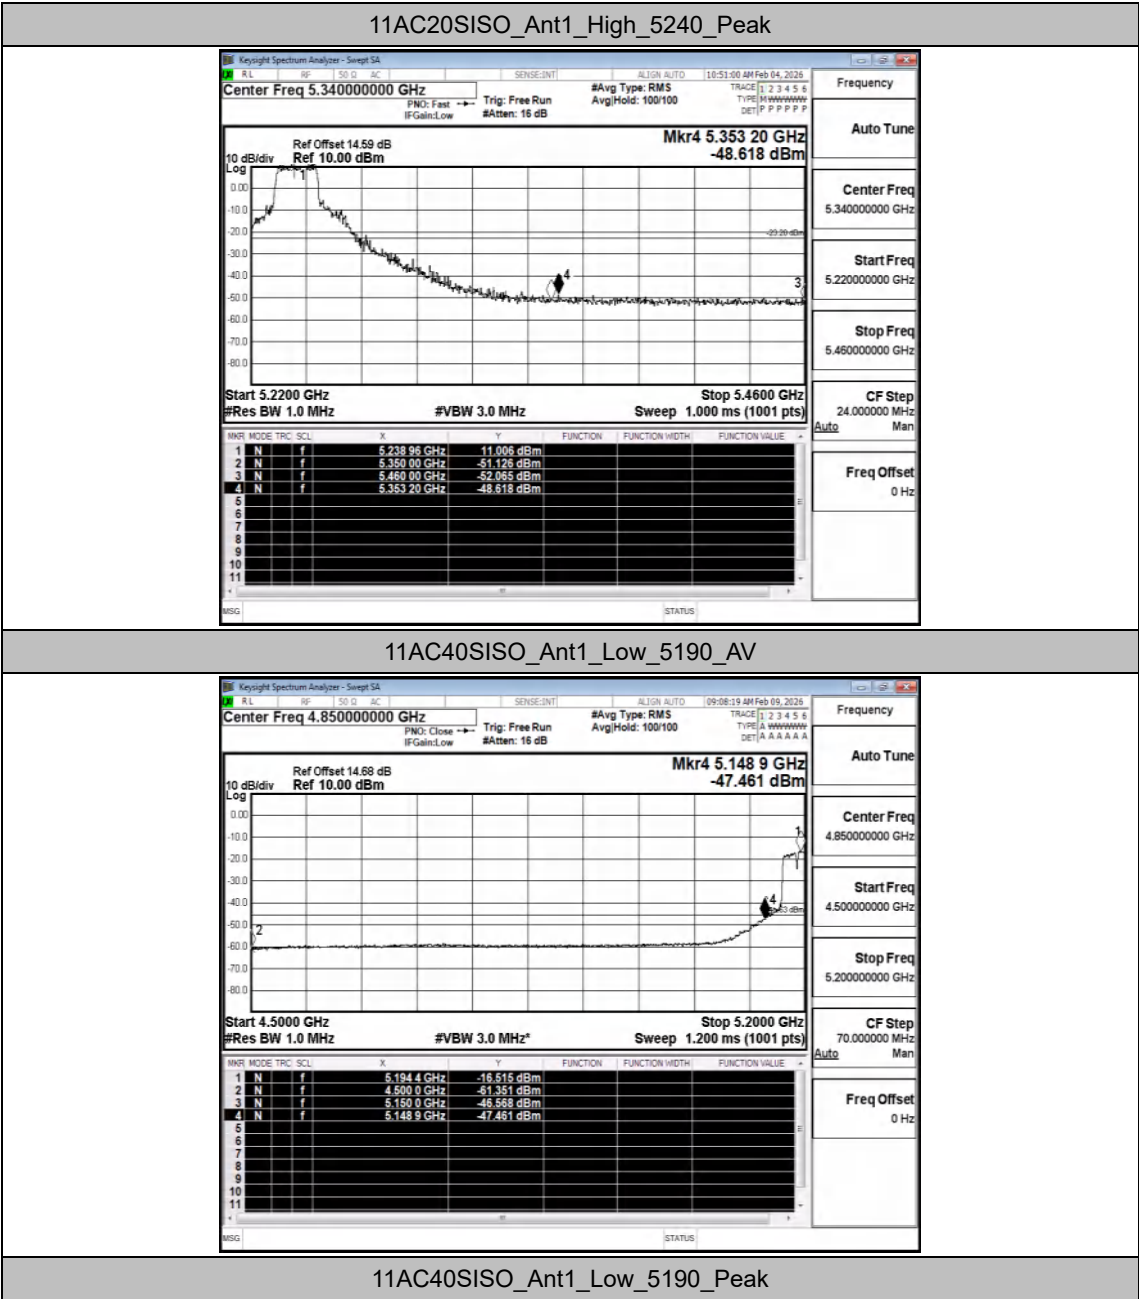


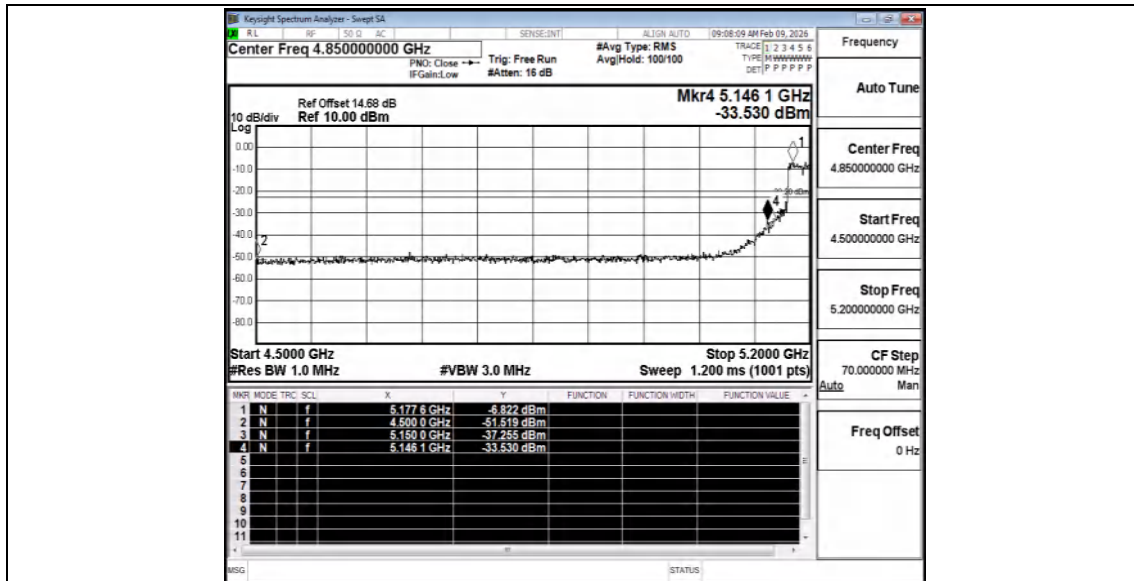



11AC40SISO_Ant1_High_5230_AV

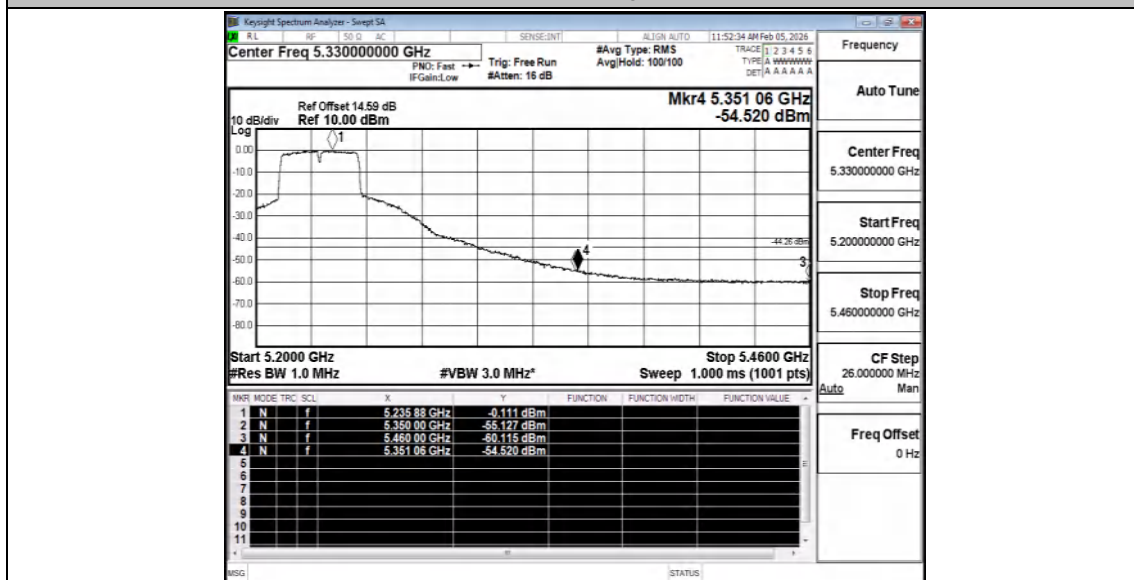

11AC40SISO_Ant1_High_5230_Peak

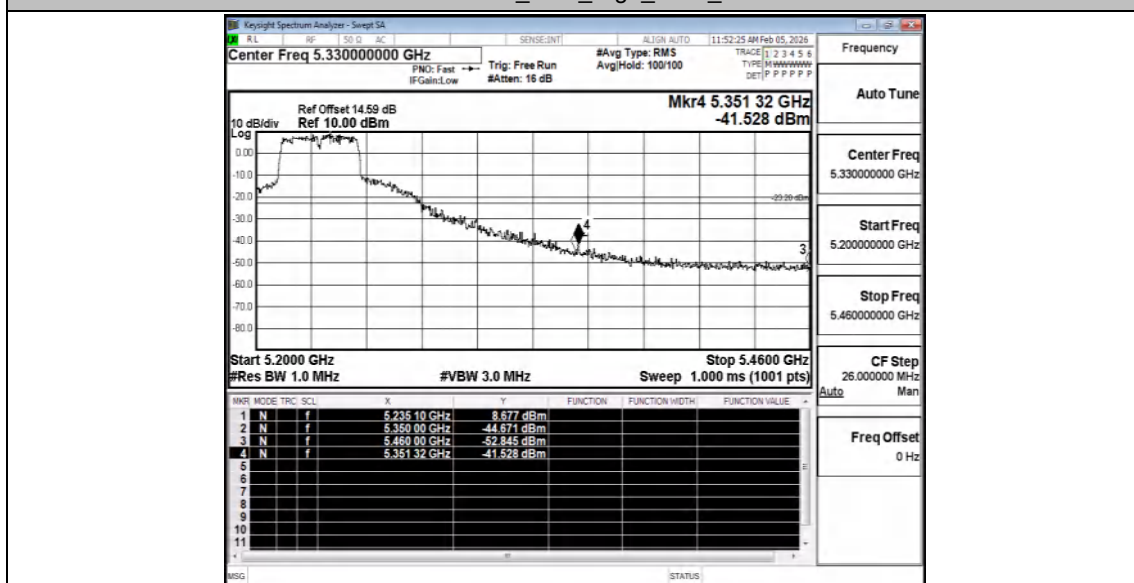

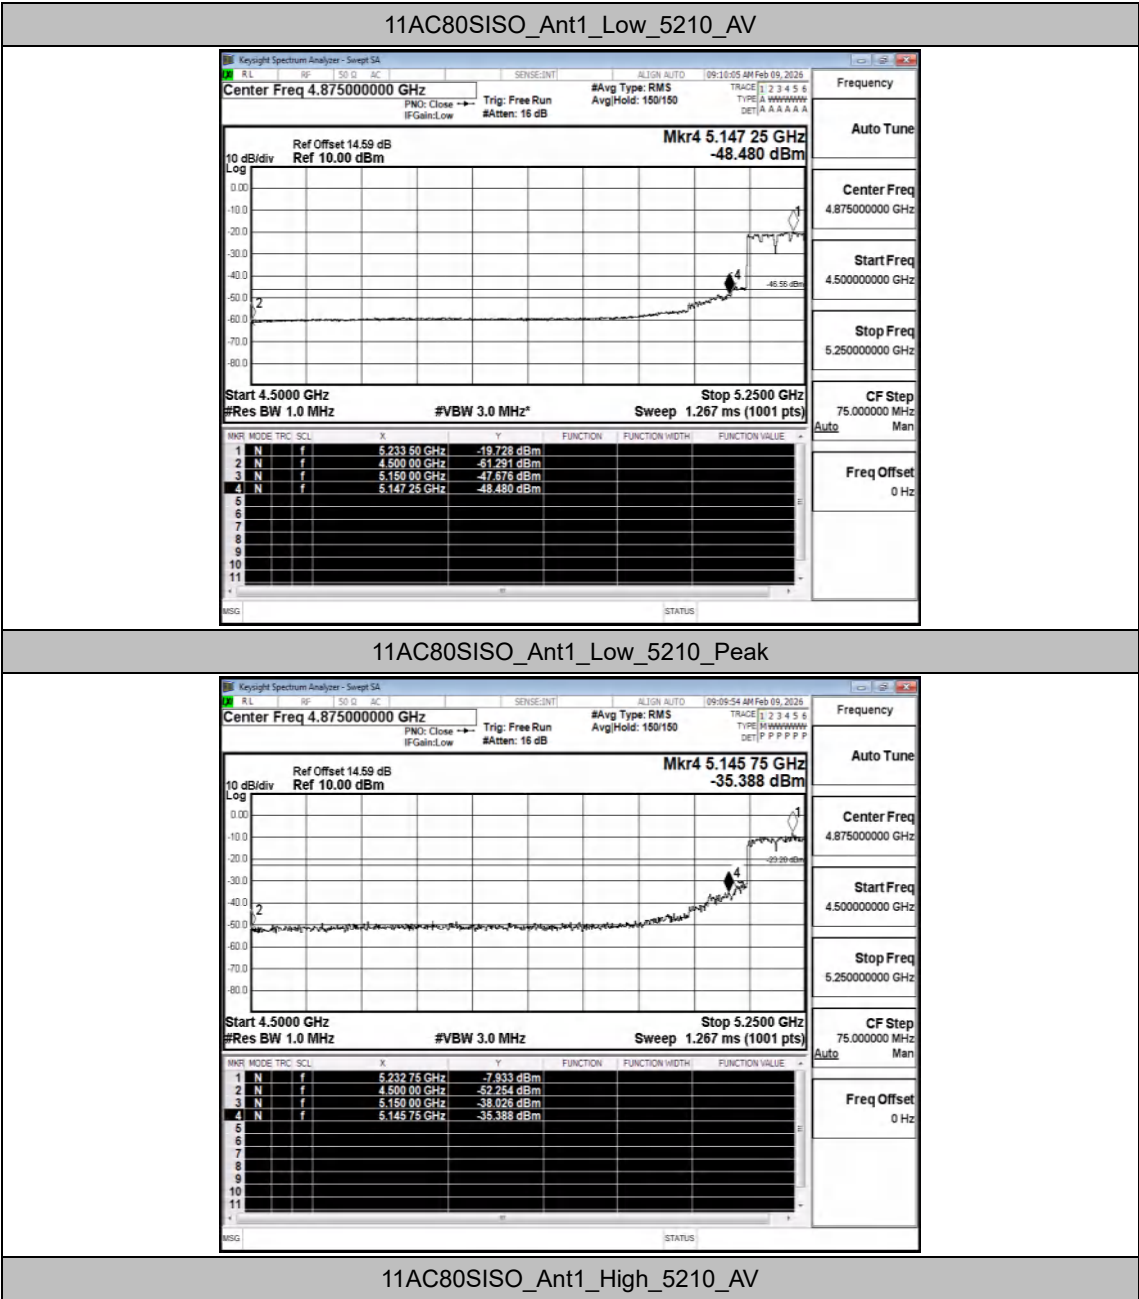

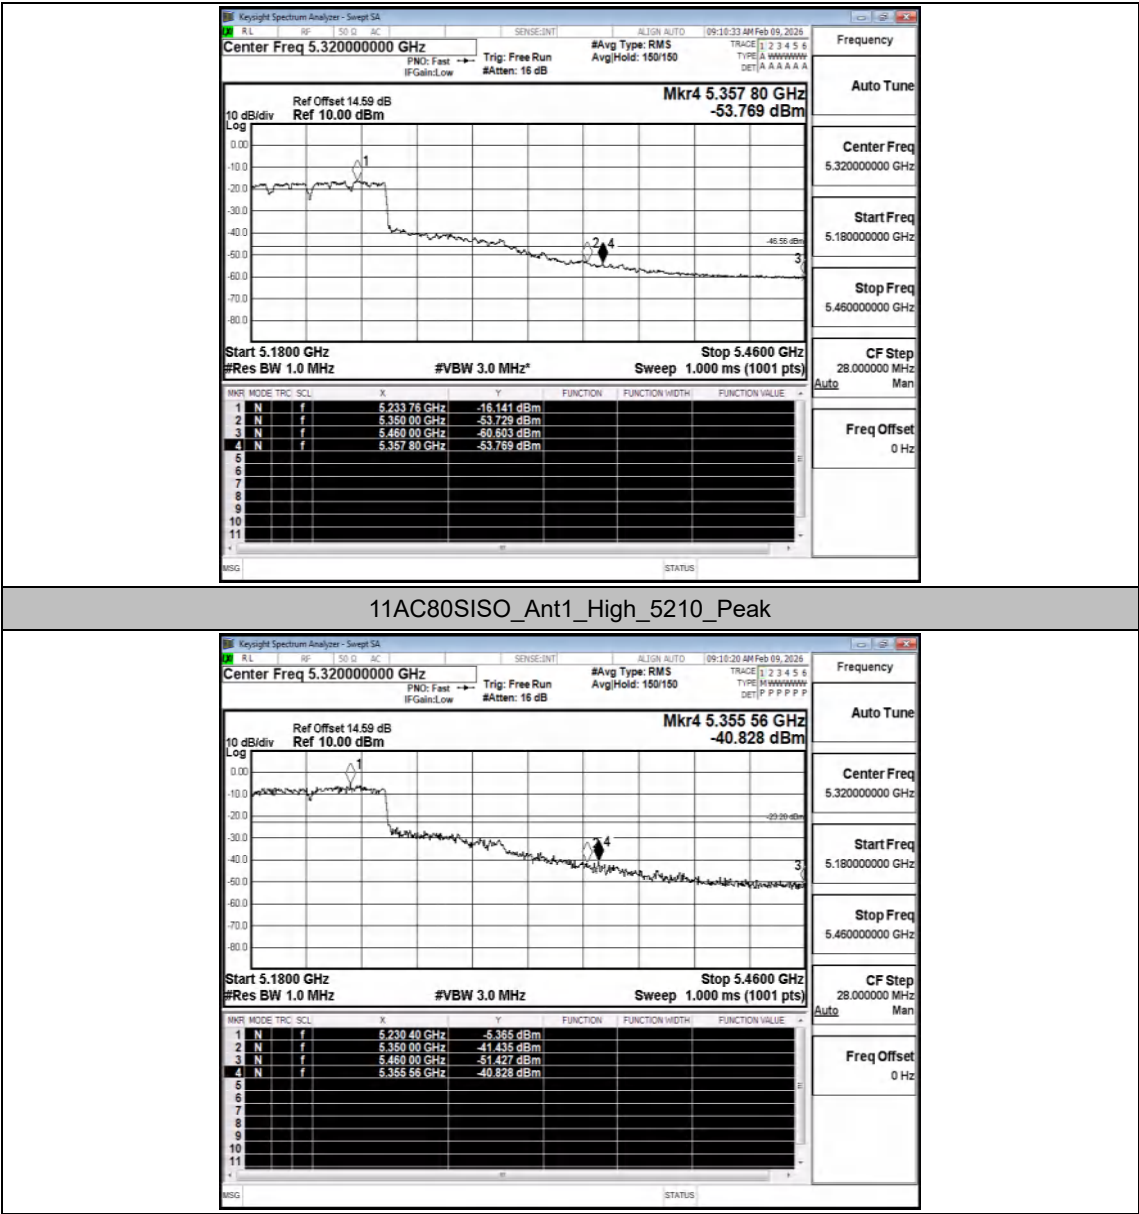

5 Frequency Stability

Test Result

Voltage								
TestMode	Antenna	Freq(M Hz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	NT	0.00	0.000000	20	PASS
			LV	NT	-20000.00	-3.861004	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5200	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5240	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11N20SI SO	Ant1	5180	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5200	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5240	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11N40SI SO	Ant1	5190	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5230	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11AC20S ISO	Ant1	5180	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5200	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	20000.00	3.846154	20	PASS
		5240	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	20000.00	3.816794	20	PASS
11AC40S ISO	Ant1	5190	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS

		5230	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11AC80S ISO	Ant1	5210	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS

Temperature								
TestMode	Antenna	Freq(M Hz)	Voltage [Vdc]	Temper ature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-30	-20000.00	-3.861004	20	PASS
			NV	-20	20000.00	3.861004	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-20000.00	-3.861004	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5200	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-20000.00	-3.846154	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5240	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
11N20SI SO	Ant1	5180	NV	-30	20000.00	3.861004	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	20000.00	3.861004	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS

			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5200	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5240	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
11N40SI SO	Ant1	5190	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5230	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
11AC20S ISO	Ant1	5180	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS

			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	20000.00	3.861004	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5200	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	-20000.00	-3.846154	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	-20000.00	-3.846154	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5240	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
11AC40S ISO	Ant1	5190	NV	-30	-40000.00	-7.707129	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-40000.00	-7.707129	20	PASS
			NV	50	0.00	0.000000	20	PASS
		5230	NV	-30	0.00	0.000000	20	PASS
			NV	-20	40000.00	7.648184	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
11AC80S ISO	Ant1	5210	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS

			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS

6 Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factor	Limit	Verdict
11A	Ant1	5180	0.12	0.19	63.16	2.00	---	---
		5200	1.40	1.57	89.17	0.50	---	---
		5240	1.39	1.63	85.28	0.69	---	---
11N20SISO	Ant1	5180	0.12	0.19	63.16	2.00	---	---
		5200	1.31	1.54	85.06	0.70	---	---
		5240	1.29	1.54	83.77	0.77	---	---
11N40SISO	Ant1	5190	0.07	0.13	53.85	2.69	---	---
		5230	0.65	0.89	73.03	1.36	---	---
11AC20SISO	Ant1	5180	0.13	0.19	68.42	1.65	---	---
		5200	1.32	1.49	88.59	0.53	---	---
		5240	1.31	1.49	87.92	0.56	---	---
11AC40SISO	Ant1	5190	0.08	0.14	57.14	2.43	---	---
		5230	0.65	0.83	78.31	1.06	---	---
11AC80SISO	Ant1	5210	0.06	0.13	46.15	3.36	---	---

Test Graphs

