

MANUAL DE INSTRUCCIONES
Gracias por adquirir el Kit de Viaje de Teclado y Ratón UP-TECH de 4 piezas. Diseñado para ser tu compañero ideal de trabajo remoto, este conjunto ofrece comodidad y eficiencia dondequiera que vayas. Te invitamos a revisar la información proporcionada, incluso si estás familiarizado con productos similares.

ESPECIFICACIONES

TECLADO INALÁMBRICO

- Cerrado: 15.32 × 9.97 × 0.75 cm
- Abierto: 30.34 × 9.97 × 0.75 cm
- Bluetooth: 5.1
- Entrada de alimentación: 5 V/1A máx
- Batería: 150 mAh Li-ion
- Tiempo de funcionamiento: hasta 50 horas
- Teclas: 65
- Frecuencia de operación: 2402 - 2480 MHz
- Máxima frecuencia de radio: 3,79dBm/-0,58mW
- Compatibilidad: Android, iOS 7, Windows

RATÓN MINI INALÁMBRICO

- Dimensiones: 2,16x3,26x1,22 pulgadas
- Bluetooth: 3.0/5.2
- Botones: 3
- Resolución: 1000 dpi
- Rango de trabajo: 33 pies/10 m
- Batería: 1 pila AAA (no incluida)
- Sistemas operativos compatibles: Win7/8/VIN10/11/XP/Vista/NT, ME o MAC, etc.

DISPOSICIÓN DEL TECLADO Y FUNCIONES




No	Teclas de función	Apple (macOS, iOS)	Windows	Android
1		Volver a la página de inicio	Volver a la página actual	Volver a la página de inicio
2		Buscar	Buscar	Buscar
3		Seleccionar todo	Seleccionar todo	Seleccionar todo
4		Copiar	Copiar	Copiar
5		Pegar	Pegar	Pegar
6		Recorte	Recorte	Recorte
7		Reproducir la canción anterior	Reproducir la canción anterior	Reproducir la canción anterior
8		Reproducir/Pausar	Reproducir/Pausar	Reproducir/Pausar
9		Reproducir la siguiente canción	Reproducir la siguiente canción	Reproducir la siguiente canción
10		Silenciar	Silenciar	Silenciar
11		Bajar el volumen	Bajar el volumen	Bajar el volumen
12		Subir el volumen	Subir el volumen	Subir el volumen
13		Bloqueo de pantalla	Bloqueo de pantalla	Bloqueo de pantalla

EMPREJAR EL TECLADO CON LOS SISTEMAS OPERATIVOS IOS, ANDROID, WINDOWS

1. Coloque el teclado dentro de un alcance de 33 pies/10 m del dispositivo habilitado para Bluetooth.
2. Mueva el interruptor de encendido de "Off" a "On". El teclado entrará en modo de emparejamiento y el indicador LED azul, junto al interruptor de encendido, se encenderá y comenzará a parpadear.
3. En el menú Bluetooth de su dispositivo, busque y seleccione « Uptech Keyboard » (es posible que se le pida ingresar la contraseña « 0000 »).
4. Una vez que el emparejamiento esté completo, la luz LED azul se apagará.

OPERACIÓN BÁSICA

1. Para usar las teclas de función, mantenga presionada la tecla "fn" y luego presione la tecla de función deseada.
 2. Si el teclado está inactivo durante 15 minutos, entrará en modo de suspensión. Para despertarlo, presione cualquier tecla, espere 3 segundos y el teclado estará listo para usar.
- OPERACIÓN DEL RATÓN MINI INALÁMBRICO**
1. Este ratón funciona con batería y usa una batería AAA (no incluida). Para instalar la batería, retire la tapa del compartimento de la batería en la parte posterior del ratón.
 2. Después de quitar la tapa, coloque la batería en el compartimento vacío, asegurándose de la polaridad correcta para un funcionamiento adecuado. Una vez que la batería esté instalada correctamente, vuelva a colocar la tapa del compartimento.
 3. Para comenzar, localice el interruptor ON/OFF en la parte inferior del ratón, cerca de la luz LED. Cámbielo a ON, y la luz LED roja parpadeará una vez, indicando que el ratón está en modo de emparejamiento.
 4. Para emparejar este ratón con su dispositivo, asegúrese de que esté dentro de 33 pies/10 m del dispositivo habilitado para Bluetooth. Abra el menú Bluetooth de su dispositivo y seleccione una de las siguientes opciones:
 - « Uptech Mouse 3.0 » para los sistemas operativos compatibles: Windows 7/8/10/11, XP, Vista, NT, ME o macOS.
 - « Uptech Mouse 5.2 » para los sistemas operativos compatibles: Windows 10/11, Vista, NT, ME o macOS 10.12.1 o superior.
 5. Una vez que el emparejamiento esté completo, la luz LED roja permanecerá encendida mientras se usa el ratón.
 6. Si el ratón está inactivo durante 15 minutos, entrará en modo de suspensión. Para despertarlo, presione cualquier tecla, espere 3 segundos y el ratón estará listo para usarse.

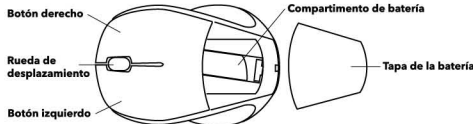

ADVERTENCIA: PARA EVITAR FILTRACIONES DE LA BATERÍA

- 1) El ratón requiere 1 (una) batería AAA de 1.5V (no incluida).
- 2) Las baterías utilizadas con este producto son piezas pequeñas y deben mantenerse alejadas de los niños pequeños que todavía ponen cosas en la boca. Si se tragan, busque atención médica de inmediato y llame a la Asociación Estadounidense de Centros de Control de Envenenamientos (1-800-222-1222).
- 3) Siempre compre el tamaño y grado de batería correcto más adecuado para el uso previsto.
- 4) No mezcle baterías viejas y nuevas, alcalinas, estándar (Carbón-Zinc) o recargables (Níquel-Cadmio).
- 5) Limpie los contactos de la batería y los del dispositivo antes de instalar la batería.
- 6) Asegúrese de que la batería esté instalada correctamente con respecto a la polaridad (+ y -).
- 7) Siempre retire la batería si se consume o si el producto va a quedar sin usar durante mucho tiempo.

USB-A to USB-C Cable

Mini Mouse

Wireless Foldable Keyboard

PORTABLE

Keyboard Travel Set

UPT-1696

UPT-1698

Instruction Manual

Manual De Instrucciones

work from anywhere kit

INSTRUCTION MANUAL

Thank you for purchasing the UP-TECH 4-Piece Keyboard & Mouse Travel Set. Designed as your ultimate travel companion for remote work, this set ensures convenience and efficiency on the go. Please take a moment to review the provided information, even if you're familiar with similar products.

SPECIFICATIONS:


WIRELESS KEYBOARD

- Closed: 6.031in x 3.925in x 0.295in
- Open: 11.944in x 3.925in x 0.295in
- Bluetooth: 5.1
- Power input: dc 5 V/1A max
- Battery: 150 mAh Li-ion
- Working time: up to 50hours
- 65 keys
- Operating frequency: 2402 - 2480MHz
- Max radio-frequency: 3.79 dBm/-0.58mW
- Compatibility: Android, iOS 7, Windows

WIRELESS MINI MOUSE

- 2.16in x 3.26in x 1.22in
- Bluetooth: 3.0/5.2
- Buttons: 3
- Resolution:1000dpi
- Working Range:33 ft/10M
- Battery:1 AAA (not included)
- Compatible OS: Win7/8/VIN10/11/XP/Vista/NT,ME or MAC etc.

KEYBOARD LAYOUT AND FUNCTIONS

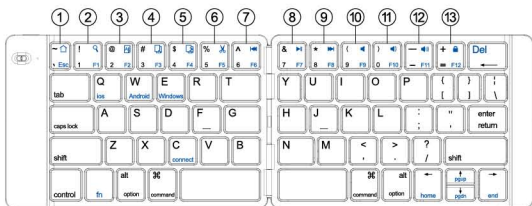

No	Function Keys	Apple (macOS, iOS)	Windows	Android
1		Return to home page	Return to current page	Return to home page
2		Search	Search	Search
3		Select All	Select All	Select All
4		Copy	Copy	Copy
5		Paste	Paste	Paste
6		Clipping	Clipping	Clipping
7		Play the previous song	Play the previous song	Play the previous song
8		Play/Pause	Play/Pause	Play/Pause
9		Play the next song	Play the next song	Play the next song
10		Mute	Mute	Mute
11		Lower volume	Lower volume	Lower volume
12		Raise volume	Raise volume	Raise volume
13		Screen lock	Screen lock	Screen lock

PAIRING THE KEYBOARD TO IOS, ANDROID, WINDOWS OPERATING SYSTEMS


1. Place keyboard within 33ft/10m of the Bluetooth enabled device.
2. Move the power switch from Off to On. The keyboard will enter pairing mode and the blue LED indicator, next to the power switch, will turn on and begin to flash.
3. On your device's Bluetooth menu, find and select "Uptech Keyboard" (you may be required to enter a password "0000").
4. Once pairing is complete the blue LED light will turn off.

BASIC OPERATION

1. To use the function keys, press and hold the "fn" key, then press the desired function key.
2. If the keyboard is idle for 15 minutes, it will enter sleep mode. To wake it up, press any key, wait 3 seconds, and the keyboard will be ready to use.

WIRELESS MINI MOUSE OPERATION

1. This mouse is battery-operated and uses one AAA battery (not included). To install the battery, remove the battery compartment cover located on the back of the mouse.
2. After removing the cover, place the battery into the empty compartment, ensuring the correct polarity for proper functionality. Once the battery is securely seated, reinstall the compartment cover.
3. To start, locate the ON/OFF switch on the bottom of the mouse, near the LED light. Switch it to ON, and the red LED will flash once, indicating the mouse is in pairing mode.
4. To pair this mouse with your device, ensure it is within 33ft/10m of the Bluetooth enabled device. Open your device's Bluetooth menu and select one of the following:
 - "Uptech Mouse 3.0" for compatible operating systems: Windows 7/8/10/11, XP, Vista, NT, ME, or macOS.
 - "Uptech Mouse 5.2" for compatible operating systems: Windows 10/11, Vista, NT, ME, or macOS 10.12.1 and above.
5. Once pairing is complete the red LED light will be on while using the mouse. If the mouse is idle for 15 minutes, it will enter sleep mode. To wake it up, press any key, wait 3 seconds, and the mouse will be ready to use.

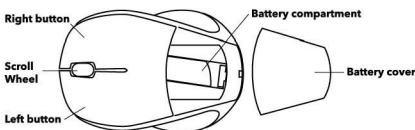

WARNING: TO AVOID BATTERY LEAKAGE

- 1) The mouse requires 1 (one) 1.5V AAA battery (not included)
- 2) The batteries used with this product are small parts and should be kept away from small children who still put things in their mouths. If they are swallowed, promptly seek medical attention and call the American Association of Poison Control Centers 1-800-222-1222).
- 3) Always purchase the correct size and grade of battery most suitable for intended use.
- 4) Do not mix old and new batteries, alkaline, standard (Carbon-Zinc) or rechargeable (Nickel-cadmium) batteries.
- 5) Clean the battery contacts and those of the device prior to battery installation.
- 6) Ensure the battery is installed correctly with the regard to polarity (+ and -)
- 7) Always remove battery if consumed or if product is to be left unused for a long time.

CAUTION: To protect and extend the lifespan of your keyboard, ensure the device is fully charged and powered off when not in use for extended periods. This helps prevent overcharging the battery and potential damage to the device.

PRECAUCIÓN: Para proteger y prolongar la vida útil de su teclado, asegúrese de que el dispositivo esté completamente cargado y apagado cuando no se use durante períodos prolongados. Esto ayuda a evitar la sobrecarga de la batería y posibles daños al dispositivo.

WARNINGS

- This is not a toy keep away from children under 6 years of age.
- Keep away from heat and open flames.
- Do not attempt to disassemble or reassemble this device.
- Device may get warm during extended use.
- Only use new batteries with this device.

ADVERTENCIAS

- Esto no es un juguete; manténgalo fuera del alcance de niños menores de 6 años.
- Mantener alejado del calor y de las llamas abiertas.
- No intente desmontar ni volver a ensamblar este dispositivo.
- El dispositivo puede calentarse durante un uso prolongado.
- Utilice únicamente pilas nuevas con este dispositivo.

FCC Caution:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any in terference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment

©2025 UP-TECH/MWA. All rights reserved. UP-TECH and the UP-TECH logo are trademarks of UP-TECH/MWA. DISTRIBUTED: Milife Accessories LLC 1 East 33rd Street 2nd Floor. New York, NY 10016

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

DESIGNED AND ENGINEERED IN USA. MADE RESPONSIBLY IN CHINA.

©2025 UP-TECH/MWA. Todos los derechos reservados. UP-TECH y el logotipo de UP-TECH son marcas registradas de UP-TECH/MWA. DISTRIBUIDO POR: Milife Accessories LLC 1 East 33rd Street, 2do piso. Nueva York, NY 10016

La palabra Bluetooth® y sus logotipos son marcas registradas propiedad de Bluetooth SIG, Inc.

DISEÑADO E INGENIERIZADO EN EE.UU.
FABRICADO DE MANERA RESPONSABLE EN CHINA.



MiWorld

MANUAL TECH PACK

BRAND UP-TECH

STYLE # UPT-1696
UPT-1698

CATEGORY TECH

PAPER QUALITY

DIMENSIONS WIDTH: HEIGHT:

FILE SAVED ON SERVER
(LOCATION OF FILE ON SERVER)

FILE SAVED AS:

- ☐ A.I. (FULLY EDITABLE)
- ☒ A.I. (OUTLINED)
- ☐ PDF

APPROVAL CHECKLIST:

PRIMARY DESIGNER:

DATE: Conrad 6-19-25

SECONDARY DESIGNER:

DATE:

COPY APPROVAL
PROOF READ

AUTHORIZATION SIGNATURES:

C.E.O.

DATE:

DIRECTOR

DATE:

COPY PROVIDED

PROOF READ

MANUAL

SIGNATURE: Conrad

DATE: 6-19-25