

成品尺寸：100*170mm（±1.5mm）
材质：105g铜版纸，双面彩印，风琴折页




Learn More

Virtusx AI Keyboard Phronesis

Instruction Manual


Device Overview

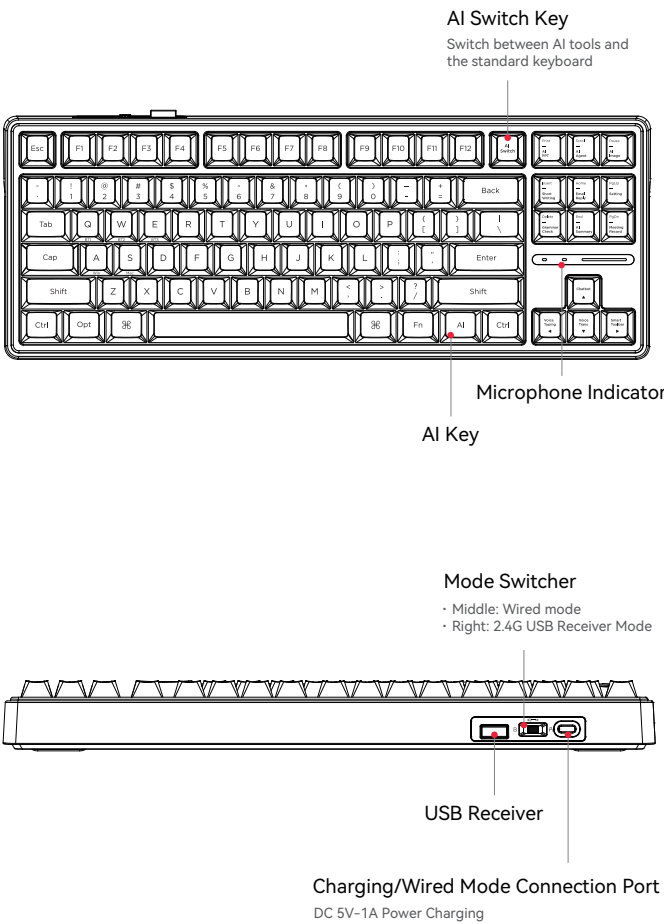

Connect AI Keyboard to Computer


Wired Connection

Connect the USB-C cable to the computer and set the mode switcher to the middle for wired mode.

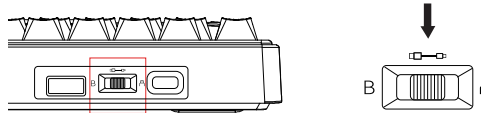


Receiver Mode

- Set the mode switcher to the right for 2.4G USB Receiver Mode.

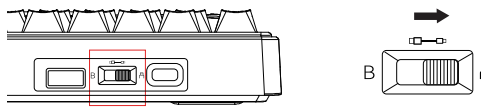

- Remove the USB receiver from the back of the keyboard and plug it into the computer's USB port.

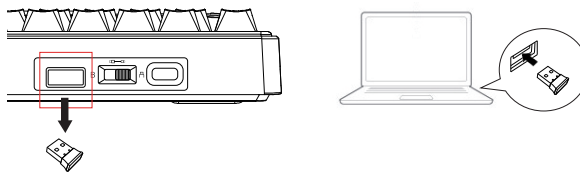

Switching Between Multiple Devices

Connection Type	Mode Switcher Setting
Wired Mode	The mode switcher is in the middle position.
Receiver Mode	The mode switcher is set to the right for 2.4G.

Re-pairing steps for the USB receiver when not connecting properly

- Switch the mode switcher to receiver mode.
- Press and hold Fn + P until the P button flashes quickly with a white backlight, entering pairing mode.
- Plug the USB receiver into the computer's USB port, the backlight will turn off once the connection is successful.

Virtusx V-AI Software Installation

Windows PC Installation

- Visit our official website: www.virtusxus.com.
- Navigate to the Software tab.
- Select Download for Windows.
- Install the software. It should automatically open upon successful installation.


Note: If you use McAfee or Norton antivirus software, you may see a warning during installation. Please approve the installation to proceed.

MacOS Installation

- Visit our official website: www.virtusxus.com.
- Navigate to the Software tab.
- Select Download for MacOS.
- Double-click the downloaded file and drag the V-AI icon into your Applications folder to install.
- After installation, open System Settings and go to Privacy & Security.
- Enable the V-AI software under the following sections:
 - Accessibility
 - Input Monitoring
 - Screen Recording & System Audio Recording

Note: Once these settings are enabled, all AI features will function seamlessly on your MacOS system. For a step-by-step tutorial, watch the video.

AI Button Description

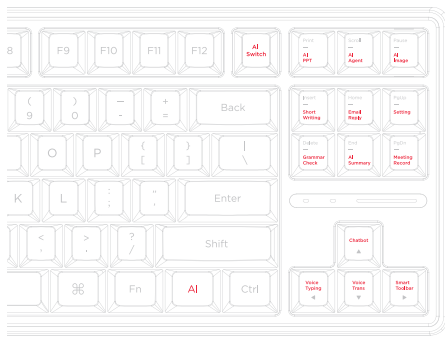

Button	Description
AI Switch	Switch between AI tools and the standard keyboard.
AI	Tap to enter the V-AI interface; hold and speak to use the AI chatbot for answering questions.
AI PPT	Short press to open the PPT interface; hold and speak the topic to generate a PPT.
AI Agent	Short press to open the AI Agent interface.
AI Image	Short press to open the image generation interface; hold and speak the topic to generate an image.
Setting	Open the settings tab in V-AI.
Short Writing	Short press to open the short writing interface; hold and speak the topic to generate a short text.
Email Reply	Short press to open the email reply interface; hold and speak the topic to generate an email reply.
Grammar Check	Short press to open the grammar check interface; hold and speak the topic to perform a grammar check.
AI Summary	Open the article summary tab in V-AI to upload files under 10 MB and generate an AI summary.
Meeting Record	Open the meeting record tab in V-AI.
Chatbot	Open up the chatbot in V-AI.
Voice Typing	Hold to use speech-to-text.
Voice Translation	Hold for real-time translation; short press for text translation.
Smart Toolbar	Open the smart toolbar with functions like Translation, Rewrite, Extend, Shorten, Summarize, Keyword, AI Chatbot, and Email Reply.


Key Combinations

Fn + A	Windows Keyboard Layout
Fn + S	Mac Keyboard Layout
Fn + Back	Keyboard Backlight Monochrome Switching
Fn + Space	Hold 3 Seconds to Reset to factory Settings
Fn + Win	Windows Lock
Fn + -	Decrease Backlighting Speed (-)
Fn + +	Increase Backlighting Speed (+)
Fn + { [	Decrease Backlighting Brightness (-)
Fn + }]	Increase Backlighting Brightness (+)
Fn + \	Switch Backlight Effect

Package Contents

- Virtusx AI Keyboard x 1
- USB Receiver x 1
- Charging Cable x 1
- Instructional Manual x 1

Indicator Light Descriptions

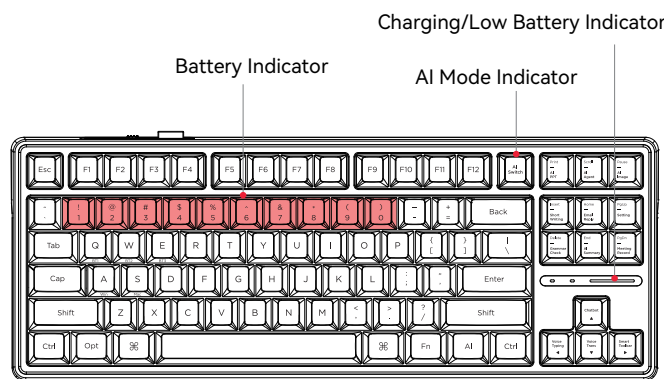

Indicator	Description
AI Mode Indicator	Backlighting turns white when in AI mode.
Charging Indicator	While charging, the right side flashes blue three times. When fully charged, it flashes green three times.
Low Battery Indicator	When the battery is low, the bottom right of the keyboard flashes red and turns off after 30 seconds.
Battery Indicator	Press and hold Fn + Enter to check the battery level when the USB receiver is connected. Each lit key represents the battery percentage: - Key 1 lit: Battery is at 10%. - Keys 1 and 2 lit: Battery is at 20%. - Keys 1-10 lit: Battery is at 100%.

Product Specifications

Feature	Specification
Name	Virtusx AI Keyboard
Model	Virtusx AI Phronesis
Size	365mm x 138mm x 39mm
Weight	910±2g
Keyboard Type	Mechanical Keyboard
Number of Keys	88 Keys
Connection Type	2.4G Receiver/Wired
Charging Port	Type-C
Microphone	MEMS Microphones
System Compatibility	Windows 10/11, macOS 10.15 and above

Safety Guidelines

Warning

- Improper use of the battery may cause leaks, explosions, and other incidents, posing a risk of personal injury or fire.
- Keep away from humidity, high temperatures, and contact with conductive materials or liquids.
- Do not disassemble, repair, or modify this product yourself.

Charging Instructions

- It is recommended to connect the keyboard charging cable to the computer for charging.
- Use the provided data cable or one label "Output 5V-1A" for charging.
- Keep this product away from heat sources like heating appliance or direct sunlight during charging.

Problem Troubleshooting

Problem	Possible Causes	Solution
USB receiver unresponsive	Poor USB receiver connection	Plug the USB receiver into another USB port on the computer
Keyboard not functioning	Low battery	Use it after fully charged
	The keyboard failed to connect to the computer	Reconnect the computer using either the USB receiver or Bluetooth pairing
Malfuction voice recognition	Software download incomplete or error	Retry after downloading the correct software
	V-AI software is not open	Ensure the V-AI software is open
	Internet connection failure or poor network quality	Check the internet connection to ensure it is functioning properly
	Voice recognition is in the wrong language setup	Open the V-AI software and go to the settings. Select "Voice Typing" and adjust the "Input" language to your preferred language
	Noisy surroundings	Use it in a quiet environment
Inaccurate voice recognition	Speaking too softly or loudly	Speak at a normal volume
	Speaking too quickly or unclear pronunciation	Speak at a normal rate with clear pronunciation
	Speaking too far from the keyboard	Speak to the keyboard within a 65cm distance
Voice recognition is inaccessible in certain software	Restricted by user authorization	Close the V-AI software and restart it with administrator authorization
Incorrect voice translation	Voice recognition is in wrong language	Open the V-AI software and go to the settings. Select "Translation" and adjust the "Input" and "Output" language to your preferred language
MacOS System Warning During V-AI Installation	V-AI software not on the App Store	Go to System Preferences > Security & Privacy > General, then click Allow Anyway next to the V-AI app warning to proceed with the installation
AI function not working on MacOS system	Virtus software needs to obtain MacOS system permissions	Enable microphone access by navigating to System Preferences > Security and Privacy > Accessibility & Input Monitor & Screen Recording

Certification



FCC Caution:

This device complies with part 15 of the FCC rules. Operation is subject to two conditions: (1) it may not cause harmful interference, and (2) it must accept any interference received, including interference that may cause undesired operation.

Unauthorized changes or modifications could void the user's authority to operate the equipment.

Note: This equipment complies with Class B digital device limits under part 15 of the FCC Rules, designed to provide reasonable protection against harmful interference in residential installations. It generates, uses, and can radiate radio frequency energy. If not installed and used according to the instructions, it may cause harmful interference to radio communications. There is no guarantee interference will not occur in a particular installation. If it does, try the following:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Plug the equipment into a separate power outlet that is not shared with the receiver.
- Consult the dealer or an experienced radio/TV technician for help.

*RF Warning For Portable Device:

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.

Warranty Policy

Eligible for Warranty:

- Product must be sold by Virtusx with a purchase history.
- Confirmed performance issues in "Product Performance Failure Table" by Virtus customer service.

Timeframe	Action
Within the first 7 days of receiving the product	Eligible for free return or replacement unit
From day 8 to 30 after receiving the product	Eligible for free replacement unit
Within the initial 12 months of receiving the product	Eligible for free repair services

Not Eligible for Warranty:

- Software, encompassing (but not limited to) (i) the operating system and software integrated into Virtusx-branded hardware products through our factory-integration system, ii) third-party software, or (iii) the reloading of software, software configurations, or any data files.
- Claims arising from unacceptable use or care of the Product, including misuse, abuse, negligence, unauthorized modification or repair, unauthorized commercial use, or any operation of the Product beyond Virtusx's recommended parameters.
- Claims arising from external causes, such as accidents, acts of nature, liquid contact, fire, or earthquake.
- Cosmetic damage, minor cosmetic abnormalities, and normal wear and tear, including scratches, dents, and chips.
- Products with a serial number or date stamp that have been altered, obliterated, or removed.
- Products not sold by Virtus with no purchase history or from unauthorized third-party sellers.

Friendly Reminder:

For secure product shipping during exchanges, it is recommended to keep the box for a minimum of 30 days from the date of purchase.

Product Performance Failure Table

Name	Performance Failures
Virtusx AI Keyboard	Damage from structural or material issues caused by manufacturing factors
	Indicator not lighting up
	Keyboard not functioning normally