


Electronic shelf label system operation manual

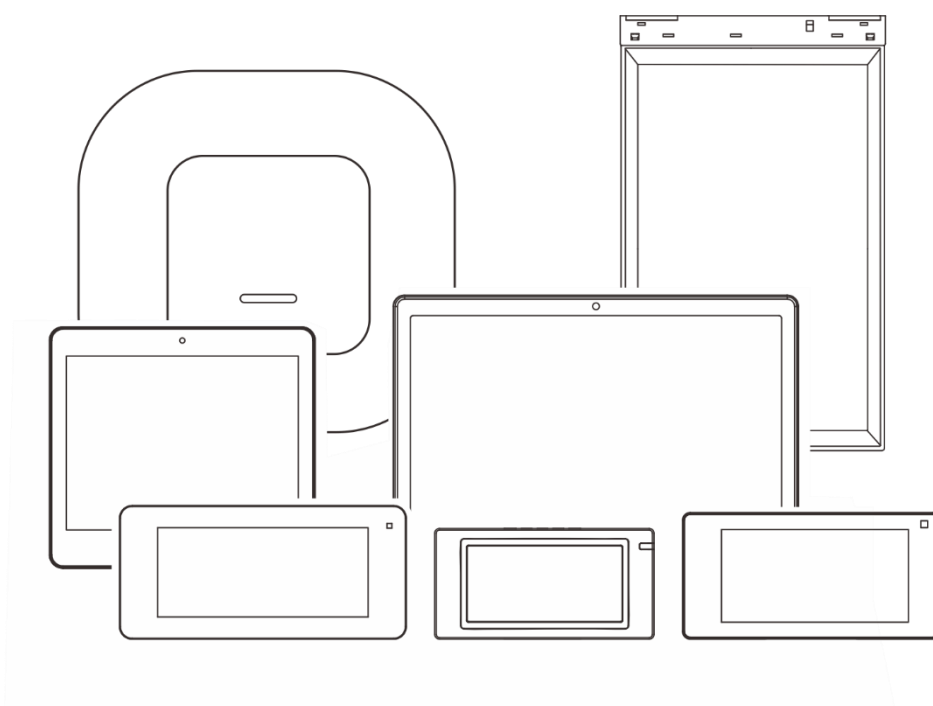

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.

Applicable Models

Product Name:	ESL
Model Name:	S42, S21, S26, S29, S75, T15, T21, T26, T29, T42
FCC ID:	2BR6Z-S42

Product Name:	AP
Model Name:	PG-4K, PG-5K, PG-6K, PG-7K, PG-8K
FCC ID:	2BR6Z-PG-4K

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

Contents

1.1	Create Template	1
1.1.1	Template market: copy template	1
1.1.2	Custom templates	2
1.1.3	Associated templates	3
1.2	Create New Commodity	6
1.2.1	Add a new commodity	6
1.2.2	Add new products in batches	6
1.2.3	Add new product fields	8
1.3	Bind and Updated Tag	9
1.3.1	Single binding and update tag	9
1.3.2	Batch binding and send	10
1.3.3	Replacing a single template or base station	12
1.3.4	Replacing templates or base stations in batches.....	13
1.4	Tag Update Queue Reissue	16
1.4.1	Reissue a single queue	16
1.4.2	Reissuance by time	16
1.4.3	Checking the status of the update queue	16
1.5	Material	18
1.5.1	Material library (local upload)	18
1.5.2	Product material (single add commodity material).....	18
1.5.3	Commodity material (batch automatic matching commodity material)	19
1.6	Authority.....	21
1.6.1	Store management	21
1.6.2	Role management	21
1.6.3	User management.....	22
1.7	Base Station Allocation.....	24
1.7.1	Electronic shelf label (base station) batch distribution	24
1.8	ESL Timing Task.....	27
1.8.1	ESL timing task	27

1.9 Account Center 29

1.9.1 Basic configuration.....29

1.9.2 Change password 29

1.9.3 Page configuration 30

1.1 Create Template

1.1.1 Template market: copy template

Operation process: 1 Template market → 2 Filter → 3 Select resolution (size) → 4 Copy a template → 5 Set new template name → 6 Confirm → Template management: check the copied template

The image illustrates the process of copying a template from the Template Market to Template Management, divided into three main steps:

- Step 1: Template Market** - The user navigates to the 'Template Market' section in the left sidebar. The main area displays a list of templates. A 'Filter' button is highlighted (2). A 'Resolution' dialog box is open, showing various resolution options, with '2.9\"
- Step 2: Copy Template** - The user selects a template (e.g., '2.9 Template sample') and clicks the 'Copy' button (4). A 'Copy market' dialog box appears, where the user sets the new template name (5) and confirms the action (6).
- Step 3: Template Management** - The user navigates to the 'Template Management' section. The main area displays a table of templates, including the newly copied '2.9 Template sample'.

id	Template Name	Preview	Store Name	Major/Sub	Share or Not	Tag Size	Operate
1	2.9 Template sample		Oversea001	Major		2.9"	Draw Edit Deleted
2	4.2 Apple pie		Oversea001	Major		4.2"	Draw Edit Deleted
3	Orange		Oversea001	Major		10.1"	Draw Edit Deleted

1.1.2 Custom templates

Operation process: 1 Template management → 2 Add → 3 Set template name → 4 Select tag color → 5 Select screen → 6 Select size → 7 Confirm → 8 Edit → 9 Save

	Id	Template Name	Preview	Store Name	Major/Sub	Share or Not	Tag Size	Operate
☐	1	...11260569	2.9 Template sample	Oversea001	Major	🔒	2.9"	Draw Edit 🗑️
☐	2	...79873228	4.2 Apple pie	Oversea001	Major	🔒	4.2"	Draw Edit 🗑️
☐	3	...31236454	Orange	Oversea001	Major	🔒	10.1"	Draw Edit 🗑️
☐	4	...84103475	Grape	Oversea001	Major	🔒	10.1"	Draw Edit 🗑️

3 set template name

2.9 Notebook

4 ESL Color

BW

BWR

BWY

5 Screen

6 Tag Size [7]

2.13"

2.66"KBF

2.66"RW


2.9"

4.2"

7.5"

10.1"


7 Confirm

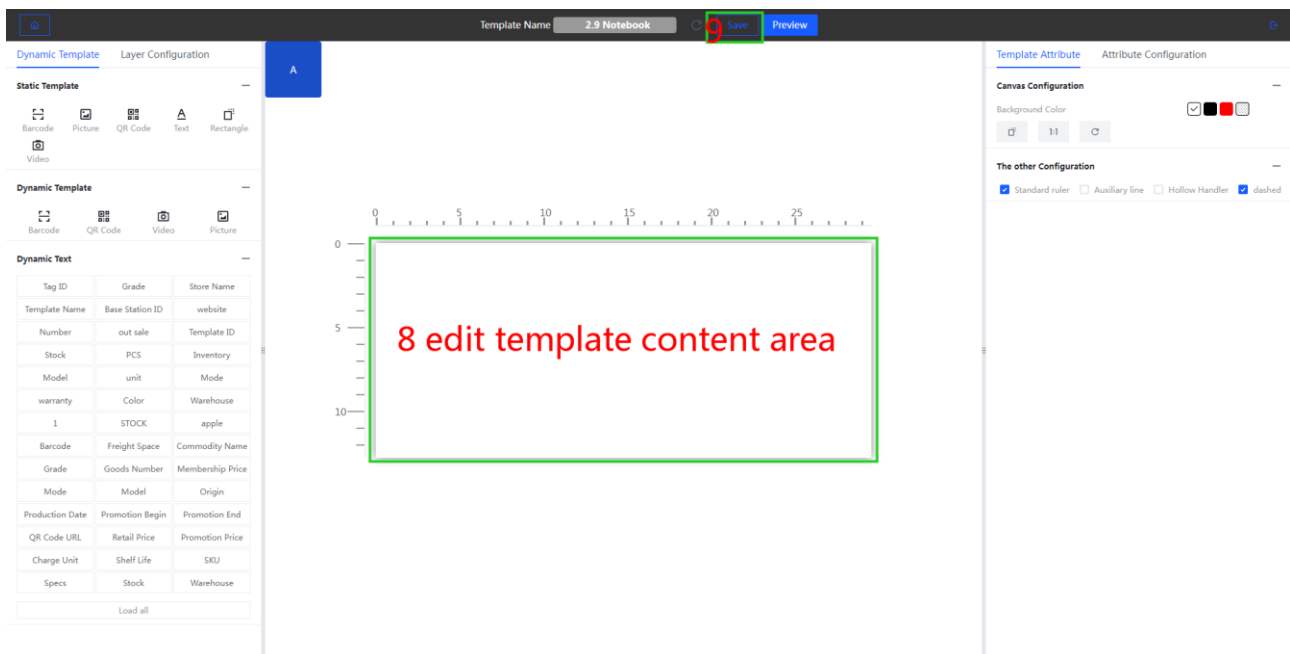


1.1.3 Associated templates


Operation process: 1 Copy template (Template Market) → 2 Set new template name → 3 Confirm → 4 Edit master template (Template Management) → 5 Set sub-template (Template Management) → 5 Sub-template (Mode) → 6 Select not share (Whether to share) → 7 Save → 8 Edit (m template) → 9 Associate sub-template → 10 Save

1. Copy a template

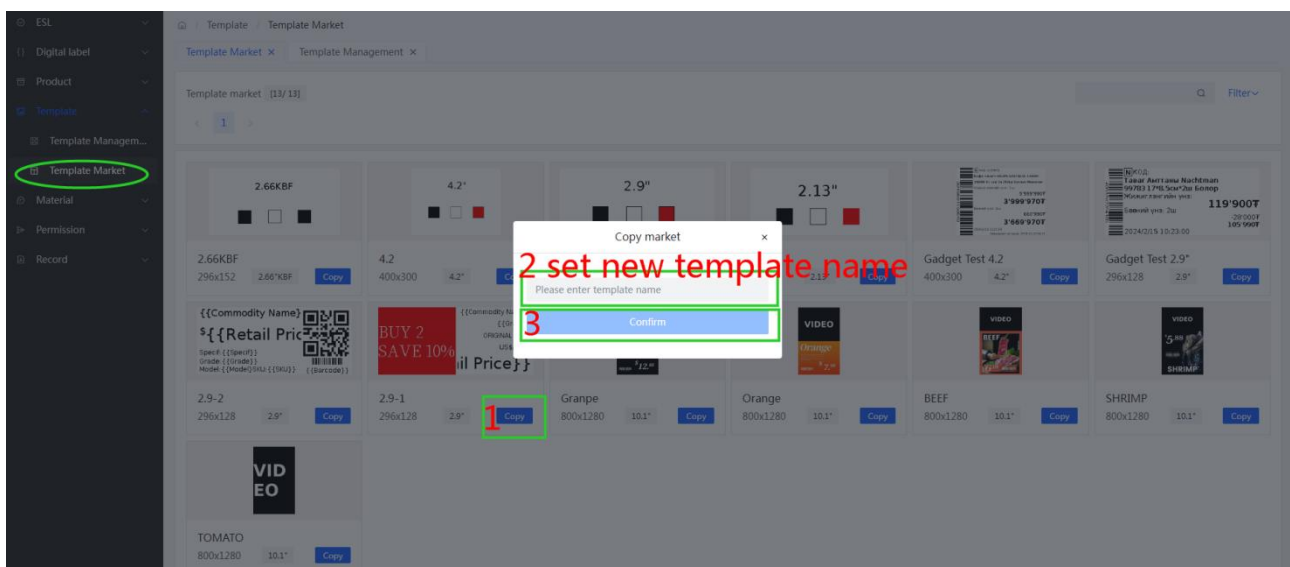


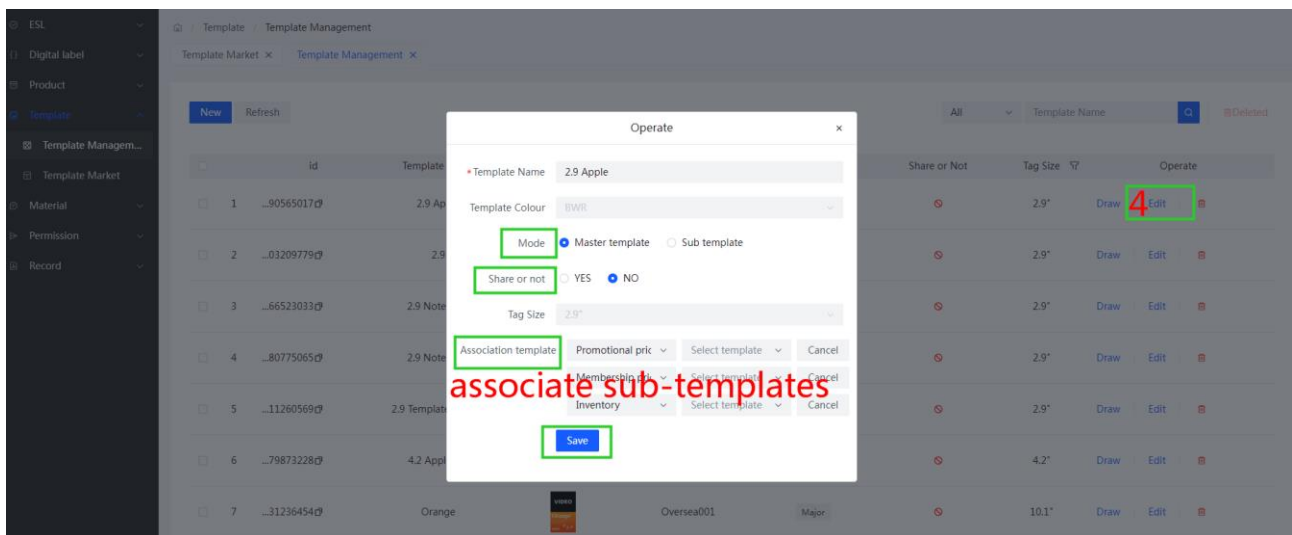

2. Set up a sub-template

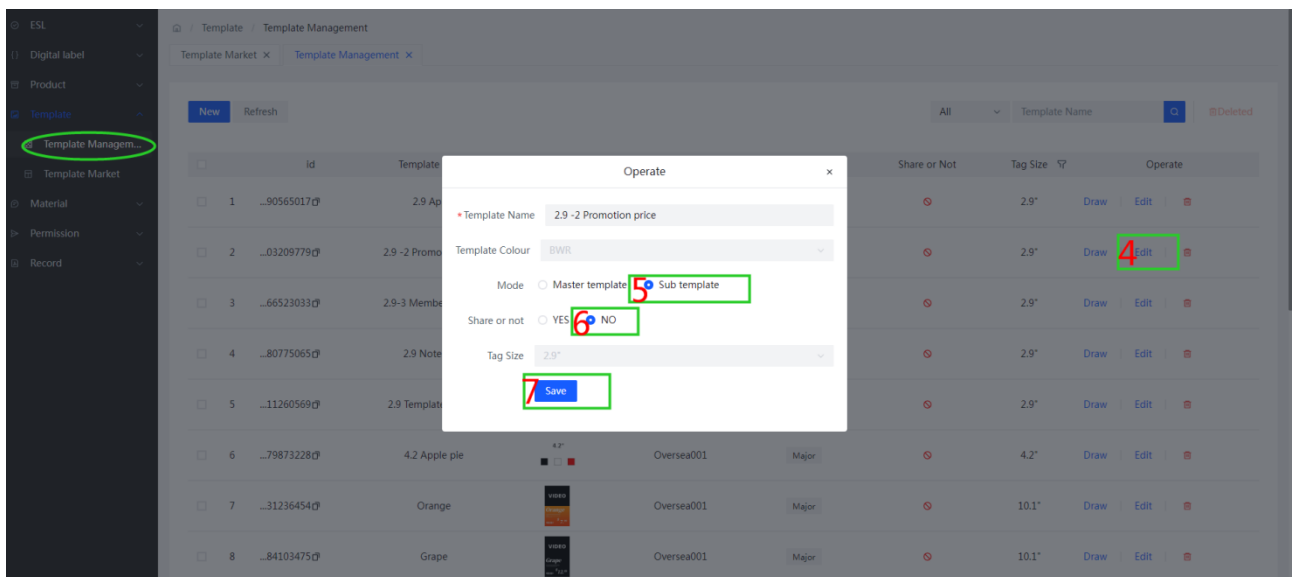


3. Associated sub-template

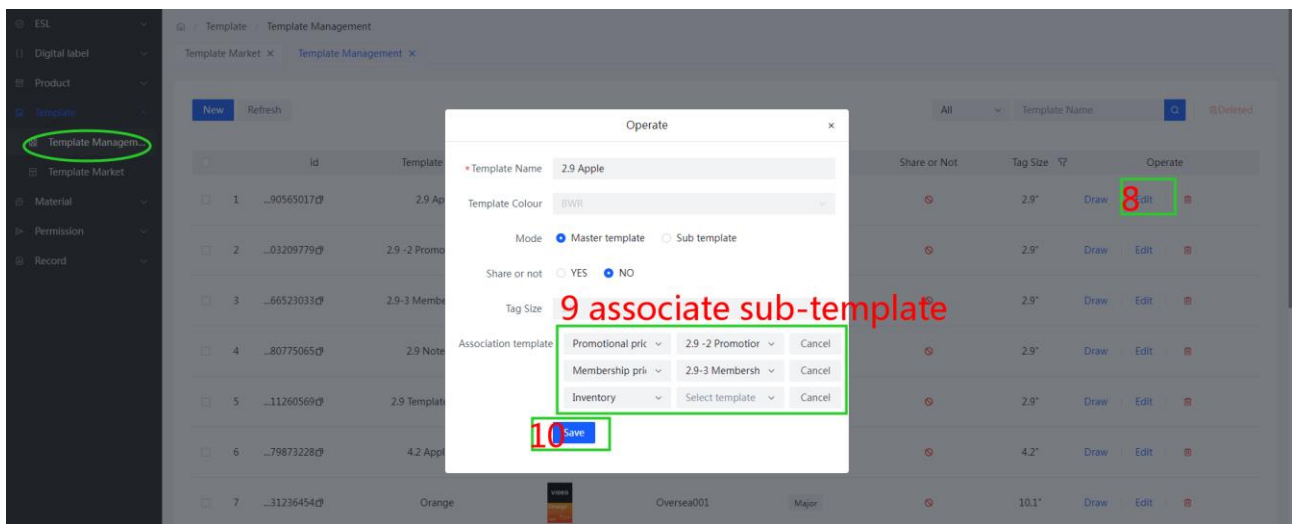

1.2 Create New Commodity

1.2.1 Add a new commodity

Operation process: 1 Product information → 2 Add → 3 Edit product information → 4 Save

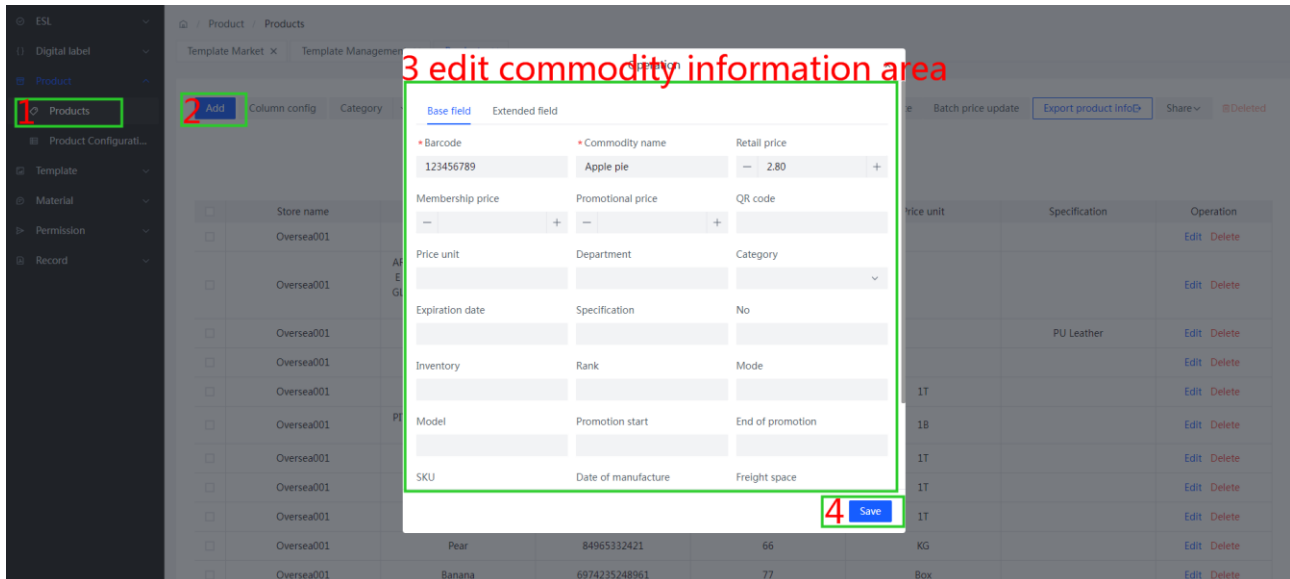

1.2.2 Add new products in batches

Operation process: 1 Product information → 2 Download template → 3 Edit excel file (commodity add template) → 4 Product batch binding → 5 Upload excel file (commodity add template) → 6 Open

ESL

Digital label

Product

1 Products

Product Configurati...

Template

Material

Permission

Record

Product / Products

Template Market x Template Management x Products x

Add

Column config

Category

All

2 Download template

Product batch adding

Download template

Batch price update

Export product info

Commodity name,Barcode,Department

	Store name	Commodity name	Barcode	Retail price	Price unit	Specification
☐	Oversea001	Note book	11111222333	14.99		
☐	Oversea001	ART CARD PAPER CUP SLEEV E 210G 1PAGE COATED PVC GLOSS DIE-CUT 4 COLORS S1 ZE 26X6 CM 500 PCS.	22233344			
☐	Oversea001	PU Leather Notebook	33333	10.99		PU Leather
☐	Oversea001	Soft drink	895315640	5.88		
☐	Oversea001	MARACUJA - UNIDADE	8125	13.99	1T	
☐	Oversea001	PITAYA VERMELHA - UNIDAD E	8124	11.99	18	
☐	Oversea001	Lemon	8123	11.99	1T	
☐	Oversea001	Peach	323654813681	88	1T	
☐	Oversea001	Lychee	24458635107989	43	1T	
☐	Oversea001	Pear	84965332421	66	KG	
☐	Oversea001	Banana	6974235248961	77	Box	

Commodity_add...xlsx

	A	B	C	D	E	F	G	H	I	J	K
1	Product name	Barcode	Product SKU	Price unit	Retail price	Membership price	Promotional price	Specification	Grade	Origin	Stock
2	Apple pie	12345678	pcs		2.8		2.6		A		
3	Biscuit	22556688	pcs		23.6	3.2			B		
4											
5											
6											
7											
8											
9											
10											
11											
12											
13											
14											
15											
16											
17											
18											
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											
31											
32											

3 fill in commodity information

新建文件夹

18129

2024/7/12 15:24

Microsoft Excel ...

4 KB

34925

2024/7/12 15:27

Microsoft Excel ...

4 KB

55955

2024/7/12 15:24

Microsoft Excel ...

4 KB

85484

2024/7/12 15:18

Microsoft Excel ...

4 KB

97433

2024/7/9 9:34

Microsoft Excel ...

4 KB

Book4 (1)

2024/7/9 9:34

Microsoft Excel ...

503 KB

Book1

2024/7/9 9:33

Microsoft Excel ...

503 KB

5 Commodity_add_template_11458

2024/7/18 14:49

Microsoft Excel ...

5 KB

Commodity_add_template_11930

2024/7/9 9:34

Microsoft Excel ...

994 KB

Commodity_batch_template_75864

2024/3/27 13:56

Microsoft Excel ...

4 KB

Commodity_batch_template_75943

2024/1/8 18:02

Microsoft Excel ...

11 KB

Commodity_manifest_10429

2024/3/13 11:06

Microsoft Excel ...

15 KB

Commodity_manifest_59712

2024/3/13 17:21

Microsoft Excel ...

21 KB

Commodity_manifest_71947

2024/3/13 11:04

Microsoft Excel ...

15 KB

Commodity_price_change_template_0...

2023/11/8 10:30

Microsoft Excel ...

4 KB

Commodity_price_change_template_1...

2024/3/13 11:12

Microsoft Excel ...

9 KB

Commodity_price_change_template_1...

2023/11/7 12:16

Microsoft Excel ...

4 KB

文件(N): Commodity_add_template_11458

自定义文件

6 打开(O)

取消

template

4 product batch adding

Download template

Batch price update

Export product info

Share

Deleted

Commodity name,Barcode,Department

	Retail price	Price unit	Specification	Operation
33	14.99			Edit Delete
				Edit Delete
				Edit Delete
				Edit Delete
				Edit Delete
				Edit Delete
				Edit Delete
				Edit Delete

	Store name	Commodity name	Barcode	Retail price	Price unit	Specification	Operation
☐	Oversea001	Biscuit	22556688	23.5	pcs		Edit Delete
☐	Oversea001	Apple pie	12345678	2.8	pcs		Edit Delete
☐	Oversea001	Note book	111112222333	14.99			Edit Delete
☐	Oversea001	ART CARD PAPER CUP SLEEV E 210G 1PAGE COATED PVC GLOSS DIE-CUT 4 COLORS SI ZE 26X6 CM 500 PCS.	22233344				Edit Delete
☐	Oversea001	PU Leather Notebook	33333	10.99		PU Leather	Edit Delete
☐	Oversea001	Soft drink	895315640	5.88			Edit Delete
☐	Oversea001	MARACUJA - UNIDADE	8125	13.99	1T		Edit Delete
☐	Oversea001	PITAYA VERMELHA - UNIDAD E	8124	11.99	1B		Edit Delete

1.2.3 Add new product fields

Operation process: 1 Product field → 2 Add → 3 Add new field name and select type → 4 Confirm

1 Product Configuration

2 + Create

3 add new field

4 Confirm

Filed name	Store Name
☐ Store Name	Oversea001
☐ out sale	Oversea001
☐ STOCK	Oversea001
☐ unit	Oversea001
☐ Grade	Oversea001
☐ warranty	Oversea001
☐ Tag ID	Oversea001
☐ Template Name	Oversea001
☐ Base Station ID	Oversea001
☐ Template ID	Oversea001

1.3 Bind and Updated Tag

1.3.1 Single binding and update tag

Operation process: 1 Tag management → 2 Search tag ID → 3 Update → 4 Select template (in the left side) → 5 Select base station → 6 Search for bound commodity → 7 update → 8 Refresh the page to view the device information has been updated

The screenshot displays the 'Tags' management interface. The left sidebar contains navigation options: Home, Tags, Base Station Management, Tag Update Queue, Timing task, Digital label, Product, Template, Material, Permission, and Record. The main area shows a table of tags with columns: Index, Tag ID, Store, Tag Size, Base station name, Commodities, Barcode, Template name, Firmware Version, and Operation. A red box highlights the '2 Tag ID' field in the search bar. A green box highlights the '3 Update' button in the operation column. Below the table, a preview of a tag is shown with a red box around the '4 select template' button and a green box around the '5 select base station' dropdown. A red box highlights the '6 bind commodity' button in the selection screen. The selection screen shows a list of commodities with a red box around the '6 bind commodity' button. The bottom of the interface shows a search bar with the value '756' and a table of tags with a red box around the '756' value and a green box around the 'PG-101' base station name.

Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
1	3060022032069756	Oversea001	2.9"	PG-101	Strawb	621549	Joce-2.9标准	1.1.4	Update History Edit
2	3060022032069780	Oversea001	2.9"	PG-101	PU Lea	33333	grace01	1.1.4	Update History Edit
3	3060022032069868	Oversea001	2.9"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History Edit
4	3060022032070009	Oversea001	2.9"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History Edit
5	3060070032068325	Oversea001	2.13"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History Edit

Template List 2.9" 1 / 4

4 select template

5 select base station

6 bind commodity

756

Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
1	3060022032069756	Oversea001	2.9"	PG-101	Apple	123456	2.9 Apple pie	1.1.4	Update History Edit

Total: 1 / 1 / 20 / Page

1.3.2 Batch binding and send

Operation process: 1 Tag management → 2 Download template → 3 Edit excel file (ESL bind template)→ 4 fill in information in excel file→ 5 Click tags binding template to upload the excel file (ESL bind template)→ 6 Open

ESL / Tags

Tags x

Hardware v Export v Column config Store v

2 Download template Tags Batch binding

Tag, Product, Base Station, Template, Location

☐	Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
☐	1	3060022032069756	Oversea001	2.9"	PG-101	Apple	123456	2.9 Apple pie	1.1.4	Update History
☐	2	3060022032069780	Oversea001	2.9"	PG-101				1.1.4	Update History
☐	3	3060022032069868	Oversea001	2.9"	PG-101	PU Lea	33333	grace01	1.1.4	Update History
☐	4	3060022032070009	Oversea001	2.9"	PG-101				1.1.4	Update History
☐	5	3060070032068325	Oversea001	2.13"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History
☐	6	3060120032068789	Oversea001	4.2"	PG-101			台北展-T6	1.1.4	Update History
☐	7	3060120032068816	Oversea001	4.2"	PG-101	ART CA	222333	台北展-T7	1.1.4	Update History
☐	8	3090070032069944	Oversea001	2.13"	sunlux			Bindawood 2.13 a pple	1.1.4	Update History
☐	9	3090070032070074	Oversea001	2.13"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History
☐	10	3090070032070079	Oversea001	2.13"	sunlux			Bindawood 2.13 a pple	1.1.4	Update History
☐	11	3090070032070081	Oversea001	2.13"	PG-101	ART CA	222333	Joce-2.13标准	1.1.4	Update History
☐	12	3100020032074870	Oversea001	2.9"	PG-101	ART CA	222333	Joce-2.9标准	1.1.4	Update History
☐	13	3100020032075481	Oversea001	2.9"	demokitt108	PU Lea	33333	本子2.9	1.1.4	Update History

ESL_binds_tmpl.xlsx

Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
1	3060022032069756	Oversea001	2.9"	PG-101	Apple	123456	2.9	1.1.4	Update History Edit
2	3060022032069780	Oversea001	2.9"	PG-101	Biscuit	225566	2.9	1.1.4	Update History Edit

1.3.3 Replacing a single template or base station


Operation process: 1 Tag management → 2 Search tag ID → 3 Update → 4 Select template(optional) → 5 Select base station → 6 Update

Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
1	3060022032069756	Oversea001	2.9"	PG-101	Apple	123456	2.9	1.1.4	Update History Edit

4 select new template


5 select new base station

Note: if change base station only, no need to select template

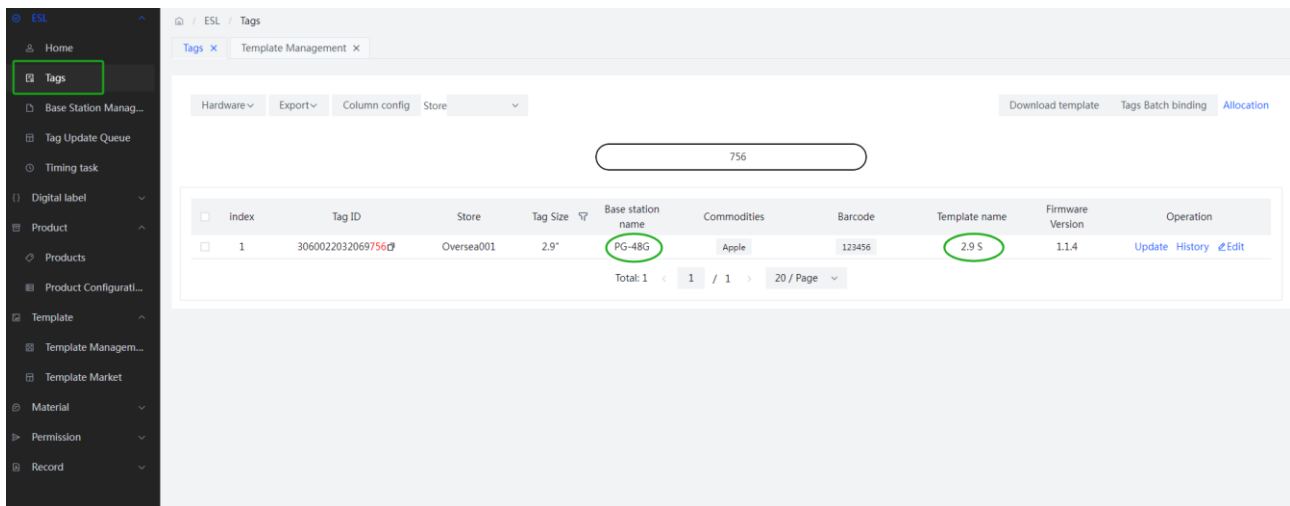

1.3.4 Replacing templates or base stations in batches

Operation process: 1 Tag management → 2 Export (binding relationship) → 3 Download → 4 Edit the binding relationship table template or base station list new information and save → 5 Label batch binding → 6 Select the new binding relationship table → 7 Open → 8 Refresh the web page to view the device information has been updated

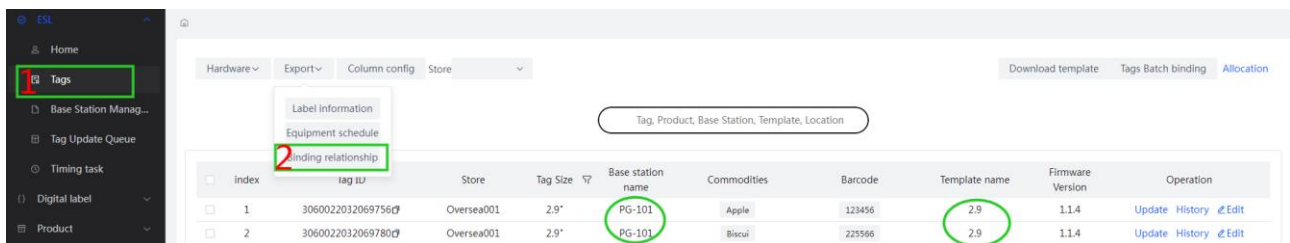

ESL

Home

Tags

Base Station Manag...

Tag Update Queue

Timing task

Digital label

Product

Template

ESL / Tags

Tags x

Hardware Export Column config Store

Download template Tags Batch binding Allocation

Tag, Product, Base Station, Template, Location

☐	Index	Tag ID	Store	Tag Size	Base station name	Commodities	Barcode	Template name	Firmware Version	Operation
☐	1	3060022032069756D	Oversea001	2.9"	PG-48G	Apple	123456	2.9 Apple pie	1.1.4	Update History Edit
☐	2	3060022032069780D	Oversea001	2.9"	PG-48G	Biscuit	225566	2.9 Biscuit	1.1.4	Update History Edit

8 refresh this page(Ctrl + F5) to check whether base station and template which has updated

1.4 Tag Update Queue Reissue

1.4.1 Reissue a single queue

Operation process: 1 Tag update queue → 2 Reissue (single reissue operation)

The screenshot shows the 'Tag Update Queue' interface. On the left sidebar, 'Tag Update Queue' is highlighted with a red box and labeled '1'. The main table displays two queue entries. The first entry has a 'Reissue' button highlighted with a green box and labeled '2'. The table columns are: Batch, Trigger, Store, Update Time, Total, Progress, Overtime|Success|Waiting, and Action.

	Batch	Trigger	Store	Update Time	Total	Progress	Overtime Success Waiting	Action
1	1814173349967040512	Binding issuance	Oversea001	2024-07-19 13:40:07	1	0%	1 0 0	Reissue Detail
2	1814173294879051776	Binding issuance	Oversea001	2024-07-19 13:39:54	1	0%	1 0 0	Reissue Detail

1.4.2 Reissuance by time

Operation process: 1 Tag update queue → 2 Select the reissue time by time option (resend failed tags according to the selected time)

The screenshot shows the 'Tag Update Queue' interface. On the left sidebar, 'Tag Update Queue' is highlighted with a red box and labeled '1'. The main table displays four queue entries. The first entry has a 'Reissue' button highlighted with a green box and labeled '2'. A dropdown menu is open next to the 'Reissue' button, showing options: 'Within an hour', 'Within 3 hours', 'In one day', and 'Within 7 days'. The table columns are: Batch, Trigger, Store, Update Time, Total, Progress, Overtime|Success|Waiting, and Action.

	Batch	Trigger	Store	Update Time	Total	Progress	Overtime Success Waiting	Action
1	1814178712091103232	Binding issuance	Oversea001	2024-07-19 14:01:25	1	0%	0 0 1	Reissue Detail
2	1814173349967040512	Binding issuance	Oversea001	2024-07-19 13:40:07	1	0%	1 0 0	Reissue Detail
3	1814173294879051776	Binding issuance	Oversea001	2024-07-19 13:39:54	1	0%	1 0 0	Reissue Detail
4	1814155109886857216	Binding issuance	Oversea001	2024-07-19 12:27:38	1	0%	1 0 0	Reissue Detail

1.4.3 Checking the status of the update queue

Operation process: 1 Tag update queue → 2 View details (view queue)

The screenshot shows the 'Tag Update Queue' interface. On the left sidebar, 'Tag Update Queue' is highlighted with a red box and labeled '1'. The main table displays two queue entries. The first entry has a 'Reissue' button highlighted with a green box and labeled '2'. The table columns are: Batch, Trigger, Store, Update Time, Total, Progress, Overtime|Success|Waiting, and Action.

	Batch	Trigger	Store	Update Time	Total	Progress	Overtime Success Waiting	Action
1	1814178712091103232	Binding issuance	Oversea001	2024-07-19 14:01:25	1	100%	0 1 0	Reissue Detail
2	1814173349967040512	Binding issuance	Oversea001	2024-07-19 13:40:07	1	0%	1 0 0	Reissue Detail

Tag ID, Product name

Search

Reset

Column config

Deleted

☐	Tag ID, Product name	Product Name	Update Time	Status	🔍	Error	Action
☐	3060022032069756	Apple pie	2024-07-19 14:01:25	Updated			Retry


Total: 1 < 1 > 20 / Page

Goto

1.5 Material




1.5.1 Material library (local upload)

Operation process: 1 Material → 2 Material Library → 3 Create → 4 Select the options as required → 5 Save

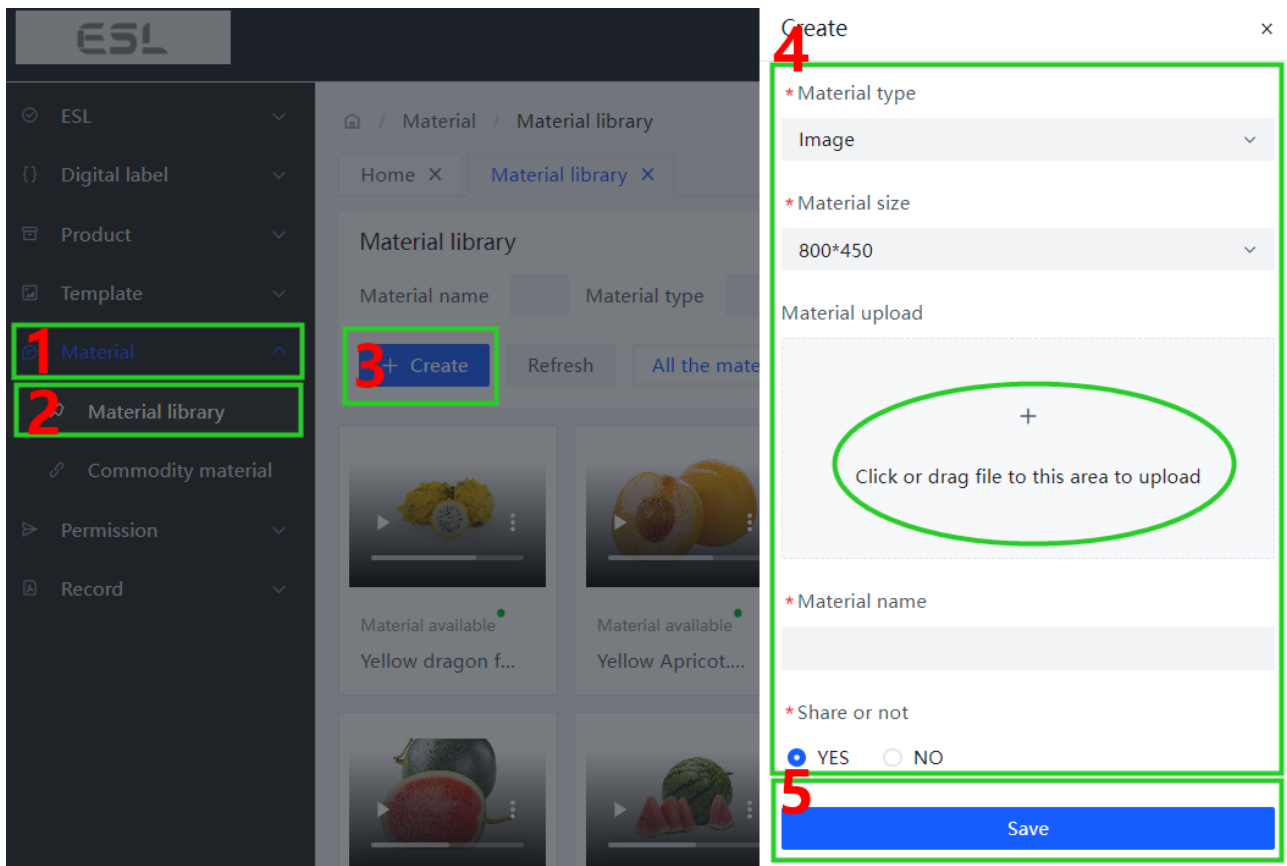

1.5.2 Product material (single add commodity material)

Operation process: 1 Material → 2 Commodity material → 3 Input commodity name or bar code and Search → 4 Add pictures or video material → 5 Input material name and Search → 6 Select material (below area) → 7 Confirm

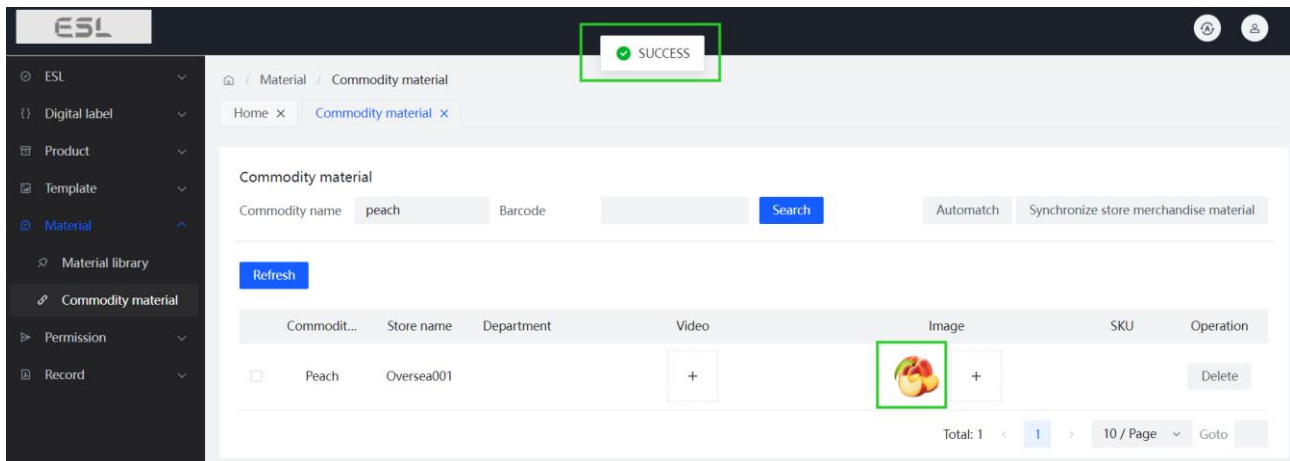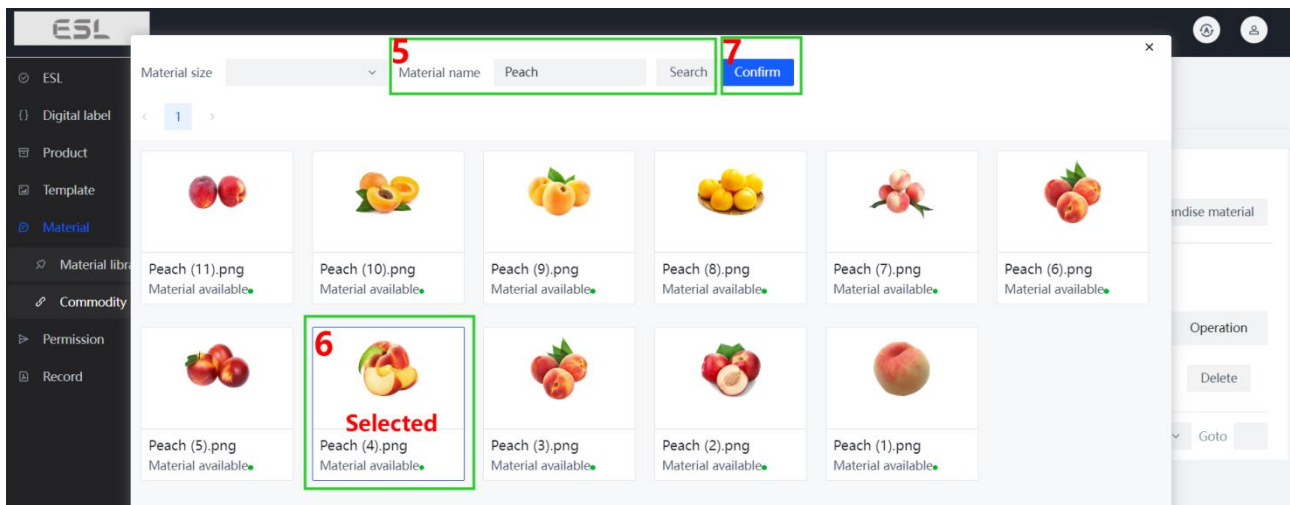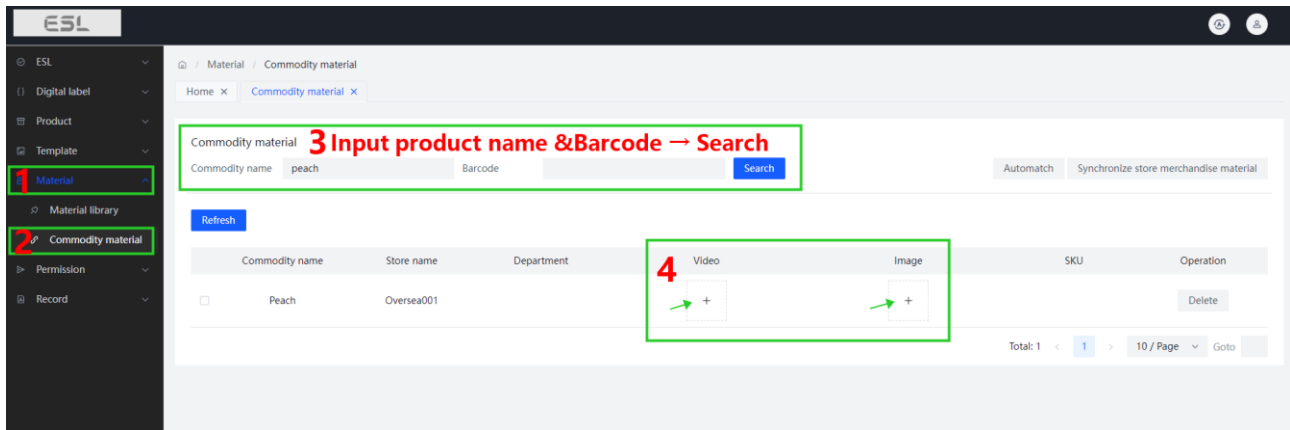

1.5.3 Commodity material (batch automatic matching commodity material)

Operation process: 1 Material → 2 Auto match

ESL

ESL

Digital label

Product

Template

1 Material

2 Commodity material

Material library

Permission

Record

Material / Commodity material

Home x Commodity material x Material library x

Commodity material

Commodity name peach Barcode Search

3 Automatch Synchronize store merchandise material

Refresh

Commodit...	Store name	Department	Video	Image	SKU	Operation
☐ Peach	Oversea001		+	 +		Delete

Total: 1 < 1 > 10 / Page Goto

1.6 Authority


1.6.1 Store management

Operation process: 1 Permission → 2 Store management → 3 Create → 4 Input store account information → 5 Confirm

The screenshot displays the ESL system interface. On the left is a dark sidebar menu with the following items: ESL, Digital label, Product, Template, Material (expanded), Material library, Commodity material, Permission (highlighted with a red '1'), Store Management (highlighted with a red '2'), Role Management, User Management, and Record. The main content area shows a breadcrumb trail: Home / Permission / Store Management. Below this, there's a 'Store Management' section with a '+ Create' button (highlighted with a red '3'). A modal window titled 'Edit' is open, containing a form for 'Input Sub-account Info' (highlighted with a red '4'). The form fields are: Store Name, Store Manager, Contact Number, Account, and Password. At the bottom of the modal is a 'Confirm' button (highlighted with a red '5').

1.6.2 Role management

Operation process: 1 Permission → 2 Role management → 3 Create → 4 Create new role → 5 Assign role permission → 6 Save

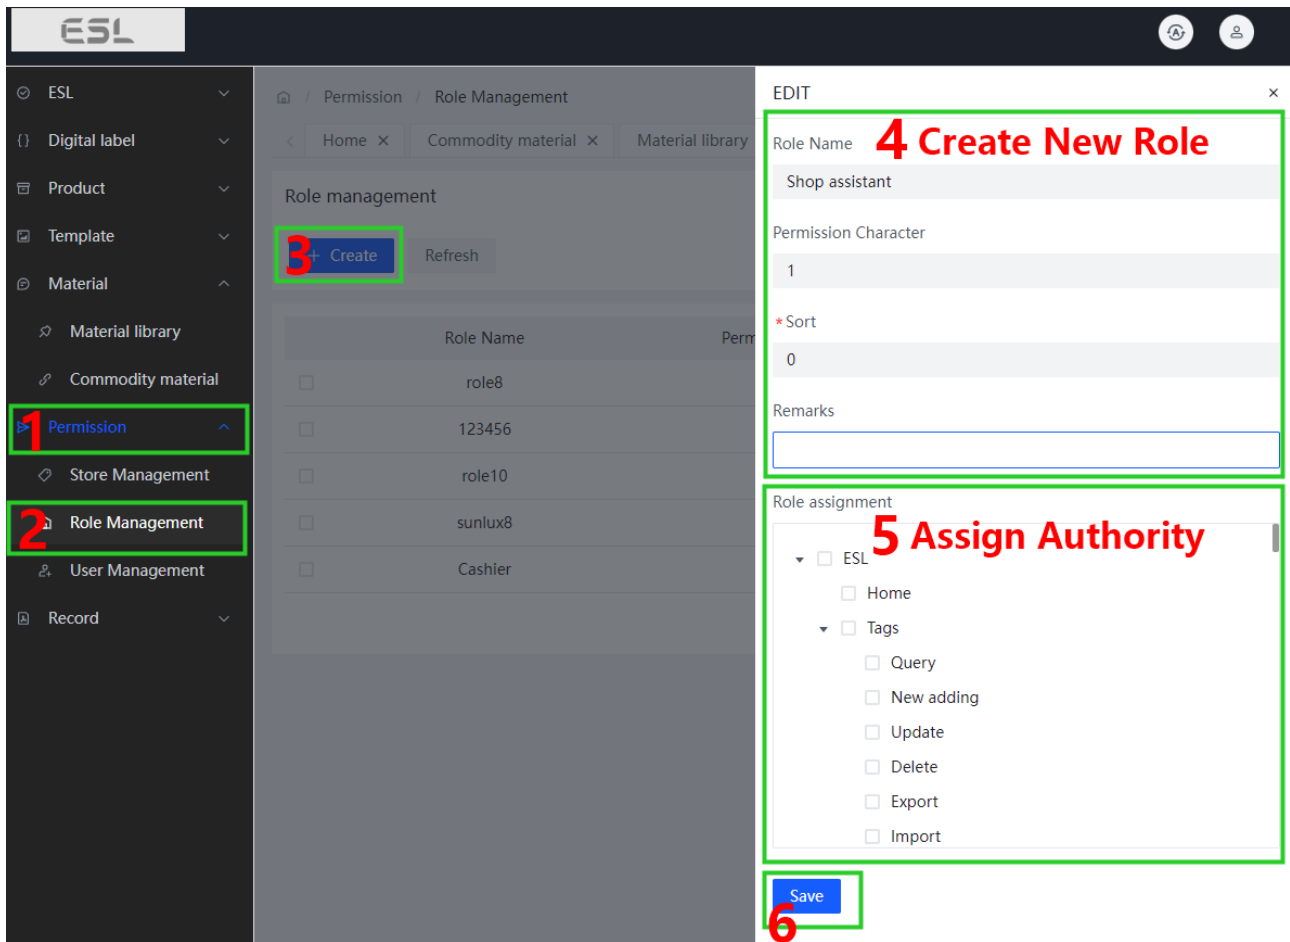

1.6.3 User management

Operation process: 1 Permission→2 User management →3 Create user account →4 Input Information →5 Select the role in pull-down list →6 Save

ESL

ESL

Permission / User Management

Home x Commodity material x Material library

User Management

Account Search

3 Create Refresh

	Full Name	Mobile number
☐	IHH Healthcare	
☐	Danube	
☐	CloudBox Inc	
☐	lucy	
☐	Saudia Group	
☐	CCTL	

Edit

4 Input User Info

* Nickname Joce

* Full Name Jocelyn Lam

Mobile number +13687946214

password

Role **5** Select in pull-down list

role8

123456

Shop assistant

role10

sunlux8

Cashier

Role

Shop assistant x

6 Save

1.7 Base Station Allocation

1.7.1 Electronic shelf label (base station) batch distribution

Operation process: 1 ESL→ 2 Base station management →3 Allocation →4 Bulk transfer→5 Download template excel →6 Ok→7 Open the downloaded file →8 Input the base station ID (as below picture)→9 Find the store No. (as below picture) →10 Upload file (Click “+”)→11 Select the template excel →12 Open →13 Check the result

The image illustrates the process of base station allocation through a series of steps marked by red numbers 1 through 13:

- 1** ESL (Software Interface)
- 2** Base Station Management (Menu)
- 3** Allocation (Button)
- 4** Bulk Transfer (Button)
- 5** Bulk Transfer Template (Download Link)
- 6** Ok (Button)
- 7** File Explorer (Downloaded File)
- 8** Excel Spreadsheet (Base Station ID and Store No.)
- 9** Base Station Management (Menu)
- 10** Bulk Transfer Template (Download Link)
- 11** Bulk Transfer (Button)
- 12** Bulk Transfer Template (Download Link)
- 13** Bulk Transfer (Button)

The screenshots show the ESL software interface, a file explorer, and an Excel spreadsheet. The Excel spreadsheet has columns for Base Station ID and Store No. The ESL software interface shows the Base Station Management menu and the Bulk Transfer button. The file explorer shows the downloaded file.

9

Store Name	Store Manager	Contact Number	Number of Base Sta...	Created	storeNo	Account	Operation
IHH Healthcare Sin...	Ms Yuru	65 81810230		2024-05-16 09:53:14	E00000405	IHH Healthcare	Edit
Bindawood Holding...	Ali Hamza	15920304474		2024-04-08 09:50:53	E00000364	Danube	Edit
CloudBox Inc	CloudBox Inc	123456		2024-03-18 10:07:41	E00000354	CloudBox Inc	Edit
lucy	lucy	123456		2024-03-18 09:49:10	E00000353	lucy	Edit
Saudia Group	Shanavas	15920304474		2024-03-13 10:22:11	E00000349	Saudia Group	Edit
ABCS	Bell	13662466055		2024-03-05 13:46:54	E00000345	CCTL	Edit

10

Be put in storage

Bulk Transfer

Bulk Transfer Template

11

12

Result



Success

0

Total

1

Failure

0

Access
denied

0

Reason

Store Name

Reason

Line



No Data

Cancel

Ok

1.8 ESL Timing Task

1.8.1 ESL timing task

Operation process: 1 ESL → 2 Timing Task → 3 Add → 4 Mission name → 5 Select time → 6 Set dynamic price for the task → 7 Next step → 8 Input commodity name → 9 Choose products (Multiple-choice) → 10 Check the available label size quantities for task → 11 Select the template in the pull-down list → 12 Finished

The screenshot displays the 'ESL' application interface. On the left, a sidebar menu contains several options, with 'ESL' and 'Timing task' highlighted and numbered 1 and 2 respectively. The main area shows the 'Schedule' configuration form, which is divided into three sections: 'Mission name' (step 4), 'Selection time' (step 5), and 'Dynamic field' (step 6). The 'Mission name' section has a text input field containing 'Promotion'. The 'Selection time' section includes a 'Type' dropdown set to 'Week', a date range selector showing '02:00:02' to '07:00:06', and a day-of-the-week selector with 'Fri' selected. The 'Dynamic field' section contains three rows of price settings: 'retailPrice' (20), 'memberPrice' (50), and 'salePrice' (30), each with a dropdown menu and a percentage input field. A 'Next step' button is located at the bottom right of the form, numbered 7.

8 Input Commodity Name

Select product

9 Choose the commodities

☐ Commodity name	Barcode	Retail price
☐ Coke	00005	30
☐ Apple	00006	5
☐ سحر التوتونة	111111111110002	
☐ Note book	111112222333	14.99
☐ Apple pie	12345678	2.8
☐ Apple	1234567890	8.9
☐ Cola	1234567899	8.99

10

Select template

ESL Size	Quantity	
2.9" (296*128)	0	2.9" (296*128)
2.13" (250*122)	0	2.13" (250*122)
4.2" (400*300)	0	4.2" (400*300)
10.1" (800*1280)	0	10.1" (800*1280)
2.66"KBF (296*152)	0	2.66"KBF (296*152)
2.66"RW (296*152)	1	2.66"RW (296*152)
7.5" (800*480)	0	7.5" (800*480)

11

Last step

12


Finished

SUCCESS						
ESL / Timing task						
Home x Base Station Management x Timing task x						
Add Reset Search Deleted						
☐	Mission name	Mission type	Start Time	End Time	Stauts	Operation
☐	Promotion	Once	02:00:02	07:00:06	☒	Edit Delete
☐	Happy day	Once	10:00:00	19:06:06	☒	Edit Delete
☐	Promotion	Once	15:00:12	20:05:17	☒	Edit Delete
☐	000	Once	15:38:14	15:33:14	☒	Edit Delete

1.9 Account Center


1.9.1 Basic configuration

Operation process: 1 Click the icon in the upper right corner of the home page → 2 Basic config → 3 Offer the new account name → 4 Save

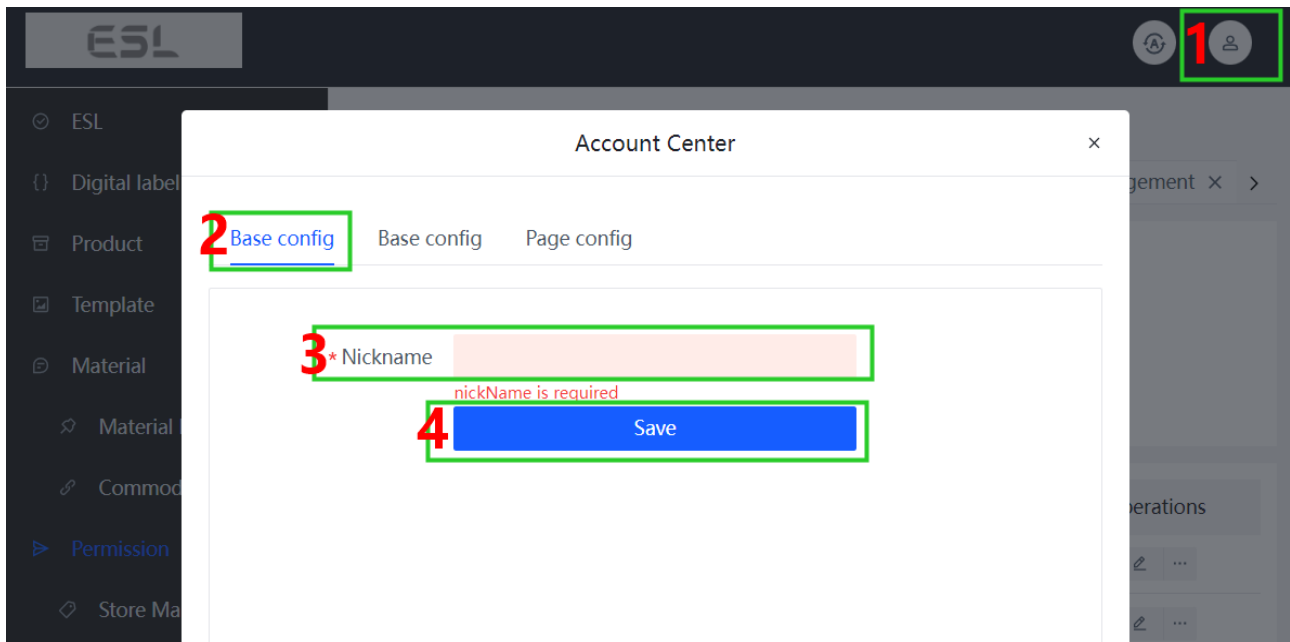

1.9.2 Change password

Operation process: 1 Click the icon in the upper right corner of the home page → 2 Base config → 3 Input previous password & the new password → 4 Save

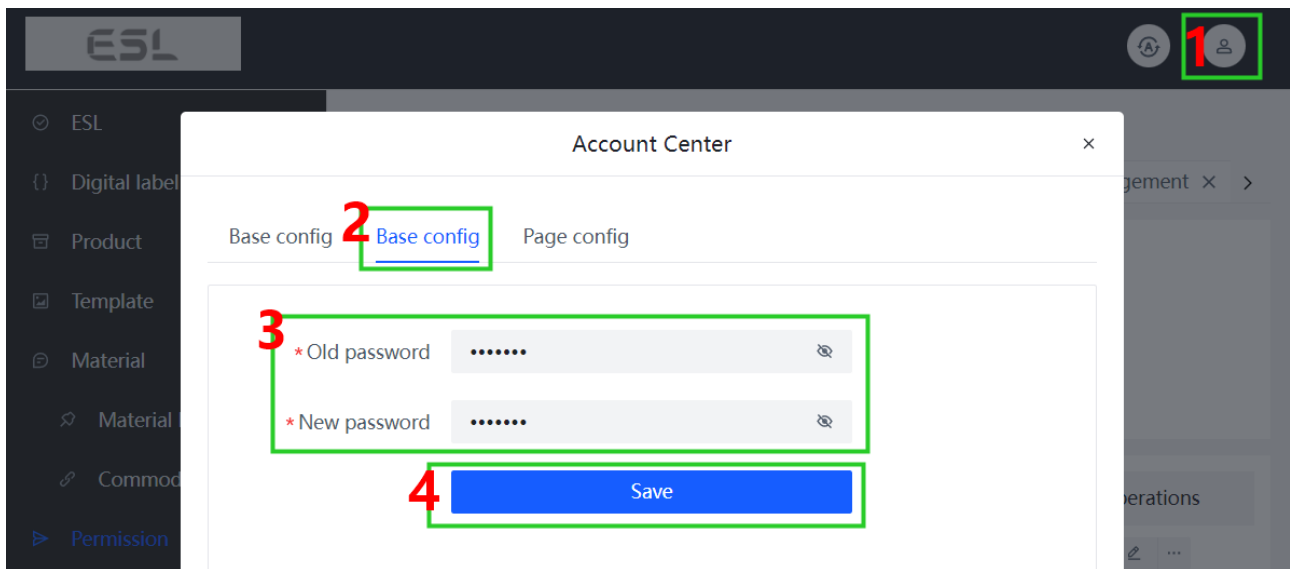

1.9.3 Page configuration

Operation process: 1 Click the icon in the upper right corner of the home page→2 Page Config→3 Input the required info→4 Save

