

Antenna specification

• Company Name

Shenzhen Innosystem Technology Ltd

• Company address

F2 Building 3 Shenzhen Software Park Technology Middle 2
Rd Gao Xin Science & Technology Park North, S.Z


Antenna model: MP341 V1.0

Applications

※Bluetooth Home RF

※ISM band 2.4GHz applications

1. Dimensions

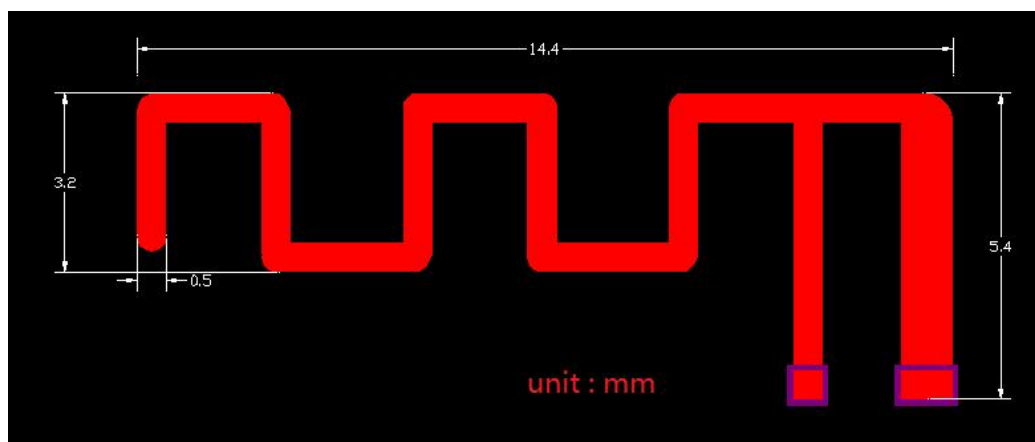


2. Specifications

number	Item	Specifications
1	Working Central Frequency	2441 MHz
2	Band Width	(2402-2480)MHz
3	Gain	0dBi
4	VSWR	≤2.0
5	Antenna type	PCB antenna
6	Azimuth Beam width	Omni - directional
7	Impedance	50ohm
8	Modulation mode	GFSK

3. simulation parameter


① VSWR

Mkr1: 2397MHz 1.47 Mkr2: 2450MHz 1.51 Mkr3: 2482 MHz 1.59

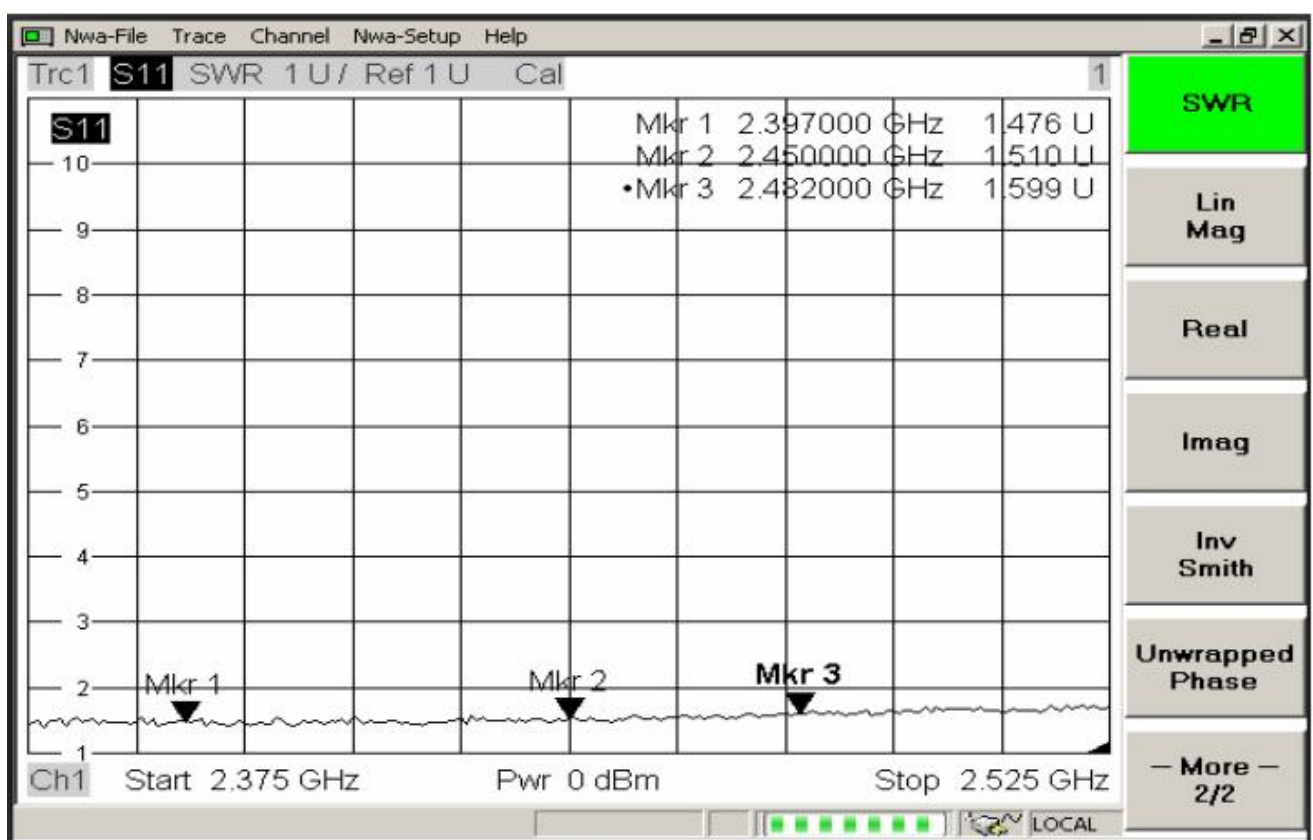


②Smith Char

Mkr1: 2397MHz 73.4 Mkr2: 2450MHz 62.7 Mkr3: 2482MHz 66.8

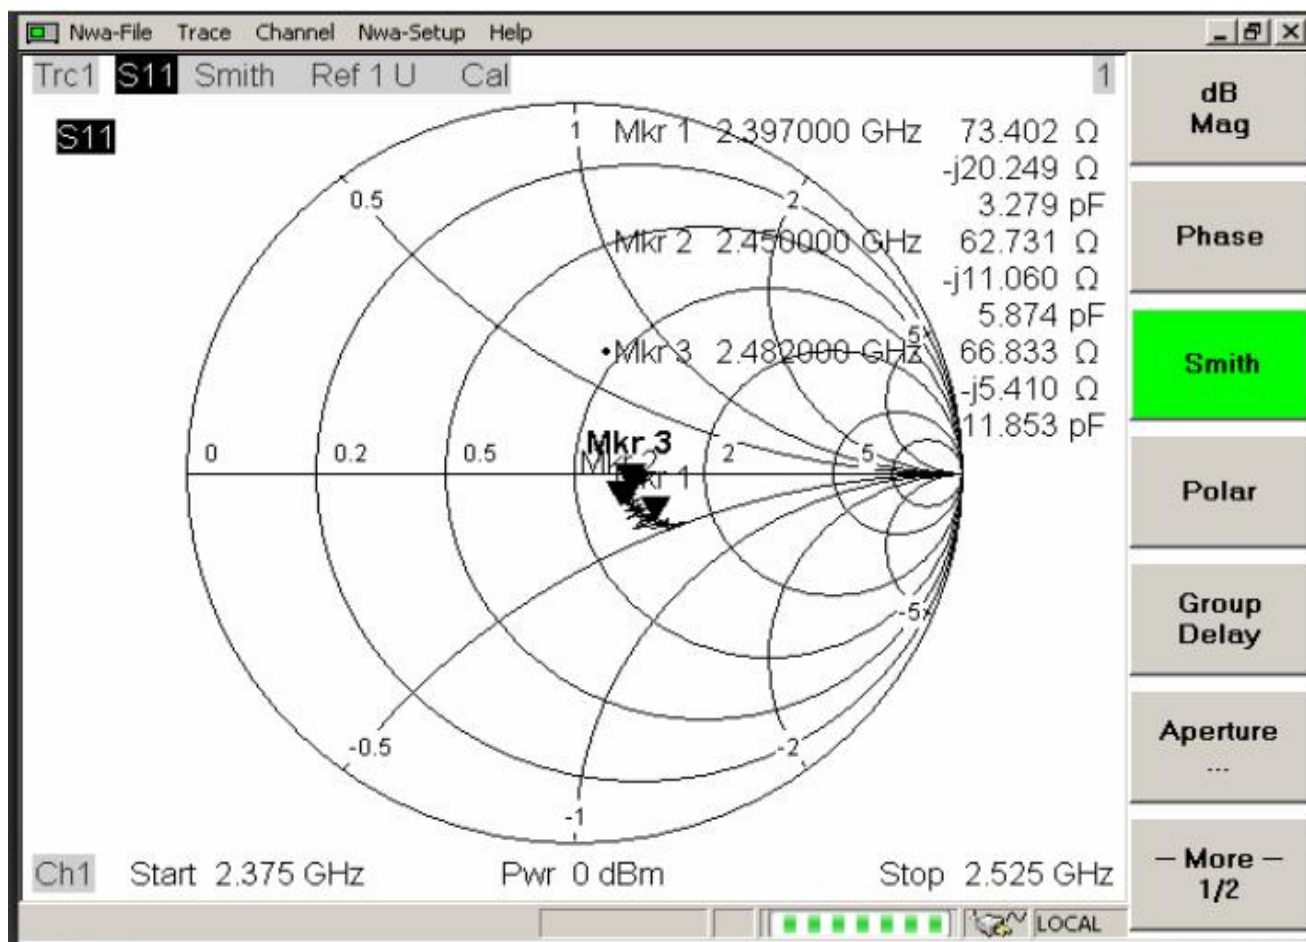


③Return Loss

Mkr1: 2397MHz -15 Mkr2: 2450MHz -18 Mkr3: 2482 MHz -16

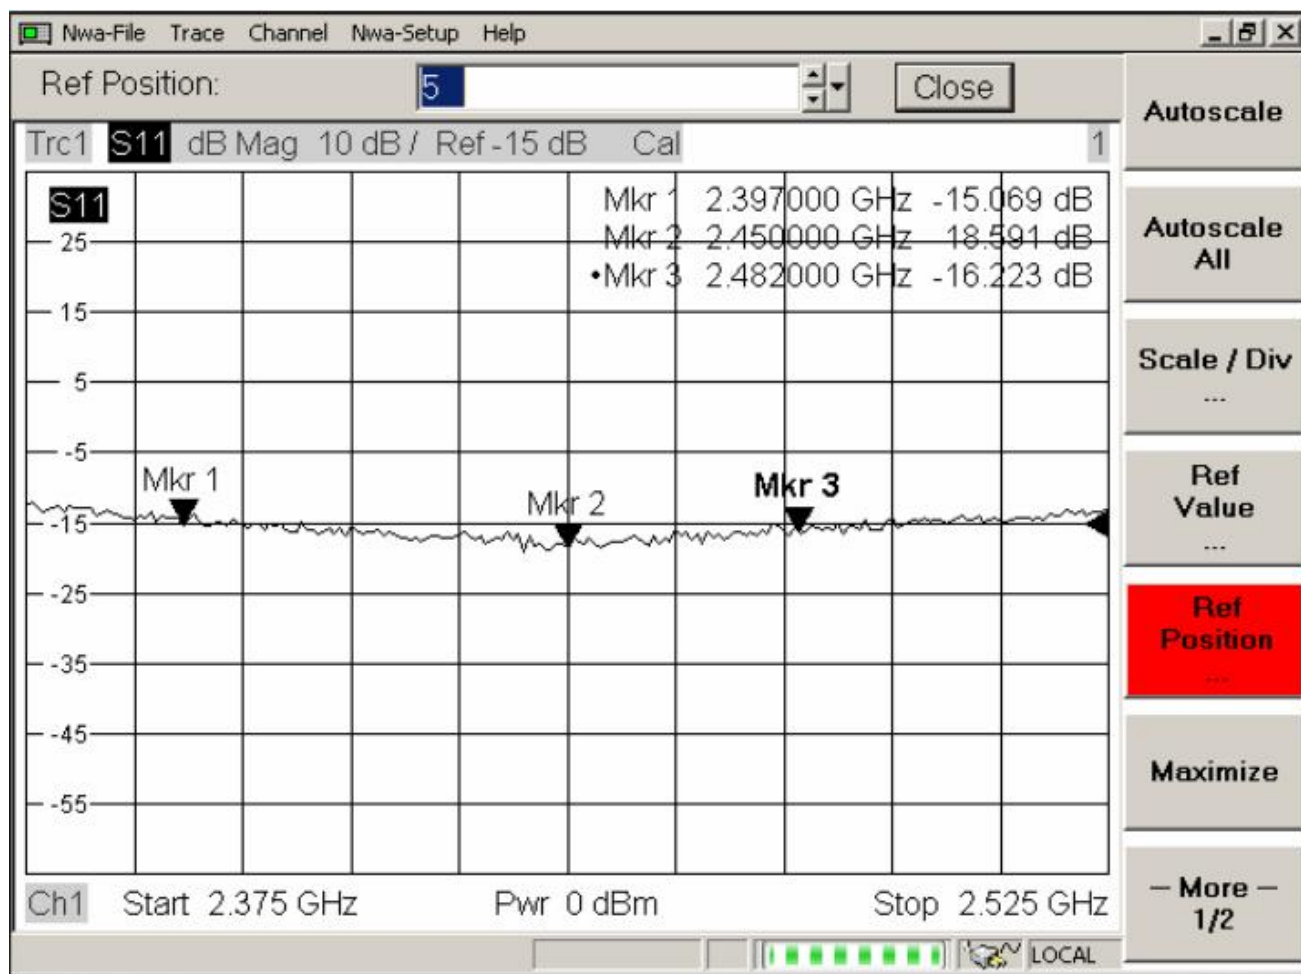

④Smith Char


Mkr1: 2400MHz 1.234 Mkr2: 2500MHz 1.051Mkr3: 2600MHz 1.322

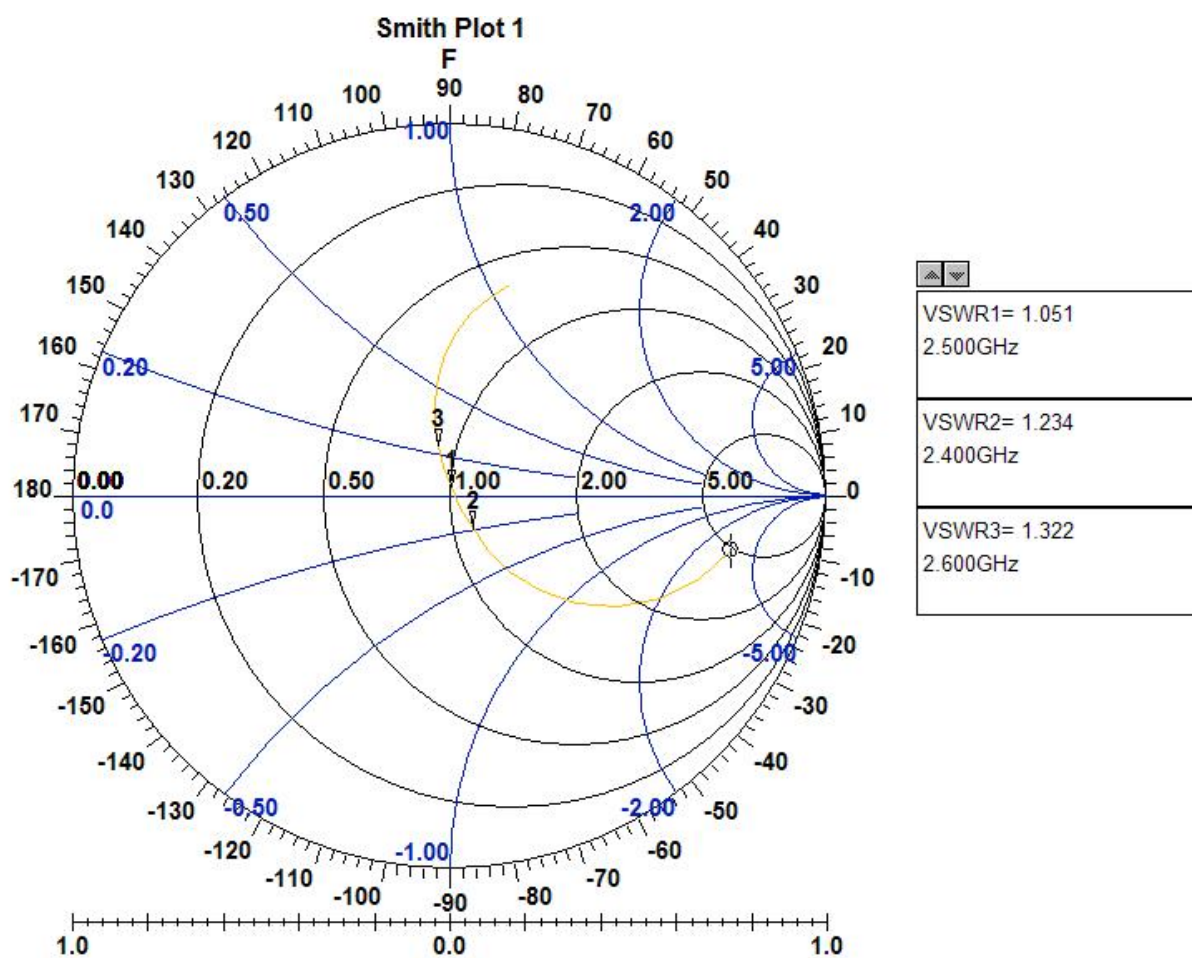

⑤Return Loss


Mkr1: 2400MHz -19.59 Mkr2: 2450MHz -27.70Mkr3: 2500MHz -31.97 Mkr4:

2550MHz -21.83

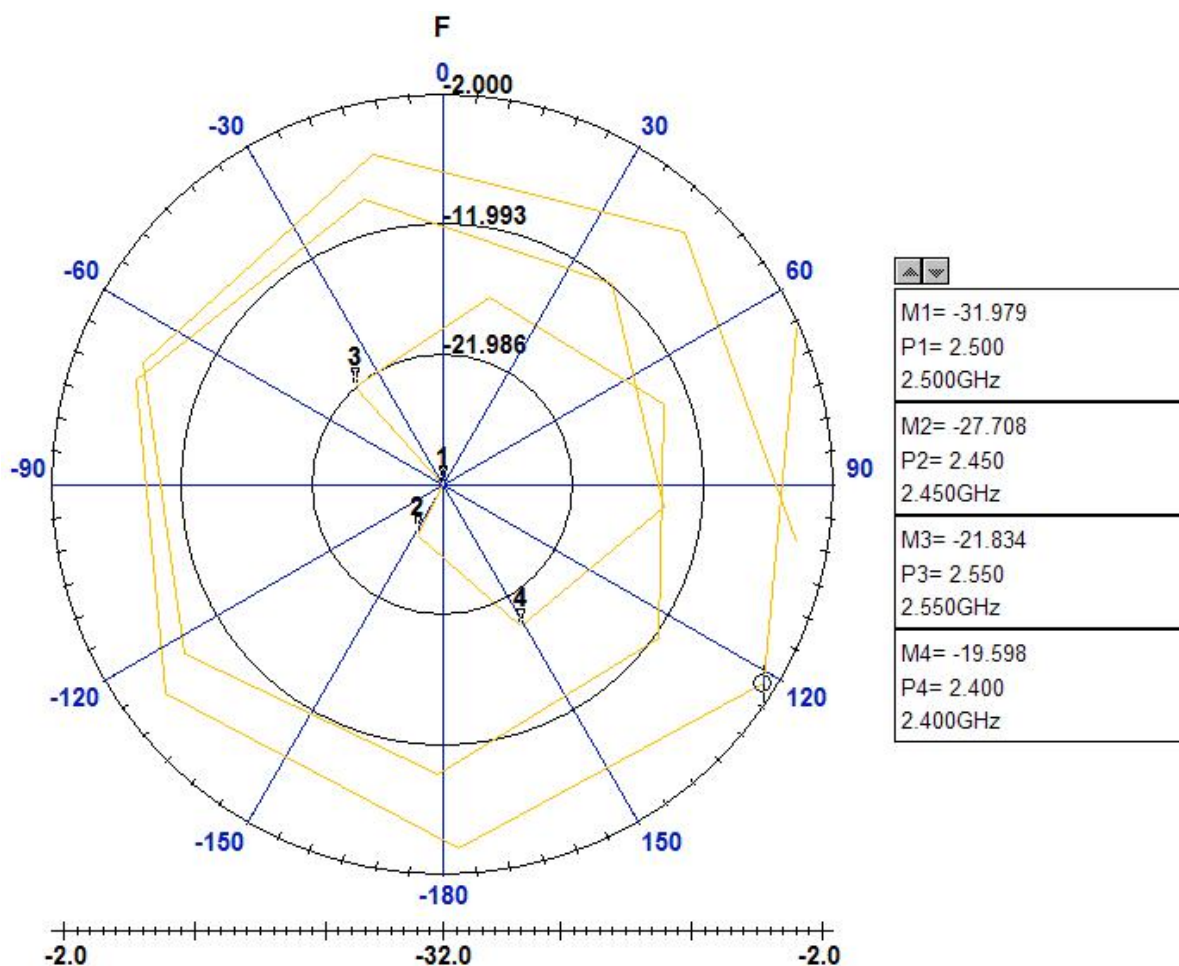


⑥Phase

Mkr1: 2400MHz -54.89 Mkr2: 2500MHz -82.03 Mkr3: 2600MHz -102.6

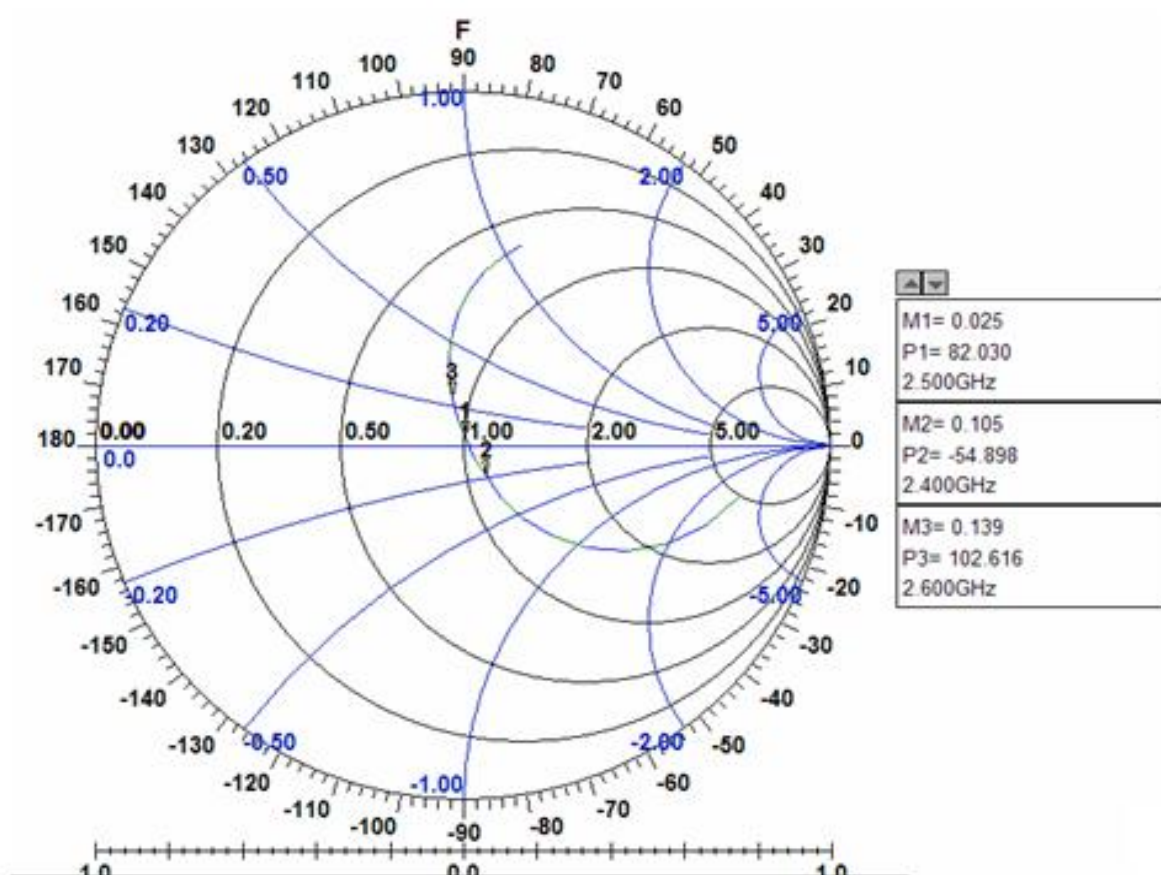


4. Radiation Patterns-Frequeⁿc: 2.4GHz

• 3DRadiation pattern

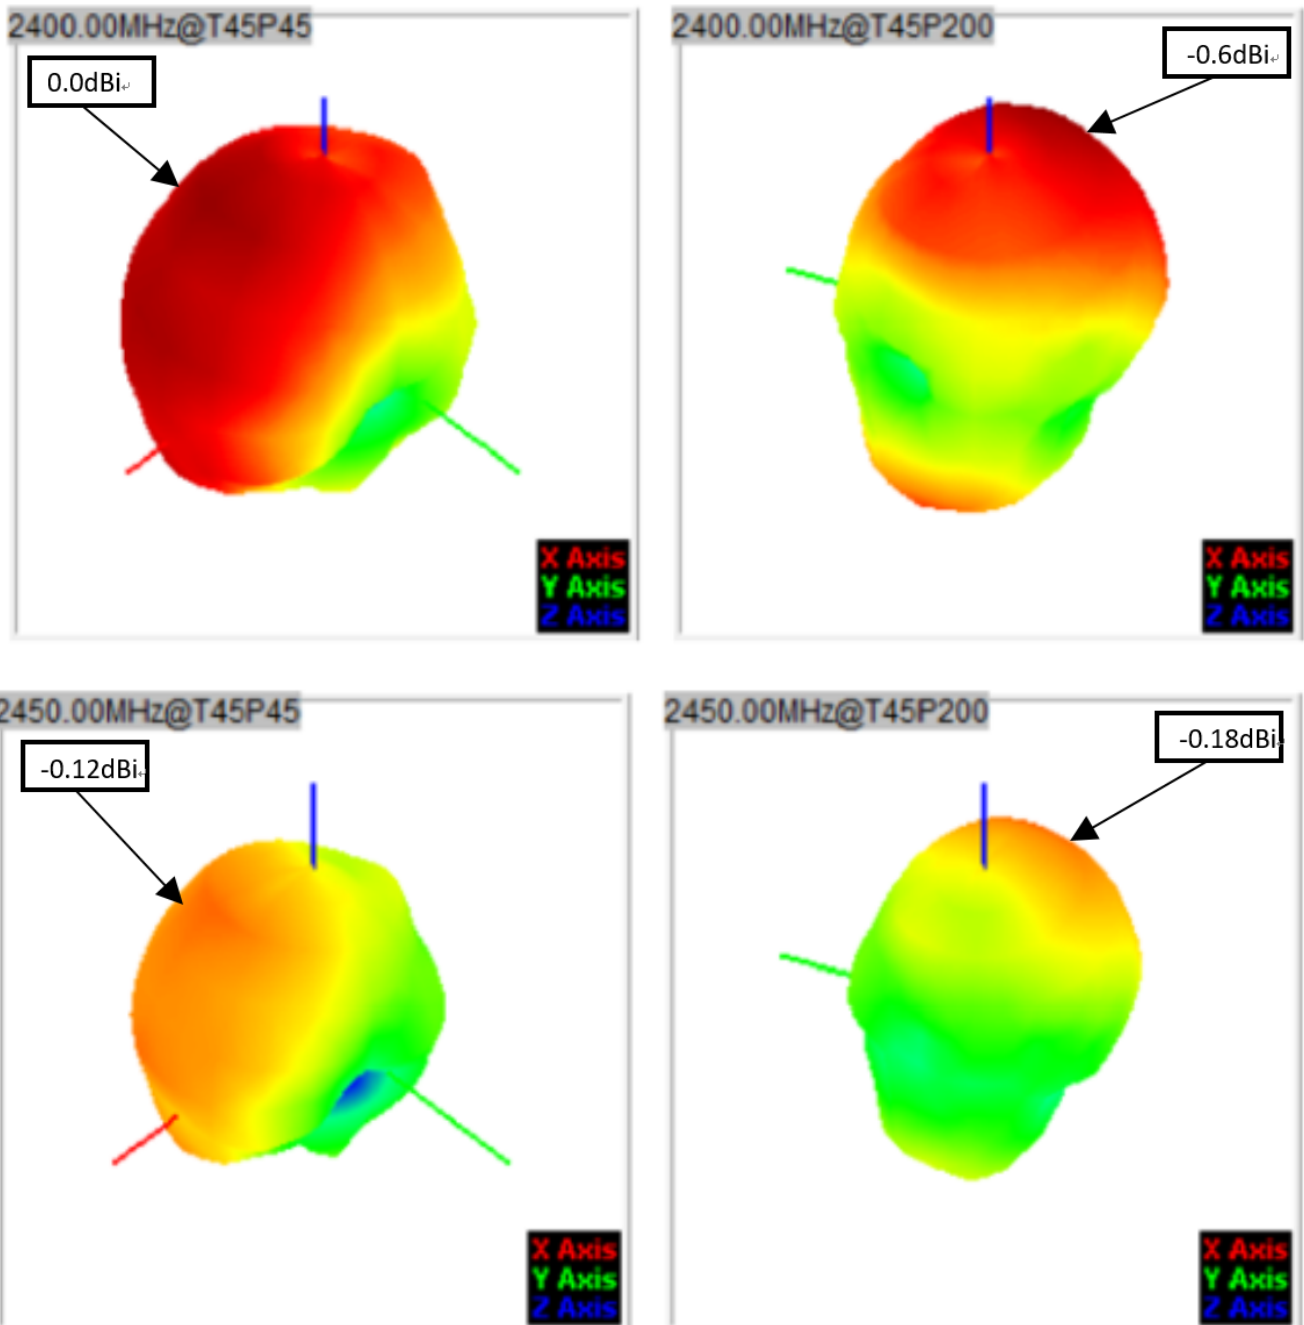

2500.00MHz@T45P45


-1.32dBi

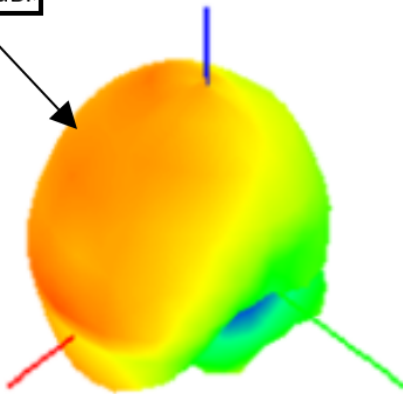

X Axis
Y Axis
Z Axis

2500.00MHz@T45P200

-1.55dBi

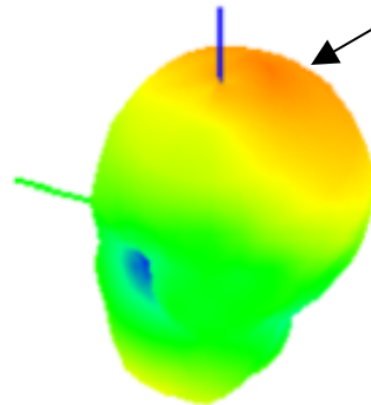

X Axis
Y Axis
Z Axis