


## Appendix A: Test Results of Bluetooth BR & EDR

|                                                                                                |    |
|------------------------------------------------------------------------------------------------|----|
| APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR.....                                            | 1  |
| APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH .....                                              | 2  |
| APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH .....                                             | 8  |
| APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION .....                               | 14 |
| APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY .....                                | 17 |
| APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY .....                                          | 20 |
| APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH ..... | 30 |
| <i>Band Edge</i> .....                                                                         | 30 |
| <i>Conducted Spurious Emission</i> .....                                                       | 43 |
| APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....                                | 53 |
| 30 MHz - 1GHz .....                                                                            | 53 |
| 1GHz - 18GHz .....                                                                             | 71 |
| APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS .....                     | 89 |


## Appendix A.1: Test Results of 99% Bandwidth

| Condition | Antenna | Modulation | Frequency (MHz) | 99%%BW (MHz) |
|-----------|---------|------------|-----------------|--------------|
| NVNT      | ANT1    | 1-DH1      | 2402.00         | 0.955        |
| NVNT      | ANT1    | 1-DH1      | 2441.00         | 0.954        |
| NVNT      | ANT1    | 1-DH1      | 2480.00         | 0.955        |
| NVNT      | ANT1    | 2-DH1      | 2402.00         | 1.129        |
| NVNT      | ANT1    | 2-DH1      | 2441.00         | 1.128        |
| NVNT      | ANT1    | 2-DH1      | 2480.00         | 1.130        |
| NVNT      | ANT1    | 3-DH1      | 2402.00         | 1.107        |
| NVNT      | ANT1    | 3-DH1      | 2441.00         | 1.108        |
| NVNT      | ANT1    | 3-DH1      | 2480.00         | 1.109        |


99% Occupied Bandwidth NVNT ANT1\_1-DH1\_2402\_00

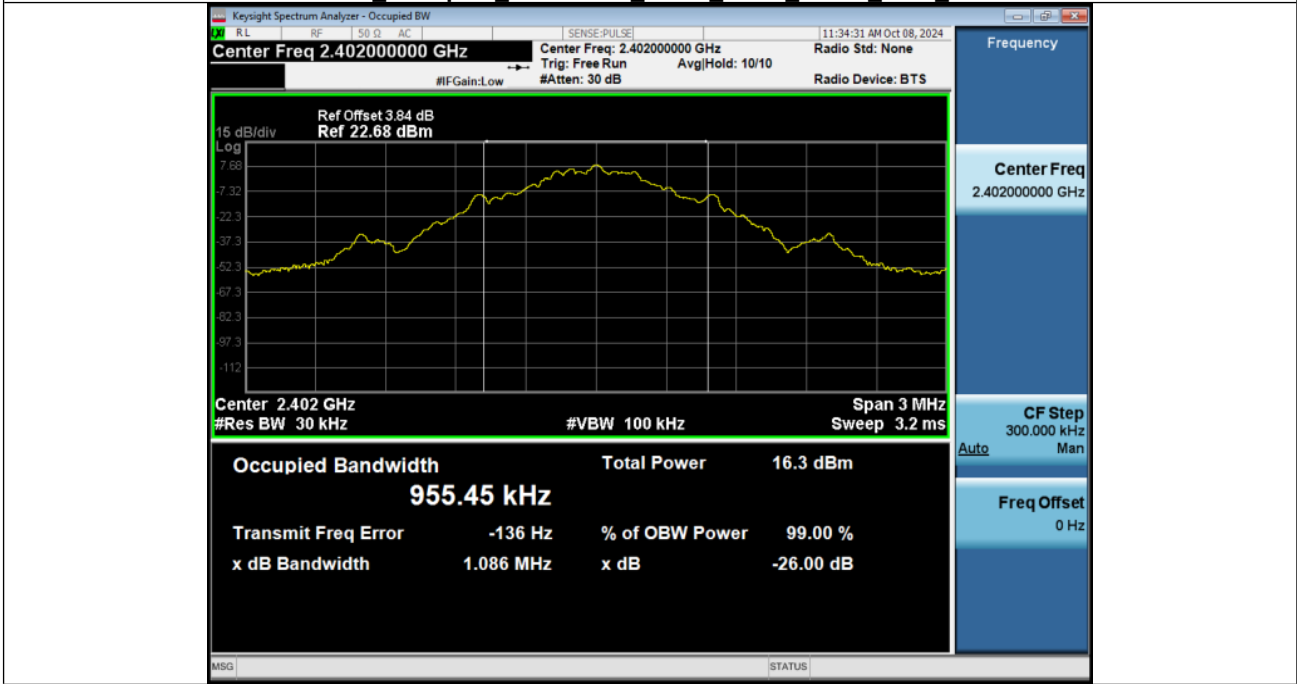


99% Occupied Bandwidth NVNT ANT1\_1-DH1\_2441\_00

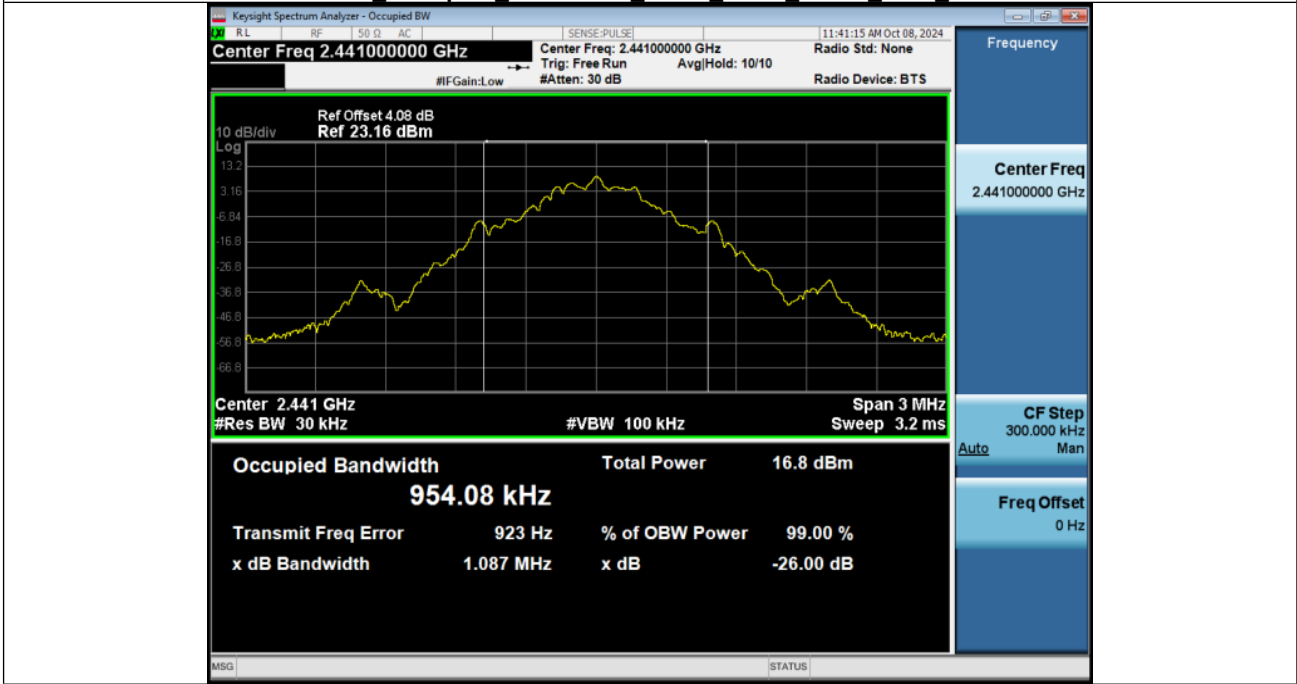

99% Occupied Bandwidth NVNT ANT1\_1-DH1\_2480\_00

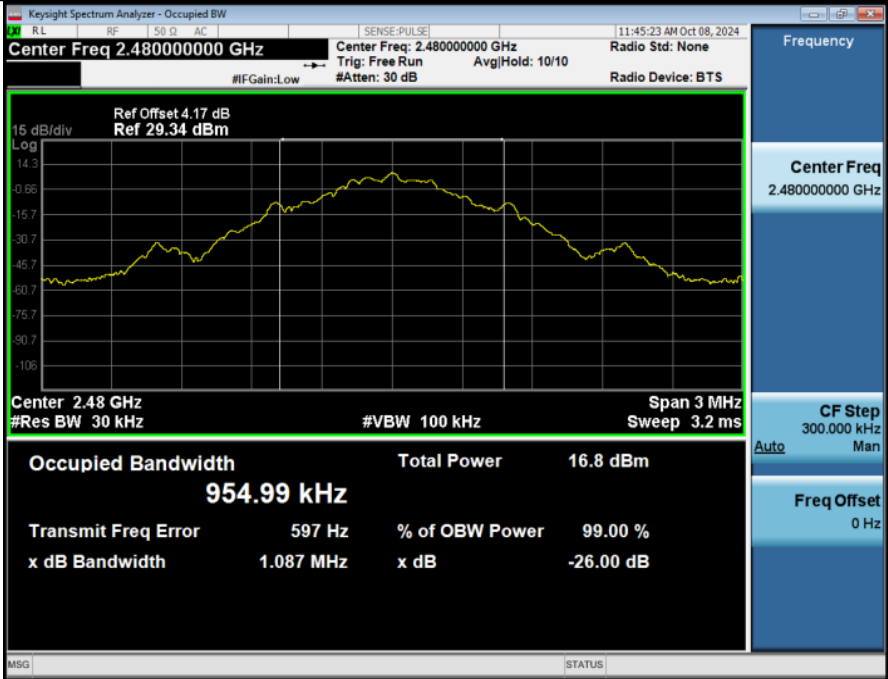


99% Occupied Bandwidth NVNT ANT1\_2-DH1\_2402\_00

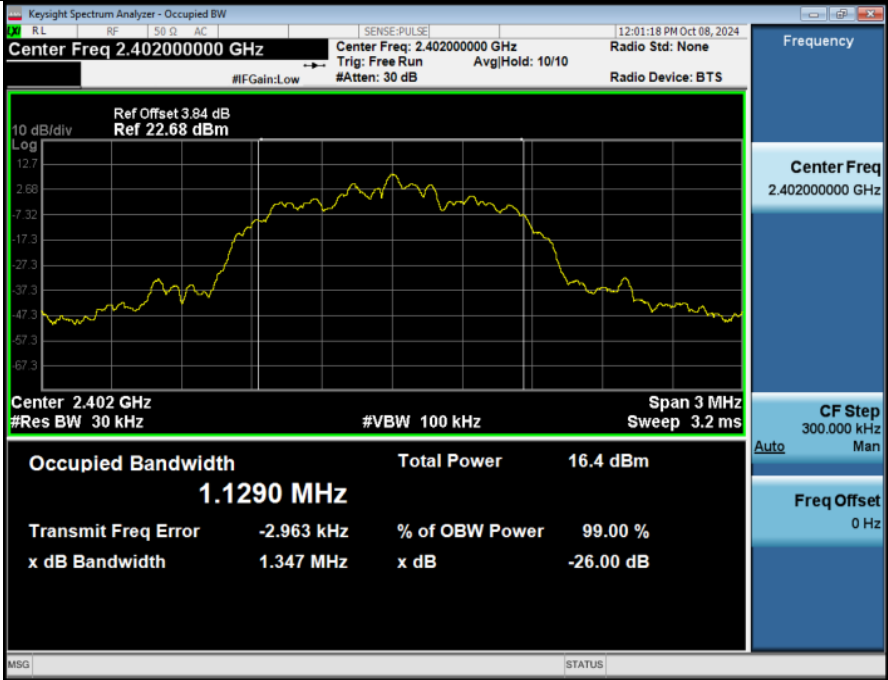


99% Occupied Bandwidth NVNT ANT1 2-DH1 2441 00




99% Occupied Bandwidth NVNT ANT1 2-DH1 2480 00

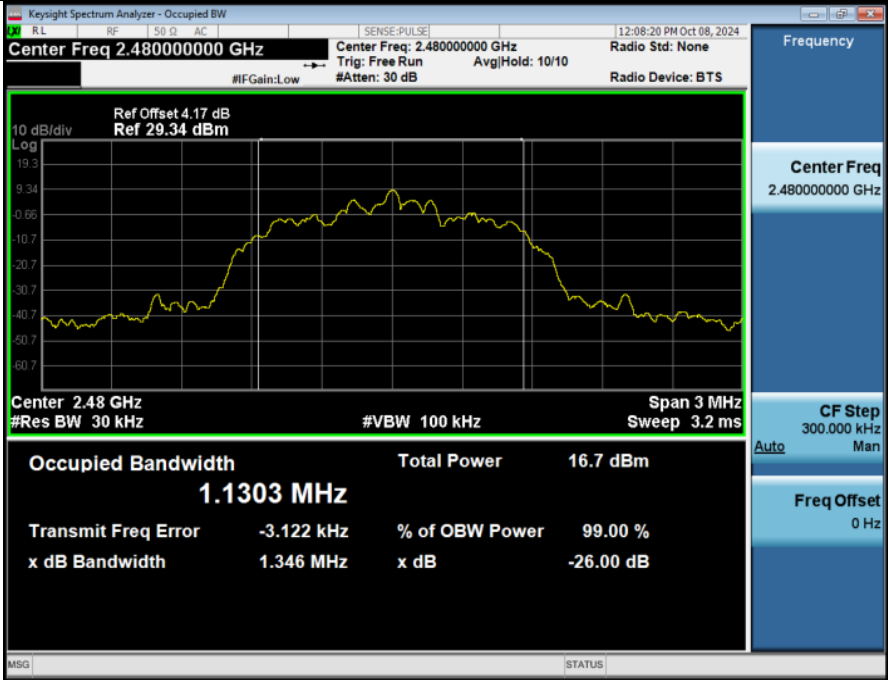


99% Occupied Bandwidth NVNT ANT1 3-DH1 2402 00

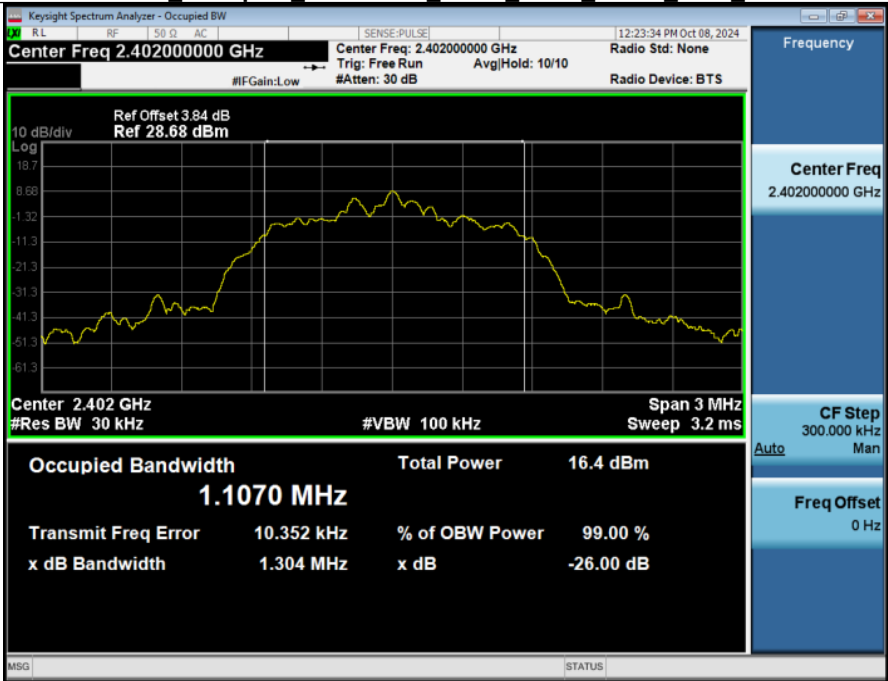

99% Occupied Bandwidth NVNT ANT1 3-DH1 2441 00

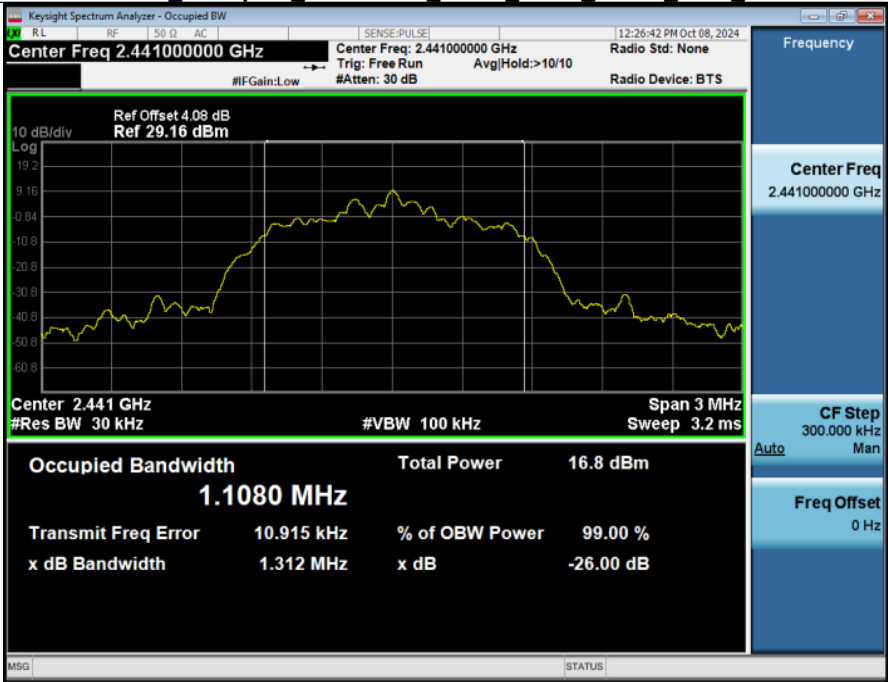


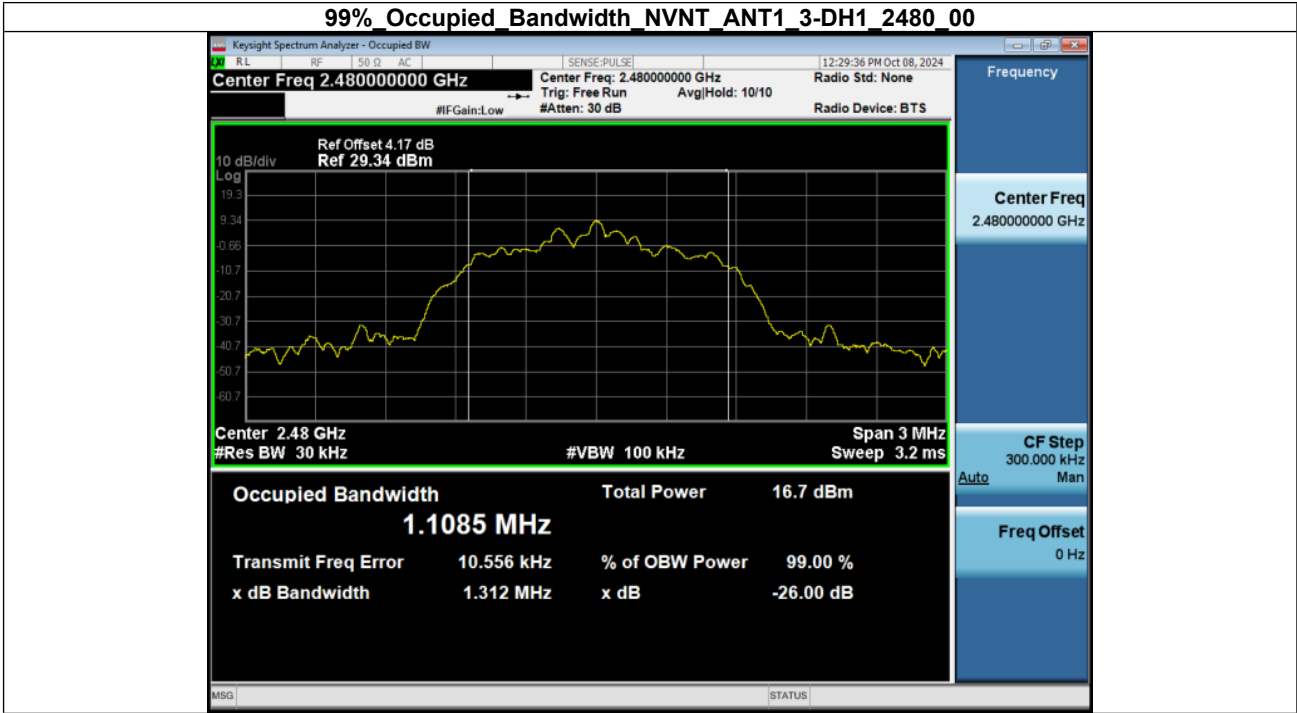


## Appendix A.2: Test Results of 20dB Bandwidth

| Condition | Antenna | Modulation | Frequency (MHz) | -20dB BW (MHz) | if larger than CFS |
|-----------|---------|------------|-----------------|----------------|--------------------|
| NVNT      | ANT1    | 1-DH1      | 2402.00         | 1.042          | Yes                |
| NVNT      | ANT1    | 1-DH1      | 2441.00         | 1.039          | Yes                |
| NVNT      | ANT1    | 1-DH1      | 2480.00         | 1.039          | Yes                |
| NVNT      | ANT1    | 2-DH1      | 2402.00         | 1.186          | Yes                |
| NVNT      | ANT1    | 2-DH1      | 2441.00         | 1.184          | Yes                |
| NVNT      | ANT1    | 2-DH1      | 2480.00         | 1.185          | Yes                |
| NVNT      | ANT1    | 3-DH1      | 2402.00         | 1.179          | Yes                |
| NVNT      | ANT1    | 3-DH1      | 2441.00         | 1.178          | Yes                |
| NVNT      | ANT1    | 3-DH1      | 2480.00         | 1.175          | Yes                |


-20dB Bandwidth NVNT ANT1 1-DH1\_2402\_00

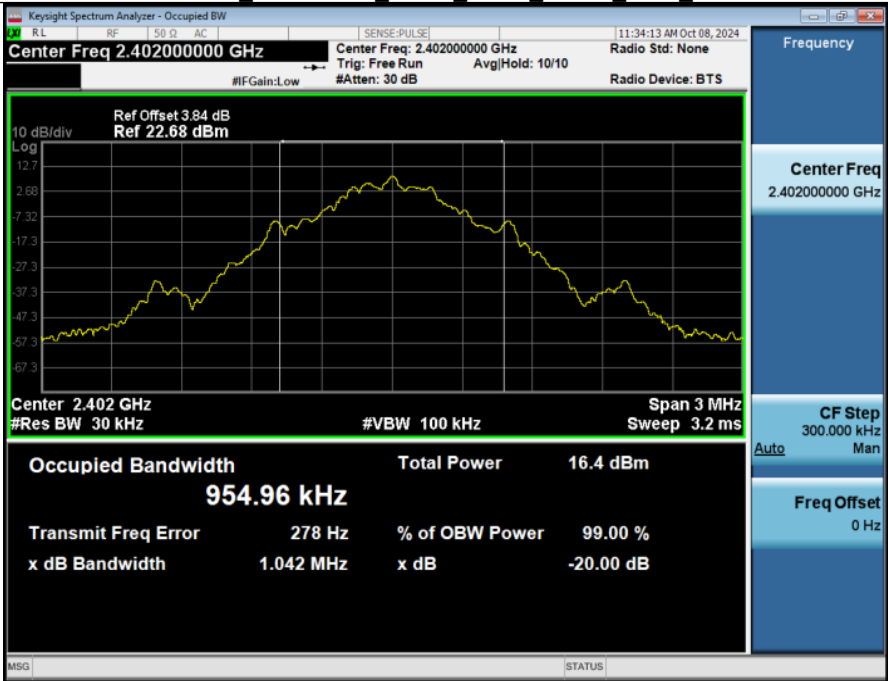

-20dB Bandwidth NVNT ANT1 1-DH1\_2441\_00

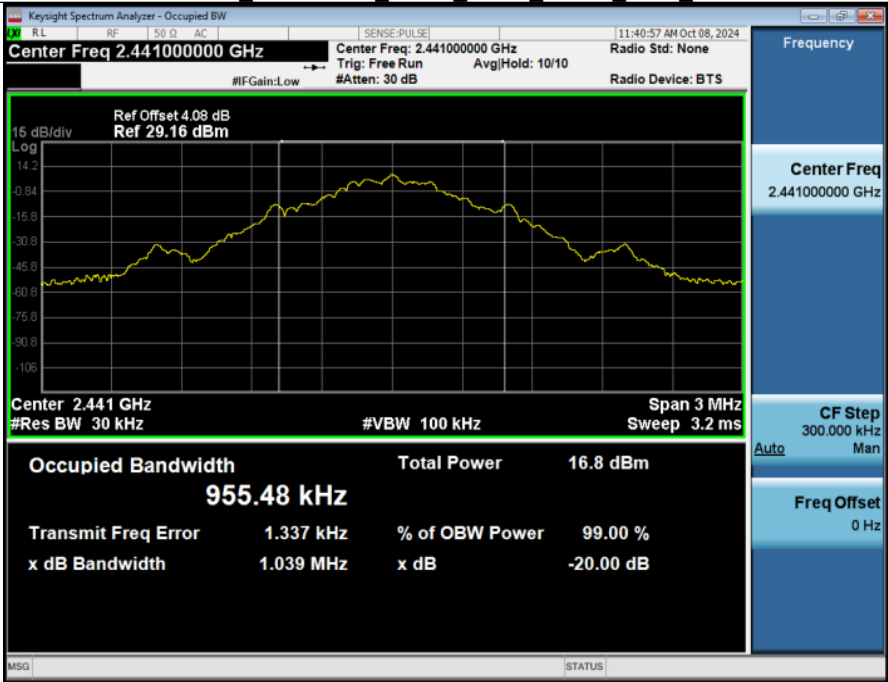


-20dB Bandwidth NVNT\_ANT1\_1-DH1\_2480\_00

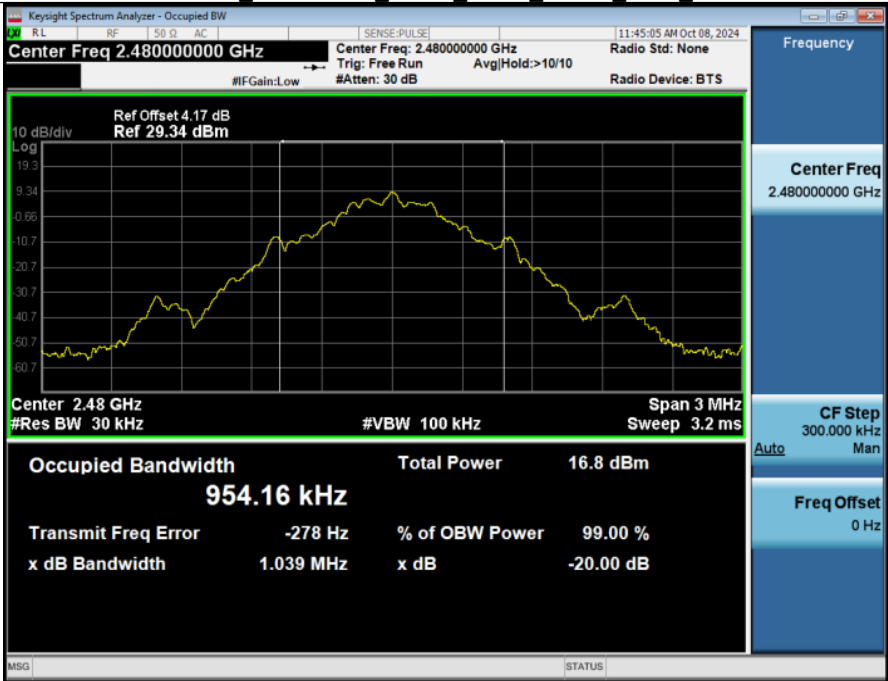

-20dB Bandwidth NVNT\_ANT1\_2-DH1\_2402\_00



-20dB Bandwidth NVNT\_ANT1\_2-DH1\_2441\_00

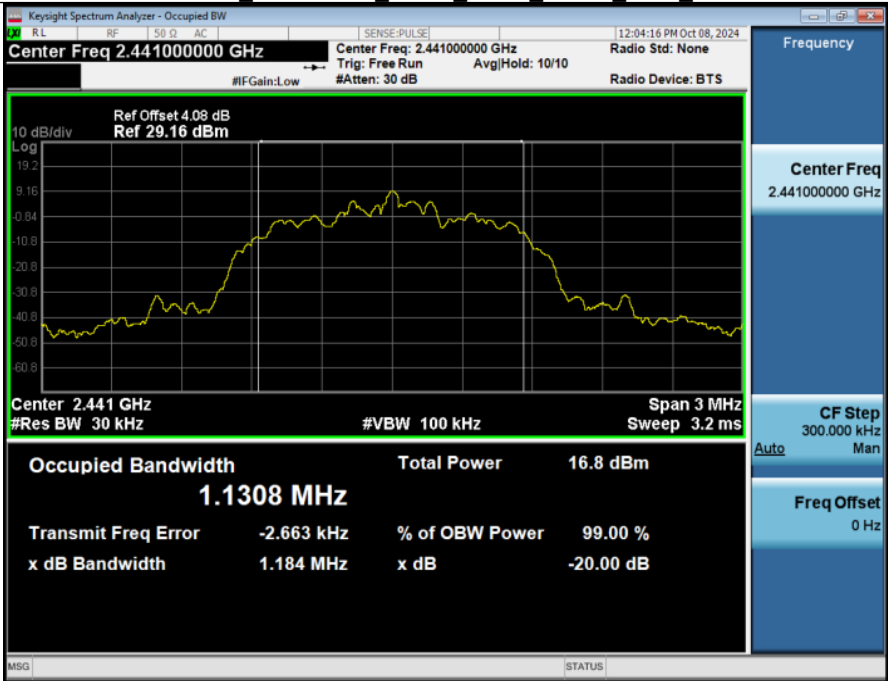


-20dB Bandwidth NVNT\_ANT1\_2-DH1\_2480\_00




-20dB Bandwidth NVNT ANT1 3-DH1 2402 00



-20dB Bandwidth NVNT ANT1 3-DH1 2441 00

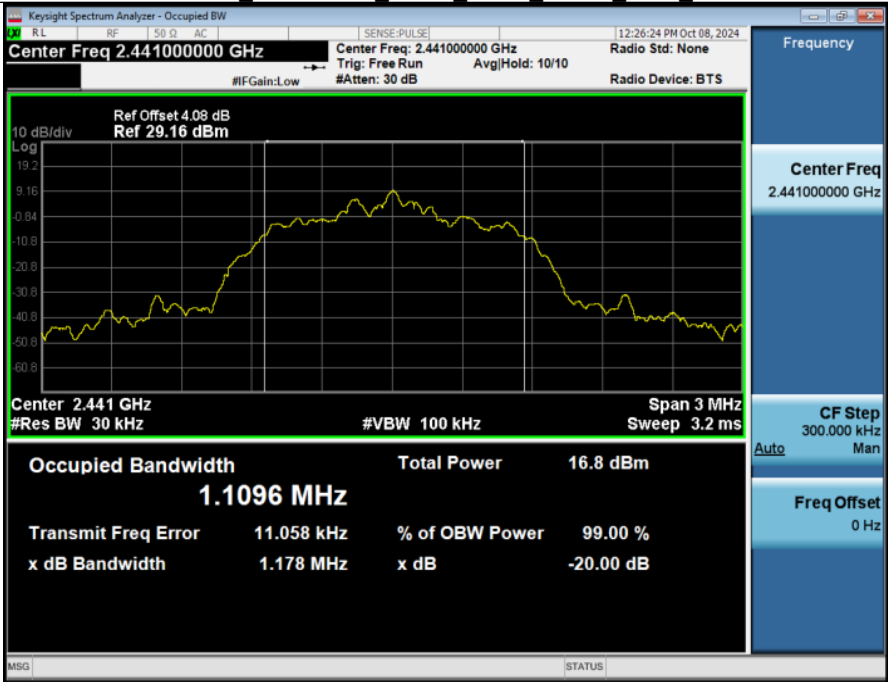

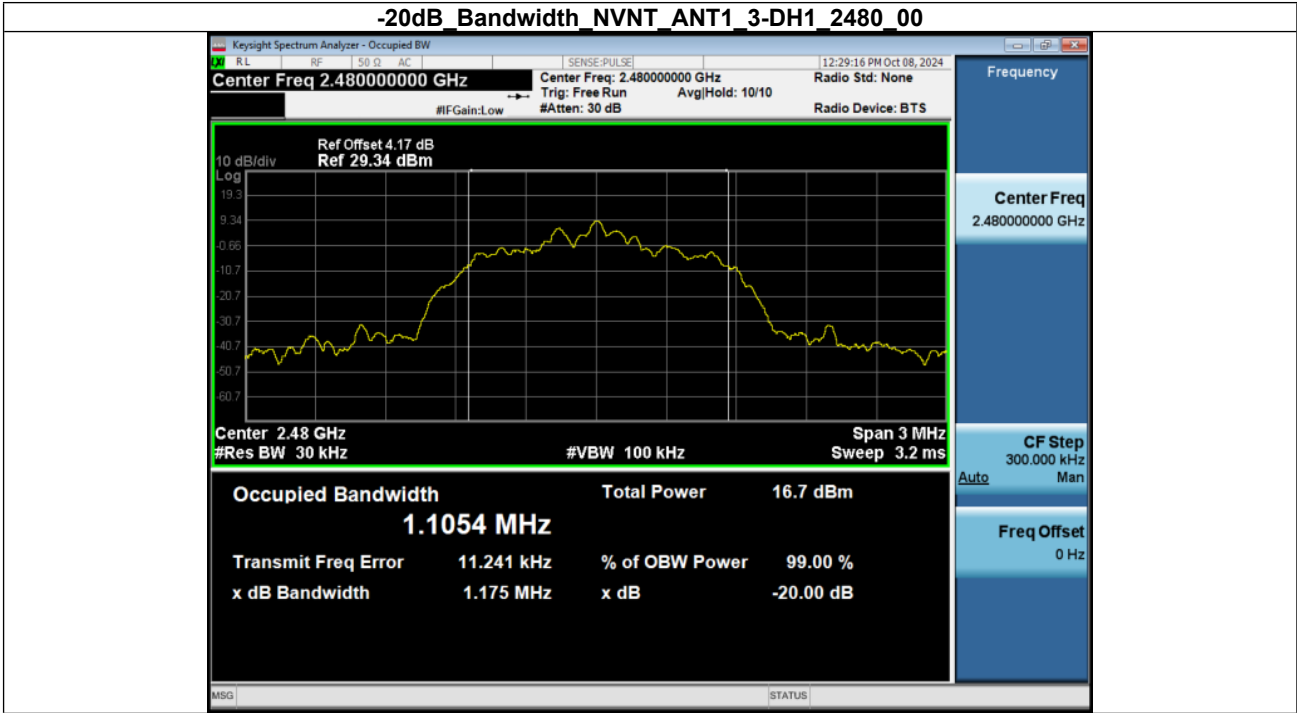

### Appendix A.3: Test Results of Carrier Frequency Separation

| Condition | Antenna | Modulation | Frequency (MHz) | Hopping NO.0 (MHz) | Hopping NO.1 (MHz) | Carrier Frequencies Separation (MHz) | Limit (MHz) | Result |
|-----------|---------|------------|-----------------|--------------------|--------------------|--------------------------------------|-------------|--------|
| NVNT      | ANT1    | 1-DH1      | 2441.00         | 2441.002           | 2442.007           | 1.00                                 | 0.693       | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2441.00         | 2441.002           | 2441.839           | 0.84                                 | 0.789       | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2441.00         | 2440.852           | 2441.857           | 1.00                                 | 0.785       | Pass   |

Carrier Frequencies Separation (Hopping) NVNT\_ANT1\_1-DH1\_Hopping



Carrier Frequencies Separation (Hopping) NVNT\_ANT1\_2-DH1\_Hopping



Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE/PULSE 12:38:14 PM Oct 08, 2024

**Center Freq 2.44150000 GHz**

PNO: Wide → IF Gain: Low Trig: Free Run Avg(Hold): 10/10 #Avg Type: Log-Pwr TYPE: N DEF: N N N N N

Ref Offset 4.08 dB Ref 29.16 dBm

**ΔMkr1 1.005 MHz -0.066 dB**

10 dB/div Log

19.2

9.16

0.64

10.8

20.8

30.8

40.8

50.8

60.8

X<sub>2</sub>

Δ2

**Center 2.441500 GHz**

#Res BW 100 kHz #VBW 300 kHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq 2.441500000 GHz

Start Freq 2.440000000 GHz

Stop Freq 2.443000000 GHz

CF Step 300.000 kHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin


#### **Appendix A.4: Test Results of Number of Hopping Frequency**

| Condition | Antenna | Modulation | Hopping Num | Limit | Result |
|-----------|---------|------------|-------------|-------|--------|
| NVNT      | ANT1    | 1-DH1      | 79          | 15    | Pass   |
| NVNT      | ANT1    | 2-DH1      | 79          | 15    | Pass   |
| NVNT      | ANT1    | 3-DH1      | 79          | 15    | Pass   |


Number of Hopping Channel (Hopping) NVNT ANT1\_1-DH1 Hopping



Number of Hopping Channel (Hopping) NVNT ANT1\_2-DH1 Hopping

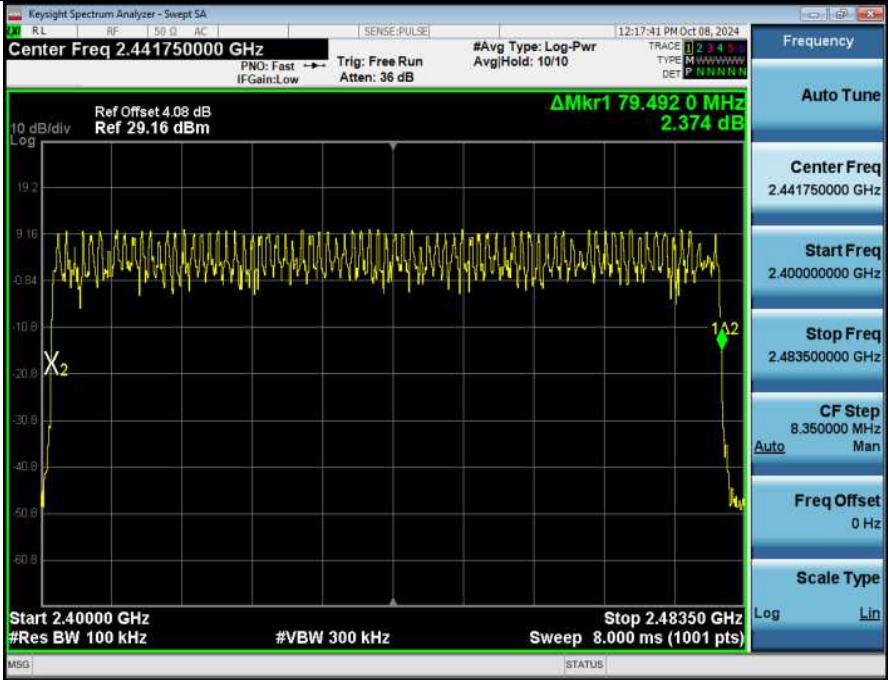


Number of Hopping Channel (Hopping) NVNT\_ANT1\_3-DH1\_Hopping

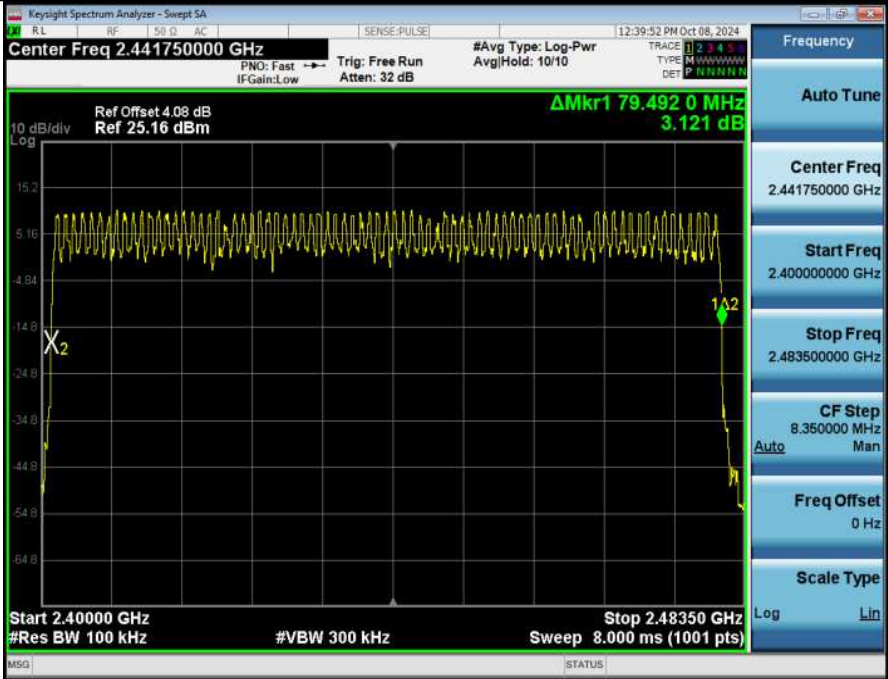


## Appendix A.5: Test Results of Time of Occupancy

| Condition | Antenna | Packet Type | Pulse Time (ms) | Hops   | Dwell Time (ms) | Limit (s) | Result |
|-----------|---------|-------------|-----------------|--------|-----------------|-----------|--------|
| NVNT      | ANT1    | 1-DH1       | 0.397           | 158.00 | 62.726          | 0.40      | Pass   |
| NVNT      | ANT1    | 2-DH1       | 0.406           | 163.00 | 66.178          | 0.40      | Pass   |
| NVNT      | ANT1    | 3-DH1       | 0.406           | 157.00 | 63.742          | 0.40      | Pass   |
| NVNT      | ANT1    | 1-DH3       | 1.652           | 109.00 | 180.068         | 0.40      | Pass   |
| NVNT      | ANT1    | 1-DH5       | 2.901           | 94.00  | 272.694         | 0.40      | Pass   |
| NVNT      | ANT1    | 2-DH3       | 1.658           | 101.00 | 167.458         | 0.40      | Pass   |
| NVNT      | ANT1    | 2-DH5       | 2.907           | 69.00  | 200.583         | 0.40      | Pass   |
| NVNT      | ANT1    | 3-DH3       | 1.656           | 108.00 | 178.848         | 0.40      | Pass   |
| NVNT      | ANT1    | 3-DH5       | 2.907           | 77.00  | 223.839         | 0.40      | Pass   |


Dwell Time (Hopping) NVNT ANT1 1-DH1 2441 00 One Burst Time

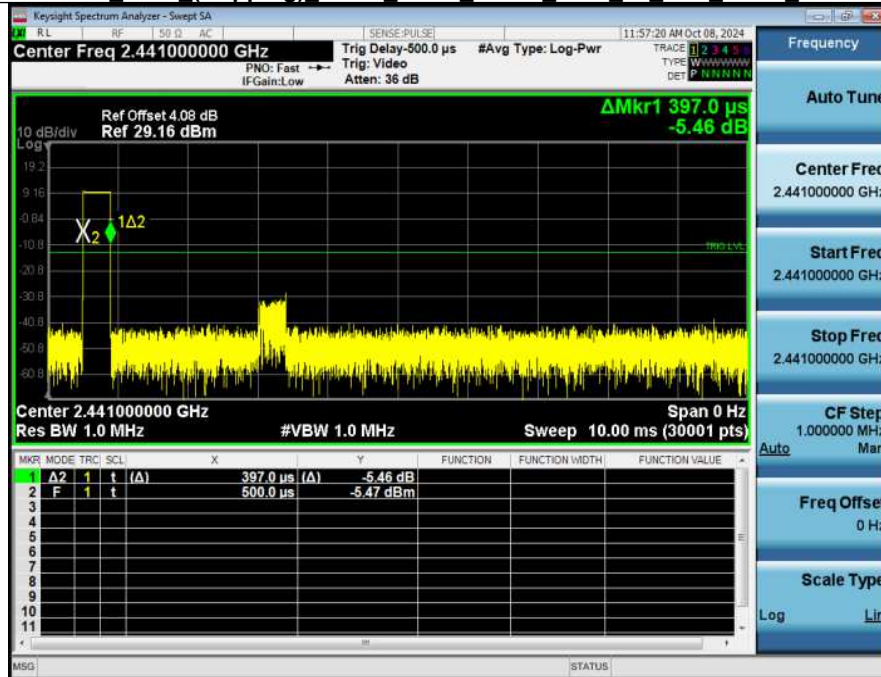


Dwell Time (Hopping) NVNT ANT1 1-DH1 2441 00 Accumulated

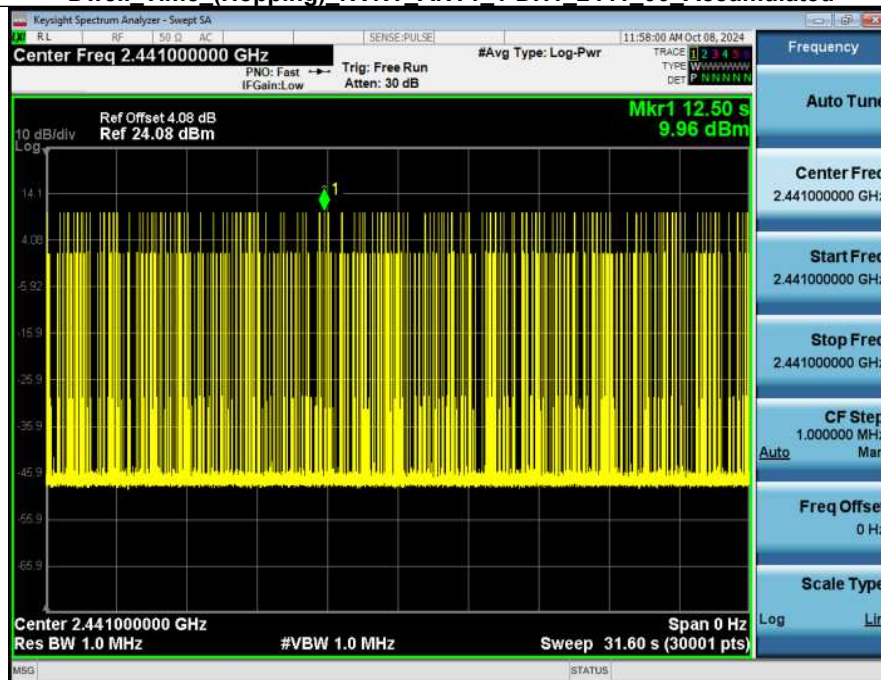


### Dwell Time (Hopping) NVNT ANT1 2-DH1 2441 00 One Burst Time

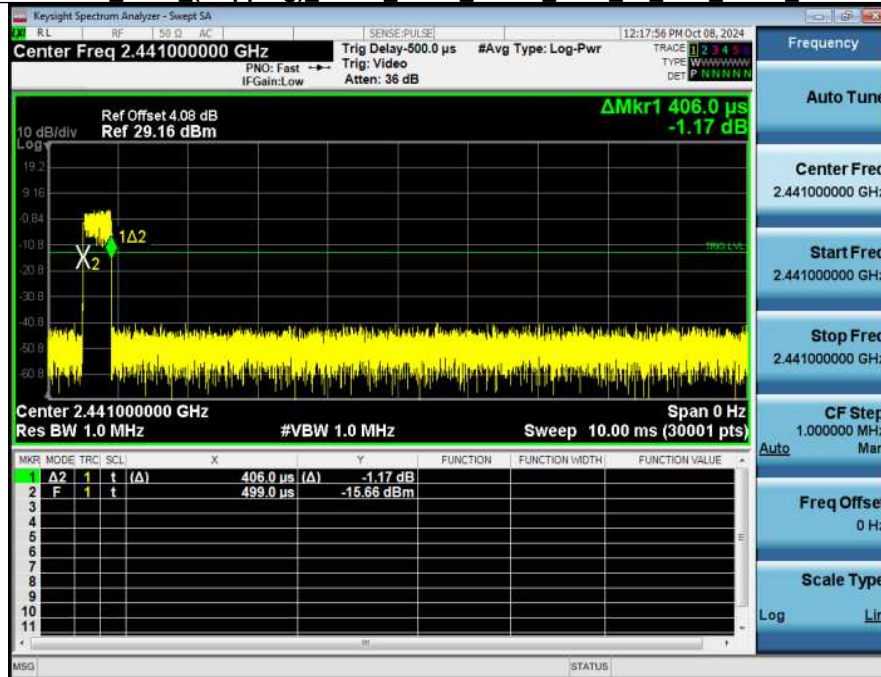


### Dwell Time (Hopping) NVNT ANT1 2-DH1 2441 00 Accumulated

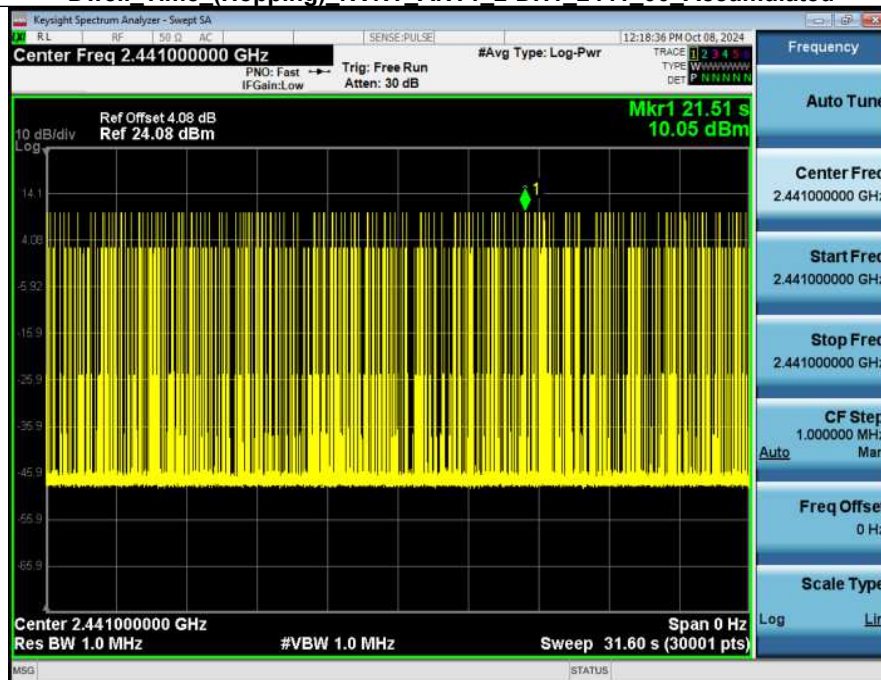


Dwell Time (Hopping) NVNT ANT1 3-DH1 2441 00 One Burst Time

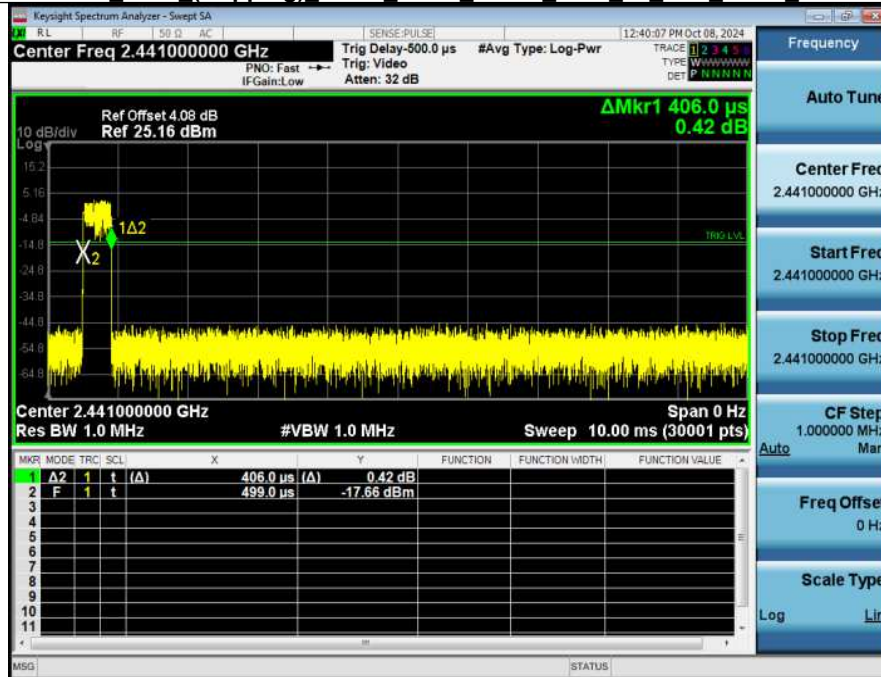


Dwell Time (Hopping) NVNT ANT1 3-DH1 2441 00 Accumulated

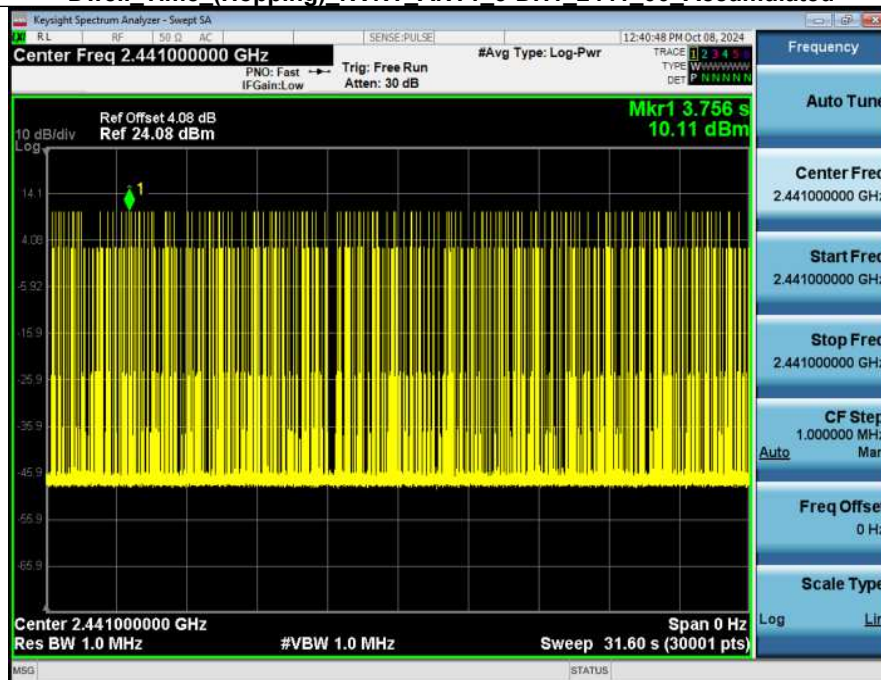


Dwell Time (Hopping) NVNT ANT1 1-DH3 2441 00 One Burst Time

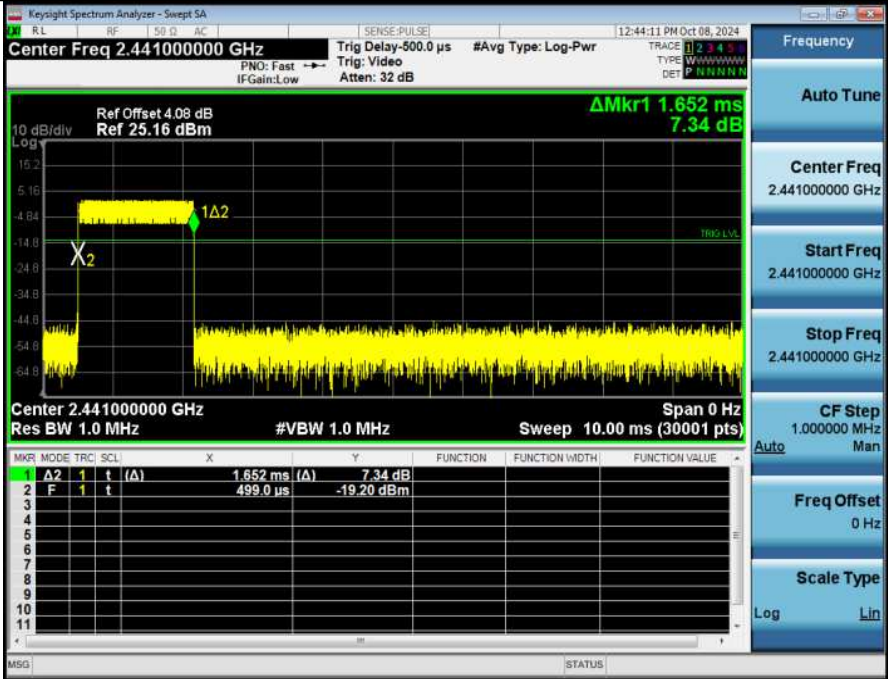


Dwell Time (Hopping) NVNT ANT1 1-DH3 2441 00 Accumulated

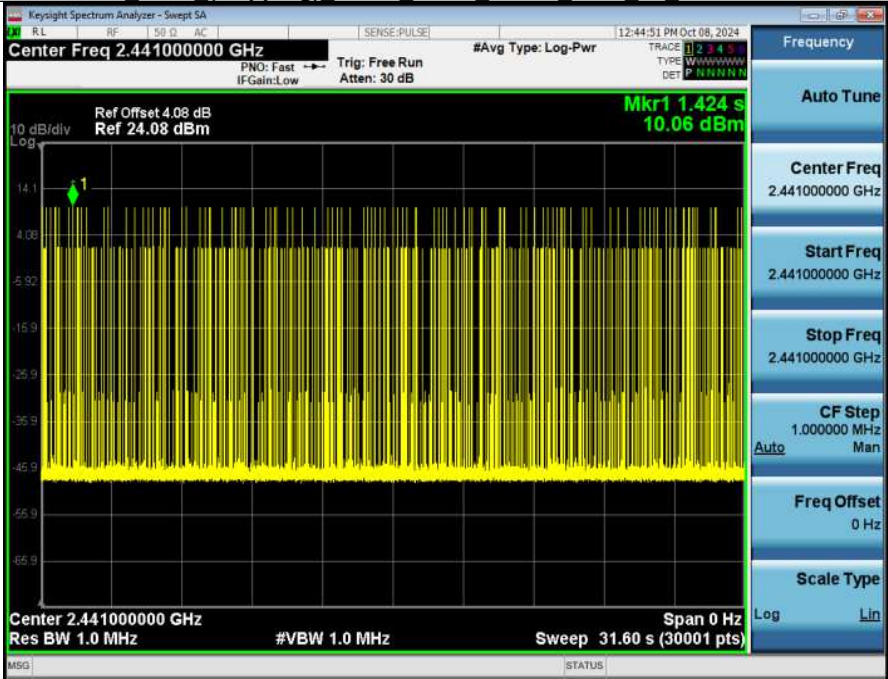


Dwell Time (Hopping) NVNT ANT1 1-DH5 2441 00 One Burst Time

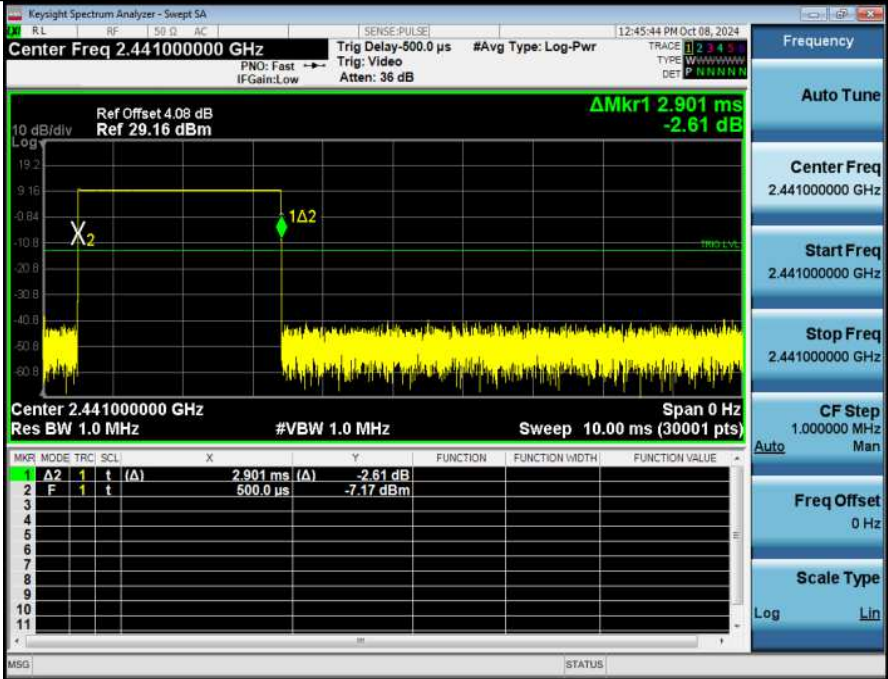


Dwell Time (Hopping) NVNT ANT1 1-DH5 2441 00 Accumulated

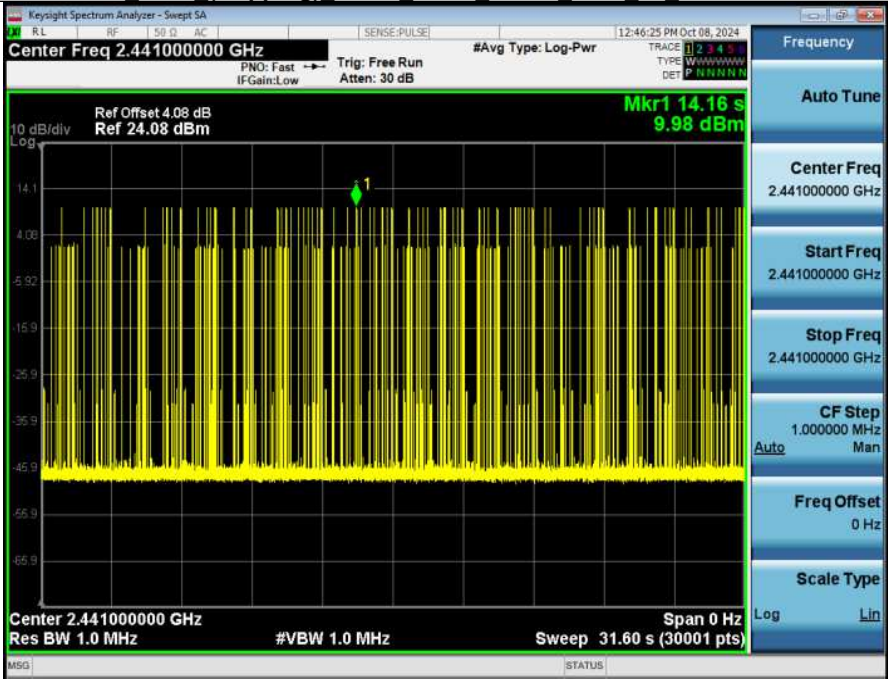


### Dwell Time (Hopping) NVNT ANT1 2-DH3 2441 00 One Burst Time

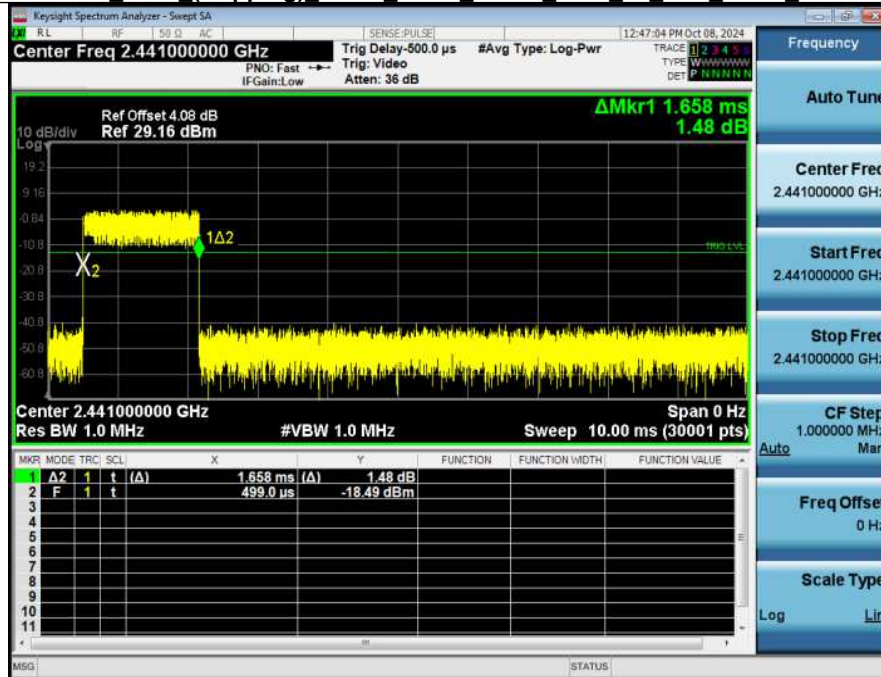


### Dwell Time (Hopping) NVNT ANT1 2-DH3 2441 00 Accumulated

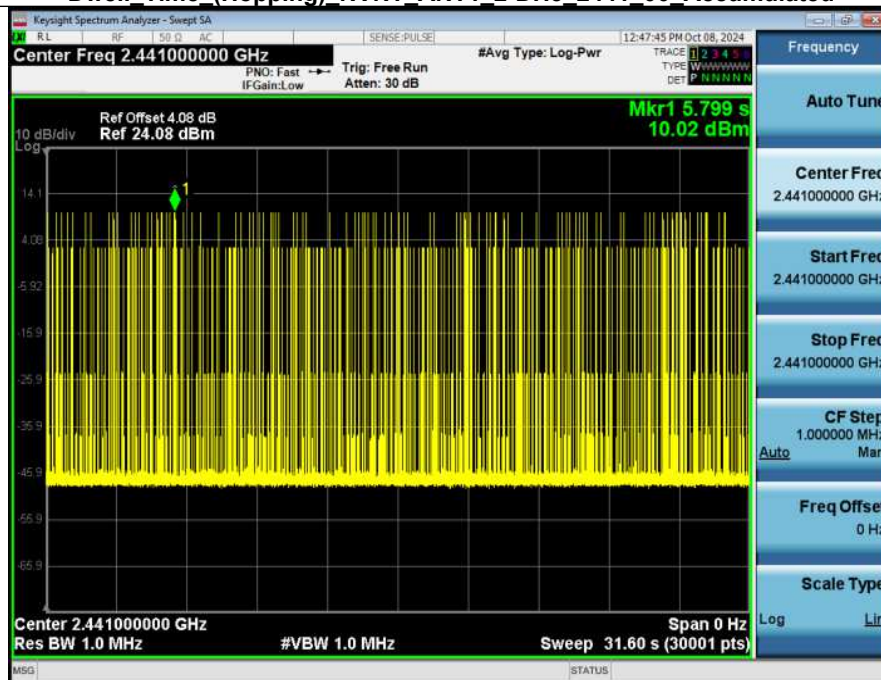


### Dwell Time (Hopping) NVNT ANT1 2-DH5 2441 00 One Burst Time

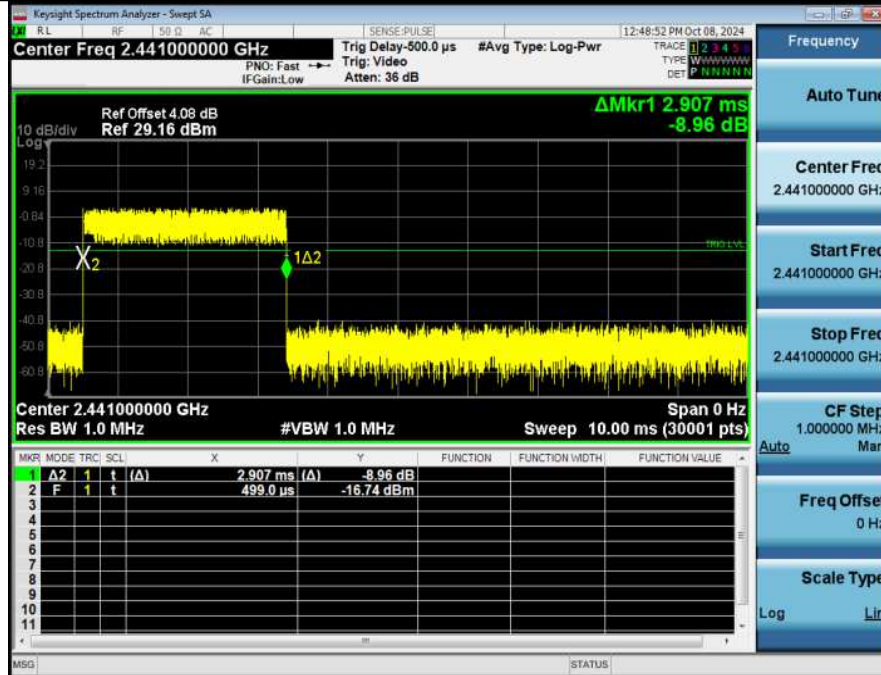


### Dwell Time (Hopping) NVNT ANT1 2-DH5 2441 00 Accumulated

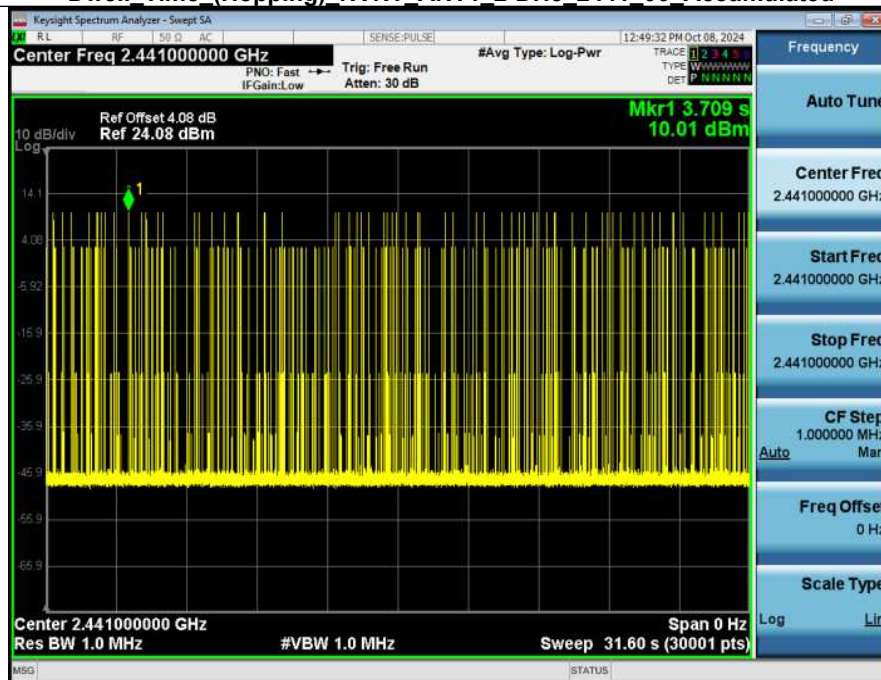


Dwell Time (Hopping) NVNT ANT1 3-DH3 2441 00 One Burst Time

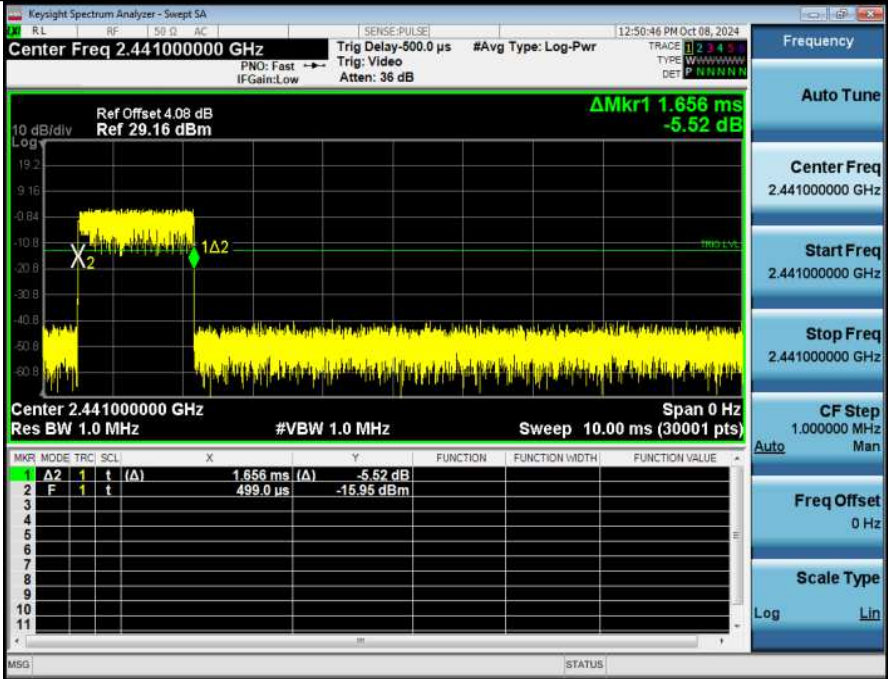


Dwell Time (Hopping) NVNT ANT1 3-DH3 2441 00 Accumulated

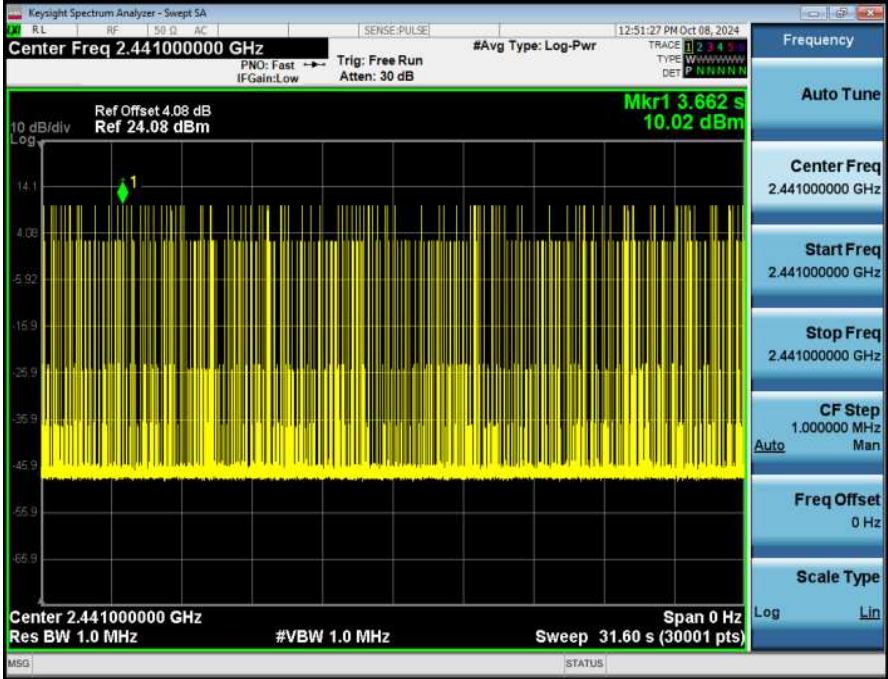

### Dwell Time (Hopping) NVNT ANT1 3-DH5 2441 00 One Burst Time

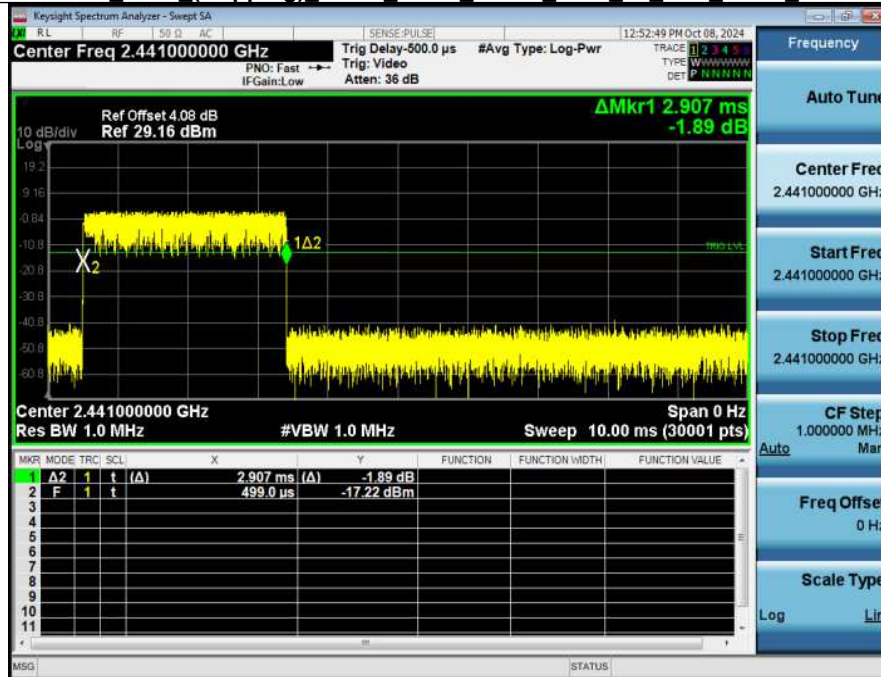

### Dwell Time (Hopping) NVNT ANT1 3-DH5 2441 00 Accumulated

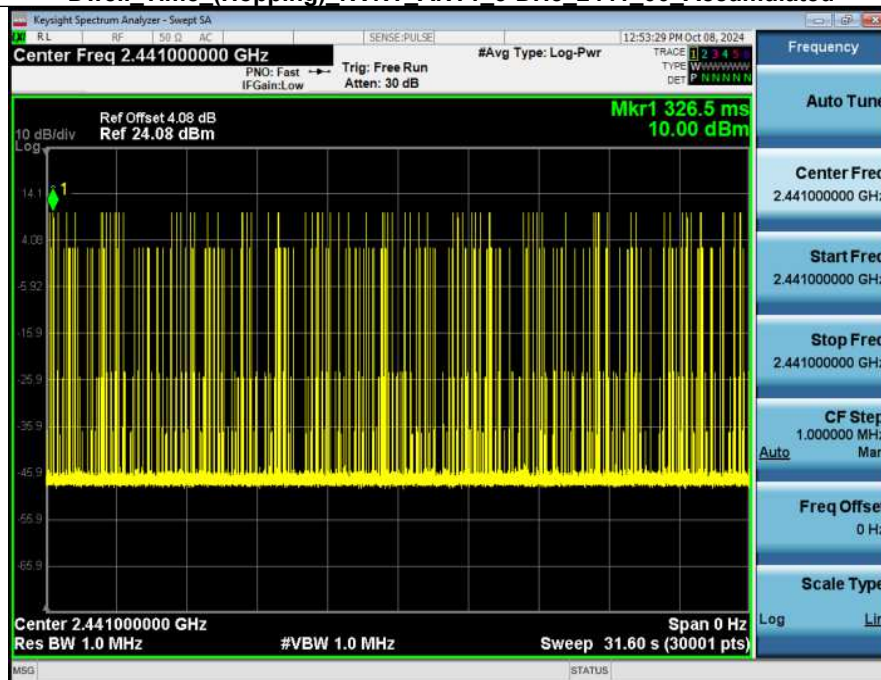

## Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


### Band Edge

| Condition | Antenna | Modulation | TX Mode     | Bandedge MAX. Value | Limit   | Result |
|-----------|---------|------------|-------------|---------------------|---------|--------|
| NVNT      | ANT1    | 1-DH1      | 2402.00     | -52.358             | -10.623 | Pass   |
| NVNT      | ANT1    | 1-DH1      | Hopping_LCH | -52.608             | -10.145 | Pass   |
| NVNT      | ANT1    | 1-DH1      | 2480.00     | -51.225             | -10.316 | Pass   |
| NVNT      | ANT1    | 1-DH1      | Hopping_HCH | -51.276             | -9.960  | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2402.00     | -40.305             | -10.573 | Pass   |
| NVNT      | ANT1    | 2-DH1      | Hopping_LCH | -41.101             | -10.124 | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2480.00     | -52.029             | -10.136 | Pass   |
| NVNT      | ANT1    | 2-DH1      | Hopping_HCH | -50.497             | -9.713  | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2402.00     | -39.996             | -10.466 | Pass   |
| NVNT      | ANT1    | 3-DH1      | Hopping_LCH | -43.551             | -10.039 | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2480.00     | -51.677             | -10.083 | Pass   |
| NVNT      | ANT1    | 3-DH1      | Hopping_HCH | -50.267             | -9.767  | Pass   |


1\_Reference\_Level\_NVNT\_ANT1\_1-DH1\_2402\_00




2 Bandedge NVNT ANT1 1-DH1 2402 00

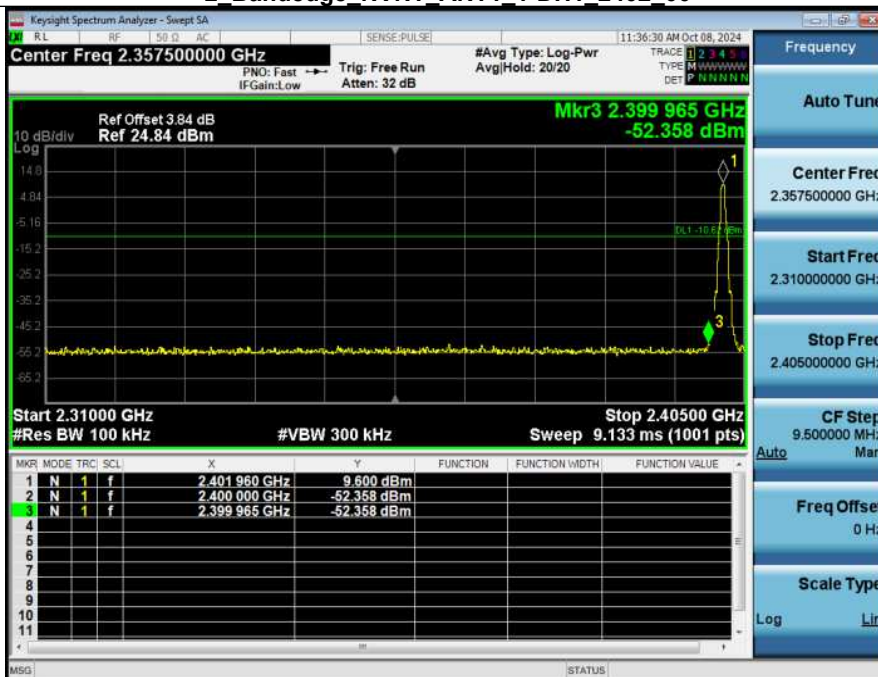

## 1\_Reference\_Level\_Hopping\_NVNT\_ANT1\_1-DH1\_Hopping

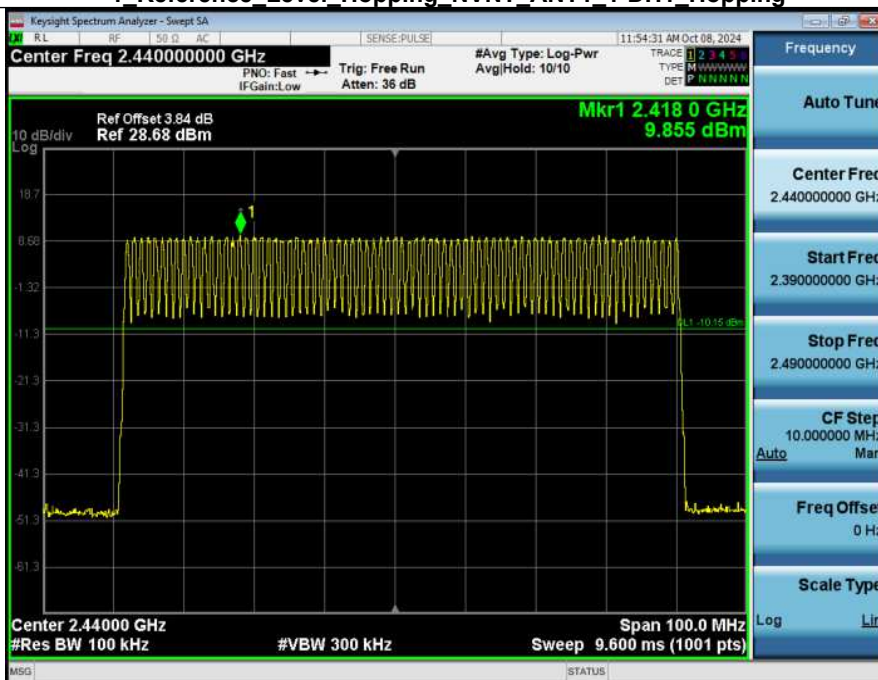


## 2 Band Edge (Hopping) NVNT ANT1 1-DH1 Hopping

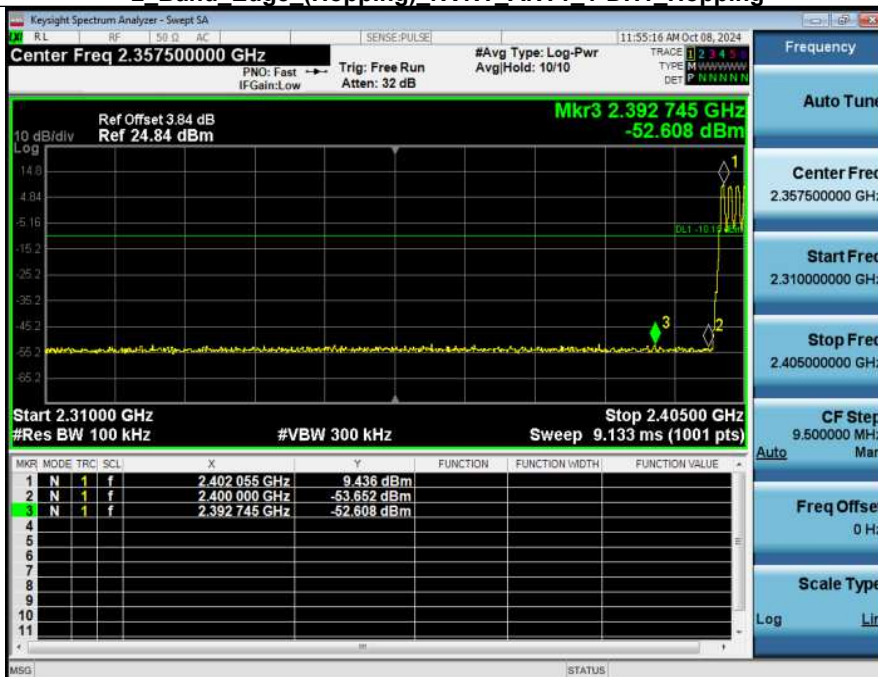


1 Reference Level NVNT ANT1 1-DH1 2480 00




2 Bandedge NVNT ANT1 1-DH1 2480 00

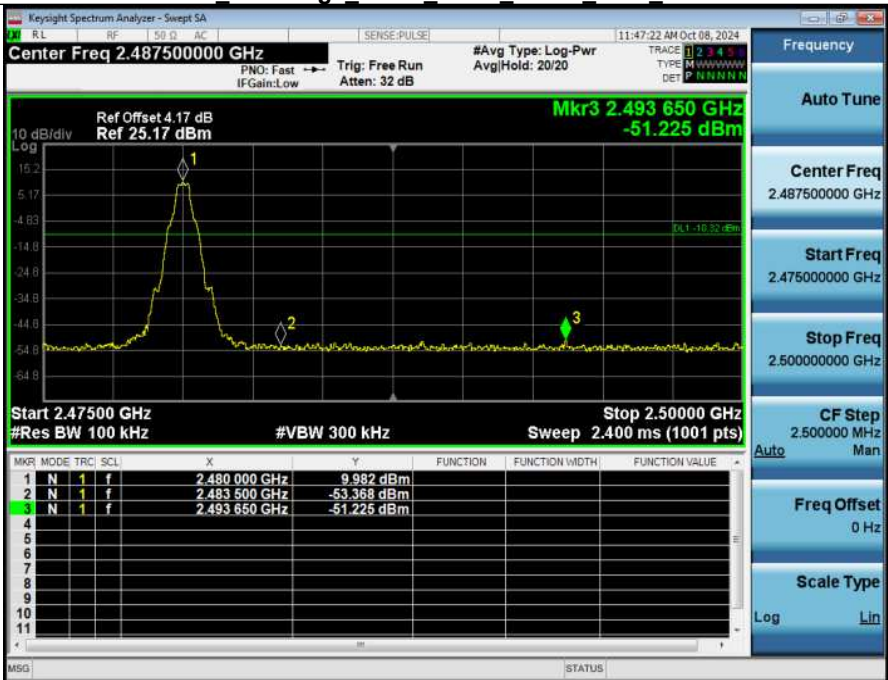


1 Reference Level Hopping NVNT ANT1 1-DH1 Hopping

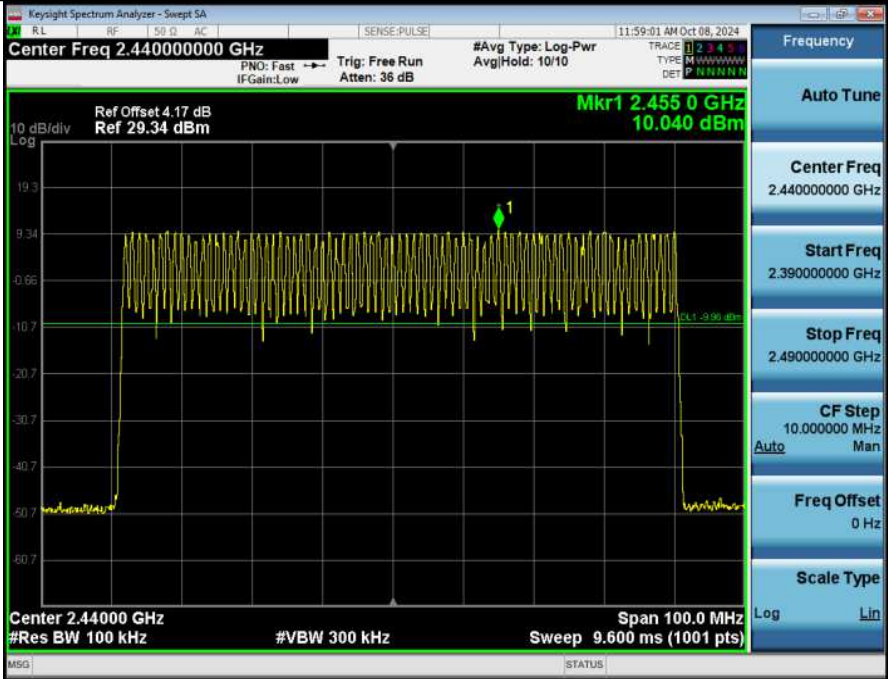


2 Band Edge (Hopping) NVNT ANT1 1-DH1 Hopping

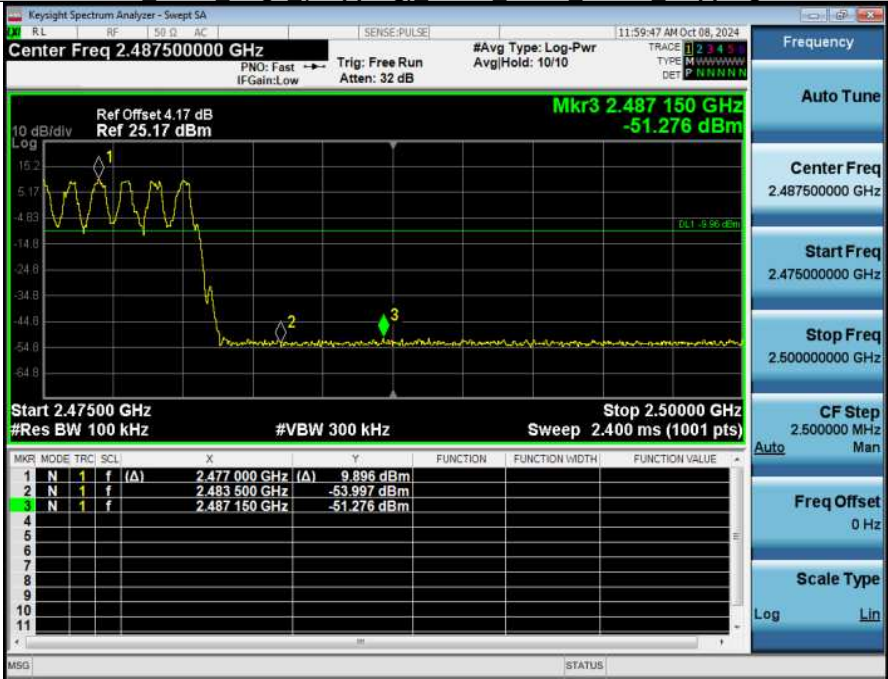


## 1\_Reference\_Level\_NVNT\_ANT1\_2-DH1\_2402\_00

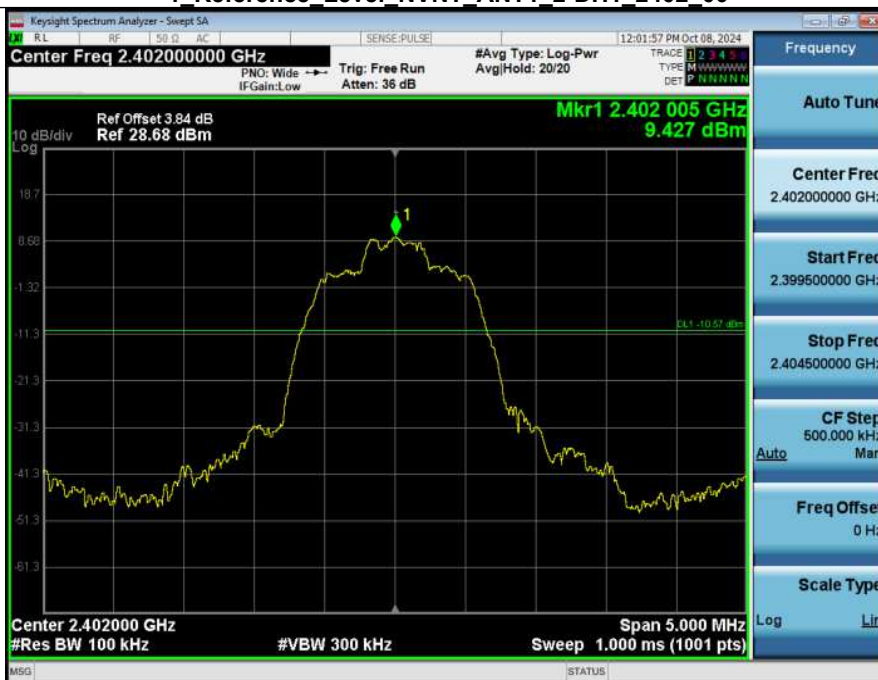


2 Bandedge NVNT ANT1 2-DH1 2402 00

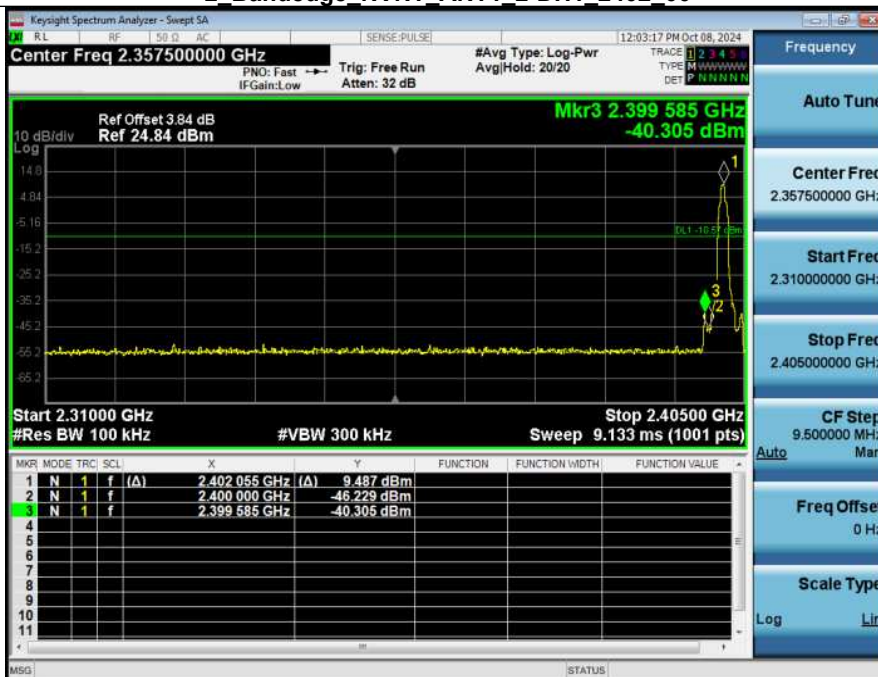

| 1 | Reference | Level | Hopping | NVNT | ANT1 | 2-DH1 | Hopping |
|---|-----------|-------|---------|------|------|-------|---------|
|---|-----------|-------|---------|------|------|-------|---------|

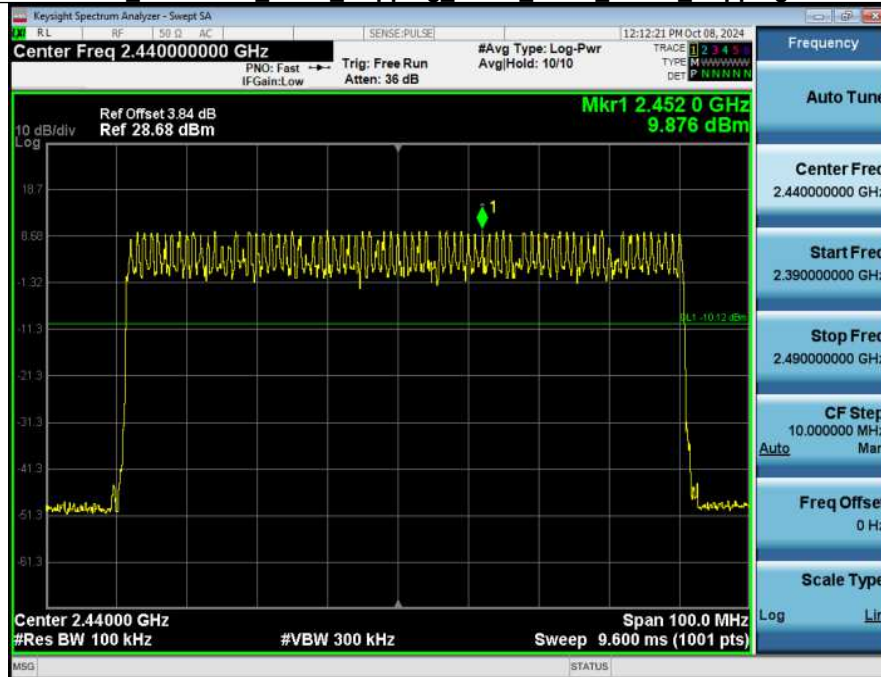


## 2 Band Edge (Hopping) NVNT ANT1 2-DH1 Hopping

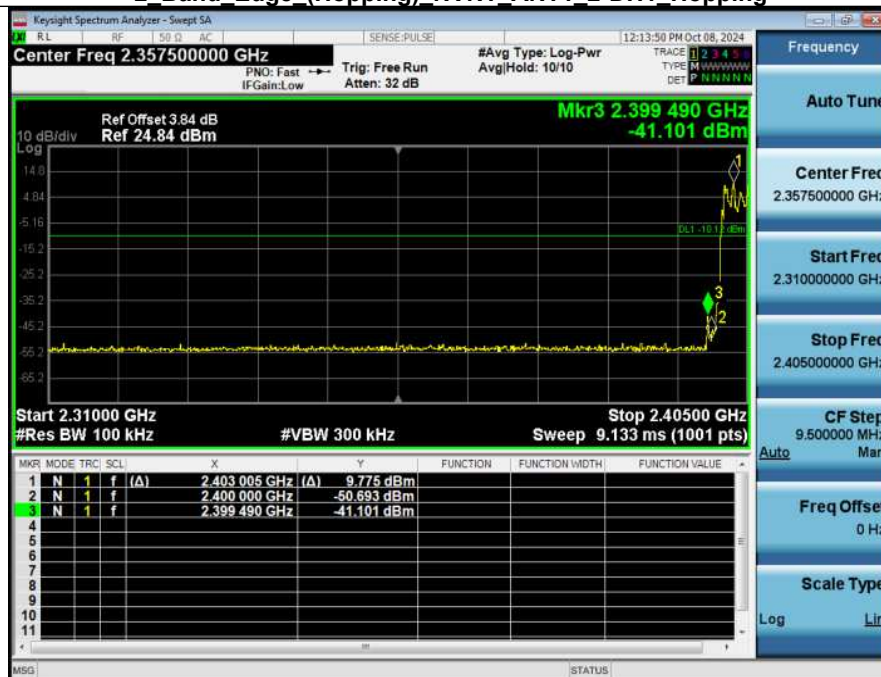


1 Reference Level NVNT ANT1 2-DH1 2480 00




2 Bandedge NVNT ANT1 2-DH1 2480 00

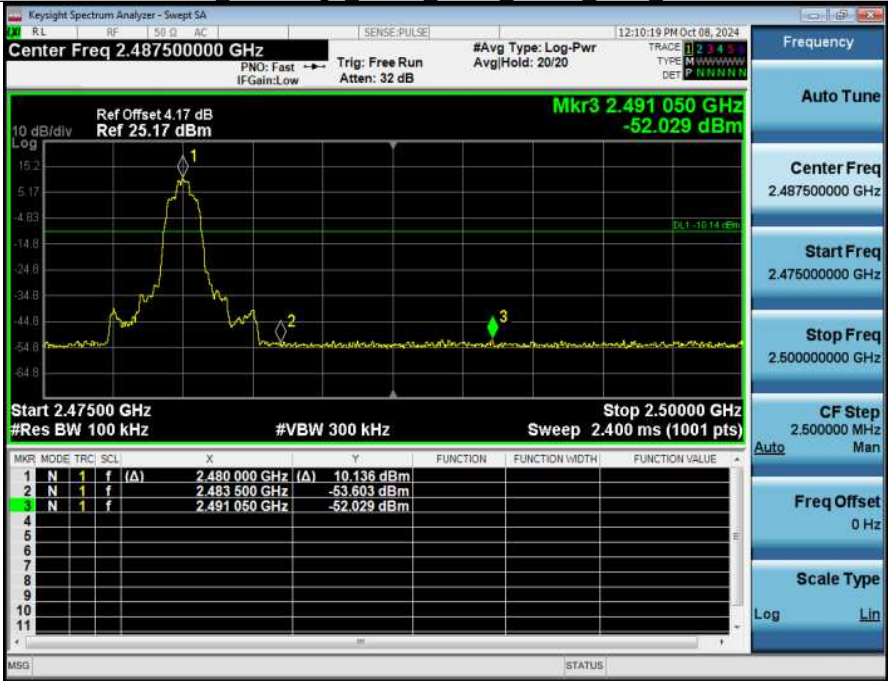

1 Reference Level Hopping NVNT ANT1 2-DH1 Hopping

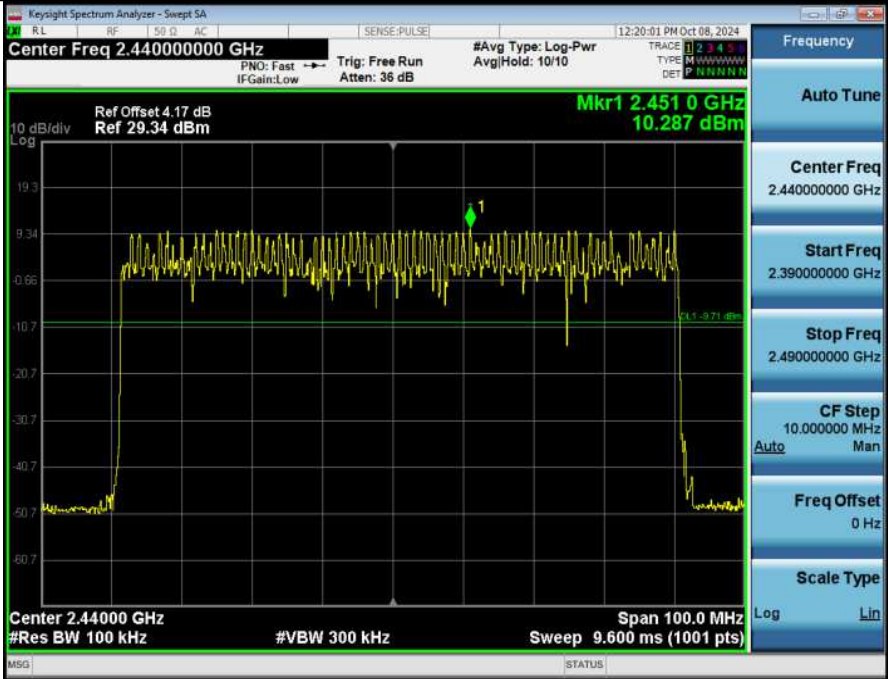


2 Band Edge (Hopping) NVNT ANT1 2-DH1 Hopping

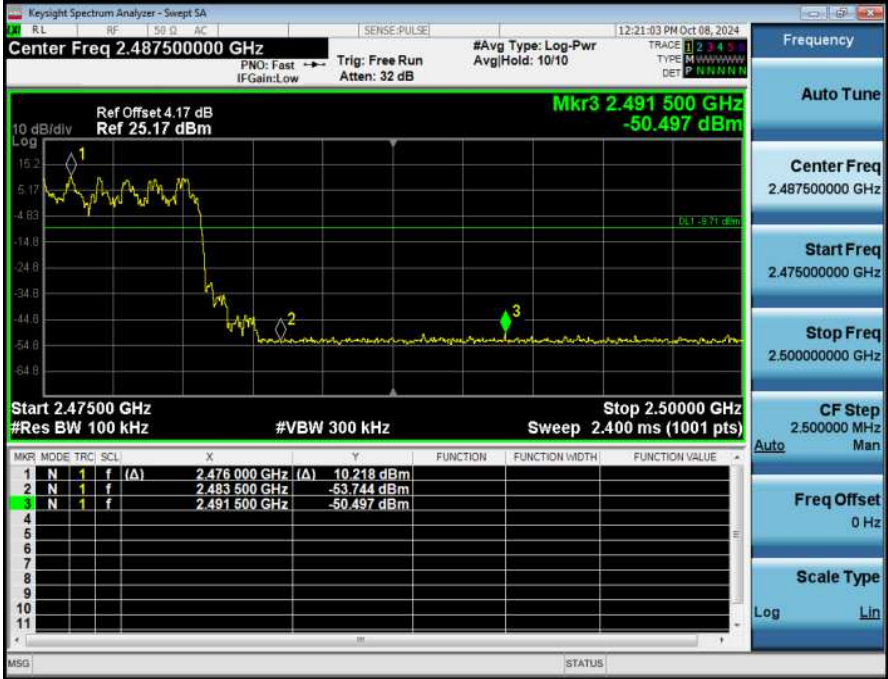


1 Reference Level NVNT ANT1\_3-DH1\_2402\_00




2 Bandedge NVNT ANT1\_3-DH1\_2402\_00

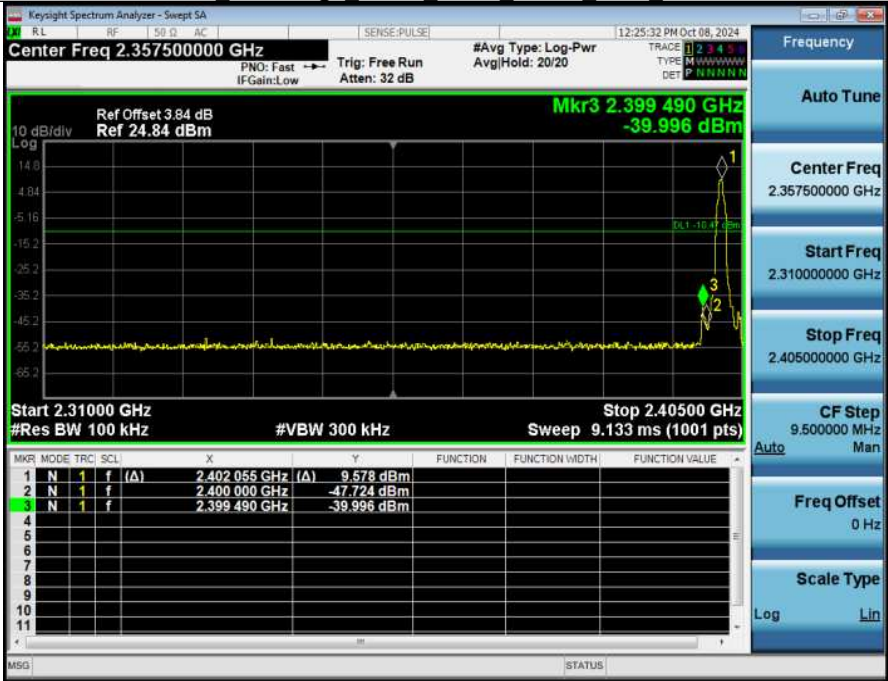

1 Reference Level Hopping NVNT ANT1 3-DH1 Hopping

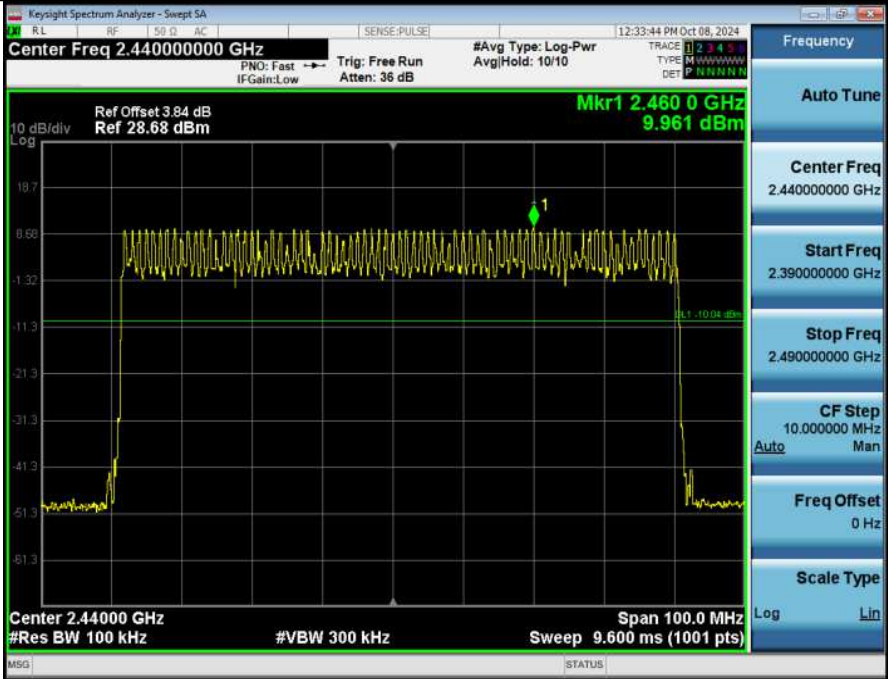


2 Band Edge (Hopping) NVNT ANT1 3-DH1 Hopping

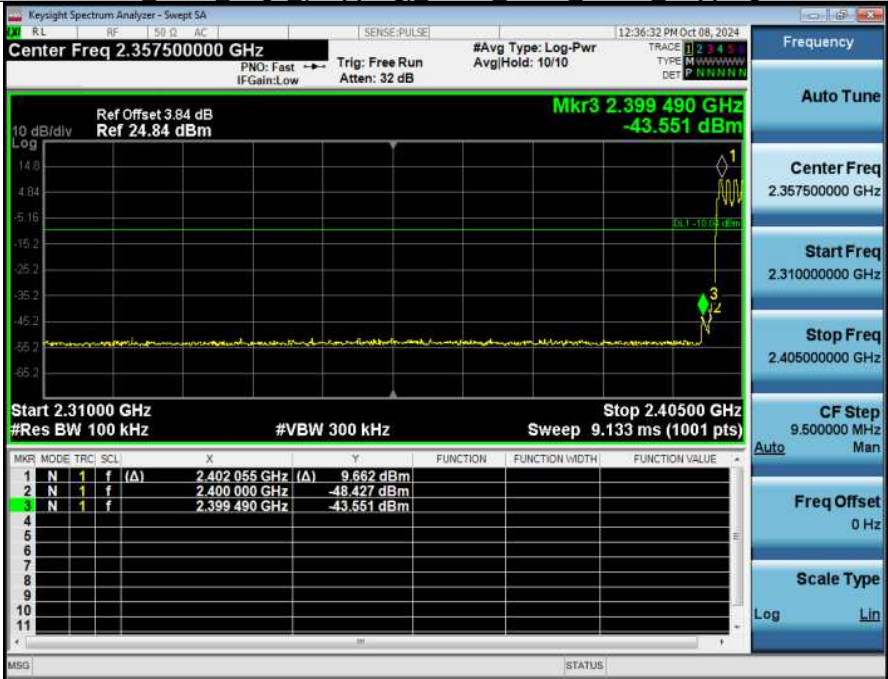


1 Reference Level NVNT ANT1 3-DH1 2480 00



2 Bandedge NVNT ANT1 3-DH1 2480 00

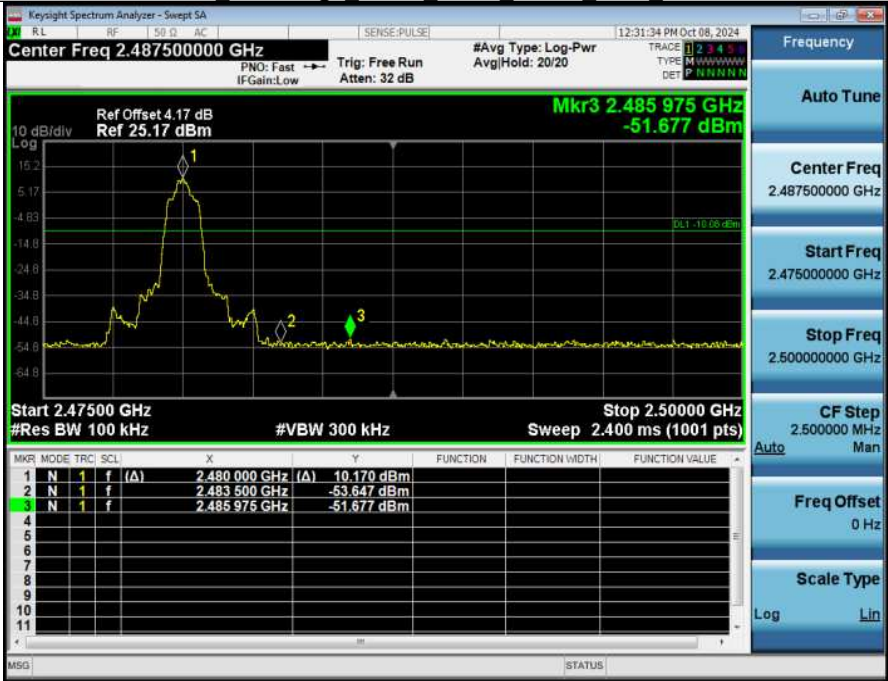

1 Reference Level Hopping NVNT ANT1 3-DH1 Hopping

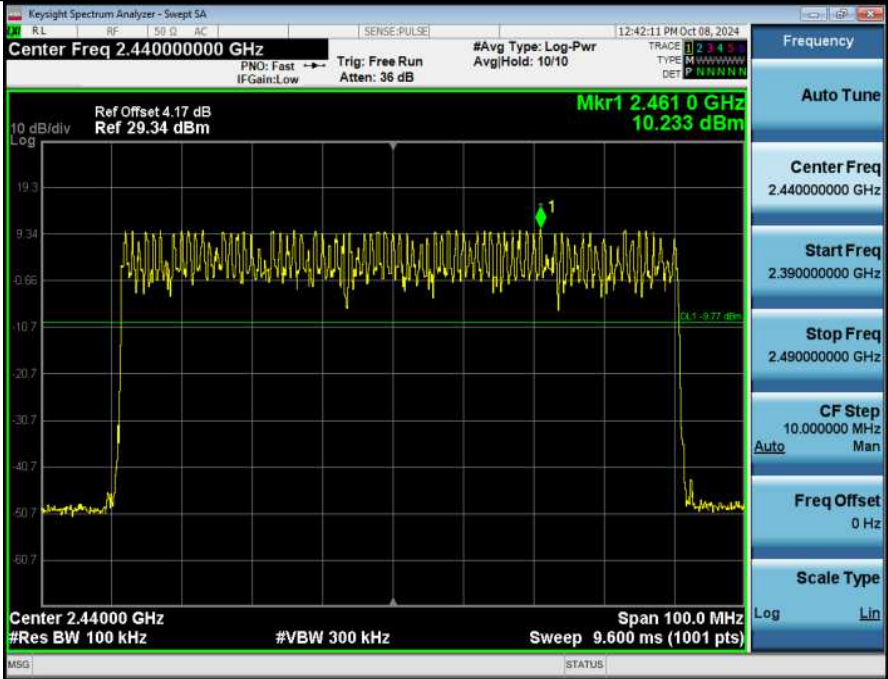

2 Band Edge (Hopping) NVNT ANT1 3-DH1 Hopping




**Conducted Spurious Emission**

| Condition | Antenna | Modulation | TX Mode | Spurious MAX.Value<br>(dBm) | Limit   | Result |
|-----------|---------|------------|---------|-----------------------------|---------|--------|
| NVNT      | ANT1    | 1-DH1      | 2402.00 | -41.043                     | -10.623 | Pass   |
| NVNT      | ANT1    | 1-DH1      | 2441.00 | -41.088                     | -10.281 | Pass   |
| NVNT      | ANT1    | 1-DH1      | 2480.00 | -40.706                     | -10.316 | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2402.00 | -40.772                     | -10.573 | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2441.00 | -40.272                     | -10.136 | Pass   |
| NVNT      | ANT1    | 2-DH1      | 2480.00 | -40.090                     | -10.136 | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2402.00 | -41.017                     | -10.466 | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2441.00 | -40.844                     | -9.989  | Pass   |
| NVNT      | ANT1    | 3-DH1      | 2480.00 | -40.087                     | -10.083 | Pass   |


1 Reference Level NVNT ANT1 1-DH1 2402 00




2 Spurious Emissions NVNT ANT1 1-DH1 2402 00

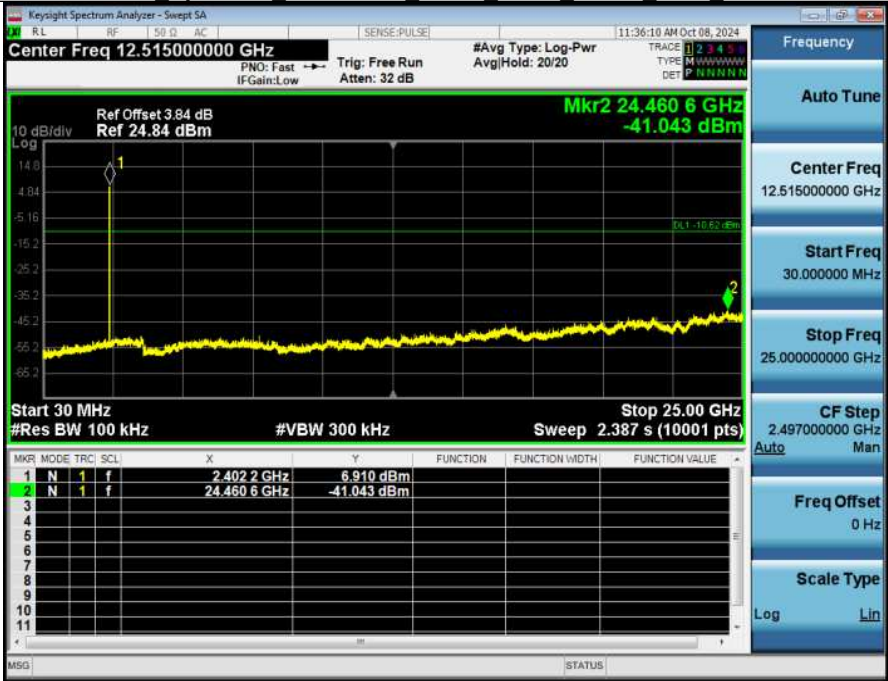

1 Reference Level NVNT ANT1 1-DH1 2441 00

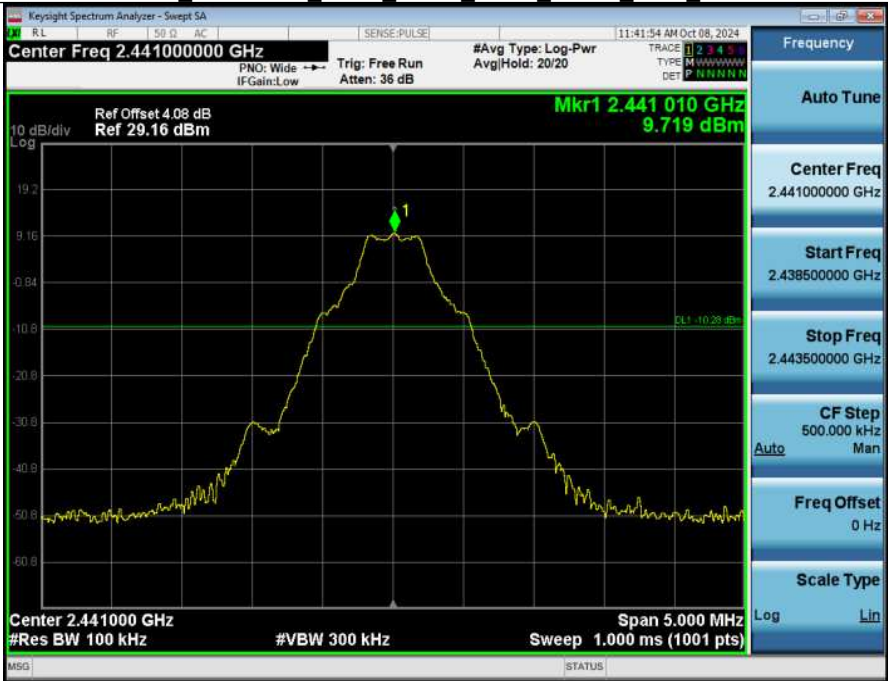

2 Spurious Emissions NVNT ANT1 1-DH1 2441 00

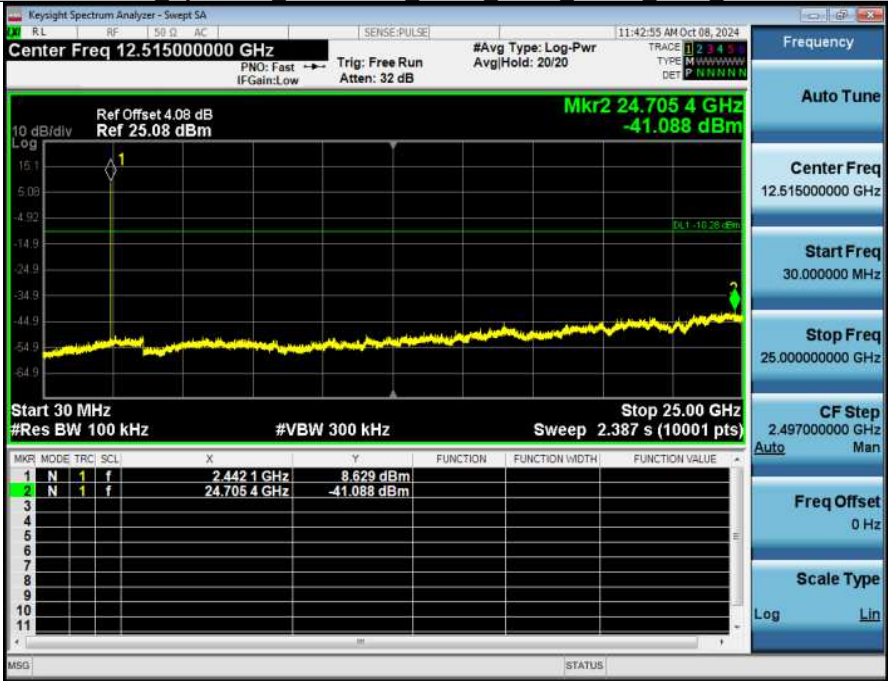

## 1\_Reference\_Level\_NVNT\_ANT1\_1-DH1\_2480\_00




|   |                    |      |      |       |      |    |
|---|--------------------|------|------|-------|------|----|
| 2 | Spurious Emissions | NVNT | ANT1 | 1-DH1 | 2480 | 00 |
|---|--------------------|------|------|-------|------|----|



1 Reference Level NVNT ANT1 2-DH1 2402 00



2 Spurious Emissions NVNT ANT1 2-DH1 2402 00

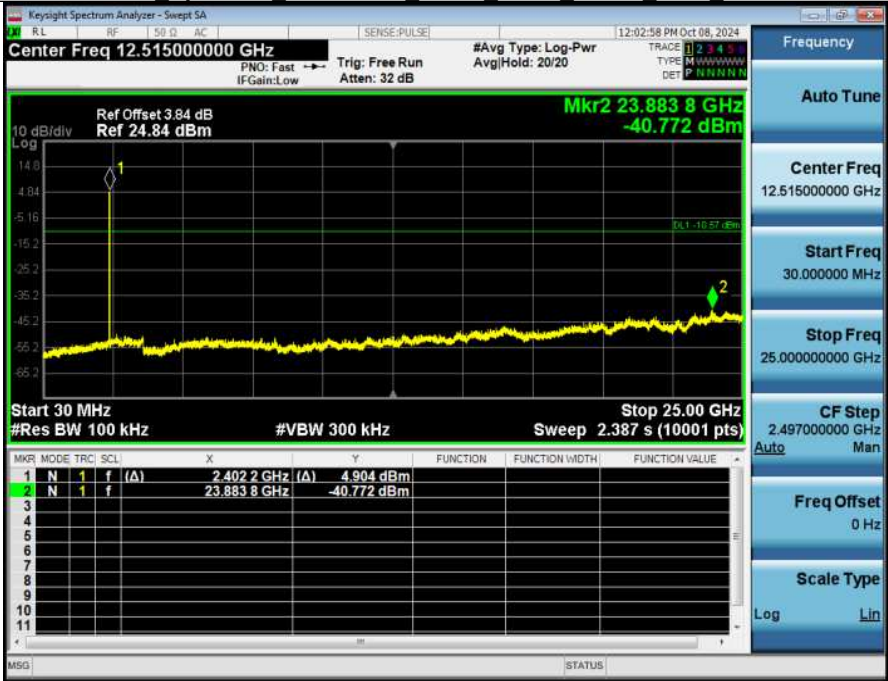

1 Reference Level NVNT ANT1 2-DH1 2441 00




2 Spurious Emissions NVNT ANT1 2-DH1 2441 00



1 Reference Level NVNT ANT1 2-DH1 2480 00



2 Spurious Emissions NVNT ANT1 2-DH1 2480 00

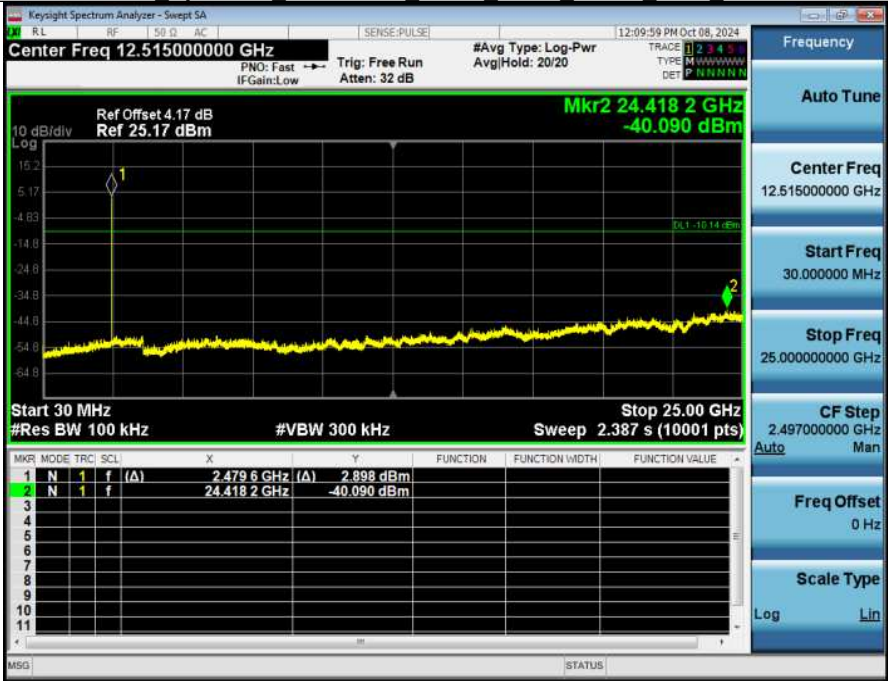

1 Reference Level NVNT ANT1 3-DH1 2402 00



2 Spurious Emissions NVNT ANT1 3-DH1 2402 00



1 Reference Level NVNT ANT1 3-DH1 2441 00



2 Spurious Emissions NVNT ANT1 3-DH1 2441 00



1 Reference Level NVNT ANT1 3-DH1 2480 00



2 Spurious Emissions NVNT ANT1 3-DH1 2480 00



## Appendix A.7: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

### 30 MHz - 1GHz




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 26 °C  
EUT: ITE Hearing Aids      Distance: 3m      Humidity: 54 %RH  
M/N: Sara 1      Test Engineer: Felix Pang  
Test Mode: GFSK 2402MHz  
Test Voltage: DC 3.7V  
Note:

#### Radiated Emission Measurement

Test Date: 2024/10/23 13:02:45

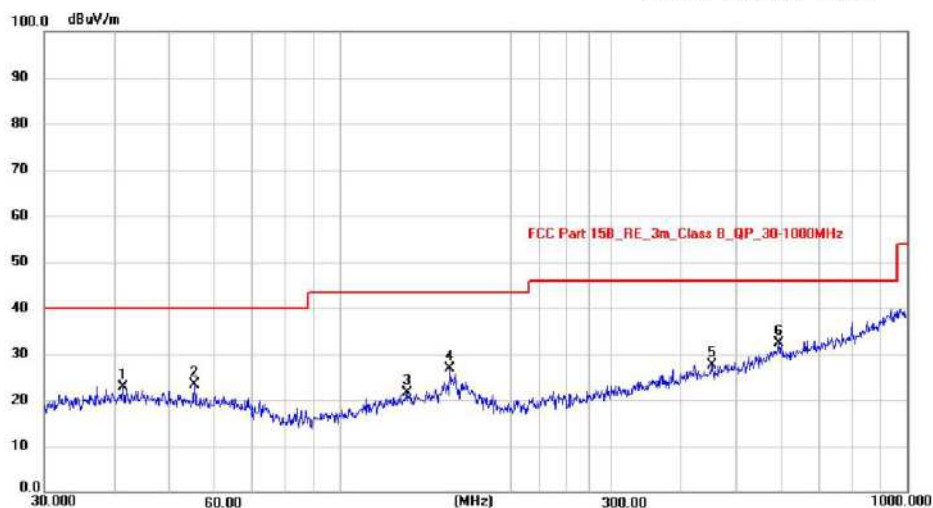

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 41.2765         | 8.43           | 14.52         | 22.95          | 40.00          | -17.05      | peak     | 100         | 125            | P   |        |
| 2   | 55.2207         | 9.66           | 13.61         | 23.27          | 40.00          | -16.73      | peak     | 100         | 241            | P   |        |
| 3   | 131.2965        | 8.39           | 13.31         | 21.70          | 43.50          | -21.80      | peak     | 100         | 102            | P   |        |
| 4   | 155.9101        | 12.61          | 14.26         | 26.87          | 43.50          | -16.63      | peak     | 100         | 302            | P   |        |
| 5   | 452.7197        | 8.59           | 19.00         | 27.59          | 46.00          | -18.41      | peak     | 100         | 235            | P   |        |
| 6 * | 593.0497        | 9.62           | 22.70         | 32.32          | 46.00          | -13.68      | peak     | 100         | 36             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber  
EUT: ITE Hearing Aids  
M/N: Sara 1  
Test Mode: GFSK 2402MHz  
Test Voltage: DC 3.7V  
Note:

Polarization: **Horizontal**  
Distance: 3m  
Test Engineer: Felix Pang

Temperature: 26 °C  
Humidity: 54 %RH

#### Radiated Emission Measurement

Test Date: 2024/10/23 13:06:26

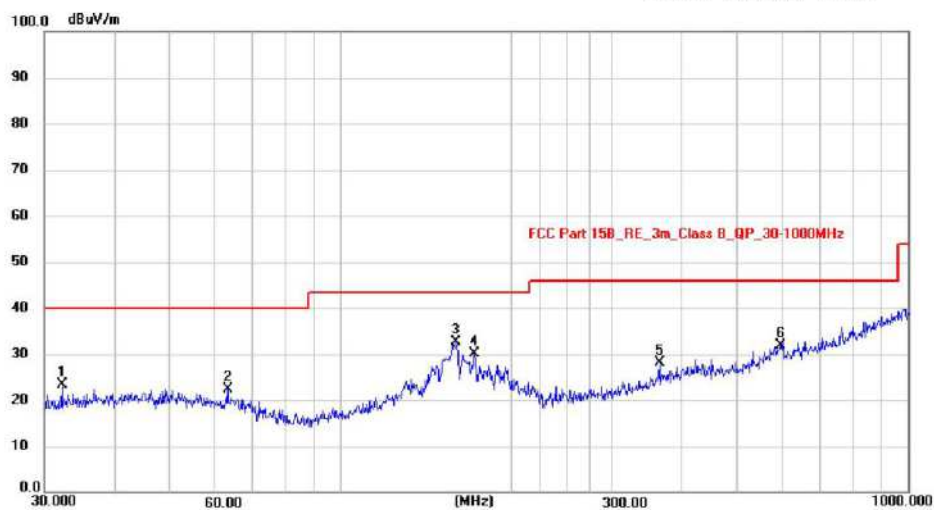

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 32.1795         | 9.89           | 13.37         | 23.26          | 40.00          | -16.74      | peak     | 200         | 254            | P   |        |
| 2   | 63.0916         | 9.46           | 12.80         | 22.26          | 40.00          | -17.74      | peak     | 200         | 129            | P   |        |
| 3 * | 159.7844        | 18.36          | 14.35         | 32.71          | 43.50          | -10.79      | peak     | 200         | 56             | P   |        |
| 4   | 171.9946        | 16.95          | 13.18         | 30.13          | 43.50          | -13.37      | peak     | 200         | 237            | P   |        |
| 5   | 364.2595        | 11.41          | 16.72         | 28.13          | 46.00          | -17.87      | peak     | 200         | 58             | P   |        |
| 6   | 595.1329        | 9.12           | 22.75         | 31.87          | 46.00          | -14.13      | peak     | 200         | 102            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber  
EUT: ITE Hearing Aids  
M/N: Sara 1  
Test Mode: GFSK 2441MHz  
Test Voltage: DC 3.7V  
Note:

Polarization: **Horizontal**  
Distance: 3m  
Test Engineer: Felix Pang

Temperature: 26 °C  
Humidity: 54 %RH

#### Radiated Emission Measurement

Test Date: 2024/10/23 13:09:48



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 37.8121         | 7.27           | 14.25         | 21.52          | 40.00          | -18.48      | peak     | 200         | 32             | P   |        |
| 2   | 48.1626         | 8.08           | 14.22         | 22.30          | 40.00          | -17.70      | peak     | 200         | 124            | P   |        |
| 3   | 57.1914         | 8.21           | 13.40         | 21.61          | 40.00          | -18.39      | peak     | 200         | 52             | P   |        |
| 4 * | 159.2251        | 18.71          | 14.33         | 33.04          | 43.50          | -10.46      | peak     | 200         | 78             | P   |        |
| 5   | 171.3926        | 17.05          | 13.24         | 30.29          | 43.50          | -13.21      | peak     | 200         | 126            | P   |        |
| 6   | 364.2595        | 12.36          | 16.72         | 29.08          | 46.00          | -16.92      | peak     | 200         | 21             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber  
EUT: ITE Hearing Aids  
M/N: Sara 1  
Test Mode: GFSK 2441MHz  
Test Voltage: DC 3.7V  
Note:

Polarization: **Vertical**  
Distance: 3m  
Test Engineer: Felix Pang

Temperature: 26 °C  
Humidity: 54 %RH

#### Radiated Emission Measurement

Test Date: 2024/10/23 13:12:41

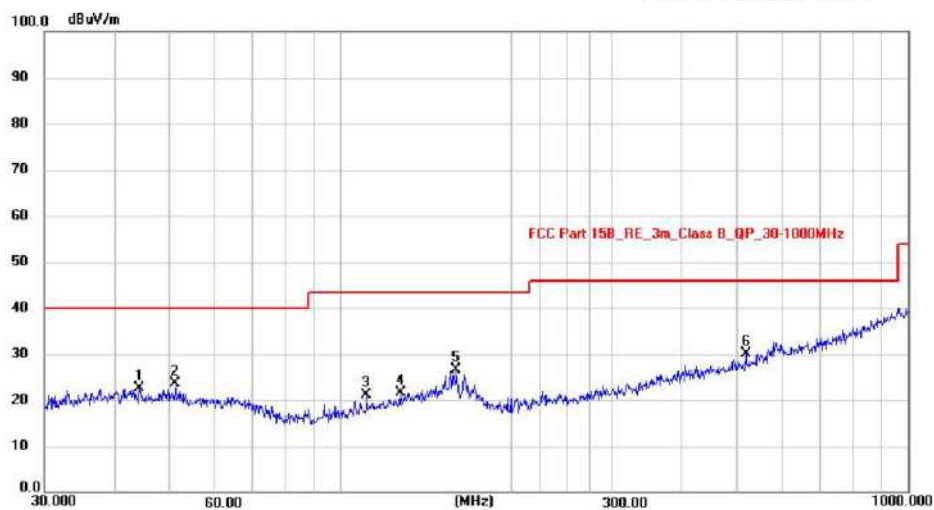

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 44.1202         | 8.27           | 14.39         | 22.66          | 40.00          | -17.34      | peak     | 100         | 321            | P   |        |
| 2   | 51.1209         | 9.63           | 14.03         | 23.66          | 40.00          | -16.34      | peak     | 100         | 45             | P   |        |
| 3   | 110.9571        | 9.58           | 11.67         | 21.25          | 43.50          | -22.25      | peak     | 100         | 63             | P   |        |
| 4   | 127.2176        | 8.62           | 13.04         | 21.66          | 43.50          | -21.84      | peak     | 100         | 245            | P   |        |
| 5   | 159.7844        | 12.20          | 14.35         | 26.55          | 43.50          | -16.95      | peak     | 100         | 145            | P   |        |
| 6 * | 517.2480        | 9.57           | 20.63         | 30.20          | 46.00          | -15.80      | peak     | 100         | 165            | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit