



USER GUIDE

ATLAS MAX
WiFi 6E System
AXE8400

MX8500 Series

Table of Contents

Product Overview	3
Front/top	3
Back	4
Bottom	5
Where to find more help	6
Set Up	7
Wi-Fi System Settings	9
Log in to the Linksys app	9
Dashboard	10
Devices	11
To view or change device details	12
Wi-Fi Settings	12
Advanced Settings	14
Connect a Device with WPS	15
Guest Access	16
Speed Check	17
Parental Controls	19
Device Prioritization	20
Notifications	21
Network Administration	22
Advanced Settings	23
Internet Settings	23
Port Settings	24
Wi-Fi MAC Filters	25
My Account	26
2-Step Verification	27
Help	28
Feedback	29
Connect Directly To Your Router	30
Router Password	31
How to restore factory defaults	32
Specifications	33
Linksys Atlas Pro	33
Environmental	33

Product Overview

Your Linksys ATLAS PRO WiFi 6E System is a tri-band Wi-Fi router with 2.4 GHz, 5 GHz and 6 GHz radios.


Wi-Fi 101:

2.4 GHz – for low-demand activities such as web surfing, email, social media

5 GHz – for streaming audio and video, downloading and uploading files

6 GHz – best for high-demand activities (once you add 6 GHz-capable devices)


Front/top

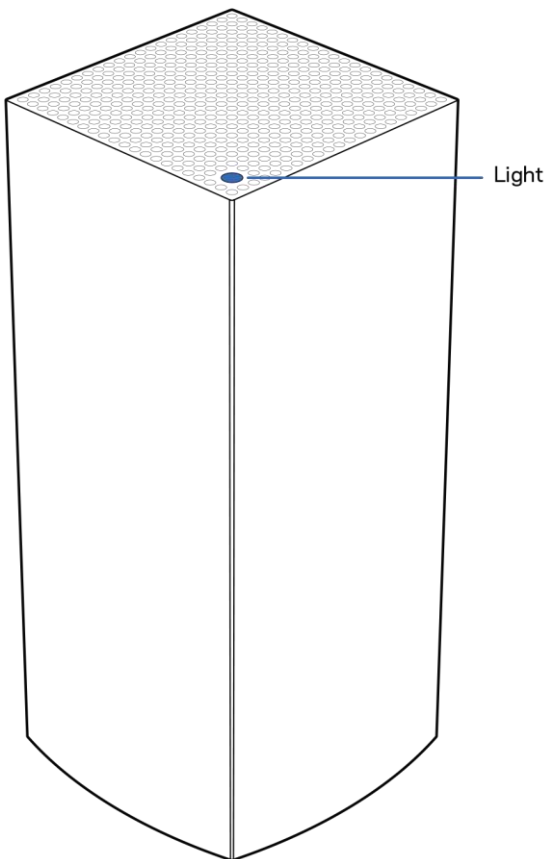

The light on the top of your node gives you information about the node's operation.

Light description	Status
Blinking blue	Starting up
Solid blue	Connected to internet
Blinking purple	Setup in progress
Solid purple	Ready for setup
Blinking red	Disconnected - Child node: too far from working node - Parent node: unplugged from modem
Solid red	No internet from the modem
Solid yellow	Weak connection Child node only

[Back](#)

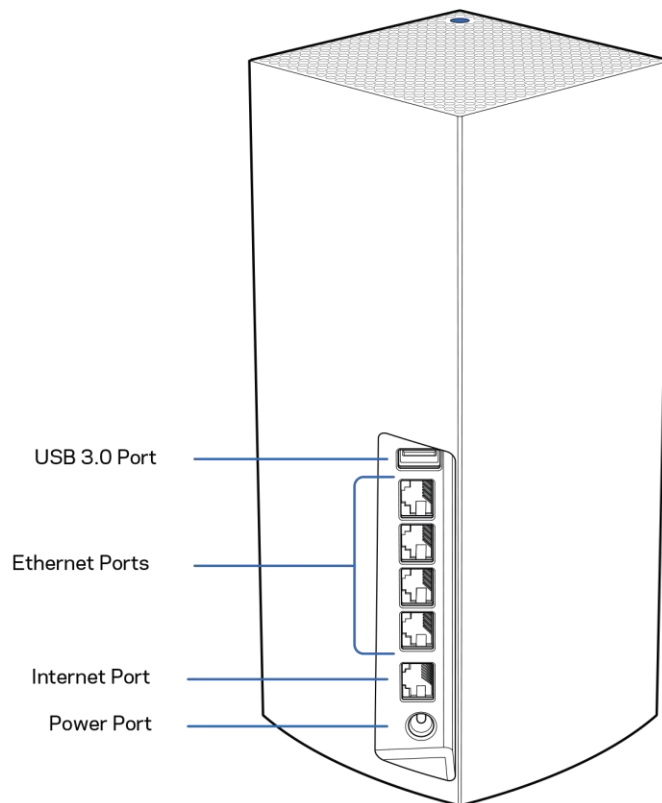

USB 3.0 port—Connect and share USB drives on your network.


Ethernet ports—Connect ethernet cables to these Gigabit ethernet (10/100/1000) ports and to other wired devices on your network. If you plan to have more than one node in your Wi-Fi system, you can add child nodes wirelessly or create wired connections using these ports. If the new child node has a port labeled Internet, use that one.

Note—For best performance, use a CAT5e or higher rated cable on the Ethernet port.

Internet port—Connect an ethernet cable to this 5-Gbps (10/100/1000/2500/5000) port, and to a broadband internet cable/DSL or fiber modem. If you plan to use this router as a child node in your Wi-Fi system, you can add it wirelessly or use this port to wire it to an ethernet port on another node that has already been set up. The Internet port of a child node is automatically configured as an Ethernet (LAN) port and does not have direct connection to the internet.

Power port—Connect the included AC power adapter to this port.

Bottom

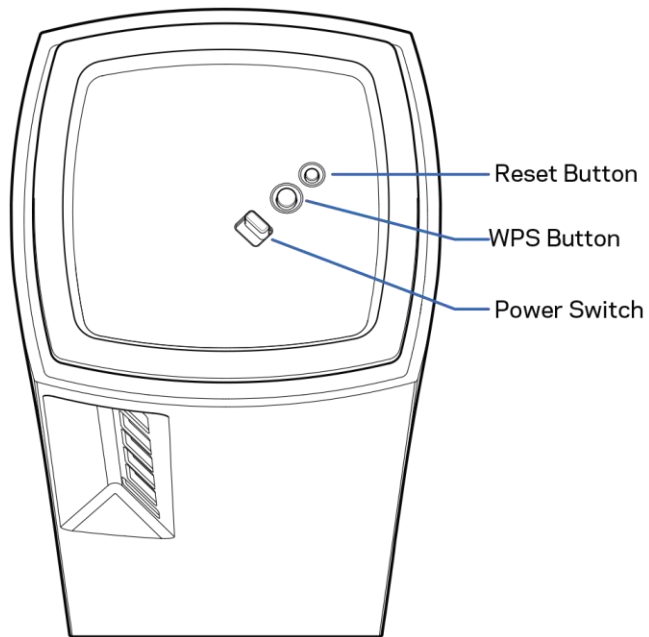

Reset button—Press and hold until the light on top of the node turns red, fades and flashes bright red again to reset the node to its factory defaults.


Wi-Fi Protected Setup button—Press to connect WPS-enabled network devices.

Power switch—Slide to | (on) to power on the node.

Help

Where to find more help

- Linksys.com/support/MX8500
- Linksys app help (launch the app and click Help in the main navigation menu)

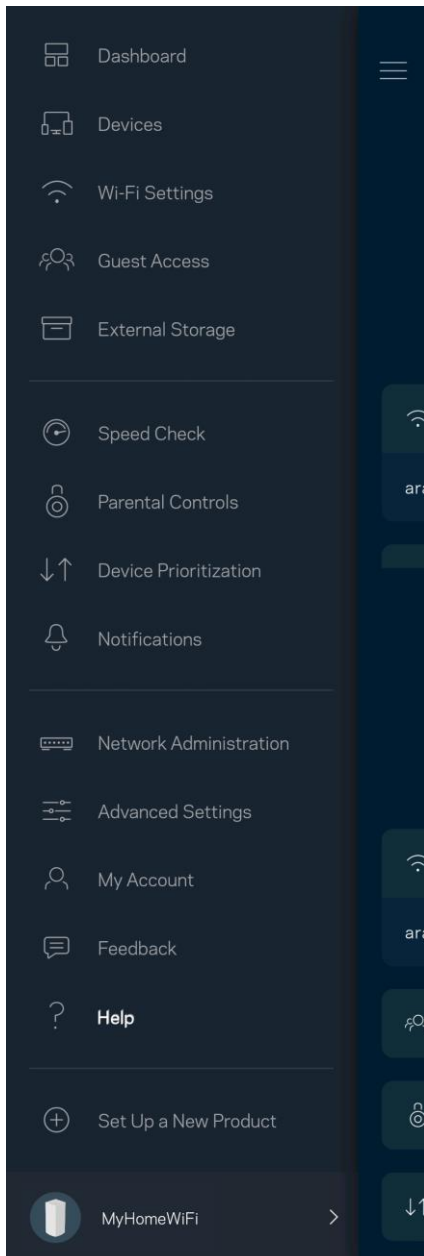

Note—Licenses and notices for third party software used in this product may be viewed on <http://support.linksys.com/en-us/license>. Please contact <http://support.linksys.com/en-us/gplcodecenter> for questions or GPL source code requests.

Set Up

IMPORTANT—Linksys nodes can be set up as parent nodes or child nodes. A parent node must be connected with an ethernet cable to your modem or modem router. Once set up wirelessly, child nodes can be connected to another node wirelessly or with ethernet cables.

If you are adding this new node as parent node to an existing Linksys whole-home Wi-Fi system, factory reset all nodes and add them to the system after the new node is setup and working.

Download the Linksys app. You need this app to set up a Linksys whole-home Wi-Fi system.

Go to the app store for your device and search for Linksys. 

Install the app, open it and follow the instructions.

You will create a Linksys account so you can use the app to view or change your system settings from anywhere you have an internet connection.

Among the many things you can do with your Linksys account:

- Change your Wi-Fi name and password
- Set up guest access
- Connect devices to Wi-Fi with WPS
- Block internet with parental controls
- Test your internet connection speed

Note—During setup we'll send a verification email. From your home network, click the link in the email.

Other than plugging in the power and the ethernet cable, the app-based setup process does the work for you. Once connected, use the app to personalize your Wi-Fi by giving it a name and password. You also can give nodes names based on where they are so you can identify them in the rare case where things need attention.

Print this page, then record your Wi-Fi and account settings in the table as a reference. Store your notes in a safe place.



Wi-Fi Name	
Wi-Fi Password	
Admin Password	
Guest Access Name	
Guest Access Password	
Linksys App Login Email	
Linksys App Password	

Wi-Fi System Settings

Using your Linksys app, you can view or change your system settings to make your Wi-Fi more secure or to work better with a device or game. You can access settings from anywhere in the world if you have an internet connection. You can also access settings using your router password when connected to your home network even if you do not have an internet connection.

Log in to the Linksys app


1. Open the Linksys app.

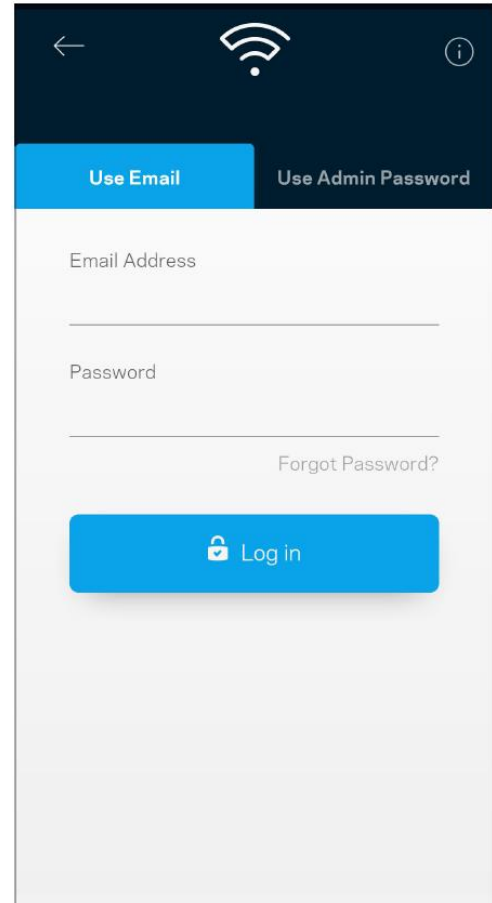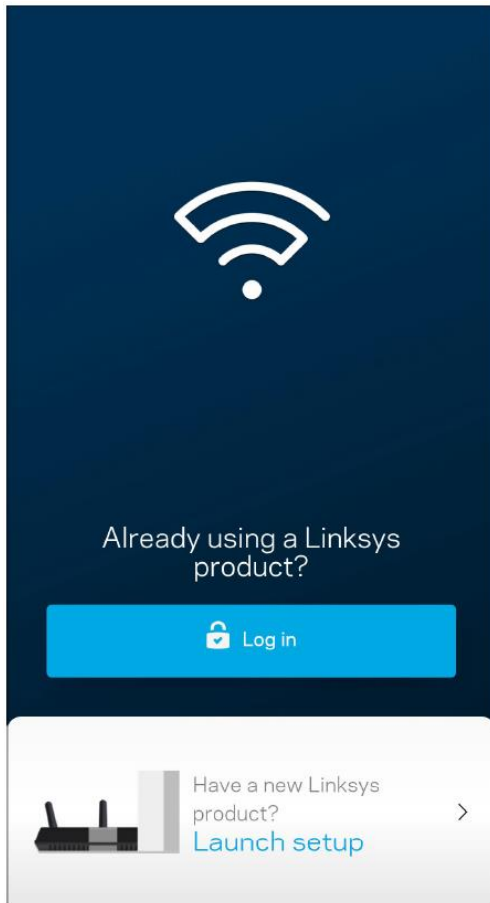

2. Enter the email address you used when creating your account.
3. Enter your account password.
4. Tap Log in.


Dashboard

Dashboard is a snapshot of your Wi-Fi. See how many devices are connected to your system, share Wi-Fi password and allow guest access to your Wi-Fi. Dashboard also shows you if any devices have parental controls on them or have been prioritized for Wi-Fi access.

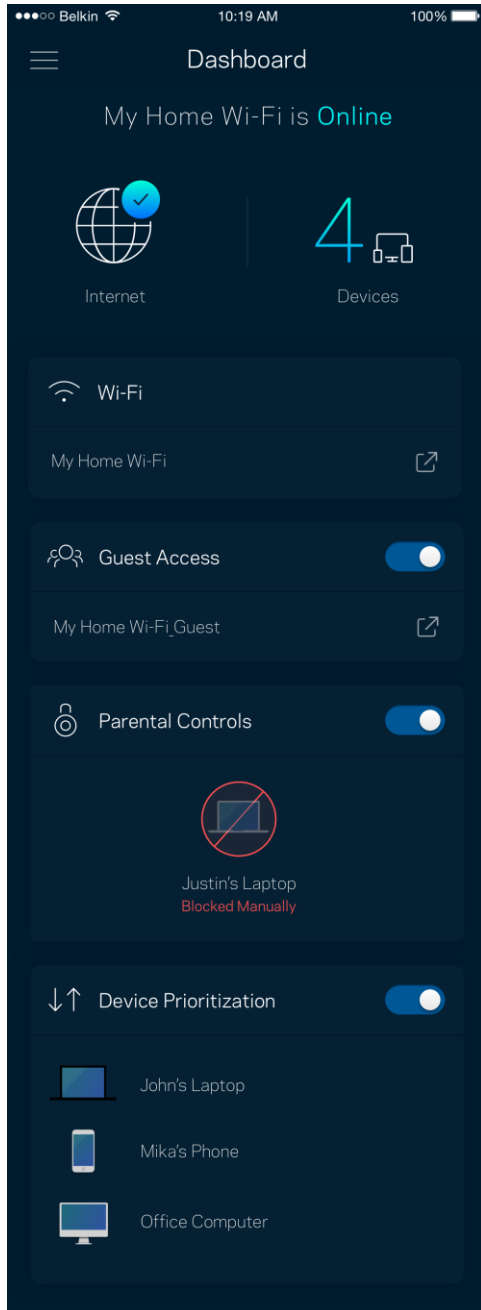


Devices

View and change details for all devices connected to your Wi-Fi. You can view devices on your main network and your guest network, or display information about each device.

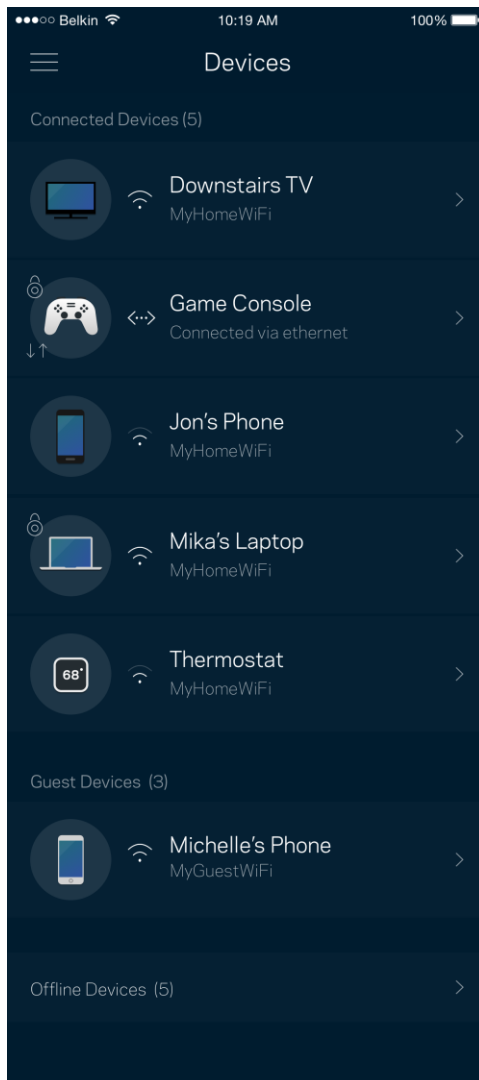


To view or change device details

From the Devices screen you can edit device names and change the device icons. You also can prioritize devices, set parental controls, and see Wi-Fi details. Tap on any device to see details.

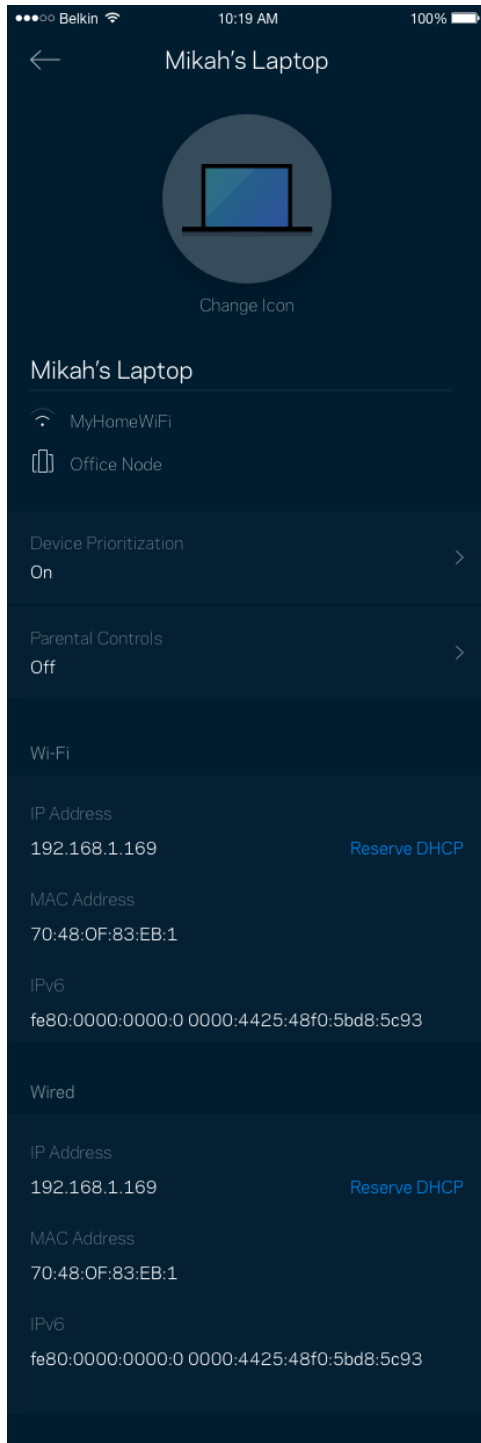



Wi-Fi Settings

View or change your Wi-Fi name and password and connect devices using Wi-Fi Protected Setup™.

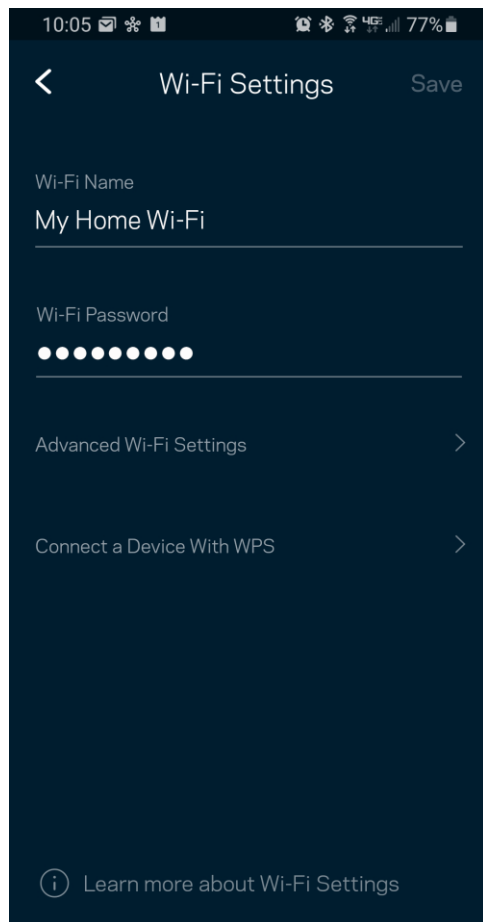


Advanced Settings

Advanced users can change the default security type and Wi-Fi mode. Do not change these unless you have a lot of experience with Wi-Fi networks. Channel Finder will search for the most-open Wi-Fi channels in your area to ensure you get the best performance from your system. If you have more than one node in your system, Channel Finder will find the best channel for each node.

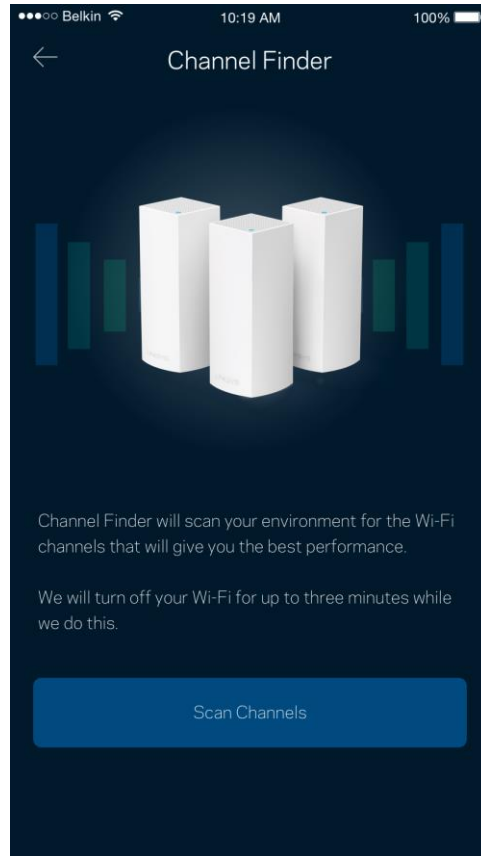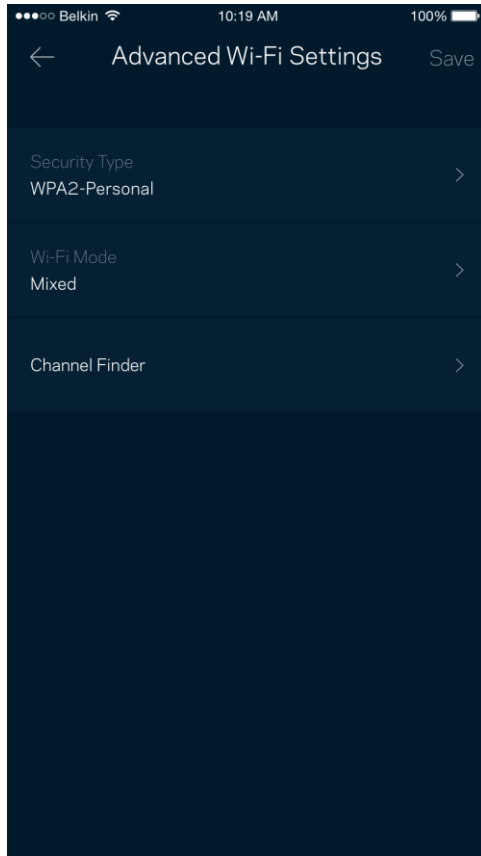


Connect a Device with WPS

Wi-Fi Protected Setup allows you to easily connect wireless devices to your Wi-Fi without manually entering security settings.

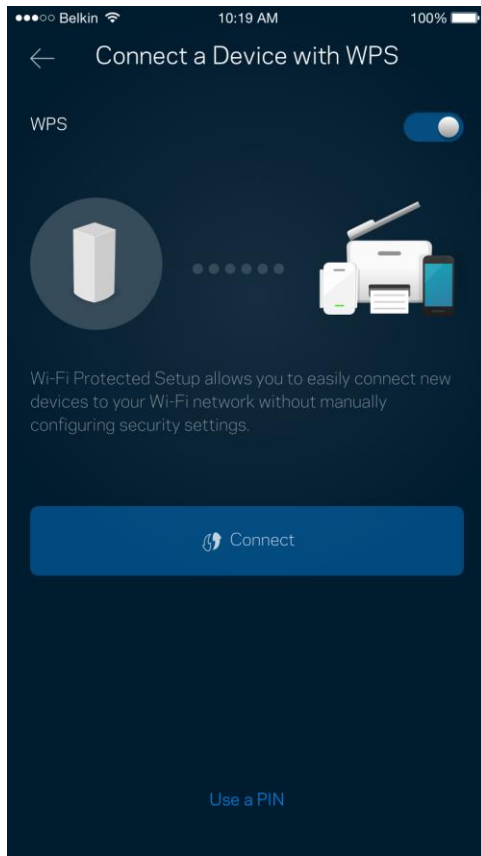

Guest Access


Use your Guest Access feature to allow guests to get online while restricting their access to other resources connected to your Wi-Fi. Send the password by text message or email.

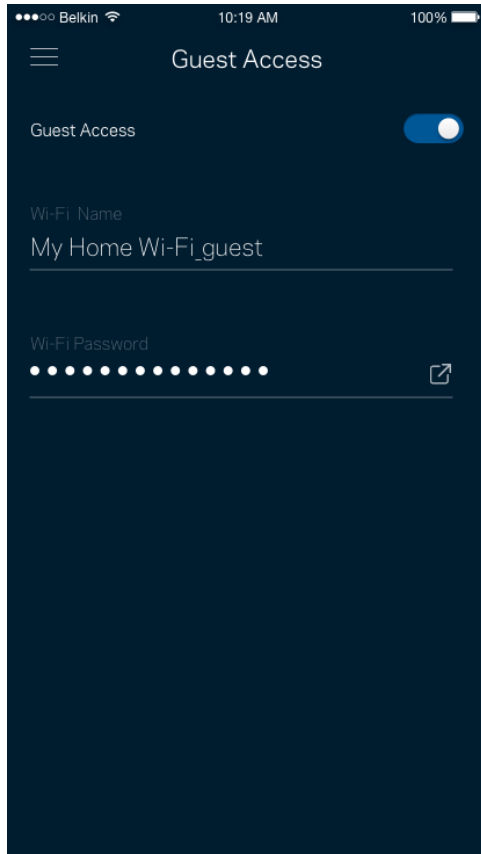

External Storage


See which node an external drive is connected to, check the amount of free space left, and enable authentication by setting a username and password. (Only when a drive is plugged in to a node's USB port.)

Be sure to tap Eject  before removing a drive to avoid losing data.

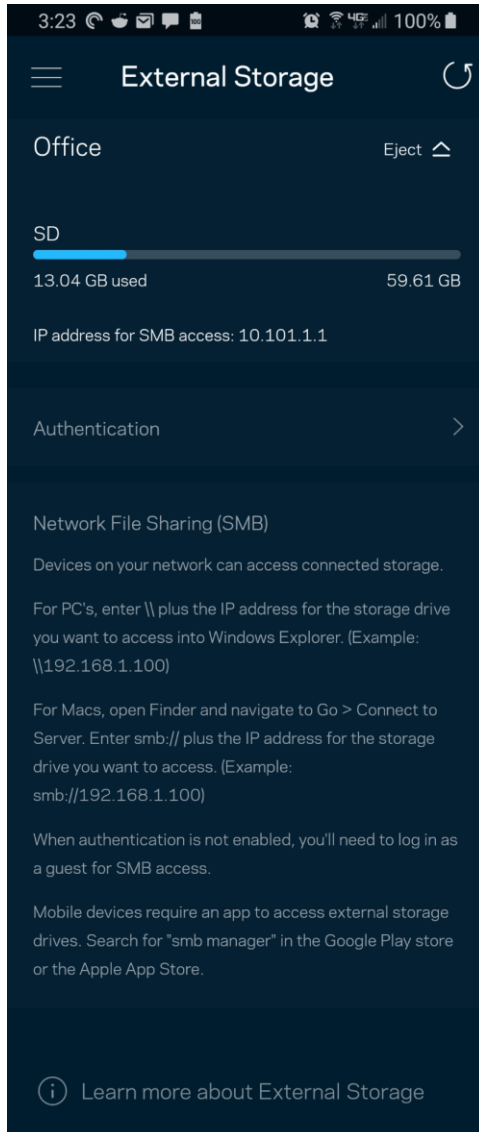

Speed Check

Run a speed check to make sure you are getting the speeds you are paying for. Speed check also helps in Device Prioritization because results determine how Wi-Fi is distributed to the prioritized devices.

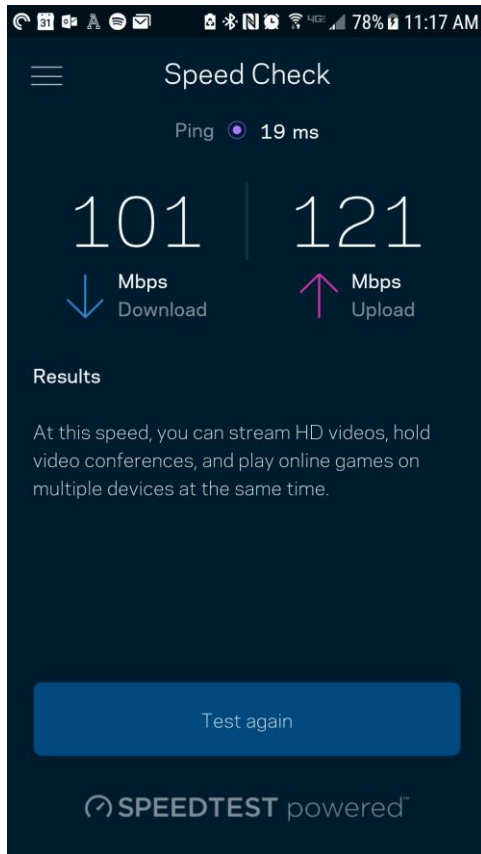


- Download speed is the rate at which internet content is transferred to your Wi-Fi system.
- Upload speed is the rate at which you can upload content to the internet.

Note—Internet connection speeds are determined by a variety of factors, including ISP account type, local and worldwide internet traffic, and number of devices in your home that are sharing the internet connection.


Parental Controls

Parental controls allow you to control when your kids are online and what they're doing there. Pause internet to specific devices, or block specific websites.

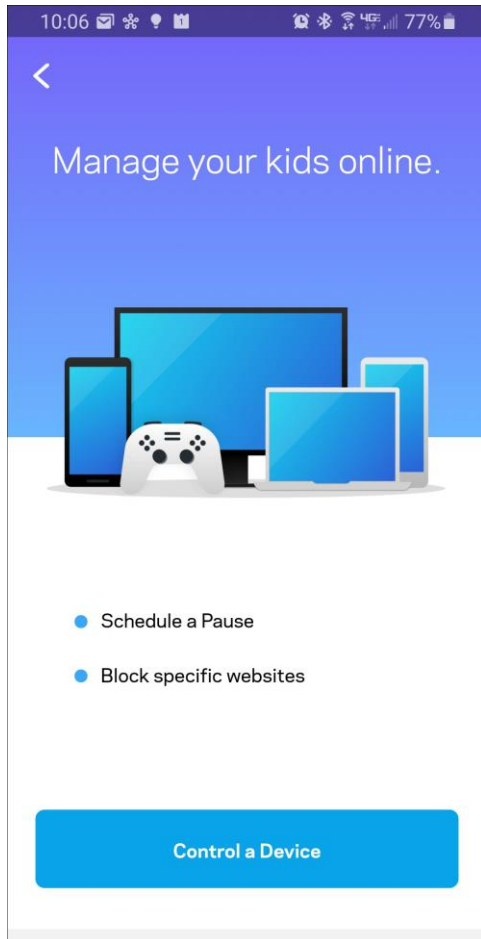


Device Prioritization

Choose up to three devices for priority usage of your internet connection. Those devices – wired and/or wireless – always will have the best access when connected. The app runs a speed check to determine how to best distribute Wi-Fi to prioritized devices. Other devices will share the leftover capacity. Prioritized devices appear on Dashboard.

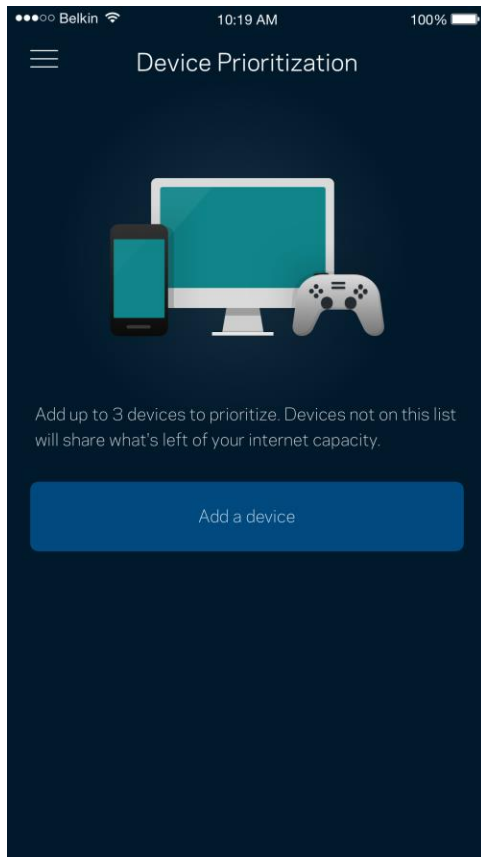


Notifications

If you have more than one node, we can notify you when child nodes in your system go offline. Child nodes are any that are not wired to your modem. You have to turn on notifications in your mobile device settings to allow the app to notify you.

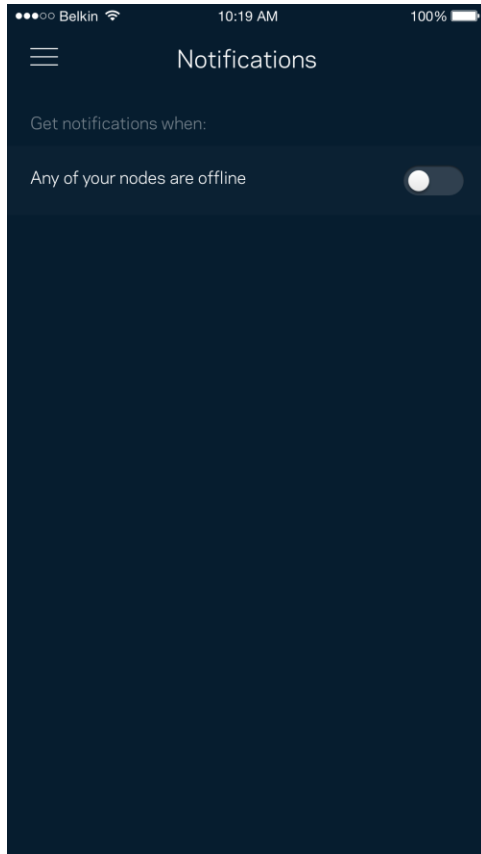

Network Administration

Use the Network Administration screen to change the admin password and hint, and check various identifiers (model number, serial number, and IP details) for all nodes in your Wi-Fi.

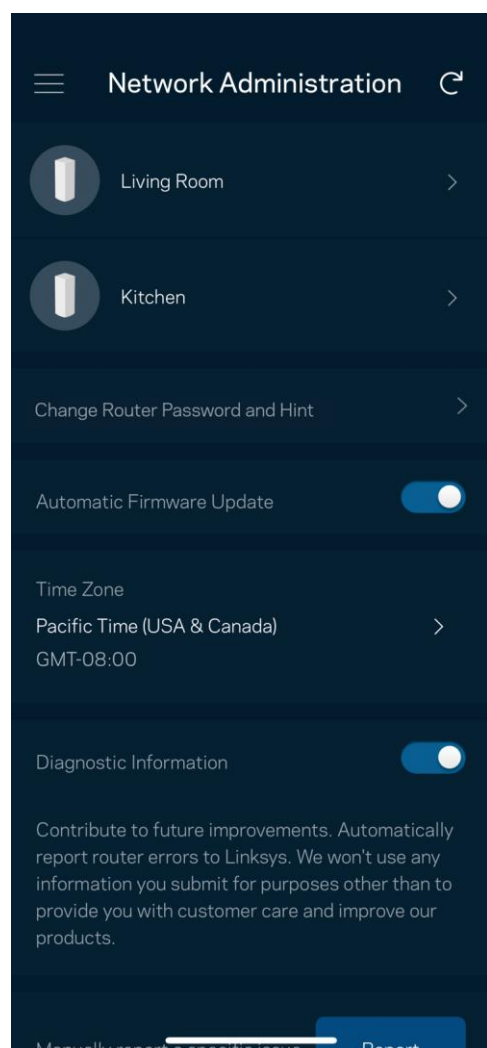

Opt in to automatically report crashes to Linksys and contribute to improving the Wi-Fi experience. You also can manually report specific issues to Linksys.


The following information will be sent with your description of the issue:

• App version	• Login Type (<i>cloud: show email address associated, local: display "Router admin"</i>)
• Device model	• WAN Connection type (<i>display Wi-Fi or ethernet</i>)
• Device OS version	• Time: date (<i>mo/day/year, time, time zone</i>)

Advanced Settings


Internet Settings

You can choose how your Wi-Fi system connects to the internet. The default is Automatic Configuration – DHCP. Other connection types depend on your internet service provider or how you plan to use your system. Advanced users can use Additional Settings to clone MAC addresses and set MTU (maximum transmission unit).

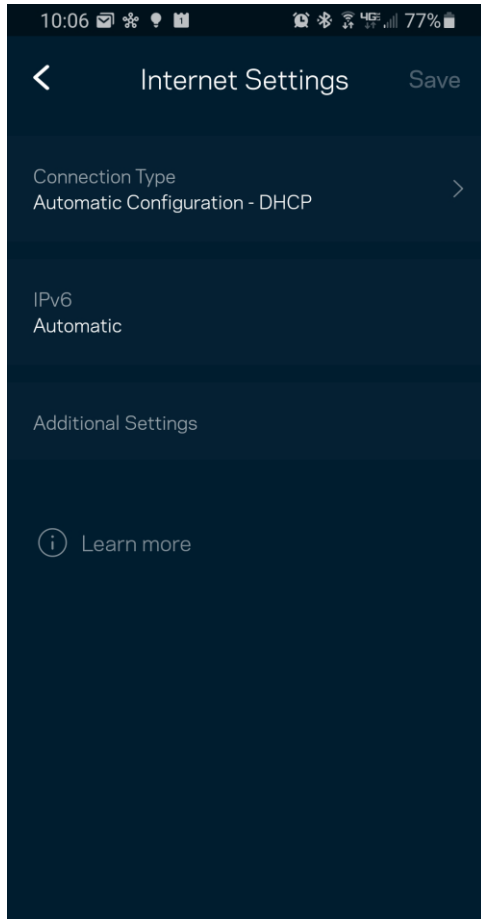


Port Settings

Port forwarding—for a single port, multiple ports or a range of ports—sends traffic inbound on a specific port or ports to a specific device on your network. In port range triggering, your router watches outgoing data for specific port numbers. The router remembers the IP address of the device that requests the data so that when the requested data returns, it is routed back to the proper device.

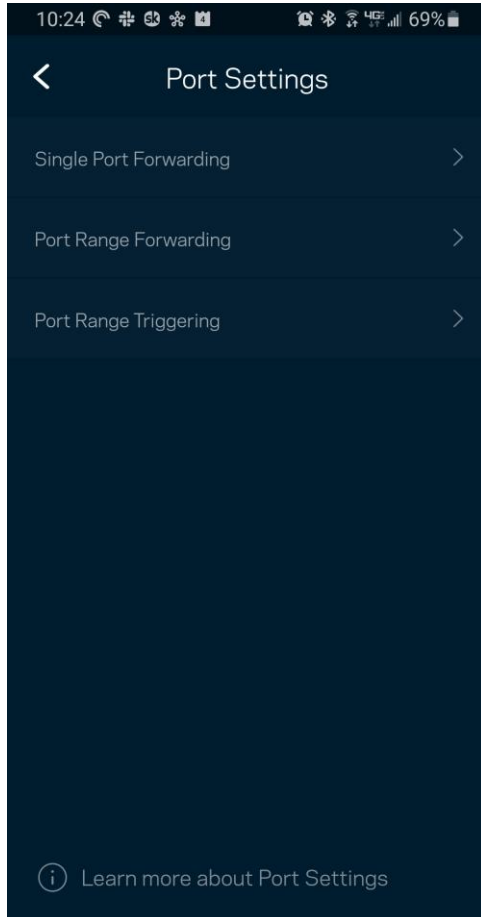

Wi-Fi MAC Filters

Every network device has a unique 12-digit MAC (media access control) address. You can create a list of MAC addresses and regulate how devices use your Wi-Fi.

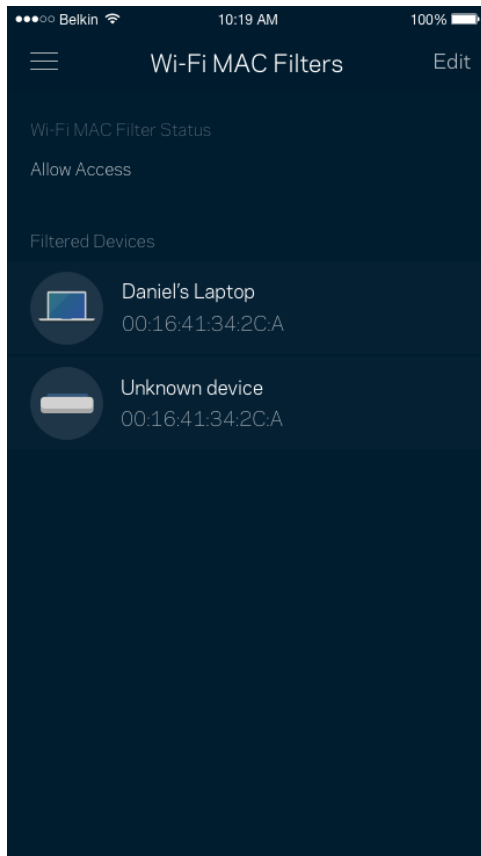

My Account

Change your Linksys app password and opt in to receive the latest news and deals from Linksys.

10:08 76%

< My Account Save

Password
•••••

Phone Number
+1 310 546 5797 >

Security

2-Step Verification On >

Marketing


Newsletter ☐
Be the first to know about exclusive deals & news.

Log Out

Close Account


2-Step Verification

Add a layer of security to your Linksys account by requiring a verification code delivered to you by email or text when you log in from a new device. You can choose to remember a device for 30 days.

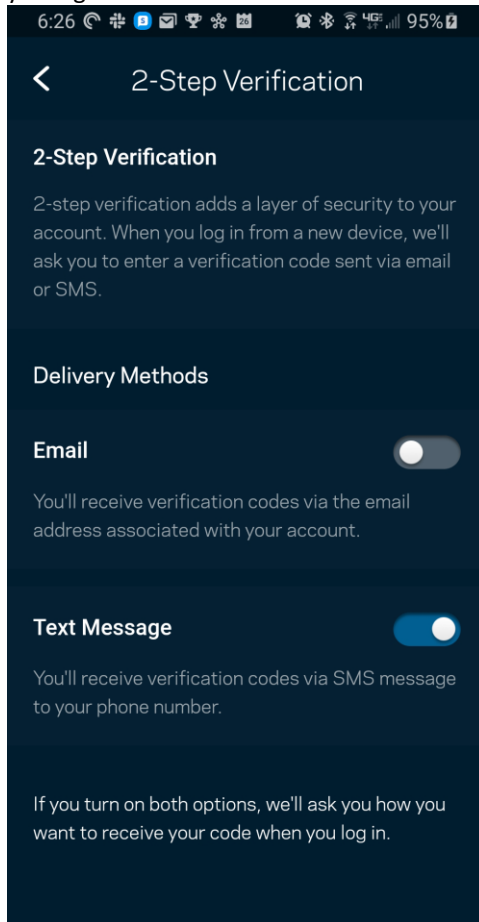


Help

Having trouble with the app? Just need a little more information about a feature? Tap Help for an explanation.

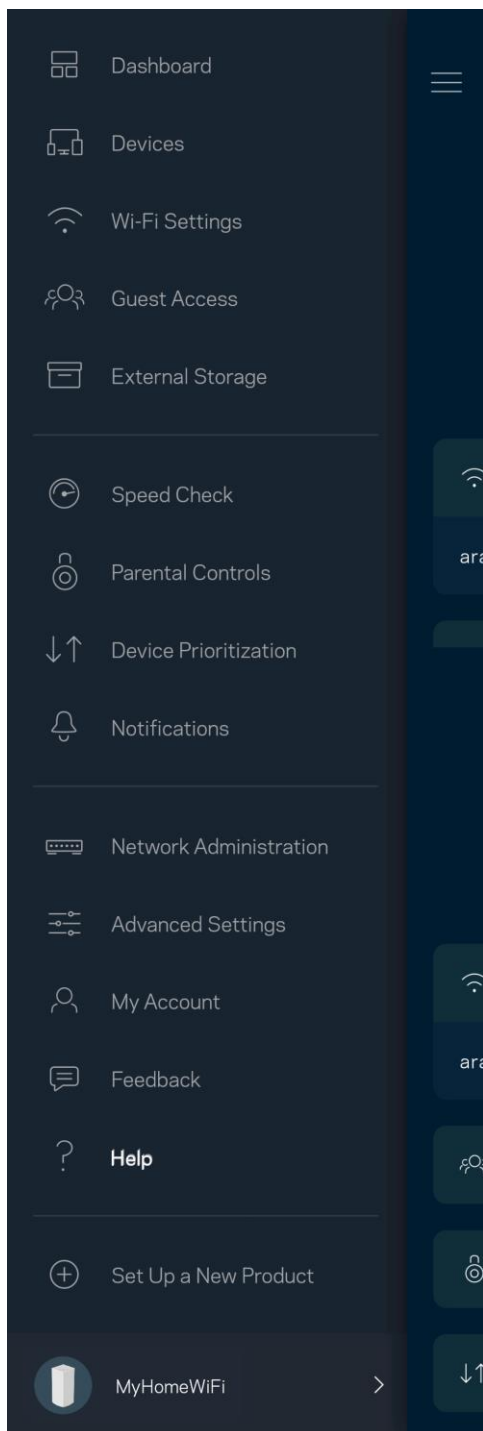



Feedback

Here's your chance to tell us what you think. Rate the app at your app store, send us a suggestion, or report an issue that's keeping you from a great experience.

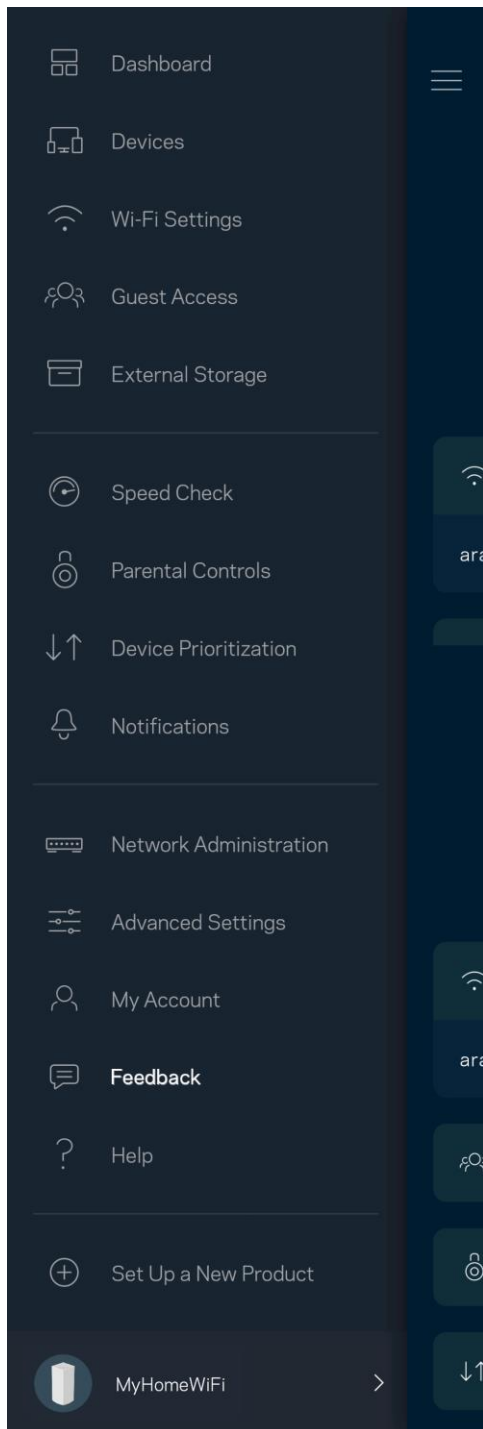


Connect Directly To Your Router

If you are not connected to the internet you still can access your Wi-Fi system. Connect to your Wi-Fi name, launch the Linksys app and tap Log in. On the next screen, tap the Use Admin Password tab. You will not be able to access your Linksys account when not online.

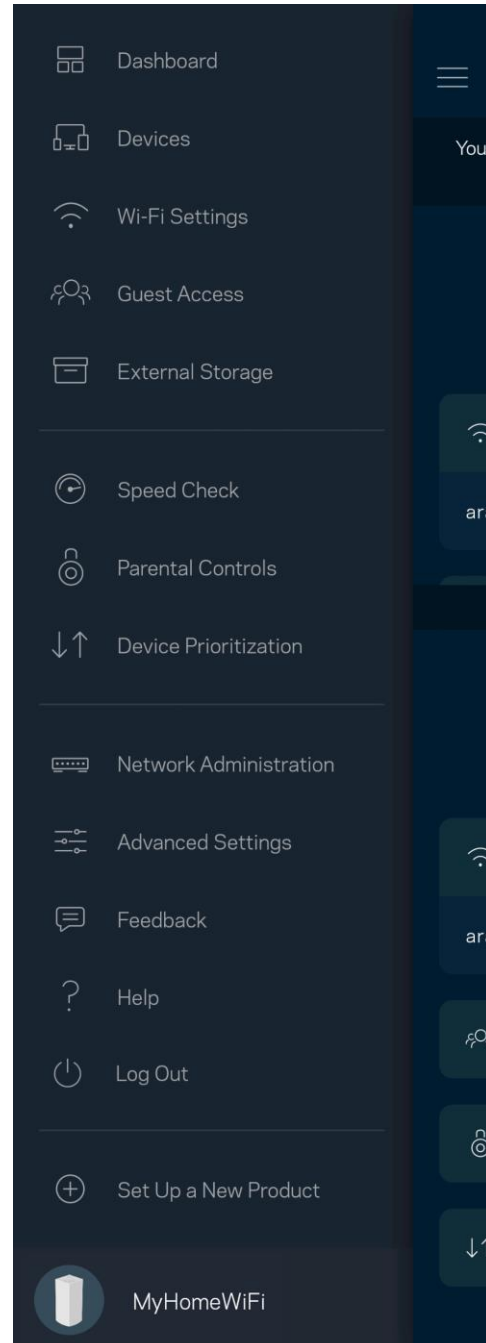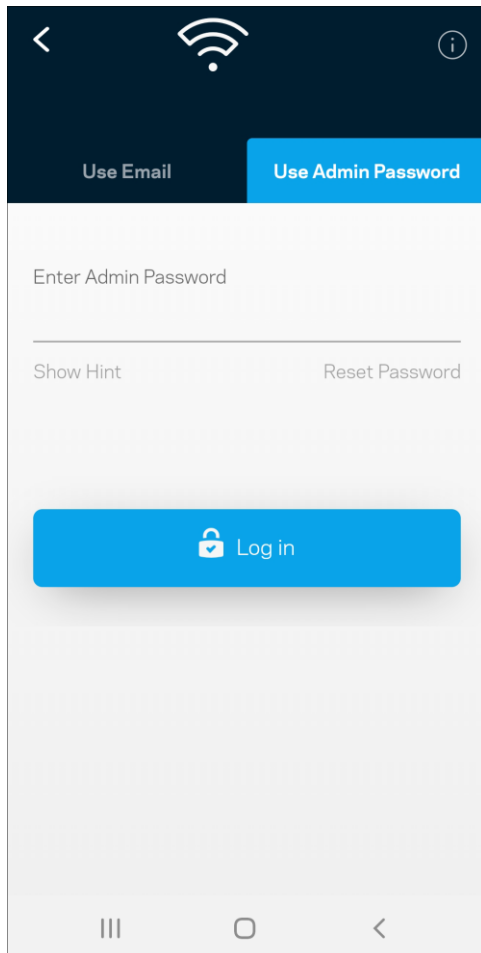


Router Password

We created a secure admin password during setup. You won't be able to log in with Use Admin Password until you change it. Tap Network Administration and Change Router Password and Hint.

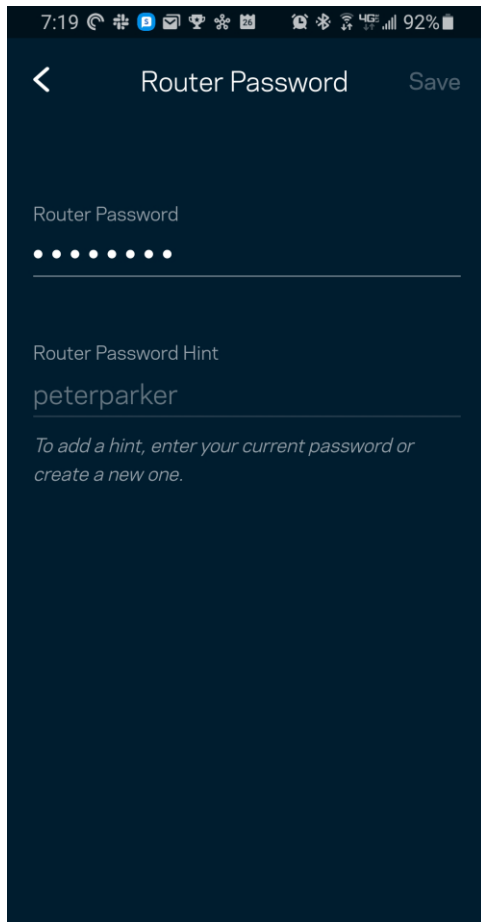

The screenshot shows the 'Router Password' screen in the Linksys app. At the top, there is a status bar with the time 7:19 and various icons. Below the status bar, the title 'Router Password' is centered, with a back arrow on the left and a 'Save' button on the right. The screen has a dark blue background. There are two main input fields: 'Router Password' and 'Router Password Hint'. The 'Router Password' field contains ten dots, indicating a masked password. The 'Router Password Hint' field contains the text 'peterparker'. Below the hint field, there is a note: 'To add a hint, enter your current password or create a new one.'

To keep your Wi-Fi system secure, we'll send you an email if someone changes the admin password.

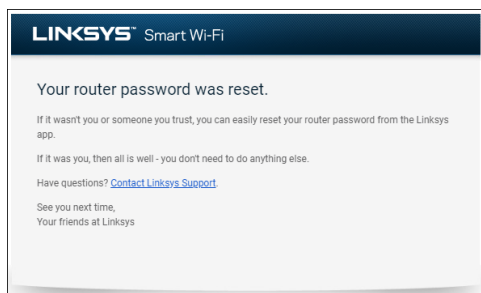


How to restore factory defaults

You should never need to factory reset your router—a very disruptive process. A factory reset restores your Wi-Fi system to the state it was when you took it out of its box, requiring you to go through the setup process again. All settings you have customized in setup and since – things such as Wi-Fi name, passwords, security type – will be erased. All wireless devices will disconnect from your Wi-Fi.

To restore your router to factory defaults:

- With your node connected to power and turned on, press and hold the Reset button on the bottom. The light on top of the node will turn red and fade in pulses. Do not release the button until the light goes out and then turns bright red.

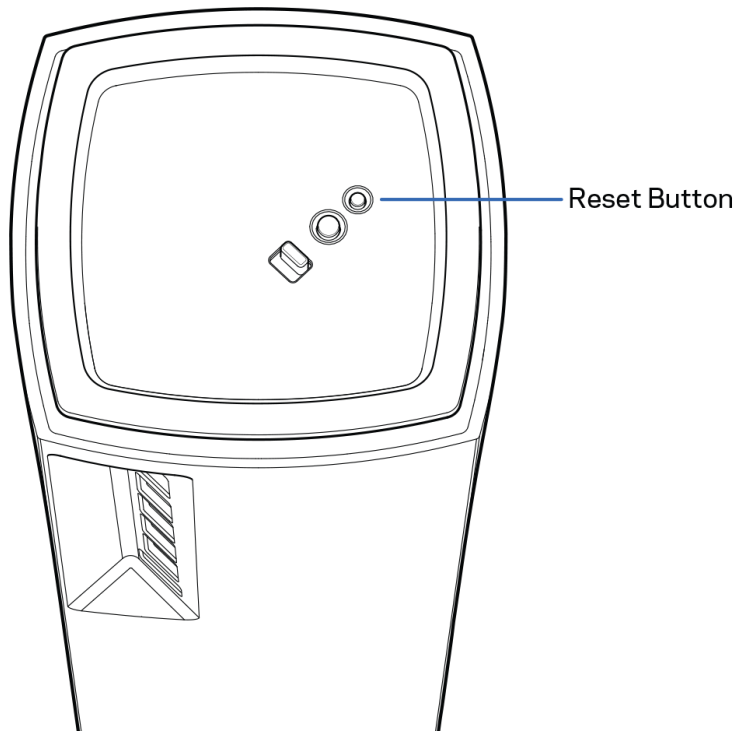

Specifications

Linksys Atlas Max

Model Name	Atlas Max WiFi 6E System
Model Number	MX8500
Radio Frequency	2.4 GHz, 5 GHz and 6 GHz
# of Antennas	13 (internal)
Ports	One 5 Gbps (10/100/1000/2500/5000 Mbps) WAN port Four gigabit (10/100/1000 Mbps) LAN ports USB 3.0, power
Buttons	Power switch, WPS, reset
Light	One, multicolored light for power and status
Security Features	WPA2/WPA3 Mixed Personal (2.4 GHz and 5 GHz bands only) WPA2 Personal (2.4 GHz and 5 GHz bands only) WPA3 Personal (all bands) Enhanced Open Only (all bands) Open and Enhanced Open (2.4 GHz and 5 GHz bands only) Open (2.4 GHz and 5 GHz bands only) – anyone can join Wi-Fi system
Security Key Bits	Up to 128-bit encryption

Environmental

Dimensions	113 mm x 113 mm x 243 mm (4.45" x 4.45" x 9.57")
Unit Weight	1.47 kg (3.25 lb)
Power	12V, 4A
Certifications	FCC, Wi-Fi 6E (IEEE 802.11a/b/g/n/ac/ax)
Operating Temp.	32° to 104° F (0 to 40° C)
Storage Temp.	-4° to 140° F (-20 to 60° C)
Operating Humidity	10% to 80% relative humidity, non-condensing
Storage Humidity	5% to 90% non-condensing

Notes:

For regulatory, warranty, and safety information, go to Linksys.com/support/MX8500.

Specifications are subject to change without notice.

Maximum performance derived from IEEE Standard 802.11 specifications. Actual performance can vary, including lower wireless network capacity, data throughput rate, range and coverage. Performance depends on many factors, conditions and variables, including distance from the access point, volume of network traffic, building materials and construction, operating system used, mix of wireless products used, interference and other adverse conditions.

Visit linksys.com/support for award-winning technical support.

BELKIN, LINKSYS and many product names and logos are trademarks of the Belkin group of companies. Third-party trademarks mentioned are the property of their respective owners.

© 2021 Belkin International, Inc. and/or its affiliates. All rights reserved.

LNKPG-00802 Rev A00