




  4G LTE MOBILE ROUTER DWR-932W QUICK INSTALLATION GUIDE	ENGLISH  Thank you for purchasing our Mi-Fi. Please follow these simple but important instructions for optimal use of your new Mi-Fi. Notice: Products or services of the vendor or carrier are subject to change within this User Guide without prior notice. D-Link DWR-932W	ENGLISH Getting to Know Your Mi-Fi  Keys Power key: Hold the key for 2 seconds to power the device on/off. WPS key: Hold the WPS key for 3 seconds to activate the WPS function Reset: Use a pen nib or needle to press the reset hole for 1 second, the device will be reset. Micro USB Port - Charging - Use data cable to connect the PC and work as a 4G modem. D-Link 3 4 D-Link DWR-932W	ENGLISH LED Indicators Network - When insert the SIM card, the corresponding indicator will light on in blue if with good network. - The indicator will be in green if the SIM card network is weak. - When the device is without SIM card or the SIM card is without network service, the indicator will flash in red WPS Long press the WPS key to open WPS function, the LED indicator will flash in blue Wi-Fi - It shows blue color when any device connects. - It doesn't light on if no device connects. Battery - It shows red color when the device is charging - It shows blue color when the device is charging full. - It flashes red color if the device is less than 20% battery. When the device is powered on, the indicators light on. The indicators (except the Wi-Fi and battery ones) light off when the device works stable. Short press the POWER key to wake up, the indicators would light on for 15 seconds, then light off. D-Link DWR-932W	ENGLISH Setting Up Your Mi-Fi - Remove the battery cover (Lift gently in the direction shown)  - Insert the SIM card.  D-Link DWR-932W 5
---	---	--	---	---

ENGLISH

3. Insert the Battery and attach the battery cover.

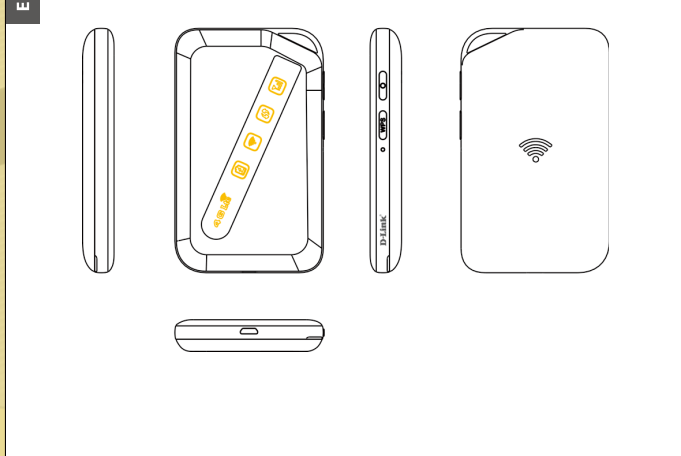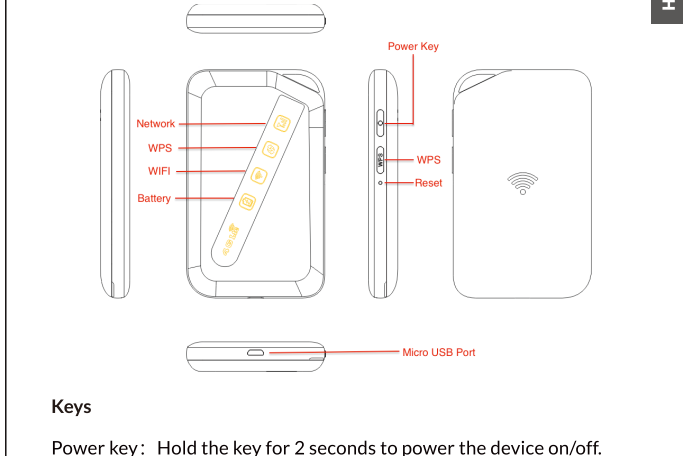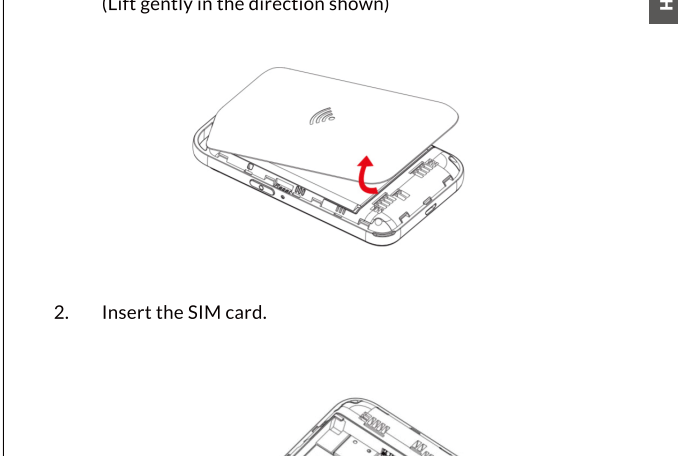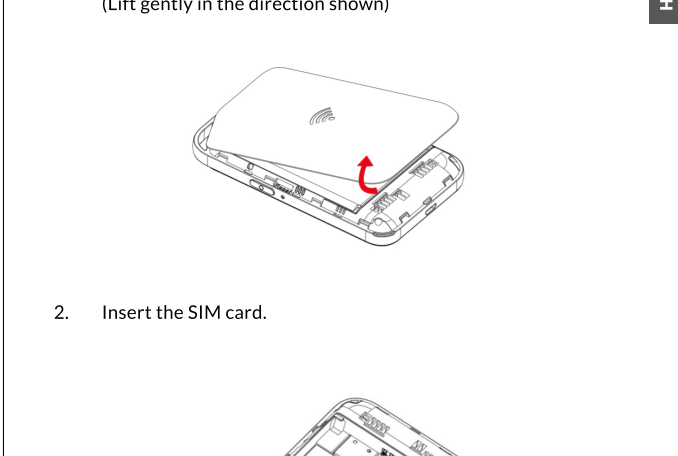

Charging Your Mi-Fi
Use the data cable connect the travel charger and the Mi-Fi micro USB port

Connecting Your WIFI Device to Your MIFI& Network Control
Open the web control on the WIFI device (notebook, smartphone etc.)

Searching the WIFI, connect

Open the browser when the network connects successfully

Input 192.168.0.1, go to the login page.

ENGLISH

Input the Username and Password as below, and sign in,




Using the WPS
If your WIFI device supports WPS, you do not have to input the password manually after a WPS connection has been established. Please follow the following steps:

- Power on your MIFI and enable the WIFI function from the device you would like to connect.
- Press and hold the WPS key on your device for 3 seconds to start the Wi-Fi Protected Setup authentication process.
- Enable the WPS function on your WIFI device in order to respond to this authentication process.

ENGLISH

- Follow the system prompts on your WIFI device to finish the connection.
- If no WIFI device is connected within 2 minutes, the WPS function will automatically turn off.

Managing Your Mi-Fi
Check the Mi-Fi information after login, which includes Mi-Fi IP, IMEI, Masks, SW and HW version, the connected Wi-Fi device settings.

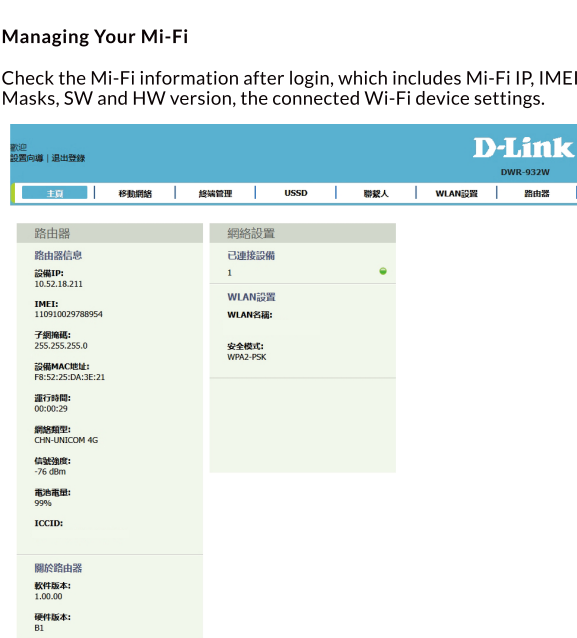

6

D-Link

DWR-932W

7

8

D-Link

DWR-932W

9

D-Link

DWR-932W

FCC Caution

Labelling requirements.

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Information to the user.

Note: This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and may radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception (able to be determined by turning the device off and on), the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Specific Absorption Rate (SAR) information:

FCC RF Exposure Information and Statement The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: DWR-932W, DWR-932W/X, DWR-932W/XX, DWR-932W/XXX (X CAN BE 0-9, A-Z) (FCC ID: KA2WR932WB1) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification properly worn the body is 0.864 W/kg. This device was tested for typical body-worn operations with the back of the handset kept 0mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 0 mm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that does not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

Body-worn Operation

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 0mm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.