


Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

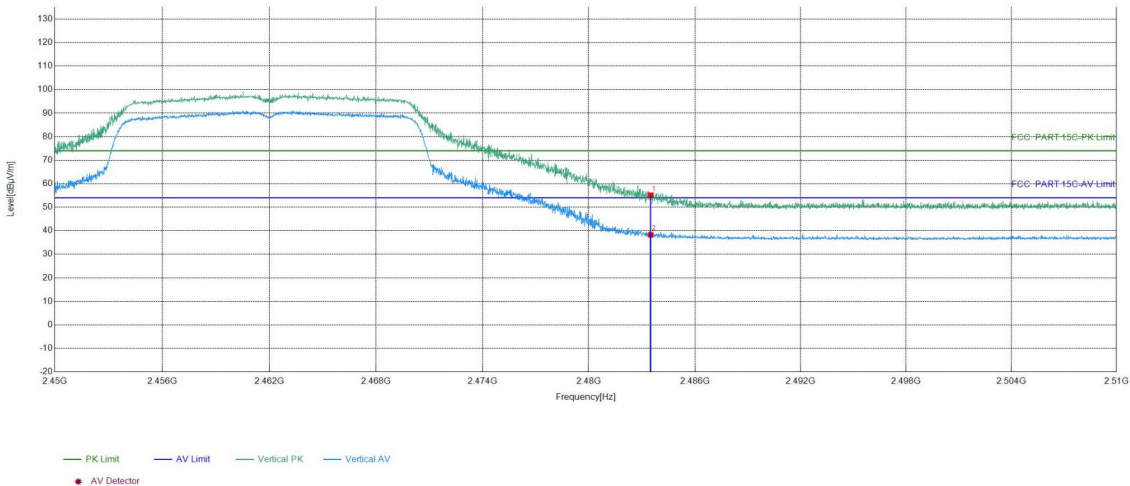

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.84	55.13	74.00	18.87	PASS	Vertical	PK
2	2483.5	16.29	22.00	38.29	54.00	15.71	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

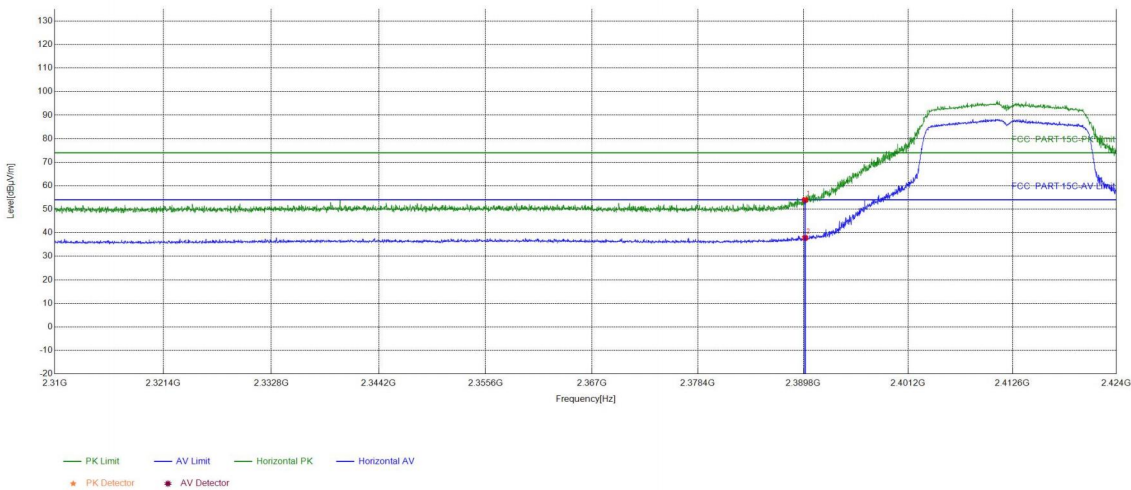

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	38.00	53.96	74.00	20.04	PASS	Horizontal	PK
2	2390	15.96	21.83	37.79	54.00	16.21	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

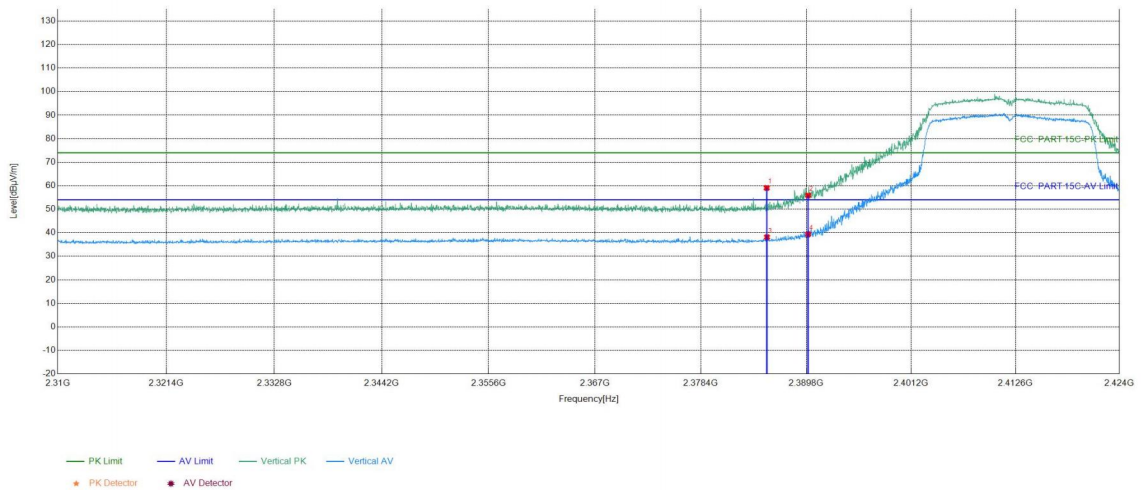

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2385.51	15.80	43.24	59.04	74.00	14.96	PASS	Vertical	PK
2	2390	15.96	39.91	55.87	74.00	18.13	PASS	Vertical	PK
3	2385.54	15.80	22.33	38.13	54.00	15.87	PASS	Vertical	AV
4	2390	15.96	23.43	39.39	54.00	14.61	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

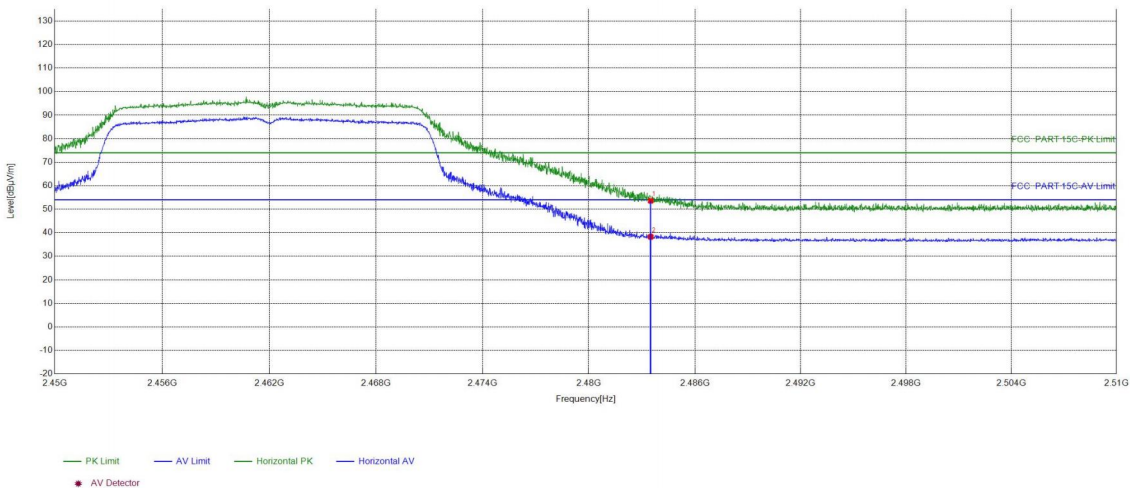

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.30	53.59	74.00	20.41	PASS	Horizontal	PK
2	2483.5	16.29	21.96	38.25	54.00	15.75	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

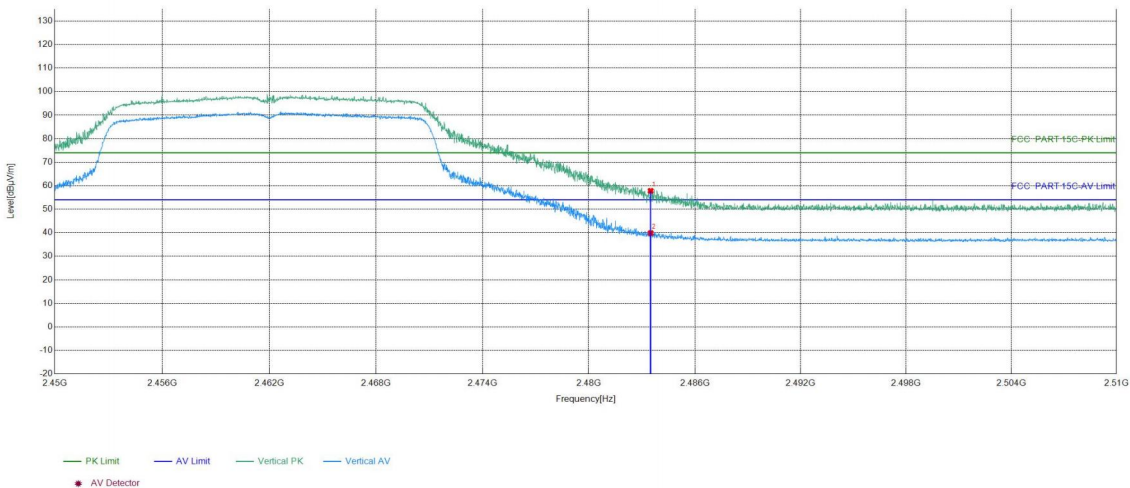

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	41.53	57.82	74.00	16.18	PASS	Vertical	PK
2	2483.5	16.29	23.58	39.87	54.00	14.13	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

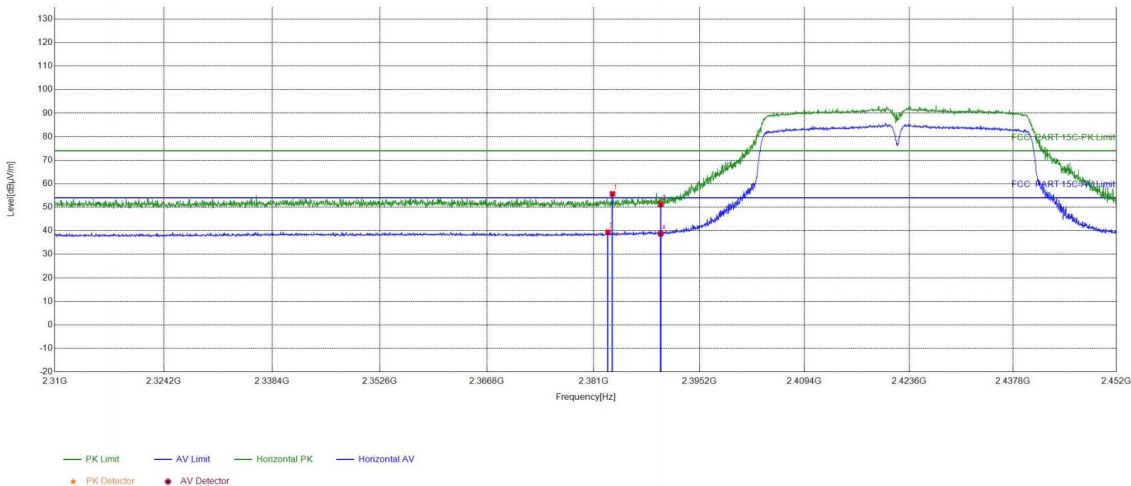

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2383.53	15.73	39.97	55.70	74.00	18.30	PASS	Horizontal	PK
2	2390	15.96	35.23	51.19	74.00	22.81	PASS	Horizontal	PK
3	2382.93	15.71	23.69	39.40	54.00	14.60	PASS	Horizontal	AV
4	2390	15.96	22.82	38.78	54.00	15.22	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

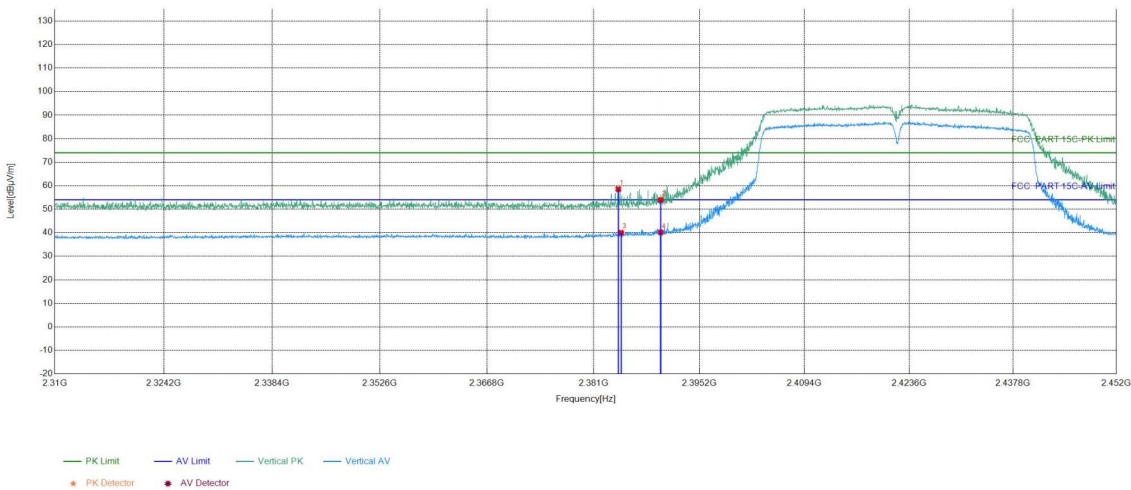

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2384.32	15.75	42.79	58.54	74.00	15.46	PASS	Vertical	PK
2	2390	15.96	37.97	53.93	74.00	20.07	PASS	Vertical	PK
3	2384.67	15.76	24.29	40.05	54.00	13.95	PASS	Vertical	AV
4	2390	15.96	24.20	40.16	54.00	13.84	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

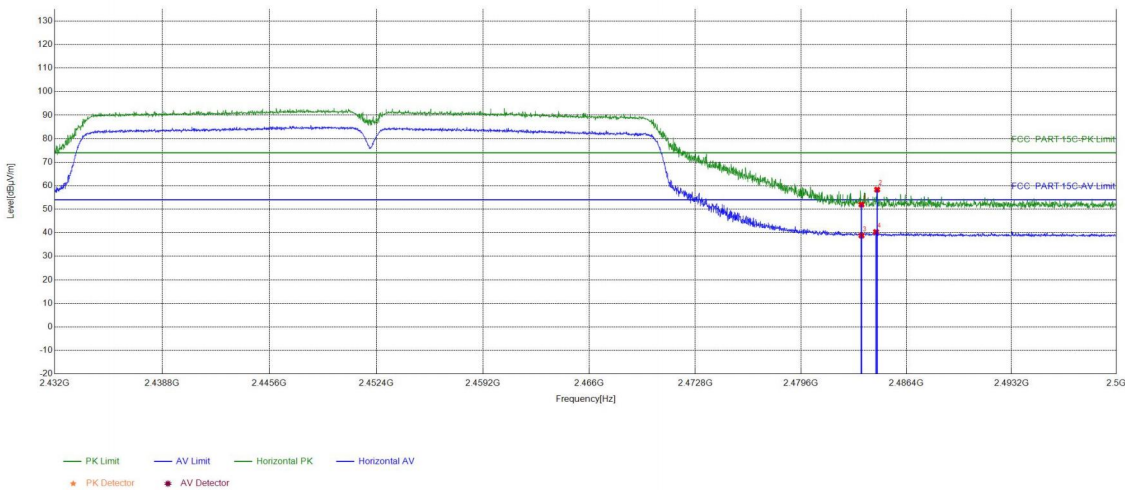

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.68	51.97	74.00	22.03	PASS	Horizontal	PK
2	2484.50	16.27	42.06	58.33	74.00	15.67	PASS	Horizontal	PK
3	2483.5	16.29	22.51	38.80	54.00	15.20	PASS	Horizontal	AV
4	2484.44	16.27	24.07	40.34	54.00	13.66	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

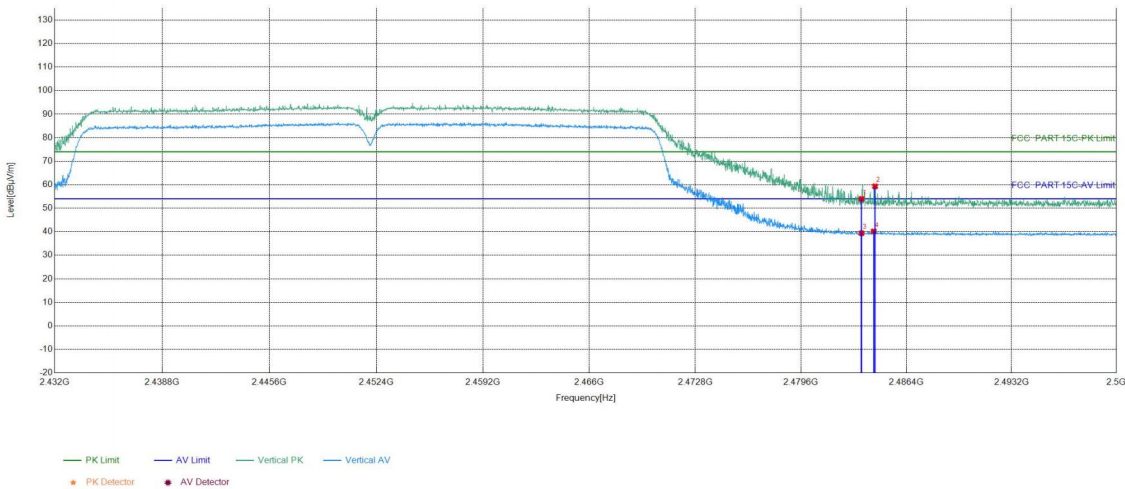

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.69	53.98	74.00	20.02	PASS	Vertical	PK
2	2484.37	16.27	43.03	59.30	74.00	14.70	PASS	Vertical	PK
3	2483.5	16.29	23.10	39.39	54.00	14.61	PASS	Vertical	AV
4	2484.28	16.27	23.90	40.17	54.00	13.83	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

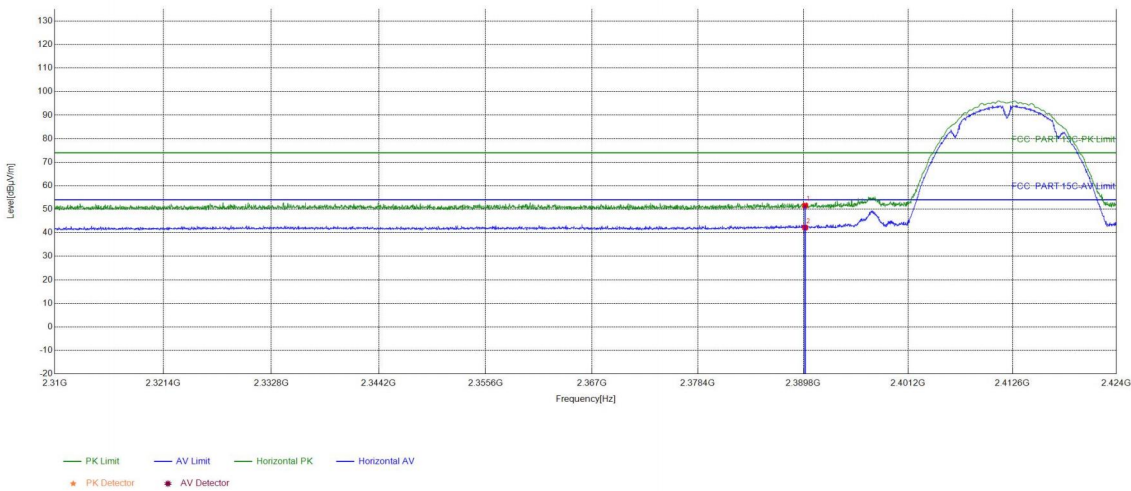

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.61	51.57	74.00	22.43	PASS	Horizontal	PK
2	2390	15.96	26.23	42.19	54.00	11.81	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

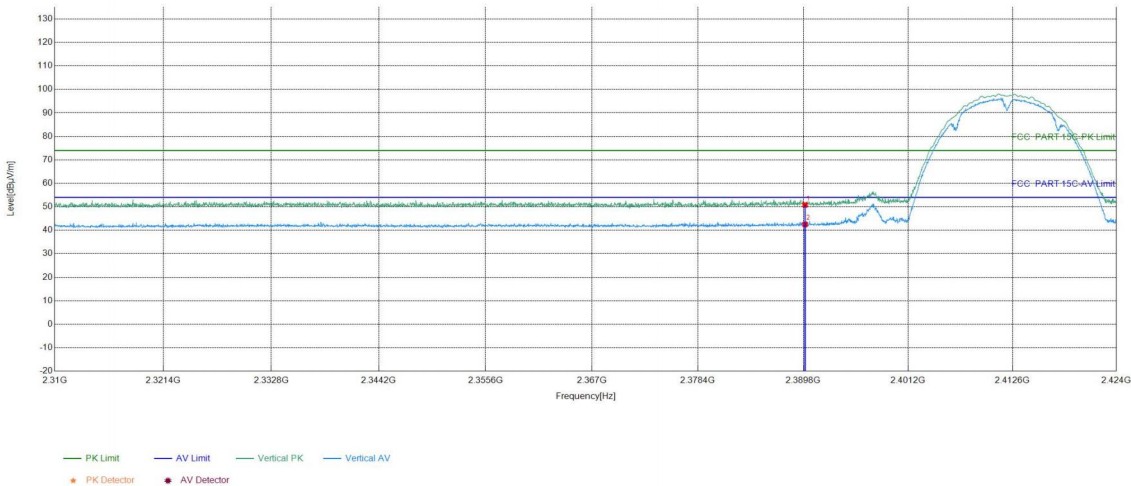

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.84	50.80	74.00	23.20	PASS	Vertical	PK
2	2390	15.96	26.54	42.50	54.00	11.50	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

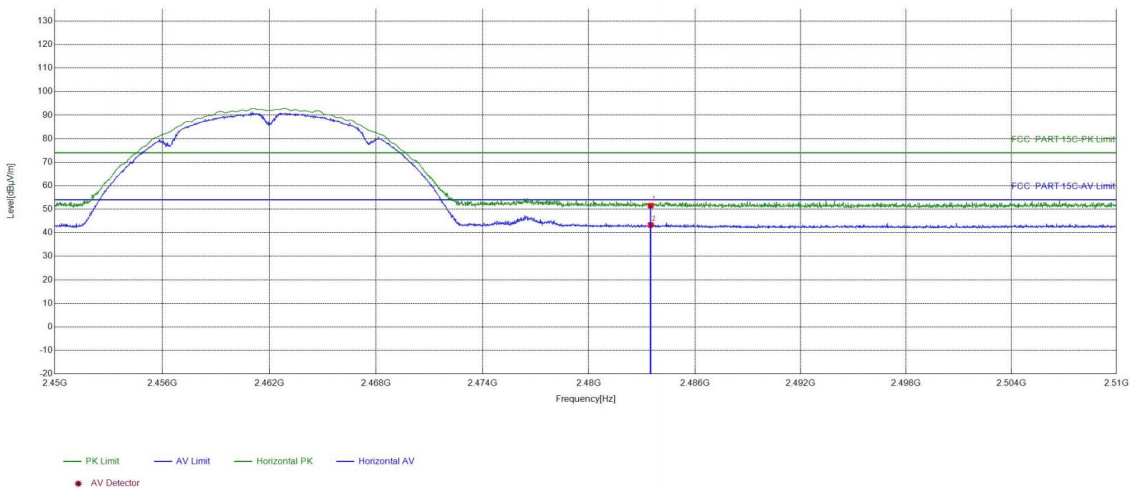

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.25	51.54	74.00	22.46	PASS	Horizontal	PK
2	2483.5	16.29	27.03	43.32	54.00	10.68	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

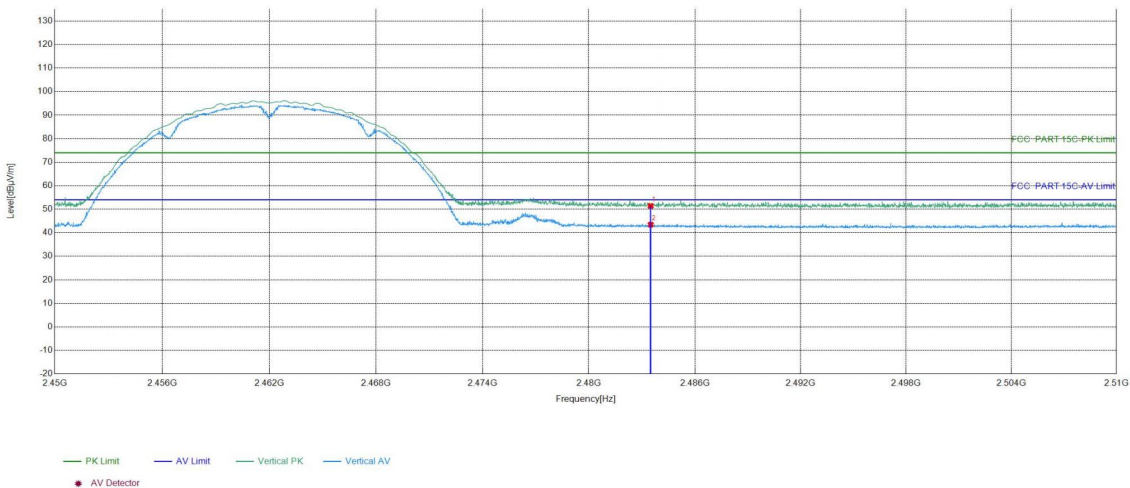

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.11	51.40	74.00	22.60	PASS	Vertical	PK
2	2483.5	16.29	27.14	43.43	54.00	10.57	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

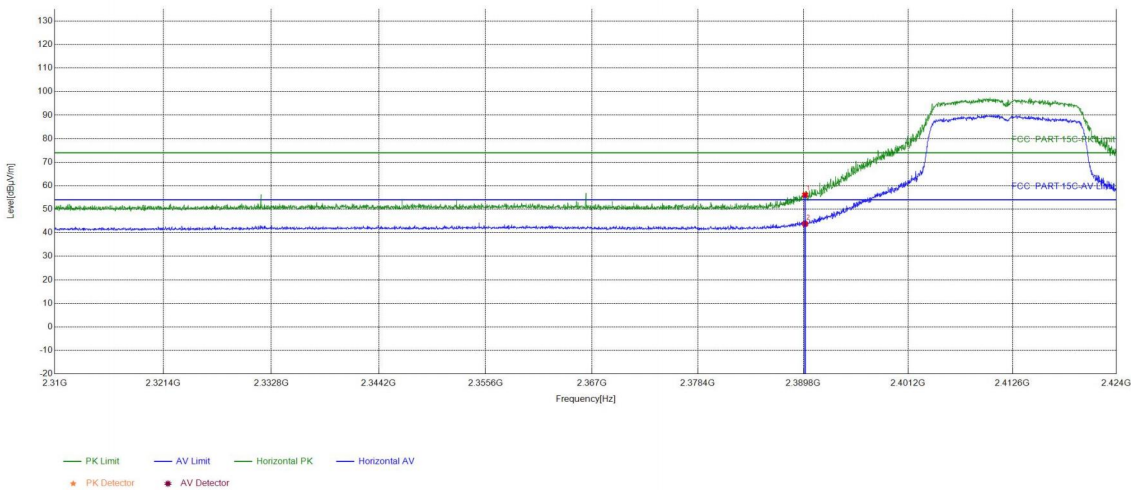

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.12	56.08	74.00	17.92	PASS	Horizontal	PK
2	2390	15.96	27.80	43.76	54.00	10.24	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

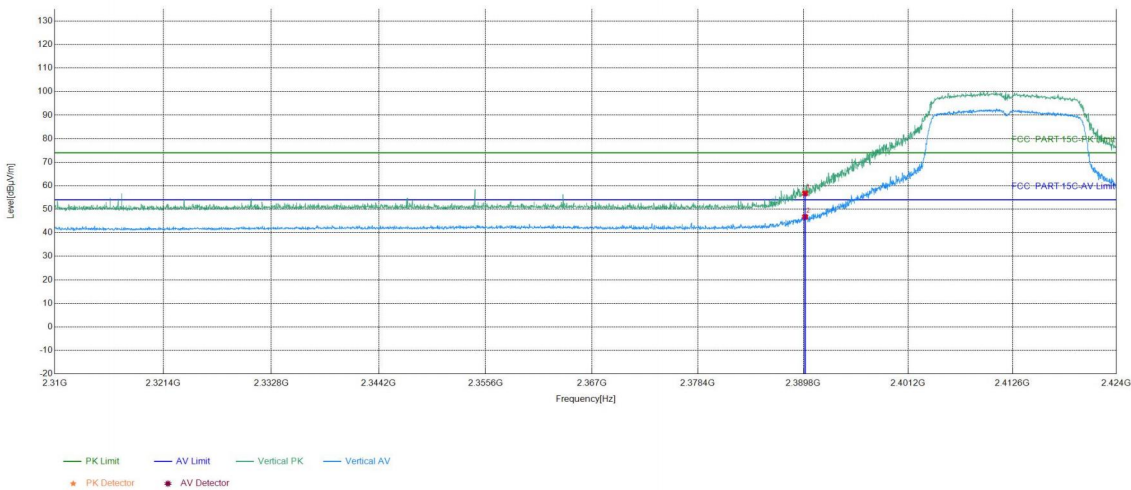

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.76	56.72	74.00	17.28	PASS	Vertical	PK
2	2390	15.96	30.79	46.75	54.00	7.25	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

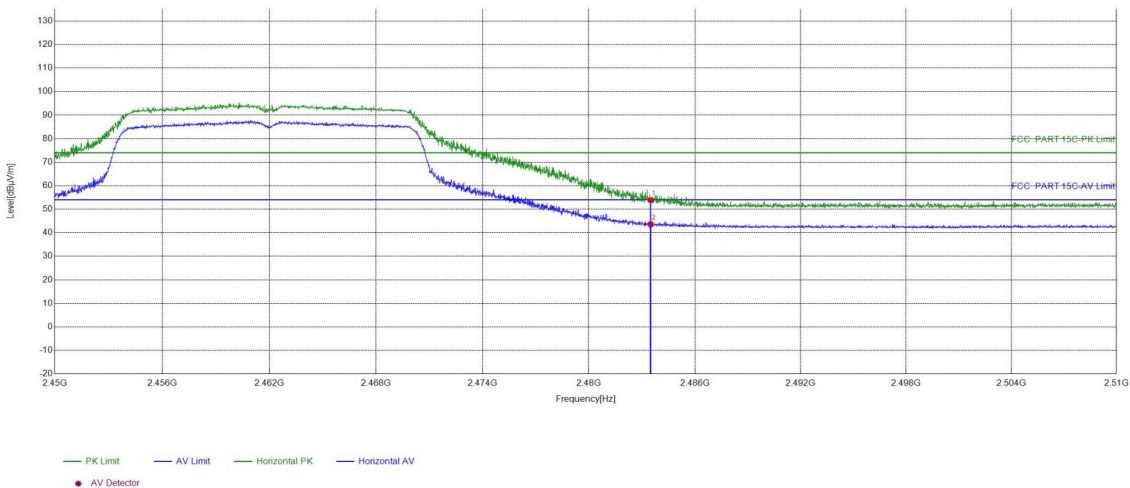

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.64	53.93	74.00	20.07	PASS	Horizontal	PK
2	2483.5	16.29	27.33	43.62	54.00	10.38	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

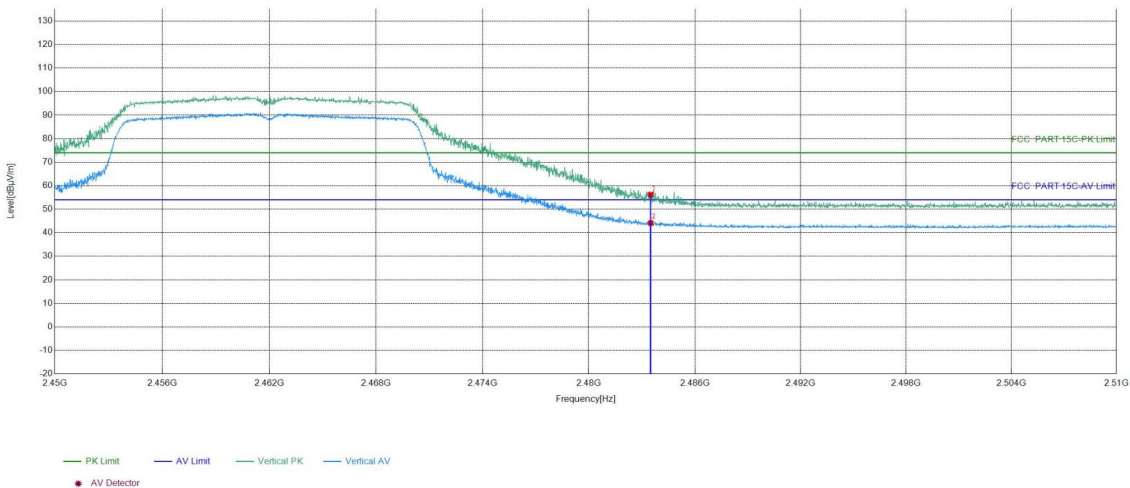

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.95	56.24	74.00	17.76	PASS	Vertical	PK
2	2483.5	16.29	27.84	44.13	54.00	9.87	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

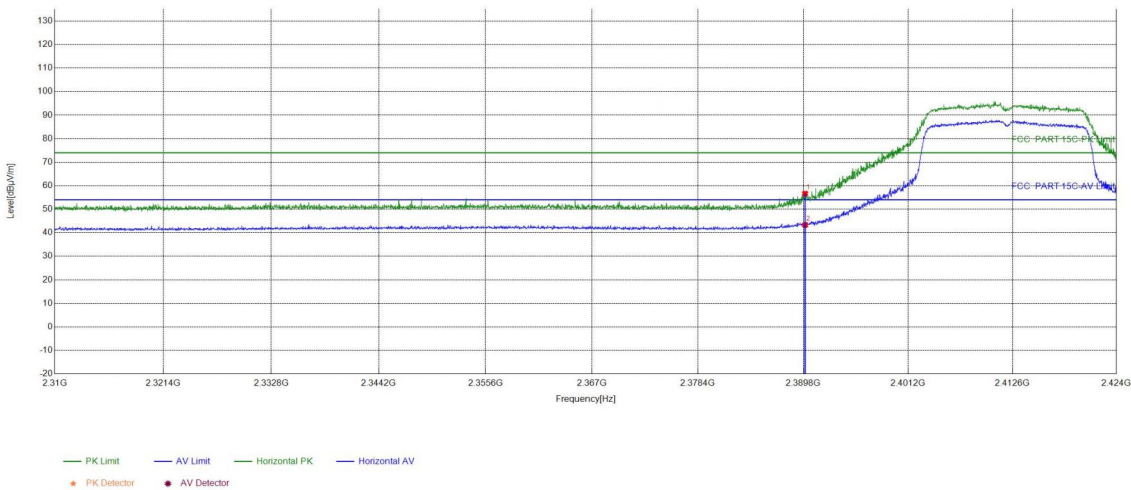

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.68	56.64	74.00	17.36	PASS	Horizontal	PK
2	2390	15.96	27.37	43.33	54.00	10.67	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

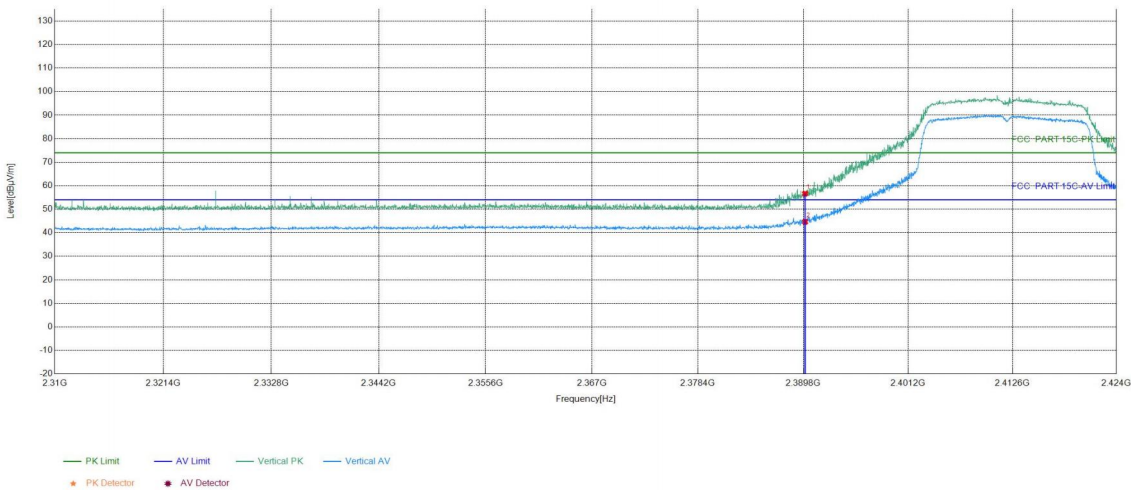

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.67	56.63	74.00	17.37	PASS	Vertical	PK
2	2390	15.96	28.68	44.64	54.00	9.36	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

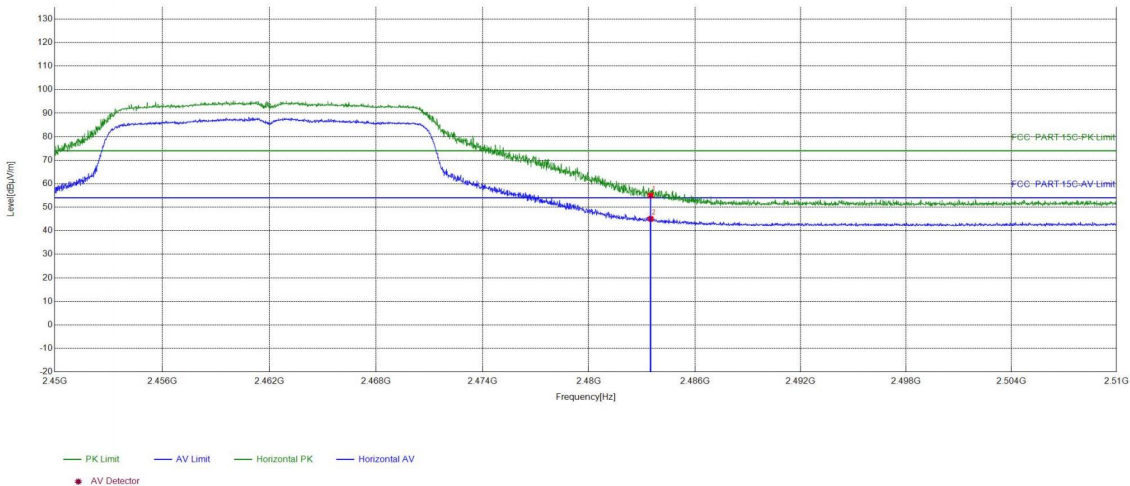

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.72	55.01	74.00	18.99	PASS	Horizontal	PK
2	2483.5	16.29	28.77	45.06	54.00	8.94	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

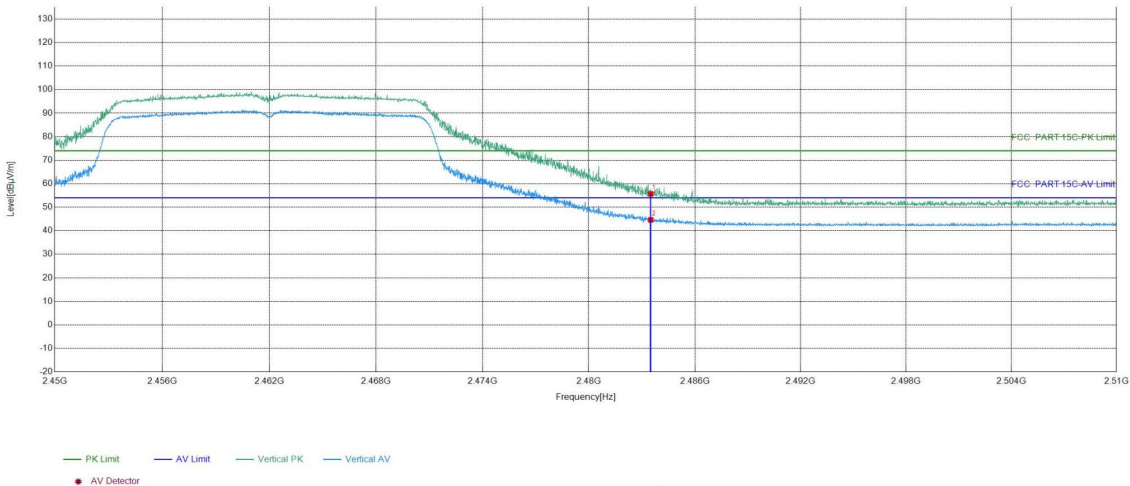

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.37	55.66	74.00	18.34	PASS	Vertical	PK
2	2483.5	16.29	28.34	44.63	54.00	9.37	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

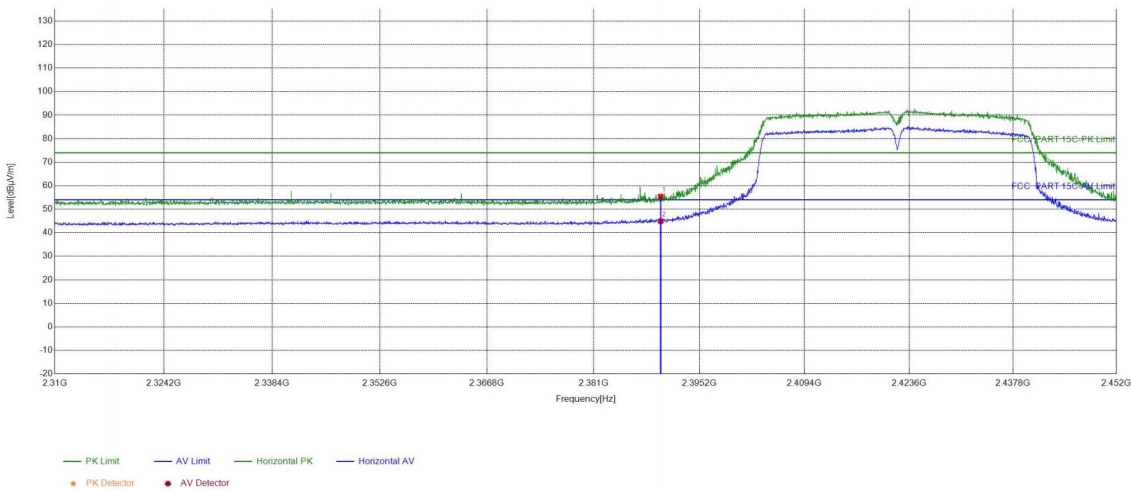

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.45	55.41	74.00	18.59	PASS	Horizontal	PK
2	2390	15.96	29.00	44.96	54.00	9.04	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

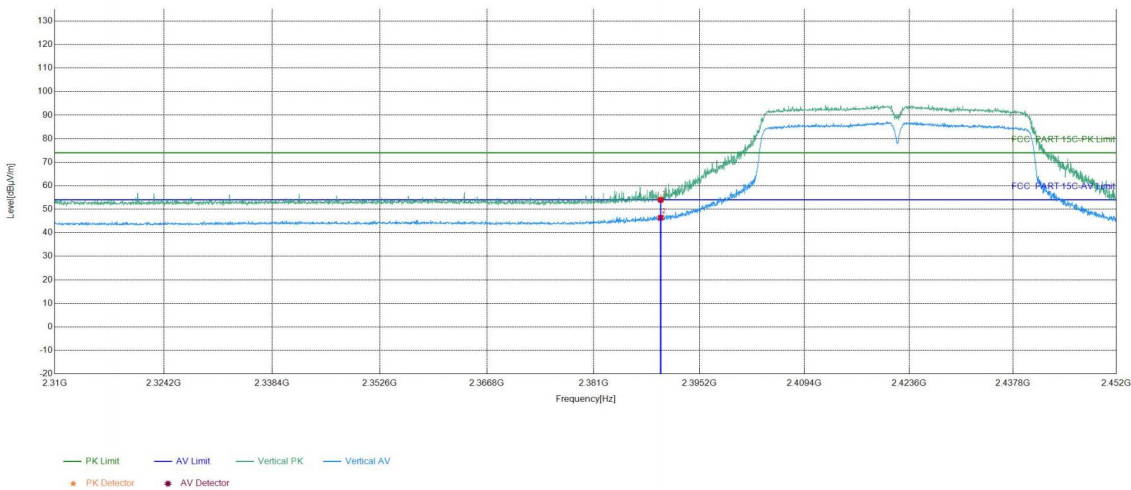

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	38.00	53.96	74.00	20.04	PASS	Vertical	PK
2	2390	15.96	30.46	46.42	54.00	7.58	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		


Test Graph

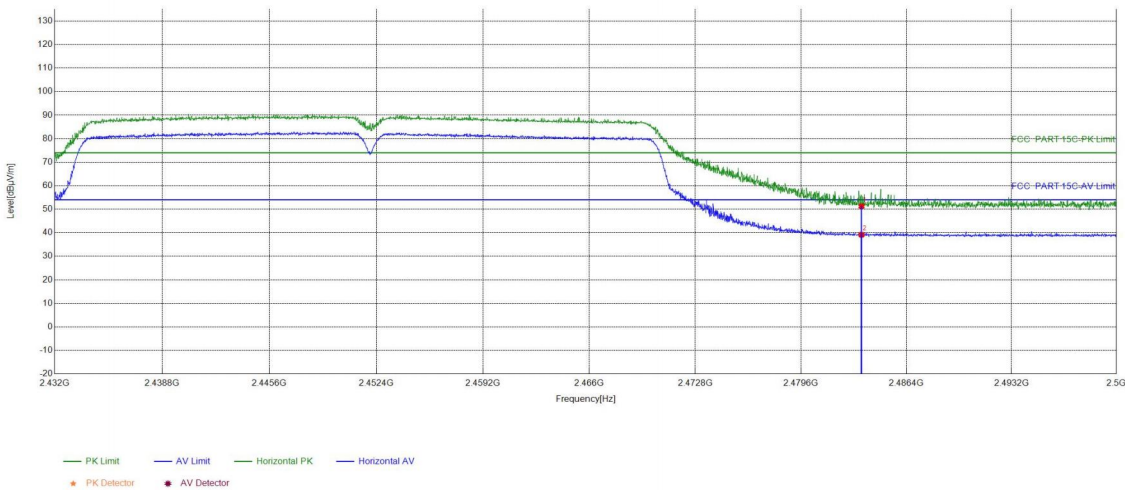

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.99	51.28	74.00	22.72	PASS	Horizontal	PK
2	2483.5	16.29	22.86	39.15	54.00	14.85	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	
Remark	A-350FKD-24P-B0		

Test Graph

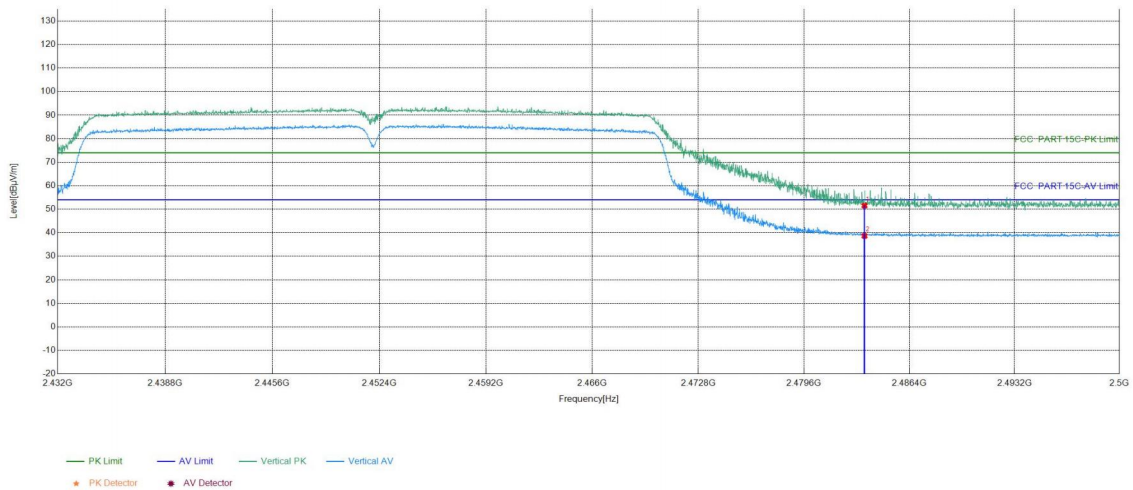

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.23	51.52	74.00	22.48	PASS	Vertical	PK
2	2483.5	16.29	22.36	38.65	54.00	15.35	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32R80954901

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***