



REDRAGON

DRACARYS PRO


3-MODE 100 KEYS ALUMINUM
ALLOY GASKET MECHANICAL KEYBOARD



Please scan here to
download user manual



Gaming Keyboard User Manual

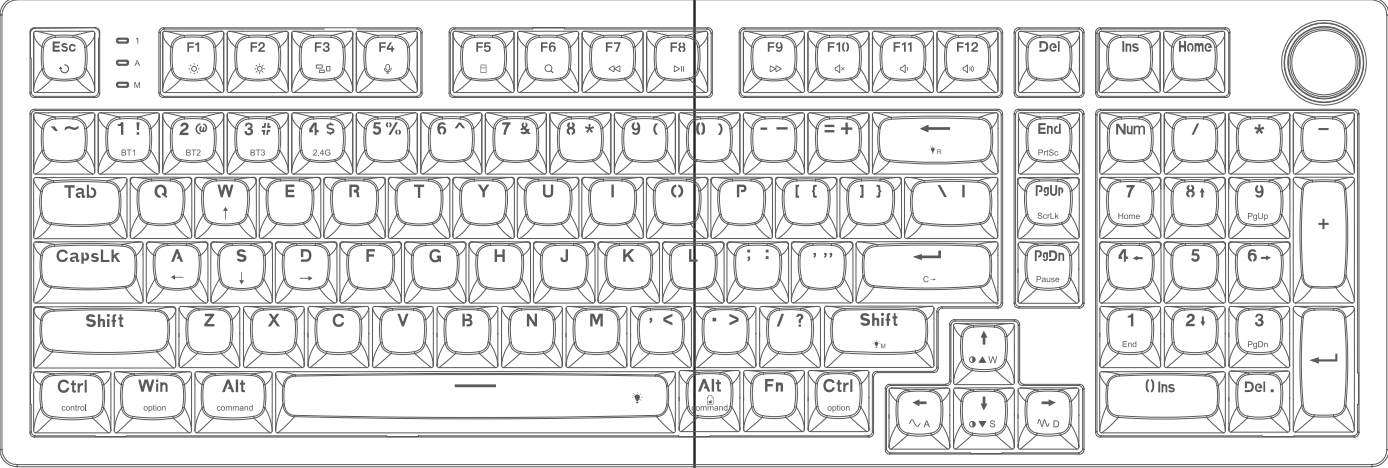

US UK

Dear user

Thank you for you choosing REDRAGON Brand, to protect your rights and for better customer service, we ask that you note our warranty rules.


1. Within guaranty period, repair is guaranteed for failure due to electrical circuit problems. Man-made damages, such as disassembly, hard impacts, submersion into water, plugging into improper current or voltage, and damage caused by natural disasters such as fire, flood, or earthquake are not included.

2. Consumable parts (such as foot stick) and spare parts replacement are no included in our warranty.

O.S. Support

WinXP/Vista/Win7/Win8/Win10/Win11/Mac.

How to connect the keyboard with multiple devices

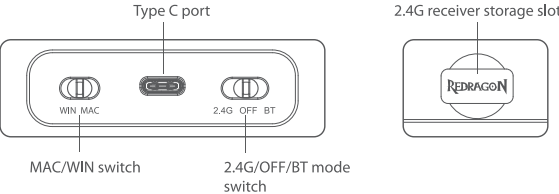

Wired Connection

[2.4G/OFF/BT] switch on "OFF", connect the keyboard to the computer with USB cable, the computer will recognize and configure the keyboard automatically.

2.4G Wireless Connection

1. [2.4G/OFF/BT] switch on "2.4G",

2. Press and hold [FN]+[4\$] for 3 seconds, the  flash in Yellow, plug the USB receiver into computer USB port, after paired the indicator will turn to steady on.

BT Connection

1. [2.4G/OFF/BT] switch on "BT",

2. Press [FN]+[1]/2@[3#] for 3s to select corresponding BT channels, the  flash quickly in blue[1]/cyan[2]/pink[3], turn on BT function and searching for available devices, It will find "BT3.0 Keyboard/BT5.0 Keyboard" device names. Select the BT name to pair, after pairing the indicator will turn to steady on.

Product Features
Backlight

1. Press [FN] + [SHIFT_R] to cyclic switch default 15 backlight patterns.
2. Press [FN] + [SPACE] to turn ON/OFF backlight.
3. Press [FN] + [ENTER] to switch the backlight color (available on limited light patterns).
4. Press [FN] + [↑ / ↓] to adjust backlight brightness, total 5 levels.
- Press [FN] + [←/→]to adjust light rotating speed, total 5 levels.
5. Backlight DIY: Press [FN] + [BACKSPACE] to enter DIY mode, [ESC] [A] [S] [D] [W] [↑] [↓] [←] [→] lights on by default, Press [FN] + [BACKSPACE] again to start recording, [1][CAPS] key will flash till the recording completed, Continuously press the key(except [1][CAPS]) to select the color you want to set, once key light color setting are completed, press [FN] + [BACKSPACE] to save.

[WIN] lock

Press [FN] + [WIN] to lock [WIN] key, repeat to unlock.

Commands of key combinations with [FN] key

WINDOWS O.S.	
FN+F1: Screen brightness -	FN+F8: Play/Pause
FN+F2: Screen brightness +	FN+F9: Next track
FN+F3: Multiple windows	FN+F10: Mute
FN+F4: Speech recognition (O.S.Win10 or later)	FN+F11: Volume -
FN+F5: Show desktop	FN+F12: Volume +
FN+F6: Search	FN+[PgUp]:ScrLK
FN+F7: Pre track	FN+[PgDn]:Pause
	FN+[End]:PrtSc

MAC O.S,		
F1: Screen brightness -/ FN+F1=F1	F7: Pre track / FN+F7=F7	
F2: Screen brightness +/ FN+F2=F2	F8: Play/Pause / FN+F8=F8	
F3: Multiple task / FN+F3=F3	F9: Next track / FN+F9=F9	
F4: Siri / FN+F4=F4	F10: Mute / FN+F10=F10	
F5: Show desktop / FN+F5=F5	F11: Volume - / FN+F11=F11	
F6: Search /FN+F6=F6	F12:Volume + / FN+F12=F12	

Restore factory settings

Press and hold [FN] + [ESC] for 3 seconds.

Knob

The default volume control function is clockwise. Turning clockwise increases the volume, and turning counterclockwise decreases the volume. Press the knob shortly mutes the volume, and press shortly again restores the original volume.

Press and hold the knob for 3 seconds, and the keyboard light flashes twice. The knob function then switches to adjusting the keyboard backlight brightness. Turning clockwise increases the backlight brightness, and turning counterclockwise decreases it.

When adjusted to the upper limit,  flashes three times. Press the knob shortly to cyclic switch default 15 backlight patterns. Press and hold the knob for 2 seconds again, and the keyboard light flashes twice. The knob function then returns to the volume adjustment function.

Power save mode & How to recharge

On wireless/BT connection mode, when keyboard without any operation over 3 minutes, the keyboard backlight will turn off to save the battery, when keyboard without any operation over 30 minutes, the keyboard will enter power save mode, press any key to wake up.

If the keyboard is connected to a computer or a charging adapter when it's on 2.4G wireless / BT connection, the keyboard will be in the charging state. While charging, the  light in Red. When fully charged, the  turn to Green.

Battery power indicator

Press and hold the [FN] + [ALT-R] to show the battery level, the backlight will only light on [1-0] keys to indicating current battery level, When the battery is low, the buttons [1!]-[3#] will display red. When the battery is above [3#], the buttons [1!]-[0] will display green. Release to back to current light mode.

Warning: Charging Input: 5V==2A max

FAQ

1. If the keyboard doesn't respond, please check if the keyboards USB cable is correctly inserted into the corresponding USB port on the computer, or try another USB port on the computer.
2. If you spill liquid on the keyboard, please unplug the keyboards USB cable from the computer immediately. Wipe off excess liquid and put the keyboard in a dry and ventilated place. Make sure the keyboard is dried naturally before the next use.



BATTERY SAFETY GUIDELINES

DO NOT replace the battery with a different model.

DO NOT use this product if the battery shows signs of damage including, but not limited to tearing, deformation, leakage, or the smell of electrolytic material.

DO NOT touch the battery if material is leaking and seek immediate medical attention if any material comes into contact with your skin or eyes.

DO NOT expose the battery to liquid, heat sources, electricity (outside of the product itself), or other non-standard operating condition.

DO NOT remove the battery except for proper disposal and recycling as required by local laws and regulations.

DO NOT impact, bend, alter, dissemble, or otherwise damage the battery as the contents are volatile, hazardous, and can be harmful.



CAUTION:

Failing to follow all safety guidelines may result product damage, explosion, fire, and/or electric shock.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes : (1) Cet appareil ne doit pas causer d'interférences. (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

型号	HL-K756GBY-RGB-PRO/7625		备注：尺寸：100x100mm(折页) 材质：80g书写纸 印刷：单黑色双面印刷				EasternTimes Tech ET
名称	说明书						
日期	2025-9-30						
页码	1 OF 1		文件编号				
绘图	邓子松	审核	香敏琪	核准		版本	A.0