Quick installation guide

I. Introduction

Thank you for purchasing the NanoLynx- wireless-N network adapter from Nexxt Solutions®. This quick installation guide will lead you through the basic setup process of the device to ensure its fast and seamless integration into your network.

Package content

- Wireless-N mini-USB network adapter
- One CD ROM (with a digital copy of the quick installation guide, and driver configuration tool)

II. Initial setup

1. Insert the wireless USB adapter into an available USB port on your computer.

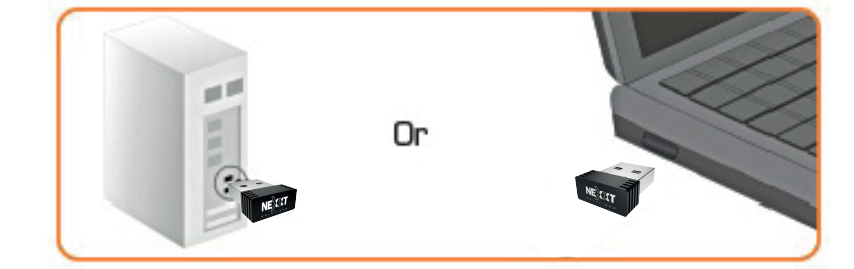

2. If the **Found New Hardware Wizard.** system dialogue appears, select **Cancel** and use the included setup wizard software CD for fast installation period.



Welcome to the Found New Hardware Wizard

Windows will search for current and updated software by looking on your computer, on the hardware installation CD, or on the Windows Update Web site (with your permission).

Read our privacy policy

Can Windows connect to Windows Update to search for software?

○ Yes, this time only
○ Yes, now and every time I connect a device
○ No, not this time

Click Next to continue.

3. Insert the supplied software CD into the CD drive of your computer. Select your Operating System and double-click **Setup.exe** in the software CD to manually install it.



4. The **Welcome** screen will be displayed (as shown below) as soon as the system detects the adapter. Click on **I accept the terms of the license agreement,** followed by **Next** to continue.

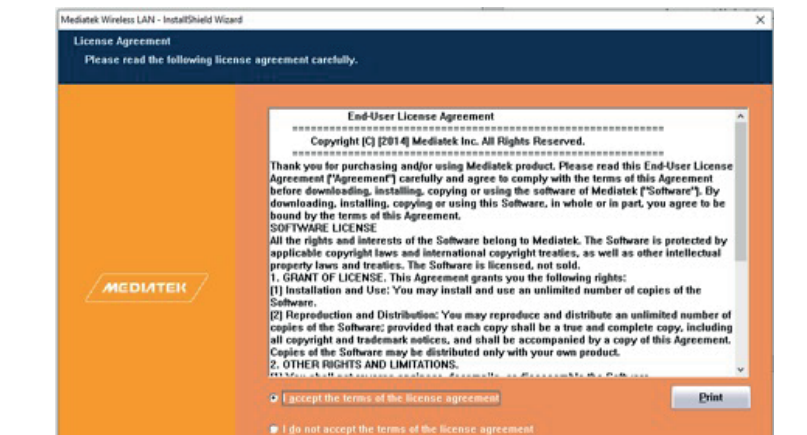
Mediatek Wireless LAN - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
MEDIATEK

End-User License Agreement

Copyright (C) [2014] Mediatek Inc. All Rights Reserved.

Thank you for purchasing and/or using Mediatek product. Please read this End-User License Agreement ("Agreement") carefully and agree to comply with the terms of this Agreement before downloading, installing, copying or using the software of Mediatek ("Software"). By downloading, installing, copying or using this Software, in whole or in part, you agree to be bound by the terms of this Agreement.

SOFTWARE LICENSE

All the rights and interests of the Software belong to Mediatek. The Software is protected by applicable copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The Software is licensed, not sold.

1. GRANT OF LICENSE. This Agreement grants you the following rights:

(1) Installation and Use: You may install and use an unlimited number of copies of the Software.

(2) Reproduction and Distribution: You may reproduce and distribute an unlimited number of copies of the Software; provided that each copy shall be a true and complete copy, including all copyright and trademark notices, and shall be accompanied by a copy of this Agreement. Copies of the Software may be distributed only with your own product.

2. OTHER RIGHTS AND LIMITATIONS.

● I accept the terms of the license agreement
○ I do not accept the terms of the license agreement

5. After selecting **Install driver and WLAN Utility** in this stage, click on **Next** to continue.

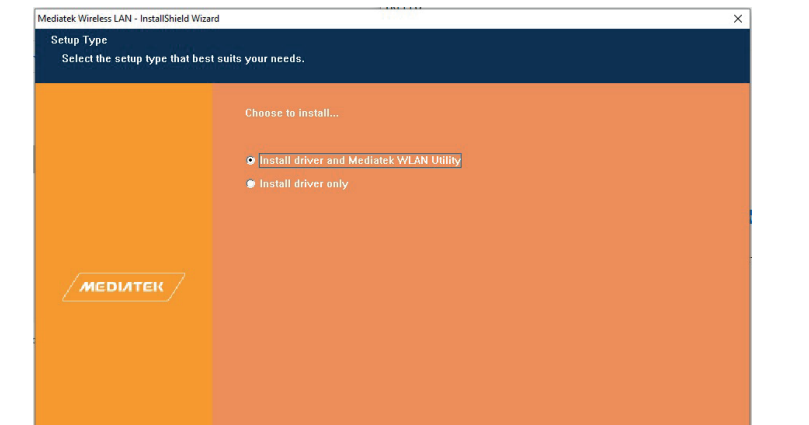
Mediatek Wireless LAN - InstallShield Wizard
Setup Type
Select the setup type that best suits your needs.
MEDIATEK

Choose to install...

● Install driver and Mediatek WLAN Utility
○ Install driver only

InstallShield
< Back
Next >
Cancel

6. Now the installation window will be displayed. To begin the driver installation click on the **Install** button below.

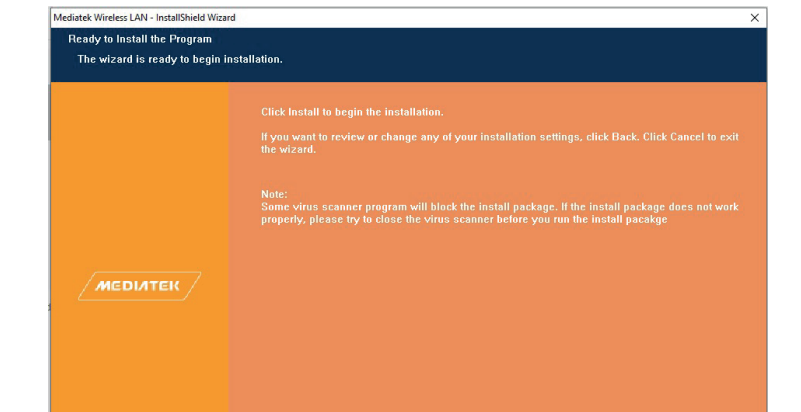
Mediatek Wireless LAN - InstallShield Wizard
Ready to Install the Program
The wizard is ready to begin installation.
MEDIATEK

Click Install to begin the installation.

If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.

Note:
Some virus scanner program will block the install package. If the install package does not work properly, please try to close the virus scanner before you run the install pacakge

InstallShield
< Back
Install
Cancel

7. The status bar will show the progress of the driver installation process. Please allow a few minutes for the installation to conclude.

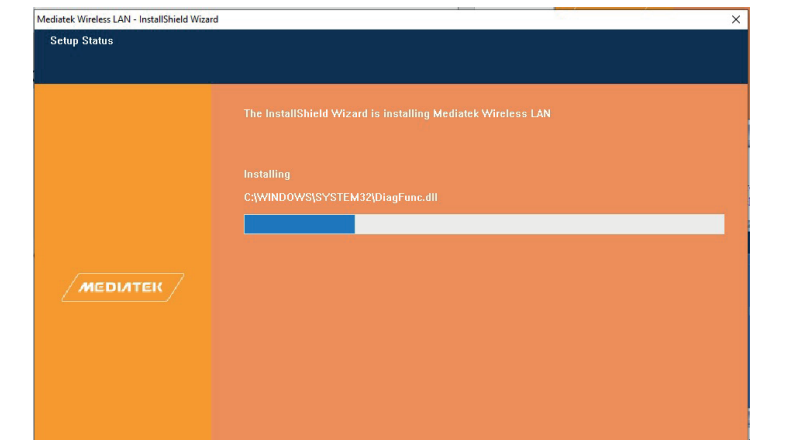

The InstallShield Wizard is installing Mediatek Wireless LAN

Installing
C:\WINDOWS\SYSTEM32\DiagFunc.dll

8. Click **Finish** to complete the installation.

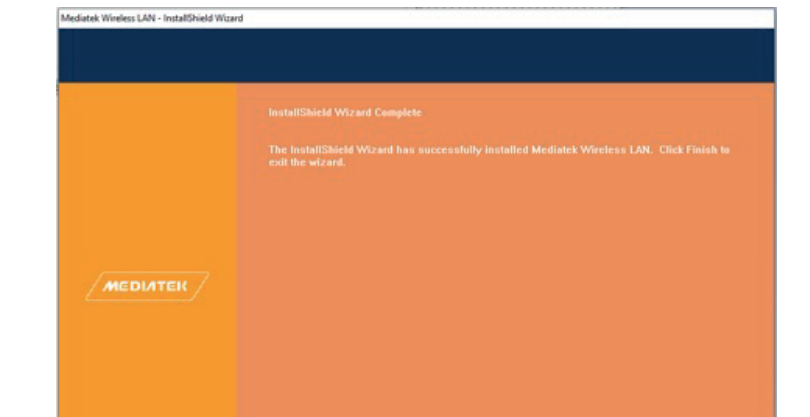

InstallShield Wizard Complete

The InstallShield Wizard has successfully installed Mediatek Wireless LAN. Click Finish to exit the wizard.

III. Wireless network configuration in Windows 10

1. Click the wireless connection icon in the lower right corner of the computer desktop to view the available networks.

2. Select the wireless network you wish to connect to.



3. If the wireless network you are connecting to is encrypted, you will be prompted to enter a password. Click **Next** once you have typed the correct security key.

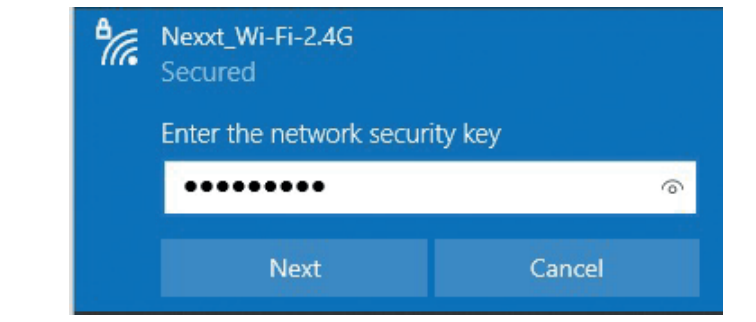

4. Once the connection has been established successfully, the **Connected** message will be displayed.



5. From then on, you will be able to start enjoying wireless access to the internet.

6. You can disconnect the network, view its status, or modify the wireless network properties simply by right-clicking on the wireless network icon

FCC statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

FCC ID: X4YNLNX150P

NEXXT Solutions® is a registered trademark. All rights reserved. All other brand names and trademarks are the property of their respective owners. Made in China.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
RF Exposure Information
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

NEXXT® SOLUTIONS CONNECTIVITY

150Mbps WIRELESS SPEEDS

5 YEAR* WARRANTY
*Must register at: nexxtsolutions.com/warranty

NanoLynx

WIRELESS-N | MINI-USB 2.0 ADAPTER

Model: **NCU-L150**

Guía de instalación rápida

I. Introduction

Gracias por adquirir el adaptador de red inalámbrico-N **NanoLynx** de Nexxt Solutions®. La presente guía de instalación rápida lo orientará durante el proceso básico de configuración, con el objeto de garantizar la integración rápida y fluida de este dispositivo en la red.

Contenido del empaque

- Miniadaptador USB inalámbrico-N
- CD ROM (con copia digital de la guía de instalación rápida y la herramienta de configuración del controlador)

II. Configuración inicial

1. Inserte el adaptador inalámbrico USB en un puerto disponible de su computador

2. Si aparece el cuadro de diálogo **Found New Hardware Wizard** (Asistente para detectar nuevo dispositivo), seleccione **Cancel** (Cancelar) y utilice el asistente de instalación incluido en el CD para una configuración más rápida.



Welcome to the Found New Hardware Wizard

Windows will search for current and updated software by looking on your computer, on the hardware installation CD, or on the Windows Update Web site (with your permission).

Read our privacy policy

Can Windows connect to Windows Update to search for software?

○ Yes, this time only
○ Yes, now and every time I connect a device
○ No, not this time

Click Next to continue.

3. Inserte el CD de instalación en la unidad lectora de su computador. Seleccione el Sistema operativo y pulse **Setup.exe** dos veces sobre el CD del software para instalarlo manualmente.



4. La pantalla de **Bienvenida** aparece desplegada (como se muestra en la ilustración) una vez que el sistema detecta el adaptador. Proceda a aceptar los términos de la licencia en **I accept the terms of the license agreement.** Haga clic en **Next** para continuar.

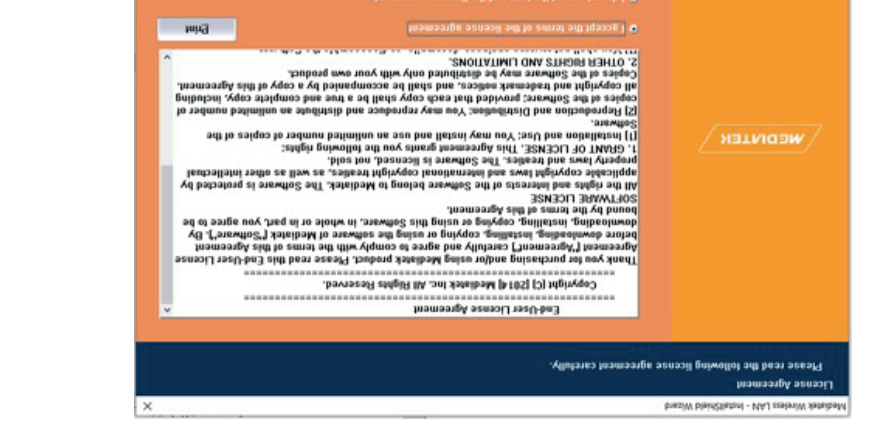
Mediatek Wireless LAN - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
MEDIATEK

End-User License Agreement

Copyright (C) [2014] Mediatek Inc. All Rights Reserved.

Thank you for purchasing and/or using Mediatek product. Please read this End-User License Agreement ("Agreement") carefully and agree to comply with the terms of this Agreement before downloading, installing, copying or using the software of Mediatek ("Software"). By downloading, installing, copying or using this Software, in whole or in part, you agree to be bound by the terms of this Agreement.

SOFTWARE LICENSE

All the rights and interests of the Software belong to Mediatek. The Software is protected by applicable copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The Software is licensed, not sold.

1. GRANT OF LICENSE. This Agreement grants you the following rights:

(1) Installation and Use: You may install and use an unlimited number of copies of the Software.

(2) Reproduction and Distribution: You may reproduce and distribute an unlimited number of copies of the Software; provided that each copy shall be a true and complete copy, including all copyright and trademark notices, and shall be accompanied by a copy of this Agreement. Copies of the Software may be distributed only with your own product.

2. OTHER RIGHTS AND LIMITATIONS.

● I accept the terms of the license agreement
○ I do not accept the terms of the license agreement

5. Después de seleccionar **Install driver and WLAN Utility** (Instalar controlador y la herramienta WLAN en esta etapa) haga clic en **Next** (Siguiente) para continuar.

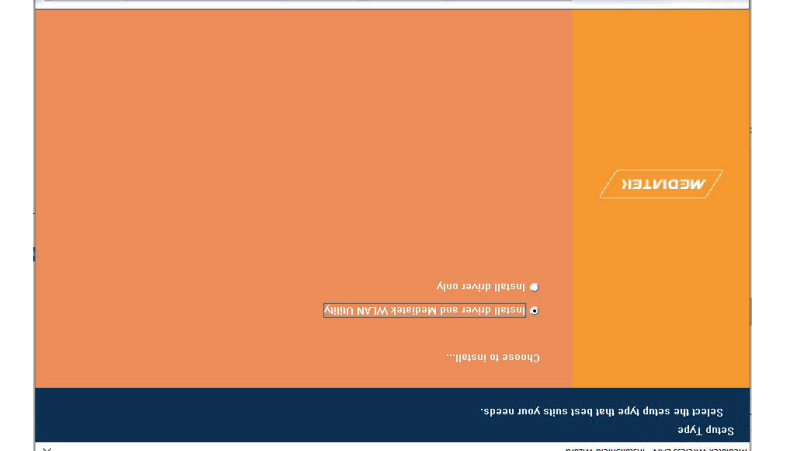
Mediatek Wireless LAN - InstallShield Wizard
Setup Type
Select the setup type that best suits your needs.
MEDIATEK

Choose to install...

● Install driver and Mediatek WLAN Utility
○ Install driver only

InstallShield
< Back
Next >
Cancel

6. Cuando aparezca desplegada la pantalla de instalación, haga clic en botón **Install** como se ilustra a continuación.

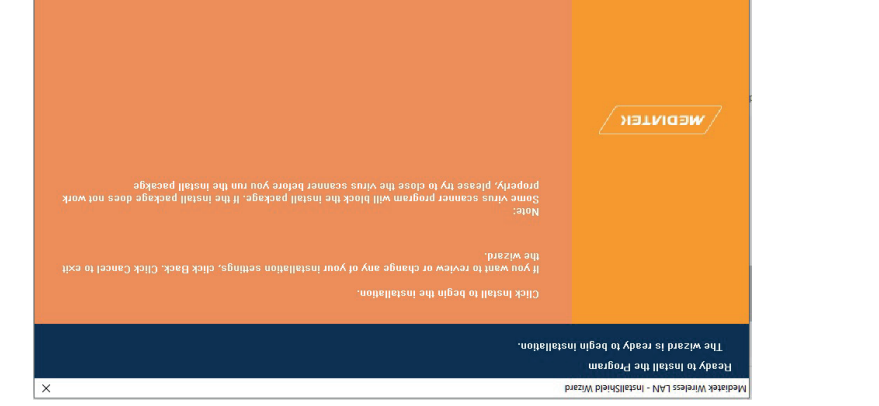
Mediatek Wireless LAN - InstallShield Wizard
Ready to Install the Program
The wizard is ready to begin installation.
MEDIATEK

Click Install to begin the installation.

If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.

Note:
Some virus scanner program will block the install package. If the install package does not work properly, please try to close the virus scanner before you run the install pacakge

InstallShield
< Back
Install
Cancel

7. La barra se despliega para exhibir el avance de la instalación del controlador. Debe esperar unos minutos hasta que concluya la instalación.

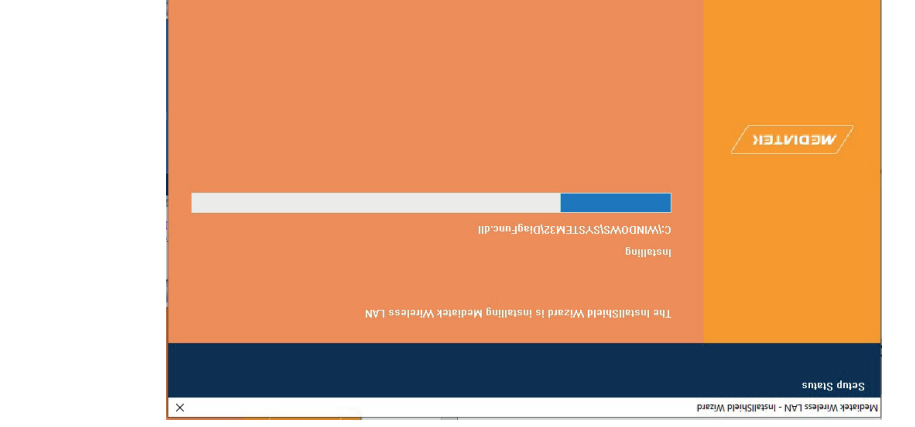

The InstallShield Wizard is installing Mediatek Wireless LAN

Installing
C:\WINDOWS\SYSTEM32\DiagFunc.dll

8. Seleccione **Finish** para finalizar el proceso de instalación.

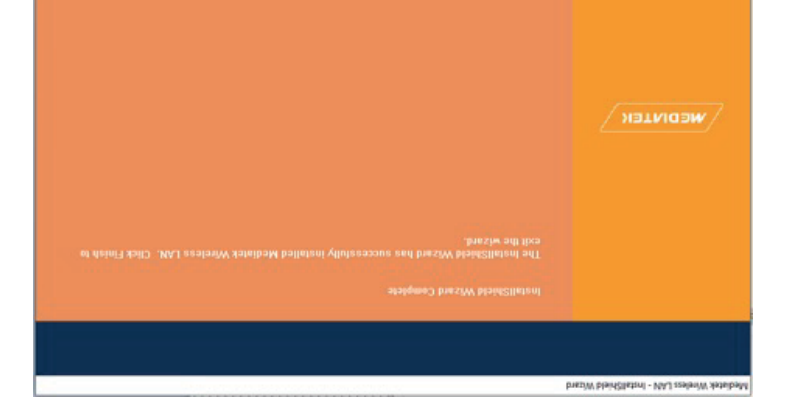

InstallShield Wizard Complete

The InstallShield Wizard has successfully installed Mediatek Wireless LAN. Click Finish to exit the wizard.

III. Configuración de una conexión a red inalámbrica en Windows 10

1. Haga clic sobre el ícono de conexión inalámbrica ubicado en el borde inferior derecho del escritorio de su computadora, con el objeto de visualizar las redes disponibles.

2. Escoja la red inalámbrica a la cual desea conectarse.



3. Si la red a la cual se conecta está protegida, el sistema le pedirá que ingrese una contraseña. Haga clic en **Siguiente** una vez ingresada la clave de seguridad correcta.

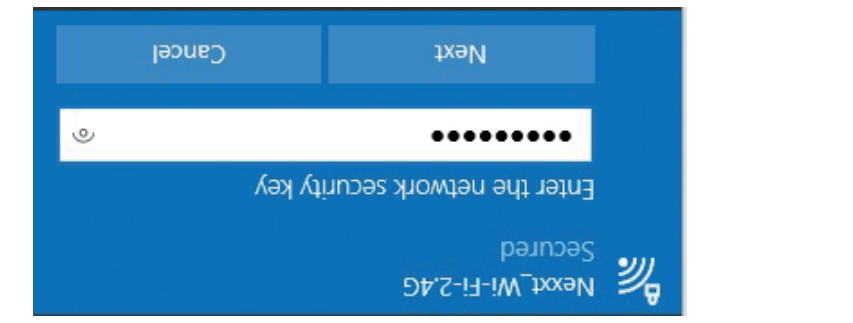

4. La ventana a continuación despliega el mensaje **Connected** (Conectado) una vez establecida la conexión a la red.

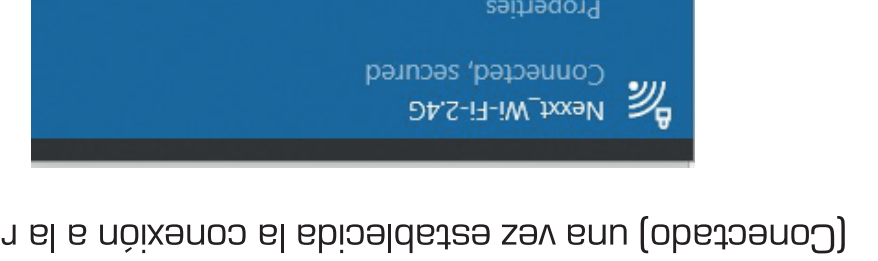

5. A partir de entonces, el usuario podrá comenzar a disfrutar del acceso inalámbrico para conectarse a internet.

6. Es posible desconectar, visualizar el estado funcional o modificar las propiedades de la red inalámbrica con tan sólo hacer clic derecho sobre el ícono que representa el dispositivo de red.

Declaración de la Comisión Federal de Telecomunicaciones

Tras haber sido sometido a todas las pruebas pertinentes, se ha comprobado que este equipo cumple con los límites establecidos para dispositivos digitales Clase B, conforme a la Sección 15 del Reglamento de la FCC. Tales límites definen los niveles máximos permisibles a las interferencias nocivas de la energía radioeléctrica en instalaciones residenciales. Puesto que el actual equipo genera, utiliza y puede radiar energía radioeléctrica, si no observa las instrucciones relativas a la instalación y operación del dispositivo, puede provocar interferencias nocivas a las comunicaciones por radio. Sin embargo, no es posible garantizar que no se producirá interferencia alguna en una instalación determinada.

Dado el caso de que el equipo interfiriera en la recepción de aparatos de radio o televisión, lo cual se puede determinar al apagar y volver a encender el dispositivo, le recomendamos al usuario que intente una o más de las siguientes medidas con el objeto de corregir la situación:

- Vuelva a orientar o cambie la ubicación de la antena receptora.
- Aumente la distancia que separa el equipo y el aparato receptor.
- Conecte el equipo en una toma de corriente situada en un circuito distinto al cual está enlazado el receptor.
- Solicite asistencia al distribuidor o a un técnico experimentado en radio o aparatos de TV.

FCC ID: X4YNLNX150P

NEXXT Solutions® es marca registrada. Todos los derechos reservados. Todas las demás marcas y nombres comerciales son propiedad de sus respectivos dueños. Fabricado en China.

NEXXT® SOLUTIONS CONNECTIVITY

150Mbps VELOCIDAD INALÁMABRICA

5 AÑOS* DE GARANTÍA
*Debe registrarse en línea en: nexxtsolutions.com/warranty

NanoLynx

MINIADAPTADOR | INALÁMBRICO-N USB 2.0

Model: **NCU-L150**