

Stage GoFree 2 User Manual

Dear customer,

Thank you for purchasing the outdoor Bluetooth speaker G170. To ensure correct operation, please read this user manual carefully before operation.

Important Safety Instructions

- ◆ Do not use the speaker in special cold and hot environments.
- ◆ Please avoid the speaker dropping or hitting with a hard object, it may cause other hardware damage.
- ◆ Take care when charging the speaker, excessive prolonged charging will damage the battery lifetime. Charge the speaker to full capacity when using for the first time.
- ◆ When battery low, the indicator light will flash and voice prompt "battery low", please charge speaker in time.
- ◆ If does not use this speaker for long time, please charge at least once within one month, in order to prevent the lithium battery from causing and damaging because of excessive consumption.
- ◆ Adjust the volume to appropriate level to avoid disturbing others.

Features

- **Bluetooth 6.0 stereo music and mobile hands-free function**

- **USB Flash Disk Music playing**

Support MP3 music format, capacity up to 32G

- **Voice guide**

The speaker will prompt the working mode and status for easy operation.

- **Support light show,with different light themes**

The speaker will indicate the battery level while charging

- **IPX7 Waterproof**

- **TWS Function**

Technical Data

Bluetooth Version: 6.0

Speaker Output: 20W

Voltage: DC 5V 2A

Driver: 44*80mm Woofer*1 + 36mm Tweeter*1 + passive radiator*2


Built-in Battery: 7.4V 2000mAh

Water Resistance: IPX7


Size: 70*70*194.3mm

Package Contents

Bluetooth Speaker, Type-C cable, User Manual

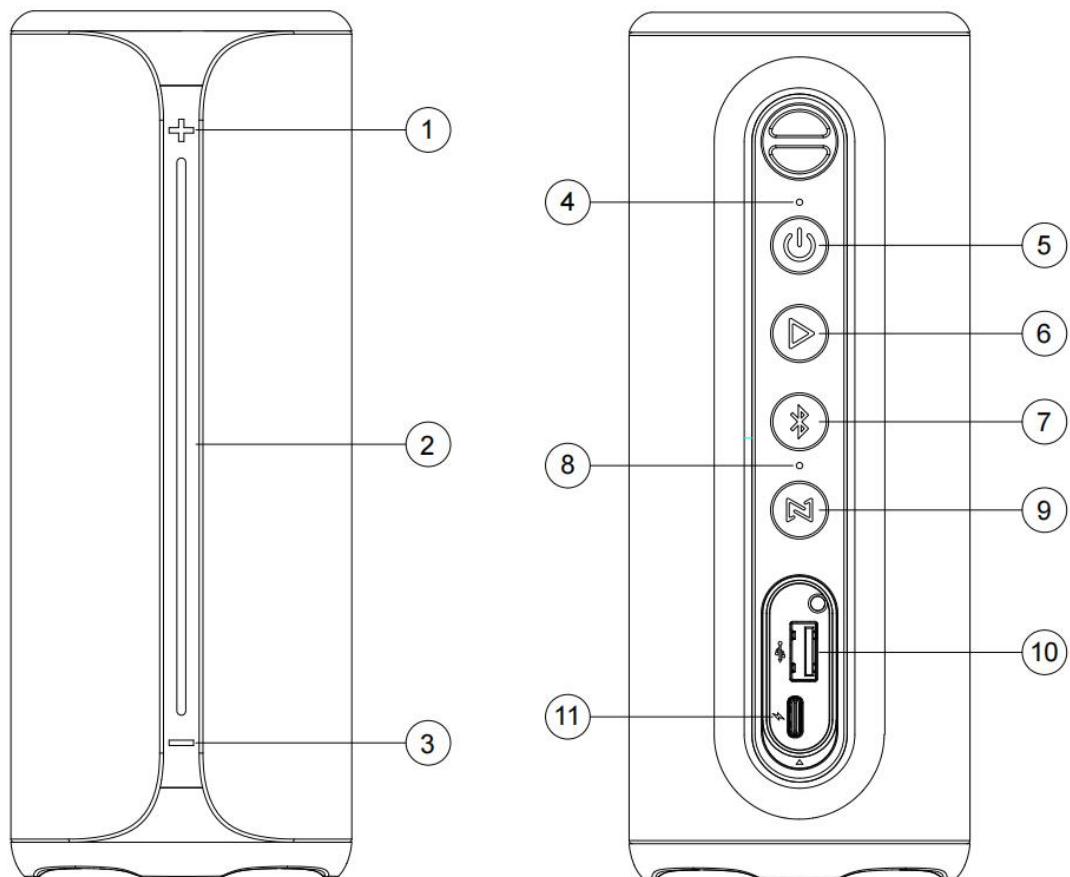

Slot and Keys



1.

Long press: Next track

Short press: Increase the volume

2. Light bar



3.

Long press: Previous track

Short press: Decrease the volume

4. Bluetooth indicator



5.

Long press: Power on / off

Short press: Switch the mode



6.

Short press: Pause/Play

Double press: Light themes switch



7.

Long press: Disconnect the Bluetooth pairing / Reconnect the Bluetooth pairing

Double press: Reject the phone call

Short press: Pick up/Hang on the phone call/Switch to Bluetooth mode

8. TWS indicator



9.

Double press: Clear the TWS pairing list

Short press: Enter/Exit the TWS function



10. (USB Slot)



11. (Charging Slot)

Operation Instructions

1. Power on/off

Long press  button to power on/off the speaker.

Each time to power on the speaker, The default working mode is Bluetooth mode.

2. Bluetooth Mode

- 1) Short press the  button to switch or  button to enter the Bluetooth mode.
- 2) Turn on the Bluetooth of your phone, search for nearby devices. The **G170** will be found on your mobile pairing list, please connect it. When connected, the speaker will prompt "Device paired" and the Bluetooth indicator will stop twinkle and stay in Blue.
- 3) Please turn on your phone's music player, and speaker will play the selected music.
- 4) The speaker will pair with the latest used Bluetooth device automatically. Long press the  button to disconnect the current Bluetooth connection. The speaker will prompt "Device disconnected". Then other Bluetooth devices can find and pair with the speaker.

3. TWS (True Wireless Stereo) function (only works in Bluetooth mode)

- 1) Power on 2pcs G170 (ensure both speakers are in Bluetooth waiting to pair status).
- 2) Short press the  button on either one speaker to enter the TWS pairing mode
- 3) Once two speakers paired, the speaker TWS indicator stays in Blue is the master speaker, the other one Bluetooth indicator stays in Green is the slave speaker.
- 4) Use your phone to pair the master speaker G170, and play Bluetooth music on both speakers.
- 5) Short press the  button on either one speaker to disconnect the TWS pairing.
- 6) Double press the  button to clear the TWS pairing list.

4. USB Music Playing

Inserting the USB Flash Disk into the speaker, short press the  button to enter the USB mode, the speaker will prompt "USB mode", Then the speaker will play the USB music directly.

Please Note: The USB Flash Disk supporting memory up to 32G, and support the audio format at MP3.

5. Intelligent power saving function

The speaker will be automatically powered off in below cases:

- (1) Under Bluetooth mode, the speaker is waiting to pair for more than 20 minutes
- (2) Under USB mode, if press the  button and mute or pause for more than 20 minutes
- (3) Pause/mute for more than 20 minutes.

Note: Please long press  button again to power on the speaker

6. Charging function

When speaker with low battery capacity, the speaker will prompt “**battery low**”, Please charge the battery via a USB adaptor immediately. During charging, the light bar will indicate the battery capacity step by step. When fully charged, the light bar will be fully lighting in Red.

Note:

Please use the good quality adaptor to charge the speaker.

We suggest use the adaptor specification at 5V/2A

When speaker with low battery capacity, please charge the speaker immediately

The speaker can be charged by different charging current, if using the computer to charge the speaker, as the current only at 500 mA, the charging time will be very long.

Troubleshooting

1. What should I do if the speaker can not pair with the Bluetooth device and play music accordingly?

- (1) Please check the specification/ the manual of the Bluetooth device (your mobile or computer), and check if the device can support the A2DP stereo audio transmission. If yes, please turn on the A2DP stereo mode.
- (2) Ensure the speaker is under the Bluetooth pairing status, if there are many Bluetooth devices nearby, the G170 will not easy to be found. Please turn off other Bluetooth devices.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction