封面　　展开尺寸：600*140mm

PRODUCT MANUAL

Ⅰ.Cautions (The following basic safety precautions should be always complied with)

Avoid casualties and property loss, please always follow the attentions as the following.

Note

WARNING

May cause electric shock or fire hazard.

INSTALLING

1.Do not use unsafe plug or power.
2.Do not install the device at the place where children can touch.
3.Do not install the device at the place where can not bear strength and prone result in falling and collapsing.
4.Do not tilt the device.
5.Keep the device away from fire and heat source, prohibit to store flammable and explosive materials around the device.
6.Except for the atomizer, the housing material is not resistant to corrosion.
7.Do not use device in high temperature or wet environment.
8.Do not use inflammable, explosive, corrosive and other hazardous solvents work with the device.

Ⅱ.Product Feature

Voltage：12V
Power：15W
Capacity：1000ml
Weight：3.9kg
Coverage：3000-4000m³
Size：295*113*230mm

Ⅲ.Accessories Instruction

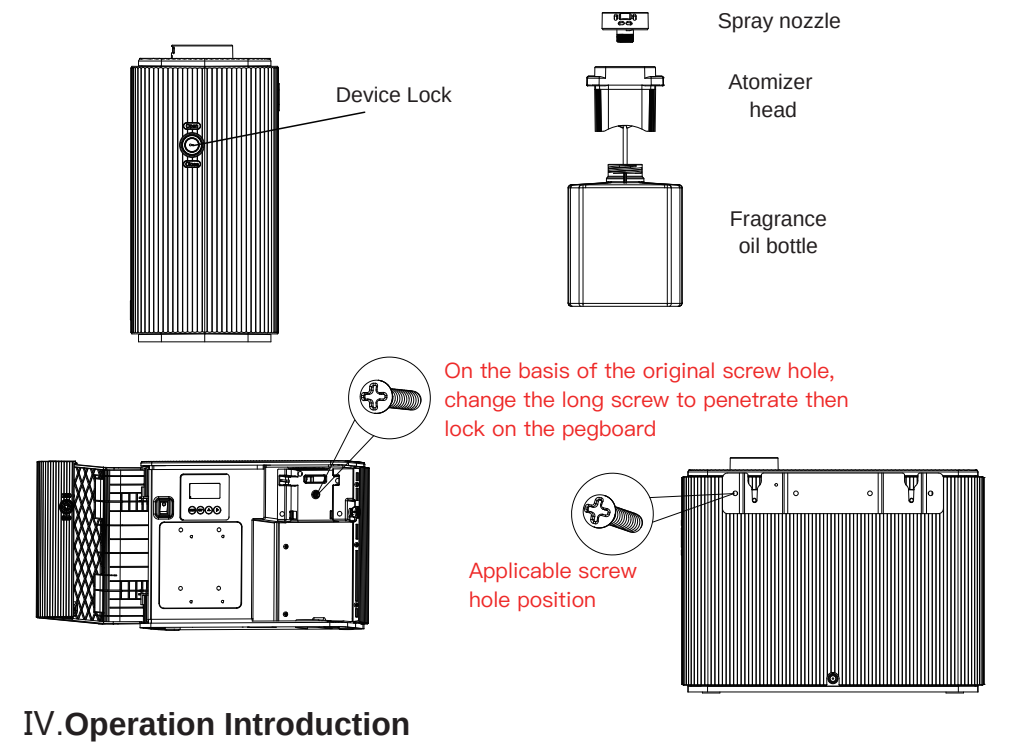
Device Lock
Spray nozzle
Atomizer head
Fragrance oil bottle
On the basis of the original screw hole, change the long screw to penetrate then lock on the pegboard
Applicable screw hole position

Ⅳ.Operation Introduction

01.Choose one favorite oil

02.Open the equipment lock

03.Unscrew the atomizing cap and take out the bottle

04.Pour the essential oil into the bottle

05.Screw the bottle on atomization head ,then put it back into machine

06.Plug in the power cord

07.Turn on the power switch

08.Set the time period via phone app


09.Enjoy the fragrance

Ⅴ.How to use the equipment

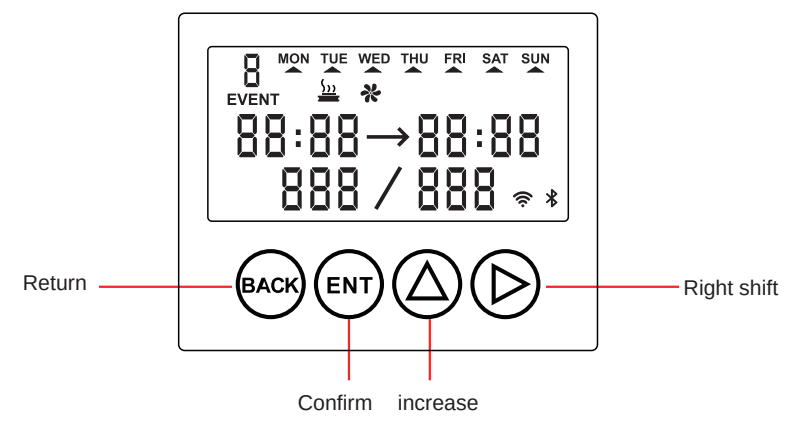

1.The turn on/off interface is shown in the image below, and it takes two seconds to turn on:



Device start-up interface

2. Display on the main interface of the device: the Current Working Day; Local Time; Working Time Period; Work/Pause Seconds; The Atomization / Fan Icon, WIFI and Bluetooth Connection Status icons.
As shown below

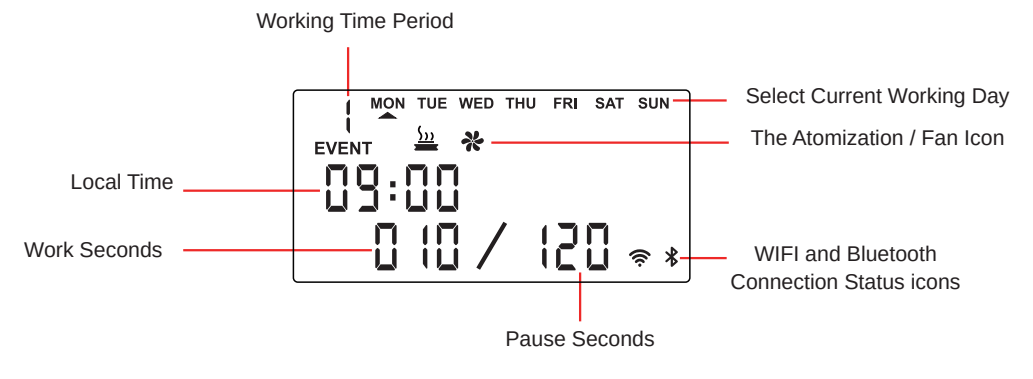
Working Time Period
Select Current Working Day
The Atomization / Fan Icon
Local Time
Work Seconds
WIFI and Bluetooth Connection Status icons
Pause Seconds
EVENT MON TUE WED THU FRI SAT SUN
09:00
010 / 120

Display on the main interface of the device

3. Set the working time period and frequency: press the “▷”button enter the setting interface, as shown below:

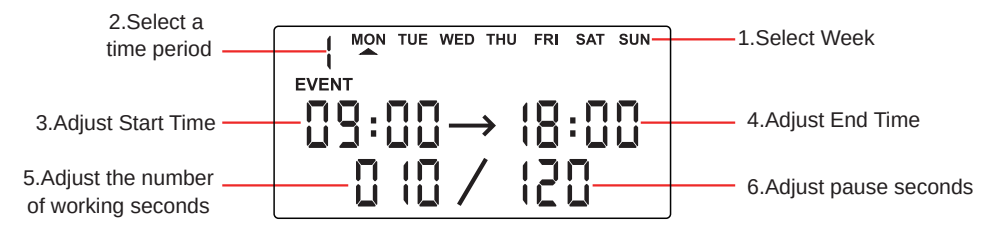

Main interface for setting time period and working frequency

(1)First: select the work day that needs to be set,press the “△” button to adjust the day of the work day, press “ENT” to confirm and select the day of the work day, and press the “BACK”button to return (Note: If the selected setting is Monday, then the setting of Tuesday~Sunday remains the same as Monday, and this method can be used to quickly set);
(2)Second:select the set time period, press the “△” button to adjust the time period, a total of 5 time periods, press the “▷” button to move the cursor to select, press the “BACK” button to return;
(3)Third:set the working time period and working frequency, press the “△” button to adjust the value, press the “▷” button to move the cursor, and press the “BACK” button to return;
(4)Fourth:after all these setting,press the “ENT” button to confirm the setting

4. Set the local time and Day: press the “△” + “▷” button at the same time, as shown below:



Time setting interface

Press the “△” button to adjust the value, press the “▷” button to move the cursor,then press the “ENT” button to complete the setup.

5. Set the password of the device: press the “BACK” + “ENT” at the same time to enter the interface of the password setting,as shown below:



Password setting interface

(1)Enter the four-digit password for the first time, press the “△” button to adjust the value, and press the “▷” button to move the cursor;
(2)Enter the four-digit password for the second time, press the “△” button to adjust the value, and press the “▷” button to move the cursor (Note: the four-digit password entered for the first time must be consistent with the second password to be successfully set);

6. Turn on/off: Long press the “ENT” button until you hear a “beep”, then you can turn on/off the machine;

7. Turn on/off fan: Long press the “BACK” button to turn on /off the fan, and observe the status of the fan icon;

8. Reset the machine: Press the “BACK” + “▷” buttons at the same time until you hear the five beeps of “ Didi Didi ” then release the button, and the device starts reset.

9. After the device has no button operation for 10 seconds, the display screen will be turned off; Press the button again to wake up the screen backlight.

Ⅶ.Description of essential oil volume detection function:

When the remaining essential oil is too low, the APP will prompt, as shown in the figure below:

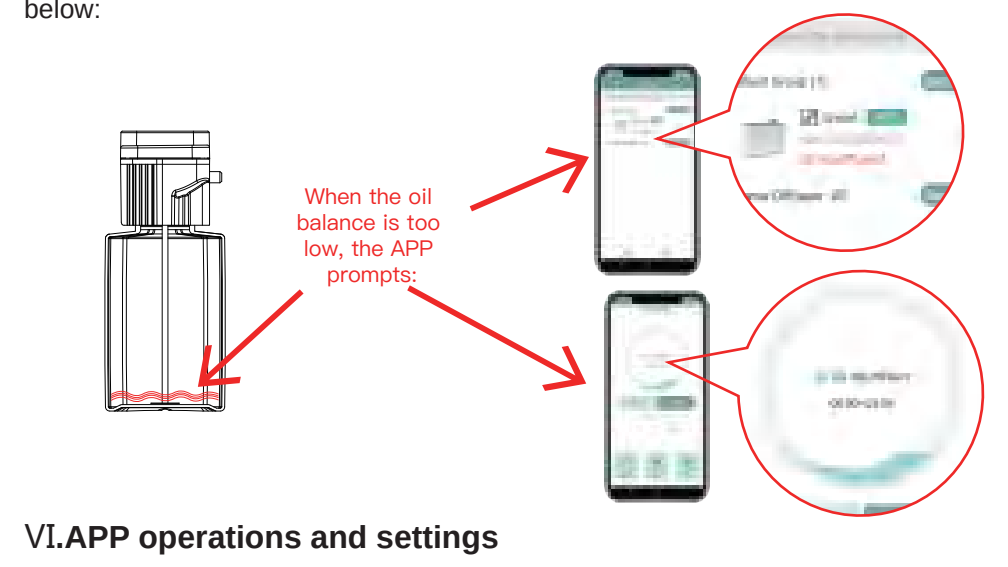

Ⅵ.APP operations and settings

To ease use machine ,it support use mobile phone to set the machine.

1.Download Aroma-Link

Please enter the App store, Google Play Store or Android App store, then input Aroma-Link and download the App.

IOS APP　　Android APP

To start configuring the diffuser on phone, please scan QR code to download "Aroma Link" App.

2.App connection

First step, turn on the bluetooth function on your phone.
Second step, run our Aroma-Link app and choose bluetooth mode.
Then Click My Devices ,you will find the device name Smart.A5 (Mobile should nearly to machine).
Third Step, Click this device and put the password 1234(default setting is 1234),the machine will be connected successfully.
Reference the pictures (Figure 1 to Figure 4)


Figure 1



Figure 2


Figure 3



Figure 4

3.View the working status and control the machine:

On the APP, you can check working time and pause time of the device, change the settings and turn on/off the device.

4.Work time Setting

Click “Set up” on the main interface to set working period, support to set five working periods in each day. After setting, please click “Save” to finish the setting. (Refer to Figure 5 and Figure 6).

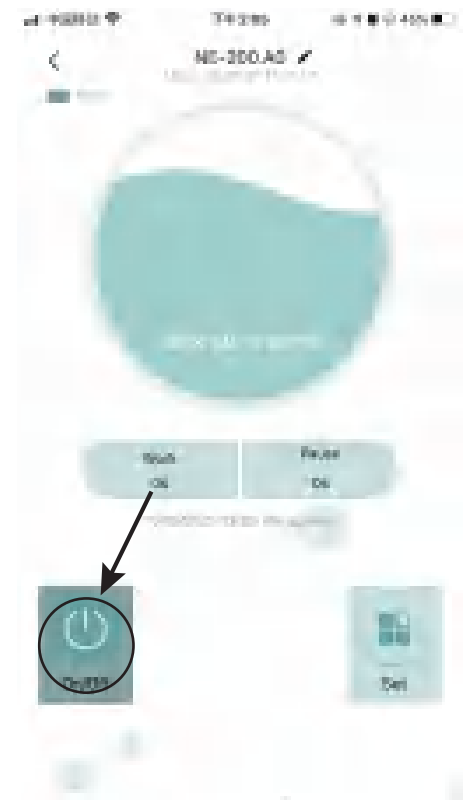
Figure 5

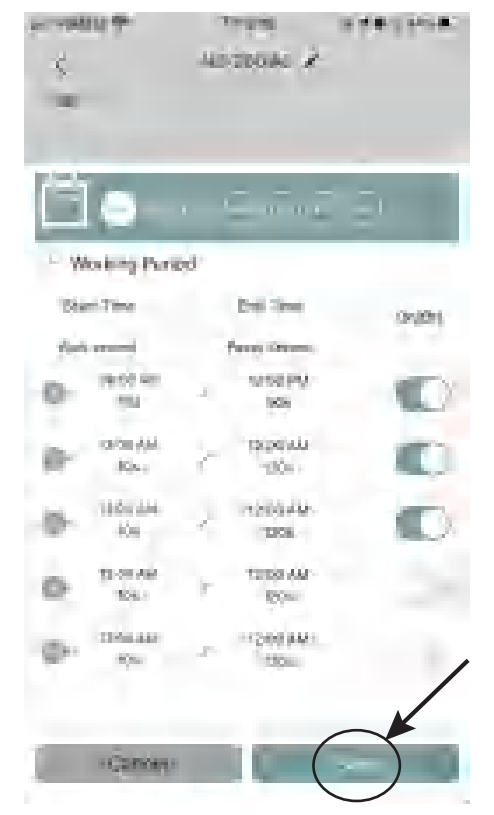
Figure6

5.Click “Set up” on the main interface to set the working frequency(Refer to Figures 7 and 8).

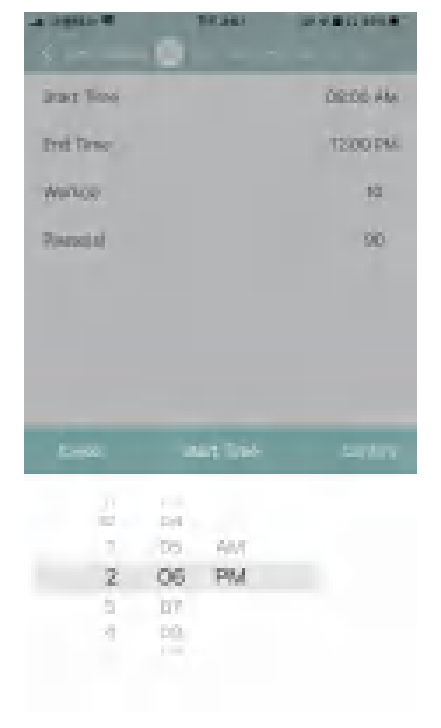
Figure 7

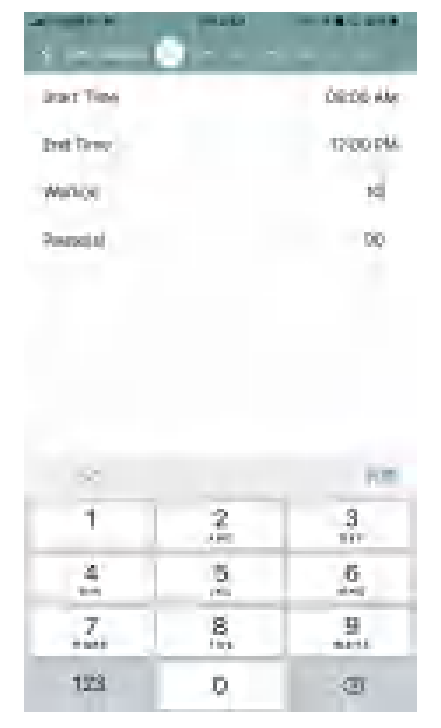
Figure 8

6. Rename device :

In order to manage multiple devices, the Bluetooth name of each device can be modified. For example, we can modify the device which put in the meeting room: “ Meeting Room 01 ”.
Modify method: Press the device name “Smart.A1” in the app (Refer to Figure9), then enter the name modification interface, after you rename the device,click “OK”to confirm the setting. (Refer to Figure 10).


Figure 9

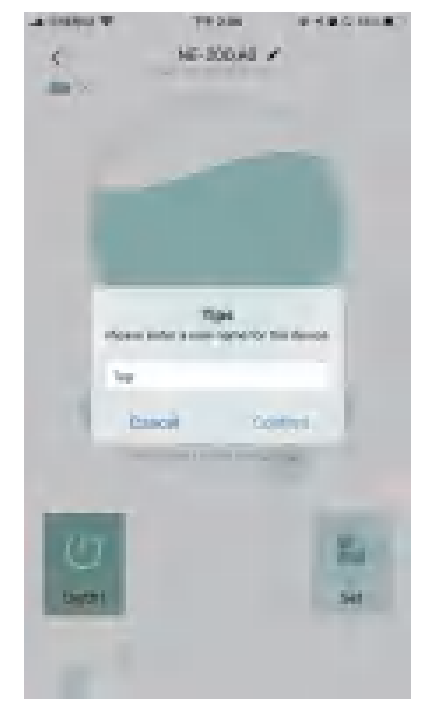
Figure 10

Ⅷ.Fault Inspection

No scents	1. Check whether the device's battery or powered on or not. 2. Check whether the pump is working or not and whether the nozzle is blocked or not. 3. Check whether the essential oil in the bottle is ran out or not and whether the pipe falls off or not.
Oil leakage	1. Oil leakage inside the machine: Check whether the essential oil bottle is tightened or not. 2. Oil leakage from the mist outlet: Check whether there are obstacle in the mist outlet hole.
Unusual noise	1.Check pump whether fall out , and re-install the air pump. 2. Check whether the mist outlet is blocked by obstacle. 3.Check the pump whether is low airflow and low pressure.

Ⅸ.Warranty and after-sales service

1.After-sales service

(1) Provide free technical solutions and installation process guidance
(2)Provide free online FAQ consultation and scent-marketing suggestion

2.Equipment warranty and attentions

(1) All devices enjoy 12 months free maintenance (from the day of purchase).
(2) Please provide the warranty card,invoice or other provement which can prove it ordered from our company to enjoy the free maintenance
(3) The human error or other wrong operation cause the fault not belong to the scope of warranty,and will not be accepted to provide free maintenance.

Ⅹ.Machine Maintenance

1.Please use the alcohol to work and clean the equipment periodically, suggest 2-3 months in 1 circle, so that it can work under best condition.
2.Please cut off the power when cleaning, also do not use wet hand to operate it directly, in case of electric shock and injury.

Ⅺ.Long-term non-use

(1) Please turn off and cut off the power then roll up the power cord.
(2) Clean the filter components.
(3) Place the deodorant package which contains activated carbon in the device or package, to prevent residual substances in the equipment produce odor.
(4) Please equip the machine with the dust cover, placed in the shade, ventilative place.

Ⅻ.FCC warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

产品说明书

一、安全上的注意事项 （务必遵照下述注意事项）

为了避免危害使用者以及给他人造成财产损失，特此说明下列务必遵守的事项。

注意

1. 设备内有精油时，要保持直立状态！侧放、平放、倾斜等其他放置状态，需提前取出带精油的精油瓶和雾化头。
2. 请勿将香氛设备安装于儿童能触及的地方使用。
3. 请勿使用不安全电源或插头。
4. 请勿使香氛设备接近火源、热源，禁止在香氛设备附近使用或存放易燃易爆物品。
5. 请勿将香氛设备放置于高温潮湿的环境中使用。
6. 请勿使用易燃、易爆、有腐蚀性等危害溶剂给设备工作。
7. 精油不可兑水。

二、说明

产品通过：CE、FCC、RoHS等认证。

设备名称：OV–10
电压：12V
功率：15W
重量：3.9kg
容量：1000ml
覆盖范围：3000–4000m³
外形尺寸：295*113*230mm

三、产品零部件说明

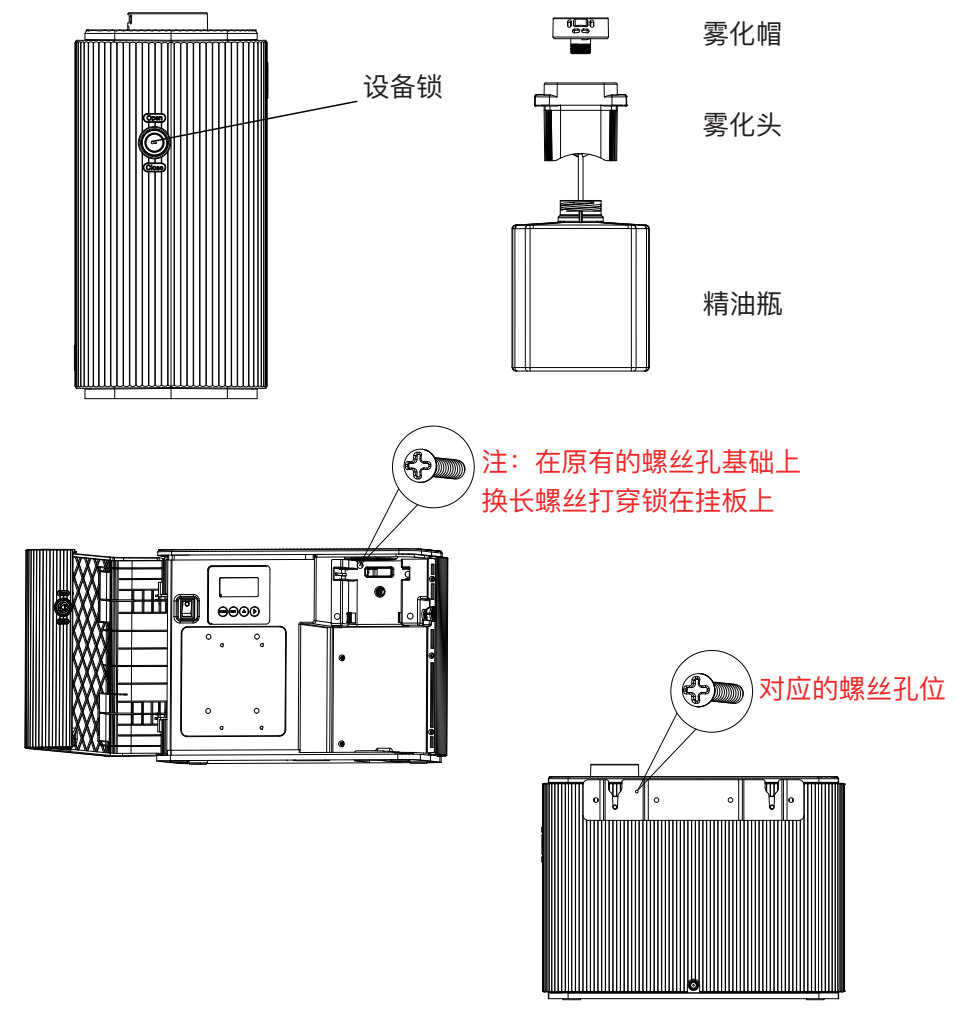

四、设备使用方法

01.选择你最喜欢的香氛精油

02.打开设备锁

03.拧出雾化帽和取出精油瓶

04.把精油倒入到精油瓶内中

05.将精油瓶拧上雾化头装回设备中

06.插上电源线打开开关按钮

07.电路板按键设置工作时间

08.手机APP操作设置


09.享受香氛

五、电路板操作说明

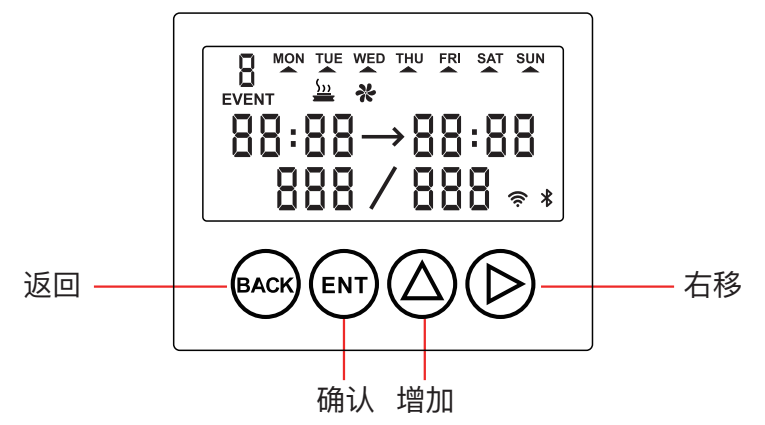

1.开机启动界面如下图所示，开机启动需两秒时间。



设备启动界面

2.设备主界面展示：当前星期，当前本地时间，当前工作时间段，设备工作与暂停秒数倒计时，雾化图标，风扇图标，WIFI和蓝牙连接状态图标。如下图所示：

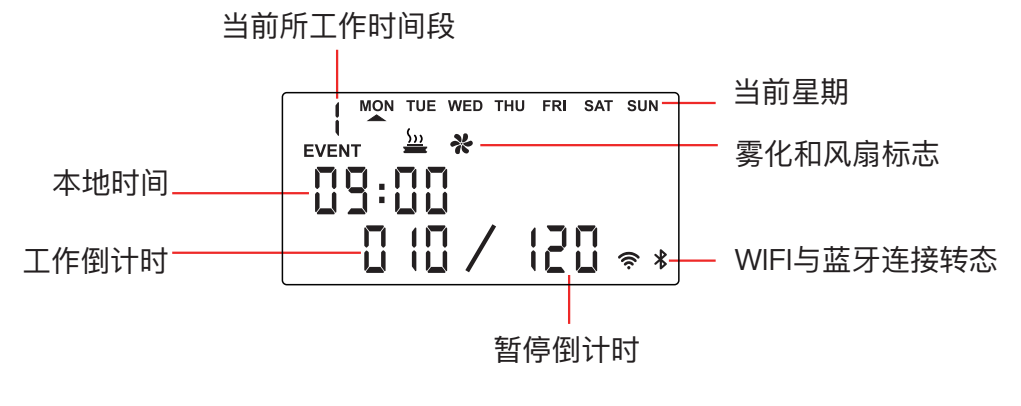

工作主界面

3.设置工作时间段和频率：主界面下按“▷”键进入设置界面，界面如下图所示：



设置时间段和工作频率主界面

(1)第一步：选择需要设置的星期，按“△”键调整星期，按“ENT”确认选择星期，按“BACK”键返回(注：如果选择设置的是星期一，则星期二–星期日的设置与星期一保持一样，使用此方法可以快捷设置)；
(2)第二步：选择设置的时间段，按“△”键调整时间段，共5段时间段，按“▷”键移动光标选择，按“BACK”键返回；
(3)第三步：设置工作时间段和工作频率,按“△”键调整数值，按“▷”键移动光标，按“BACK”键返回；
(4)第四步：设置完成后按“ENT”键确认设置。

4.设置本地时间和星期：主界面下同时按“△”+“▷”键进入时间设置界面，界面如下图所示：



时间设置界面

按“△”键调整数值，按“▷”键移动光标，按“ENT”键完成设置

5.设置设备密码：主界面下同时按“BACK”+“ENT”键进入密码设置界面，界面如下图所示：



设置密码界面

（1）先第一次输入四位数密码，按“△”键调整数值，按“▷”键位移光标；
（2）再第二次输入四位数密码，按“△”键调整数值，按“▷”键位移光标（注：第一次输入的四位密码需与第二次密码一致才能设置成功）；

6.开关机：主界面下长按“ENT”键，直至听到“滴”一声，可以开关机；
7.开关风扇：主界面下长按“BACK”键，即可开关风扇，可观察风扇图标状态；
8.恢复出厂设置：主界面下同时按“BACK”+“▷”键，直到听到“滴滴滴滴滴”五声后松开按键，设备开始恢复出厂设置。
9.设备10秒内没有按键操作后，显示屏背光将会关闭；再次按键可以唤醒屏幕背光。

六、精油余量检测功能说明：

当精油余量过低时，APP将会提示，如下图所示：

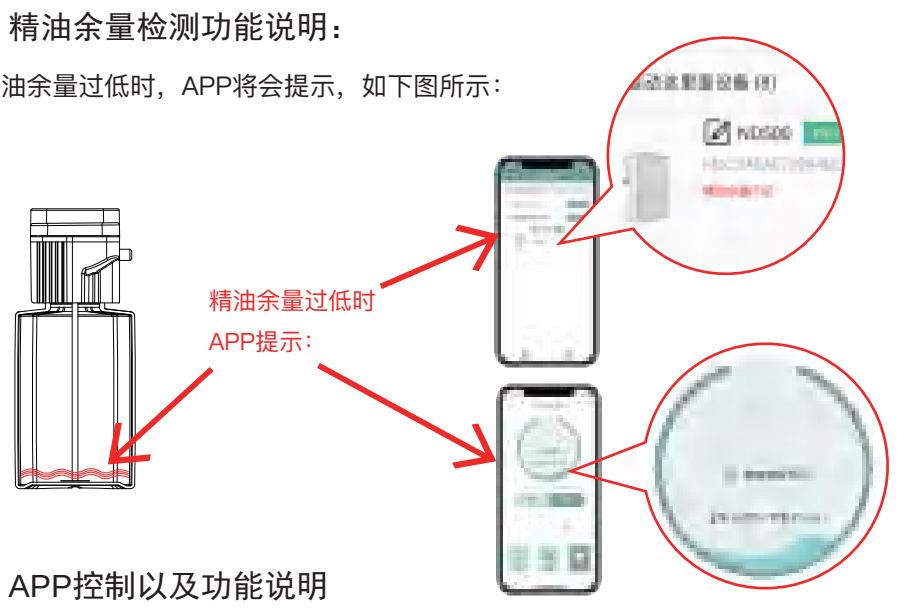

七、APP控制以及功能说明

为了使设置更加简便，本产品支持蓝牙通讯，可在手机上使用APP来设置设备的运行参数。
1.下载Aroma–Link
请进入苹果商店，Google应用市场，安卓应用市场,输入Aroma–Link下载控制APP。

苹果APP下载　　安卓APP下载

1.APP连接设备：
首先打开手机蓝牙，运行APP，在首界面选择“蓝牙”，便会自动搜索设备，从搜索出来的设备中找到后缀名为A5的设备点击连接。初次连接设备需要输入密码（默认为“1234”），点击“确定”连接设备。（如图1至图4）


图1



图2


图3



图4

2.查看工作状态、远程开关机：
在APP主界面上可以查看设备的工作状态、工作时间和暂停时间，以及远程控制设备的开关机。
3.设置工作时段：
在主界面点击“设置”进入设置每一天的工作时间段，支持每天设置五个独立的工作时段，时段信息输入完毕后点击“保存”完成设置。（如图5和图6）

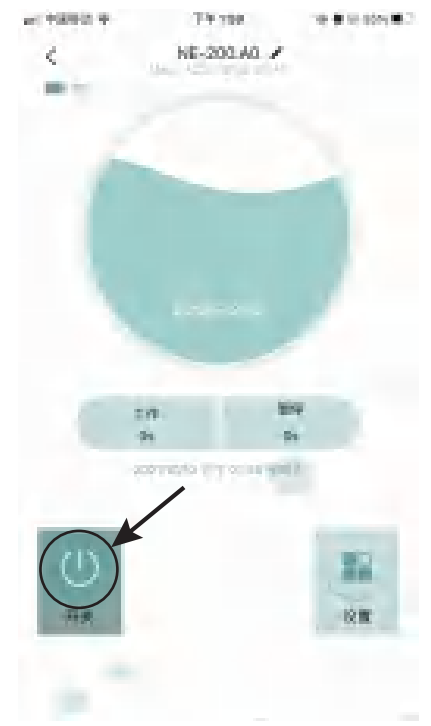
图5

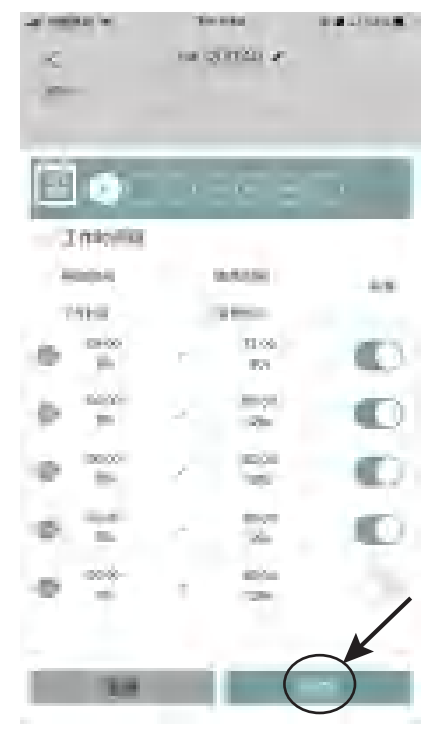
图6

在主界面点击“设置”进入设置每天五个时段对应的工作时间段，即开始时间和结束时间，工作/暂停，输入完毕后点击“保存”完成设置。（如图7和图8）

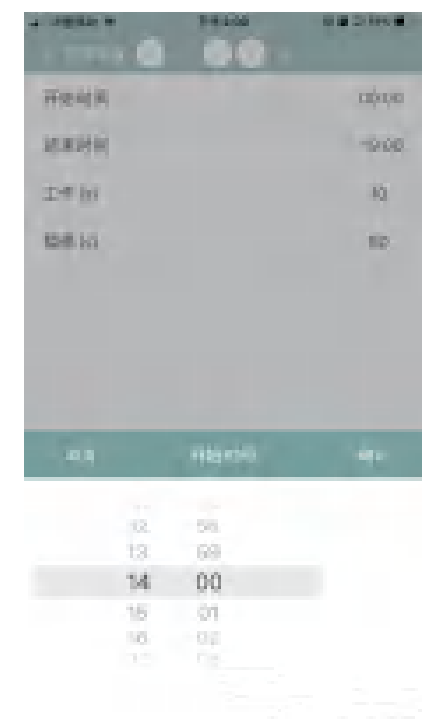
图7

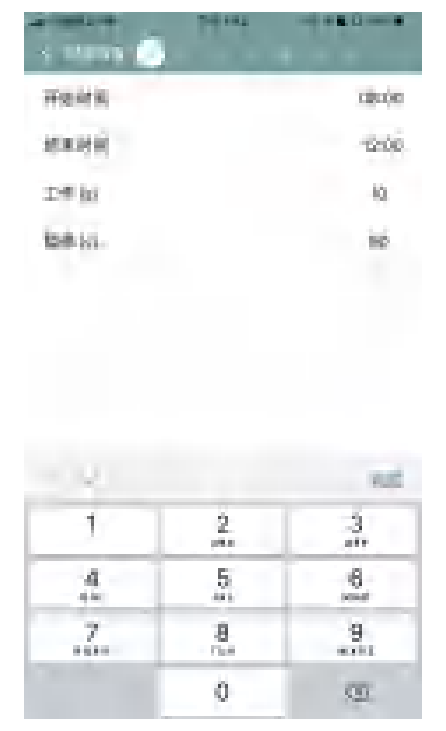
图8

4.修改设备名称:
为了便于管理多台设备，每台设备的蓝牙名称都可修改，例如我们可以将会议室设备的蓝牙名称更改为:“NE–200 ”。
修改方法:主界面点击APP顶端“✎”按钮进入名称修改界面（图9），名称输入完成后点击“确定”修改设备名称(图10)。

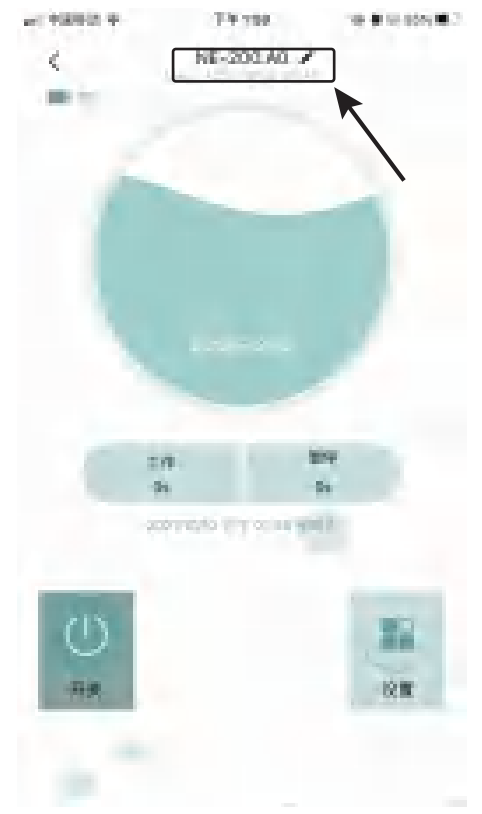
图9

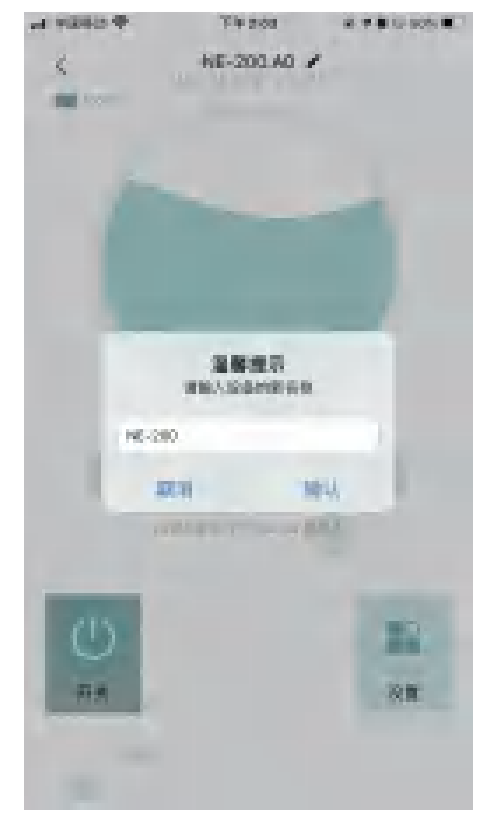
图10

八、故障排查

没有雾化	1. 检查设备是否有电或者通电。 2. 检查气泵是否工作，雾化芯是否堵塞。 3. 检查精油瓶油是否用完，检查吸液管是否脱落。 4. 检查设备是否在工作时间段
漏油	1. 机内漏油：检查精油瓶是否拧紧。 2. 出雾口漏油：检查出雾口孔内是否有异物。
异常噪音	1. 检查气泵是否松动，尝试重新固定气泵。 2. 检查出雾口是否有异物堵塞 3. 检查气泵是否老化损耗，更换新的气泵。

九、保修和售后服务

一、售后服务

1.免费提供技术解答与安装流程。
2.在线免费提供香氛效果跟踪方案。

二、设备质保及注意事项

1.产品质保周期为12个月（从售出当天开始计算）。
2.提供保修卡、合同及相关证明才能享受免费维修。
3.产品人为损坏及使用不当造成的故障不在保修范围内。

十、设备维护

1.请定期用酒精替换精油，连续工作清洗设备，建议 2 – 3 个月清洗一次，使设备在最佳状态下工作。
2.清洗时请切断电源，也不要用湿手直接操作，以防触电和人身伤害。

十一、长期不使用

1. 请先关机切断电源再收起电源清洁过滤元件。
2. 在装置或包装内放置含有活性炭的除臭包装，防止设备内残留物质产生异味。
3. 请给设备配备防尘罩，置于阴凉、通风处。