

UP PLAY MAX User Manual_Ver1.0.0_op



UP PLAY MAX

User Manual



Thank you for choosing the UP PLAY MAX. The UP PLAY MAX is a Lossless Bluetooth Transmitter with "K2 Technology".

Bring the power of lossless Bluetooth audio wherever you go with the **UP PLAY MAX**. Ultra-compact and portable, it fits seamlessly and discreetly with mobile and desktop devices. Use the built-in mic to take calls or chat in-game, lose yourself in natural-sounding audio enhanced by "K2 Technology", and connect a second pair of headphones to share the moment.

With a full suite of codecs including aptX Lossless for CD quality audio and TV audio, the **UP PLAY MAX** is your all-in-one solution for wireless listening.

FEATURES:

- Upgrade your device with lossless CD quality Bluetooth audio
- Works with iOS, Android, Windows, Mac, PS5, Switch 2 and more
- JVCKENWOOD's "K2 Technology" restores detail and depth
- Auracast for Bluetooth transmission to unlimited compatible devices
- Dual headphone pairing lets two people listen at once
- Built-in microphone for game chat or calls on the go
- Switch between codecs easily with built-in physical button
- Adaptive bit-rate balances audio quality and stability

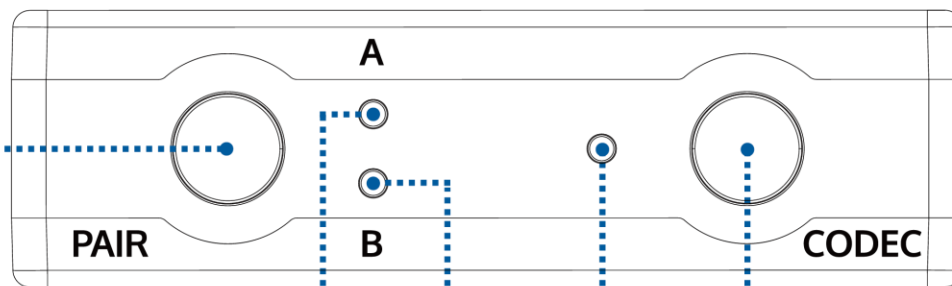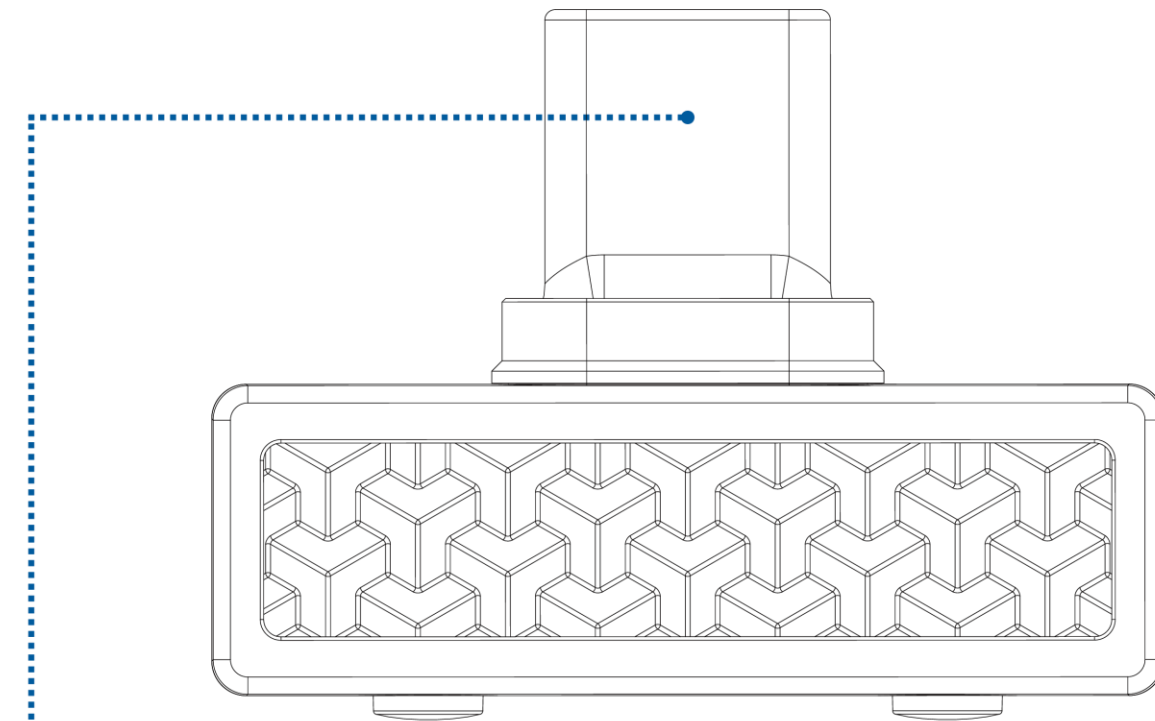

1

2



3

4

5

6

7

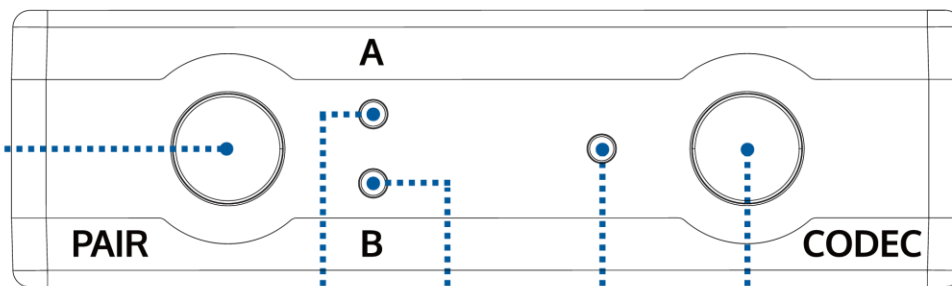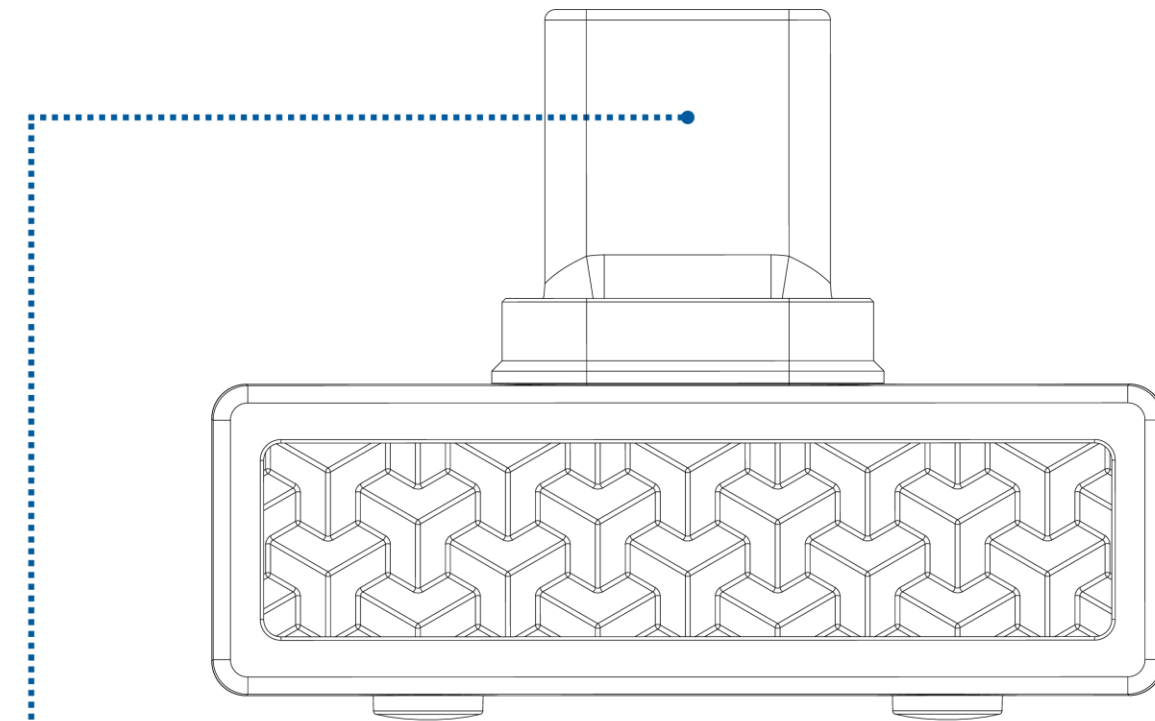

1


2

3

4

5

6

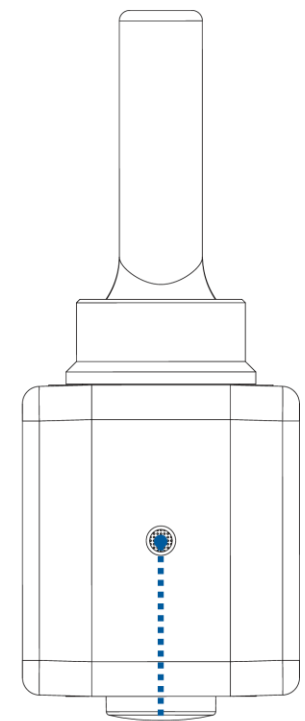

7

1. USB-C Connector

Plug the device into your computer, laptop, tablet, or phone's USB port to supply both power and audio.

2. 'A'/'B' Device Selector / Bluetooth Device 'A' Pairing

I) 'A'/'B' Device Selector (Short press $\leq 1s$)

Choose which device to pair first before beginning dual pairing.

Tip: To pair two Bluetooth devices (Device 'A' and Device 'B'), start by pairing Device 'A' (the first device), then proceed to pair Device 'B' (the second device).

Once two devices are paired, short press ($\leq 1s$) to cycle between the following connection modes:

A+B > A > B

When switching modes, the LED for the selected device will blink three times.

Tip: When connected to two Bluetooth devices (A+B mode), only the SBC codec is supported. Bluetooth codec switching is not available in this mode.

II) Bluetooth Device 'A' Pairing (Long press $\geq 3s$)

Initiates Bluetooth pairing with Device 'A'.

3. Device 'A' Connection Status LED

This LED shows whether Bluetooth Device 'A' is connected to the UP Play Max.

LED	Status
ON	Connected

OFF

Not Connected

4. Device 'B' Connection Status LED

This LED shows whether Bluetooth Device 'B' is connected to the UP Play Max.

LED	Status
ON	Connected
OFF	Not Connected

5. Bluetooth Pairing Status / Codec LED

I) Bluetooth Pairing Status LED

While awaiting a Bluetooth connection, the LED colour shows the current Bluetooth pairing status:

LED	Status
Red/Blue (flashing)	Pairing Mode
Blue (flashing)	Awaiting Automatic Connection

II) Bluetooth Codec Format LED

While a Bluetooth device is connected, the LED colour shows the current Bluetooth codec format:

LED	Format
Off	SBC
Yellow	AAC

Blue	aptX
Magenta	aptX HD
Green	aptX Adaptive
Cyan	LDAC
White	aptX Lossless

6. Bluetooth Codec Selector / Bluetooth Device 'B' Pairing

I) Bluetooth Codec Selector (Short press $\leq 1s$)

Short press to cycle between the available Bluetooth Codecs:

LDAC > aptX Lossless > aptX Adaptive > aptX HD > aptX > AAC > SBC

II) Bluetooth Device 'B' Pairing (Long press $\geq 3s$)

Initiates Bluetooth pairing with Device 'B'.

7. Built-In Microphone

Built-in microphone for hands-free calling.

Tip: For the latest firmware updates, please use the iFi Nexis app.



"iFi Nexis"



Download the Nexis app for added features and future updates

Fully Control your UP PLAY MAX with the iFi Nexis App

Open the iFi Nexis app and search for "**UP PLAY MAX**" to connect.

The Nexis app lets you access all UP Play Max features and settings, including:

- Firmware version information
- Bluetooth codec options
- OTA (Over-the-Air) firmware updates
- *and more!*

**OTA (Over-the-Air) technology enables firmware updates directly over the network.*

Cautions

1. Avoid extreme heat, cold and humidity.
2. Avoid dropping or crushing the **UP PLAY MAX**.

Prolonged Heat Exposure

During normal use, your UP PLAY MAX may feel warm to the touch - this is completely normal and nothing to worry about.

SPECIFICATIONS:

Bluetooth Version	Bluetooth 5.4
Bluetooth Chipset	Qualcomm QCC 5181
Transmission Distance	≥10m
Inputs	USB-C
Bluetooth Codecs	aptX Lossless**, LDAC™***, aptX Adaptive, aptX HD, aptX, AAC, SBC
Maximum Supported Sampling Rate	96kHz/24Bit
Frequency Response:	20Hz-43kHz (LDAC)
Power System:	5V/≥0.5A

Power Consumption:	<20mA
Dimensions:	27.6 x 20.8 x 8mm (1.1 x 0.8 x 0.3")
Net Weight:	3.0 g (0.1 oz)
Limited Warranty:	12 months*

**12 months typical or as permitted/required by local reseller laws.*

***Specifications are subject to change without notice.*

***Qualcomm aptX and Snapdragon Sound are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm, Snapdragon, Snapdragon Sound and aptX are trademarks or registered trademarks of Qualcomm Incorporated. aptX is a trademark of Qualcomm Technologies International, Ltd.*

****LDAC and the LDAC Logo are trademarks of the Sony Corporation.*

"K2 TECHNOLOGY" is a trademark or registered trademark of JVCKENWOOD Corporation.

FCC Notice:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

---Reorient or relocate the receiving antenna.

---Increase the separation between the equipment and receiver.

---Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

---Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure

The equipment has been evaluated to meet general RF exposure requirement. The device can be used in portable condition without restriction.