



PPHP849KT

Active + Passive PA Speaker System Kit

Dual Loudspeaker Sound Package, 10" Subwoofers, Wireless BT Streaming,
Includes (2) Speaker Stands, Wired Microphone, Remote Control (1000 Watt)

USER MANUAL

WARNING!

**CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE THE COVER OF THIS UNIT.**

**THERE ARE NO USER - SERVICEABLE PARTS INSIDE.
REFER ALL SERVICING TO A QUALIFIED TECHNICIAN.**



The lighting flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of “**dangerous**” voltage within the product’s enclosure that may be of sufficient magnitude to constitute a risk of Electric shock to humans. Users should exhibit extra safety when this symbol appears in this instruction manual and follow all precautions as they are stated.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) in instructions in this manual.

SAFETY INSTRUCTION

1. Please read the user manual carefully before use and retain for future reference.
2. The power supply must match the demand of the device with reliable ground wire.
3. All covering signal should be complied with the demand of device.
4. The device should be located far away from high temperature, moisture and powerful electromagnetic field.
5. Max operating temperature is 113°F.
6. No naked flame sources, such as lighted candles, shall be placed on the product.
7. **Clean only with dry cloth** – The appliance should be cleaned only as recommended by the manufacturer.
8. When not in use, unplug the unit from the mains.
9. **To establish a safe level:**
 - Start your volume control at a low setting.
 - Slowly increase the sound until you can hear it comfortably and clearly, and without distortion.
10. Only use suitable means of transportation if you want to move the speaker.

Note:

- Once the WIRELESS BT devices are paired, there is no need to pair them again.
- If the speaker is connected via BT device but does not play with sound, please turn off nearby devices and only leave one device to re-connect with the speaker.
- When inserting the USB/SD Card, make sure the direction you selected is correct. Never insert violently to avoid damaging the USB/SD Card or the unit. If it doesn't work, please check if the direction is correct.
- Turn off and pull out the USB/SD before turning off the speaker.

CONTROLS AND CONNECTIONS

1. LCD screen
2. Mp3 control

MODE: USB/SD/BT/FM converter

▶||: Play/Pause

SCAN: Press and hold to auto search under FM radio

FOL: Press and hold for 5 seconds to enter the folder

option function mode (press the previous/next songs button to choose the folder)

↺: Repeat one/Repeat all/Random

PRE/NEXT under FM mode

Press and hold to search lower/higher station manually

Short press to tune to saved station


◀◀: Previous Song

Press and hold for fast rewind

▶▶: Next Song

Press and hold for fast forward

3. USB input
4. SD card input
5. Remote control
6. MIC level control
7. MP3 level control
8. Bass control
9. Treble control
10. XLR microphone line input
11. Line input
12. AUX input
13. Master volume
14. Speaker out 8Ohm
15. Main power switch
16. Fused IEC mains inlet

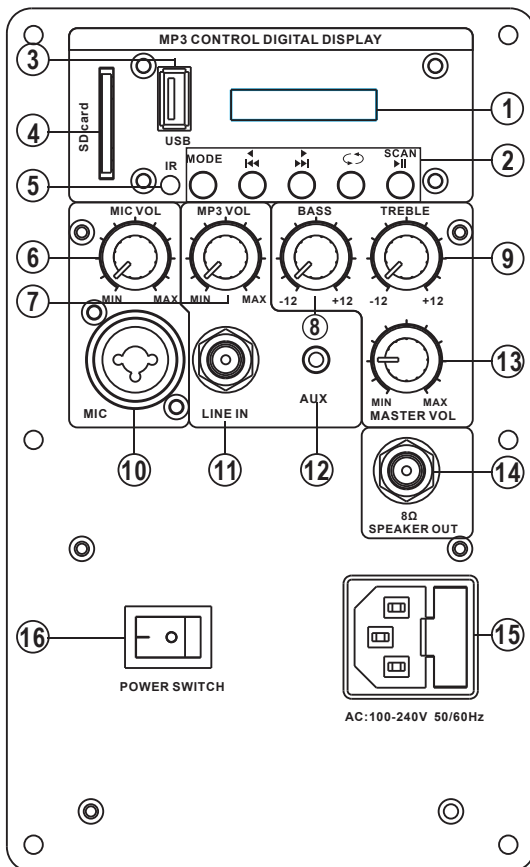

1. **MODE** : USB/SD/BT/FM CONVERTER
2. **⏮** : In USB/SD : Previous Song,
Press and hold for fast rewind
In FM : switch to backward
3. **VOL +** : Increase volume
4. **VOL -** : Decrease volume
5. **⏭** : In USB/SD : next Song,
Press and hold for fast forward
In FM : switch to next channel
6. **■** : Stop Switch the MP3 player off.
7. **⏸/SCAN** : Play / Pause
In FM : Auto search
8. **EQ** : NORMAL, ROCK, POP, CLASS, JAZZ.
9. **REP** : Shot press : Random/Single/Order
10. **0-9** : choosing music by numbers
11. **MUTE** : Mute the sound of the MP3 player



Wireless BT Connectivity:

- Instantly Stream Music from Your Wireless BT Devices
- Works with All Your Favorite Wireless BT Devices
(iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Wireless BT Version: 4.0
- Wireless Range: 100'+ Feet
- Wireless BT Network Name: 'Pyle'

Speaker Stands:

- Effectively Elevates Speakers for Optimum Sound Performance
- Universal Speaker Compatibility (35mm Insert)
- Easy Setup and Quick Adjustment Control
- Reinforced Steel Support Construction
- Speaker Support Arm Extension
- Rugged and Reliable
- Safety Lock-in Pin
- Foldable for Quick Storage and Transport
- Rubber Capped Tripod Feet Base
- Perfect for On-Stage or Studio Use
- For Professional or Beginner Applications
- Speaker Height Adjustable: 59.1" x 82.7" -inches
- MAX. Load Capacity: 100 lbs. (50 kgs.) -Each

Features:

- Dual 10-inch High-Powered Loudspeaker PA Systems
- Includes (1) Active Speaker, (1) Passive Speaker + (2) Stands
- Rugged, Durable & Reliable Sound
- Wireless BT Music Streaming Ability
- High-Frequency 1.0" Tweeters
- Compression Driver with Titanium Diaphragm
- 2-Way Full Range Audio Projection
- Built-in Digital Audio Amplifier
- XLR Microphone Input
- 1/4" SpeakOn (8 Ohm) Input
- 1/4" SpeakOn (8 Ohm) Speaker Output
- Aux (3.5mm) Input Jack
- Connect & Stream Audio from External Devices
- USB Flash Drive & SD Memory Card Readers
- Digital LCD Display
- Rear Panel Rotary Dial & Button Control Center
- Master Volume, Mic Volume, Treble, Bass Adjustable
- Integrated Carry Handles
- 35mm Speaker Stand Mount Compatible
- Heavy Duty Engineered ABS Housing

Technical Specs:

- MAX Power Output: 1000 Watt
- Amplifier: Class D
- Impedance: 8 Ohm
- T.H.D.: <1%
- Magnet: 20 oz.
- Sensitivity: 92dB (+/-2dB)
- Mic Input Level: <15mV
- Line Input/Output Level: >250mV
- Frequency Response: 65-18kHz
- Digital Audio File Compatibility: MP3, WMA
- Maximum SD/USB Flash Memory Support: 32GB
- Power Supply: 120/240V
- Power Cable Length: 4.9 ft.
- Remote Control Battery Operated, Requires 3V Lithium Cell (CR2025)
- Stand Adjustment Height: 28" x 55" -inches
- Speaker Dimension (L x W x H): 30" x 24.5" x 47" -inches

What's in the Box:

- (1) 10" Active PA Speaker
- (1) 10" Passive PA Speaker
- (2) Speaker Stands
- Wired Microphone
- Remote Control
- Power Cable

PYLE

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.