





User Manual

Smart Pet Feeder (2.4G Wifi)



Smartlyn



Please read the instruction manual carefully before use and keep it properly (Due to the continuous upgrading of the APP, the actual functions shall be subject to what is displayed in the APP).

Safety Instructions



Dispose of all packaging materials properly. Some items may be packed in plastic bags; these bags could cause suffocation. Keep them away from children and pets.



Do not immerse the base part in water at any time as it may damage electronic components like the control panel.



Suggest following the instruction in this user manual to assemble or disassemble the feeder.



Only use accessories recommended or sold by the manufacturer. The use of accessories not recommended or sold by the manufacturer may cause an unsafe condition.



Examine the feeder after installation. Do not plug in if there is water on the power cable or plug.



This product uses 4 AA batteries as a backup power supply. Please use double power supply to ensure the normal use of the product.



Check the batteries regularly. Before leaving for an extended period of time, always replace batteries with new ones.



Do not put your fingers into the food outlet or let your fingers touch the rotor.



Keep the feeder close to your router, make sure the network signal is good, and it is ideal to make it within 5 meters without obstacles and walls(Depending on the coverage of the router you are using).



Please do not use wet, canned or moist food; only put dry food into the food tank prevent from abnormal conditions even may including pet safety problems.

Warranty

◆2-Year Warranty

◆Lifetime Support

For guidance on product use and warranty extension, please contact our brand after-sales staff via email: [\[service@papifeed.cn\]](mailto:service@papifeed.cn) or call us at **(1) 877-290-0617** (From Monday to Friday: 8 a.m.-5 p.m.)(PST) If any questions related to orders, please contact the seller through the shopping platform.

Specifications

Product Name	Smart Pet Feeder (2.4G Wifi)
Suit For	Cat, Dog, Rabbit, Squirrel, Small Pets
Power	DC 5V Power Adapter(not included), 4 AA Batteries (not included)
Rated Power	5W
Material	Eco-Friendly ABS
Product Sizs	196*314*289mm/7.72*12.36*11.38in
Product Weight	1.13Kg/2.5lb
Product Capacity	3L/≈13Cup
Pet Food	Dry Food
Portion Size	About 15g/0.03lb One Portion (Varies due to density of pet food)

In the Box



Lid*1



Food Tank*1



Desiccant
Compartment Lid*1



Feeder Base*1

Cannot be cleaned



Stainless Steel
Feeding Bowl*1



Bowl Tray*1



Desiccant*1



USB Cable*1



User Manual*1

Product Overview

1	Lid
2	Desiccant
3	Desiccant Compartment Lid
4	Food Tank
5	Food Outlet
6	Stainless Steel Feeding Bowl
7	Bowl Tray
8	Feeder Base Cannot be cleaned
9	Food Tank Lock Switch
10	Control Panel



Warning: Please keep the feeder base dry and do not wash it!

Scan the QR code to watch the video

1. Product assembly and cleaning



Scan the code to watch the product installation and cleaning tutorial

2. Install the APP & Log In




Download and install the "Smartlyn" App by scanning the QR code, or searching it on Google Play (Android)/ App Store (ios). After opening the app, if you don't have an account, please register one.
If you have already have, please log in directly.

Installation

Step 1 Connecting Power

1




2



● Insert the 5V power adapter (Not included) into the socket, plug in power cable of the feeder.

● Open the battery compartment at the bottom of the unit. Install 4 AA batteries (Not Included) in case of home outage (Dual power supplies are recommended for simultaneous use).

3



● When the indicator stays solid blue, it means that the device is using plug-in power and has been on.

4




● When installing the food tank, please assemble and follow the instruction as shown in.
● Food inlet should be the same direction as the dispensing outlet.

▲Note:

In Case of Power Outage: The device will automatically switch to battery power. While the app becomes disconnected and remote control is unavailable, the device will continue to execute preset feeding schedules configured during online mode. Note that feeding records cannot be viewed via mobile app during this period. Recommendation: Before extended absences (e.g., vacations or long trips), replace batteries to ensure sufficient charge. Always maintain dual power supply (AC adapter + batteries) to guarantee uninterrupted device operation.

Step 2 Filling Food Tank

7



● Fill food tank with dry pet food.

▲ Note:

1. Please fill food tank with dry pet food, and do not use canned, wet or moist pet food.
2. Recommend kibble size ranging from 5-12mm/0.12-0.47in in diameter.


Step 3 Assembling the Food Tray

8




- Make sure that the desiccant is in the desiccant compartment and cover it.
- Align the bulging of the food tray and holes in the base, and push upward to connect the two. Then place the stainless steel feeding bowl.

9

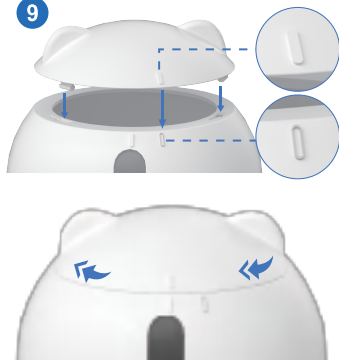

- Match the marking points on the lid and on the edge of food tank, and turn the lid clockwise to lock it.

Buttons

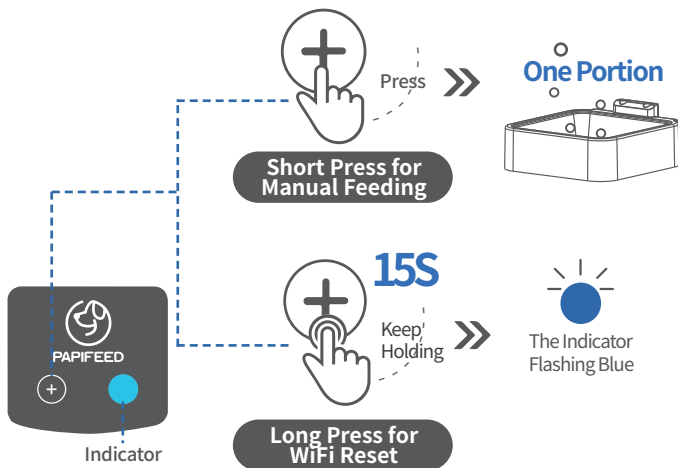


Indicator Light Descriptions


Indicator	Status
 Blue light blinking	Waiting for connection.
 Blue light solid	Connection successful.
 Green light solid	Connection timed out.
 Red light blinking	Indicates low battery (when using battery power only).

Note: If the connection times out, press and hold the + button for about 10 seconds to reset the device to the blue blinking light state for reconnection.


Connect to APP (only support 2.4GHz network, not 5GHz)

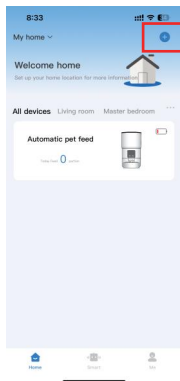


1. Open the APP homepage
- Add device

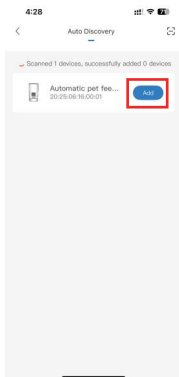


2. Add

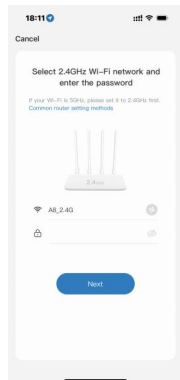

3. Select 2.4G WiFi and enter a good password. Next step

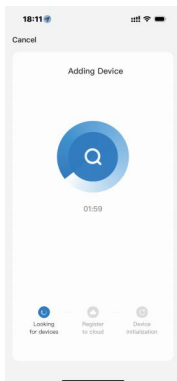

4. Wait for connection

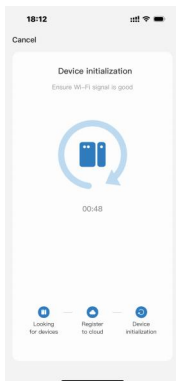


5. Connection
successfully




6. Click to finish


Feeding plan settings

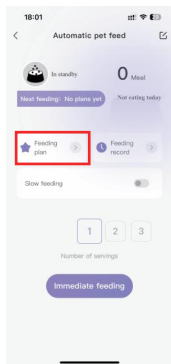


1. Choose a feeding plan

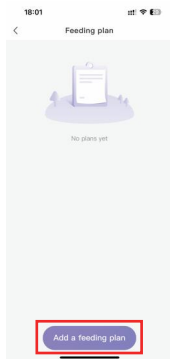


2. Add a feeding plan

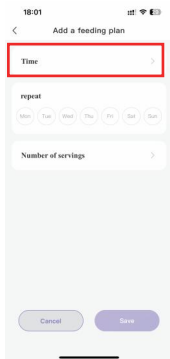


3. Select time
(note the difference between AM and PM)

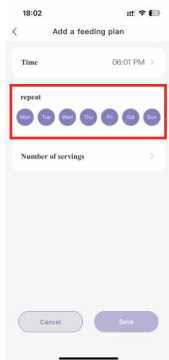

4. Select the week
(if you don't select the next time, you will not be able to deliver the food. Be sure to check the week!)

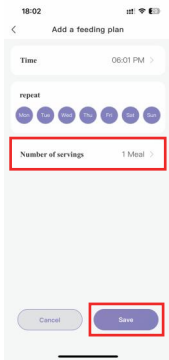


5. Select the number of feeding portions and click Save

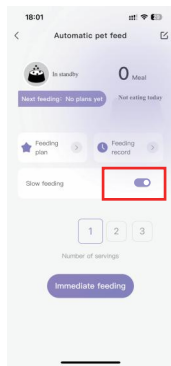


6. Slow feeding
(on to the right, close to the left): After opening, each serving of food will be 1 minute apart


Device Sharing

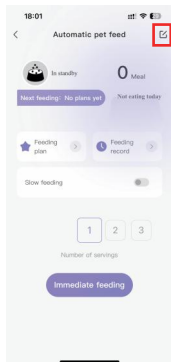


1. Open the device in the APP and click on the upper right corner




2. Select device to share

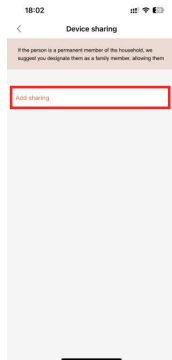

3. Add share

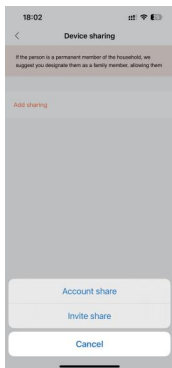

4. Select the sharing mode

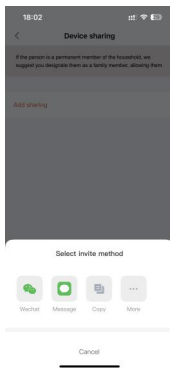

5. Copy the link to send to the other party

Cleaning & Care

We recommend to clean the feeder regularly for the health of your pet. The washable parts of the feeder are as follows: lid, desiccant compartment lid, food tank, bowl tray, stainless steel feeding bowl.




Problem	Solution
Can't connect the feeder to WiFi	● Keep the feeder and your phone close to your router, make sure the network signal is good.
	● Restart the feeder.
	● Follow the APP's instructions or our tutorial videos to add the feeder. There are more than one adding methods to choose from.
	● Contact our after-sales team via email for help.
WiFi connection is sporadic	● Keep the feeder close to your router, make sure the network signal is good, it is ideal to make it within 5 meters without obstacles and walls.(Depending on the coverage of the router you are using).
	● Make sure the power cord is properly at this point.
	● Reset the feeder and reconnect.
The indicators are off	● Check whether the electricity is cut off.
	● Check whether the indicator function is off on the App.
Why feed on the APP but no food dispensing from the feeder?	● To check if the food tank got enough food.
	● If the impellers have been rotated normally. (You can judge from the sound).
	● Suggest to feed again for few more times to avoid the signal delay(Internet delay) cause for the troubles.

Problem	Solution
Timed tasks are not executed correctly	● Make sure the feeder is not reset or powered off.
	● Check if the feeder is offline, when normally connected, the feeder indicator is always on blue.
	● Check whether the effective period of the timing task is set correctly.
	● Check whether the time zone of the device is the same as your time zone. Online status, click -  Settings , check the time zone of the device.
	● Reset the feeder and reconnect.
The feeder has disappeared from the home page	● Make sure the feeder is successfully networked, the indicator light should be blue.
	● Make sure the feeder is not connected by someone else, it is recommended to reset the feeder and connect it.

Reference for Meal & Portion Settings

▲ Note:

1. Below is the recommended amount of food your pet needs by each meal.
2. One portion of this feeder is about 15g/0.03lb.



If the pet fail to eat up the previous programmde meal, please reduce the next meal portion.

- CAT -

Age (Months)	1-2	2-4	4-6	6-8	8-12
Suggested Feed	20-30g	30-50g	50-70g	70-80g	80-90g
Weight (Months)	2-3kg	3-5kg	5-7kg	Pregnancy	Lactation Period
Suggested Feed	25-35g	35-55g	55-35g	70-110g	120-190g

- DOG -

Dog Weight	Normal Activity	Increased Activity	Dog weight	Normal Activity	Increased Activity	Vigorous Activity
2kg	39g	45g	22kg	250g	290g	329g
4kg	66g	76g	24kg	267g	309g	351g
6kg	89g	104g	26kg	274g	318g	361g
8kg	111g	128g	28kg	290g	336g	381g
10kg	131g	152g	30kg	305g	353g	402g
12kg	150g	174g	32kg	320g	371g	422g
14kg	178g	206g	34kg	335g	388g	441g
16kg	197g	228g	36kg	350g	405g	461g
18kg	197g	228g	38kg	364g	422g	480g
20kg	233g	270g	40kg	379g	439g	496g



Scan for more details
www.papifeedpet.com

THANK YOU FOR YOUR PREFERENCE FOR PAPIFEED

If you have any problems with our product, please feel free to contact us.

 Tel: **(1) 877-290-0617** (From Monday to Friday: 8 a.m.-5 p.m.)(PST)
 Email: [**service@papifeed.cn**](mailto:service@papifeed.cn)

FC CE RoHS



深圳市创智乐智能科技有限公司

品 名	PA-AMZ Smartlyn 猫耳喂食器 WiFi款 英文说明书
规 格	尺寸：100*140mm
材 质	80g书纸
印 刷	黑色字体
字 体	思源黑体
日 期	2025.8.4
修改	星星

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.ct.

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.