中

MONSTER™



Monster Airmars XKO06
真无线蓝牙耳机
使用说明书

产品参数

- 蓝牙版本 ---------- V5.4
- 传输距离 ---------- ≥10m
- 喇叭直径 ---------- Φ16.2mm
- 喇叭阻抗 ---------- 20Ω±15%
- 灵 敏 度 ---------- 124±3dB
- 频响范围 ---------- 50Hz-20KHz
- 电池容量（充电盒）---------- 400mAh 3.7V
- 电池容量（耳机）---------- 70mAh 3.7V
- 充电时间（充电盒）---------- ≈2.5小时
- 播放时间（耳机）---------- ≈10小时
- 配合充电盒播放时间 ---------- ≈30小时

包装清单

	耳机 *2		充电盒 *1
	使用说明书 *1		Type-C充电线 *1

产品示意说明





给充电盒充电

用Type-C充电线连接充电盒到5V电源适配器。



温馨提示：当关闭充电盒盖, 充电盒指示灯呈冰蓝灯闪烁, 请给充电盒充电。

指示灯指南

模式	描述	语音提示
开机	耳机冰蓝指示灯闪烁3次	“Power on”
关机	耳机红色指示灯长亮1秒	“Power off”
配对	主耳冰蓝红指示灯交替闪烁，副耳熄灭	“Pairing”
连接	耳机指示灯熄灭	“Connected”
断开	主耳冰蓝红指示灯交替闪烁，副耳熄灭	“Disconnected”
耳机低电	耳机红色指示灯闪烁	“Battery low”
充电盒给耳机充电	充电盒红色指示灯长亮	—
充电盒低电	充电盒红色指示灯闪烁	—
充电盒充电	充电盒红色指示灯长亮	—
充电盒充满	充电盒绿色指示灯长亮	—

产品操作说明

1. 开机
   方式一：打开充电盒上盖，取出耳机自动开机；
   方式二：长按左/右耳机的MFB按键约3秒，耳机开机。
2. 关机
   方式一：将耳机放回充电盒中，耳机自动关机；
   方式二：与蓝牙设备断开连接3分钟后，自动关机。
3. 配对
   步骤一：打开充电盒上盖，取出耳机自动开机；
   步骤二：打开智能设备的蓝牙列表，搜索“Monster Airmars XKO06”进行配对，连接成功后，你会听到提示音“Connected”

* 超出距离，在断开连接3分钟内，回到有效距离，自动连接设备。

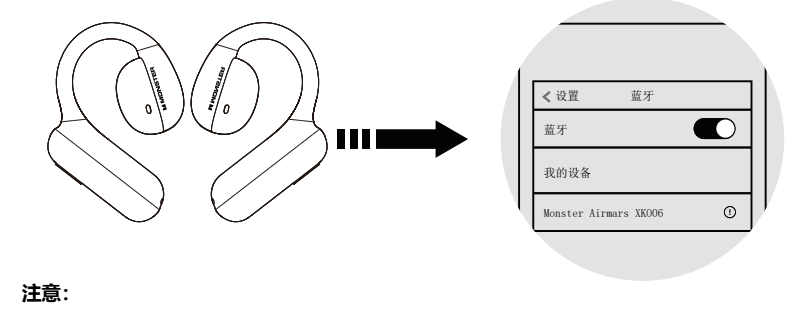

注意：
* 如果产品长时间不使用，应先充满电，并确保设备处于关机状态。
* 充电完成后，请将充电线拔出，避免长时间充电造成设备损坏。

触控键操作

常规模式



语音助手：长按2秒左耳机MFB
音量加：单击右耳机MFB
音量减：单击左耳机MFB

音乐播放模式



暂停/播放：双击左/右耳机MFB
上一曲：三击左耳机MFB
下一曲：三击右耳机MFB

电话免提



接听：双击左/右耳机MFB
挂断：双击左/右耳机MFB
拒接：长按2秒左/右耳机MFB

模式切换：已连设备



游戏模式：长按2秒右耳机MFB进入游戏模式
音乐模式：长按2秒右耳机MFB进入音乐模式

恢复出厂设置

1.耳机开机后未与蓝牙设备配对状态下，左/右耳机配对成功，连击左/右耳机5次后左/右耳机关机（清除配对和连接的所有信息）
2.开机连接状态，左/右耳机连击5次，3S内长按10S后关机（清除配对和连接的所有信息）。

注意

1.从充电盒取出耳机，不需按任何按键，耳机自动开机，连接或配对，耳机放入充电盒,充电盒将自动给耳机充电，耳机关机。
2.常清洁，寿命长，如长期不用，建议15天充电1次，延长电池寿命，耳机尾赛 充电部分经常用棉签酒精擦拭，能够帮助充电顺畅，避免接触不良，影响使用体验。
3.电池[电池组或电池组合]不得暴露在照明、烘烤或类似过热的环境中；禁止拆解、撞击、挤压或投人火中，若出现严重鼓胀、切勿继续使用；切勿置于高温环境中；浸水后禁止使用。
4.由于本款产品采用无线连接方式，在日常使用过程中，受到环境、手机品牌、使用行为等因素影响，可能在播放音乐过程中，会出现短暂、轻微的声音卡顿属于正常现象。

警告

1.长时间以高音量使用耳机可能会损害您的听力。建议只使用适当音量收听、通话和听音乐。
2.请不要冲洗或将产品浸入水中，以免造成故障。
3.不要自行拆卸产品及配件，以免导致损坏及保修失效。
4.请勿使产品受到强烈冲击或震动以免损坏。
5.请勿使用化学溶剂或清洗剂清洗产品。

Name of the Parts 部件名称	Hazardous Substances 有害物质					
	Pb 铅	Hg 汞	Cd 镉	Cr(VI) 六价铬	PBB 多溴联苯	PBDE 多溴二苯醚
Housing 外壳	O	O	O	O	O	O
Loudspeakers 喇叭单元	O	O	O	O	O	O
PCBA 电路板组件	X	O	O	O	O	O
Accessories 电源线，连接线	X	O	O	O	O	O

This table is compiled according to SJ/T 11364.
本表格依据SJ/T 11364的规定编制。

O: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
O: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限量要求以下。
X: Indicates that this hazardous subatance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.
X: 表示该有害物质至少在该部件的某一均质材料中含量超过 GB/T 26572 标准规定的限量要求。

FCC 声明

根据FCC规则第15部分，本设备经过测试，符合B类数字设备的限制。这些限制旨在提供合理的住宅设施中的有害干扰防护。该设备产生使用并可辐射射频能量，如果未按照规定安装和使用该指示可能会对无线电通信造成有害干扰。然而，有不能保证在特定安装中不会发生干扰。如果这个设备有对无线电或电视接收造成有害干扰，可通过转动来确定设备关闭和打开时，鼓励用户尝试通过一个或多个以下更多措施：

--重新定向或重新定位接收天线。
--增加设备和接收器之间的间距。
--将设备连接到与接收器不同的电路上的插座已连接。
--请咨询经销商或经验丰富的无线电/电视技术人员以获得帮助。

此设备符合FCC规则的第15部分。操作受以下两个条件限制条件：

（1） 本装置不得引起有害干扰。
（2）本装置必须接受任何接收到的干扰，包括可能导致意外操作的干扰。未经合规责任方明确批准的变更或修改可能使用用户对设备的操作权限失效。

FCCID：2A8PV-QSMXKO06

Environment Friendly Use Period (EFUP)
环保使用年限

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical produsts will not leak or mutate so that the use of these [substances] will not result in any severe environmental pollution, any bodily injury or damage to any assets.

这标志标识的期间（10年）是电子电气产品中有害物质在正常使用的条件下不会发生外泄或突变，电子电气产品用户使用该电子电气产品不会对环境造成严重污染或对其人身、财产造成严重损害的期限。

保修卡

尊敬的用户，本保修卡是您将来申请保修的凭证，请您配合销售商填写并妥善保管备用！

用户信息			
用户姓名		电子邮件	
联系电话		邮政编码	
通讯地址			
产品信息			
产品名称		产品型号	
产品条码/编号/批号			
销售商信息			
名　称			
地　址			
联系电话		邮政编码	
销售日期		发票号码	
备　注			

MONSTER™
合格证
产品编号：
生产日期：
检 验 员：
合格

英

MONSTER™



Monster Airmars XKO06
True wireless Bluetooth headphone
instruction manual

Product parameters

- Bluetooth version ---------- V5.4
- Transmission distance ---------- ≥10m
- Driver diameter ---------- Φ16.2mm
- Driver impedance ---------- 20Ω±15%
- sensitivity ---------- 124±3dB
- Frequency response ---------- 50Hz-20KHz
- Battery capacity(Charging case) ---------- 400mAh 3.7V
- Battery capacity(Headphone) ---------- 70mAh 3.7V
- Charging time(Charging case) ---------- ≈2.5 hours
- Music playtime(Headphone) ---------- ≈10 hours
- Music playtime with charging case ---------- ≈30 hours

Product Schematic Description

	Headphone*2		Charging case*1
	Instructions Manual*1		Type-C Charging cable*1

Product Schematic Description





Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.


Rated input: 5V⎓70mA(Headphone)
Rated input: 5V⎓400mA(Charging case)

TIPS: When the cover of the charging box is closed, the indicator light of the charging box flashes ice-blue, please charge the charging box.

Indicator guide

Mode	Describe	Sound prompt
Power On	Ice blue light of the headset blinks three times	“Power on”
Power Off	Red indicator on the headset will be on for 1 second	“Power off”
Pairing	Ice blue and red light flashes alternately in the main ear, and the secondary ear is extinguished	“Pairing”
Connected	Headphones LED indicator is off.	“Connected”
Disconnected	Ice blue and red light flashes alternately in the main ear, and the secondary ear is extinguished	“Disconnected”
Low Battery	Red indicator on the headset blinks	“Battery low”
Headphones placed in charging case	Red indicator of the charging case is steady on	—
Charging case low power	Red indicator of the charging case blinks	—
Charging case charged	Red indicator of the charging case blinks	—
Charging case fully charged	Green indicator of the charging box is steady on	—

Product operating instructions

1. Power on
   Method 1: Open the top cover of the charging case, take out the headset and turn it on automatically;
   Method 2: Long press the MFB button of the left/right headset for about 3 seconds to power on the headset.
2. Power off
   Method 1: Put the earphones back in the charging case and the earphones automatically turn off
   Method 2: The device automatically shuts down after 3 minutes of disconnection from the Bluetooth device.
3. Pairing
   Step one: Open the top cover of the charging case, take out the headset and turn it on automatically;
   Step two: Open the Bluetooth list of smart devices, search for "Monster Airmars XKO06" to pair, and the connection is successful After that, you will hear the "Connected" tone

* Headphones will try reconnecting to the device within 3 minutes when connection is lost.

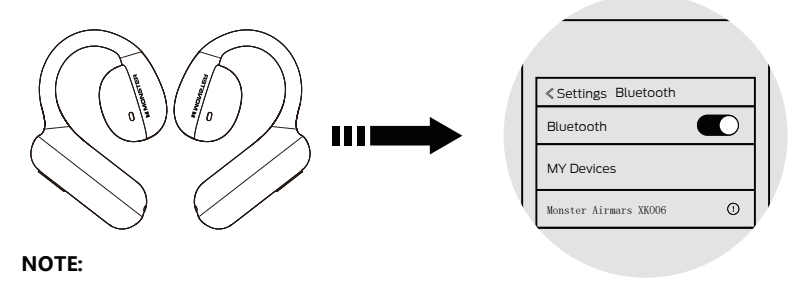

NOTE:
* Fully charge the headphones and power off before an intended not-in-use period.
* Unplug the charging cable after charging.

Operation

Normal



Voice Assistant: Press and hold left MFB for 2 S
Volume +: Click right MFB
Volume -: Click left MFB

Music playback



Pause/Play: Double click Left/Right MFB
Last song: Three hits left MFB
Next song: Three hits right MFB

Phone



Answer: Double click the left/right MFB
Hang up: Double click the left/right MFB
Reiect: Long press left/right MFB for 2 S

Mode switching : Device connected



Game mode: Press and hold right earphone MFB for 2 secondsenter Game mode
Music mode: Press and hold right earphone MFB for 2 secondsenter Music mode

Restore factory settings

1. If the headset is not paired with the Bluetooth device after the headset is turned on, the left/right headset is paired successfully. After clicking the left/right headset for 5 times, the left/right ear is turned off (all information about pairing and connection is cleared).
2. In the power-on connection state, tap the left and right headphones five times, hold down for 10S within 3S, and then power off (clear all pairing and connection information).

Precautions

1. Take out the earphone from the charging box, without pressing any button, the earphone will automatically turn on, connect or pair, put the earphone into the charging box, and the charging box will automatically Charge your headphones. Turn them off.
2. Often clean, long life, if not used for a long time, it is recommended to charge once every 15 days to extend battery life, and the charging part of the headset is often used with cotton swabs Alcohol wipe, can help smooth charging, avoid bad contact, affect the use experience.
3. The battery [battery pack or battery combination] shall not be exposed to lighting, baking or similar overheating environment; Do not disassemble, knock, squeeze or throw.In the fire, if there is serious swelling, do not continue to use; Do not place in high temperature environment; Do not use after soaking water.
4. Because this product adopts wireless connection mode, it is affected by environment, mobile phone brand, usage behavior and other factors in daily use.It may be normal to have a brief, slight sound delay during the playing of music.

Warnings

1. Do not use headphones at high volume for an extended perios of time.
2. Keep the headphones away from dust and water.
3. Do not disassemble the headphones and accessories, otherwise warranty will be voided.
4. Keep headphones away from any impact or vibration.
5. Do not use any chemical solvents or cleaning agent on the headphones.

Name of the Parts	Hazardous Substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Housing	O	O	O	O	O	O
Loudspeakers	O	O	O	O	O	O
PCBA	X	O	O	O	O	O
Accessories	X	O	O	O	O	O

This table is compliled according to SJ/T 11364

O : Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
X : Indicates that this hazardous subatance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver isconnected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference。
(2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
The device has been evaluated to meet general RF exposure reguirement. The device can beused in portable exposure condition without restriction

FCCID: 2A8PV-QSMXKO06

Environment Friendly Use Period (EFUP)

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical produsts will not leak or mutate so that the use of these [substances] will not result in any severe environmental pollution, any bodily injury or damage to any assets.

Warranty Service

Dear user, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill it out and keep it for future use!

User info			
User name		Email	
Contact number		Postal code	
Mailing address			
Product information			
Product name		Product number	
Product barcode / Serial number / Batch number			
Vendor information			
Name			
Address			
Contact number		Postal code	
Sales date		Invoice number	
Remark			

MONSTER™
Certificate of Approval
Product No:
Production Time:
QC:
PASS

文件名称	魔声XKO06说明书			材料	全书60g书纸+单黑印刷+骑马钉	单位	mm	厂商物料编号	变更履历	修改		日期	
文件尺寸	60X90mm（单P尺寸）			工艺	1C印刷　风琴折 	公差	±0.5mm	XXXXXXXXX		审核		日期	
设计日期	2024/02/19	文件版本	2024V01			比例	1:1			批准		日期	