

ETEREO TC²

e·Buddy

사용설명서
(Manual)

Content

Product Overview and Volume Up Kits	11
--	----

Product Specifications	12
-------------------------------	----

ETEREO TC²

Buttons control / Power Buttons	14
---------------------------------	----

Volume Button / Bluetooth Connection (Smartphone connection)	15
---	----

Bluetooth Connection (e-BUDDY)	16
--------------------------------	----

e · BUDDY

Buttons Control / Power Function	17
----------------------------------	----


Volume Control	18
----------------	----

Additional Statements	19
------------------------------	----

Product Features



Headset



USB Cable



Product
Specifications



CARE4EAR
Specifications



e-BUDDY
(*Option)

Volume Up Kit (*Option)



Bone-Wings



C-TYPE
Earphone



Bellows
Microphone

Product Specification

ETEREO TC²

Pairing Device Bluetooth Profile:

Bluetooth v5
(HFP 1.7 HSP 1.2 A2DP 1.3
AVRCP 1.6 PBAP 1.2)

Operating Range

10m

Headset Frequency Response Range

230Hz ~ 10,000Hz

Low Power Design

- Reduced power consumption by miniaturization PCB
- Approximately 20% usage time improved as compared to existing products.

EMC MIC

-38dB

Equalizer

5 band EQ Frequencies

Battery Capacity

220mAh (110mAh * 2)
Applied battery use the balancing technology.
Running time

- Normal Mode – 6 hrs.
- Hearing-aid Mode – 6 hrs.

Charging Time: 2 hrs.

Product Specification

e·BUDDY

Pairing Device Bluetooth Profile:

Bluetooth v5
(HFP 1.7 HSP 1.2 A2DP 1.3
AVRCP 1.6 PBAP 1.2)

Operating Range

20m

Equalizer

Separate right/left
vibrator equalizer

MEMS MIC

42dB $\pm$ 3

Battery Capacity

950mAh Applied Large Capacity

Battery Running time

- Normal Mode – 24 hrs.
- Charging Time: 2 hrs

Design

Headset Net Weight : 65g

Headset Dimension :

50*86*17(mm)

Audio Input Option

Bluetooth, AUX(3.5mm)

Additional Function


Temperature Sensor :

2°C to 150°C


OLED

1.3inch distinct Display

Buttons Control

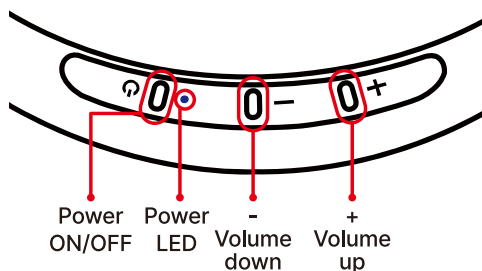

Power Buttons



• Press Once Shortly

• Hearing aid mode

- Press the button shortly you will hear the voice guidance instruction and LED flicker in every 5 seconds.

• Headset mode

- Press the button once shortly you will hear the voice guidance instructions and the green LED continues to flicker in every second.


Press and hold (3secs)

The power off.



- **Press once to receive the call** - Answer the call
- End the call

Volume Button



● - ● + **Press short**

+, - tap to adjust volume.

Bluetooth pairing mode


Press and hold the Vol - (MINUS) button for more than 3 seconds. You will hear the voice guidance.

Press and hold + button for 3 seconds

- To run BTS function
- Exit BTS function


Bluetooth Connection

(Smartphone connection)




Power Button

When the headset is in power-off state, press and hold the power button for more than 3 seconds to turn on.



Pairing Mode


Press and hold the -(MINUS) button for more than 3 seconds to enter pairing mode. (It is residual if the connection is wrong).



Smartphone


Go to setting
 > Connection
 > Bluetooth
 > Find Device
 > Select TC2

Bluetooth Connection(e·BUDDY)




Power Button

When the headset is in power-off state, press and hold the power button for more than 3 seconds to turn it on.



Hearing Aid Mode

Press and hold the power button and check if the green LED flickering in every 0.5 seconds. (Follow the instruction given in page 14)



Press and turn on the power of e-Buddy.




Press and hold the power button (e·Buddy) briefly to set it to master mode (continued in page 17)

Button Control



Power Function




Press and hold the button for 3 second

The power will on and off

Press the button shortly

Switch to Toggle
Switch to Bluetooth Mode
(Headset Connection)

Volume Control



- **Press once**

Press (right/left) preferred button to adjust volume.

- **Press left plus (+) button and hold it for more than 3 second**

To run the BTS function.

ON/OFF sign displays on screen.

- **Press left minus (-) button and hold it for more than 3 second**

Enter to the EQ change mode.

(For more information, please check our website)

- **Press right plus (+) button and hold it for more than 3 second**

To initialize the Bluetooth pairing function.


Enter the key setting mode

- **Press right minus (-) button and hold it for more than 3 second**

Enter to the EQ change mode.

(For more information, please check our website)

Addition Statements

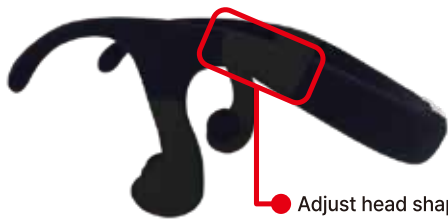

Adjust head shape and size, fold the joint while holding the band.

* Forcefully pressing and tugging parts is associated with risk of breakage.

Attentions

- ▶ The product has a built-in battery.
Be sure to charge the built-in battery before use.
- ▶ The battery charger takes two hours to charge.
- ▶ Never attempt to remodel or disassemble the headset or e-BUDDY. It causes major malfunctions or fails in function.
- ▶ Keep it out of moisture and in a dry place.
- ▶ The product has a built-in lithium-ion battery.
 - Avoid intense radiation such as sunlight or fire to prevent products from exploding.
- ▶ High charge after fully charged and fully discharged will gradually reduce cycle life of batteries.

FCC Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance Information : This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

QR Barcode is extremely easy to use then app links.
Open the application then enter the serial number
given in warranty card to use the application.



GET IT ON
Google Play



Download on the
App Store



mijkorea.com



MIJ Youtube

Head Office.

24461 #204, 882, Baksa-ro, Seo-myeon,
Chuncheon-si, Gangwon-do, Republic of Korea



+82-33-252-8995