

Switch between the headphone and phone

Press the Volume button "+" for about 2 seconds during a call, the call will be switched to the mobile phone, redo this operation again, the call will be switched to the headphone.

End current call and answer new call

When a new call rings during a call, press the Multifunction button to answer new call and end current call simultaneously.

On hold current call and answer new call

When a new call rings during a call, hold the Multifunction button for 2 seconds to hold current call and answer new call. To switch between held call and active call, Hold the multifunction button for 2 seconds.

Music

(Need media player support)

Music play / pause

Press Multifunction button once to play / pause music. (Some phones may require you to start a media player first)

Track back/forward

Press Track back once to skip track backward, press Track forward once to skip track forward.

Switch Music and Call

When a call rings during a music playing, the music automatically pauses to allow you to answer or ignore the call. Once the call is ignored or ends, the music is resumed.


EQ setting

During a music playing, double–press Multifunction button to cycle through EQ setting: original, bass, treble, rock, pop.

More features

Battery Indicator


When the headphone is connected to a device with iOS system, a battery indicator will appear at the upper right of the system, indicating battery status of the headphone.



Listen music via 3.5mm Jack

(Call functions are disabled in this mode)

- Connect the headphone to a 3.5 mm jack connector on your mobile device or PC using the supplied music cable.
- Turn on the music player on your mobile device or computer, you enjoy music from your headphone.

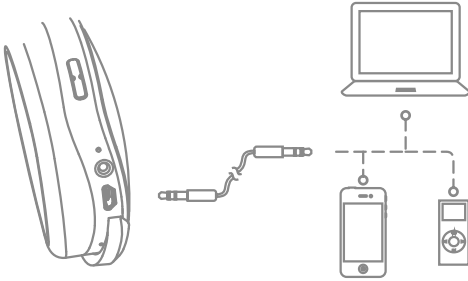


Charging

Your new headphone has enough power to pair and make a few calls.

When battery is low, you will hear the voice prompt "Battery low ". It takes 2.5 hours to fully charge the headphone. While charging, the battery indicator light is red, the indicator light stays blue charging is complete.

Note: The lifetime of the battery will be significantly reduced if your device is left uncharged for a long period. We recommend that you recharge your device at least once a month.

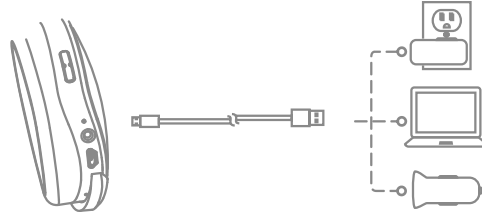

Power off

Press and hold the Multifunction button for about 3 seconds. The red LED will flash three times rapidly before turning off. A voice prompt "Power off" will appear, indicating the headphone has been turned off.

Hardware reset

Press and hold the Multifunction button, connect the headphone to a USB charger, the LED indicator flashes red, hardware reset is done in about 2 seconds.

canjice


Bluetooth headset


FCC ID:2AAIH-HB03

Headblue 3 INSTRUCTION

Start here

Following items are included

3.5mm audio jack

USB cable

Product overview



Basic operation

Volume adjust

Press the volume button "+" or "-" to turn volume up or down. you hear "beep" voice prompts once reach the maximun volume, you hear "toot" voice prompts once reach the minimun volume.

LED indicator and voice prompts

Instruction	LED status	Voice prompts & Alerts
Power on	Flashes blue 3 times	Power on
Power off	Flashes red 3 times	Power off
Pairing	Flashes red and blue alternately	Pairing
NFC pairing	Flashes red and blue alternately	Pairing
Standby	Flashes blue twice every 5 seconds	Connection successful
Disconnect	/	Connection lost
Incoming call	Flashes blue continuously	/
Battery low	Flashes red twice every 2 seconds	Battery low
Charging	Stays red while charging Stays blue once fully charged	/

Pairing

Pair one phone

- Press and hold the Multifunction button for about 5 seconds to entel pairing mode, the LED indicator flashes red and blue alternately. Voice prompts "Pairing".
- Activate Bluetooth on your phone and set it to search for new devices.
- Select "Headblue3" . If you phone asks, enter 0000 (four zeros) for the passcode or accept the connection. The LED indicator stops flashing red and blue once successfully paired. Voice prompts "Connection successful".

Pair another phone

Multipoint technology enables you to pair another phone and take a call from either.


To pair with another mobile phone, follow the steps for "Pair One Phone" . After pairing successfully, restart the headphone to connect to 2 paired mobile phone automatically.



NFC pairing

Press and hold Multifunction button for 2 seconds to turn on Bluetooth headset, after 5 seconds, hold an NFC device against the NFC zone of the headphone. The LED indicator flashes red and blue, you hear voice prompts "Pairing", the LED indicator stops flashing red and blue once successfully paired, you hear voice prompts "Connection successful".

NFC detection area



Call

Answer a call

Press the Multifunction button.

End a call

Press the Multifunction button.

Reject a call

Press and hold the Volume button "+" for about 2 seconds.

Redial the last call

Double–press the Multifunction button in standby mode. The mobile phone will redial the last call number.

Mute on/off

Press the Volume button "-" for about 2 seconds to mute on/off.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.