

For iOS scan and download the APP



For Android scan and download the APP



Product Manual

Dear Client:
Thank you for purchasing the BB SPEAKER Ceiling Light.
Before installing this product, please read the safety instructions thoroughly.
Save this manual for future use.

Safety Precautions:
To reduce the risk of personal injury and property damage, please read all warnings and instructions.

 **Warning:** May result in death and serious injury


 **Caution:** May result in injury and property damage

    What can not be done

 **Must be followed**

 **Warning**  **Forbidden**

- **Please strictly follow the instructions for installation.**
Product being installed improperly may lead to falling, electric shock, fire and other accidents.
- **This fixture is to be installed horizontally on the ceiling only.**
Avoid fire, injury and other accidents caused by falling

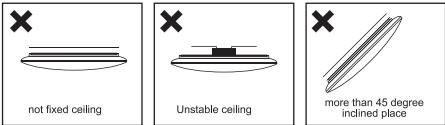

 **Do not disassemble the fixture**

- **Do not transform the fixture or replace the parts.**
Avoid fire, electric shock, fixture falling and other accidents caused by improper use.

 **Must be followed**

- **The power supply must not exceed the defined limits (Rated Voltage: 220V +-10%, Frequency: 50Hz)**
Prolonged use beyond the rated voltage may lead to overheating of the fixture which causes fire.
- **Please do not connect the fixture with other dimmers**
To avoid failure, please do not use the fixture together with wall switch with dimmer function.
- **When failure occurs, please shut off the power quickly and contact the dealer.**

 **Caution**  **Must be followed**

- **Before installation, please make sure all packaging accessories and tapes have been removed from the fixture to prevent fires.**

 **Keep dry**

- **This fixture is non-waterproof. Please do not use in the bathroom and outdoors or where moisture is evident.**
Avoid defective insulation, causing fire, and electric shock accident, etc.


 **Do not touch**

- **Please do not touch the LED and its surrounding parts when it is lightened up or has just been turned off.**
Avoid burn.
- **Please do not place objects with high temperature right under the fixture.**
Do not place electric heater, gas stoves etc. under the fixture to avoid fire danger.

 **Forbidden**

- **Please do not look directly at the LED light for a long period of time.**
Avoid causing discomfort in the eyes.

Name of each component and installation method: before installation, make sure the power supply is cut off to prevent electric shock.

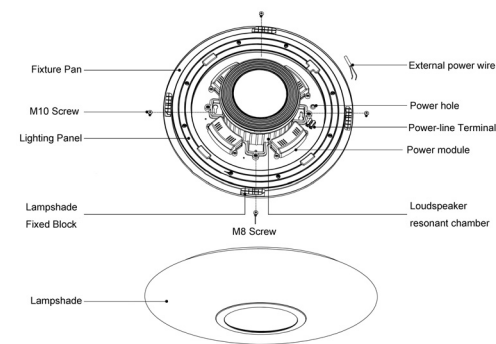

Caution

1.Preparation Before Installation

- 1 As the fixture is large, it is suggested to have two people installing together. This is to avoid the fixture falling due to improper installation and causing damages.
- 2 If you have purchased more than one remote control fixtures, please read Remote Control Instructions before installation.
- 3 Remove the screw stick in the fixture pan, fix the screw into the ceiling after the fixture installation distance is confirmed. Refer to (Specifications) for installation distance. In order to ensure the fixture pan is installed successfully, do not twist screws into the ceiling fully, and keep an appropriate distance between the screws and the ceiling.
- 4 Before installation, hold both sides of the lampshade with two hands, rotate the lampshade counter-clockwise and take off the lampshade.

2. Installing Fixture Pan

- 1 Before installation, one person puts the power cable through the power hole of the fixture pan. while the other person holds both sides of the fixture pan, and puts the fixture pan installation hole into the screws after alignment.
- 2 If the fixture pan has decorative frame, do not directly hand the decorative frame when installing to avoid damages. Rotate the fixture pan clockwise as indicated by the arrow. Stop when you cannot rotate anymore and the bottom of the installation hole is reached.
- 3 Use a screwdriver to twist the screws into the ceiling fully to fix the fixture. If the installation is not done properly, it will cause the fixture to loose and fall, which causes damage.

3.Connecting the Power Wire

Plug the power wire into the Terminal Blocks, use screwdriver to screw it down and fix it. To ensure safety, make sure to connect the earth wire before connecting the power wire.

4. Installing the Lampshade

- 1 Hold both sides of the lampshade with two hands and set the lampshade into the fixture pan. Note: You need to avoid the protuberant part inside the fixture to make contact with the fixed block and the hook of the lampshade.
 - 2 Rotate the lampshade clockwise until lampshade can not be rotated anymore, meaning the installation is firm. Note: Please hold the firm parts of the lampshade when rotating. Avoid using too much strength which may cause damage and falling of the lampshade.
- Improper installation can cause lampshade falling.

TOOLS REQUIRED FOR INSTALLATION AND ASSEMBLY (not includes):

Drill	Drill bit	Phillips screwdriver	Pencil	Hammer
Wire cutters	Wire strippers	Electrical tape	Safety goggles	

BB Speaker BC-01 parameters

Product Dimensions	ø583*H116MM
Rated Wattage	RGB, LED 35W, Speaker 25W
Color Temperature	3000K-6500K
Luminous Flux	500-2800LM
Input Voltage	AC110V-240V, 50/60Hz
Bluetooth Standard	Bluetooth V4.0
Distance of Bluetooth	≤15M (spacious environment)
Frequency Range	2.4GHz

APP instructions

 Bluetooth Bluetooth Connection, Disconnecting Bluetooth	 Light Warm White/ Cold White light dimming, RGB light dimming	 Music Playing music
 Scene Change different light scene according to different environment		 Settings Alarm Clock setting, Re-name Bluetooth, Turn off the light automatically setting, Products description, User feedback, Contact us

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.