

Clarion

FX575

Frequency Range:

FM:87.9~107.9 MHz(USA) / 87.5~108 MHz(LAM & EUR)

AM:530~1710 KHz(LAM & USA) / 522~1620 KHz(EUR)

DC 12V $\equiv$ 15A Negative Ground

Speaker Impedance:4-8Ohms

Interference Absorption Circuit

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and



(2) This device must accept any interference received, including interference that may cause undesired operation.



FCC ID: 2ABGY-FX575

IC: 12359A-FX575

PIN	FUNCTION	COLOR	PIN	FUNCTION	COLOR
A1	SPEED PULSE	ORANGE	B1	SPKR REAR RIGHT (+)	VIOLET
A2	BACK GEAR	PINK	B2	SPKR REAR RIGHT (-)	VIOLET/BLACK LINE
A3	PKB	ORANGE/BLACK LINE	B3	SPKR FRONT RIGHT (+)	GRAY
A4	ACC(+)	RED	B4	SPKR FRONT RIGHT (-)	GRAY/BLACK LINE
A5	AMP/ANT-B+	BLUE	B5	SPKR FRONT LEFT (+)	WHITE
A6	ILL(+)	BROWN	B6	SPKR FRONT LEFT (-)	WHITE/BLACK LINE
A7	BATT(+)	YELLOW	B7	SPKR REAR LEFT (+)	GREEN
A8	GROUND	BLACK	B8	SPKR REAR LEFT (-)	GREEN/BLACK LINE
C1	CAN LOW	WHITE	C11	AV-GND	BLACK SHIELD WIRE
C2	CAN-HIGH	GREEN	C12	AV LEFT	
C3	GND	BROWN	C13	DTV-RX	WHITE
C4	SWRC-A	RED	C14	DTV-TX	GREEN
C5	SWRC-B	PINK	C15	GND	BLACK
C6	SWRC-GND	BLACK	C16	DTV RIGHT	
C7	EXT-MIC-SIG		C17	DTV VIDEO IN	
C8	EXT-MIC-GND	BLACK SHIELD WIRE	C18	GND	BLACK SHIELD WIRE
C9	AV VIDEO IN		C19	DTV LEFT	
C10	AV RIGHT	BLACK SHIELD WIRE	C20	DTV-VCC	RED

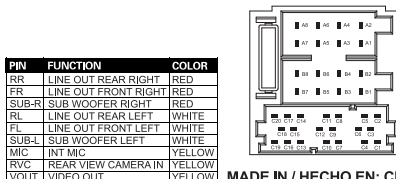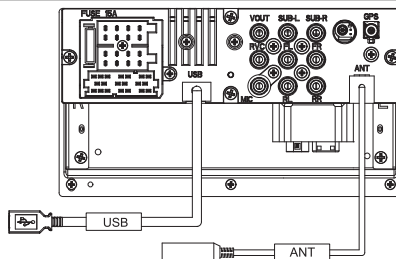

MADE IN / HECHO EN: CHINA

76.3mm

127mm

FX-575主机贴纸 白底黑字印刷

日期2025. 3.31

FCE Model - SPEC LABEL版本

Location

