尺寸：80x80mm
材质：封面157g铜版纸,内页80g书写纸

SEE ME HERE

SEE ME HERE



BV310

USER MANUAL ▶

SEE ME HERE

Preface

Dear user:
Thank you for choosing our Bluetooth speaker. Please view the manual for better operation. Our bluetooth speaker gets fashionable appearance, excellent voice effect, integrated multifunction, own patent in whole series. The leading audio technology makes you feel wonderful music when you are at home, on trip or at business work, providing the excellent voice effect for computer and any other music players.

All rights reserved by Shenzhen See Me Here Electronic Co.,Ltd.

It's not allowed to copy comment from the manual.

The product specification bases on newest update.

Catalog

Part 1: Get Started
1. Matters need attention
2. Standard configuration
3. Product features
5. Specification

Part 2: Operation
6. Keys and components
9. Power on and play it
11. Connect with other bluetooth devices
12. Handsfree call
13. Charge
14.FAQ

Warranty Card

Get started

Matters need attention

◎Please keep this product in normal tempreture environment.
◎Please don't expose this product to rain or wet areas.
◎Keep the product away from droping down or damage.
◎Do not disassemble、repair、change its struture on yourself.
◎Please charge it with a rated voltage charger.
◎Please attention to the volume when you enjoy the music.
◎The warranty will be invalid when product was disassembled.

⚠ **Note:**
1.Please use the same type of battery avoiding explosion or other dangers.
2.Don't expose the battery to sunlight or other high tempreture environment.

Standard configuration

Your product includes below accessories



① Bluetooth speaker



② USB cable

SEE ME HERE
BV310

③ User manual/Warranty card

Product features

- ◆ Built-in LED light,Change color automatically in 3 different modes.
- ◆ Built-in 3.7V/1600mAh Li-on battery
- ◆ Bluetooth ,two way conversation.
- ◆ Support bluetooth one key reconnection
- ◆ Shut down after 10 minutes no conncection
- ◆ Support play ios system ring tone,default ringtone when in other system(like Android)

Specification

Appearance specification	
Input port	Micro USB port
Dimension	W112×D62.5×H62.5 (mm)
Net weight	198g(include battery)





Specifacation

Basic	
Speaker Type	Bluetooth speaker
Speaker structure	Single track
Volume control	Key
Functions	Bluetooth,LED light
Power supply	Built-in 3.7V/1600mAh li-on battery

Technical	
Output power	3W MAX
Frequency	50HZ-18KHZ
USB	USB2.0 Compatible with USB1.1
Charging time	DC 5V⎓500mA 3-3.5hours
Playing time	6-8 hours when medium volume

Operation

Key functions

Get to know the speaker buttons and each part



① **Power key:** Long press " Power on/off",default is bluetooth mode; Short press " Power on/off" is Playing/ Pause; Short press "Power"key and "Volume" key at the same time (either "+"or"-") is for disconnecting bluetooth (then if short press "Power"key,it can be reconnected); When power on

② **LED Controlling key:**

1) In bluetooth mode, LED 3 status("Breathing", "grabbing color", "rhythm")

2) When no playing music,short press LED key,can switch into "Breathing", "grabbing color"

3) When playing music,short press LED key,can switch into "Breathing", "grabbing color", "rhythm"

4) Long press LED Key then LED light on or off,when it is off, the red light will be put out;Short press can turn on again.

③ **Volume" + "/Next:** short press"+" for incressing volume (when maximum,will be "DI"prompt tone); Long press it for next music.

④ **Volume "-"/Previous:** short press"-" for reducing volume; Long press it for previous music.

⑤ **Built-in Mic**

⑥ **Reset button:** Freezing condition,press it to restart

⑦ **USB port:** USB cable plug,enter charging mode

Low battery prompt:
When power is lower than 3.4V, "didi"prompt tone coming out,please charge .

Bluetooth Connection



1 Press 2 seconds to power on

Power on: Get into Bluetooth mode after "Ding-ding".



2 Bluetooth Connection

Turn on bluetooth on mobile or other music players and search "BV310" click to connect.

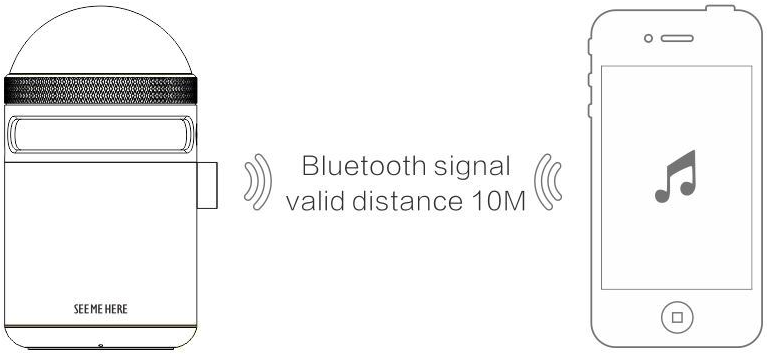

3 Connect and play

The speaker says, "Ding-Dong-Ding", and the blue indicator light up, and then you can enjoy the music with this speaker .

1. Devices Bv310 If need password , please input "0000" and confirm to connect

2. The Bluetooth can reconnect the last paired device automatically

Connect other Bluetooth devices

1 Bluetooth disconnect



Synchronous long press both ⏸ and + or press button ⏸ and — can disconnect current Bluetooth device. Then the speaker enter pairing mode, white LED flash and the voice prompt is "deng",Not connected.



Turn on the Bluetooth function on smart phone or other devices, then search "BV310" to connect.

2 Bluetooth reconnect

Short press button ⏸ to reconnect the last paired device.

Handsfree call

1 Speaker and mobile phone on connected status



The music play will be paused when a call comes in, short press ⏸ to answer or end the call, long press to reject the call

USB media play mode

[illegible] PC etc. then double click ⏸ with a sound "Di" to enter the USB media play mode, then play music from your computer. Double click ⏸ to shift to other mode

Charge

Way1: Charge with adapter on or above DC5V⎓500mA

Way2: Connect to laptop, PC

Charging when the speaker power off: the red breath LED blinking when charging, the light turned off when full charged.

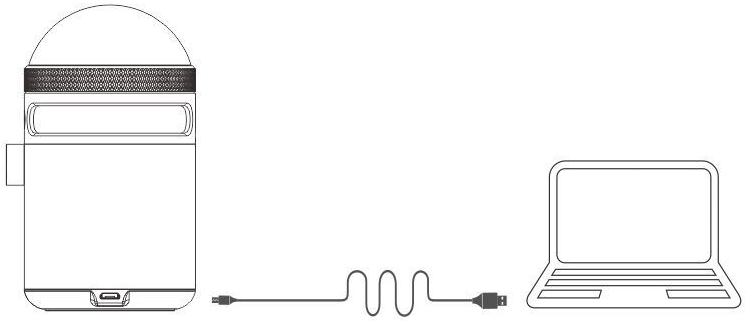

Connect the speaker to laptop, PC then start charging

Note: Please charge if the speaker is unused for long time.

FAQ

Questions	Settlement
Fail to Bluetooth connect	1,Restart the speaker
	2,If need password, please input"0000"
Muisic play break	1,Please check the Bluetooth connection valid distance or if something cut off the signal
No sound	1,Check the volume adjustment on the speaker
	2,Check the speaker is in mute or paused
Fail to turn on	1,Check if the power is low
Speaker froze	1,Insert a thin metal stick to reset the speaker

---

FCC Certification Requirements

Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

Warranty Card

Please fill up the "Warranty card" and keep it well after purchasing the product

Model: ____________________

Purchase date: ____________________

Name: ____________________

Address: ____________________

Telephone: ____________ **Zip code:** ____________

Dealer: ____________________

Address: ____________________

Principal: ____________________

Telephone: ____________ **Zip code:** ____________

Authorized stamp: ____________________

Period of validity: 1 year since purchase date

Note:This warranty is null and void if the unit or its components therein have been damaged or tampered by improper handling use or unauthorized repair.