

CRUISE3 ANT Test Report

No. 78, Chenggong Road, Yushan Town, Kunshan City, Suzhou City, Jiangsu Province, China


一、ANT information

customer		SEUIC	项目名称 Model	CRUISE3
NO.	ITEMS	DETAILS		
1	frequency band	ANT1/ANT2: GSM: Qual Band(850/1900Mhz) WCDMA: Band2, Band4, Band5 TDD-LTE: Band38, Band41, Band48 FDD-LTE: Band2, Band4, Band 5, Band7, Band12, Band13, Band14, Band17, Band25, Band26, Band66, Band71 5G SA: n2/n5/n7/n12/n13/n14/n25/n26/n38/n41/n48/n66/n71/n77/n78, ANT3:B2/4/38/41,n2/4/38/41/77/78 ANT4:B2/4/38/41,n2/4/38/41/77/78 WIFI/GPS/BT : ANT0:WIFI2.4G/5.8G/6G/7G/GPSL1 WIFI/GPS/BT : ANT1:WIFI2.4G/5.8G/6G/7G/GPSL5 NFC:13.56MHZ RFID:ANT2		
2	customer	SEUIC Technologies Co., Ltd.		
3	manufacturer	Suzhou Huimi Communication Technology Co., Ltd		
4	Available antenna space	/		
5	Feed point type	pin+LDS		
6	Part affect antenna performance	SCANNER, SPEAKER		
7	ANT type	Internal ANT		
8	NOTE			



二、ANT Passive

Return Loss--ANT1

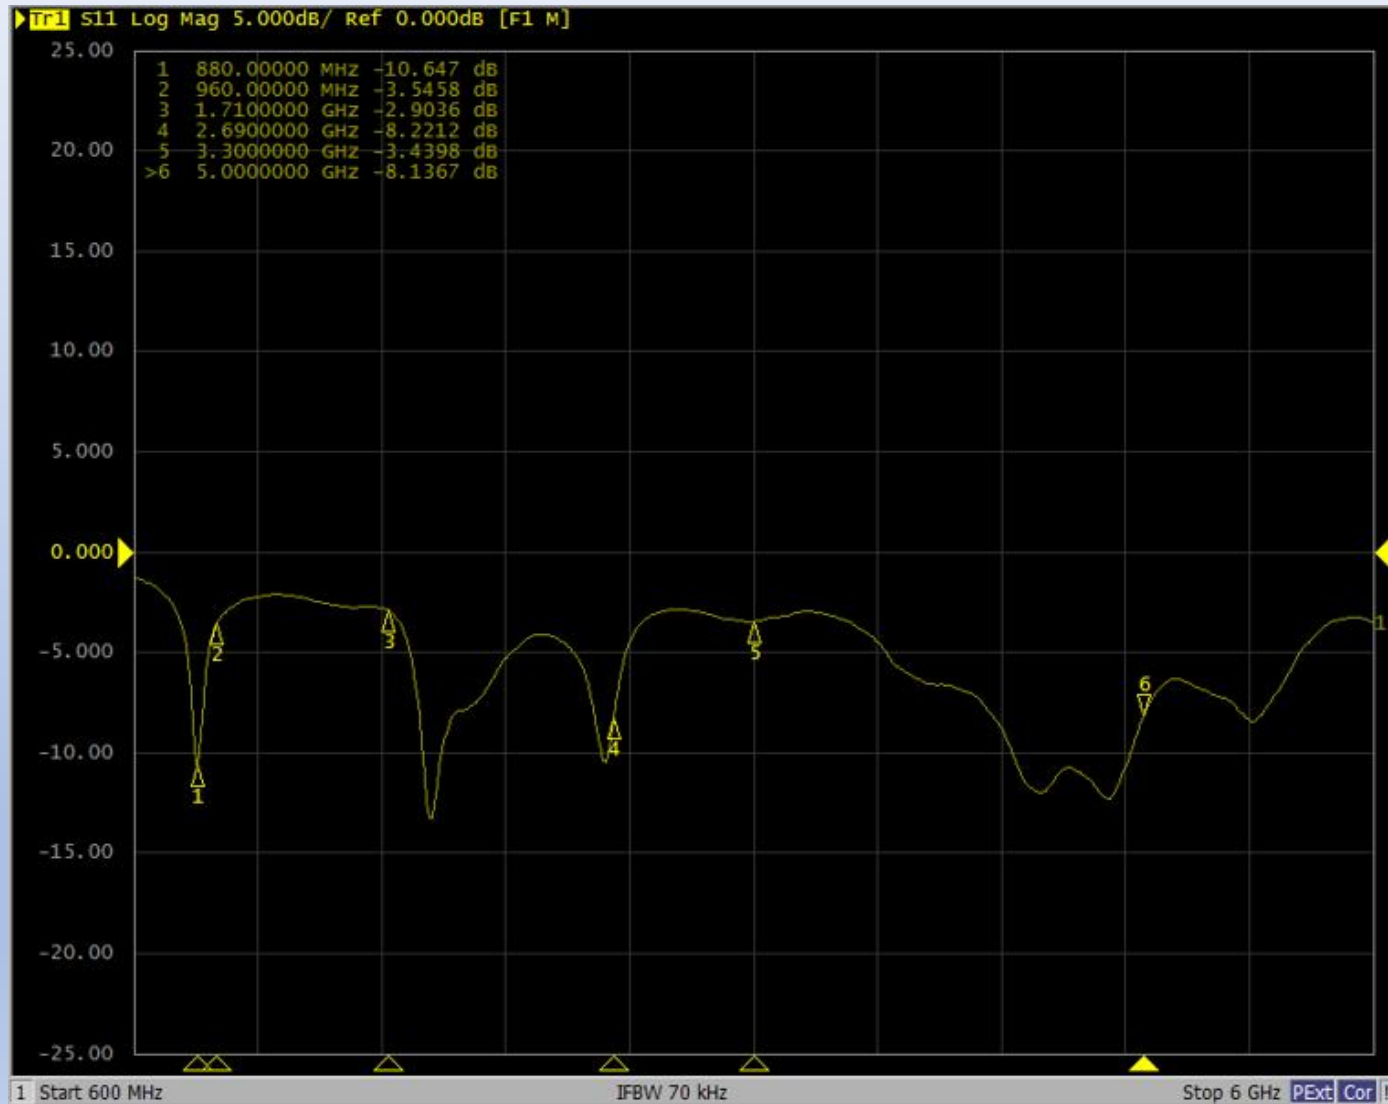

二、ANT Passive





Eff/Gain--ANT1

RF1				RF2				RF3				RF4				RF2+RF3			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
810	21.33	-6.71	-4.66	700	21.04	-6.77	-3.71	610	15.23	-8.17	-6.21	880	26.89	-5.7	-5.12	3300	9.02	-10.4	-9.18
820	22.2	-6.54	-4.17	710	20.16	-6.96	-4.26	620	14.28	-8.45	-6.32	890	27.32	-5.63	-5.36	3350	9.21	-10.3	-8.64
830	25.14	-6	-3.36	720	21.21	-6.73	-4.21	630	16.21	-7.9	-7.05	900	28.15	-5.5	-4.35	3400	10.14	-9.93	-7.75
840	29	-5.38	-2.52	730	24.62	-6.09	-3.73	640	15.33	-8.14	-6.88	910	27.59	-5.59	-3.94	3450	10.51	-9.78	-7.18
850	33.39	-4.76	-1.76	740	23.96	-6.21	-4.09	650	17.25	-7.63	-7.12	920	28.13	-5.5	-2.66	3500	11.23	-9.49	-6.57
860	33.72	-4.72	-1.74	750	22.11	-6.55	-4.34	660	17.36	-7.6	-6.25	930	30.3	-5.18	-2.13	3550	11.79	-9.28	-6.38
870	31.07	-5.08	-2.2					670	18.25	-7.38	-5.88	940	29.24	-5.34	-2.29	3600	11.33	-9.45	-6.75
880	30.67	-5.13	-2.33					680	19.56	-7.08	-5.74	950	26.07	-5.83	-2.93	3650	13.51	-8.69	-5.96
890	26.54	-5.76	-2.76					690	20.4	-6.9	-5.45	960	17.94	-7.46	-4.8	3700	11.97	-9.21	-7.02
900	20.77	-6.83	-3.64					700	19.77	-7.03	-5.88	1710	33.25	-4.78	-2.29	3750	12.34	-9.08	-7.03
												1730	32.78	-4.84	-1.45	3800	13.07	-8.83	-6.7
												1750	39.98	-3.98	-0.42	3850	14.12	-8.5	-5.82
												1770	46.22	-3.35	0.16	3900	17.43	-7.58	-4.5
												1790	45.42	-3.43	0.26	3950	16.64	-7.79	-3.75
												1810	41.8	-3.79	0.03	4000	23.26	-6.33	-3.25
												1830	39.02	-4.09	-0.23	4050	28.42	-5.46	-2.51
												1850	39.02	-4.09	-0.27	4100	30.28	-5.19	-1.78
												1870	39.02	-4.09	-0.34	4150	34.08	-4.67	-1.85
												1890	37.22	-4.29	-0.6	4200	38.79	-4.11	-1.44
												1910	40.41	-3.93	-0.23	4250	45.58	-3.41	-0.28
												1930	38.57	-4.14	-0.34	4300	40.93	-3.88	-1.29
												1950	40.44	-3.93	0.38	4350	40.32	-3.95	-0.98
												1970	40.81	-3.89	0.77	4400	43.69	-3.6	-0.23
												1990	36.24	-4.41	0.38	4450	44	-3.57	-0.01
												2010	37.74	-4.23	0.84	4500	45.47	-3.42	0.02
												2030	40.83	-3.89	1.53	4550	44.28	-3.54	0.19
												2050	42.68	-3.7	1.88	4600	42.95	-3.67	-0.12
												2070	46	-3.37	2.09	4650	43.68	-3.6	0.12
												2090	53.24	-2.74	2.69	4700	38.22	-4.18	-1.11
												2110	38.87	-4.1	1.55	4750	35.69	-4.47	-1.47
												2130	35	-4.56	1.26	4800	35.55	-4.49	-1.4
												2150	31.2	-5.06	0.75	4850	33.39	-4.76	-1.51
												2170	35.82	-4.46	1.4	4900	32.09	-4.94	-1.29
												2510	29.1	-5.36	1.03	4950	30.56	-5.15	-1.41
												2530	37.61	-4.25	1.45	5000	24.86	-6.04	-2.08
												2550	43.11	-3.65	1.7				
												2570	45.31	-3.44	1.77				
												2590	47.43	-3.24	1.77				
												2610	38.04	-4.2	1.13				
												2630	29.11	-5.36	-0.29				
												2650	28.75	-5.41	-1.01				
												2670	26.39	-5.79	-2.12				
												2690	22.2	-6.54	-2.49				







二、ANT Passive

ANT1--2D/3D Gain--880MHz

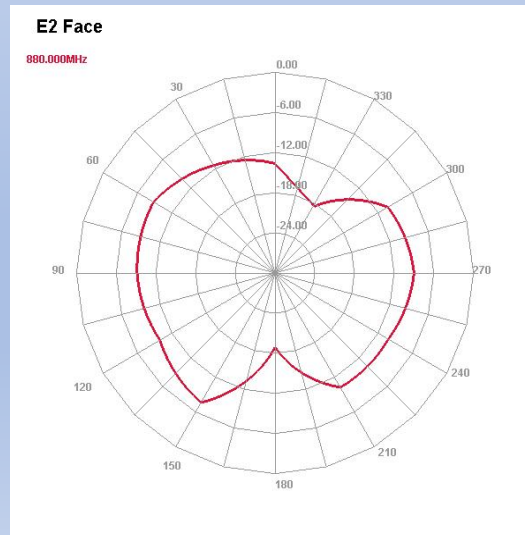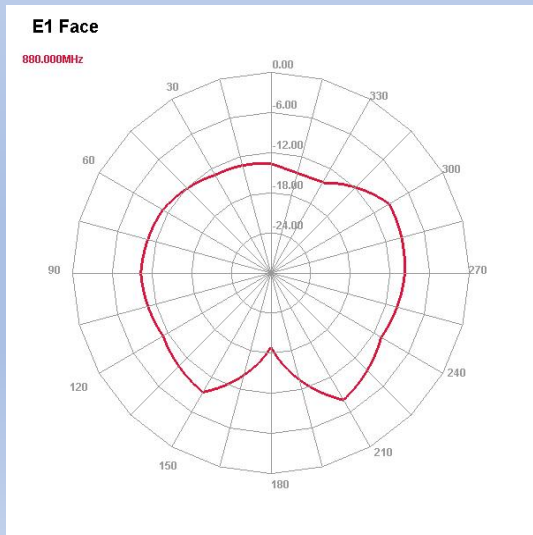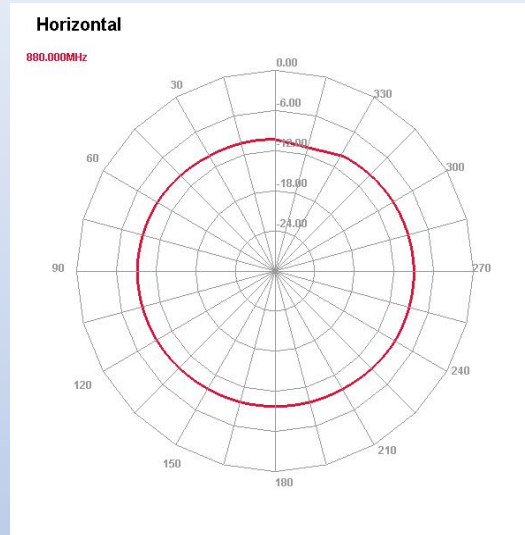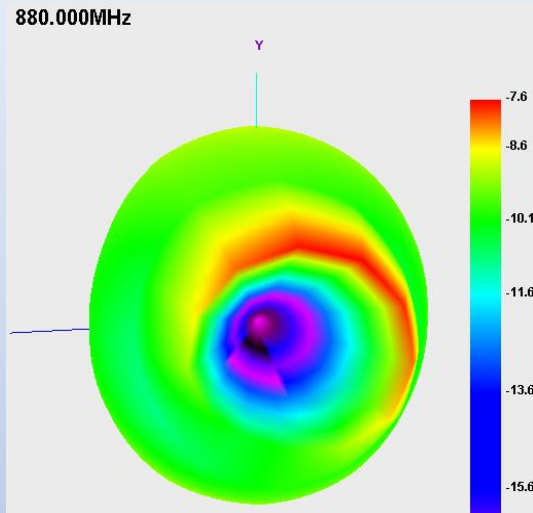





二、ANT Passive

ANT1--2D/3D Gain--1870MHz

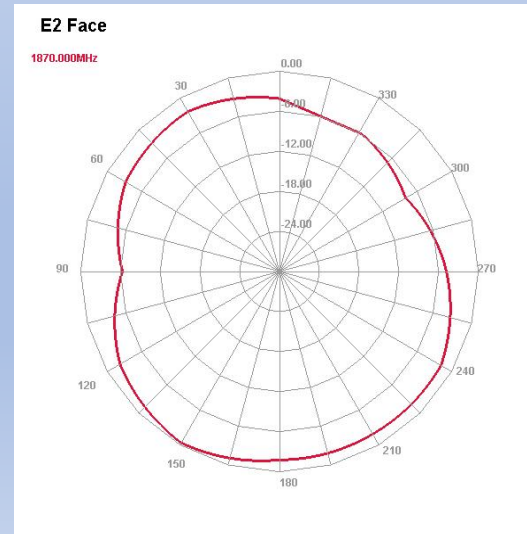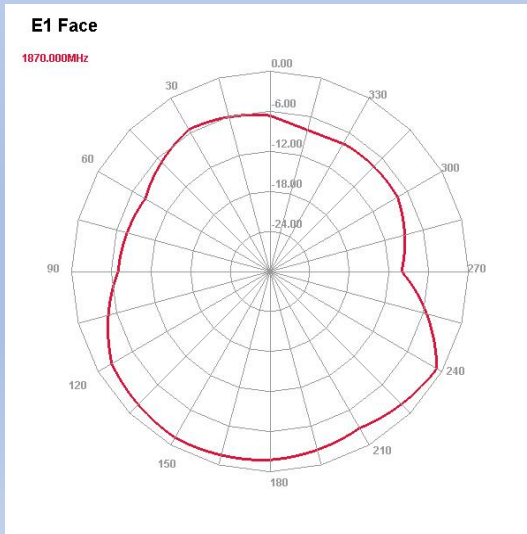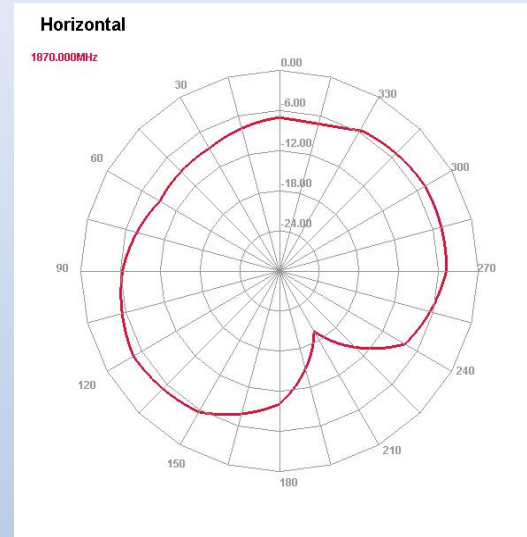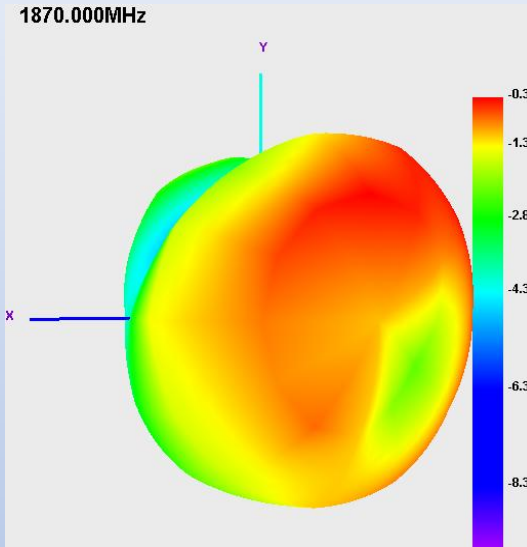

二、ANT Passive


ANT1--2D/3D Gain--2570MHz

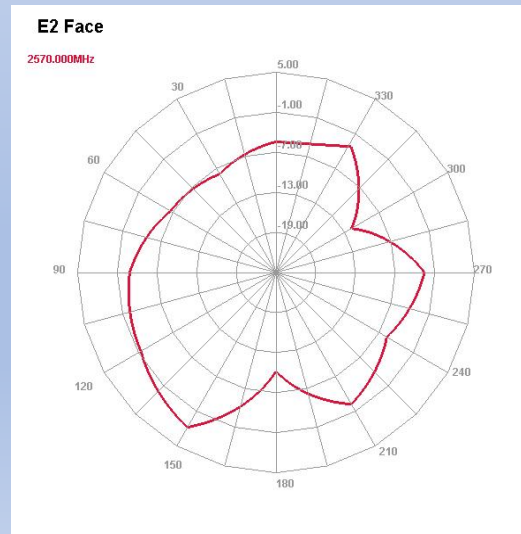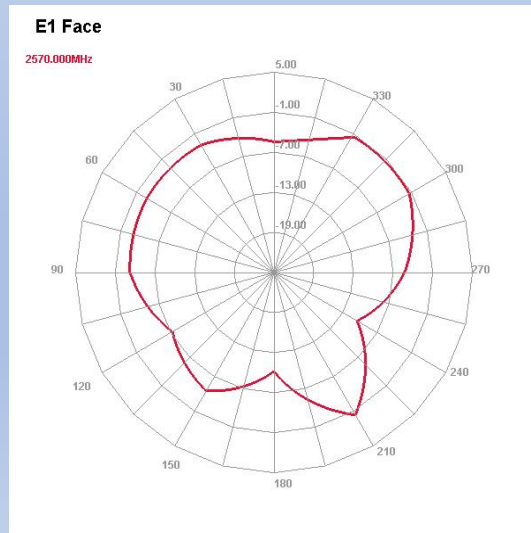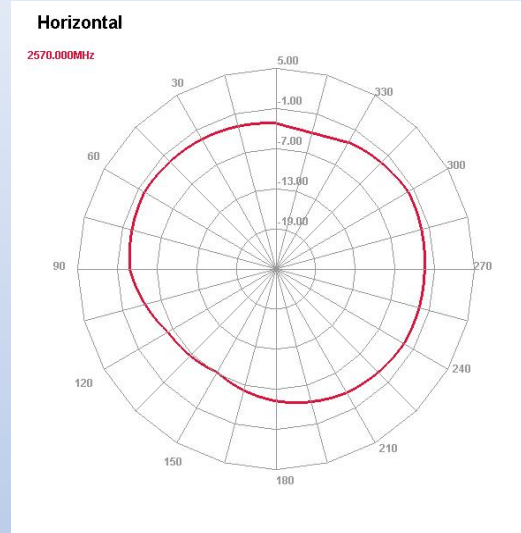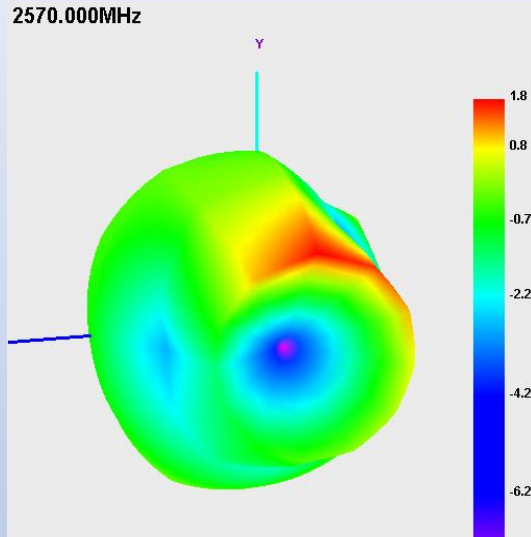


二、ANT Passive

ANT1--2D/3D Gain--4400MHz


4400.000MHz

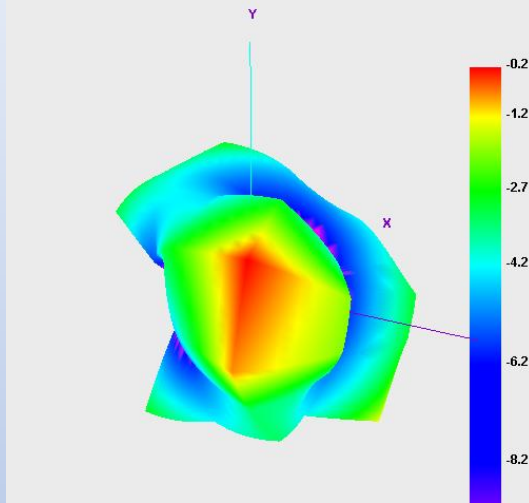


Horizontal

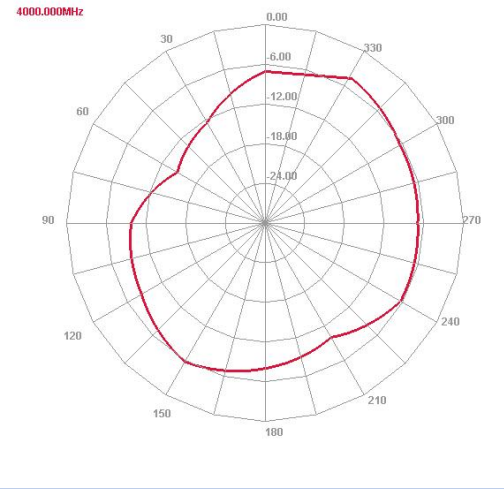

E2 Face

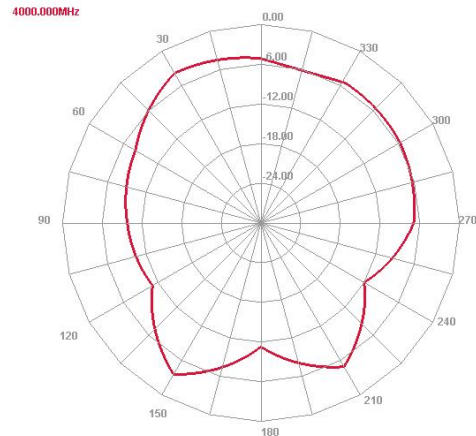


E1 Face

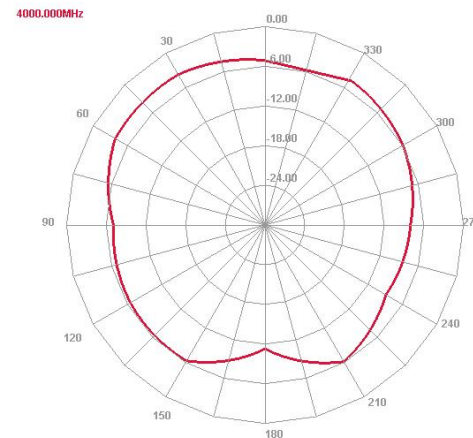

二、ANT Passive

Return Loss--ANT2

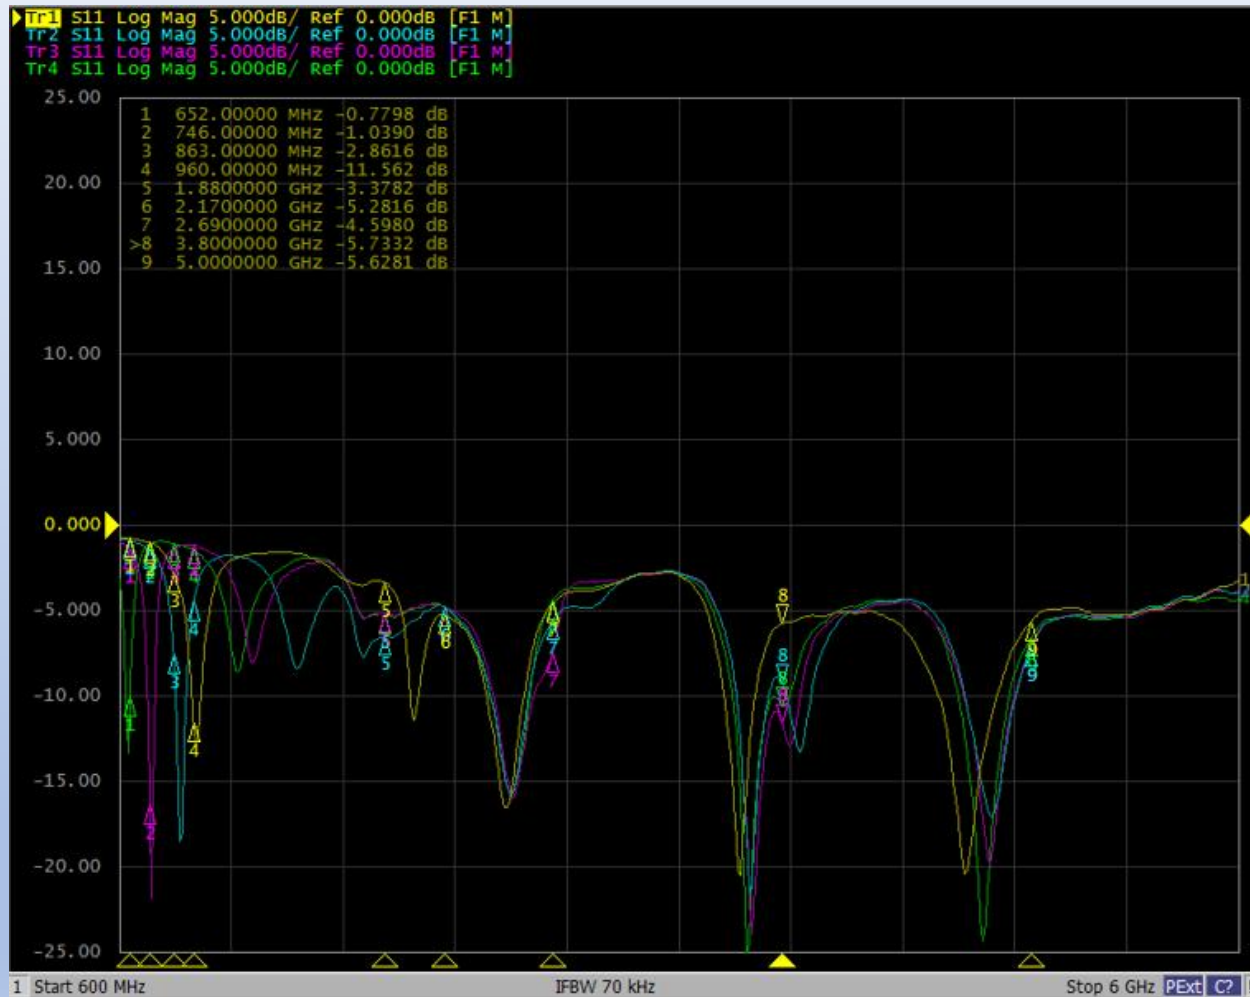

二、ANT Passive





Eff/Gain--ANT2

RF1								RF2/RFID				RF3				RF4			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
910	21.94	-6.59	-3.06	2550	33.89	-4.7	-0.16	850	22.56	-6.47	-2.88	730	13.25	-8.78	-4.91	620	9.48	-10.23	-7.83
920	24.31	-6.14	-2.69	2570	33.61	-4.73	-0.07	860	25.31	-5.97	-2.29	740	16.46	-7.83	-4.16	630	13.24	-8.78	-7.86
930	29.05	-5.37	-2.03	2590	28.36	-5.47	-0.58	870	27.99	-5.53	-1.86	750	16.33	-7.87	-4.29	640	12.64	-8.98	-7.12
940	31.75	-4.98	-1.75	2610	29.13	-5.36	-0.33	880	30.22	-5.2	-1.61	760	17.32	-7.61	-3.98	650	15.17	-8.19	-8.99
950	37.24	-4.29	-1.25	2630	26.69	-5.74	-0.81	890	32.86	-4.83	-1.23	770	15.65	-8.05	-4.47	660	10.25	-9.89	-9.95
960	35.54	-4.49	-1.64	2650	23.29	-6.33	-1.42	900	34.43	-4.63	-0.95	780	14.71	-8.32	-4.79				
1810	15.45	-8.11	-4.98	2670	21.95	-6.58	-1.8	910	37.65	-4.24	-0.53	790	11.89	-9.25	-5.68				
1830	15.65	-8.05	-4.68	2690	20.13	-6.96	-2.33	920	36.23	-4.41	-0.74								
1850	18.81	-7.26	-3.7	3300	10	-10	-5.14	930	32.45	-4.89	-1.27								
1870	17.47	-7.58	-3.79	3350	16.5	-7.82	-3.17												
1890	18.81	-7.26	-2.97	3400	18.24	-7.39	-2.84												
1910	16.32	-7.87	-3.16	3450	27.27	-5.64	-1.4												
1930	18.5	-7.33	-2.7	3500	37.1	-4.31	-0.3												
1950	19.67	-7.06	-3.05	3550	48.42	-3.15	1.52												
1970	24.26	-6.15	-2.68	3600	50.96	-2.93	1.96												
1990	34.46	-4.63	-1.3	3650	57.36	-2.41	2.78												
2010	39.58	-4.03	-0.07	3700	46.76	-3.3	1.98												
2030	37.25	-4.29	0.06	3750	37.75	-4.23	1.17												
2050	39.79	-4	0.31	3800	34.73	-4.59	0.76												
2070	45.5	-3.42	0.75	3850	34.56	-4.61	0.8												
2090	43.25	-3.64	0.45	3900	35.16	-4.54	0.94												
2110	31.83	-4.97	-1.1	3950	36.53	-4.37	0.52												
2130	27.29	-5.64	-1.97	4000	34.81	-4.58	0.36												
2150	27.21	-5.65	-2.09	4050	36.18	-4.41	0.85												
2170	26.52	-5.76	-2.36	4100	40.1	-3.97	1.29												
2190	29.89	-5.24	-1.98	4150	38.28	-4.17	1.05												
2210	32.62	-4.87	-1.64	4200	36.9	-4.33	0.74												
2230	35.83	-4.46	-1.28	4250	36.63	-4.36	1.53												
2250	32.86	-4.83	-1.69	4300	36	-4.44	1.79												
2270	34.33	-4.64	-1.71	4350	38.93	-4.1	2.16												
2290	35.53	-4.49	-1.68	4400	34.08	-4.68	1.48												
2310	35.66	-4.48	-1.71	4450	29.7	-5.27	0.68												
2330	33.08	-4.8	-1.77	4500	34.2	-4.66	1.46												
2350	34.07	-4.68	-1.41	4550	44.53	-3.51	2.53												
2370	34.86	-4.58	-1.3	4600	40.5	-3.93	2.08												
2390	35.53	-4.49	-1.08	4650	43.14	-3.65	2.03												
2410	38.6	-4.13	-0.41	4700	42.94	-3.67	2.07												
2430	40.77	-3.9	-0.09	4750	37.26	-4.29	1.62												
2450	39.35	-4.05	-0.44	4800	36.86	-4.33	2.08												
2470	39.67	-4.02	-0.35	4850	34.74	-4.59	1.95												
2490	40.26	-3.95	0.17	4900	33.31	-4.77	1.42												
2510	39.99	-3.98	0.55	4950	33.49	-4.75	1.13												
2530	37.49	-4.26	0.37	5000	30.63	-5.14	0.24												







二、ANT Passive

ANT2--2D/3D Gain--960MHz

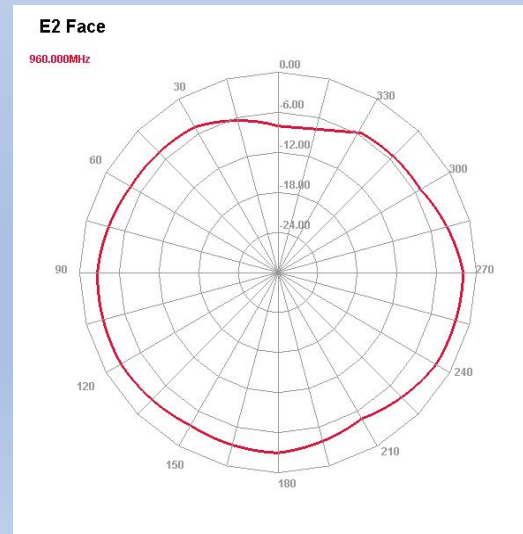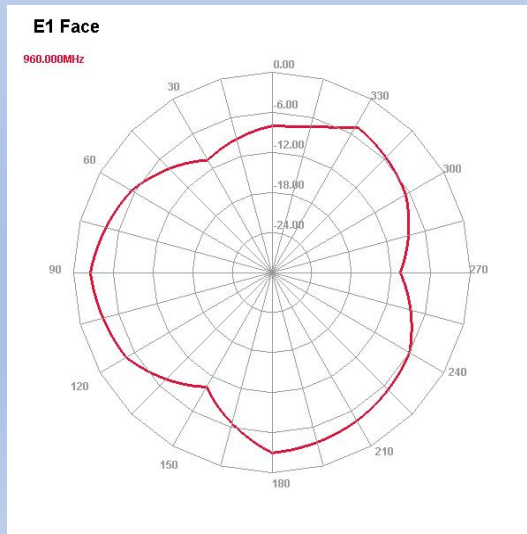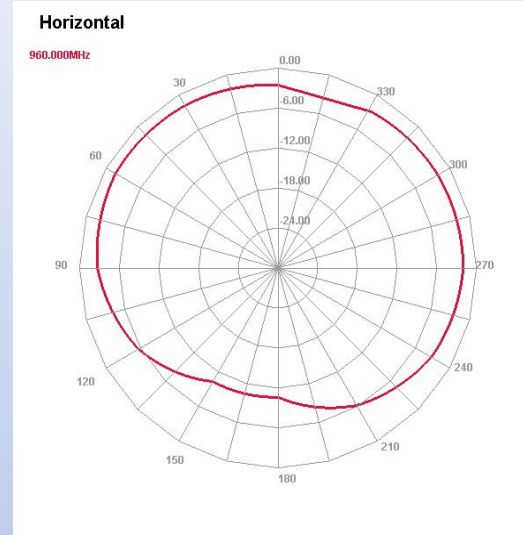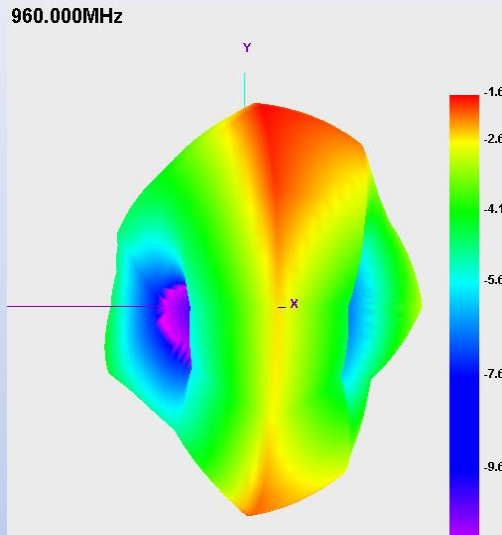





二、ANT Passive

ANT2--2D/3D Gain--1870MHz

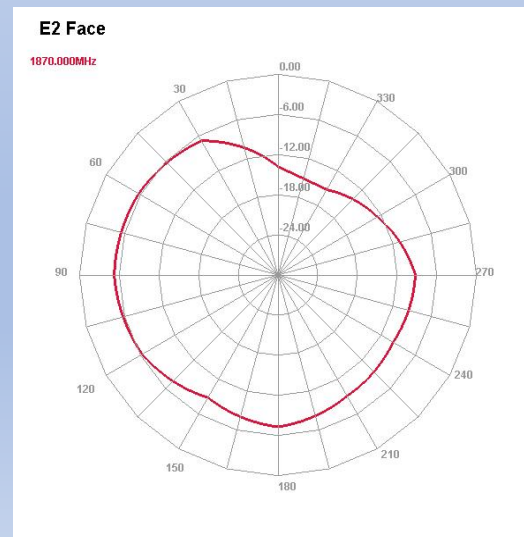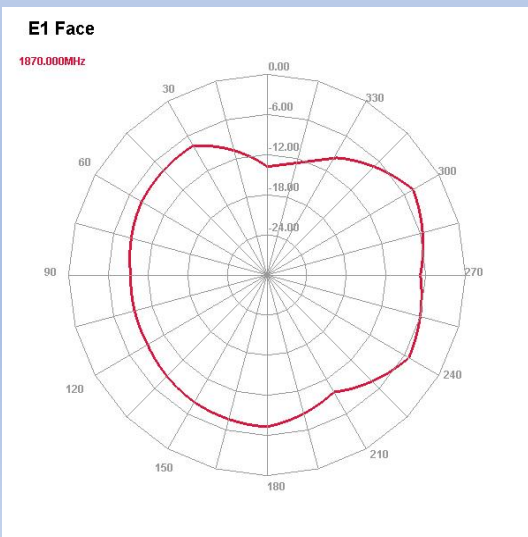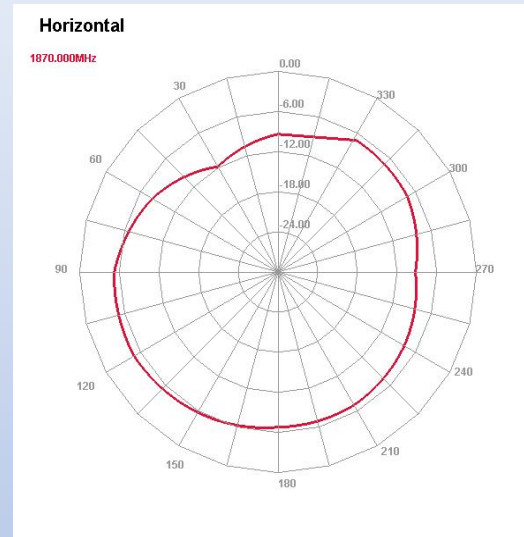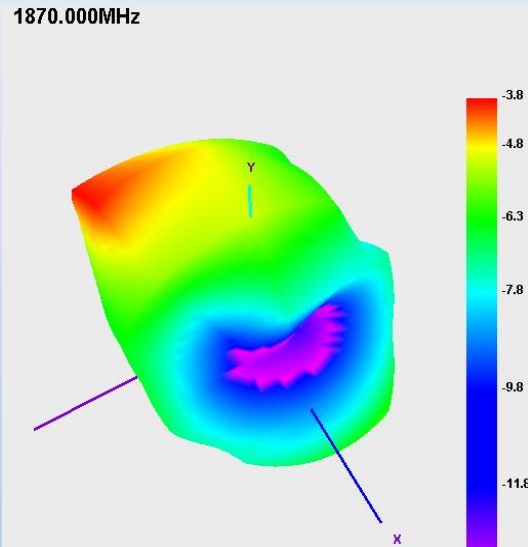


二、ANT Passive

ANT2--2D/3D Gain--3750MHz

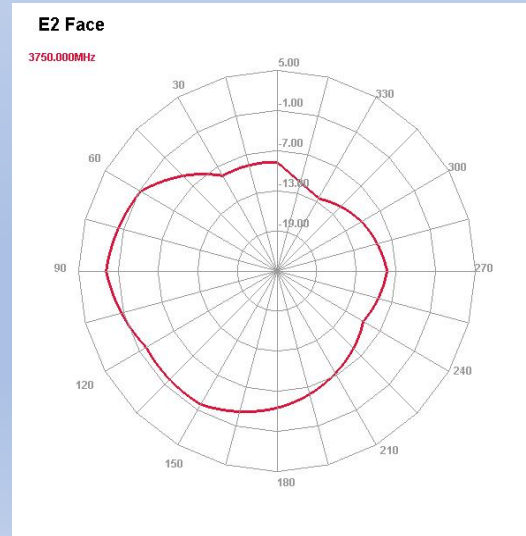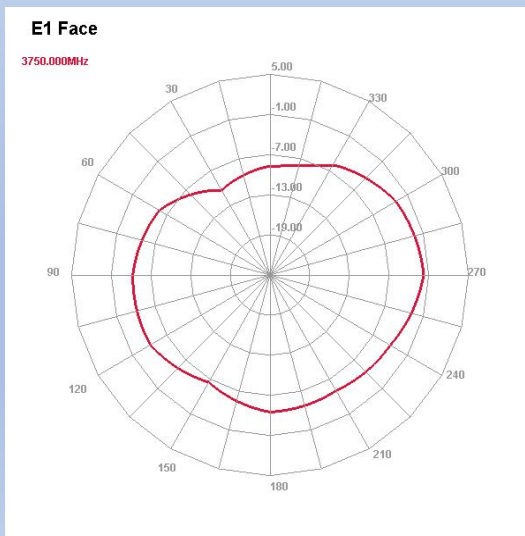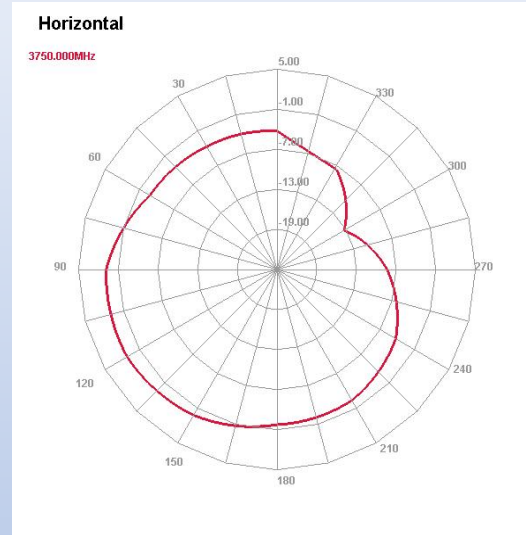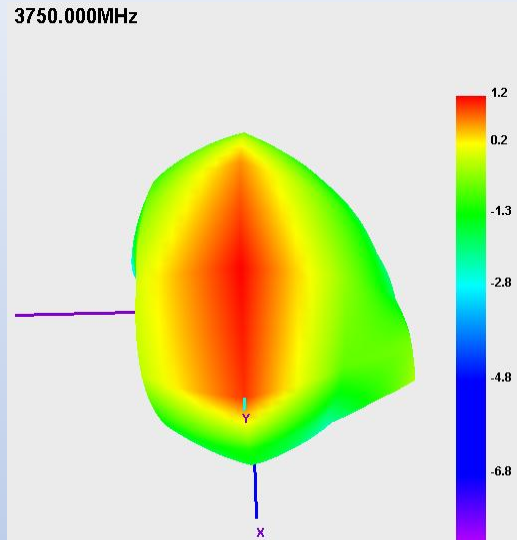

二、ANT Passive

Return Loss--ANT3

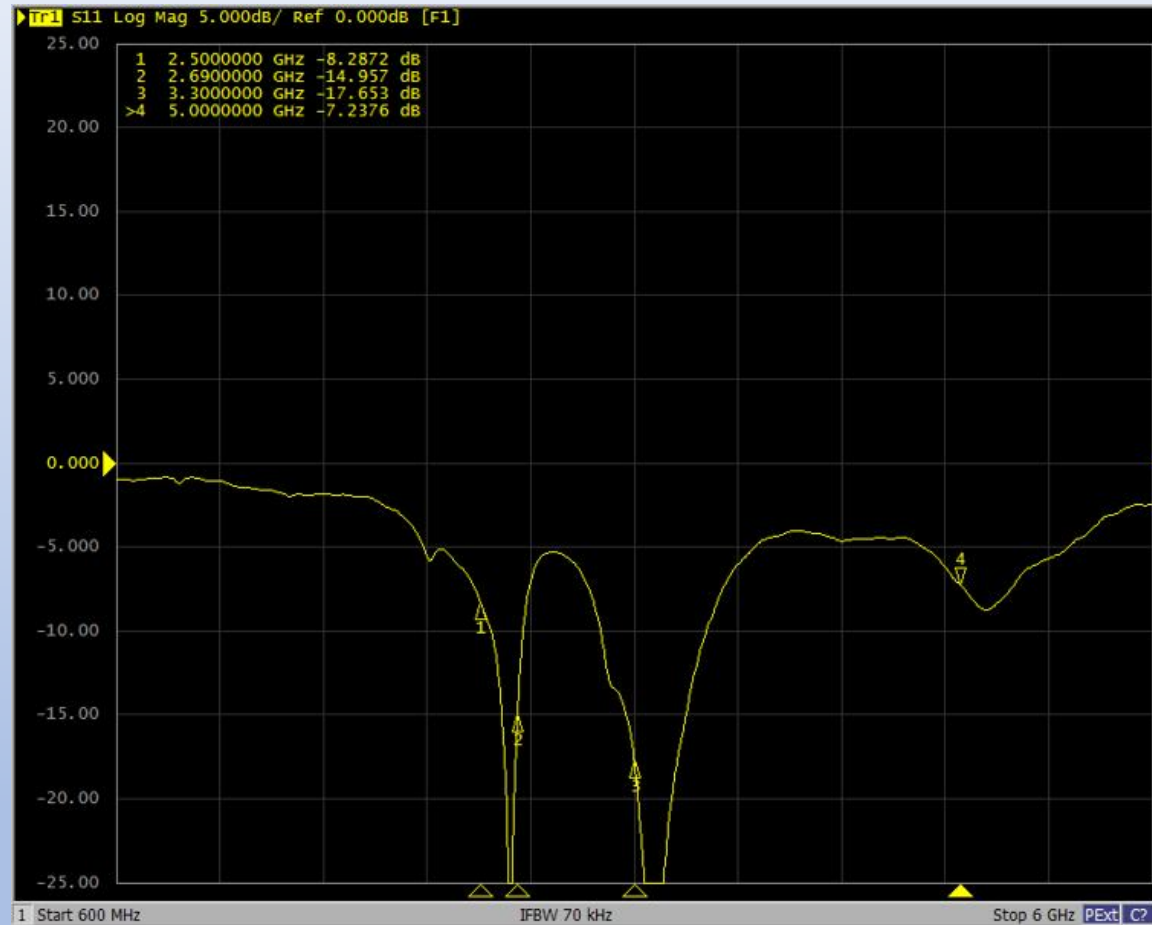

二、ANT Passive





Eff/Gain--ANT3

Freq	Effi	Effi	Gain	Freq	Effi	Effi	Gain
(MHz)	(dB)	(%)	(dBi)	(MHz)	(dB)	(%)	(dBi)
1710	-12.72	5.35	-8.46	2390	-6.06	24.78	0.71
1730	-13.9	4.07	-8.91	2410	-5.5	28.21	1.06
1750	-13.33	4.65	-7.53	2430	-5.46	28.47	0.64
1770	-14.14	3.85	-7.95	2450	-5.13	30.68	0.98
1790	-14.47	3.57	-7.94	2470	-5.16	30.48	1.19
1810	-14.96	3.19	-8.05	2490	-5.29	29.61	1.11
1830	-15.01	3.16	-8.13	2500	-4.52	35.31	0.89
1850	-15.17	3.04	-8.59	2520	-4.15	38.45	1.21
1870	-14.86	3.26	-8.93	2540	-3.83	41.39	1.05
1890	-15.26	2.98	-9.8	2560	-4	39.81	1.3
1910	-14.84	3.28	-9.35	2580	-4.52	35.31	1.28
1930	-14.46	3.58	-9.35	2600	-4.65	34.27	1.45
1950	-14.1	3.89	-8.82	2620	-4.79	33.18	1.02
1970	-13.63	4.33	-7.77	2640	-4.61	34.59	0.89
1990	-12.76	5.29	-6.77	2660	-4.54	35.15	1.11
2010	-12.87	5.17	-7	2680	-5.06	31.18	0.96
2030	-12.28	5.92	-6.13	2700	-4.85	32.73	0.78
2050	-11.66	6.83	-5.18	3300	-4	39.81	2.59
2070	-10.94	8.05	-4.29	3400	-4.02	39.62	2.01
2090	-10.84	8.24	-4.11	3500	-3.87	41.02	2.75
2110	-11.32	7.38	-4.77	3600	-3.75	42.16	3.01
2130	-11.54	7.01	-5	3700	-2.79	52.6	3.12
2150	-10.86	8.21	-4.64	3800	-3.19	47.97	3.06
2170	-10.22	9.5	-3.97	3900	-3.07	49.31	3.09
2190	-8.87	12.97	-2.69	4000	-3.66	43.05	2.02
2210	-8.13	15.37	-2.08	4100	-3.95	40.27	0.83
2230	-7.5	17.77	-1.36	4200	-3.75	42.16	1.53
2250	-7.57	17.49	-1.7	4300	-3.79	41.78	1.27
2270	-7.28	18.72	-1.77	4400	-4.38	36.47	0.2
2290	-7.26	18.81	-2.28	4500	-4.36	36.64	-0.54
2310	-7.05	19.75	-1.53	4600	-5.34	29.24	-1.97
2330	-6.94	20.25	-0.88	4700	-4.86	32.65	-1.19
2350	-6.66	21.59	-0.51	4800	-4.29	37.23	-0.16
2370	-6.7	21.36	-0.3	4900	-4.18	38.19	0.45
				5000	-4.6	34.67	-0.19







二、ANT Passive

ANT3--2D/3D Gain--2540MHz

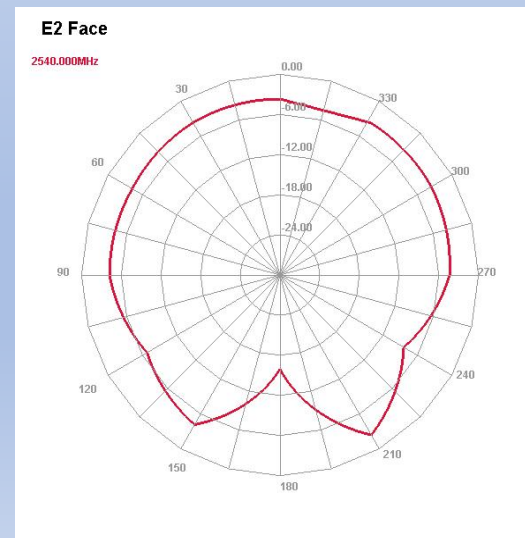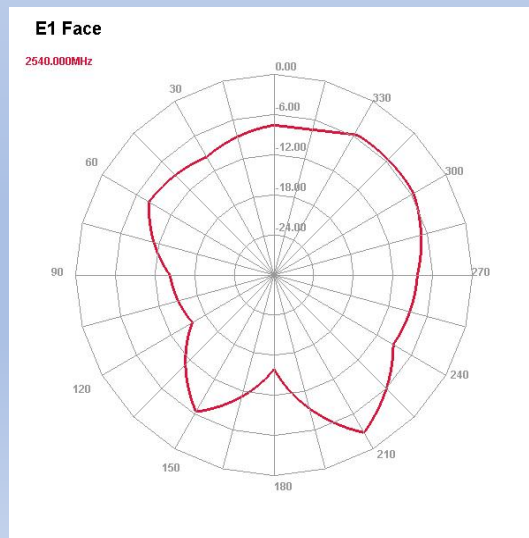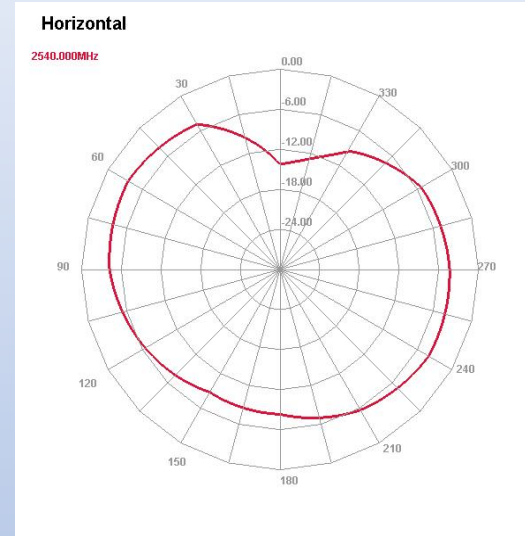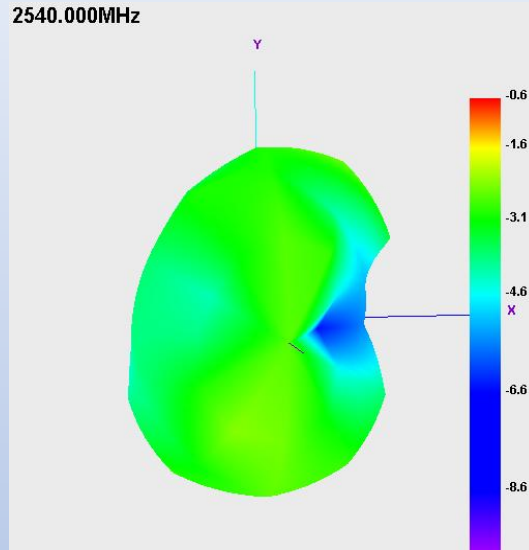


二、ANT Passive

ANT3--2D/3D Gain--4250MHz

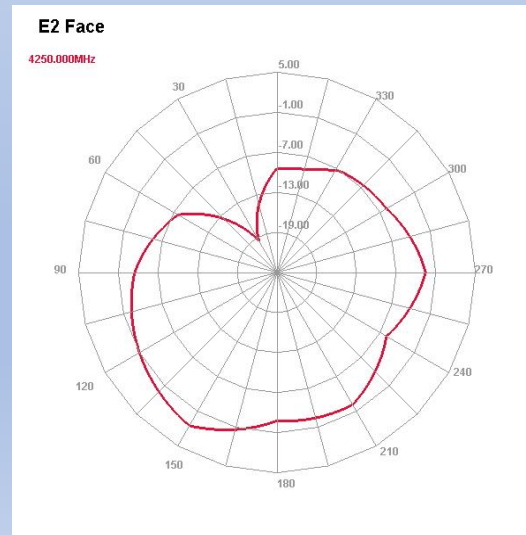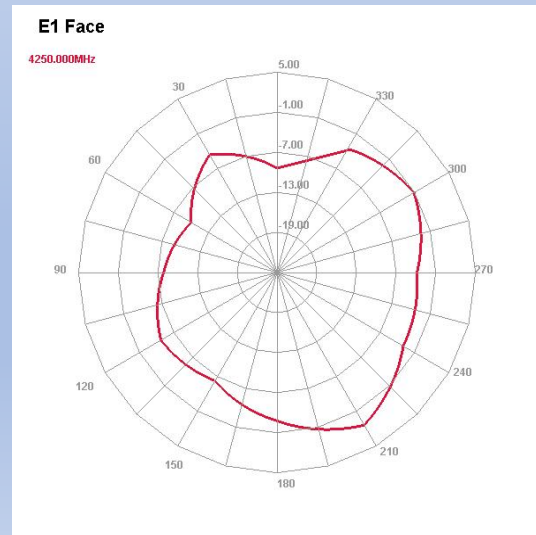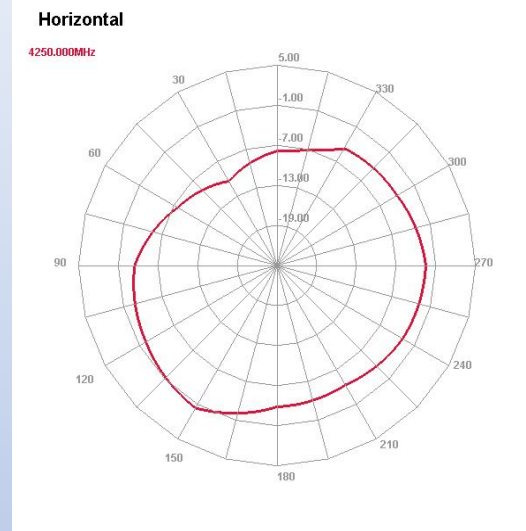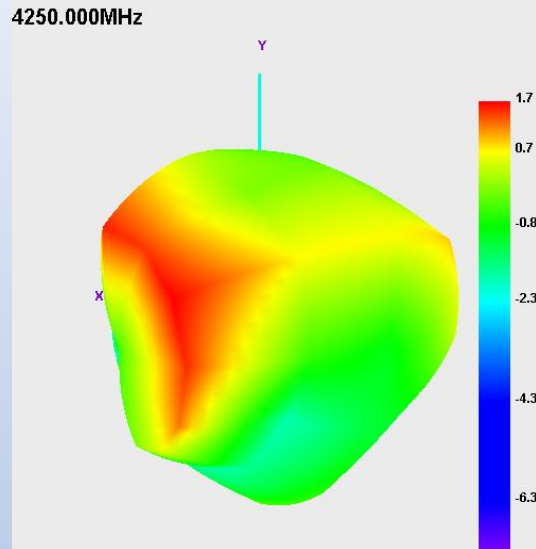

二、ANT Passive

Return Loss--ANT4

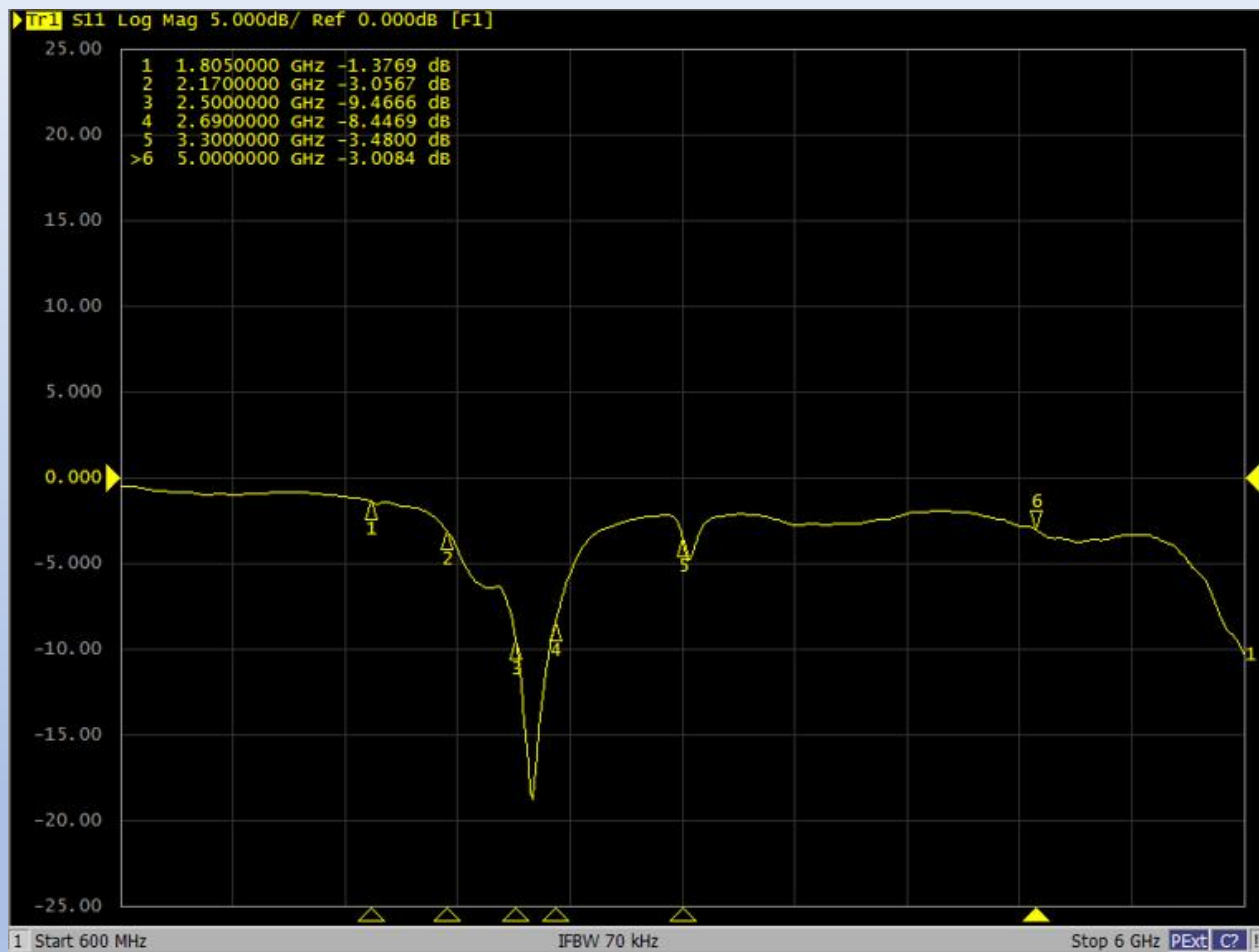

二、ANT Passive





Eff/Gain--ANT4

Freq (MHz)	Effi (dB)	Effi (%)	Gain (dBi)	Freq (MHz)	Effi (dB)	Effi (%)	Gain (dBi)
1810	15.01	-8.23	-2.95	2610	14.25	-8.46	-4.3
1830	13.78	-8.61	-4.14	2630	15.11	-8.21	-3.81
1850	26.71	-5.73	-1.21	2650	14.33	-8.44	-4.41
1870	30.51	-5.15	-0.06	2670	13.41	-8.72	-4.59
1890	27.09	-5.67	1.12	2690	12.59	-9	-4.51
1910	25.15	-5.99	1.71	3300	7.37	-11.33	-5.47
1930	21.68	-6.64	1.42	3350	12.48	-9.04	-4.27
1950	20.3	-6.92	1.04	3400	7.76	-11.1	-5.93
1970	21.25	-6.73	1.22	3450	5.06	-12.96	-7.43
1990	23.63	-6.27	1.84	3500	4.68	-13.3	-6.72
2010	21.42	-6.69	1.21	3550	4.5	-13.47	-7.33
2030	23.33	-6.32	1.51	3600	3.29	-14.83	-9.2
2050	26	-5.85	2.19	3650	3.91	-14.08	-9.43
2070	26.21	-5.81	2.52	3700	3.31	-14.8	-10.35
2090	22.65	-6.45	1.72	3750	3.2	-14.95	-9.78
2110	12.54	-9.02	-2.2	3800	3.23	-14.91	-9.24
2130	8.42	-10.75	-3.32	3850	4.27	-13.69	-7.27
2150	6.49	-11.87	-4.62	3900	4.68	-13.3	-6.74
2170	6.99	-11.55	-5.35	3950	5.9	-12.29	-5.95
2190	6.17	-12.1	-6.55	4000	6.42	-11.92	-6.1
2210	6.46	-11.9	-6.4	4050	7.73	-11.12	-5.17
2230	5.96	-12.25	-6.95	4100	9.67	-10.14	-4.47
2250	5.95	-12.25	-7.58	4150	12.83	-8.92	-3.39
2270	5.4	-12.68	-8.68	4200	12.29	-9.1	-3.22
2290	5.3	-12.76	-8.59	4250	10.18	-9.92	-3.46
2310	5.33	-12.73	-8.01	4300	9.38	-10.28	-3.63
2330	5.97	-12.24	-7.3	4350	8.12	-10.9	-4.97
2350	5.32	-12.74	-7.81	4400	6.99	-11.56	-7.19
2370	5.21	-12.83	-7.91	4450	4.97	-13.03	-7.63
2390	6.9	-11.61	-7.11	4500	5.36	-12.71	-6.83
2410	6.69	-11.74	-6.77	4550	7.98	-10.98	-4.84
2430	7.04	-11.53	-6.57	4600	7.12	-11.48	-5.61
2450	8.18	-10.87	-6.19	4650	8.07	-10.93	-5.06
2470	8.12	-10.91	-6.28	4700	8.8	-10.55	-4.3
2490	9.62	-10.17	-5.56	4750	9.81	-10.08	-3.8
2510	11.48	-9.4	-4.96	4800	11.5	-9.39	-2.91
2530	13.39	-8.73	-4.48	4850	13.88	-8.58	-2.37
2550	14.86	-8.28	-4.04	4900	15.52	-8.09	-1.71
2570	16.09	-7.93	-4.11	4950	16.79	-7.75	-0.86
2590	14.79	-8.3	-4.39	5000	18.4	-7.35	-0.24



二、ANT Passive


ANT4--2D/3D Gain--2510MHz

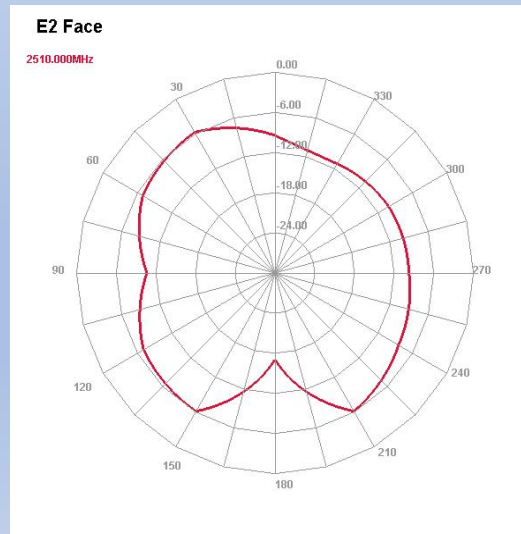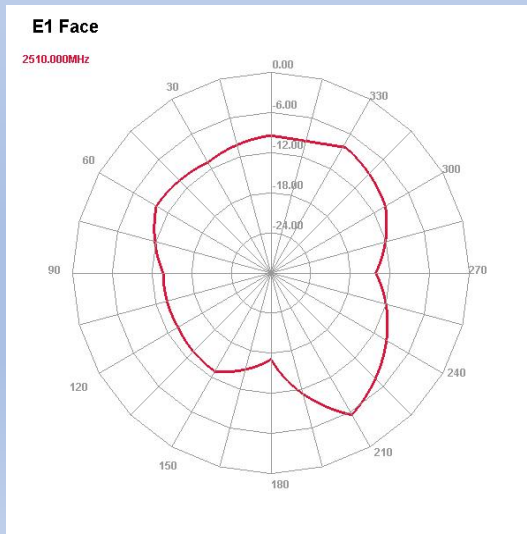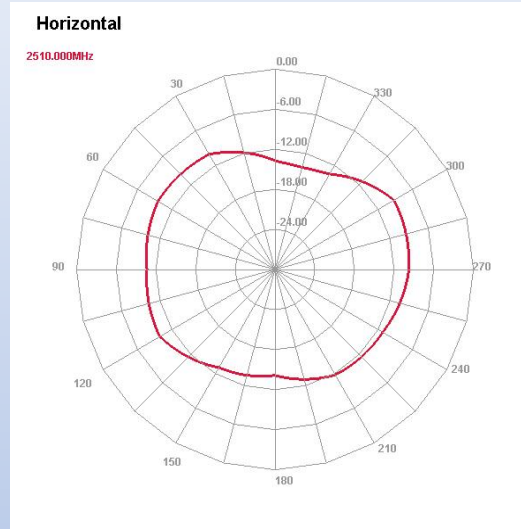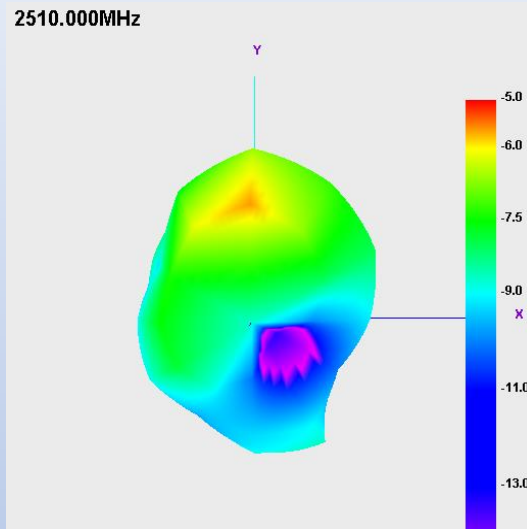

二、ANT Passive


ANT4--2D/3D Gain--5000MHz

5000.000MHz

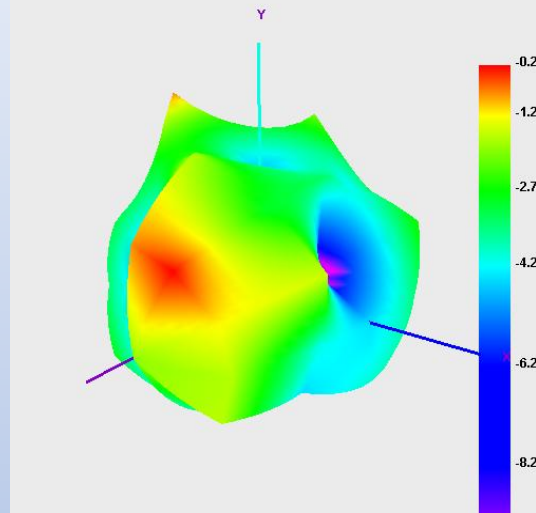


Horizontal

5000.000MHz

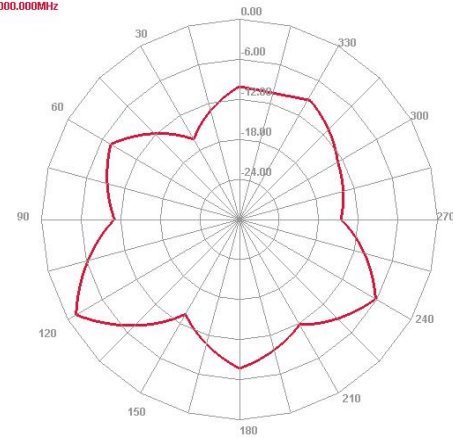


E1 Face

5000.000MHz

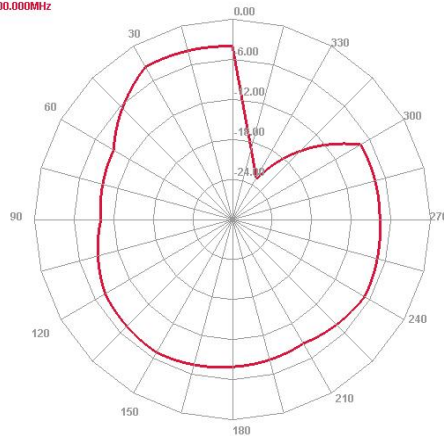


E2 Face

5000.000MHz

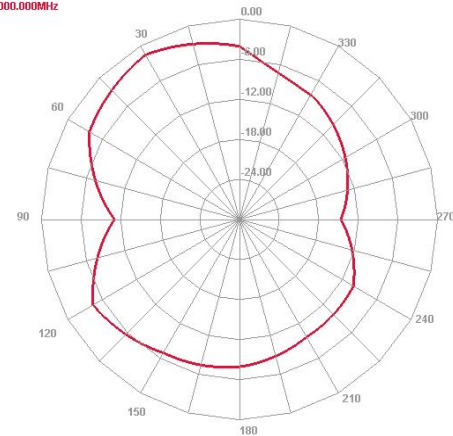

二、ANT Passive

Return Loss--WBG0

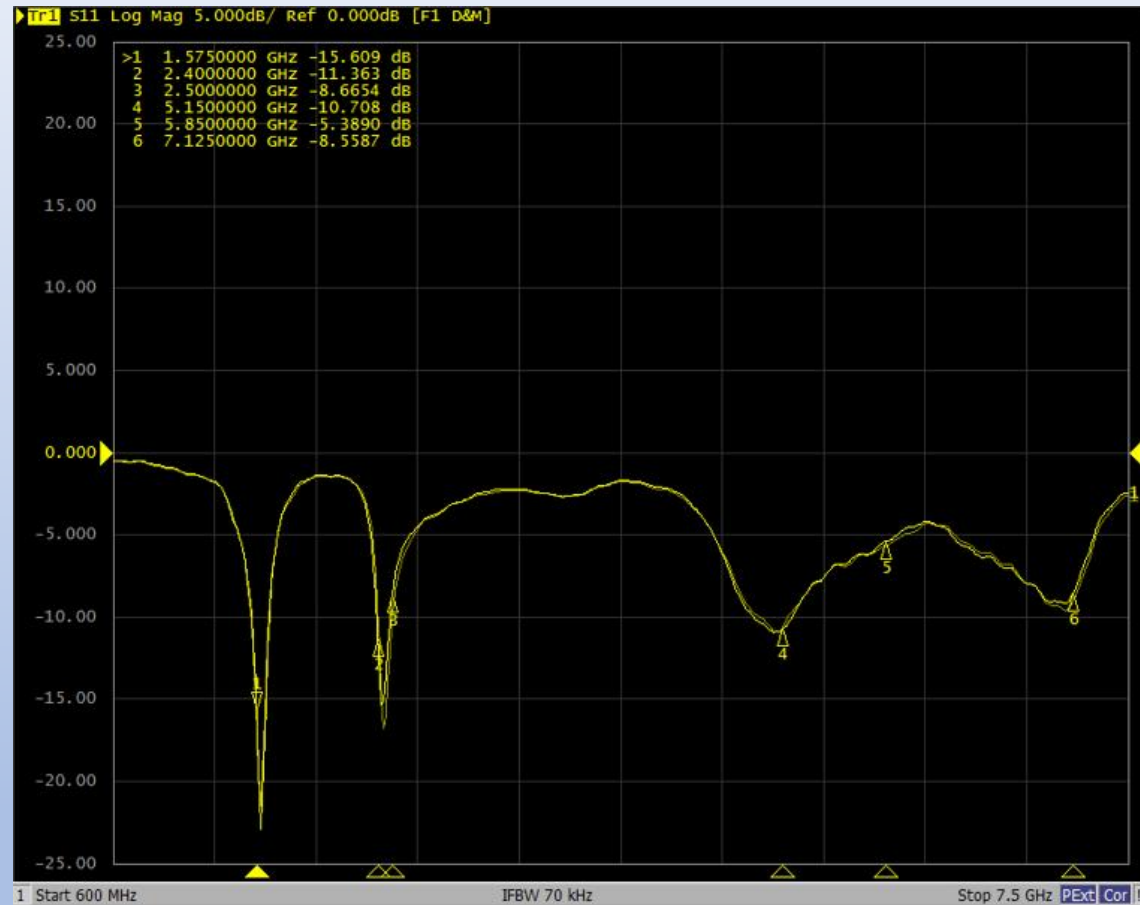

二、ANT Passive





Eff/Gain--WOBG

Freq	Effi	Effi	Gain	Freq	Effi	Effi	Gain
(MHz)	(%)	(dB)	(dBi)	(MHz)	(%)	(dB)	(dBi)
1550	43.25	-3.64	1.16	5250	33.96	-4.69	2.17
1555	44.25	-3.54	1.27	5300	32.58	-4.87	2
1560	44.66	-3.5	1.37	5350	30.19	-5.2	1.64
1565	42.85	-3.68	1.25	5400	28.77	-5.41	1.43
1570	42.65	-3.7	1.29	5450	30.83	-5.11	1.99
1575	41.78	-3.79	1.29	5500	26	-5.85	1.5
1580	39.9	-3.99	1.21	5550	24.66	-6.08	1.41
1585	38.01	-4.2	1.09	5600	22.33	-6.51	1.12
1590	37.41	-4.27	1.14	5650	22.69	-6.44	1.39
1595	36.05	-4.43	1.12	5700	26.3	-5.8	1.89
1600	35.31	-4.52	1.21	5750	26.73	-5.73	1.93
1605	35.39	-4.51	1.38	5800	29.37	-5.32	1.55
1610	34.67	-4.6	1.46	5850	25.35	-5.96	0.64
2400	39.26	-4.06	2.47	5900	21.08	-6.76	-0.29
2410	41.3	-3.84	2.81	5950	22.33	-6.51	0.2
2420	41.87	-3.78	2.99	6050	23.55	-6.28	0.51
2430	43.25	-3.64	3.17	6150	20.09	-6.97	-1.49
2440	41.02	-3.87	2.97	6250	24.83	-6.05	-0.63
2450	39.44	-4.04	2.81	6350	27.41	-5.62	0.08
2460	40.27	-3.95	2.93	6450	22.54	-6.47	-1.16
2470	36.39	-4.39	2.58	6550	23.28	-6.33	-1.99
2480	38.37	-4.16	2.94	6650	20.13	-6.96	-3.51
2490	37.93	-4.21	3.02	6750	22.54	-6.47	-3.4
2500	42.07	-3.76	3.55	6850	21.37	-6.7	-4.11
5150	36.98	-4.32	1.81	6950	19.58	-7.08	-4.64
5200	36.22	-4.41	2.05	7050	19.58	-7.08	-4.89
				7150	17.98	-7.45	-5.98







二、ANT Passive

W0BG--2D/3D Gain--1575MHz

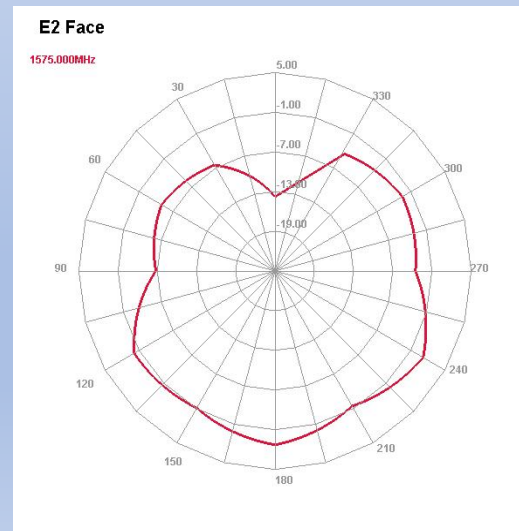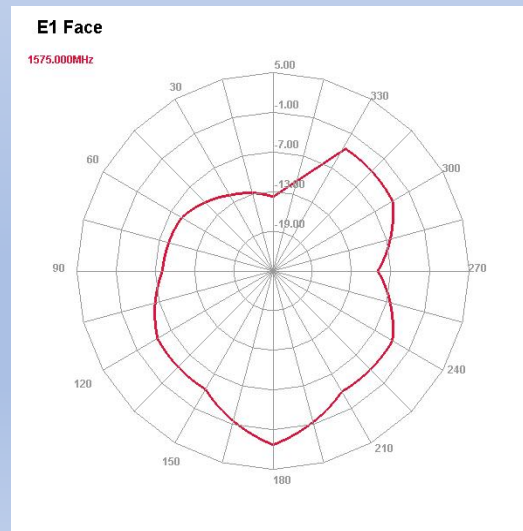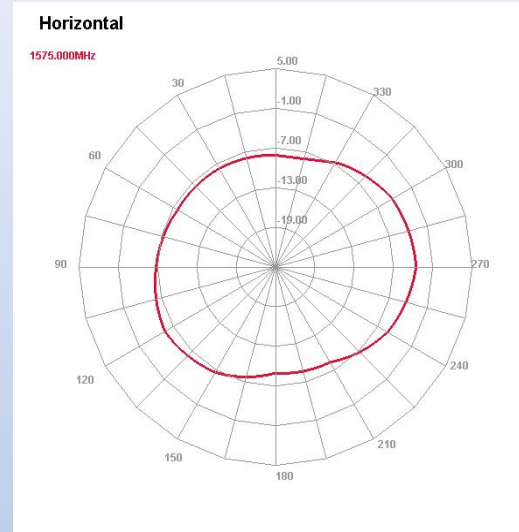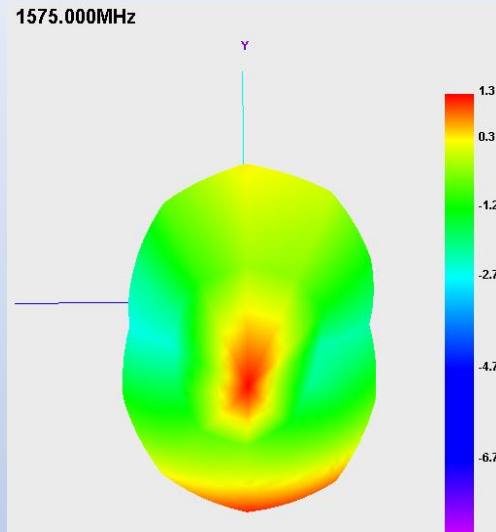





二、ANT Passive

W0BG--2D/3D Gain--2450MHz

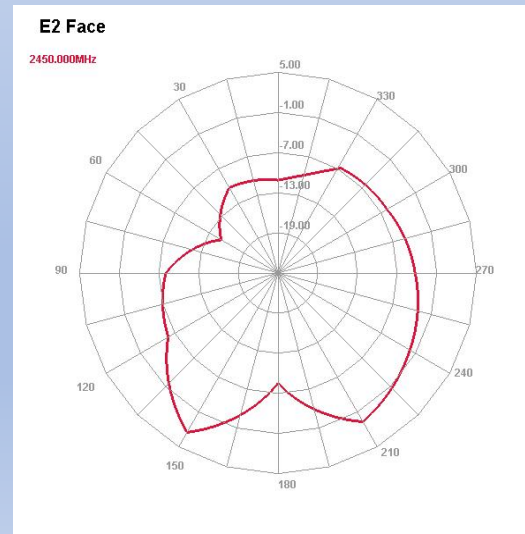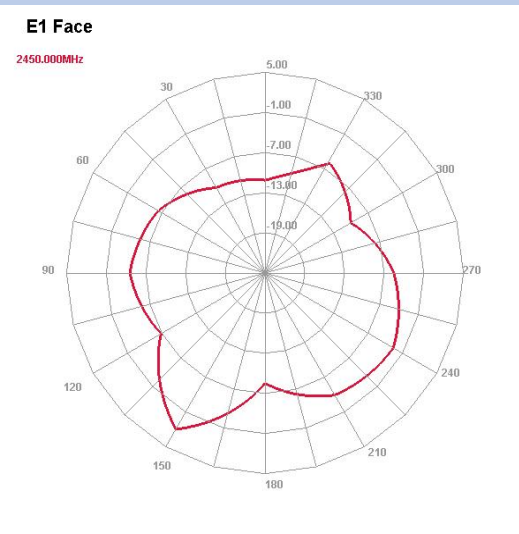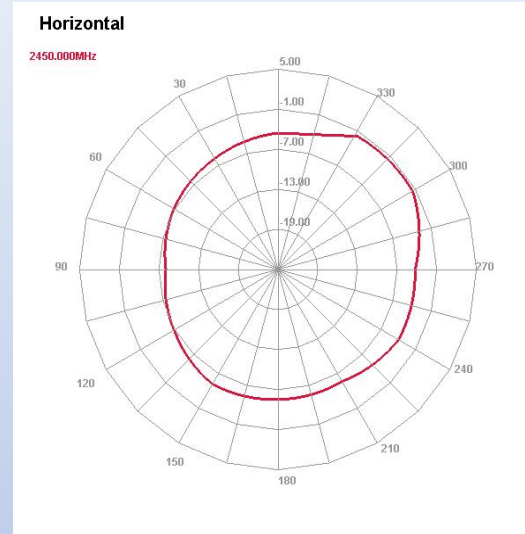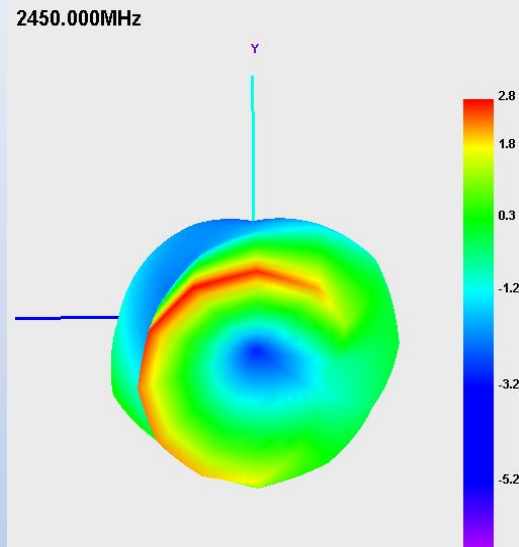


二、ANT Passive

W0BG--2D/3D Gain--5950MHz

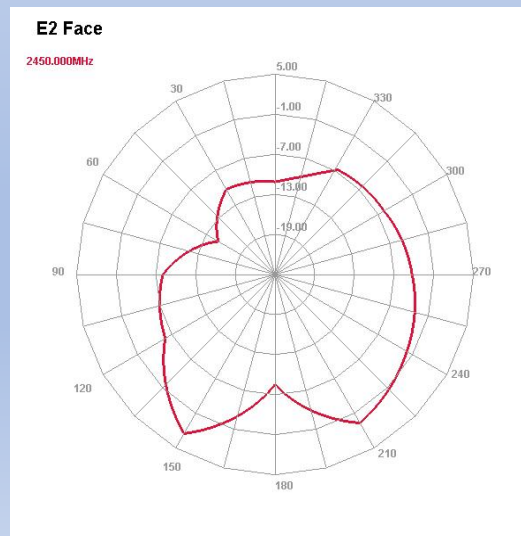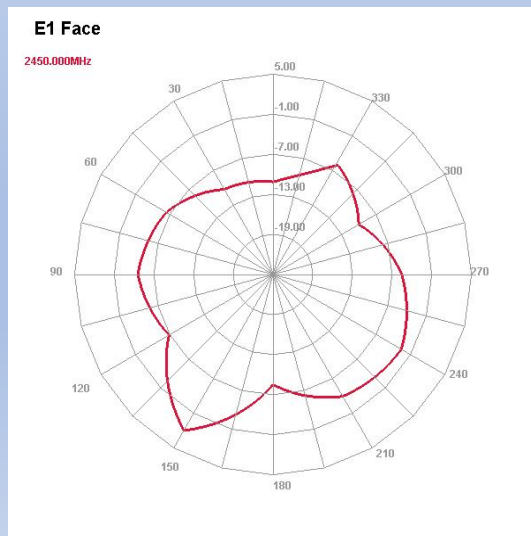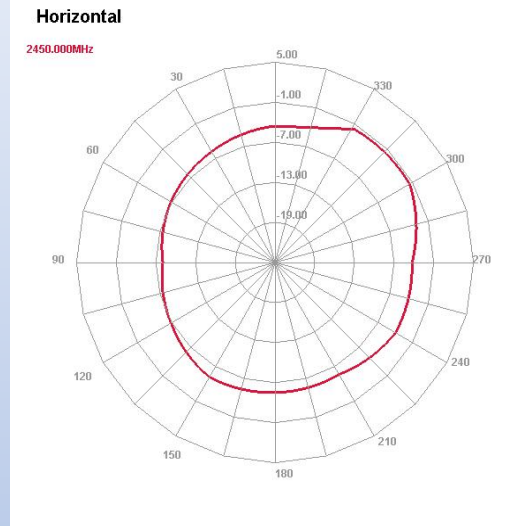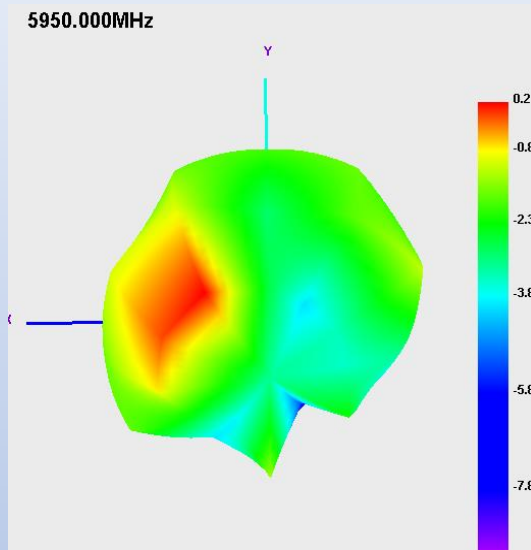

二、ANT Passive

Return Loss--W1BG

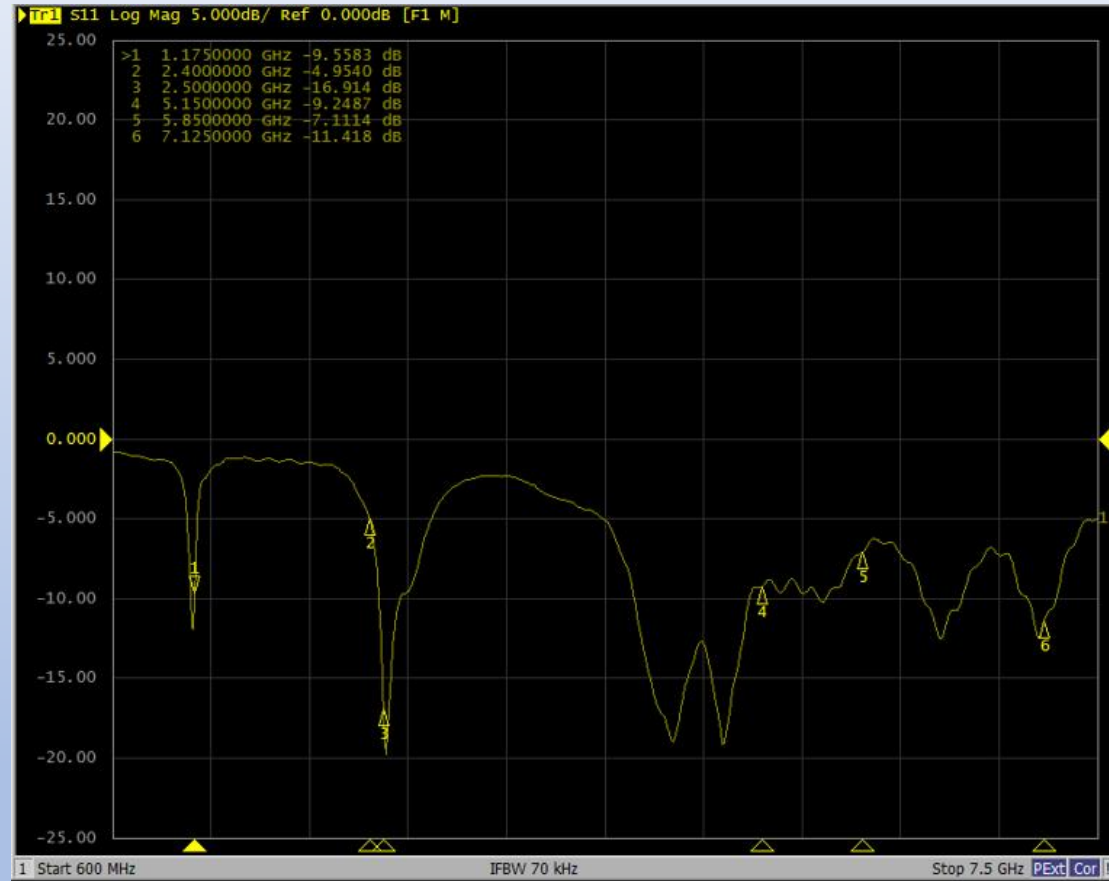

二、ANT Passive





Eff/Gain--W1BG

Freq	Effi	Effi	Gain	Freq	Effi	Effi	Gain
(MHz)	(%)	(dB)	(dBi)	(MHz)	(%)	(dB)	(dBi)
1160	16.51	-7.82	-5.44	5400	18.57	-7.31	-1.57
1165	17.21	-7.64	-5.24	5450	22.18	-6.54	-0.62
1170	18.62	-7.3	-4.86	5500	22.69	-6.44	-0.71
1175	19.49	-7.1	-4.72	5550	25.23	-5.98	-0.04
1180	19.67	-7.06	-4.69	5600	23.44	-6.3	-0.21
1185	19.58	-7.08	-4.66	5650	22.85	-6.41	-0.27
1190	20.27	-6.93	-4.4	5700	23.01	-6.38	-0.33
2400	34.91	-4.57	0.59	5750	27.6	-5.59	-1.4
2410	38.45	-4.15	0.98	5800	24.66	-6.08	-2.3
2420	36.89	-4.33	0.8	5850	21.18	-6.74	-3
2430	37.49	-4.26	0.92	5900	17.17	-7.65	-4.03
2440	38.01	-4.2	1.03	5950	16.71	-7.77	-3.94
2450	37.15	-4.3	0.89	6050	18.45	-7.34	-2.47
2460	35.15	-4.54	0.78	6150	15.38	-8.13	-4.1
2470	34.04	-4.68	0.65	6250	14.58	-8.36	-4.79
2480	33.18	-4.79	0.53	6350	15.1	-8.21	-4.56
2490	34.59	-4.61	0.52	6450	13.12	-8.82	-6.08
2500	33.8	-4.71	0.32	6550	15.17	-8.19	-5.29
5150	21.47	-6.68	-1.26	6650	15.95	-7.97	-5.44
5200	21.62	-6.65	-1.18	6750	19.18	-7.17	-3.63
5250	21.62	-6.65	-1.04	6850	23.38	-6.31	-1.39
5300	21.97	-6.58	-1.02	6950	23.33	-6.32	-0.24
5350	19.49	-7.1	-1.47	7050	27.92	-5.54	1.72
				7150	30.13	-5.21	1.95







二、ANT Passive

W1BG--2D/3D Gain--1175MHz

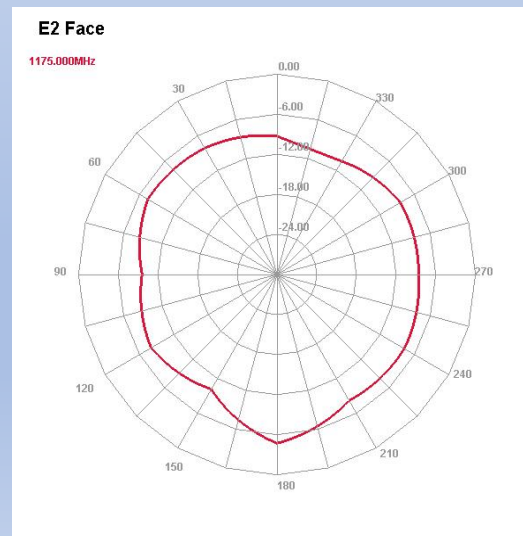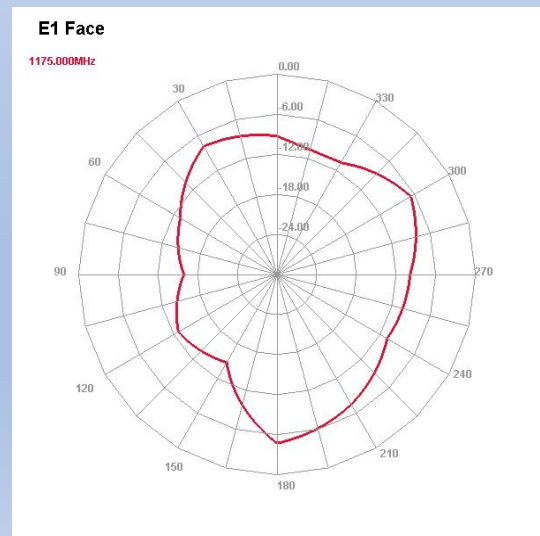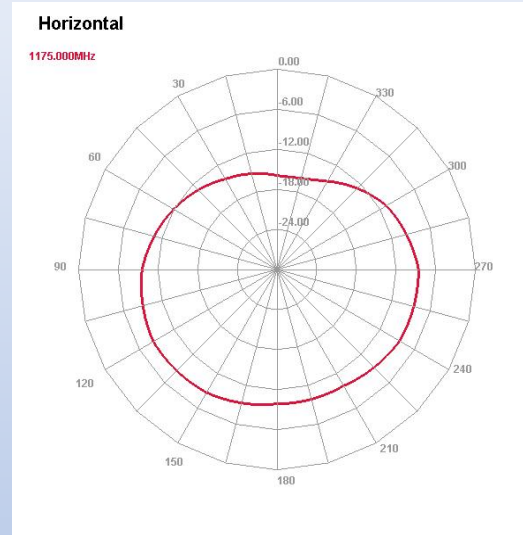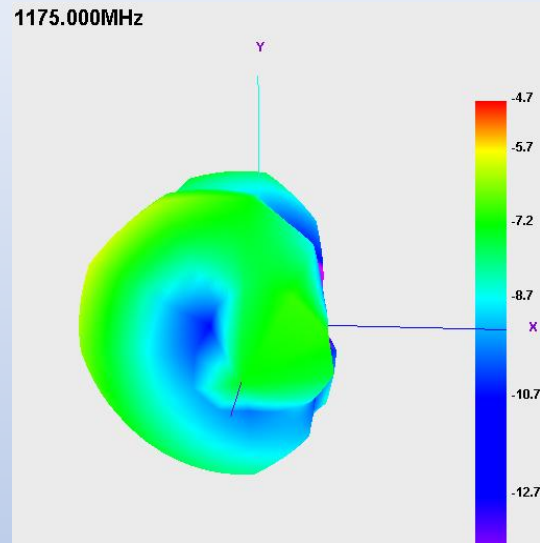





二、ANT Passive

W1BG--2D/3D Gain--2450MHz

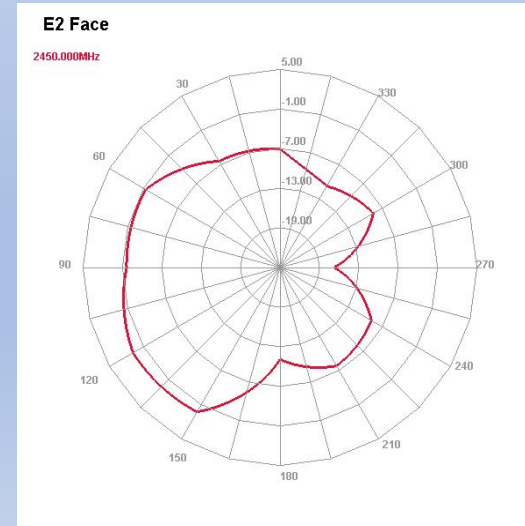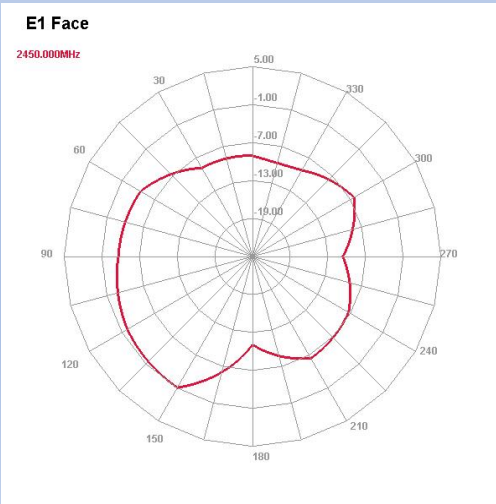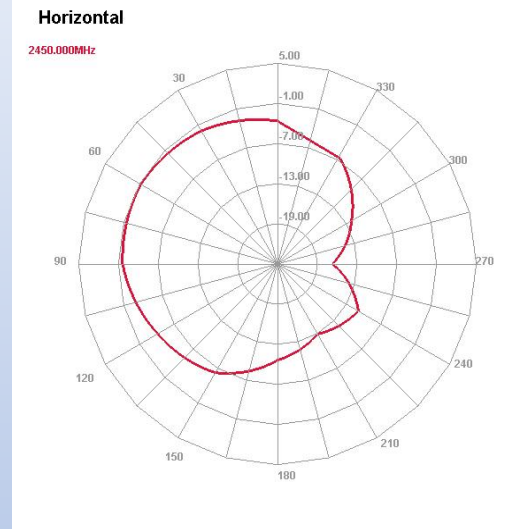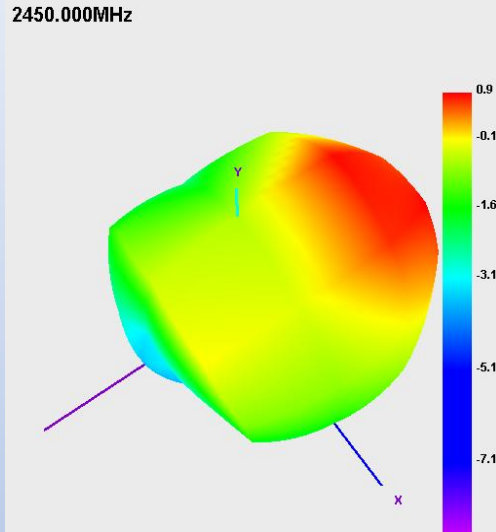


二、ANT Passive

W1BG--2D/3D Gain--5850MHz

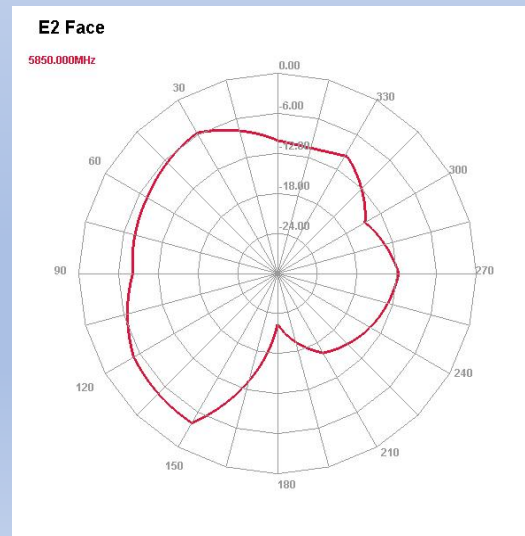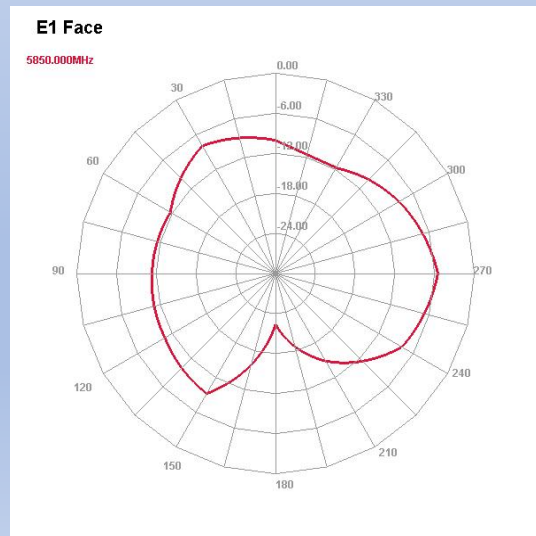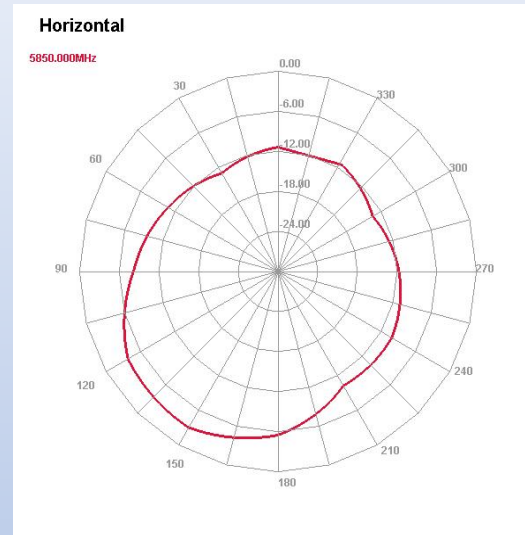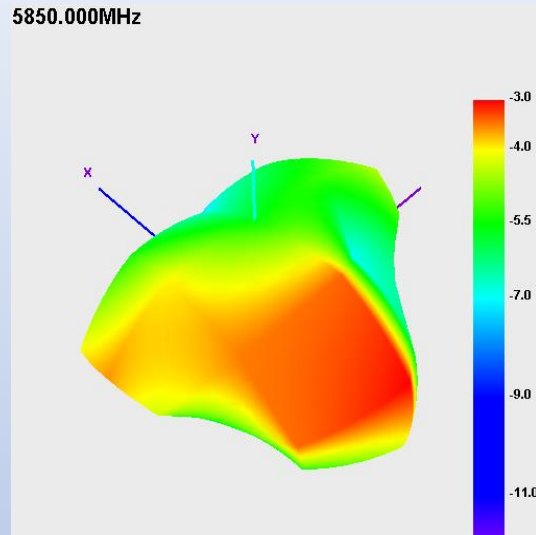


三、Antenna Size

ANT1

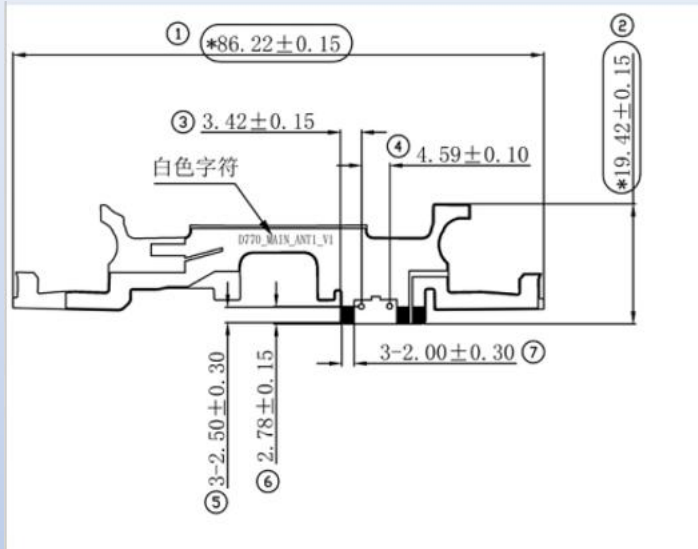

ANT4

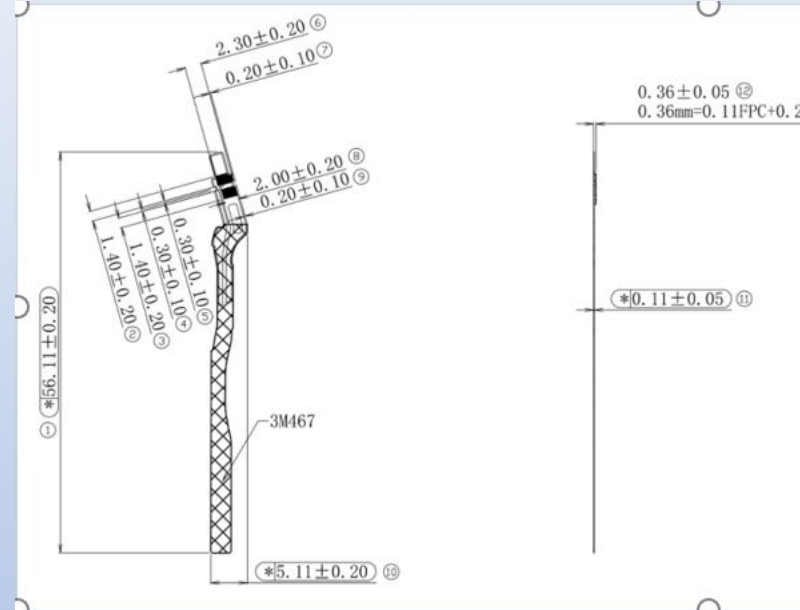



The End